


16:03:39 JAN 26, 2001
 R-8767 DS720i FCC 15.207 CE TS LEAD-HOT
 REF 85.0 dBµV AT 10 dB

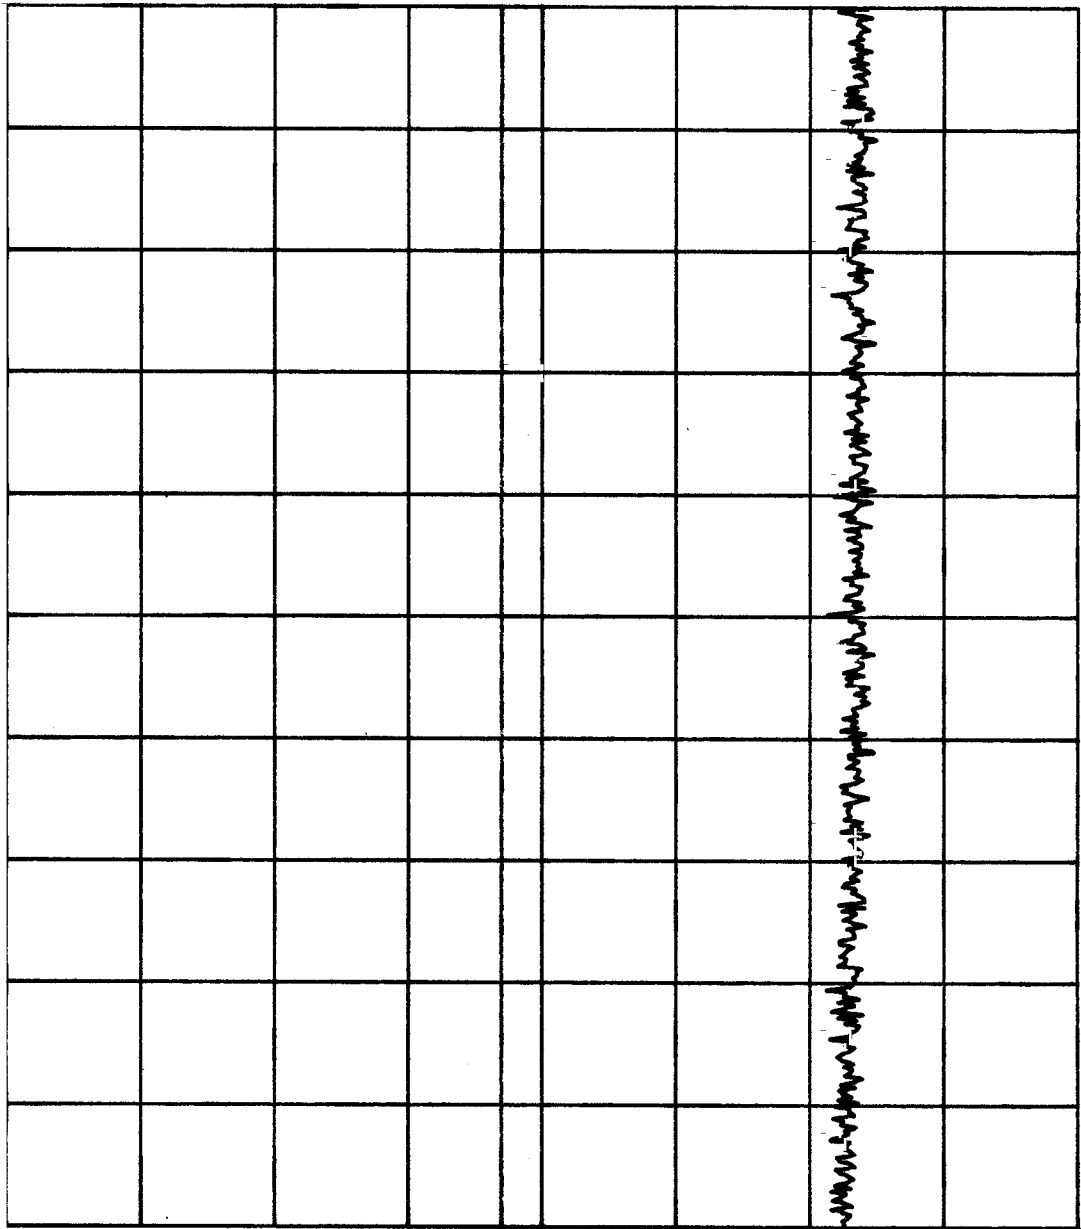

PEAK
 LOG
 10 dB/
 OFFST
 10.0 dB
 DL 48.0 dBµV
 VA SB
 SC FC
 CORR

START 450 KHZ
 #RES BW 9.0 KHZ
 VBW 30 KHZ
 STOP 30.00 MHZ
 #SWP 20.0 sec

Customer: Detection Systems
 Test Sample: 10.525 GHz Field Disturbance Sensor
 Model No: DS720i
 Test Method: FCC 15.207 Conducted Emissions 450 kHz to 30 MHz
 Notes: Lead Tested: Hot
 Detector Function: Peak
 Date: January 26, 2001 Tech: TS Sheet 1 of 2


FCC ID: E5VDS720I



Retlif Testing Laboratories

Report No. R-8767

16:08:41 JAN 26, 2001
 R-8767 DS720i FCC 15.207 CE TS LEAD-Neutral
 REF 85.0 dBμV AT 10 dB

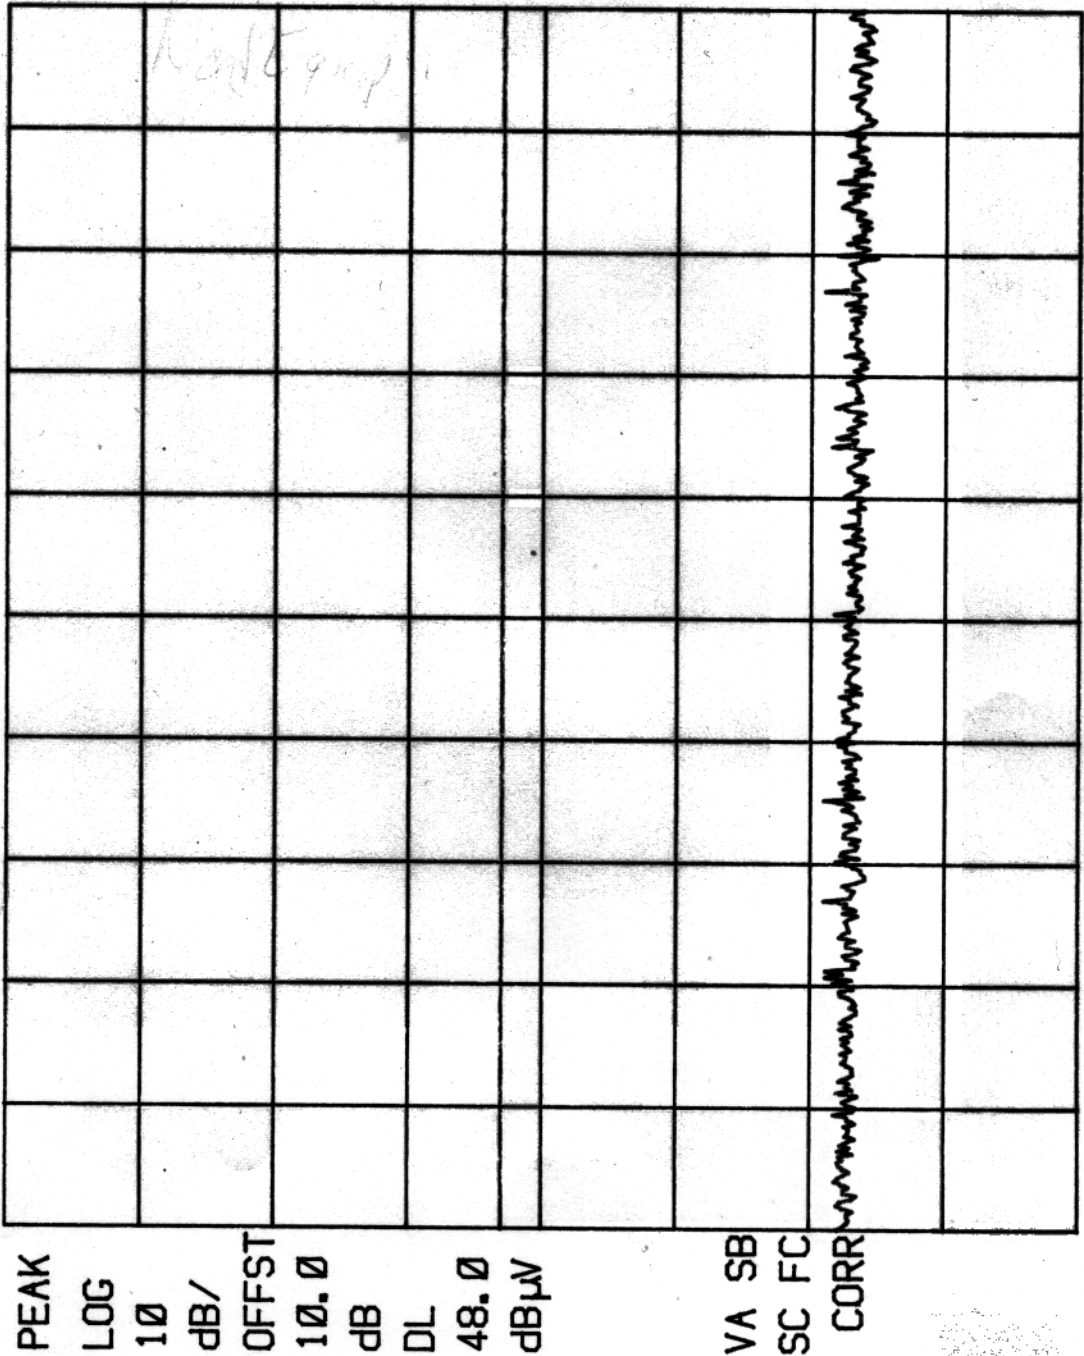

START 450 KHZ
 #RES BW 9.0 KHZ
 VBW 30 KHZ
 STOP 30.00 MHz
 #SWP 20.0 sec

PEAK
 LOG
 10
 dB/
 OFFST
 10.0
 dB
 DL
 48.0
 dBμV
 VA SB
 SC FC
 CORR

Customer:	Detection Systems
Test Sample:	10.525 GHz Field Disturbance Sensor
Model No.:	DS720i
Test Method:	FCC 15.207 Conducted Emissions 450 kHz to 30 MHz
Notes:	Lead Tested: Neutral Detector Function: Peak
Date:	January 26, 2001
Tech:	TS
Sheet:	2 of 2



Retlif Testing Laboratories

Report No. R-8767