


[TestMode: TX high channel]; [Polarity: Vertical]

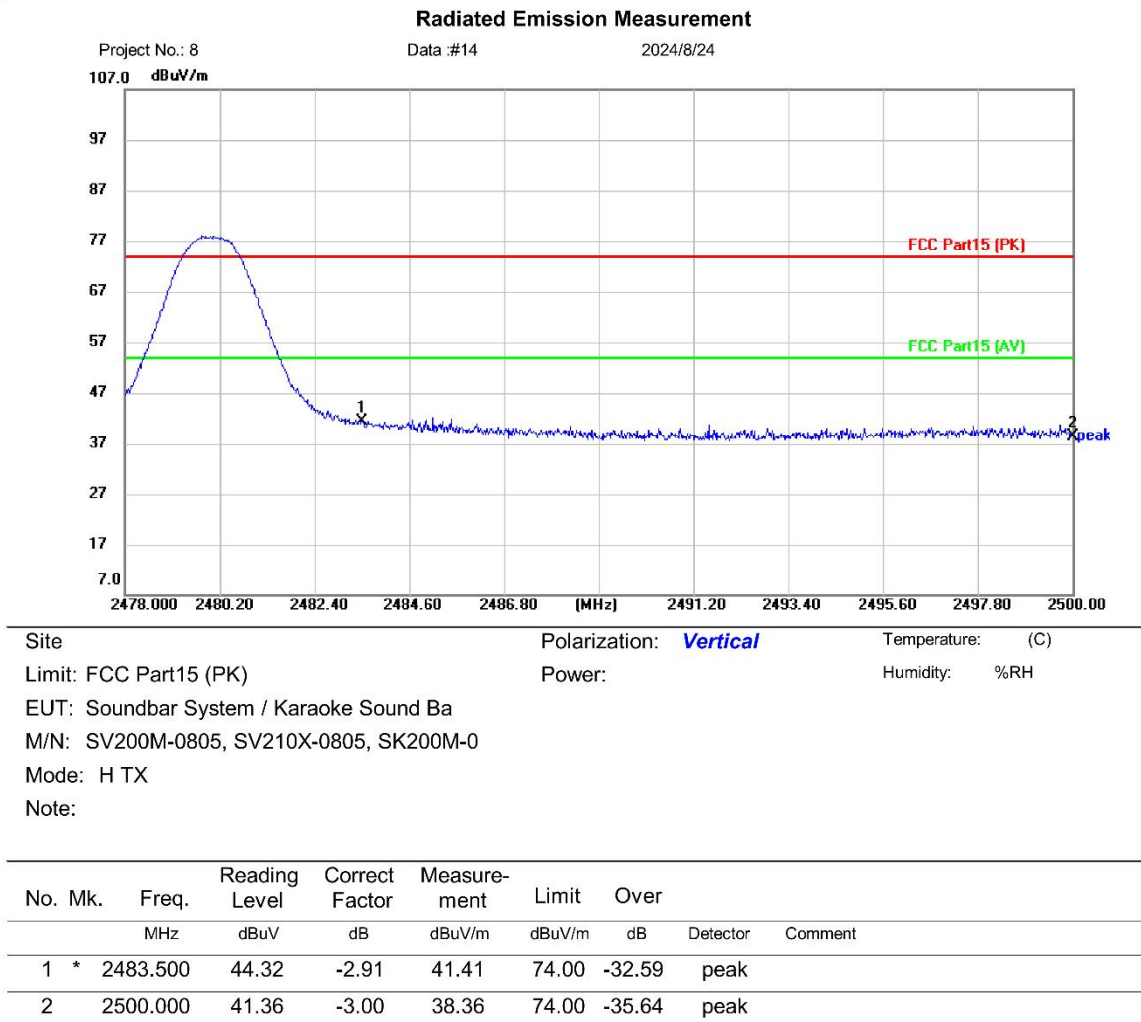


*:Maximum data x:Over limit !:over margin <Reference Only

Receiver: ESR_1 Spectrum Analyzer: FSP40

Antenna: EZ 9120D 1G-18G 2024 Engineer Signature:

Test Result: Pass

[TestMode: TX high channel]; [Polarity: Horizontal]

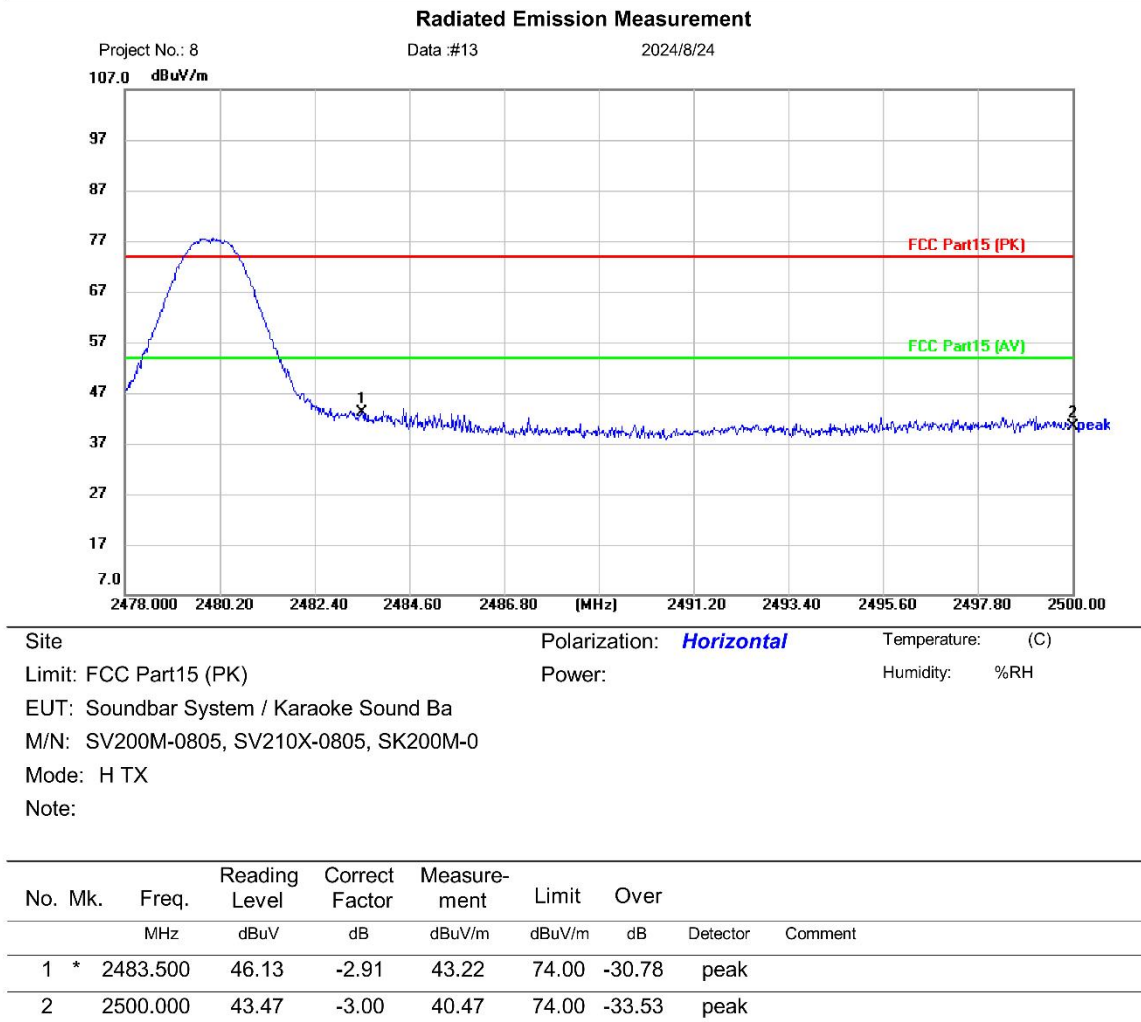

*:Maximum data x:Over limit !:over margin <Reference Only

Receiver: ESR_1 Spectrum Analyzer: FSP40

Antenna: EZ 9120D 1G-18G 2024 Engineer Signature:

Test Result: Pass


13 FIELD STRENGTH OF THE FUNDAMENTAL SIGNAL (15.249(A))

Test Standard	47 CFR Part 15, Subpart C 15.249
Test Method	ANSI C63.10 (2013) Section 6.5&6.6
Test Mode (Pre-Scan)	TX
Test Mode (Final Test)	TX
Tester	Jozu
Temperature	25°C
Humidity	60%

13.1 LIMITS

Frequency	Limit (dB μ V/m @3m)	Remark
2400MHz-2483.5MHz	94.0	Average Value
	114.0	Peak Value

13.2 BLOCK DIAGRAM OF TEST SETUP

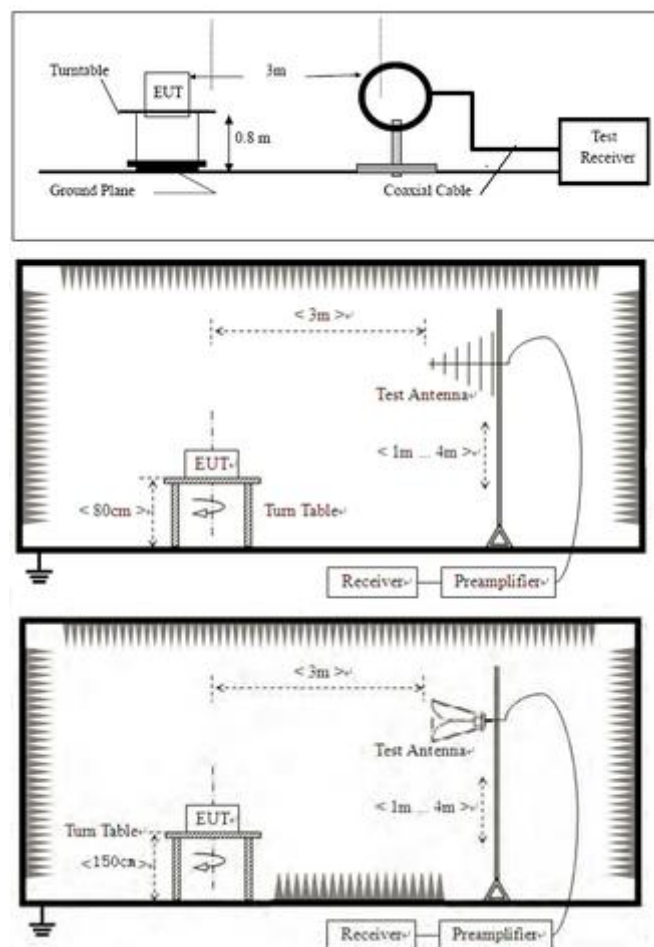

13.3 PROCEDURE

- For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 or 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not

have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

h. Test the EUT in the lowest channel, the middle channel, the Highest channel.

i. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.


j. Repeat above procedures until all frequencies measured was complete.

Remark: Level= Read Level+ Cable Loss+ Antenna Factor- Preamp Factor

13.4 TEST DATA


Peak:

[TestMode: TX low channel]; [Polarity: Horizontal]

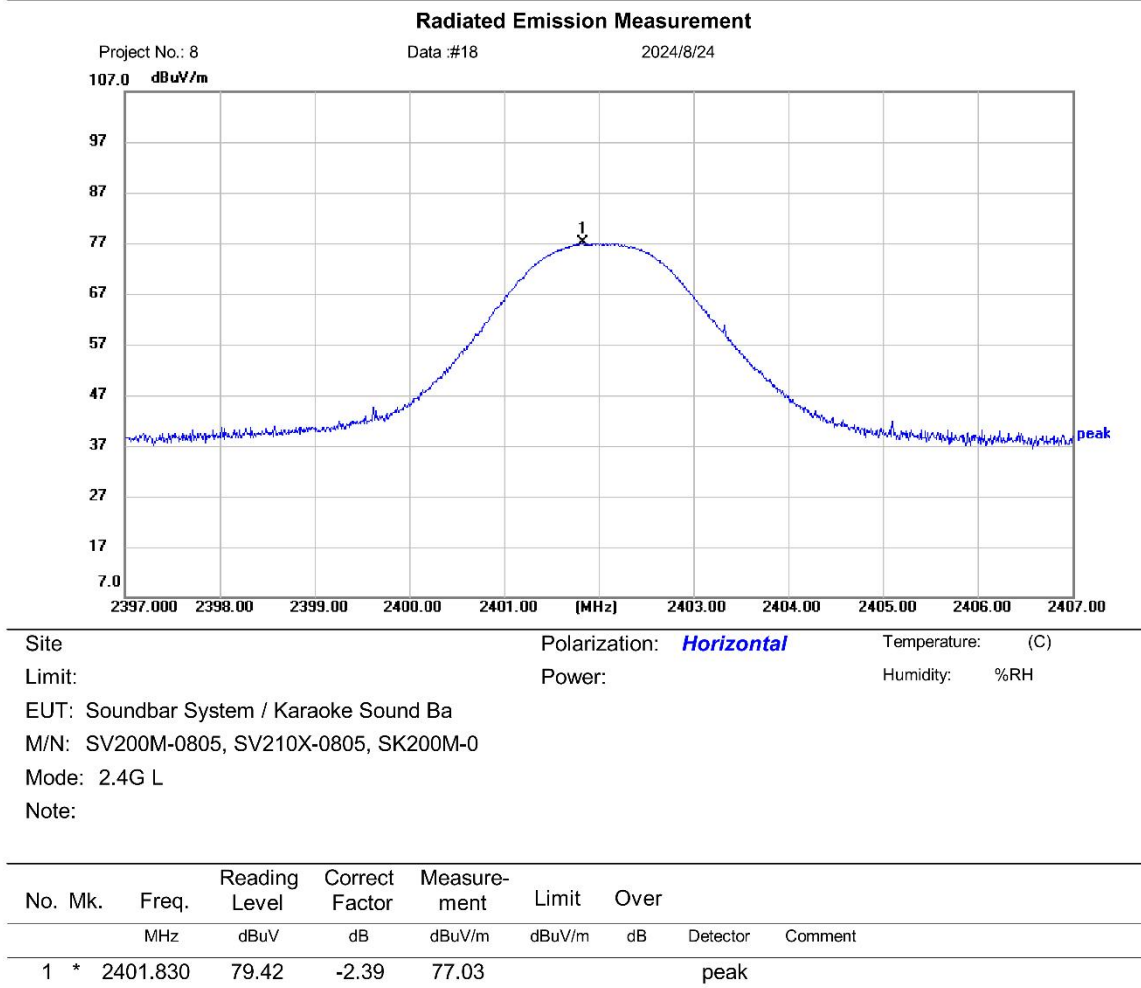**Test Result: Pass, limit=114 dBuV/m**

AVG:

[TestMode: TX low channel]; [Polarity: Horizontal]

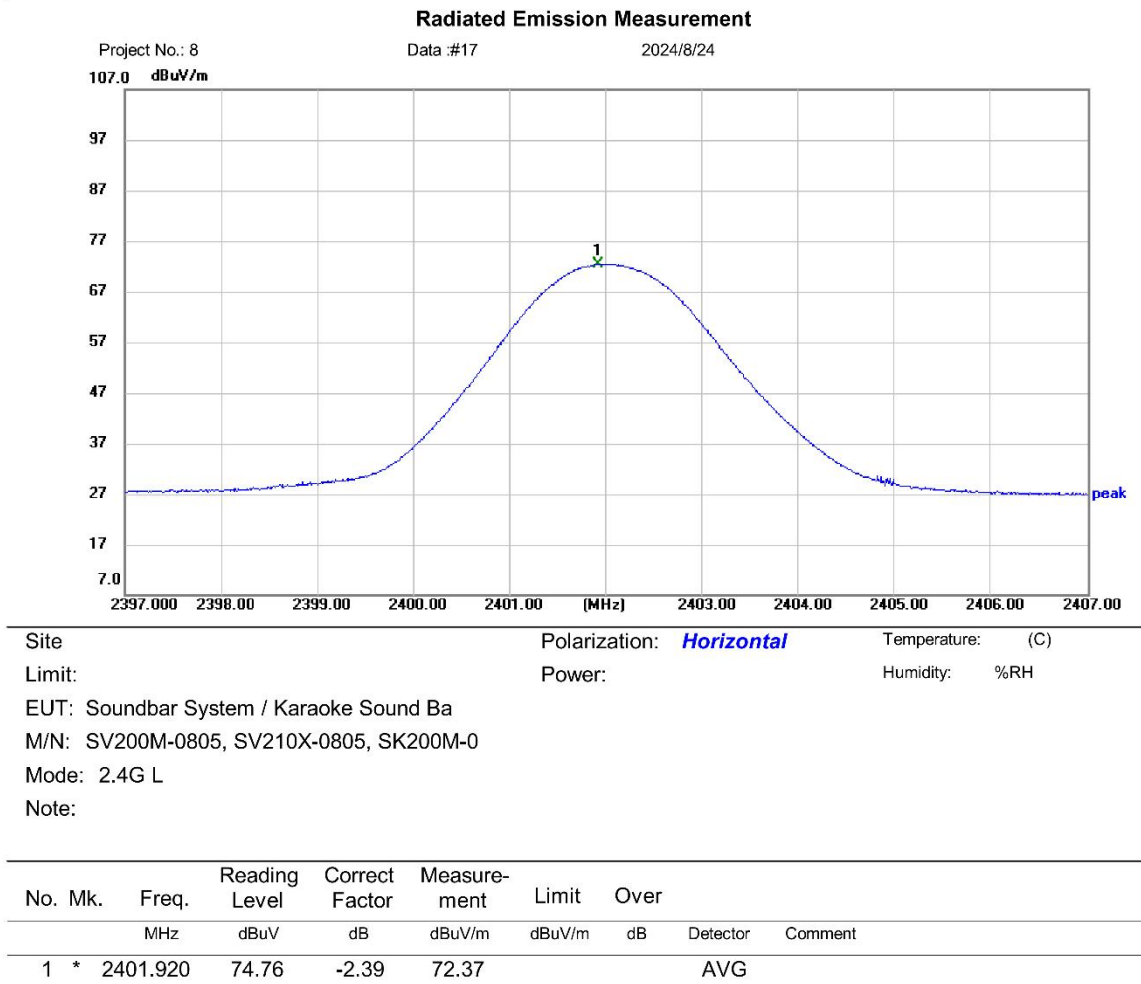

*:Maximum data x:Over limit !:over margin <Reference Only


Receiver: ESR_1 Spectrum Analyzer: FSP40

Antenna: EZ 9120D 1G-18G 2024 Engineer Signature:

Test Result: Pass, limit=94 dBuV/m

PEAK:

[TestMode: TX low channel]; [Polarity: Vertical]

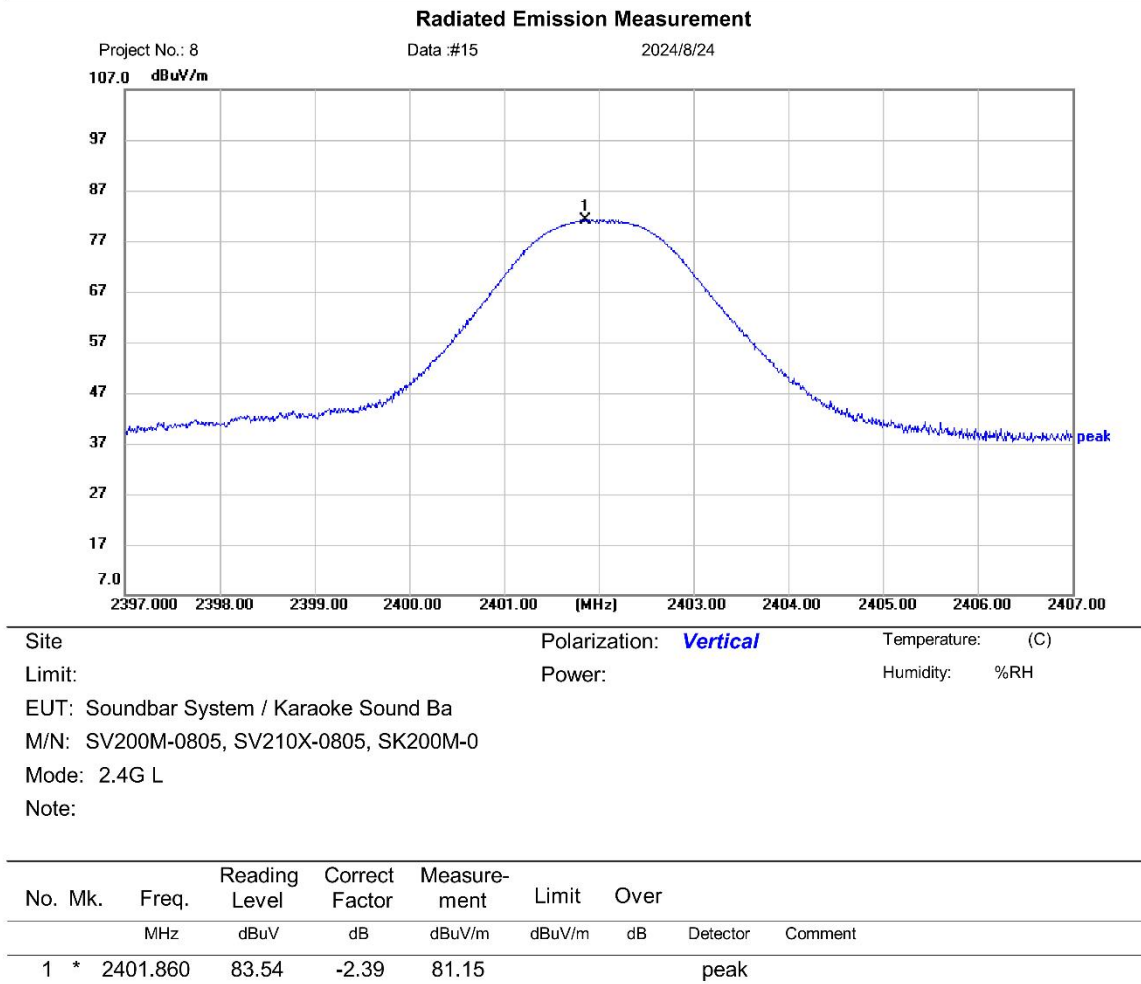

*:Maximum data x:Over limit !:over margin <Reference Only


Receiver: ESR_1 Spectrum Analyzer: FSP40

Antenna: EZ 9120D 1G-18G 2024 Engineer Signature:

Test Result: Pass, limit=114 dBuV/m

AVG:

[TestMode: TX low channel]; [Polarity: Vertical]

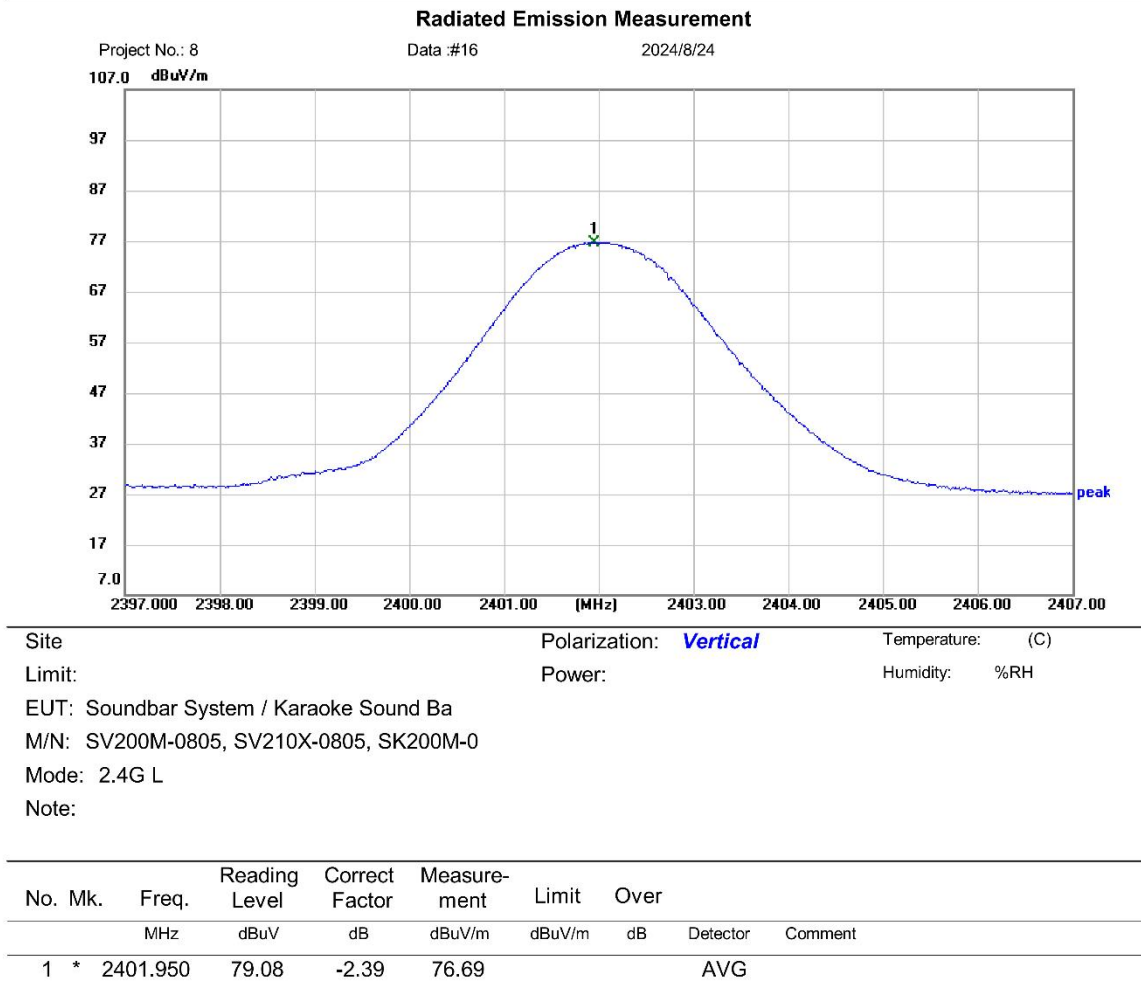

*:Maximum data x:Over limit !:over margin <Reference Only


Receiver: ESR_1 Spectrum Analyzer: FSP40

Antenna: EZ 9120D 1G-18G 2024 Engineer Signature:

Test Result: Pass, limit=94 dBuV/m

Peak:

[TestMode: TX mid channel]; [Polarity: Horizontal]

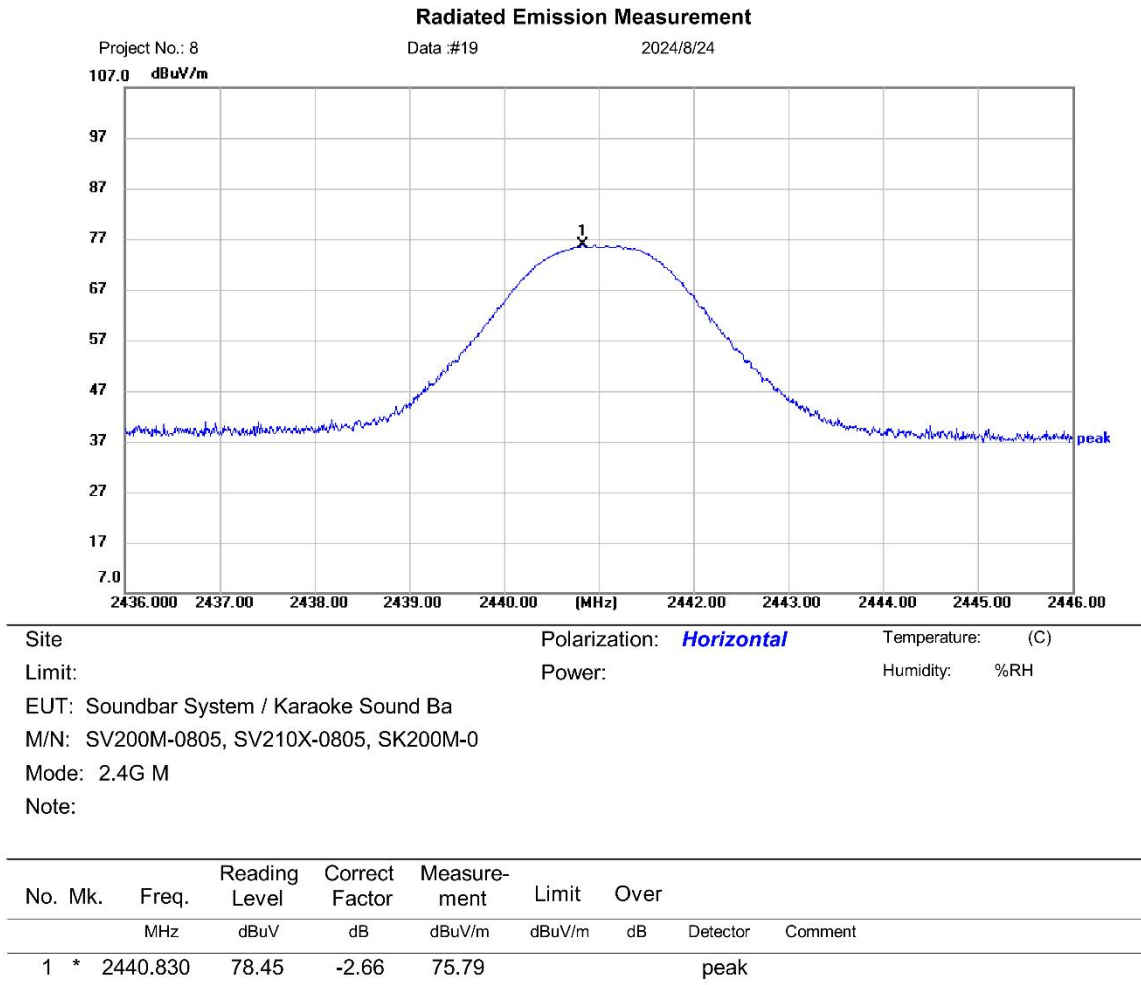

*:Maximum data x:Over limit !:over margin <Reference Only


Receiver: ESR_1 Spectrum Analyzer: FSP40

Antenna: EZ 9120D 1G-18G 2024 Engineer Signature:

Test Result: Pass, limit=114 dBuV/m

AVG:

[TestMode: TX mid channel]; [Polarity: Horizontal]

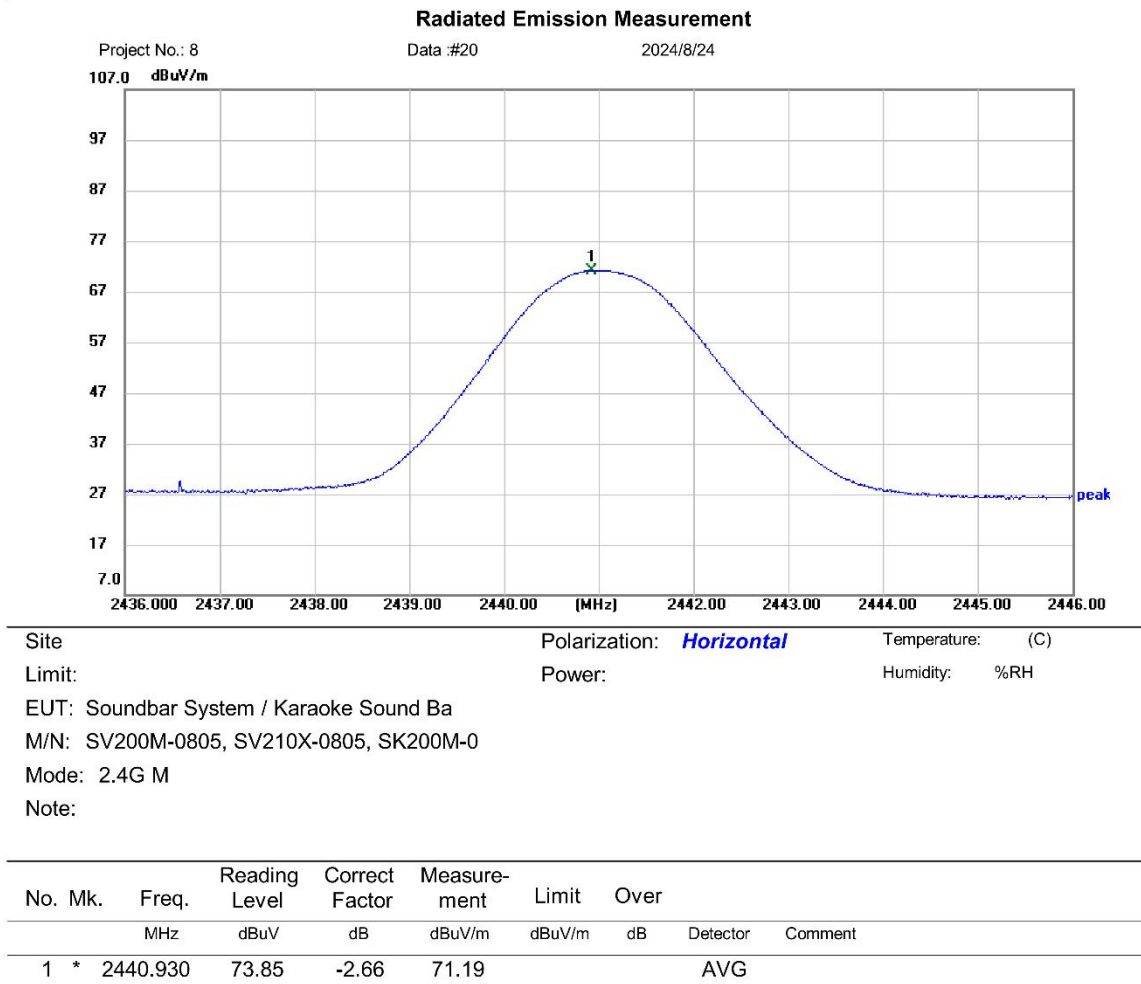

*:Maximum data x:Over limit !:over margin <Reference Only


Receiver: ESR_1 Spectrum Analyzer: FSP40

Antenna: EZ 9120D 1G-18G 2024 Engineer Signature:

Test Result: Pass, limit=94 dBuV/m

PEAK:

[TestMode: TX mid channel]; [Polarity: Vertical]

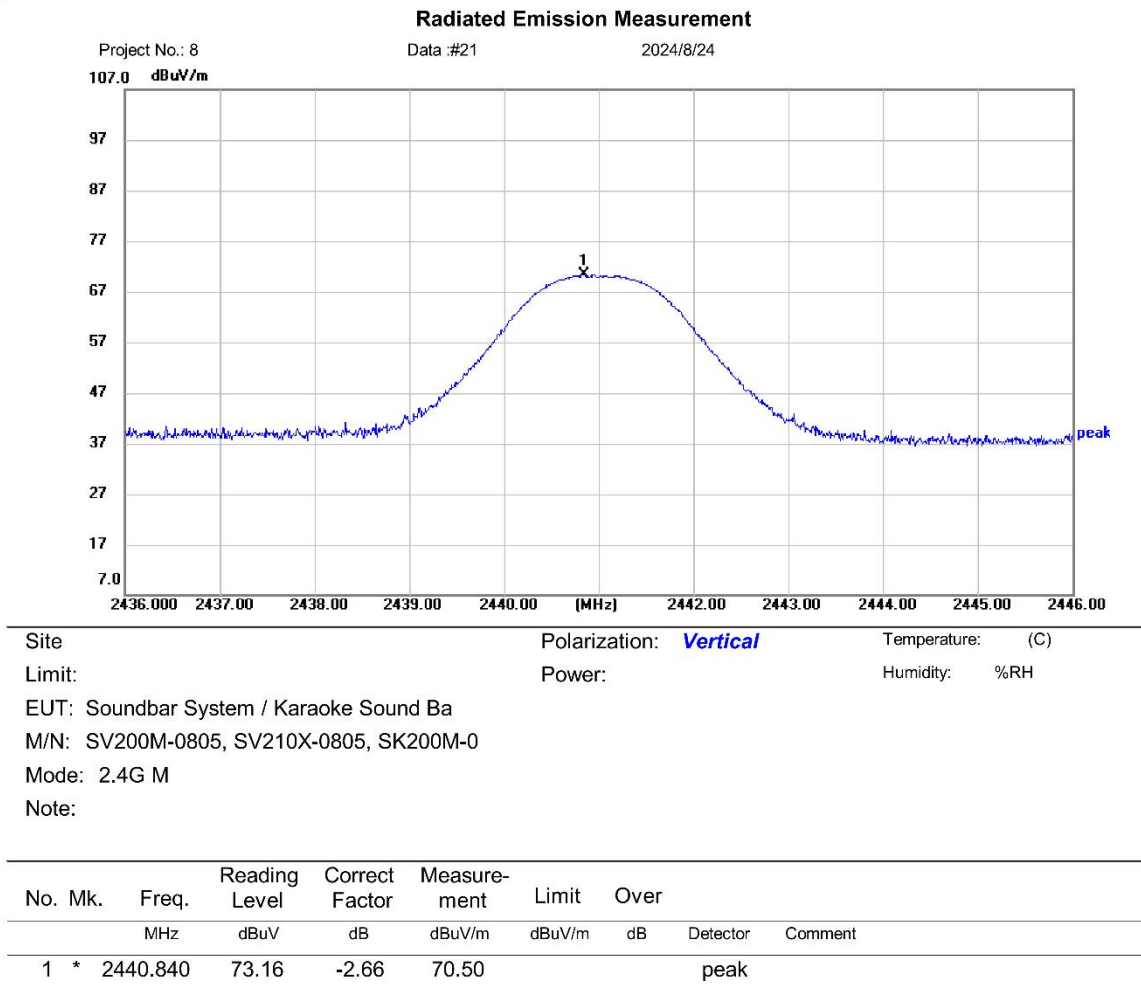

*:Maximum data x:Over limit !:over margin <Reference Only


Receiver: ESR_1 Spectrum Analyzer: FSP40

Antenna: EZ 9120D 1G-18G 2024 Engineer Signature:

Test Result: Pass, limit=114 dBuV/m

AVG:

[TestMode: TX mid channel]; [Polarity: Vertical]

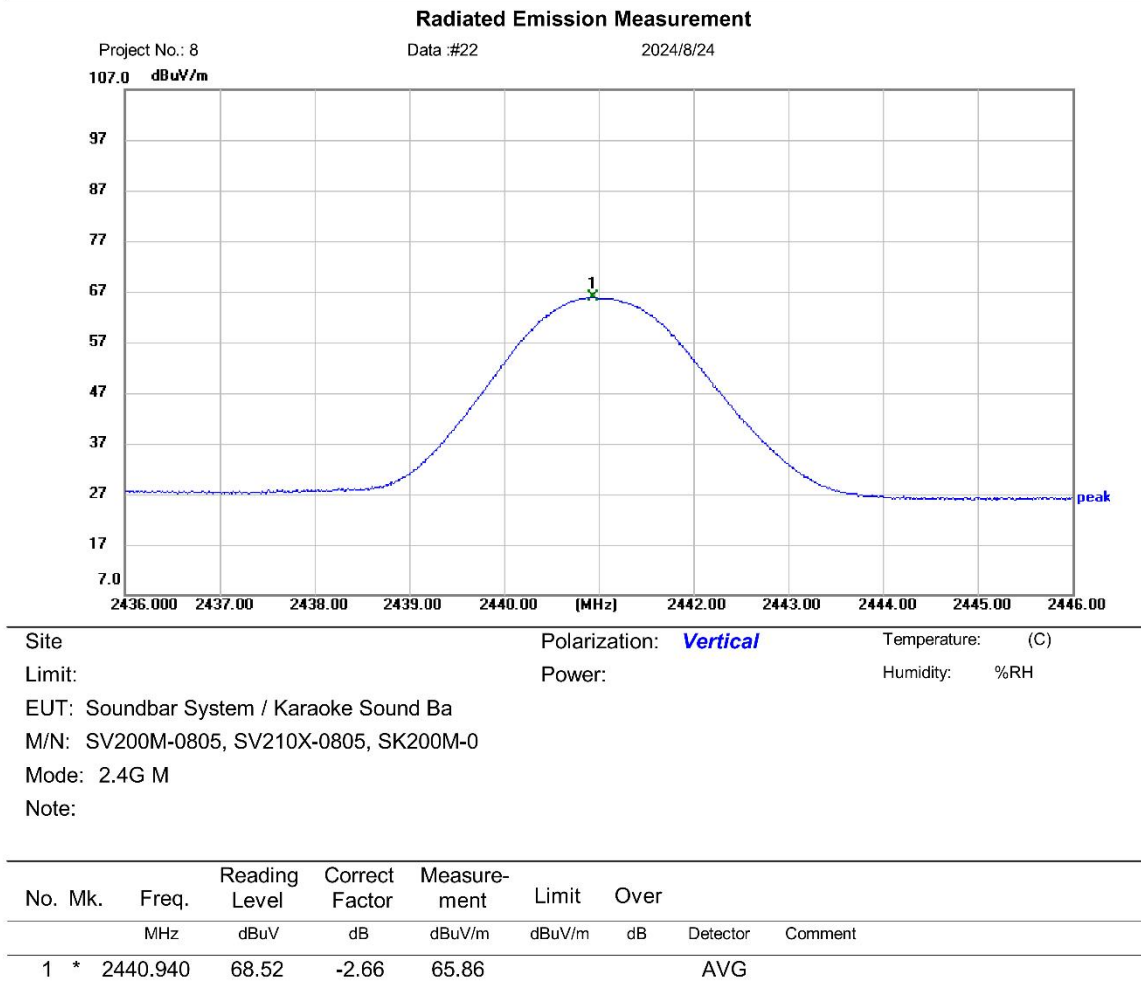

*:Maximum data x:Over limit !:over margin <Reference Only


Receiver: ESR_1 Spectrum Analyzer: FSP40

Antenna: EZ 9120D 1G-18G 2024 Engineer Signature:

Test Result: Pass, limit=94 dBuV/m

Peak:

[TestMode: TX high channel]; [Polarity: Horizontal]

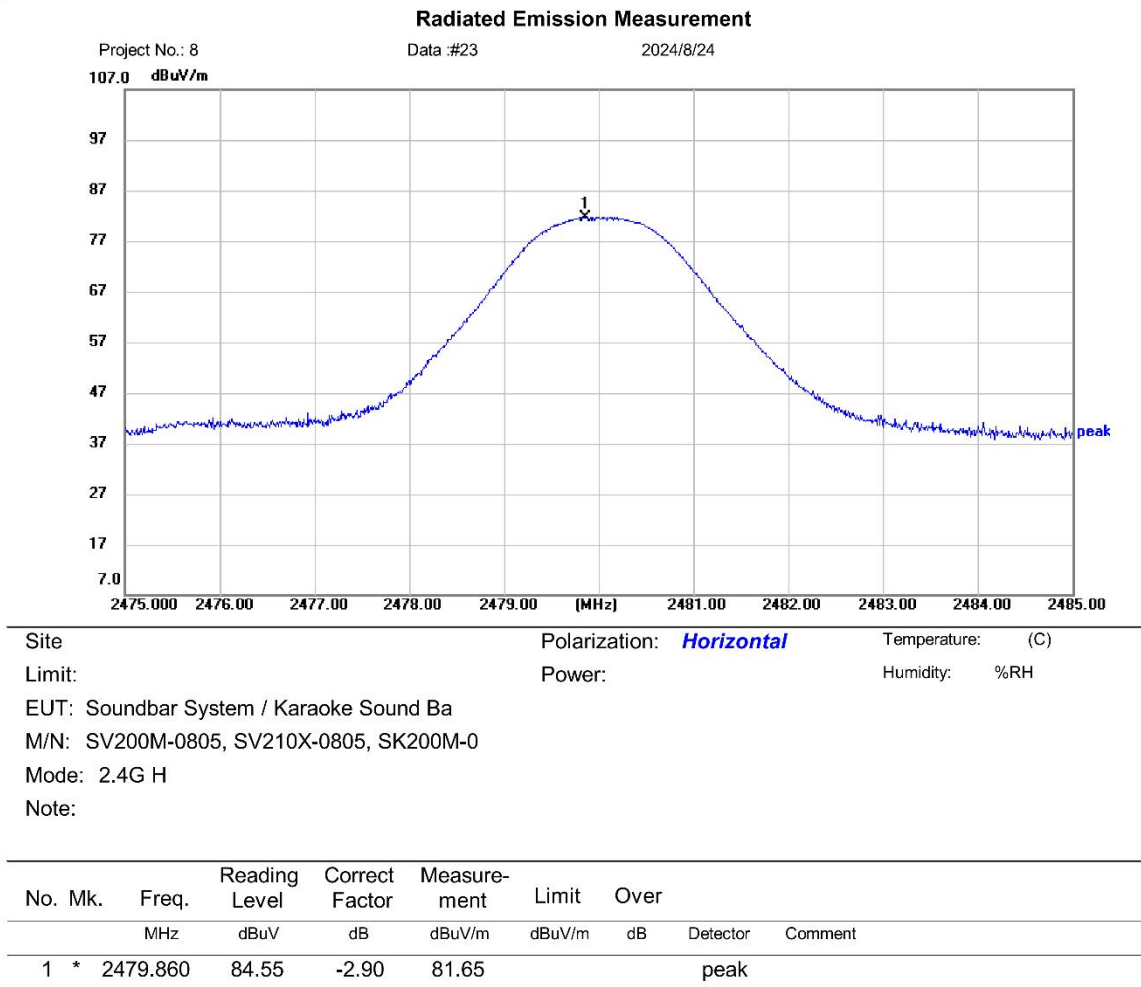

*:Maximum data x:Over limit !:over margin <Reference Only


Receiver: ESR_1 Spectrum Analyzer: FSP40

Antenna: EZ 9120D 1G-18G 2024 Engineer Signature:

Test Result: Pass, limit=114 dBuV/m

AVG:

[TestMode: TX high channel]; [Polarity: Horizontal]

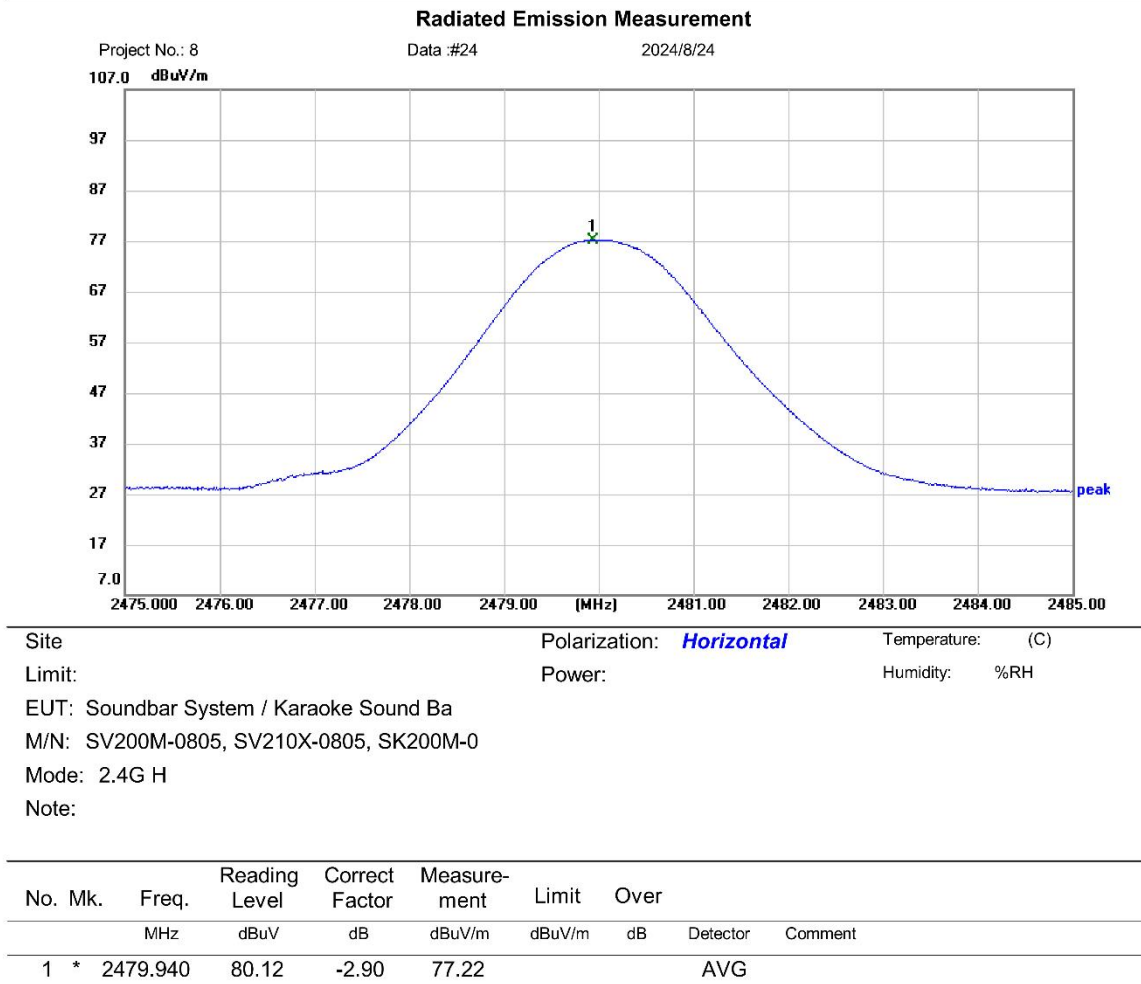

*:Maximum data x:Over limit !:over margin <Reference Only


Receiver: ESR_1 Spectrum Analyzer: FSP40

Antenna: EZ 9120D 1G-18G 2024 Engineer Signature:

Test Result: Pass, limit=94 dBuV/m

PEAK:

[TestMode: TX high channel]; [Polarity: Vertical]

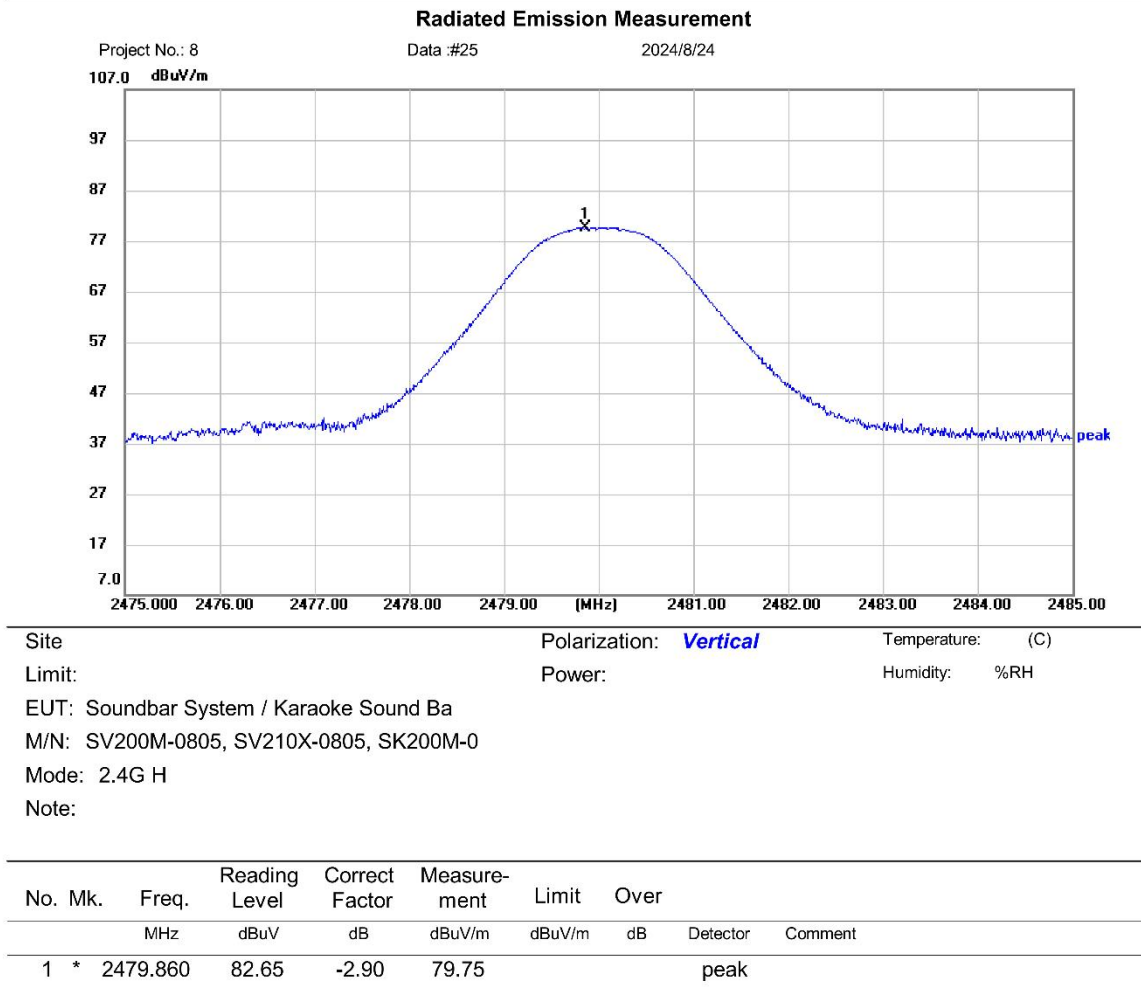

*:Maximum data x:Over limit !:over margin <Reference Only


Receiver: ESR_1 Spectrum Analyzer: FSP40

Antenna: EZ 9120D 1G-18G 2024 Engineer Signature:

Test Result: Pass, limit=114 dBuV/m

AVG:

[TestMode: TX high channel]; [Polarity: Vertical]

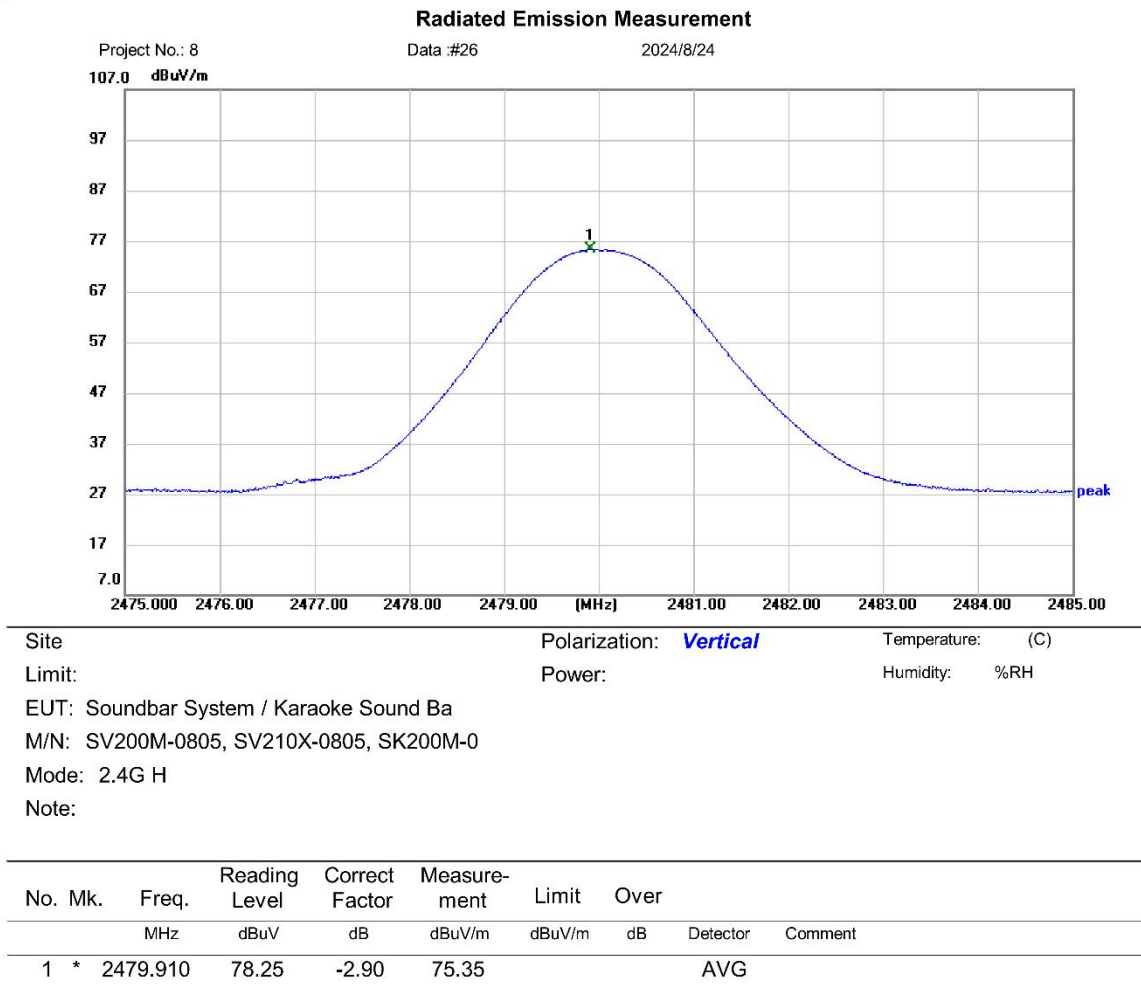

*:Maximum data x:Over limit !:over margin <Reference Only

Receiver: ESR_1 Spectrum Analyzer: FSP40

Antenna: EZ 9120D 1G-18G 2024 Engineer Signature:

Test Result: Pass, limit=94 dBuV/m


14 20DB BANDWIDTH

Test Standard	47 CFR Part 15, Subpart C 15.249
Test Method	ANSI C63.10 (2013) Section 6.9
Test Mode (Pre-Scan)	TX
Test Mode (Final Test)	TX
Tester	Jozu
Temperature	25°C
Humidity	60%

14.1 LIMITS

Limit:	N/A
--------	-----

14.2 BLOCK DIAGRAM OF TEST SETUP

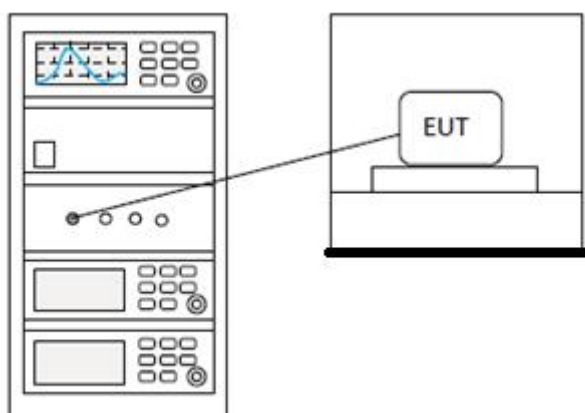

14.3 TEST DATA

Pass: Please Refer To Appendix: Appendix1 For Details

15 ANTENNA REQUIREMENT

Test Standard	47 CFR Part 15, Subpart C 15.249
Test Method	N/A

15.1 CONCLUSION

Standard Requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit permanently attached antenna or of an so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

EUT Antenna:


The antenna is integrated on the main PCB and no consideration of replacement. The best case gain of the antenna is 5.41dBi.

16 APPENDIX


-20dB Bandwidth

Condition	Mode	Frequency (MHz)	Antenna	-20 dB Bandwidth (MHz)	Limit -20 dB Bandwidth (MHz)	Verdict
NVNT	GFSK	2402	Ant1	0.8677	N/A	Pass
NVNT	GFSK	2441	Ant1	0.8683	N/A	Pass
NVNT	GFSK	2480	Ant1	0.8637	N/A	Pass


-20dB Bandwidth NVNT GFSK 2402MHz Ant1

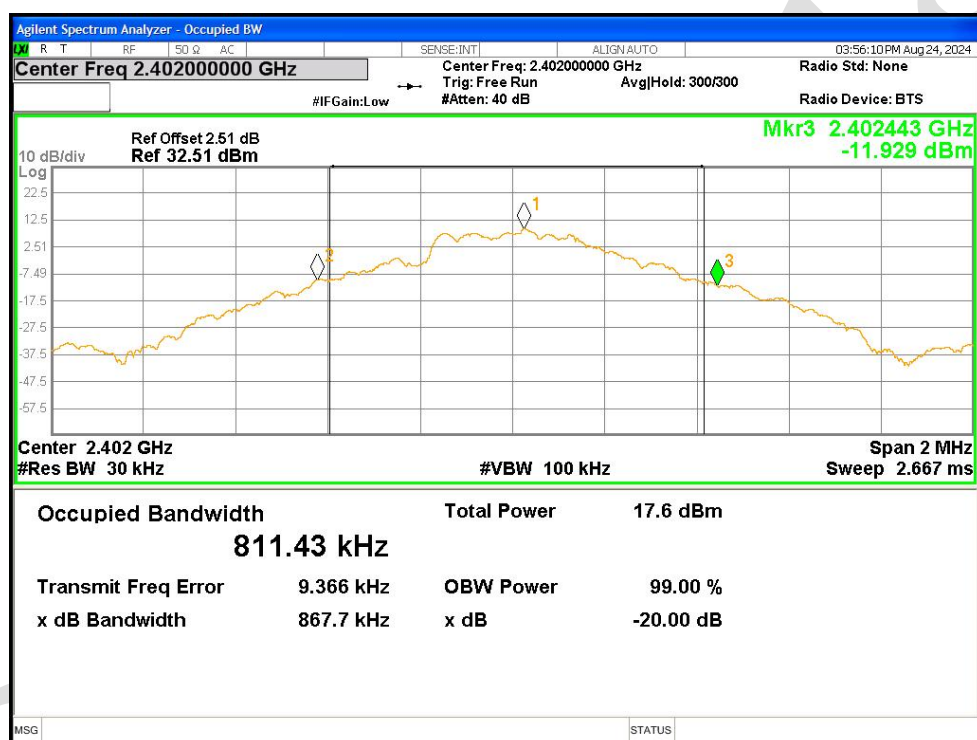

-20dB Bandwidth NVNT GFSK 2441MHz Ant1

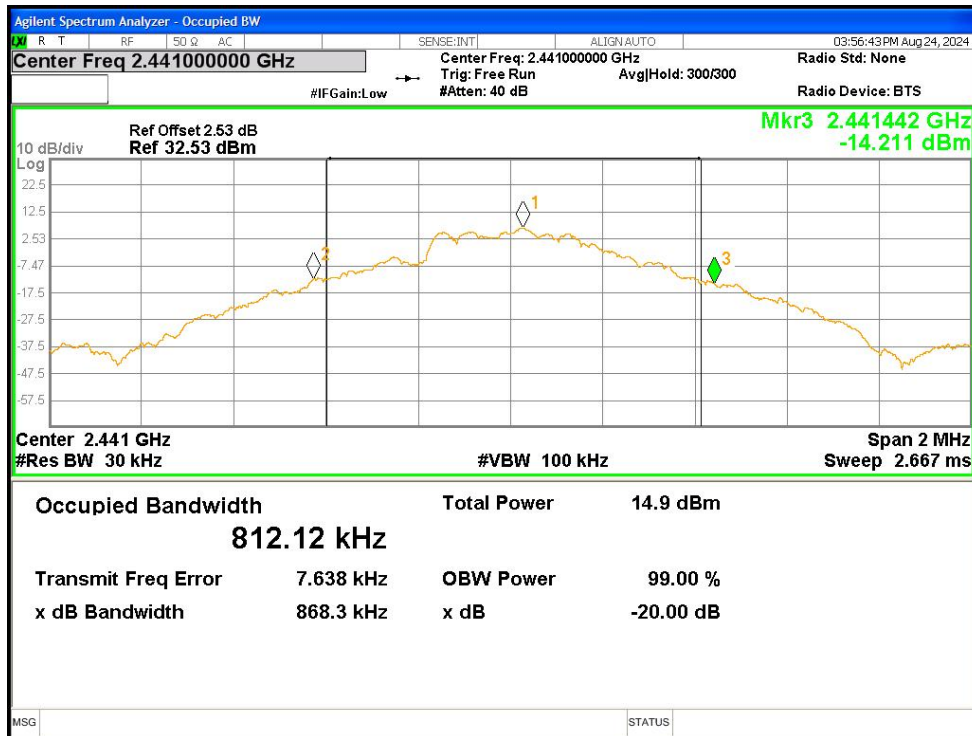

-20dB Bandwidth NVNT GFSK 2480MHz Ant1

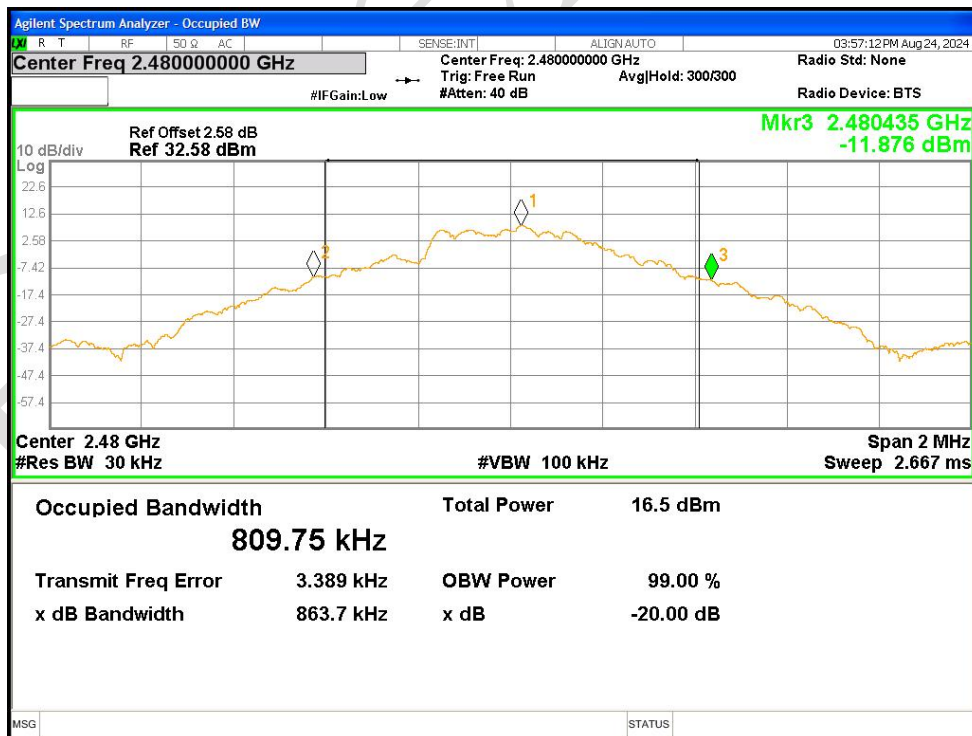


APPENDIX A: PHOTOGRAPHS OF TEST SETUP

Conducted emissions at AC power line (150kHz-30MHz)



Radiated Emissions (30MHz-1GHz)

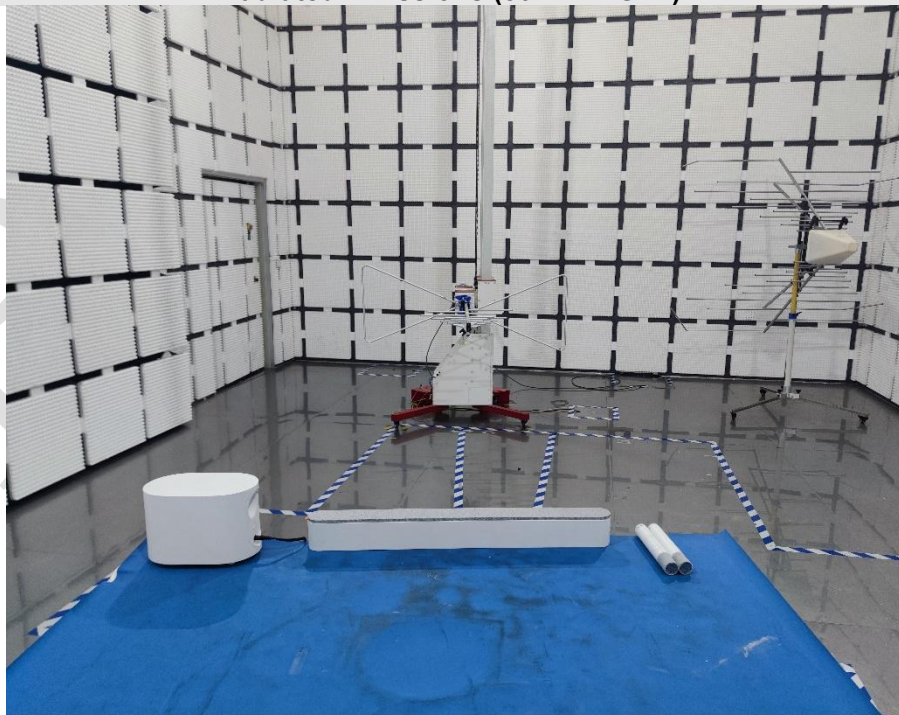

Radiated Emissions (above 1GHz)



APPENDIX B: PHOTOGRAPHS OF EUT

Reference to the test report no. BLA-EMC-202406-A7101

----END OF REPORT----

The test report is effective only with both signature and specialized stamp, The result(s) shown in this report refer only to the sample(s) tested. Without written approval of BlueAsia, this report can't be reproduced except in full.