

**ELECTROMAGNETIC EMISSIONS COMPLIANCE REPORT  
INTENTIONAL RADIATOR CERTIFICATION TO  
FCC PART 15 SUBPART C REQUIREMENT**

*OF*

**SOUND BAR**

**MODEL No.: HSB1803, CSMP90**

**BRAND NAME: VTREK, COBY**

**FCC ID: ESXCSMP90**

**REPORT NO: KAD120320032F**

**ISSUE DATE: April 13, 2012**

*Prepared for*

**GUANGZHOU PANYU JUDA CAR AUDIO EQUIPMENT CO., LTD.  
Vtrek Dewei Industrial Garden, Shibe Industrial Road, Dashi Town,  
Panyu Borough, Guangzhou, Guangdong, China**

*Prepared by*

**DONGGUAN EMTEK CO., LTD.**

**No.281, Guantai Road, Nancheng District,  
Dongguan, Guangdong, China**

**TEL: 86-769-22807078**

**FAX: 86-769-22807079**

### VERIFICATION OF COMPLIANCE

Applicant:	GUANGZHOU PANYU JUDA CAR AUDIO EQUIPMENT CO., LTD. Vtrek Dewei Industrial Garden, Shibe Industrial Road, Dashi Town, Panyu Borough, Guangzhou, Guangdong, China
Manufacturer:	GUANGZHOU PANYU JUDA CAR AUDIO EQUIPMENT CO., LTD. Vtrek Dewei Industrial Garden, Shibe Industrial Road, Dashi Town, Panyu Borough, Guangzhou, Guangdong, China
Product Description:	SOUND BAR
Brand Name:	VTREK, COBY
Model Number:	HSB1803, CSMP90 (Note: These samples are the same except trade name and model number, so we prepare HSB1803 for EMC test.)
Serial Number:	N/A
File Number:	KAD120320032F
Date of Test:	March 20, 2012 to April 13, 2012

#### We hereby certify that:

The above equipment was tested by DONGGUAN EMTEK CO., LTD. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.4 (2009) and the energy emitted by the sample EUT tested as described in this report is in compliance with conducted and radiated emission limits of FCC Rules Part 15.247.

The test results of this report relate only to the tested sample identified in this report.

*Approved By*



---

*Sam Lv / Q.A. Manager*  
**DONGGUAN EMTEK CO., LTD.**

## Table of Contents

<b>1.</b>	<b>GENERAL INFORMATION.....</b>	<b>5</b>
1.1	PRODUCT DESCRIPTION.....	5
1.2	RELATED SUBMITTAL(S) / GRANT (S) .....	5
1.3	TEST METHODOLOGY.....	5
1.4	SPECIAL ACCESSORIES .....	5
1.5	EQUIPMENT MODIFICATIONS .....	5
1.6	TEST FACILITY .....	6
<b>2.</b>	<b>SYSTEM TEST CONFIGURATION .....</b>	<b>7</b>
2.1	EUT CONFIGURATION .....	7
2.2	EUT EXERCISE .....	7
2.3	TEST PROCEDURE.....	7
2.4	LIMITATION .....	7
2.5	CONFIGURATION OF TESTED SYSTEM .....	11
<b>3.</b>	<b>SUMMARY OF TEST RESULTS .....</b>	<b>12</b>
<b>4.</b>	<b>DESCRIPTION OF TEST MODES .....</b>	<b>12</b>
<b>5.</b>	<b>CONDUCTED EMISSIONS TEST .....</b>	<b>13</b>
5.1	MEASUREMENT PROCEDURE:.....	13
5.2	TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION) .....	13
5.3	MEASUREMENT EQUIPMENT USED: .....	13
5.4	MEASUREMENT RESULT: .....	13
5.5	CONDUCTED MEASUREMENT PHOTOS:.....	16
<b>6.</b>	<b>RADIATED EMISSION TEST .....</b>	<b>17</b>
6.1	MEASUREMENT PROCEDURE.....	17
6.2	TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION) .....	18
6.3	MEASUREMENT EQUIPMENT USED: .....	19
6.4	MEASUREMENT RESULT.....	20
6.5	RADIATED MEASUREMENT PHOTOS:.....	28
<b>7.</b>	<b>CHANNEL SEPARATION TEST .....</b>	<b>29</b>
7.1	MEASUREMENT PROCEDURE.....	29
7.2	TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION) .....	29
7.3	MEASUREMENT EQUIPMENT USED: .....	29
7.4	MEASUREMENT RESULTS:.....	29
<b>8.</b>	<b>20DB BANDWIDTH TEST .....</b>	<b>32</b>
8.1	MEASUREMENT PROCEDURE.....	32
8.2	TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION) .....	32
8.3	MEASUREMENT EQUIPMENT USED: .....	32

8.4 MEASUREMENT RESULTS:..... 32

**9. QUANTITY OF HOPPING CHANNEL TEST..... 35**

9.1 MEASUREMENT PROCEDURE..... 35

9.2 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION) ..... 35

9.3 MEASUREMENT EQUIPMENT USED: ..... 35

9.4 MEASUREMENT RESULTS:..... 35

**10. TIME OF OCCUPANCY (DWELL TIME) TEST ..... 37**

10.1 TEST DESCRIPTION ..... 37

10.2 TEST REQUIREMENTS / LIMITS ..... 37

10.3 TEST PROTOCOL ..... 37

10.4 TEST RESULT: DWELL TIME..... 37

**11. MAXIMUM PEAK OUTPUT POWER TEST ..... 40**

11.1 MEASUREMENT PROCEDURE..... 40

11.2 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION) ..... 40

11.3 MEASUREMENT EQUIPMENT USED: ..... 40

11.4 MEASUREMENT RESULTS:..... 40

**12. BAND EDGE TEST ..... 43**

12.1 MEASUREMENT PROCEDURE..... 43

12.2 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION) ..... 43

12.3 MEASUREMENT EQUIPMENT USED: ..... 43

12.4 MEASUREMENT RESULTS:..... 43

**13. RF ANTENNA CONDUCTED SPURIOUS EMISSIONS ..... 45**

13.1 TEST REQUIREMENT: ..... 45

13.2 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION) ..... 45

13.3 MEASUREMENT EQUIPMENT USED: ..... 45

13.4 RESULTS: ..... 45

**14. ANTENNA APPLICATION..... 48**

14.1 ANTENNA REQUIREMENT ..... 48

14.2 RESULT ..... 48

**15. RF EXPOSURE EVALUATION ..... 49**

15.1 FRIIS TRANSMISSION FORMULA:  $P_D=(P_{OUT}*G)/(4*\pi*R^2)$  ..... 49

15.2 MEASUREMENT RESULT..... 49

## 1. GENERAL INFORMATION

### 1.1 Product Description

The GUANGZHOU PANYU JUDA CAR AUDIO EQUIPMENT CO., LTD. Model: HSB1803 (referred to as the EUT in this report) The EUT is an short range, lower power, SOUND BAR designed as an Input Device. It is designed by way of utilizing the GFSK modulation achieves the system operating.

A major technical descriptions of EUT is described as following:

- A). Operation Frequency: 2402-2480MHz
- B). Modulation: GFSK
- C). Number of Channel: 79
- D). Channel space: 1MHz
- E). Rating RF Output Power: -5.39dBm (Max)
- F). Antenna Type: Internal PCB antenna
- G). Antenna GAIN: 4 dBi
- H). Input Rating: AC 110-240V, 50/60Hz, 20W

### 1.2 Related Submittal(s) / Grant (s)

This submittal(s) (test report) is intended for FCC ID: ESXCSMP90 filing to comply with Section 15.247 of the FCC Part 15, Subpart C Rules.

### 1.3 Test Methodology

Both conducted and radiated testing were performed according to the procedures in ANSI C63.4 (2009). Radiated testing was performed at an antenna to EUT distance 3 meters.

### 1.4 Special Accessories

Not available for this EUT intended for grant.

### 1.5 Equipment Modifications

Not available for this EUT intended for grant.

## 1.6 Test Facility

### Site Description

EMC Lab. : Accredited by FCC, Aug. 18, 2011  
The Certificate Number is 247565.

Accredited by Industry Canada, January 13, 2011  
The Certificate Registration Number. is 46405-9444

Name of Firm : DONGGUAN EMTEK CO., LTD.

Site Location : No.281, Guantai Road, Nancheng District,  
Dongguan, Guangdong, China

## 2. System Test Configuration

### 2.1 EUT Configuration

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

### 2.2 EUT Exercise

The Transmitter was operated in the normal operating mode. the Tx frequency was fixed which was for the purpose of the measurements.

### 2.3 Test Procedure

#### 2.3.1 Conducted Emissions

The EUT is a placed on as turn table which is 0.8 m above ground plane. According to the requirements in Section 13.1.4.1 of ANSI C63.4-2009. Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using CISPR Quasi-Peak and average detector mode.

#### 2.3.2 Radiated Emissions

The EUT is a placed on as turn table which is 0.8 m above ground plane. The turn table shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the max. emission, the relative positions of this hand-held transmitter(EUT) was rotated through three orthogonal axes according to the requirements in Section 13.1.4.1 of ANSI C63.4-2009.

### 2.4 Limitation

#### (1) Channel Separation test

FCC Part 15, Subpart C Section 15.247(a)(1). Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25kHz or the 20 Bandwidth of the hopping channel, whichever is greater.

Frequency Range (MHz)	Limit(kHz)
902-928	>25kHz
2400-2483.5	>25kHz
5725-5850	>25kHz

**(2) 20dB Bandwidth**

Frequency Range(MHz)	Quantity of Hopping Channel	Limit(kHz)			
		50	25	15	75
902-928		<250	>250	NA	NA
2400-2483.5		NA	NA	>1000	<1000

**(3) Quantity of Hopping Channel**

FCC Part 15, Subpart C Section 15.247

Frequency Range (MHz)	Limit(Quantity of Hopping Channel)			
	20dB bandwidth <250kHz	20dB bandwidth >250kHz	20dB bandwidth <1MHz	20dB bandwidth >1MHz
902-928	50	25	NA	NA
2400-2483.5	NA	NA	75	15
5725-5850	NA	NA	75	NA

**(4) Time of Occupancy(Dwell Time)**

FCC Part 15, Subpart C Section 15.247

Frequency Range (MHz)	LIMIT(rms)		
	20dB bandwidth <250kHz(50Channel)	20dB bandwidth >250kHz(25Channel)	20dB bandwidth <1MHz(75Channel)
902-928	400(20S)	400(10S)	NA
2400-2483.5	NA	NA	400(30S)
5725-5850	NA	NA	400(30S)

**Note:** The “( )” is all channel’s average time of occupancy.

**(5) Maximum Peak Output Power**

FCC Part 15, Subpart C Section 15.247

Frequency Range (MHz)	Quantity of Hopping Channel	LIMIT(W)			
		50	25	15	75
902-928		1(30dBm)	0.125(21dBm)	NA	NA
2400-2483.5		NA	NA	0.125(21dBm)	1(30dBm)
5725-5850		NA	NA	NA	1(30dBm)



**(6) Band edge**

FCC Part15, Subpart C Section 15.247, In any 100kHz bandwidth outside the frequency band in with the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, attenuation below the general limits specified in section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in section 15.205(a), must also comply with the radiated emission limits specified in section 15.209(a).

Operating Frequency Range(MHz)	Spurious emission frequency	Limit	
		Peak power ration to emission(dBc)	Emission level(dBuV/m)
902-928	<902	>20	NA
	>928	>20	NA
	960-1240	NA	54
2400-2483.5	<2400	>20	NA
	>2483.5-2500	NA	54
5725-5850	<5350-5460	NA	54
	<5725	>20	NA
	>5850	>20	NA

**(7) Conducted Emission**

Frequency(MHz)	Quasi-peak	Average
0.15-0.5	66-56	56-46
0.5-5.0	56	46
5.0-30.0	60	50

**Note:**

1. The lower limit shall apply at the transition frequencies
2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

**(8) Radiated Emission**

FCC Part 15, Subpart C Section 15.209 limit of radiated emission for frequency below 1000GHz. The emissions from an intentional radiator shall not exceed the field strength level specified in the following table:

Frequency (MHz)	Field strength $\mu\text{V/m}$	Distance(m)	Field strength at 3m $\text{dB}\mu\text{V/m}$
30-88	100	3	40
88-216	150	3	43.5
216-960	200	3	46
Above 960	500	3	54

Remark: 1. Emission level in  $\text{dB}\mu\text{V/m}=20 \log (\text{uV/m})$   
 2. Measurement was performed at an antenna to the closed point of EUT distance of meters.

**FCC Part 15, Section 15.35(b) limit of radiated emission for frequency above 1000MHz**

Frequency(MHz)	Class A( $\text{dB}\mu\text{V/m}$ )(at 3m)		Class B( $\text{dB}\mu\text{V/m}$ )(at 3m)	
	PEAK	AVERAGE	PEAK	AVERAGE
Above 1000	80.0	60.0	74.0	54.0

FCC Part 15, Subpart C Section 15.249. The field strength of emissions from intentional radiators operated within these frequency bands shall comply with the following:

Frequency(MHz)	Filed Strength of Fundamental(at 3m)		Filed Strength of Harmonics(at 3m)	
	PEAK	AVERAGE	PEAK	AVERAGE
902-928	114	94	74.0	54.0
2400-2483.5	114	94	74.0	54.0
5725-5875	114	94	74.0	54.0
24000-24250	128	108	88.0	68.0

## 2.5 Configuration of Tested System

**Fig. 2-1 Configuration of Tested System**




Table 2-1 Equipment Used in Tested System

Item	Equipment	Mfr/Brand	Model/Type No.	FCC ID	Series No.	Note
1.	SOUND BAR	VTREK	HSB1803	ESXCSMP90	N/A	<i><b>EUT</b></i>

**Note:**

- (1) Unless otherwise denoted as EUT in 『Remark』 column , device(s) used in tested system is a support equipment.

### 3. Summary of Test Results

FCC Rules	Description Of Test	Result
§ 15.247(a)(1)	Channel Separation test	Compliant
§ 15.247(a)(1)	20dB Bandwidth	Compliant
§ 15.247(a)(1)(iii)	Quantity of Hopping Channel	Compliant
§ 15.247(a)(1)(iii)	Time of Occupancy(Dwell Time)	Compliant
§ 15.247(b)	Max Peak output Power test	Compliant
§ 15.247(d)	Band edge test	Compliant
§ 15.247(d)	RF Antenna Conducted Spurious Emission	Compliant
§ 15.207	AC Power Conducted Emission	Compliant
§ 15.247(d), § 15.209	Radiated Emission	Compliant
§ 15.203	Antenna Requirement	Compliant
§ 1.1310	RF Exposure	Compliant

### 4. Description of test modes

The EUT (SOUND BAR) has been tested under normal operating condition. This EUT is a FHSS system, we use blue test to control the EUT with parallel port, Let EUT hopping on and transmit at every channel with highest power, Only output power use conducted method, others are using radiated method. After sirfdemo330R1 send the command to EUT, it can be removed, and the EUT keep hopping. 79 Channels are provided by EUT. The 3 channels of lower, medium and higher were chosen for test.


Channel	Frequency(MHz)
1	2402
40	2441
79	2480

## 5. Conducted Emissions Test

### 5.1 Measurement Procedure:

1. The EUT was placed on a table, which is 0.8m above ground plane.
2. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
3. Repeat above procedures until all frequency measured was complete.

### 5.2 Test SET-UP (Block Diagram of Configuration)

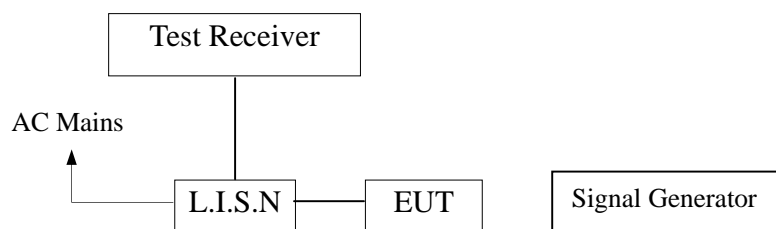


### 5.3 Measurement Equipment Used:

Conducted Emission Test Site # 4					
EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	LAST CAL.	CAL DUE.
Test Receiver	Rohde & Schwarz	ESCS30	100018	05/29/2011	05/29/2012
L.I.S.N	Rohde & Schwarz	ENV216	100017	05/29/2011	05/29/2012
RF Switching Unit	CDS	RSU-M2	38401	05/29/2011	05/29/2012

### 5.4 Measurement Result:

Conducted Emission Measurement

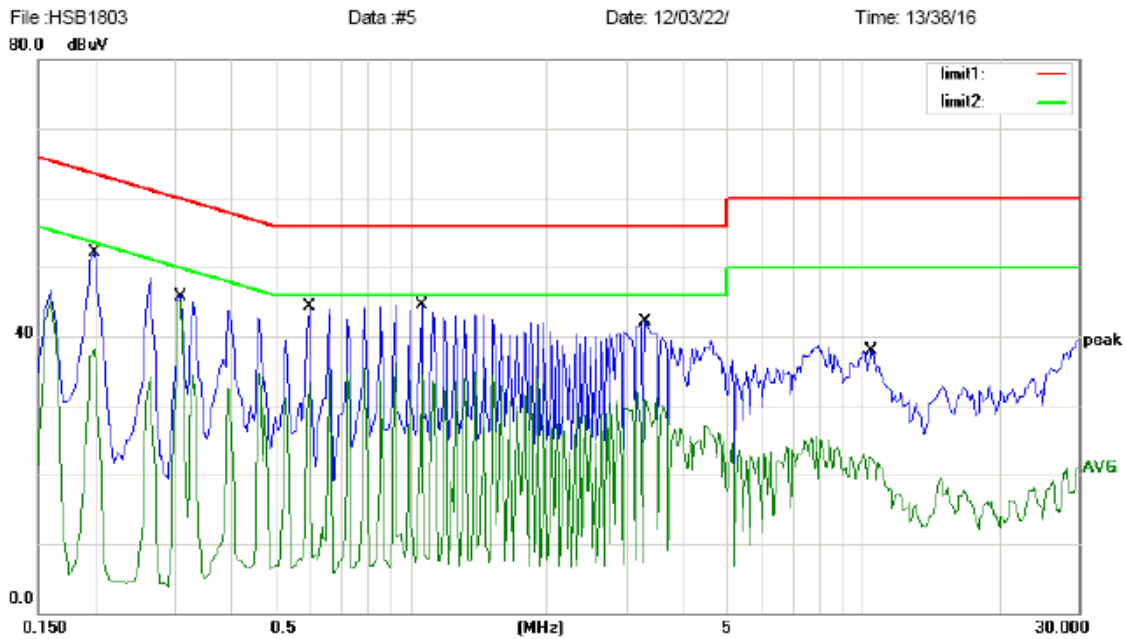


Site site #1  
 Limit: (CE)FCC PART 15 class B\_QP  
 EUT: SOUND BAR  
 M/N: HSB1803  
 Mode: TX  
 Note:

Phase: L1  
 Power: AC 120V/60Hz  
 Temperature: 25  
 Humidity: 50 %

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1		0.2000	52.11	0.00	52.11	63.61	-11.50	QP	
2		0.2000	38.08	0.00	38.08	53.61	-15.53	AVG	
3		0.3100	45.68	0.00	45.68	59.97	-14.29	QP	
4	*	0.3100	45.07	0.00	45.07	49.97	-4.90	AVG	
5		0.5950	44.39	0.00	44.39	56.00	-11.61	QP	
6		0.5950	33.40	0.00	33.40	46.00	-12.60	AVG	
7		1.0550	44.59	0.00	44.59	56.00	-11.41	QP	
8		1.0550	35.07	0.00	35.07	46.00	-10.93	AVG	
9		3.3000	42.02	0.00	42.02	56.00	-13.98	QP	
10		3.3000	32.15	0.00	32.15	46.00	-13.85	AVG	
11		10.5000	37.88	0.00	37.88	60.00	-22.12	QP	
12		10.5000	22.89	0.00	22.89	50.00	-27.11	AVG	

\*:Maximum data x:Over limit !:over margin Comment: Factor build in receiver. Operator:

Conducted Emission Measurement

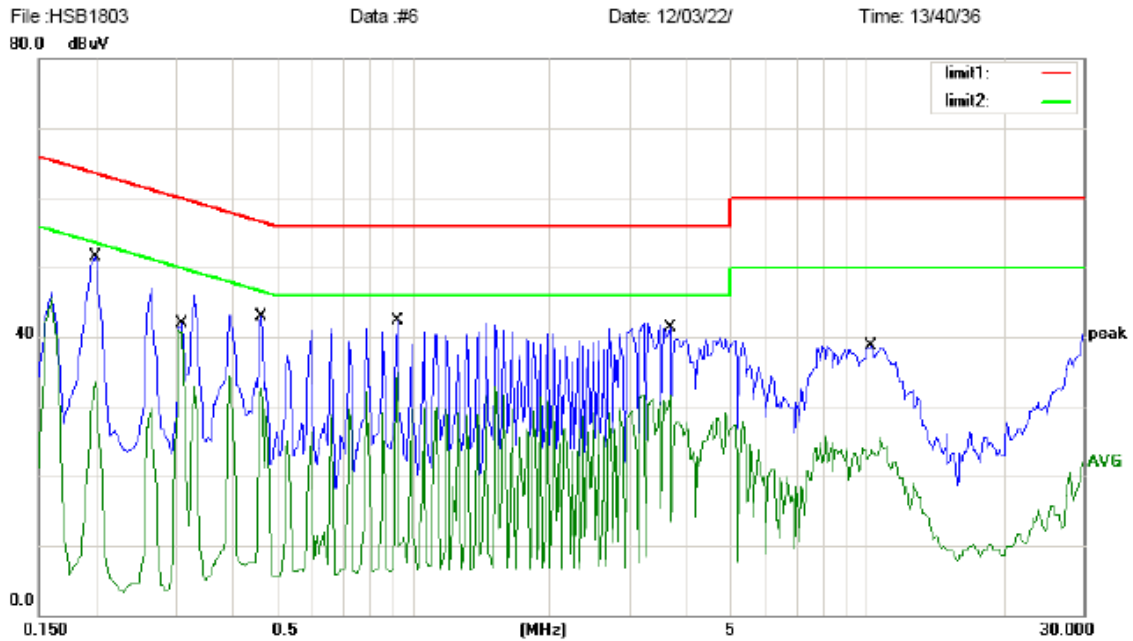

Site site #1  
 Limit: (CE)FCC PART 15 class B\_QP  
 EUT: SOUND BAR  
 M/N: HSB1803  
 Mode: TX  
 Note:

Phase: **N**  
 Power: AC 120V/60Hz  
 Temperature: 25  
 Humidity: 50 %

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV	Limit dBuV	Over dB	Detector	Comment
1	0.2000	51.54	0.00	51.54	63.61	-12.07	QP	
2	0.2000	33.50	0.00	33.50	53.61	-20.11	AVG	
3	0.3100	41.84	0.00	41.84	59.97	-18.13	QP	
4 *	0.3100	40.85	0.00	40.85	49.97	-9.12	AVG	
5	0.4650	42.88	0.00	42.88	56.60	-13.72	QP	
6	0.4650	32.71	0.00	32.71	46.60	-13.89	AVG	
7	0.9250	42.26	0.00	42.26	56.00	-13.74	QP	
8	0.9250	34.94	0.00	34.94	46.00	-11.06	AVG	
9	3.7000	41.35	0.00	41.35	56.00	-14.65	QP	
10	3.7000	31.78	0.00	31.78	46.00	-14.22	AVG	
11	10.2500	38.67	0.00	38.67	60.00	-21.33	QP	
12	10.2500	25.44	0.00	25.44	50.00	-24.56	AVG	

\*:Maximum data x:Over limit !:over margin Comment: Factor build in receiver. Operator:

**5.5 Conducted Measurement Photos:**






## **6. Radiated Emission Test**

### **6.1 Measurement Procedure**


1. The EUT was placed on a turn table which is 0.8m above ground plane.
2. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
3. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
4. Repeat above procedures until all frequency measured were complete.

### 6.2 Test SET-UP (Block Diagram of Configuration)


(A) Radiated Emission Test Set-Up, Frequency Below 30MHz

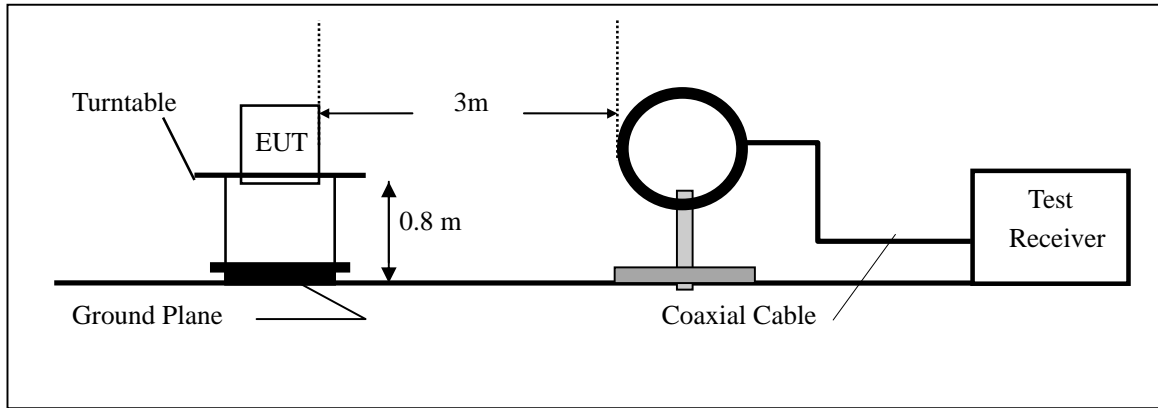

(B) Radiated Emission Test Set-Up, Frequency Below 1000MHz

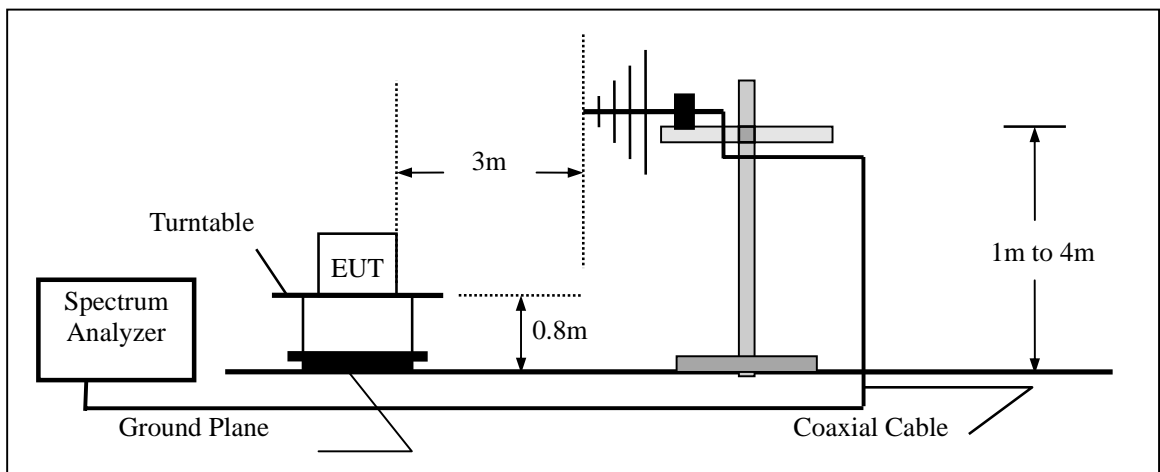

(C) Radiated Emission Test Set-Up, Frequency above 1000MHz

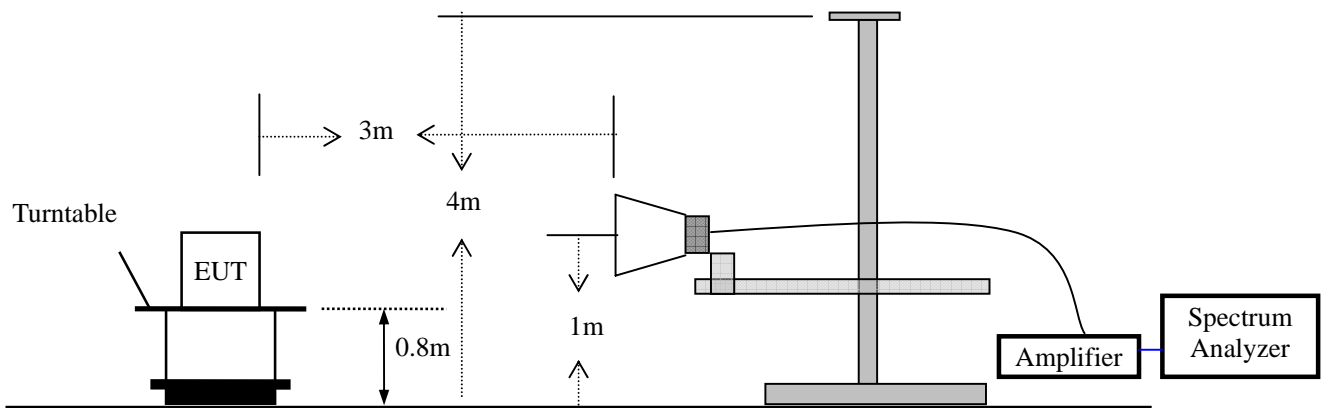

**6.3 Measurement Equipment Used:**

<b>EQUIPMENT TYPE</b>	<b>MFR</b>	<b>MODEL NUMBER</b>	<b>SERIAL NUMBER</b>	<b>LAST CAL.</b>	<b>CAL DUE.</b>
Spectrum Analyzer	Rohde & Schwarz	ESCI	100137	05/29/2011	05/29/2012
Test Receiver	Rohde & Schwarz	ESCI	100137	05/29/2011	05/29/2012
Bilog Antenna	Schwarzbeck	VULB9163	000141	05/29/2011	05/29/2012
Power Amplifier	CDS	RSU-M352	818	05/29/2011	05/29/2012
Power Amplifier	HP	8447F	OPT H64	05/29/2011	05/29/2012
Color Monitor	SUNSPO	SP-140A	N/A	05/29/2011	05/29/2012
Single Line Filter	JIANLI	XL-3	N/A	05/29/2011	05/29/2012
Single Phase Power Line Filter	JIANLI	DL-2X100B	N/A	05/29/2011	05/29/2012
3 Phase Power Line Filter	JIANLI	DL-4X100B	N/A	05/29/2011	05/29/2012
DC Power Filter	JIANLI	DL-2X50B	N/A	05/29/2011	05/29/2012
Cable	Schwarzbeck	PLF-100	549489	05/29/2011	05/29/2012
Cable	Rosenberger	CIL02	A0783566	05/29/2011	05/29/2012
Cable	Rosenberger	RG 233/U	525178	05/29/2011	05/29/2012

### 6.4 Measurement Result

Operation Mode: RX Mode (CH40: 2441MHz) Test Date : March 21, 2012  
Frequency Range: 30~1000MHz Temperature : 25 °C  
Test Result: PASS Humidity : 50 %  
Measured Distance: 3m Test By: Andy

Freq. (MHz)	Ant. Pol. H/V	Emission Level (dBUV/m)	Limit 3m (dBUV/m)	Margin (dB)	Note
30.000	V	30.88	40.00	-9.12	PK
48.430	V	32.09	40.00	-7.91	PK
56.190	V	31.25	40.00	-8.75	PK
62.010	V	34.32	40.00	-5.68	PK
99.840	V	36.95	43.50	-6.55	PK
185.200	V	36.60	43.50	-6.90	PK
97.900	H	33.69	43.50	-9.81	PK
122.150	H	32.30	43.50	-11.20	PK
155.130	H	32.14	43.50	-11.36	PK
188.110	H	35.86	43.50	-7.64	PK
202.660	H	39.76	43.50	-3.74	PK
215.270	H	37.95	43.50	-5.55	PK

- Note:**
- (1) All Readings are Peak Value and AV.
  - (2) Emission Level= Reading Level+ Probe Factor +Cable Loss.
  - (3) The average measurement was not performed when the peak measured data under the limit of average detection;
  - (4) The results of low and high channel are as same as middle channel.

Operation Mode: RX Mode (CH40: 2441MHz) Test Date : March 21, 2012  
 Frequency Range: 1-25GHz Temperature : 25 °C  
 Test Result: PASS Humidity : 50 %  
 Measured Distance: 3m Test By: Andy

Freq. (MHz)	Ant.Pol. H/V	Emission Level(dBuV/m)		Limit 3m(dBuV/m)		Margin(dB)	
		PK	AV	PK	AV	PK	AV
4882	V	64.11	46.97	74.00	54.00	-9.89	-7.03
7323	V	60.94	39.05	74.00	54.00	-13.06	-14.95
9764	V	61.05	46.09	74.00	54.00	-12.95	-7.91
12205	V	59.21	41.06	74.00	54.00	-14.79	-12.94
4882	H	62.83	40.65	74.00	54.00	-11.17	-13.35
7323	H	56.61	42.66	74.00	54.00	-17.39	-11.34
9764	H	58.99	41.51	74.00	54.00	-15.01	-12.49
12205	H	58.10	43.34	74.00	54.00	-15.90	-10.66

**Other harmonics emissions are lower than 20dB below the allowable limit.**

- Note:**
- (1) All Readings are Peak Value and AV.
  - (2) Emission Level= Reading Level+ Probe Factor +Cable Loss
  - (3) The average measurement was not performed when the peak measured data under the limit of average detection;
  - (4) The results of low and high channel are as same as middle channel.

Operation Mode: TX Mode (CH1: 2402MHz)      Test Date :      March 21, 2012  
Frequency Range: 30~1000MHz                      Temperature :      25 °C  
Test Result:                      PASS                      Humidity :              50 %  
Measured Distance: 3m                                      Test By:                      Andy

Freq. (MHz)	Ant.Pol. H/V	Emission Level (dBUV/m)	Limit 3m (dBUV/m)	Margin (dB)	Note
30.000	V	30.73	40.00	-9.27	PK
49.400	V	33.41	40.00	-6.59	PK
55.220	V	32.63	40.00	-7.37	PK
96.930	V	35.47	43.50	-8.03	PK
148.340	V	36.32	43.50	-7.18	PK
156.100	V	37.69	43.50	-5.81	PK
54.250	H	28.55	40.00	-11.45	PK
97.900	H	30.76	43.50	-12.74	PK
119.240	H	30.38	43.50	-13.12	PK
154.160	H	38.31	43.50	-5.19	PK
173.560	H	40.23	43.50	-3.27	PK
232.730	H	33.30	46.00	-12.70	PK

- Note:**
- (1) All Readings are Peak Value.
  - (2) Emission Level= Reading Level+ Probe Factor +Cable Loss.
  - (3) The average measurement was not performed when the peak measured data under the limit of average detection.

Operation Mode: TX Mode (CH40: 2441MHz) Test Date : March 21, 2012  
Frequency Range: 30~1000MHz Temperature : 25 °C  
Test Result: PASS Humidity : 50 %  
Measured Distance: 3m Test By: Andy

Freq. (MHz)	Ant.Pol. H/V	Emission Level (dBUV/m)	Limit 3m (dBUV/m)	Margin (dB)	Note
30.490	V	30.11	40.00	-9.89	PK
49.600	V	34.09	40.00	-5.91	PK
55.210	V	35.11	40.00	-4.89	PK
96.830	V	35.21	43.50	-8.29	PK
149.340	V	36.39	43.50	-7.11	PK
150.200	V	37.54	43.50	-5.96	PK
54.440	H	28.03	40.00	-11.97	PK
94.090	H	30.76	43.50	-12.74	PK
117.640	H	30.22	43.50	-13.28	PK
158.160	H	38.15	43.50	-5.35	PK
174.510	H	38.25	43.50	-5.25	PK
237.220	H	36.30	46.00	-9.70	PK

- Note:** (1) All Readings are Peak Value.  
(2) Emission Level= Reading Level+ Probe Factor +Cable Loss.  
(3) The average measurement was not performed when the peak measured data under the limit of average detection.

Operation Mode: TX Mode (CH79: 2480MHz) Test Date : March 21, 2012  
 Frequency Range: 30~1000MHz Temperature : 25 °C  
 Test Result: PASS Humidity : 50 %  
 Measured Distance: 3m Test By: Andy

Freq. (MHz)	Ant.Pol. H/V	Emission Level (dBuV/m)	Limit 3m (dBuV/m)	Margin (dB)	Note
30.140	V	30.69	40.00	-9.31	PK
49.810	V	33.12	40.00	-6.88	PK
55.490	V	32.56	40.00	-7.44	PK
98.020	V	35.41	43.50	-8.09	PK
149.110	V	36.06	43.50	-7.44	PK
158.140	V	37.15	43.50	-6.35	PK
54.210	H	31.58	40.00	-8.42	PK
97.070	H	30.60	43.50	-12.90	PK
119.440	H	30.19	43.50	-13.31	PK
154.510	H	38.34	43.50	-5.16	PK
173.650	H	39.03	43.50	-4.47	PK
232.730	H	33.01	46.00	-12.99	PK

- Note:**
- (1) All Readings are Peak Value.
  - (2) Emission Level= Reading Level+ Probe Factor +Cable Loss.
  - (3) The average measurement was not performed when the peak measured data under the limit of average detection.



Operation Mode: TX Mode (CH1: 2402MHz) Test Date : March 21, 2012  
 Frequency Range: 1-25GHz Temperature : 25 °C  
 Test Result: PASS Humidity : 50 %  
 Measured Distance: 3m Test By: Andy

Freq. (MHz)	Ant.Pol. H/V	Emission Level(dBuV/m)		Limit 3m(dBuV/m)		Margin(dB)	
		PK	AV	PK	AV	PK	AV
2400	V	61.18	46.05	74.00	54.00	-12.82	-7.95
4804	V	59.06	46.27	74.00	54.00	-14.94	-7.73
7206	V	53.91	41.11	74.00	54.00	-20.09	-12.89
9608	V	54.07	42.79	74.00	54.00	-19.93	-11.21
12010	V	57.69	43.58	74.00	54.00	-16.31	-10.42
2400	H	61.01	46.19	74.00	54.00	-12.99	-7.81
4804	H	55.33	43.71	74.00	54.00	-18.67	-10.29
7206	H	53.74	41.79	74.00	54.00	-20.26	-12.21
9608	H	57.62	42.55	74.00	54.00	-16.38	-11.45
12010	H	58.86	43.03	74.00	54.00	-15.14	-10.97

**Other harmonics emissions are lower than 20dB below the allowable limit.**

- Note:**
- (1) All Readings are Peak Value and AV.
  - (2) Emission Level= Reading Level+ Probe Factor +Cable Loss.
  - (3) The average measurement was not performed when the peak measured data under the limit of average detection.

Operation Mode: TX Mode (CH40: 2441MHz) Test Date : March 21, 2012  
 Frequency Range: 1-25GHz Temperature : 25 °C  
 Test Result: PASS Humidity : 50 %  
 Measured Distance: 3m Test By: Andy

Freq. (MHz)	Ant.Pol. H/V	Emission Level(dBuV/m)		Limit 3m(dBuV/m)		Margin(dB)	
		PK	AV	PK	AV	PK	AV
4882	V	64.11	46.26	74	54	-9.89	-7.74
7323	V	62.94	39.39	74	54	-11.06	-14.61
9764	V	61.15	45.01	74	54	-12.85	-8.99
12205	V	56.13	39.60	74	54	17.87	-14.40
4882	H	61.36	38.45	74	54	-12.64	-15.55
7323	H	58.10	40.17	74	54	-15.90	-13.83
9764	H	56.17	41.56	74	54	-17.83	-12.44
12205	H	55.55	43.40	74	54	-18.45	-10.60

Other harmonics emissions are lower than 20dB below the allowable limit.

- Note:**
- (1) All Readings are Peak Value and AV.
  - (2) Emission Level= Reading Level+ Probe Factor +Cable Loss.
  - (3) The average measurement was not performed when the peak measured data under the limit of average detection.



Operation Mode: TX Mode (CH79: 2480MHz) Test Date : March 21, 2012  
 Frequency Range: 1-25GHz Temperature : 25 °C  
 Test Result: PASS Humidity : 50 %  
 Measured Distance: 3m Test By: Andy

Freq. (MHz)	Ant.Pol. H/V	Emission Level(dBuV/m)		Limit 3m(dBuV/m)		Margin(dB)	
		PK	AV	PK	AV	PK	AV
2483.5	V	62.11	47.69	74.00	54.00	-11.89	-6.31
4960	V	55.58	43.33	74.00	54.00	-18.42	-10.67
7440	V	58.82	43.34	74.00	54.00	-15.18	-10.66
9920	V	57.59	40.58	74.00	54.00	-16.41	-13.42
12400	V	52.03	43.70	74.00	54.00	-21.97	-10.30
2483.5	H	63.06	46.69	74.00	54.00	-10.94	-7.31
4960	H	59.59	42.92	74.00	54.00	-14.41	-11.08
7440	H	56.88	41.32	74.00	54.00	-17.12	-12.68
9920	H	58.11	43.79	74.00	54.00	-15.89	-10.21
12400	H	56.12	42.83	74.00	54.00	-17.88	-11.17

Other harmonics emissions are lower than 20dB below the allowable limit.

- Note:**
- (1) All Readings are Peak Value and AV.
  - (2) Emission Level= Reading Level+ Probe Factor +Cable Loss.
  - (3) The average measurement was not performed when the peak measured data under the limit of average detection.

**6.5 Radiated Measurement Photos:**

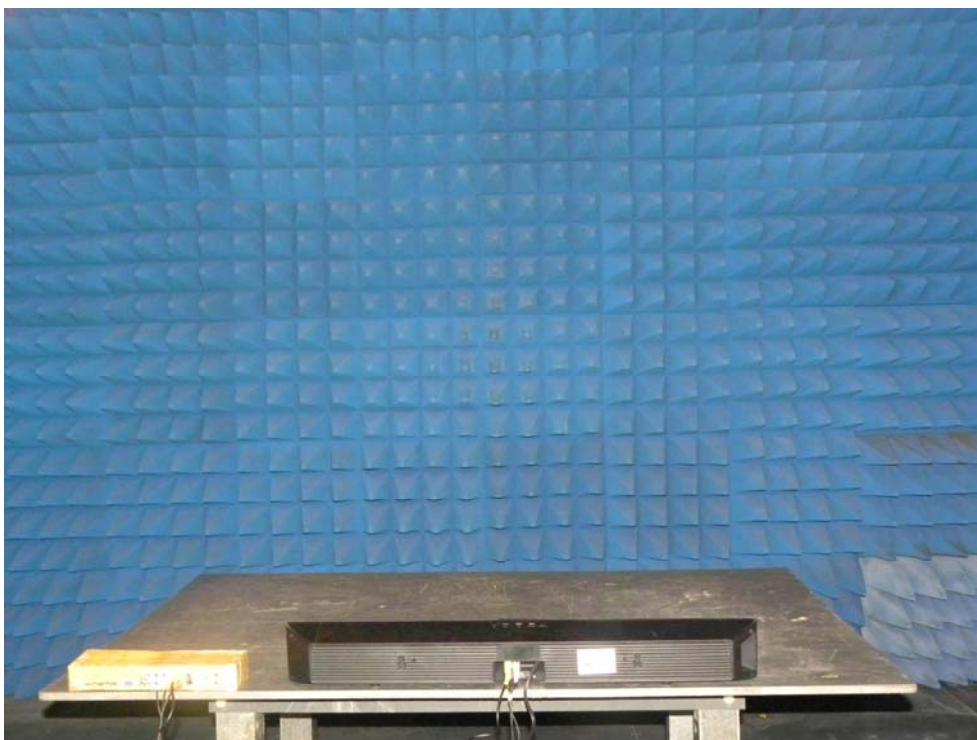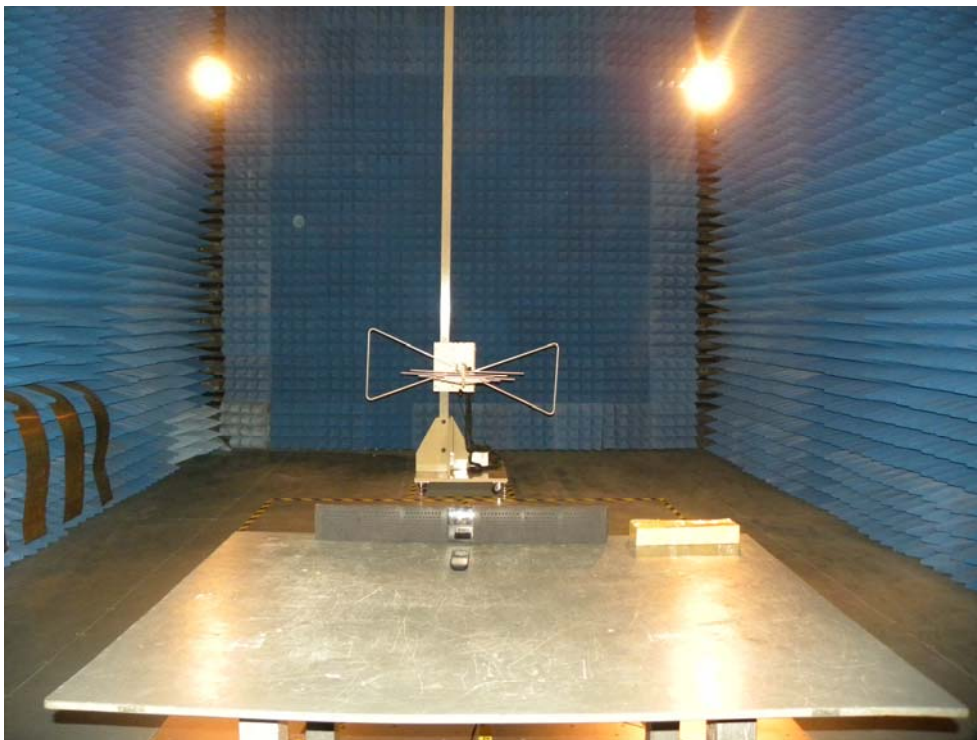


## 7. Channel Separation test

### 7.1 Measurement Procedure

The EUT was operating in hopping mode or could be controlled its channel. Printed out the test result from the spectrum by hard copy function.

### 7.2 Test SET-UP (Block Diagram of Configuration)



### 7.3 Measurement Equipment Used:



Same as 6.3 Radiated Emission Measurement.


### 7.4 Measurement Results:

Refer to attached data chart.

Spectrum Detector:	PK	Test Date :	April 04, 2012
Test By:	Andy	Temperature :	25 °C
Test Result:	PASS	Humidity :	50 %

Channel number	Channel frequency (MHz)	Separation Read Value (KHz)	Separation Limit (KHz)
1	2402	1000	>658.00
40	2441	1000	>624.67
79	2480	1000	>658.00

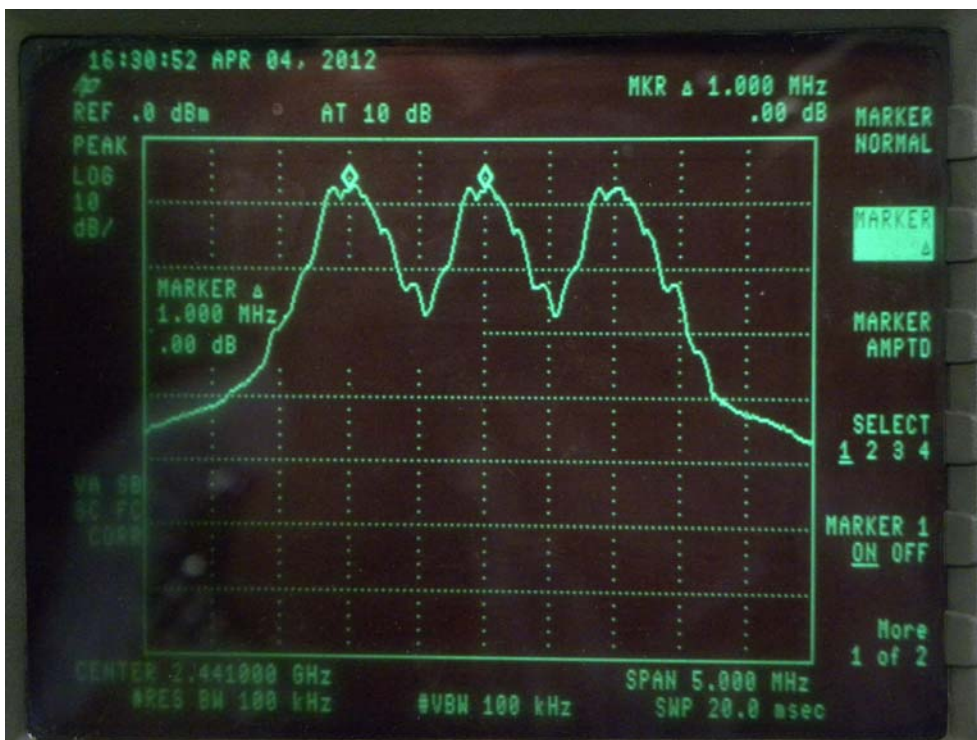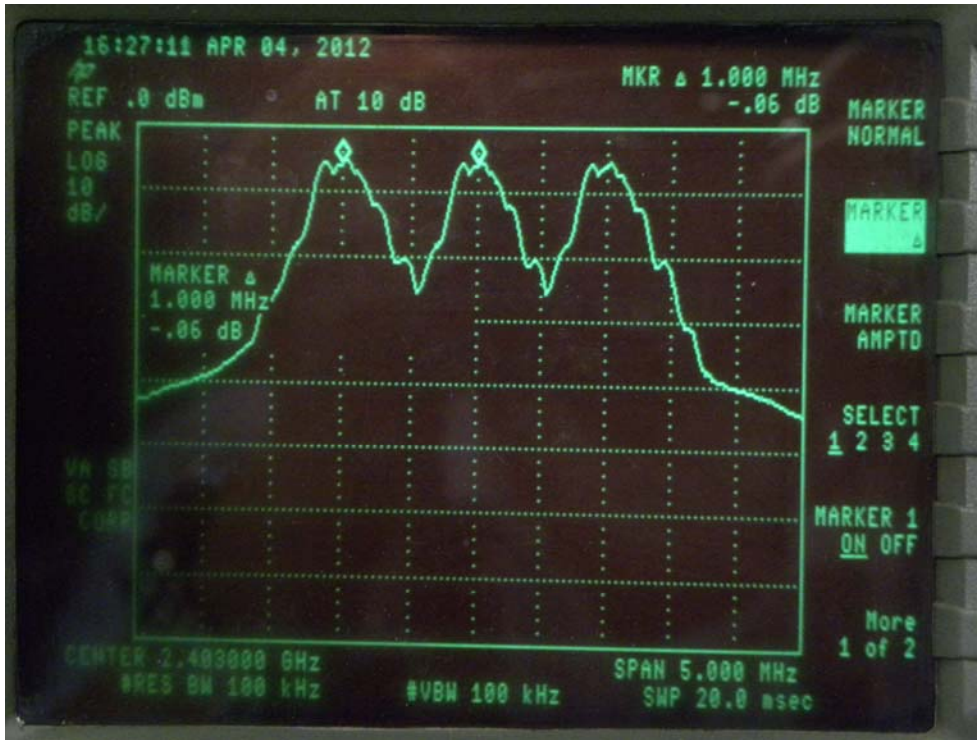

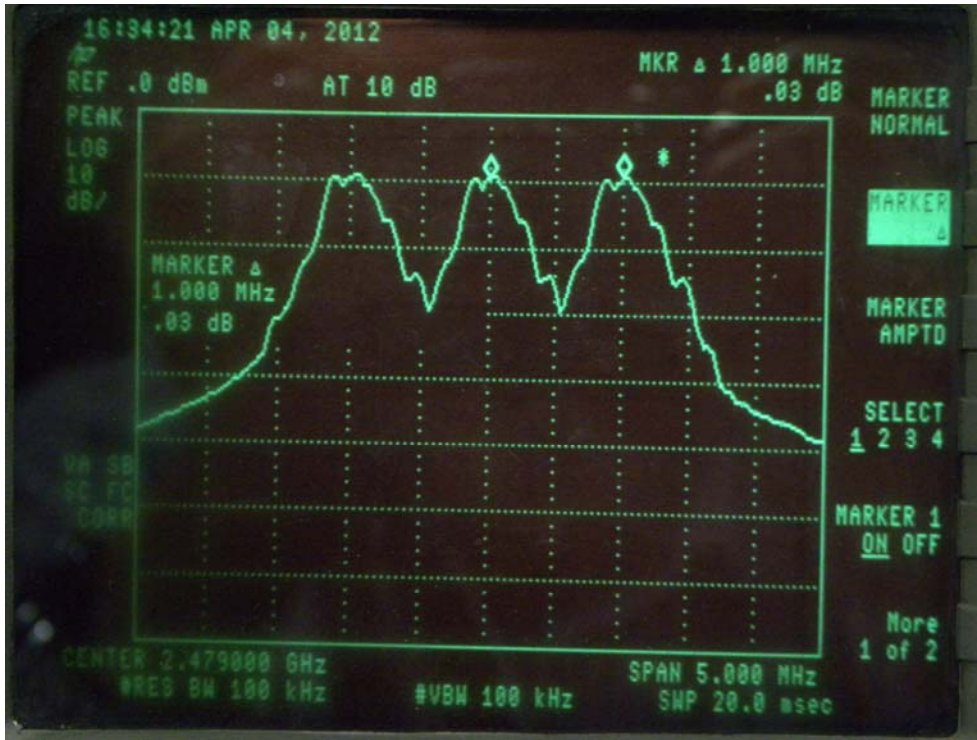


## 8. 20dB Bandwidth test

### 8.1 Measurement Procedure

The EUT was operating in hopping mode or could be controlled its channel. Printed out the test result from the spectrum by hard copy function.

### 8.2 Test SET-UP (Block Diagram of Configuration)



### 8.3 Measurement Equipment Used:

Same as 6.3 Radiated Emission Measurement.



### 8.4 Measurement Results:


Refer to attached data chart.

Spectrum Detector:	PK	Test Date :	April 04, 2012
Test By:	Andy	Temperature :	25 °C
Test Result:	PASS	Humidity :	50 %

Channel number	Channel frequency (MHz)	20dB Down BW(kHz)
1	2402	658.00
40	2441	624.67
79	2480	658.00



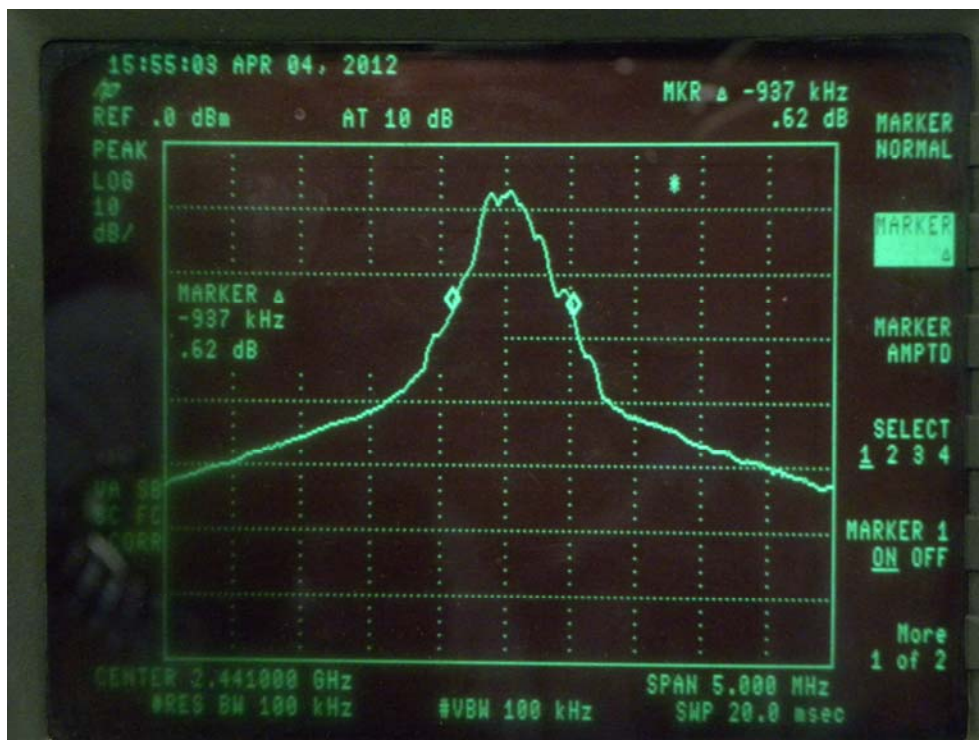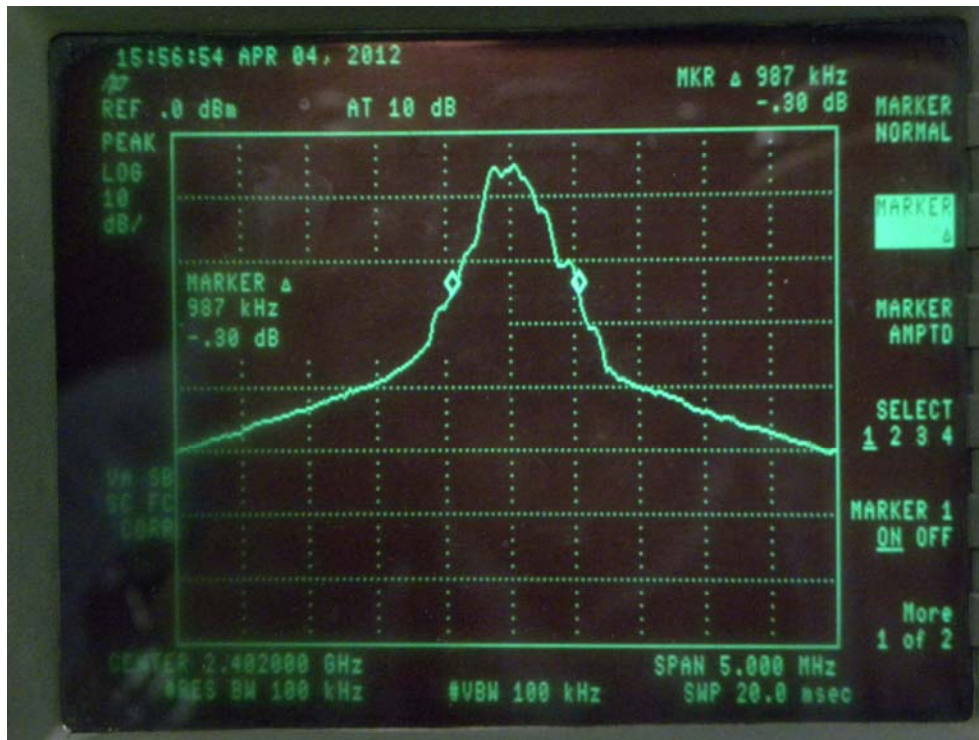

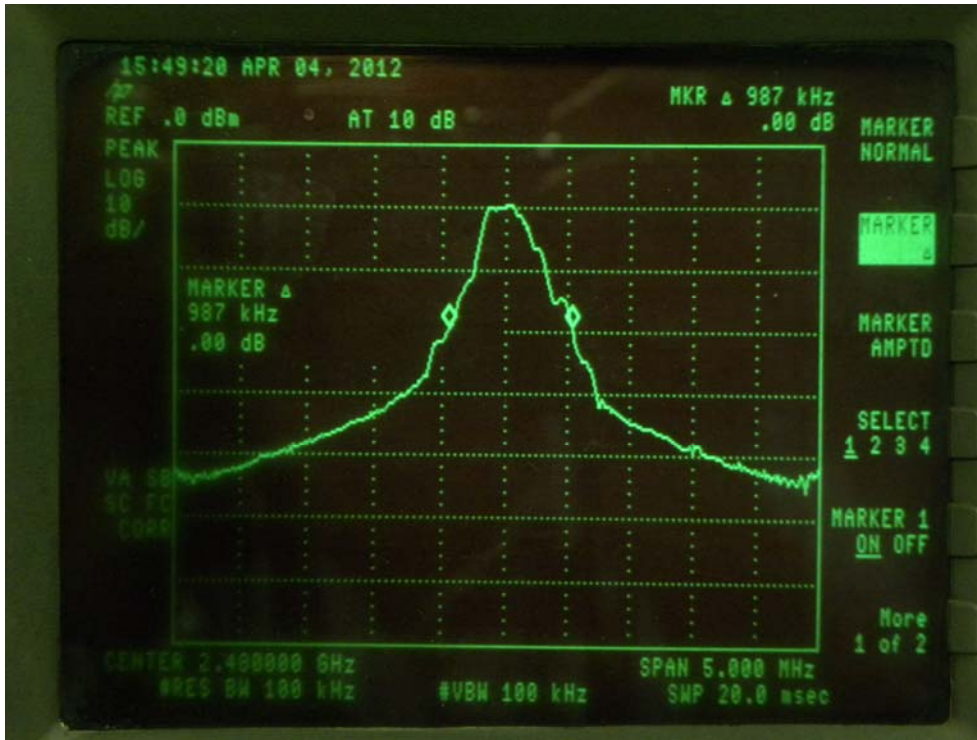


## 9. Quantity of Hopping Channel Test

### 9.1 Measurement Procedure

The EUT was operating in hopping mode or could be controlled its channel. Printed out the test result from the spectrum by hard copy function.

### 9.2 Test SET-UP (Block Diagram of Configuration)



### 9.3 Measurement Equipment Used:


Same as 6.3 Radiated Emission Measurement.

### 9.4 Measurement Results:

Refer to attached data chart.

Spectrum Detector:	PK	Test Date :	April 04, 2012
Test By:	Andy	Temperature :	25 °C
Test Result:	PASS	Humidity :	50 %

Hopping Channel Frequency Range	Quantity of Hopping Channel	Quantity of Hopping Channel
2402-2480	79	> 15

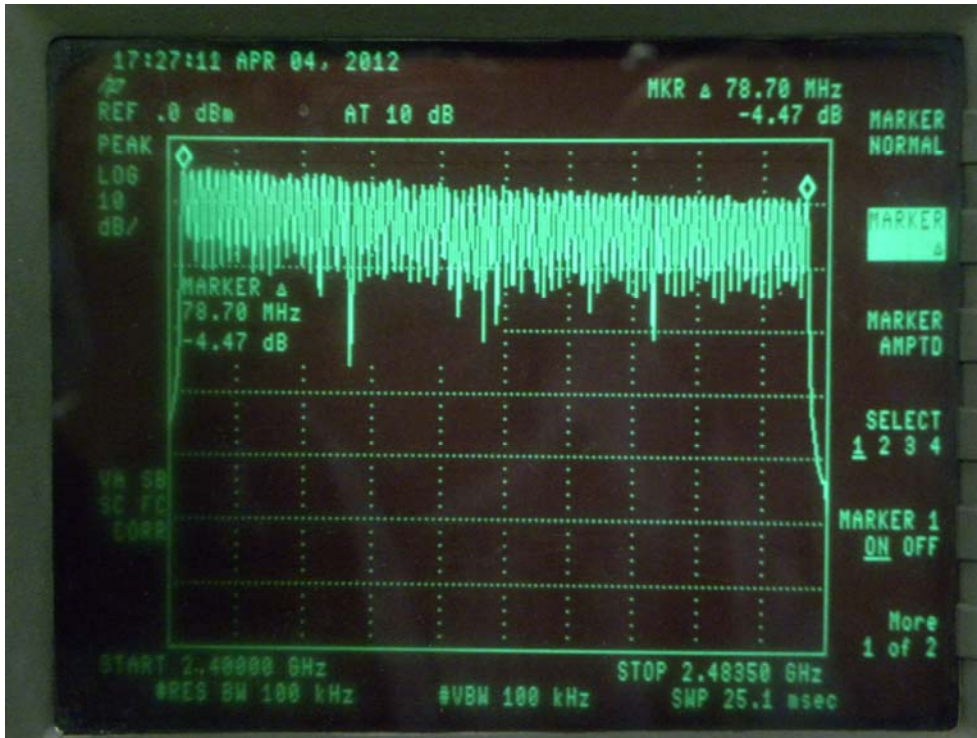

## 10. Time of Occupancy (Dwell Time) test

### 10.1 Test Description

The Equipment Under Test (EUT) was set up to perform the dwell time measurements. The EUT was connected to the spectrum analyzer via a short coax cable. The dwell time is calculated by:

$$\text{Dwell time} = \text{time slot length} * \text{hop rate} / \text{number of hopping channels} * 31.6\text{s}$$

with:

- hop rate =  $1600 / 2 * 1\text{s}$  for DH1 packets =  $800 \text{ s}^{-1}$
- hop rate =  $1600 / 4 * 1/\text{s}$  for DH3 packets =  $400 \text{ s}^{-1}$
- hop rate =  $1600 / 6 * 1/\text{s}$  for DH5 packets =  $266.67 \text{ s}^{-1}$
- number of hopping channels = 79
- $31.6 \text{ s} = 0.4 \text{ seconds}$  multiplied by the number of hopping channels =  $0.4 \text{ s} * 79$

The highest value of the dwell time is reported.

### 10.2 Test Requirements / Limits

FCC Part 15, Subpart C, §15.247 (a) (1) (iii)

Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Since the Bluetooth technology uses 79 channels this period is calculated to be 31.6seconds. Refer to attached data chart.


### 10.3 Test Protocol

Packet type	Time slot length(ms)	Dwell time	Dwell time(ms)
DH1	0.728	time slot length * $1600 / 2 / 79 * 31.6$	232.96
DH3	1.490	time slot length * $1600 / 4 / 79 * 31.6$	238.40
DH5	2.700	time slot length * $1600 / 6 / 79 * 31.6$	288.00


### 10.4 Test result: Dwell time

PASS.


DH1:

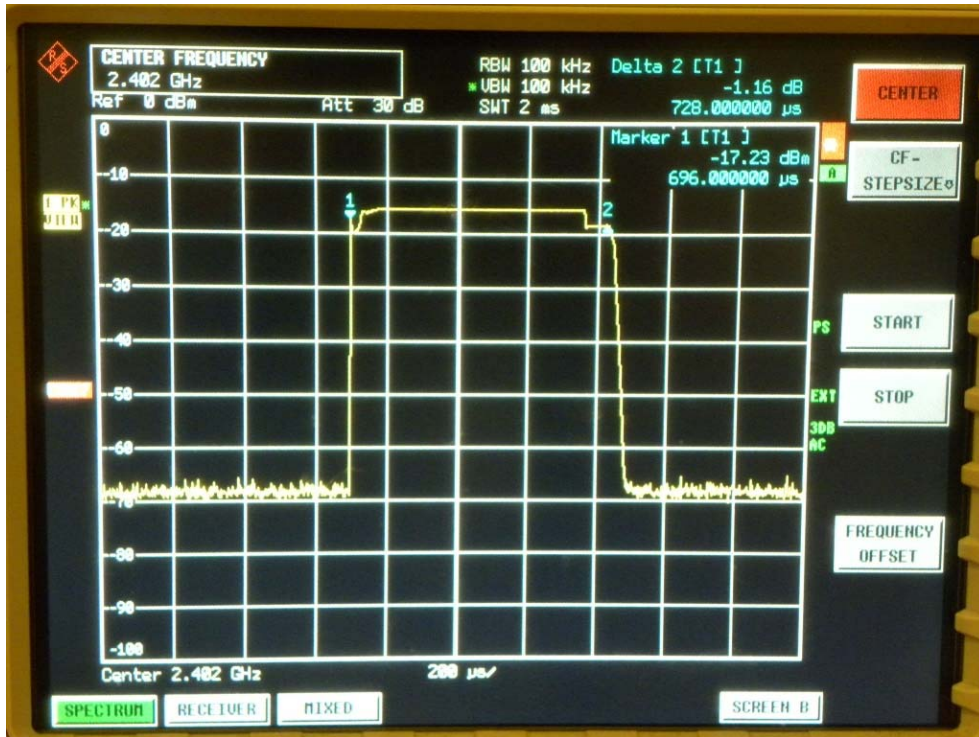

DH3:

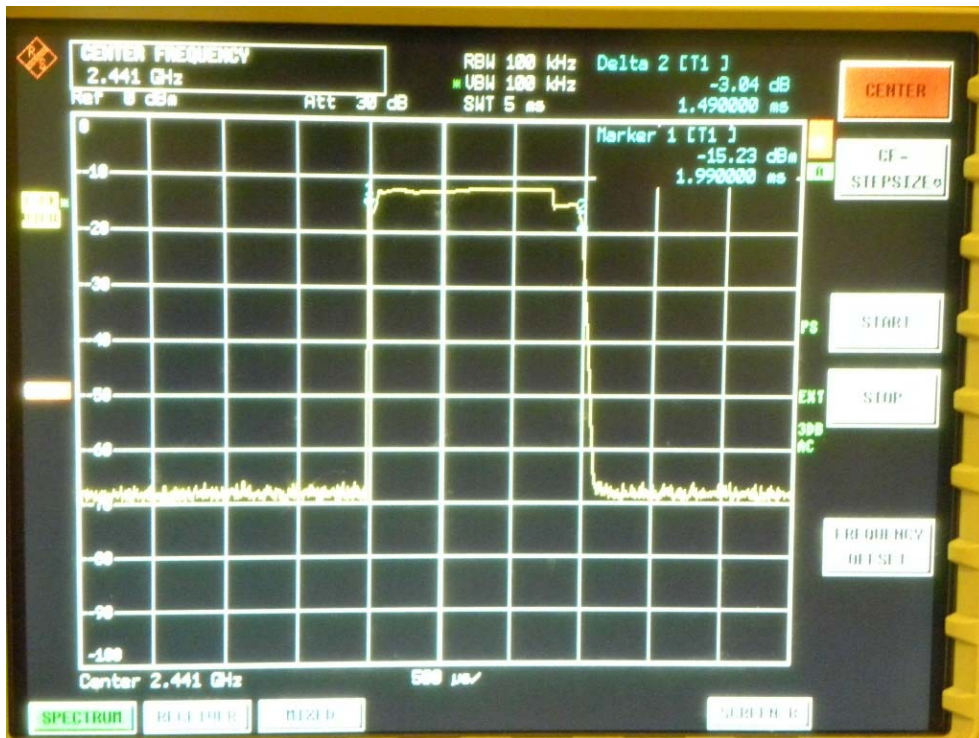

DH5:

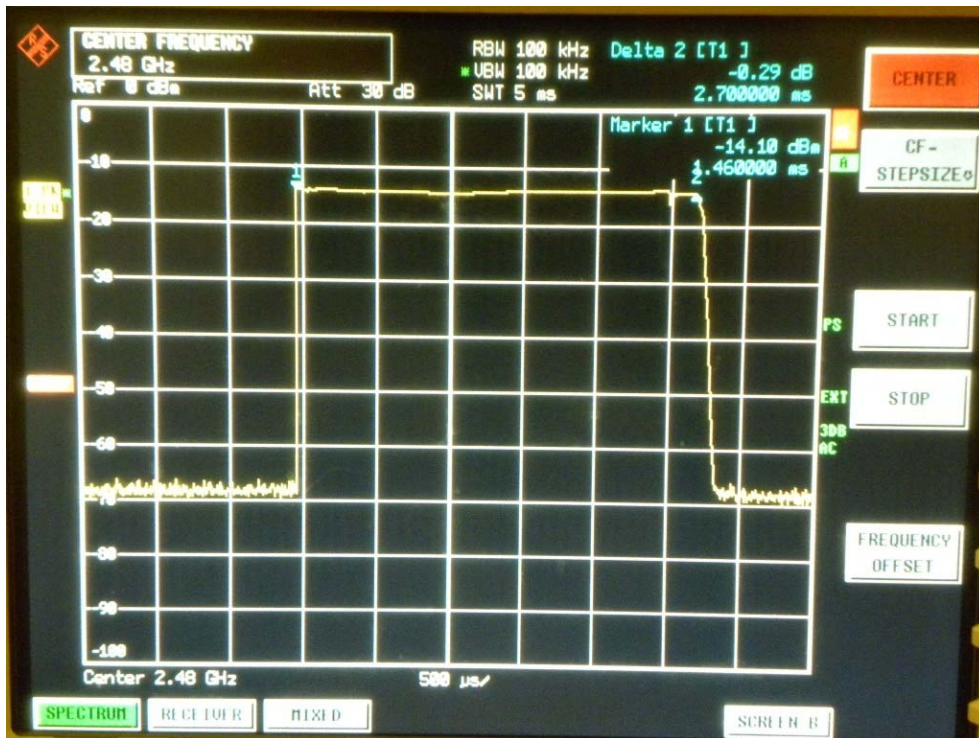


## 11. MAXIMUM PEAK OUTPUT POWER TEST

### 11.1 Measurement Procedure

- a. Check the calibration of the measuring instrument(SA) using either an internal calibrator or a known signal from an external generator.
- b. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
- c. The center frequency of the spectrum analyzer is set to the fundamental frequency and using proper RBW and VBW setting.
- d. Measure the captured power within the band and recording the plot.
- e. Repeat above procedures until all frequencies required were complete.

### 11.2 Test SET-UP (Block Diagram of Configuration)



### 11.3 Measurement Equipment Used:

EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	LAST CAL.	CAL DUE.
Spectrum Analyzer	Rohde & Schwarz	FSP7	839511/010	05/29/2011	05/29/2012



### 11.4 Measurement Results:


Refer to attached data chart.

Spectrum Detector:	PK	Test Date :	April 04, 2012
Test By:	Andy	Temperature :	25 °C
Test Result:	PASS	Humidity :	50 %

Channel number	Channel Frequency (MHz)	Peak Power output(mW)	Peak Power output(dBm)	Peak Power Limit(mW)	Pass/Fail
1	2402.00	0.289	-5.39	125	PASS
40	2441.00	0.169	-7.71	125	PASS
79	2480.00	0.109	-9.60	125	PASS



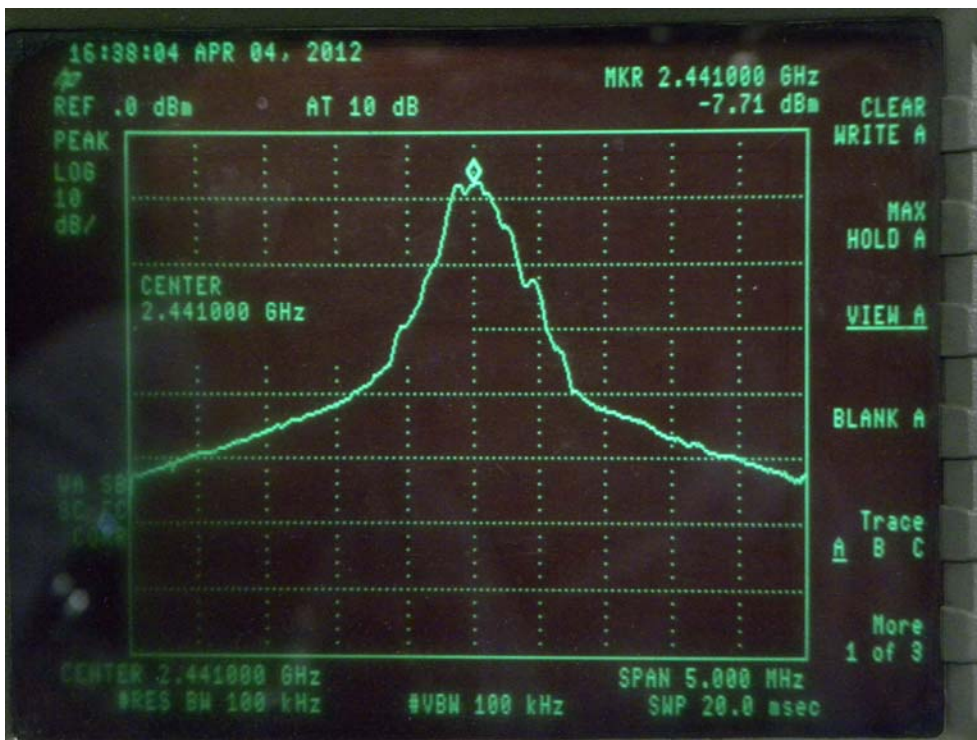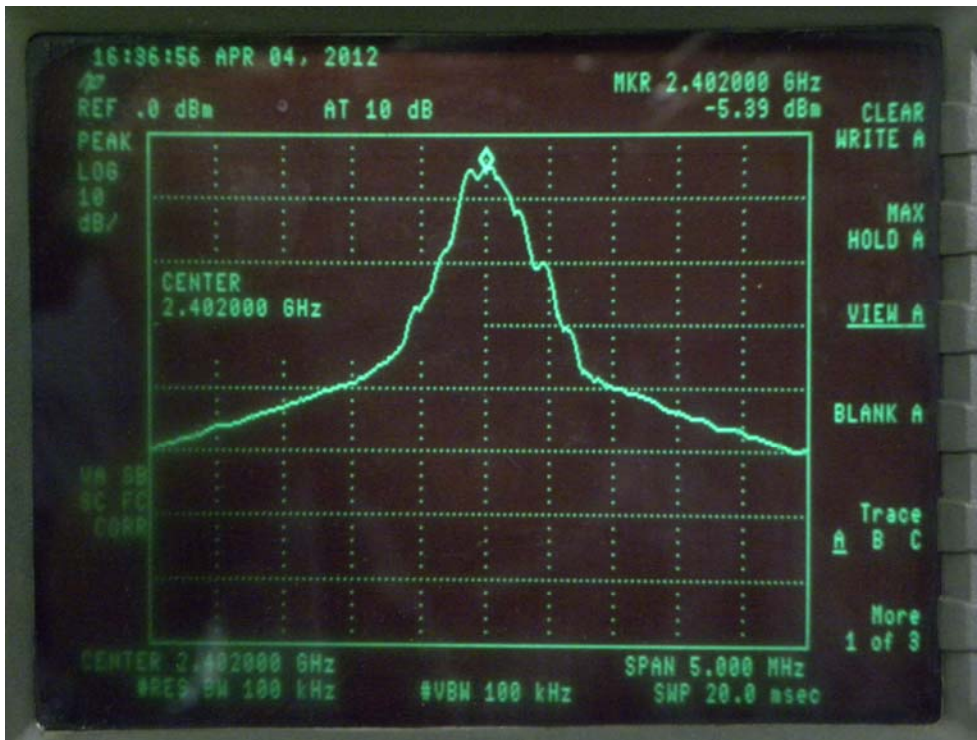

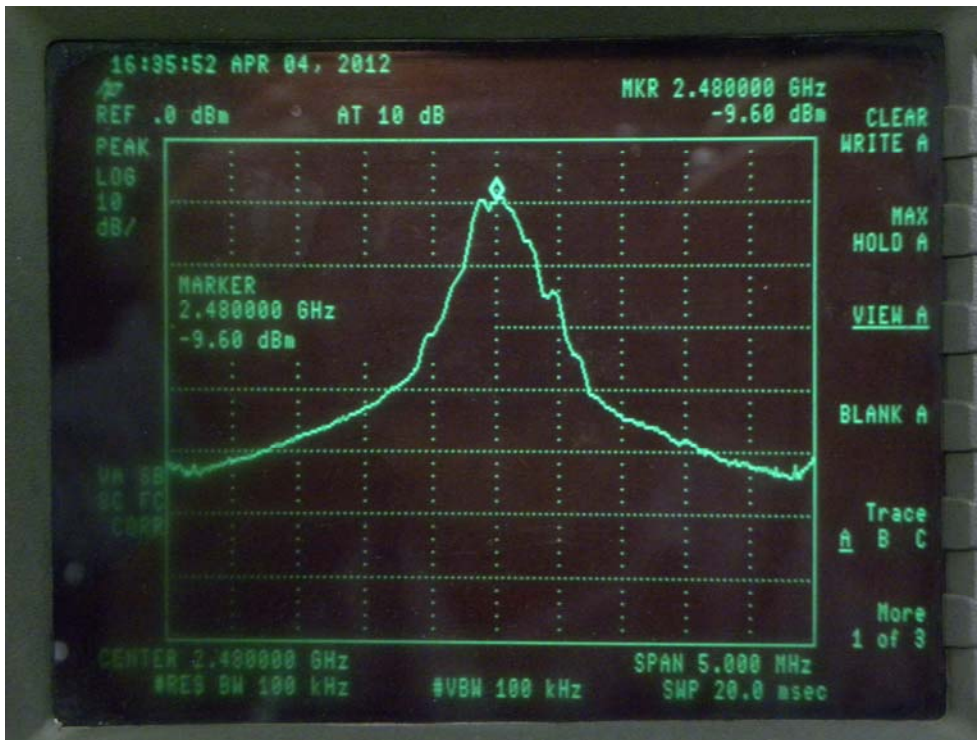

## 12. Band EDGE test

### 12.1 Measurement Procedure

1. The EUT was Operating in hopping mode or could be controlled its channel. Printed out test result from the spectrum by hard copy function.
2. The EUT was placed on a turn table which is 0.8m above ground plane.
3. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
4. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
5. Repeat above procedures until all frequency measured were complete.

### 12.2 Test SET-UP (Block Diagram of Configuration)

Same as 6.2 Radiated Emission Set-up.

### 12.3 Measurement Equipment Used:

Same as 6.3 Radiated Emission Measurement.

### 12.4 Measurement Results:

Refer to attached data chart.



Spectrum Detector:	PK	Test Date :	April 04, 2012
Test By:	Andy	Temperature :	25 °C
Test Result:	PASS	Humidity :	50 %

#### 1. Conducted Test

Frequency (MHz)	Peak Power Output(dBm)	Emission read Value(dBm)	Result of Band edge(dBc)	Band edge Limit(dBc)
<2400	-8.44	-60.36	-51.92	>20dBc
>2483.5	-12.28	-70.52	-58.24	>20dBc

#### 2. Radiated emission test

Frequency (MHz)	Antenna polarization (H/V)	Emission (dBuV/m)		Band edge Limit (dBuV/m)	
		PK	AV	PK	AV
<2400	V	58.79	47.51	74.00	54.00
>2483.5	V	60.95	45.44	74.00	54.00
<2400	H	63.37	47.93	74.00	54.00
>2483.5	H	61.69	46.05	74.00	54.00

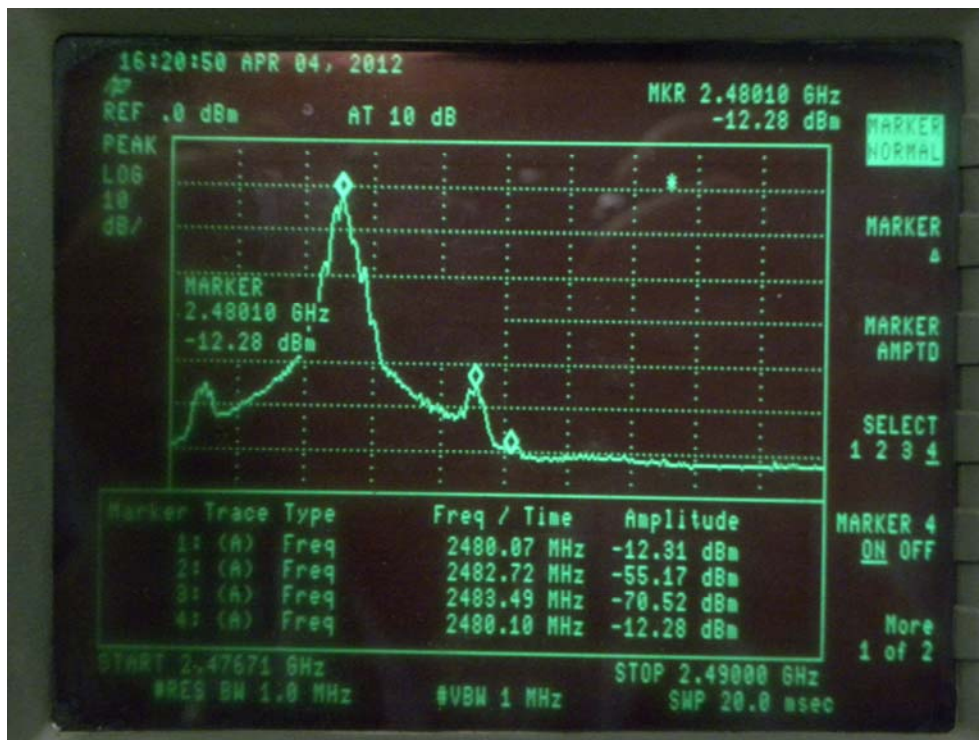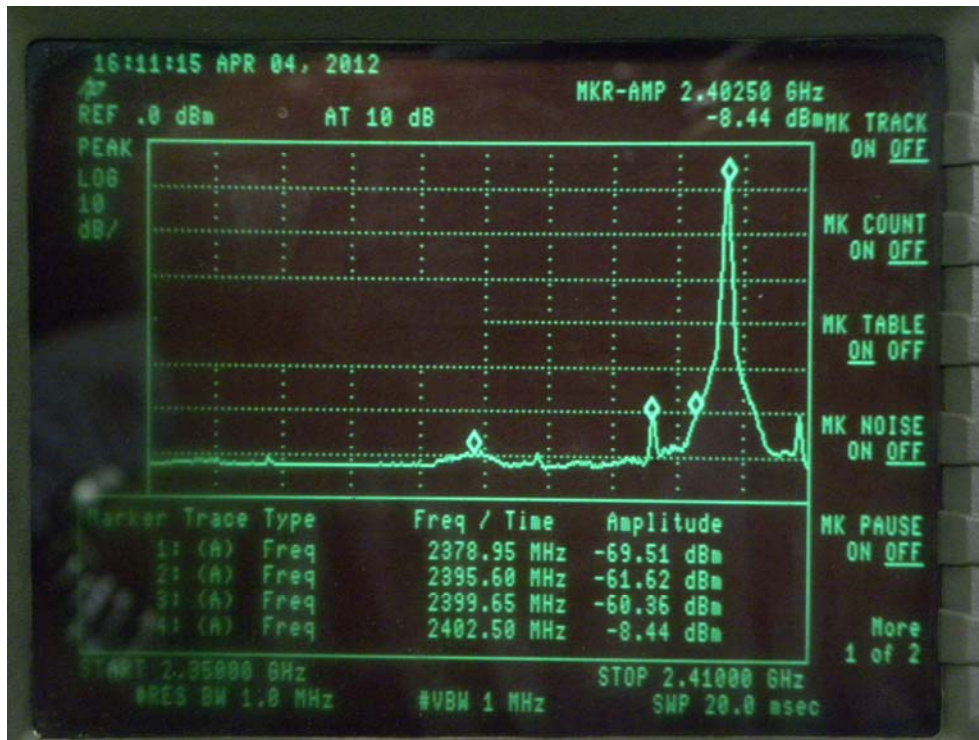


### 13. RF Antenna Conducted Spurious Emissions

#### 13.1 test requirement:

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF con-ducted or a radiated measurement.

#### 13.2 Test SET-UP (Block Diagram of Configuration)






#### 13.3 Measurement Equipment Used:

EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	LAST CAL.	CAL DUE.
Spectrum Analyzer	Rohde & Schwarz	ESU	1302.6005.26	05/29/2011	05/29/2012

#### 13.4 Results:

Please refer the following plots:

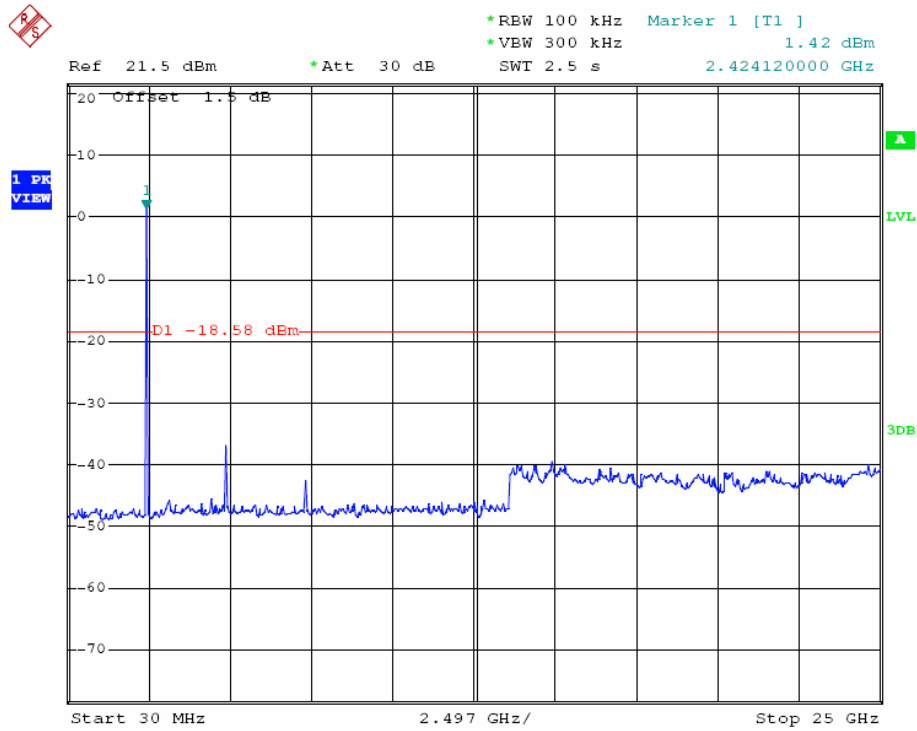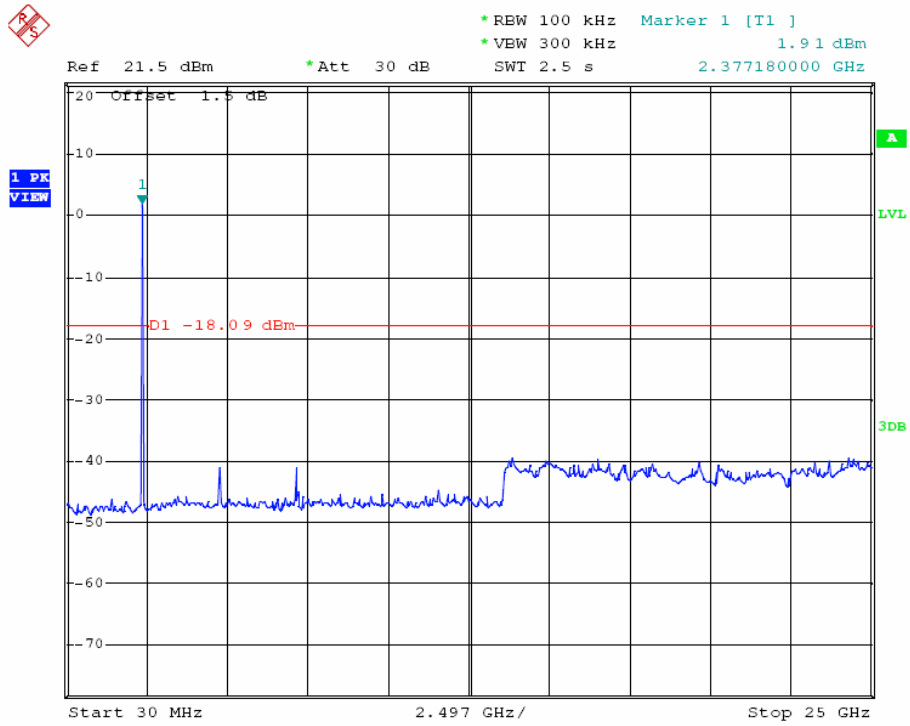

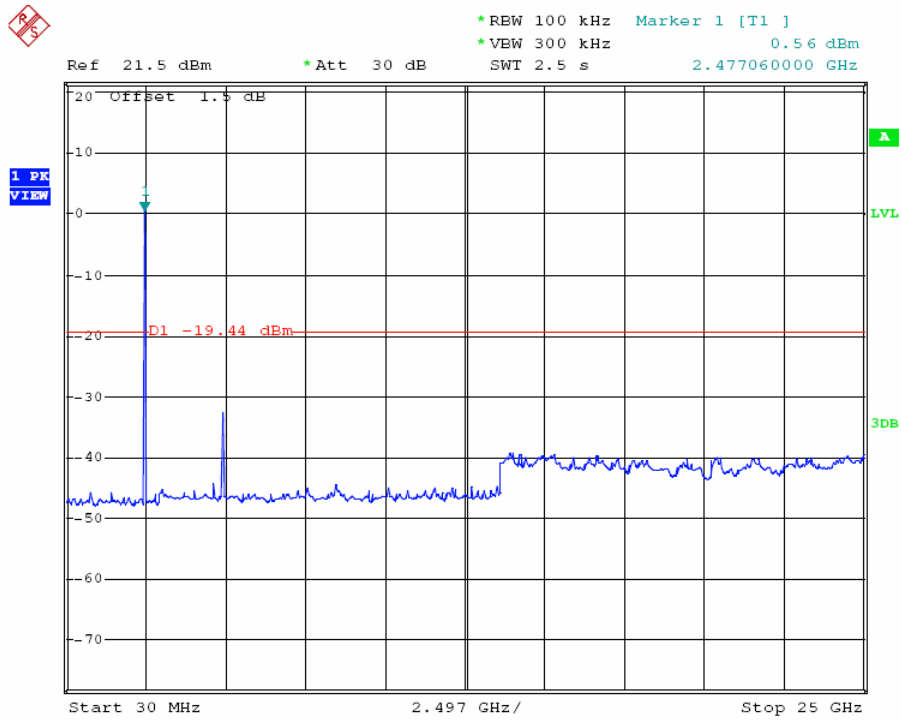

## **14. Antenna Application**

### **14.1 Antenna requirement**

The EUT'S antenna is met the requirement of FCC part 15C section 15.203 and 15.247.

FCC part 15C section 15.247 requirements:

Systems operating in the 2402-2480MHz band that are used exclusively for fixed, point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum peak output power of the intentional radiator is reduced by 1dB for every 3dB that the directional gain of the antenna exceeds 6dBi.

### **14.2 Result**

The EUT's antenna used a chip antenna and integrated on PCB, The antenna's gain is 4 dBi and meets the requirement.



### 15. RF EXPOSURE EVALUATION

According to FCC 1.1310: The criteria listed in the following table shall be used to evaluate the environment impact of human exposure to radio frequency(RF) Radiation as specified in § 1.1307(b)

Limits for Maximum Permissible Exposure(MPE)

Frequency Range(MHz)	Electric Field Strength(V/m)	Magnetic Field Strength(A/m)	Power Density(mW/cm <sup>2</sup> )	Average Time
<b>(A) Limits for Occupational/Control Exposures</b>				
<b>300-1500</b>	--	--	<b>F/300</b>	<b>6</b>
<b>1500-100000</b>	--	--	<b>5</b>	<b>6</b>
<b>(B) Limits for General Population/Uncontrol Exposures</b>				
<b>300-1500</b>	--	--	<b>F/1500</b>	<b>6</b>
<b>1500-100000</b>	--	--	<b>1</b>	<b>30</b>

#### 15.1 Friis transmission formula: $P_d = (P_{out} * G) / (4 * \pi * R^2)$

Where

$P_d$ = Power density in mW/cm<sup>2</sup>

$P_{out}$ =output power to antenna in Mw

$G$ = gain of antenna in linear scale

$\pi$ =3.1416

$R$ = distance between observation point and center of the radiator in cm

$P_d$  the limit of MPE, 1mW/cm<sup>2</sup>. If we know the maximum gain of the antenna and total power input to the antenna, through the calculation, we will know the distance where the MPE limit is reached.

#### 15.2 Measurement Result

Channel	Channel Frequency (MHz)	Output Peak power (mW)	Antenna Gain (dBi)	Power density at 20cm (mW/ cm <sup>2</sup> )	Power density Limits (mW/cm <sup>2</sup> )
Low	2402	0.289	4	2.299E-04	1
Middle	2441	0.169	4	1.345E-04	1
High	2480	0.109	4	0.867E-04	1