



FCC 47 CFR PART 15 SUBPART C

TEST REPORT

For

UMPC

Model: CW0A1;CW0A1 series

Trade Name: FIC, EVEREX

First International Computer,Inc

NO.300,YangGuang St.,NeiHu,Taipei, Taiwan,114

Issued by

COMPLIANCE CERTIFICATION SERVICES (KUNSHAN) INC.

10#Weiye Rd, Innovation Park Eco. & Tec. Development Zone

Kunshan city JiangSu, (215300) CHINA

TEL: 86-512-57355888

FAX: 86-512-57370818



Note: This report shall not be reproduced except in full, without the written approval of Compliance Certification Services Inc. This document may be altered or revised by Compliance Certification Services Inc. personnel only, and shall be noted in the revision section of the document.



TABLE OF CONTENTS

- 1. TEST RESULT CERTIFICATION..... 3**
- 2. COMPLIANCE CERTIFICATION SERVICES INC. 4**
- 3. TEST METHODOLOGY 5**
 - EUT CONFIGURATION.....5
 - EUT EXERCISE5
 - GENERAL TEST PROCEDURES.....5
 - FCC PART 15.205 RESTRICTED BANDS OF OPERATIONS.....6
 - DESCRIPTION OF TEST MODES.....6
- 4. INSTRUMENT CALIBRATION..... 7**
- 5. FACILITIES AND ACCREDITATIONS 8**
 - FACILITIES8
 - EQUIPMENT.....8
 - LABORATORY ACCREDITATIONS AND LISTING8
 - TABLE OF ACCREDITATIONS AND LISTINGS9
- 6. SETUP OF EQUIPMENT UNDER TEST 10**
 - SETUP CONFIGURATION OF EUT10
 - SUPPORT EQUIPMENT10
- 7. FCC PART 15.247 REQUIREMENTS..... 11**
 - PEAK POWER.....11
 - BAND EDGES MEASUREMENT.....13
 - PEAK POWER SPECTRAL DENSITY19
 - FREQUENCY SEPARATION22
 - NUMBER OF HOPPING FREQUENCY26
 - TIME OF OCCUPANCY (DWELL TIME).....28
 - RADIO FREQUENCY EXPOSURE32
 - SPURIOUS EMISSIONS33
 - POWERLINE CONDUCTED EMISSIONS44
- APPENDIX 1 PHOTOGRAPHS OF TEST SETUP 50**



TEST RESULT CERTIFICATION

Applicant: First International Computer, Inc
NO.300, YangGuang St., NeiHu, Taipei, Taiwan, 114

Equipment Under Test: UMPC

Trade Name: FIC, EVEREX

Model: CW0A1; CW0A1 series

Date of Test: From August 15, 2008 to August 24, 2008

APPLICABLE STANDARDS	
STANDARD	TEST RESULT
FCC 47 CFR Part 15 Subpart C	No non-compliance noted

We here by certify that:

The above equipment was tested by Compliance Certification Services Inc. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.4: 2003 and the energy emitted by the sample EUT tested as described in this report is in compliance with the requirements of FCC Rules Part 15.207, 15.209, 15.247.

The test results of this report relate only to the tested sample EUT identified in this report.

Approved by:

Miro Chueh
EMC Manager
Compliance Certification Services Inc.

Reviewed by:

Lin Zhang
EMC Section Manager
Compliance Certification Services Inc.

**COMPLIANCE CERTIFICATION SERVICES INC.****EUT DESCRIPTION**

Product	UMPC
Trade Name	FIC; EVEREX
Model Number	CW0A1; CW0A1 series
Model Discrepancy	All the above models are identical except the model designation for different market.
Bluetooth module Model Number	GUBTCR42M-A
Bluetooth module Brand name	Billionton
Power Supply	Powered from an AC/DC power adapter (1)Model name: ADP-40MH AD Manufacturer: DELTA Input: AC 100-240V, 50-60Hz, 1.2A Output: DC 20V, 2A (2)Model name: 0225C2040 Manufacturer: LISHIN Input: AC 100-240V, 50-60Hz, 1.7A Output: DC 20V, 2.0A
Frequency Range	2402 ~ 2480 MHz
Transmit Power	1.89dBm
Modulation Technique	FHSS
Transmit Data Rate	GFSK(1Mbps), $\pi/4$ -DQPSK(2Mbps), 8-DPSK(3Mbps)
Number of Channels	79 Channels
Antenna Specification	Chip Antenna / Gain: 2 dBi

Remark: This submittal(s) (test report) is intended for FCC ID: EUNCW0A1A filing to comply with Section 15.207, 15.209 and 15.247 of the FCC Part 15, Subpart C Rules.



TEST METHODOLOGY

The tests documented in this report were performed in accordance with ANSI C63.4 and FCC CFR 47 2.1046, 2.1047, 2.1049, 2.1051, 2.1053, 2.1055, 2.1057, 15.207, 15.209 and 15.247.

EUT CONFIGURATION

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner that intends to maximize its emission characteristics in a continuous normal application.

EUT EXERCISE

The EUT was operated in the engineering mode to fix the TX frequency that was for the purpose of the measurements.

According to its specifications, the EUT must comply with the requirements of the Section 15.207, 15.209 and 15.247 under the FCC Rules Part 15 Subpart C.

GENERAL TEST PROCEDURES

Conducted Emissions

The EUT is placed on the turntable, which is 0.8 m above ground plane. According to the requirements in Section 13.1.4.1 of ANSI C63.4 Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using CISPR Quasi-peak and average detector modes.

Radiated Emissions

The EUT is placed on a turn table, which is 0.8 m above ground plane. The turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna, which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the maximum emissions, exploratory radiated emission measurements were made according to the requirements in Section 13.1.4.1 of ANSI C63.4.



FCC PART 15.205 RESTRICTED BANDS OF OPERATIONS

(a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

Table with 4 columns: MHz, MHz, MHz, GHz. It lists various frequency ranges for restricted bands of operations.

1 Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

2 Above 38.6

(b) Except as provided in paragraphs (d) and (e), the field strength of emissions appearing within these frequency bands shall not exceed the limits shown in Section 15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in Section 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in Section 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in Section 15.35 apply to these measurements.

DESCRIPTION OF TEST MODES

The EUT has been tested under operating condition.

After verification, all tests were carried out with the worst case test modes as shown below except radiated spurious emission below 1GHz, which worst case was in normal link mode only.

Then, the worst case is GFSK(1M) Channel Low (2402MHz) · Mid (2441MHz) and High (2480MHz), these were chosen for full testing.

Note: After the preliminary san GFSK, π/4-DQPSK,8-DPSK. we found the modulation at GFSK producing the highest emission level, so evaluated we chosen the above modes (worst case) as a representative.



INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment, which is traceable to recognized national standards.



FACILITIES AND ACCREDITATIONS

FACILITIES

All measurement facilities used to collect the measurement data are located at CCS China Kunshan Lab at 10#Weiye Rd, Innovation Park Eco. & Tec. Development Zone Kunshan city JiangSu, (215300), CHINA.

The sites are constructed in conformance with the requirements of ANSI C63.7, ANSI C63.4 and CISPR Publication 22.

EQUIPMENT

Radiated emissions are measured with one or more of the following types of linearly polarized antennas: tuned dipole, biconical, log periodic, bi-log, and/or ridged waveguide, horn. Spectrum analyzers with pre-selectors and quasi-peak detectors are used to perform radiated measurements.

Conducted emissions are measured with Line Impedance Stabilization Networks and EMI Test Receivers.

Calibrated wideband preamplifiers, coaxial cables, and coaxial attenuators are also used for making measurements.

All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

LABORATORY ACCREDITATIONS AND LISTING

The test facilities used to perform radiated and conducted emissions tests are accredited by American Association for Laboratory Accreditation Program for the specific scope accreditation under Lab Code: 200581-0 to perform Electromagnetic Interference tests according to FCC Part 15 and CISPR 22 requirements. In addition, the test facilities are listed with Industry Canada, Certification and Engineering Bureau, IC5743 for 10m chamber 10m, IC5743 for 10m chamber 3m.



TABLE OF ACCREDITATIONS AND LISTINGS

Country	Agency	Scope of Accreditation	Logo
USA	A2LA	47 CFR FCC Part 15/18 (using ANSI C63.4:2003); VCCI V3; CNS 13438; CNS 13439; CNS 13803; CISPR 11; EN 55011; CISPR 13; EN 55013; CISPR 22:2005; CISPR 22:1997 +A1 :2000+A2 :2002; EN 55022:2006; EN55022 :1998 +A1 :2001+A2 :2003; EN 61000-6-3 (excluding discontinuous interference); EN 61000-6-4; AS/NZS CISPR 22; CAN/CSA-CEI/IEC CISPR 22; EN 61000-3-2; EN 61000-3-3; EN550024; EN 61000-4-2; EN 61000-4-3; EN61000-4-4; EN 61000-4-5; EN 61000-4-6; IEC 61000-4-8; EN 61000-4-11; IEC61000-3-2; IEC61000-3-3; IEC 61000-4-2; IEC 61000-4-3; IEC 61000-4-4; IEC 61000-4-5; IEC 61000-4-6; IEC 61000-4-8; IEC 61000-4-11; EN 300 220-3; EN 300 328; EN 300 330-2; EN 300 440-1; EN 300-440-2; EN 300 893; EN 301 489-01; EN 301 489-3; EN 301 489-07; EN 301 489-17; 47 CFR FCC Part 15, 22, 24	
USA	FCC	3/10 meter Sites to perform FCC Part 15/18 measurements	
Japan	VCCI	3/10 meter Sites and conducted test sites to perform radiated/conducted measurements	

* No part of this report may be used to claim or imply product endorsement by A2LA or any agency of the US Government.



SETUP OF EQUIPMENT UNDER TEST

SETUP CONFIGURATION OF EUT

See test photographs attached in Appendix 1 for the actual connections between EUT and support equipment.

SUPPORT EQUIPMENT

No.	Equipment	Model No.	Serial No.	FCC ID	Trade Name	Data Cable	Power Cord
1	LCD Monitor	SDM-HX7 3	9014264	DoC	SONY	Shielded, 1.8m with a Core	Un-Shielded, 1.5m
2	HDD-1	IC25N01 0ATDA04- 0	173W3644	DoC	IBM	Shielded, 1.5m	N/A
3	HDD-2	IC25N01 0ATDA04- 0	173W3646	DoC	IBM	Shielded, 1.5m	N/A
4	Speaker-1	CD-371	N/A	DoC	JINLIA N	Un-Shielded, 2.0m	N/A
5	Notebook	M285	1824064-1B	DoC	LEO	LAN cable: Shielded 10m	Shielded, 1.8m
6	Mouse	Y-SJ17(ACK260A)	SYU34537900	DoC	Logitech	Shielded, 1.5m	N/A

Remark:

1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.



FCC PART 15.247 REQUIREMENTS

PEAK POWER

LIMIT

The maximum peak output power of the intentional radiator shall not exceed the following:


1. According to §15.247(a)(1), Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.
2. According to §15.247(b)(3), for systems using digital modulation in the bands of 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz: 1 Watt.
3. According to §15.247(b)(4), the conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

MEASUREMENT EQUIPMENT USED

Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
Spectrum Analyzer	Agilent	E4446A	MY44020154	11/16/2008
Peak and Avg Power Sensor	Agilent	E9327A	US40441788	07/29/2009
EPM-P Series Power Meter	Agilent	E4416A	QB41292714	07/29/2009

Remark: Each piece of equipment is scheduled for calibration once a year.

Test Configuration



TEST PROCEDURE

The transmitter output is connected to the Power Meter.



TEST RESULTS

No non-compliance noted

Test Data

Channel	Frequency (MHz)	Reading Power (dBm)	Factor (dB)	Output Power (dBm)	Output Power (W)	Limit (W)	Result
Low	2402	-0.08	1.50	1.42	0.00139	1	PASS
Mid	2441	0.39	1.50	1.89	0.00155		PASS
High	2480	-0.03	1.50	1.47	0.00140		PASS

BAND EDGES MEASUREMENT

LIMIT


According to §15.247(c), in any 100 kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a).

MEASUREMENT EQUIPMENT USED

977 Chamber (3m)				
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
Spectrum Analyzer	Agilent	E4446A	MY44020154	11/16/2008
Pre-Amplifier	Miteq	NSP4000-NF	870731	01/21/2009
Horn Antenna	Austriah	BBHA9120D	D267	02/03/2009
Turn Table	CT	CT123	4162	N.C.R
Antenna Tower	CT	CTERG23	3253	N.C.R
Controller	CT	CT100	95635	N.C.R
Coax Switch	Anitsu	MP 598	M 80094	N/A
Site NSA	CCS Lab.	N/A	N/A	02/15/2009

Remark: Each piece of equipment is scheduled for calibration once a year.

Test Configuration

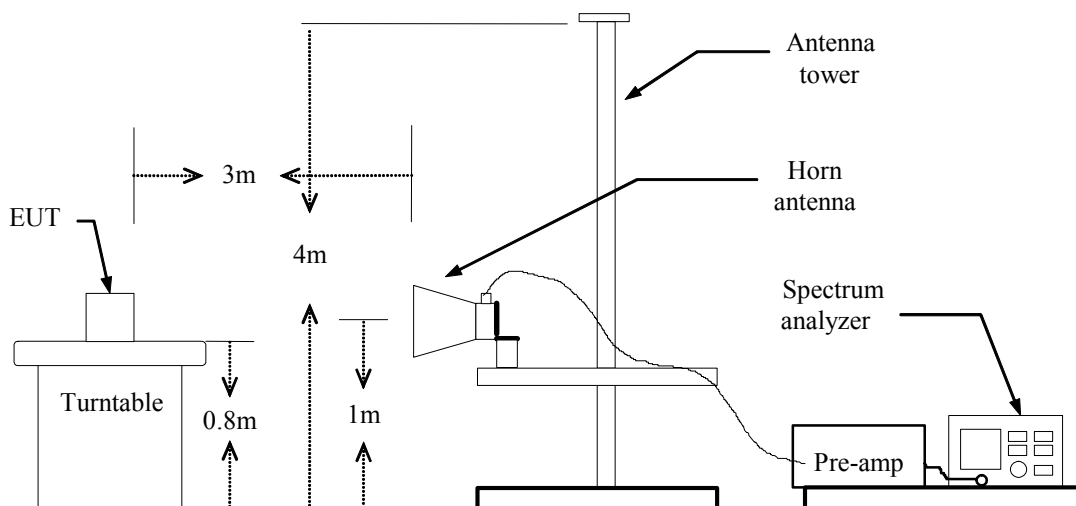

TEST PROCEDURE

1. The EUT is placed on a turntable, which is 0.8m above the ground plane.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out



- the highest emission.
4. Set the spectrum analyzer in the following setting in order to capture the lower and upper band-edges of the emission:
 - (a) PEAK: RBW=VBW=1MHz / Sweep=AUTO
 - (b) AVERAGE: RBW=1MHz / VBW=10Hz / Sweep=AUTO
 5. Repeat the procedures until all the PEAK and AVERAGE versus POLARIZATION are measured.

TEST RESULTS

CH LOW

Freq. (MHz)	Ant. Pol H/V	Peak Reading (dBuV)	AV Reading (dBuV)	Ant. / CL CF (dB)	Actual Fs		Peak Limit (dBuV/m)	AV Limit (dBuV/m)	Peak Margin (dB)	AV Margin (dB)
					Peak (dBuV/m)	AV (dBuV/m)				
2390.10	V	39.23	27.31	4.92	44.15	32.23	74	54	-29.85	-21.77
2390.10	H	38.27	27.11	4.92	43.19	32.03	74	54	-30.81	-21.97

CH HIGH

Freq. (MHz)	Ant. Pol H/V	Peak Reading (dBuV)	AV Reading (dBuV)	Ant. / CL CF (dB)	Actual Fs		Peak Limit (dBuV/m)	AV Limit (dBuV/m)	Peak Margin (dB)	AV Margin (dB)
					Peak (dBuV/m)	AV (dBuV/m)				
2483.50	V	37.53	27.82	4.92	42.45	32.74	74	54	-31.55	-21.26
2483.50	H	38.26	27.51	4.92	43.18	32.43	74	54	-30.82	-21.57

Refer to attach spectrum analyzer data chart.




Band Edges (CH Low)

Detector mode: Peak

Polarity: Vertical

Agilent 01:06:32 Aug 21, 2008

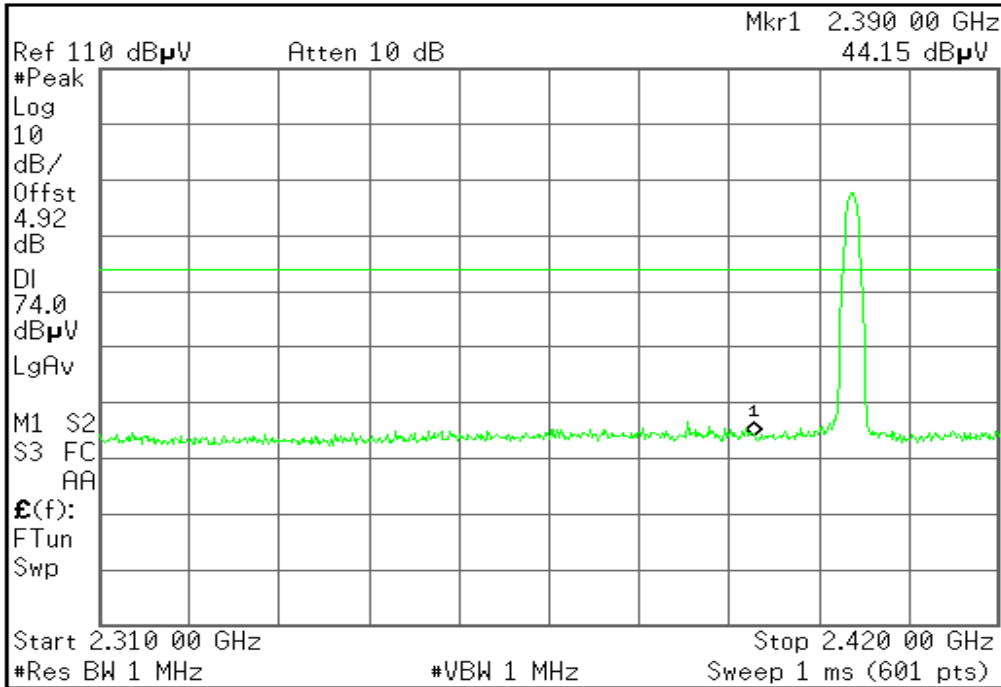


Marker				
Select Marker	1	2	3	4
Normal				
Delta				
Delta Pair (Tracking Ref)	Ref			
Span Pair	Span	Center		
Off				
More	1 of 2			

Copyright 2000-2007 Agilent Technologies

Detector mode: Average

Polarity: Vertical

Agilent 01:07:50 Aug 21, 2008

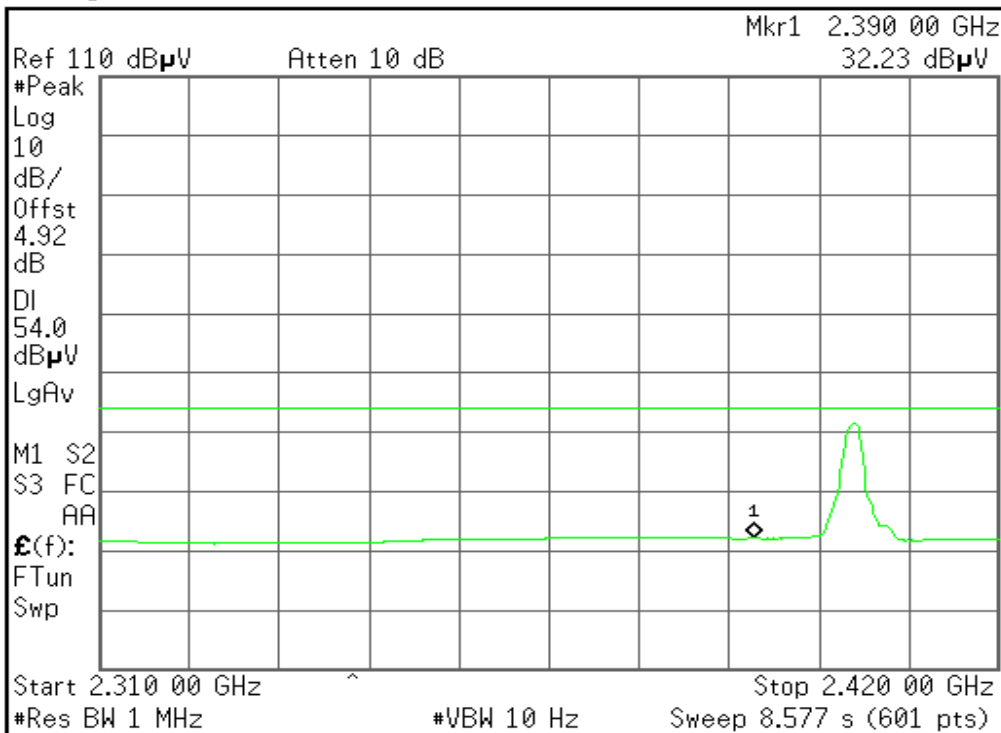


Marker				
Select Marker	1	2	3	4
Normal				
Delta				
Delta Pair (Tracking Ref)	Ref			
Span Pair	Span	Center		
Off				
More	1 of 2			

Copyright 2000-2007 Agilent Technologies



Detector mode: Peak Polarity: Horizontal

Agilent 01:11:53 Aug 21, 2008

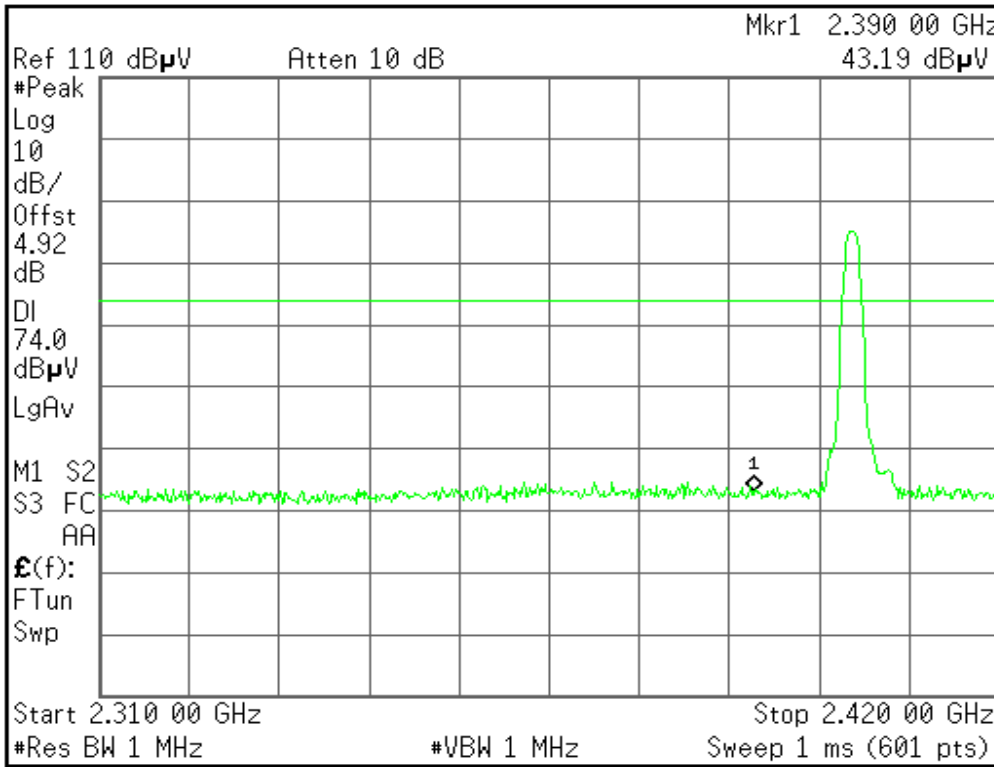


Marker				
Select Marker	1	2	3	4
Normal				
Delta				
Delta Pair (Tracking Ref) Ref \blacktriangle				
Span Pair Span Center				
Off				
More 1 of 2				

Copyright 2000-2007 Agilent Technologies

Detector mode: Average Polarity: Horizontal

Agilent 01:12:25 Aug 21, 2008

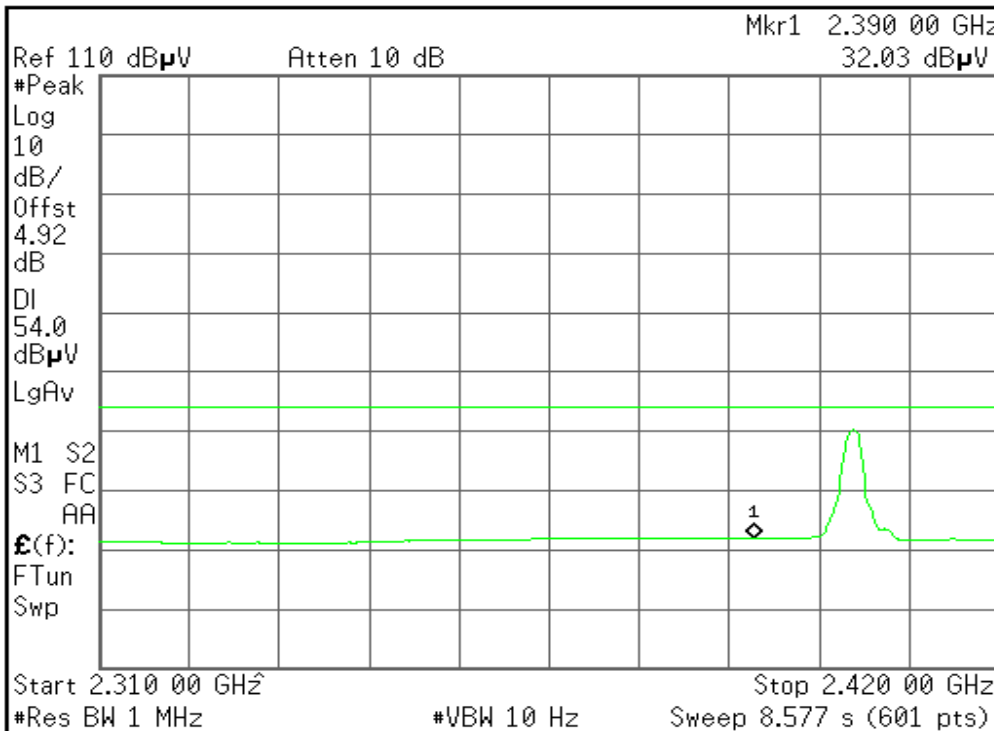

Marker				
Select Marker	1	2	3	4
Normal				
Delta				
Delta Pair (Tracking Ref) Ref \blacktriangle				
Span Pair Span Center				
Off				
More 1 of 2				

Copyright 2000-2007 Agilent Technologies




Band Edges (CH High)

Detector mode: Peak

Polarity: Vertical

Agilent 01:21:16 Aug 21, 2008

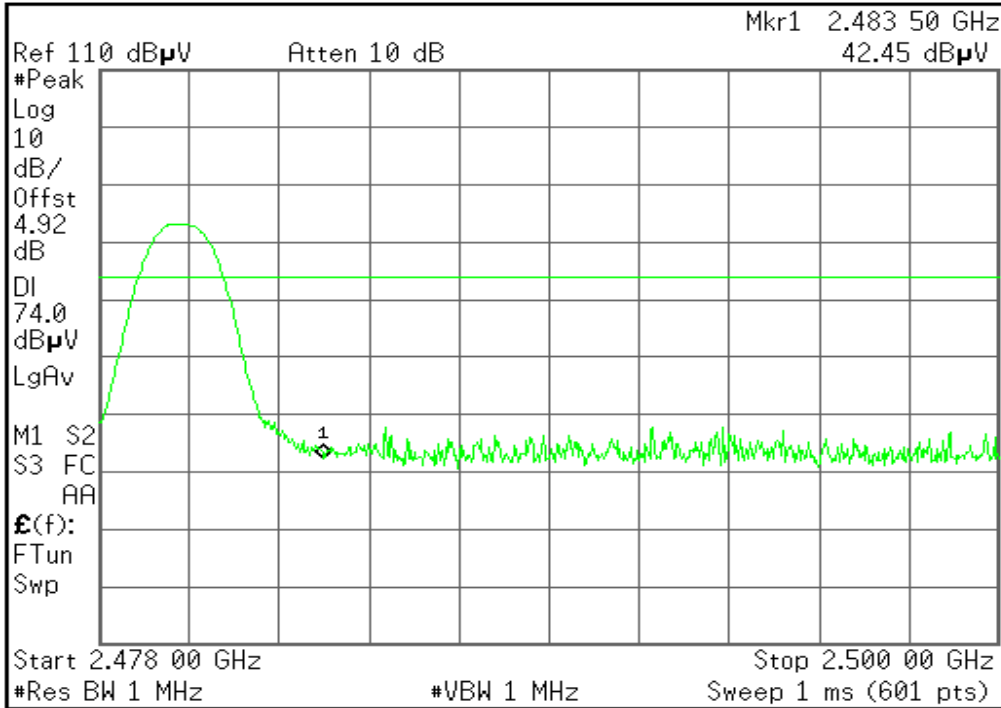


Marker				
Select Marker	1	2	3	4
Normal				
Delta				
Delta Pair (Tracking Ref)	Ref			▲
Span Pair	Span	Center		
Off				
More	1 of 2			

Copyright 2000-2007 Agilent Technologies

Detector mode: Average

Polarity: Vertical

Agilent 01:21:58 Aug 21, 2008

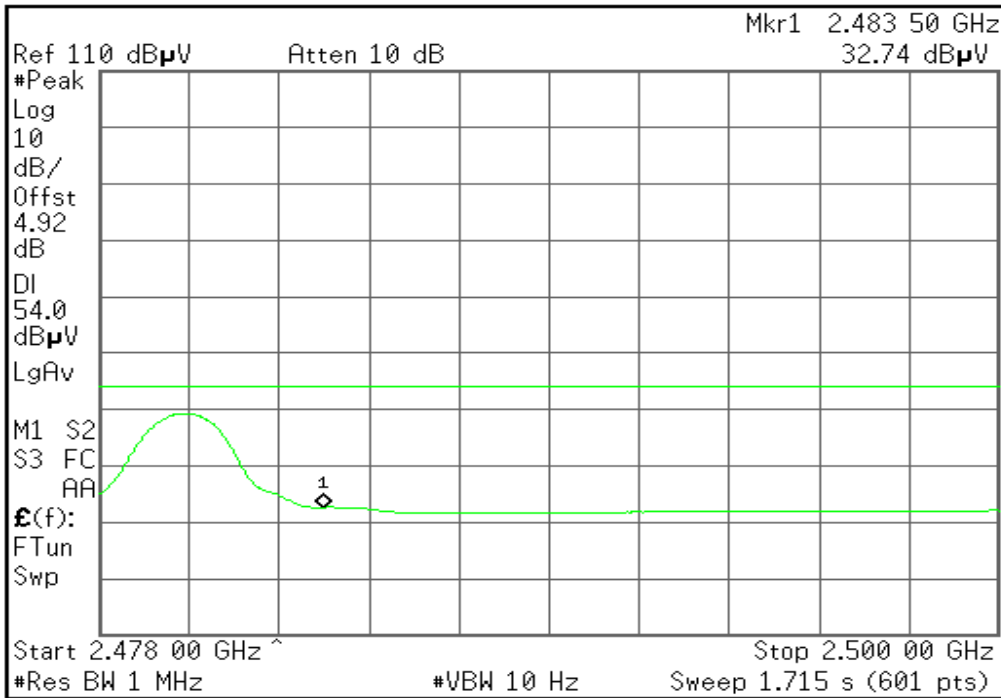


Marker				
Select Marker	1	2	3	4
Normal				
Delta				
Delta Pair (Tracking Ref)	Ref			▲
Span Pair	Span	Center		
Off				
More	1 of 2			

Copyright 2000-2007 Agilent Technologies



Detector mode: Peak Polarity: Horizontal

Agilent 01:18:01 Aug 21, 2008

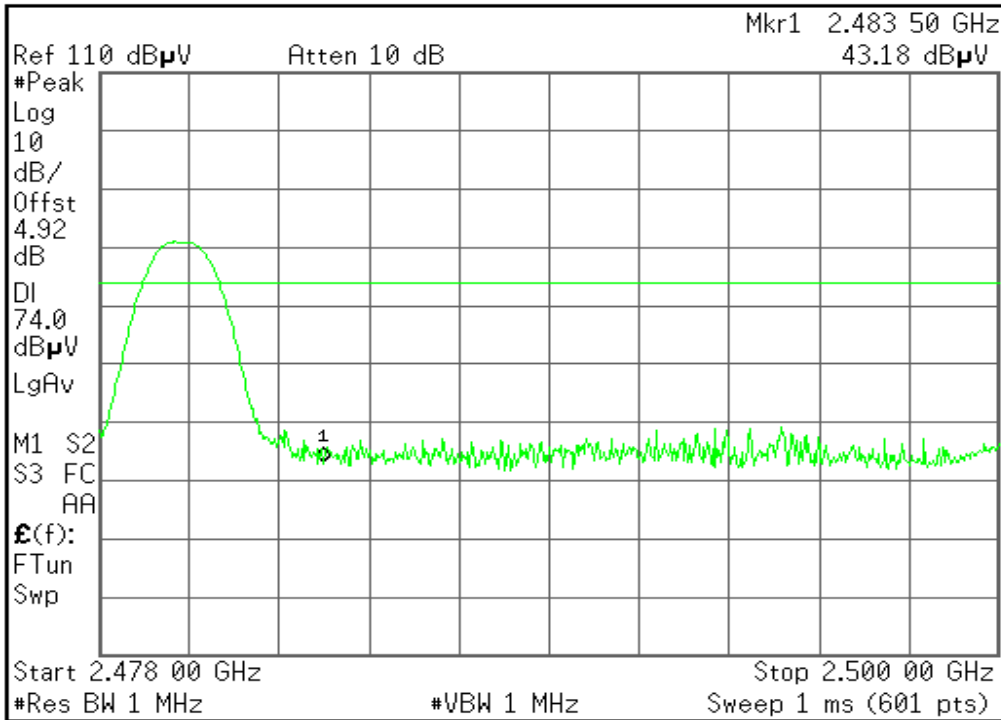


Marker				
Select Marker	1	2	3	4
Normal				
Delta				
Delta Pair (Tracking Ref)	Ref			
Span Pair	Span	Center		
Off				
More	1 of 2			

Copyright 2000-2007 Agilent Technologies

Detector mode: Average Polarity: Horizontal

Agilent 01:18:37 Aug 21, 2008

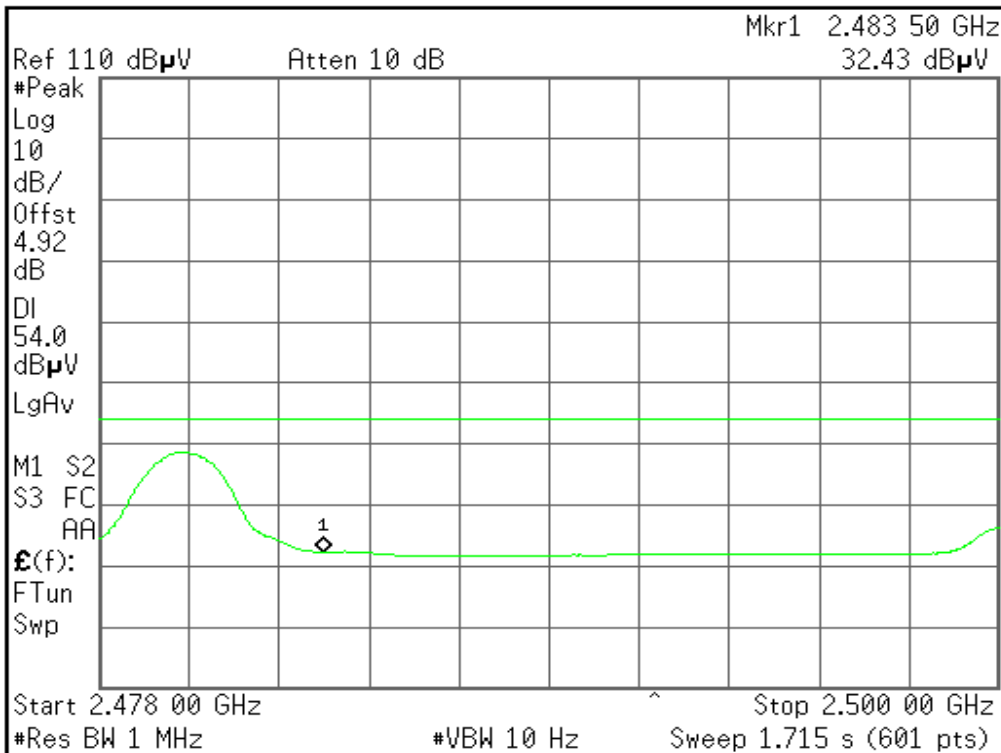

Marker				
Select Marker	1	2	3	4
Normal				
Delta				
Delta Pair (Tracking Ref)	Ref			
Span Pair	Span	Center		
Off				
More	1 of 2			

Copyright 2000-2007 Agilent Technologies



PEAK POWER SPECTRAL DENSITY

LIMIT


1. For direct sequence systems, the peak power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8dBm in any 3kHz band during any time interval of continuous transmission.
2. The direct sequence operating of the hybrid system, with the frequency hopping operation turned off, shall comply with the power density requirements of paragraph (d) of this section.

MEASUREMENT EQUIPMENT USED

Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
Spectrum Analyzer	Agilent	E4446A	MY44020154	11/16/2008

Remark: Each piece of equipment is scheduled for calibration once a year.

Test Configuration



TEST PROCEDURE

1. Place the EUT on the table and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
3. Set the spectrum analyzer as RBW = 3kHz, VBW = 10kHz, Span = 300kHz, Sweep=100s
4. Record the max. reading.
5. Repeat the above procedure until the measurements for all frequencies are completed.

TEST RESULTS

No non-compliance noted

Test Data


Channel	Frequency	Reading (dBm)	Factor (dB)	PPSD (dBm)	Limit (dBm)	Result
Low	2402	-11.26	1.50	-9.76	8.00	PASS
Mid	2441	-10.43	1.50	-8.93		PASS
High	2480	-10.82	1.50	-9.32		PASS



Test Plot


PPSD (CH Low)

Agilent 23:32:42 Aug 20, 2008

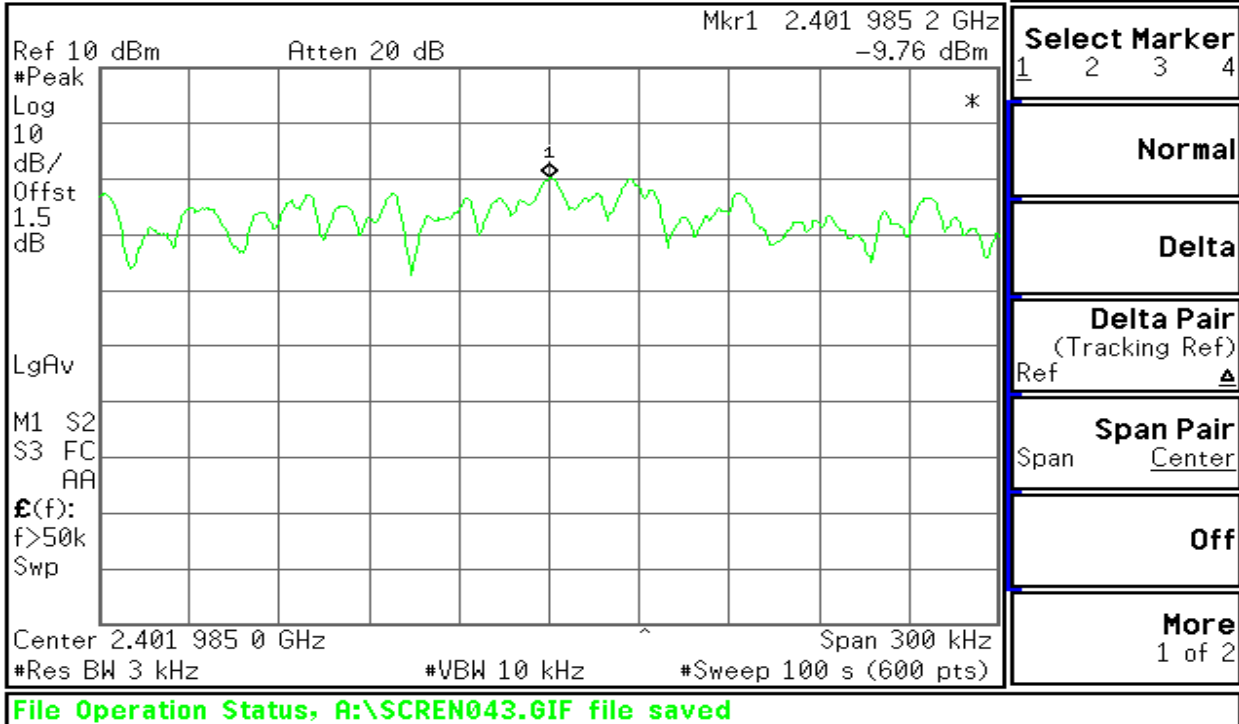

PPSD (CH Mid)


Agilent 23:33:35 Aug 20, 2008

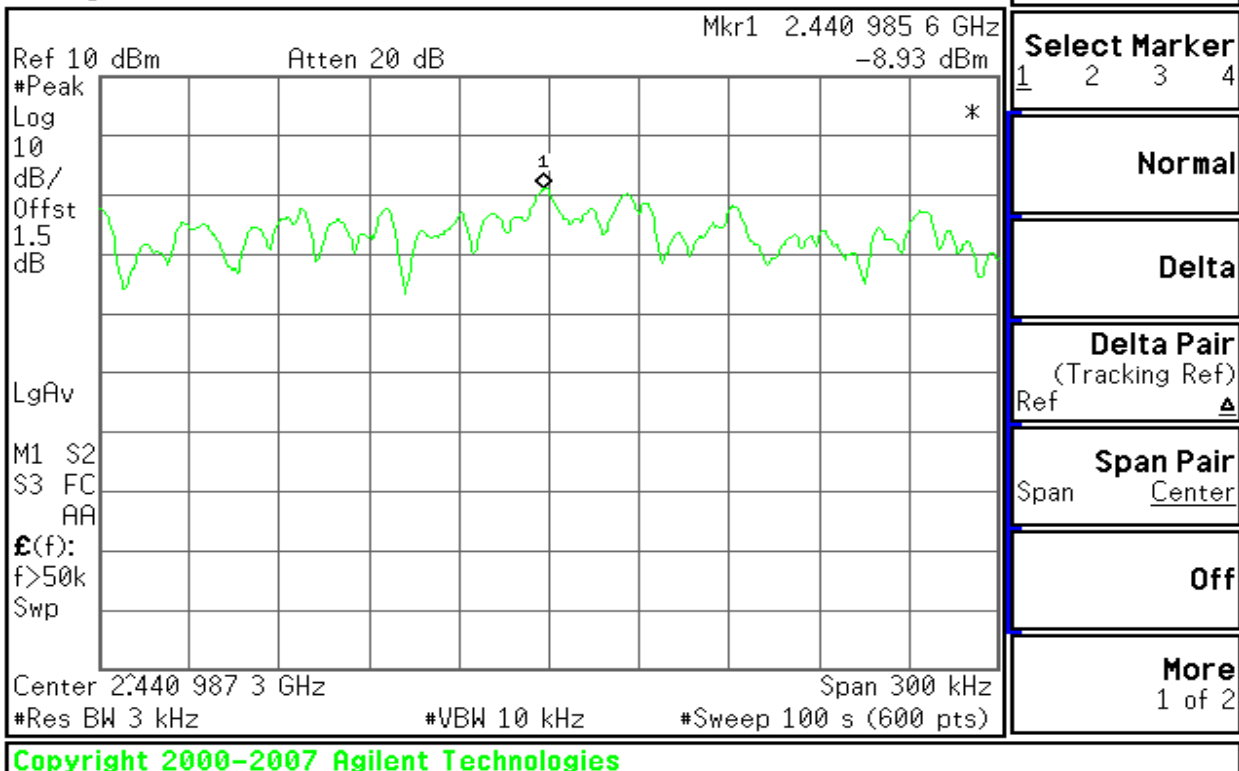



PPSD (CH High)

Agilent 23:34:44 Aug 20, 2008

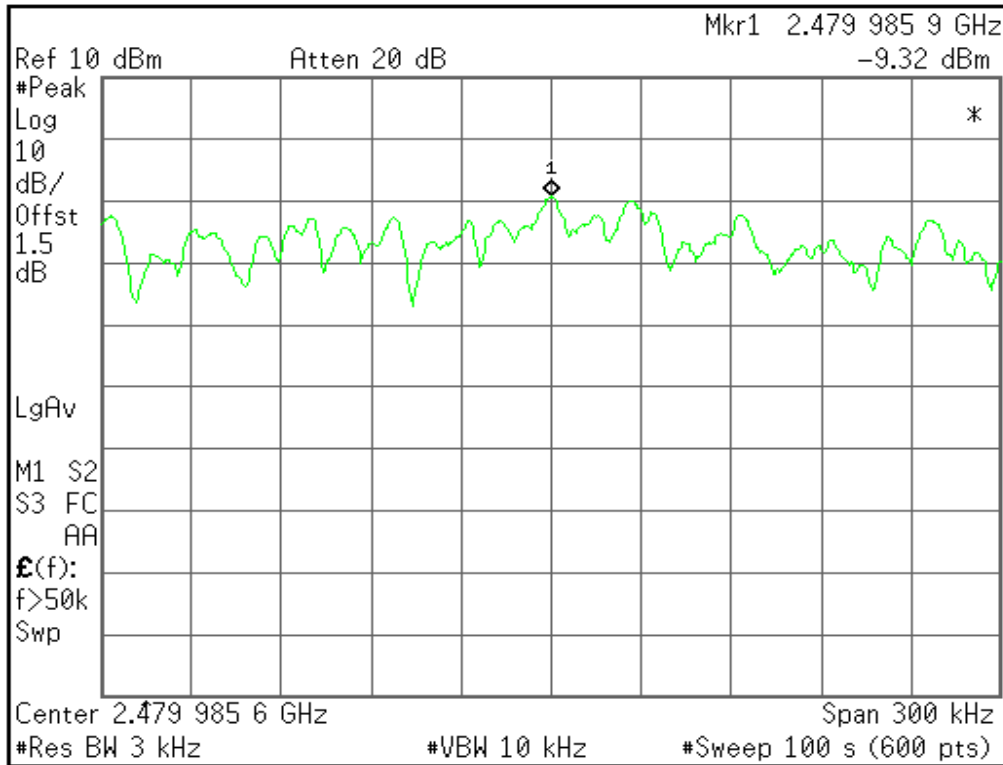

Marker			
Select Marker			
1	2	3	4
Normal			
Delta			
Delta Pair (Tracking Ref)			
Ref	▲		
Span Pair			
Span	Center		
Off			
More 1 of 2			

Copyright 2000-2007 Agilent Technologies



FREQUENCY SEPARATION

LIMIT


According to §15.247(a)(1), Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

MEASUREMENT EQUIPMENT USED

Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
Spectrum Analyzer	Agilent	E4446A	MY44020154	11/16/2008

Remark: Each piece of equipment is scheduled for calibration once a year.

Test Configuration



TEST PROCEDURE

1. Place the EUT on the table and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
3. Set center frequency of spectrum analyzer = middle of hopping channel.
4. Set the spectrum analyzer as RBW = 30kHz, VBW = 100kHz, Span = 3MHz, Sweep = auto.
5. Max hold, mark 2 peaks of hopping channel and record the 2 peaks frequency.

TEST RESULTS

No non-compliance noted

Test Data

Channel Separation (MHz)	20dB Bandwidth (kHz)	Limit (kHz)	Result
1.000	942.569	>628.38	Pass




Test Plot

Measurement of Channel Separation


Channel Low

Agilent 23:39:18 Aug 20, 2008

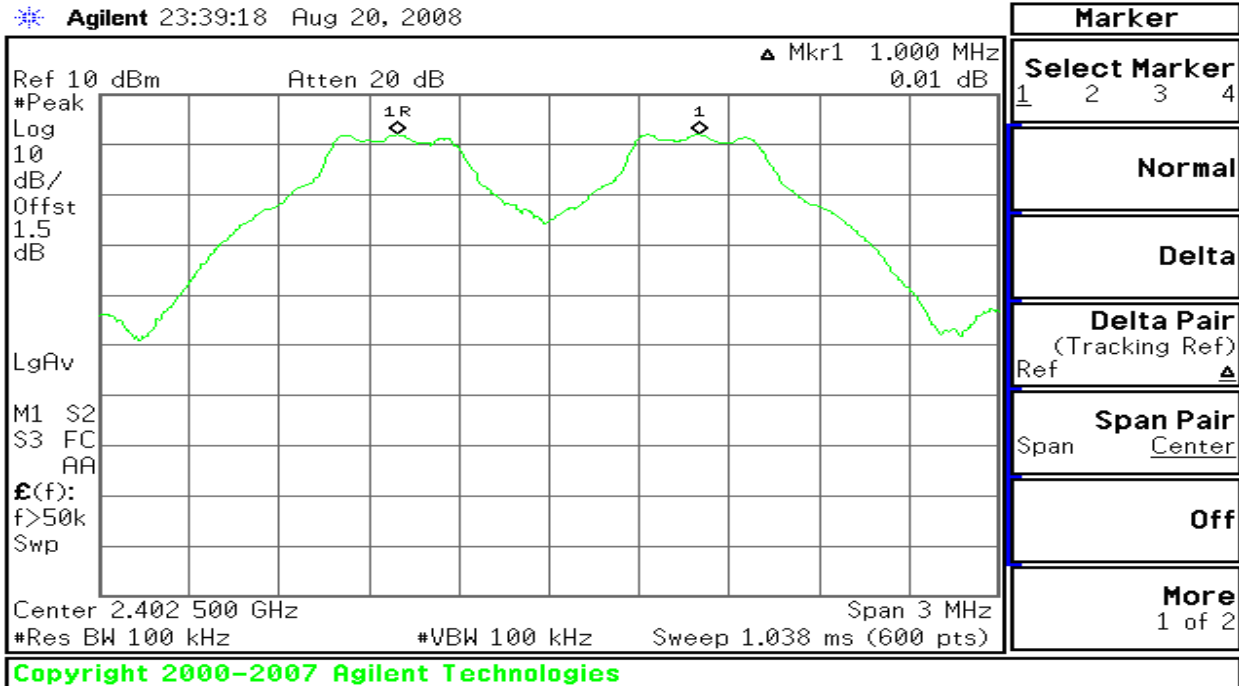

Channel middle


Agilent 23:41:34 Aug 20, 2008

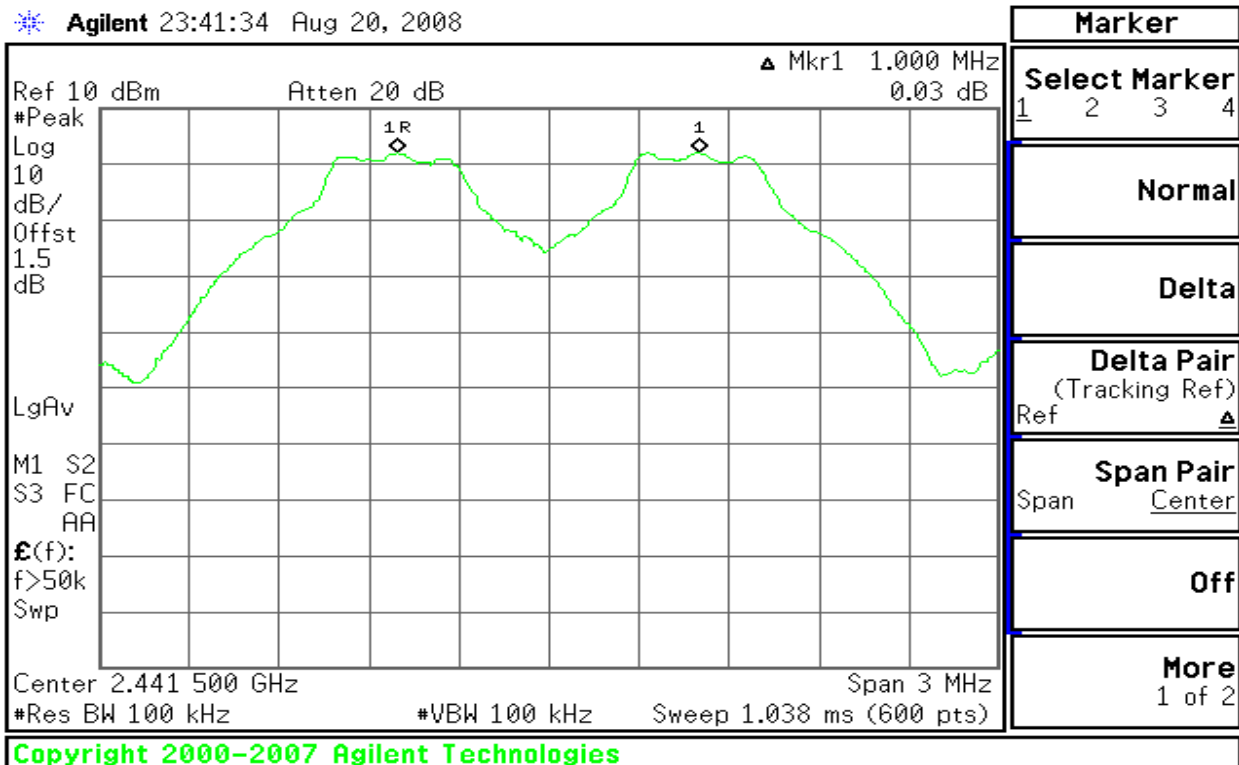



Channel high

Agilent 23:44:08 Aug 20, 2008

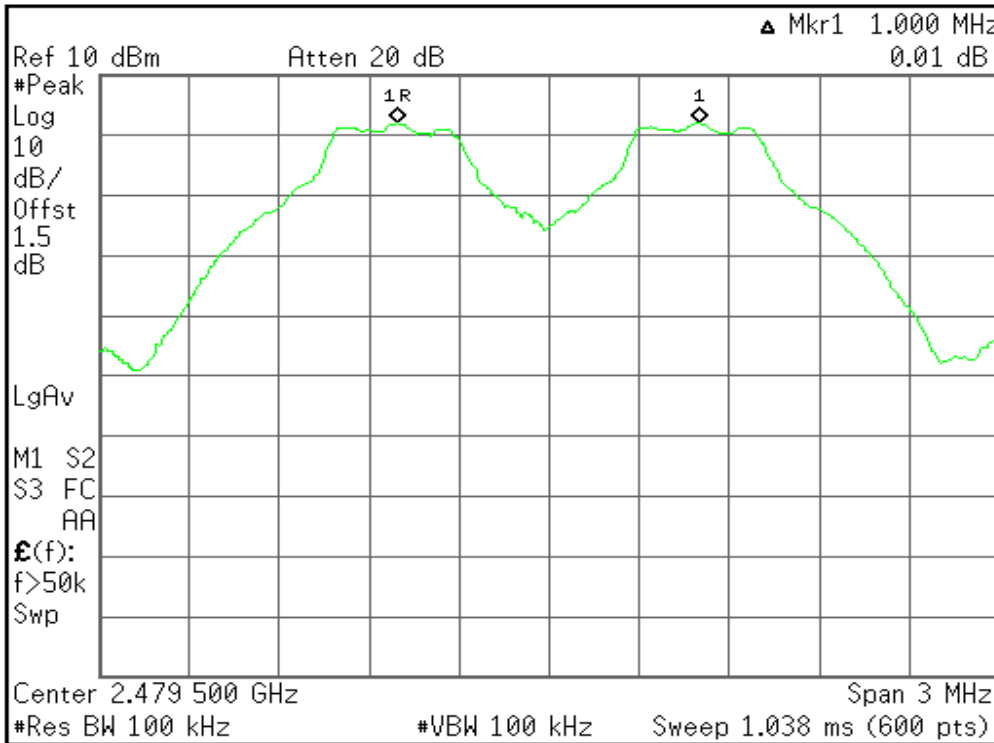


Marker
Select Marker 1 2 3 4
Normal
Delta
Delta Pair (Tracking Ref) Ref ▲
Span Pair Span Center
Off
More 1 of 2

Copyright 2000-2007 Agilent Technologies

Measurement of 20dB Bandwidth

Channel low

Agilent 23:41:09 Aug 20, 2008

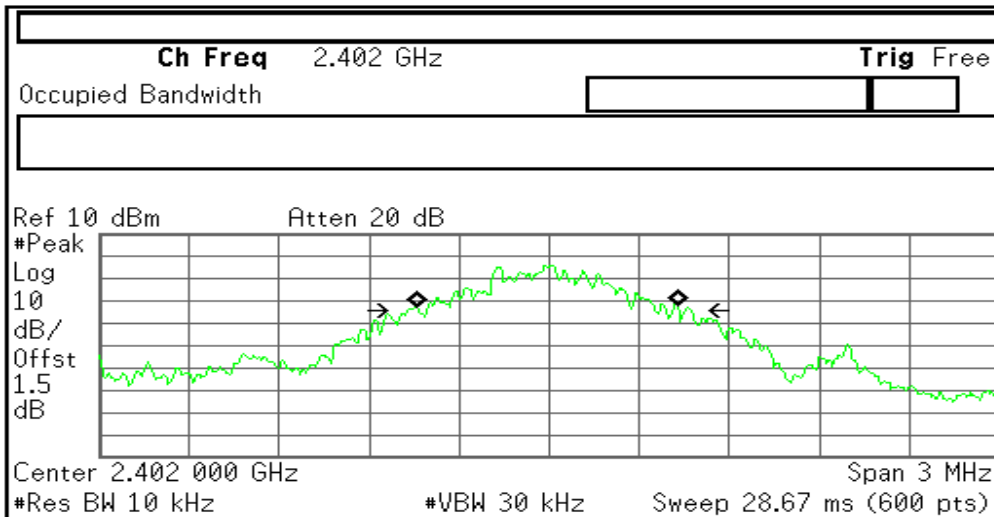

Freq/Channel
Center Freq 2.40200000 GHz
Start Freq 2.40050000 GHz
Stop Freq 2.40350000 GHz
CF Step 300.000000 kHz Auto Man
Freq Offset 0.00000000 Hz
Signal Track On Off


Occupied Bandwidth 871.9222 kHz	Occ BW % Pwr 99.00 %
Transmit Freq Error -9.691 kHz	x dB -20.00 dB
x dB Bandwidth 942.569 kHz	

Copyright 2000-2007 Agilent Technologies



Channel middle

Agilent 23:41:54 Aug 20, 2008

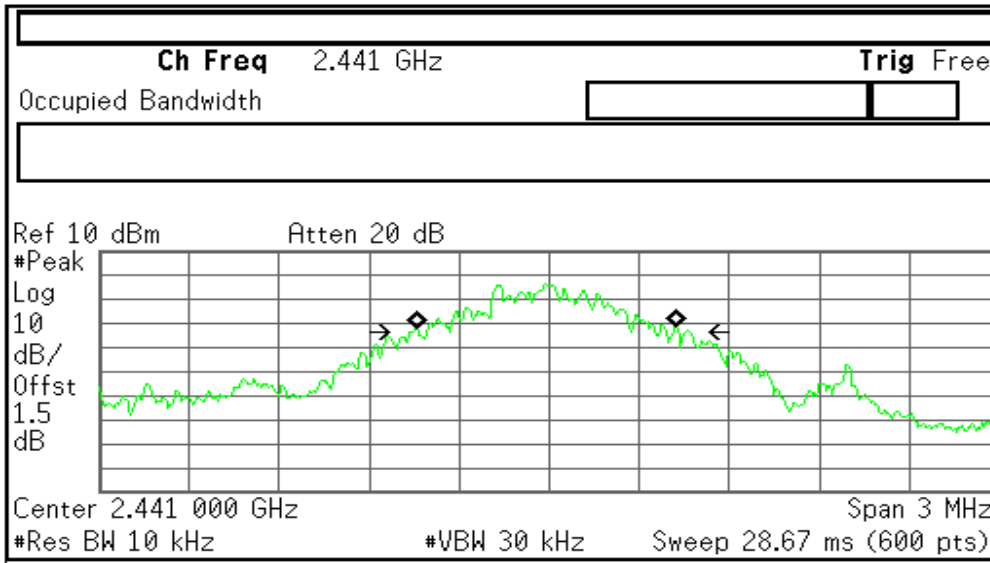


Freq/Channel
Center Freq 2.44100000 GHz
Start Freq 2.43950000 GHz
Stop Freq 2.44250000 GHz
CF Step 300.000000 kHz Auto Man
Freq Offset 0.00000000 Hz
Signal Track On Off

Occupied Bandwidth	Occ BW % Pwr	99.00 %
868.3955 kHz	x dB	-20.00 dB
Transmit Freq Error		-9.516 kHz
x dB Bandwidth		936.278 kHz

Copyright 2000-2007 Agilent Technologies

Channel high

Agilent 23:42:31 Aug 20, 2008

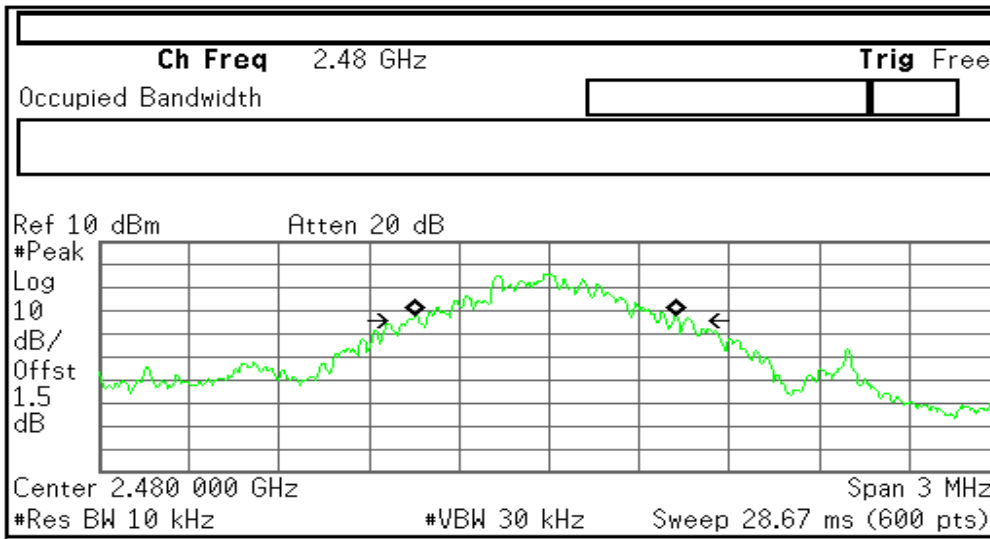

Freq/Channel
Center Freq 2.48000000 GHz
Start Freq 2.47850000 GHz
Stop Freq 2.48150000 GHz
CF Step 300.000000 kHz Auto Man
Freq Offset 0.00000000 Hz
Signal Track On Off

Occupied Bandwidth	Occ BW % Pwr	99.00 %
872.2237 kHz	x dB	-20.00 dB
Transmit Freq Error		-11.153 kHz
x dB Bandwidth		942.010 kHz

Copyright 2000-2007 Agilent Technologies



NUMBER OF HOPPING FREQUENCY

LIMIT


According to §15.247(a)(1)(ii), Frequency hopping systems operating in the 2400MHz-2483.5 MHz bands shall use at least 75 hopping frequencies.

MEASUREMENT EQUIPMENT USED

Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
Spectrum Analyzer	Agilent	E4446A	MY44020154	11/16/2008

Remark: Each piece of equipment is scheduled for calibration once a year.

Test Configuration



TEST PROCEDURE

1. Place the EUT on the table and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
3. Set spectrum analyzer Start=2400MHz, Stop = 2441.5MHz, Sweep = auto and Start=2441.5MHz, Stop = 2483.5MHz, Sweep = auto.
4. Set the spectrum analyzer as RBW, VBW=100kHz.
5. Max hold, view and count how many channel in the band.

TEST RESULTS

No non-compliance noted

Test Data

Result (No. of CH)	Limit (No. of CH)	Result
79	>75	PASS




Test Plot

Channel Number


2.4 GHz – 2.4415 GHz

Agilent 23:45:44 Aug 20, 2008

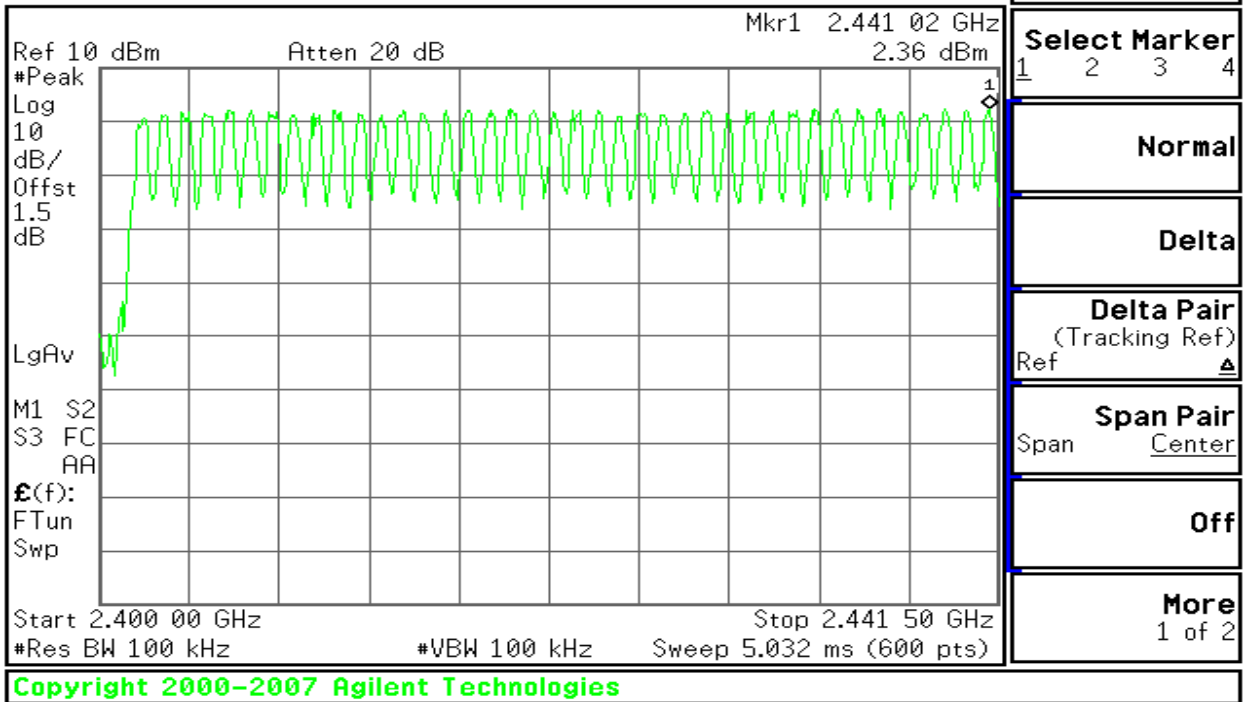

2.4415 GHz – 2.4835 GHz

Agilent 23:47:19 Aug 20, 2008

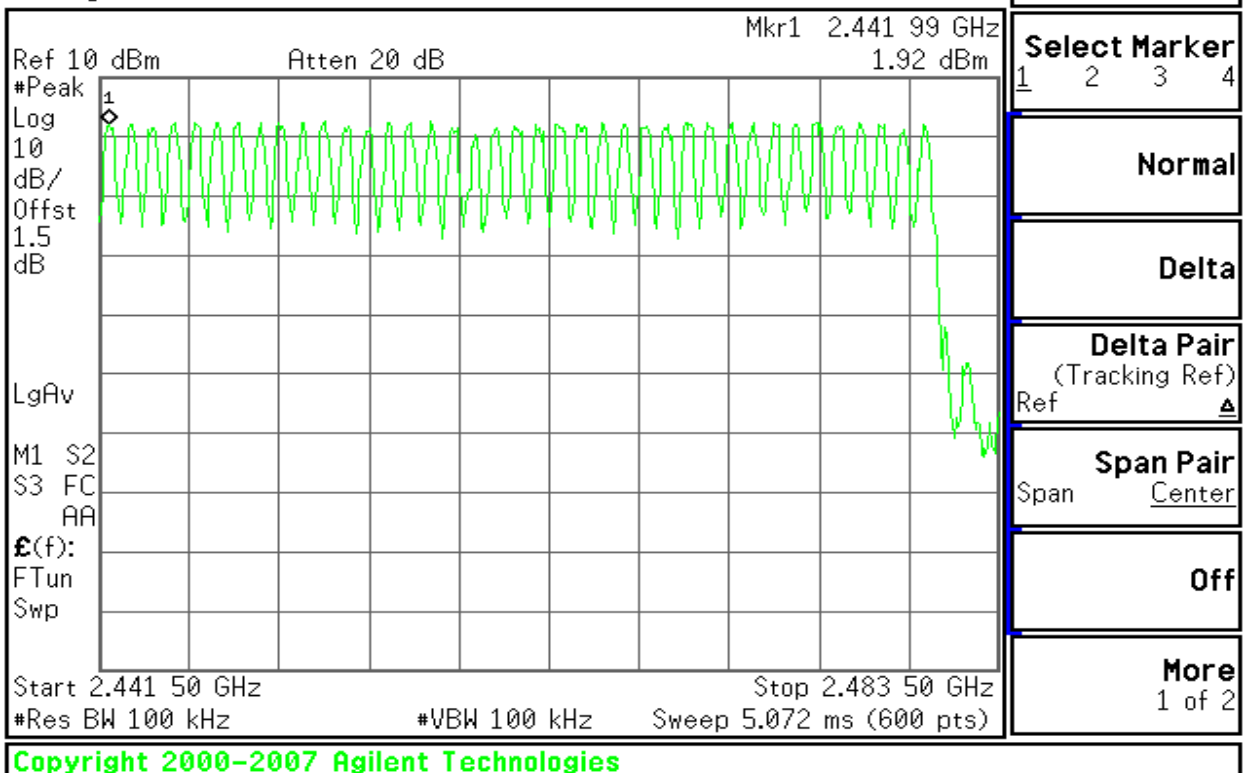



TIME OF OCCUPANCY (DWELL TIME)

LIMIT


According to §15.247(a)(1)(iii), Frequency hopping systems operating in the 2400MHz-2483.5 MHz bands. The average time of occupancy on any channels shall not greater than 0.4 s within a period 0.4 s multiplied by the number of hopping channels employed.

MEASUREMENT EQUIPMENT USED

Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
Spectrum Analyzer	Agilent	E4446A	MY44020154	11/16/2008

Remark: Each piece of equipment is scheduled for calibration once a year.

Test Configuration



TEST PROCEDURE

1. Place the EUT on the table and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
3. Set center frequency of spectrum analyzer = operating frequency.
4. Set the spectrum analyzer as RBW, VBW=1MHz, Span = 0Hz, Sweep = auto.
5. Repeat above procedures until all frequency measured were complete.



TEST RESULTS

No non-compliance noted

Test Data

DH 1

$0.401 * (1600/2)/79 * 31.6 = 128.32 \text{ (ms)}$

Pulse Time (ms)	Total of Dwell (ms)	Period Time (s)	Limit (ms)	Result
0.401	128.32	31.60	400	PASS

DH 3

$1.67 * (1600/4)/79 * 31.6 = 267.20 \text{ (ms)}$

Pulse Time (ms)	Total of Dwell (ms)	Period Time (s)	Limit (ms)	Result
1.67	267.20	31.60	400	PASS

DH 5

$2.939 * (1600/6)/79 * 31.6 = 313.49 \text{ (ms)}$


Pulse Time (ms)	Total of Dwell (ms)	Period Time (s)	Limit (ms)	Result
2.939	313.49	31.60	400	PASS



Test Plot

DH 1

Agilent 23:51:35 Aug 20, 2008

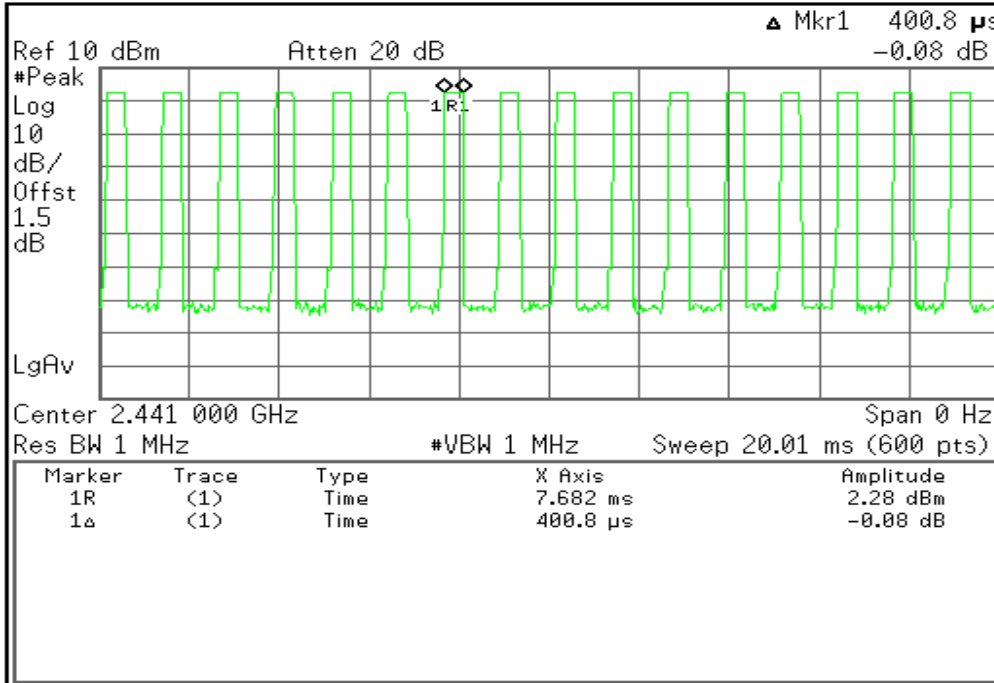


Marker				
Select Marker	1	2	3	4
Normal				
Delta				
Delta Pair (Tracking Ref)				
Ref				▲
Span Pair				
Span				Center
Off				
More				1 of 2

Copyright 2000-2007 Agilent Technologies

DH 3

Agilent 23:52:38 Aug 20, 2008

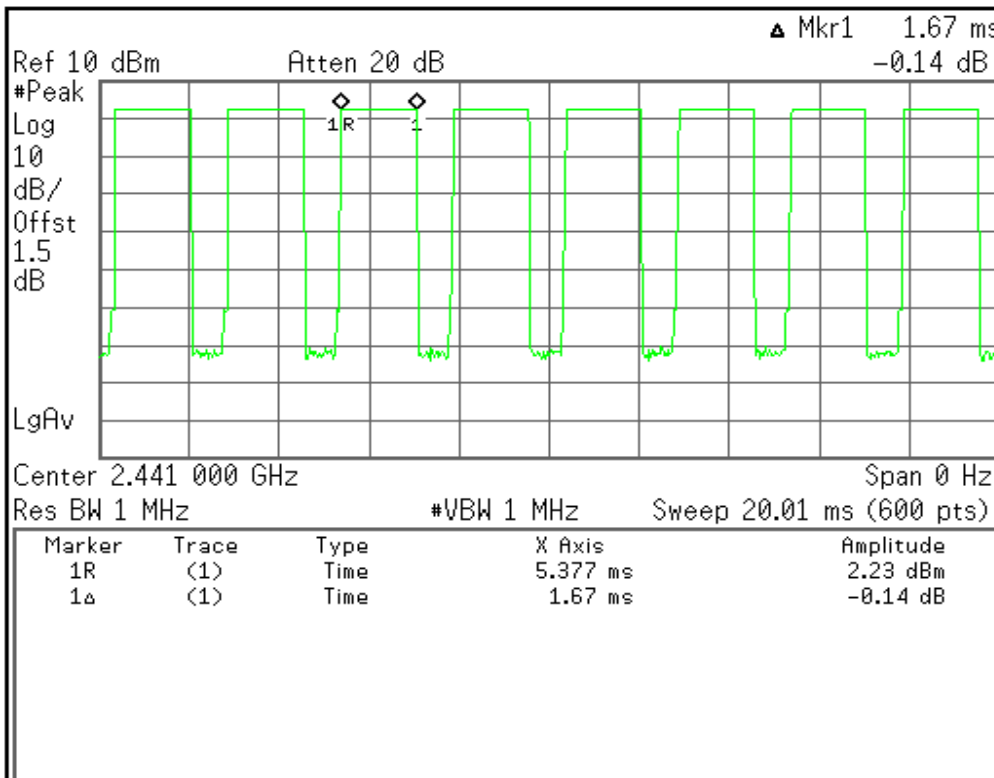


Marker				
Select Marker	1	2	3	4
Normal				
Delta				
Delta Pair (Tracking Ref)				
Ref				▲
Span Pair				
Span				Center
Off				
More				1 of 2

Copyright 2000-2007 Agilent Technologies



DH 5

Agilent 23:55:42 Aug 20, 2008

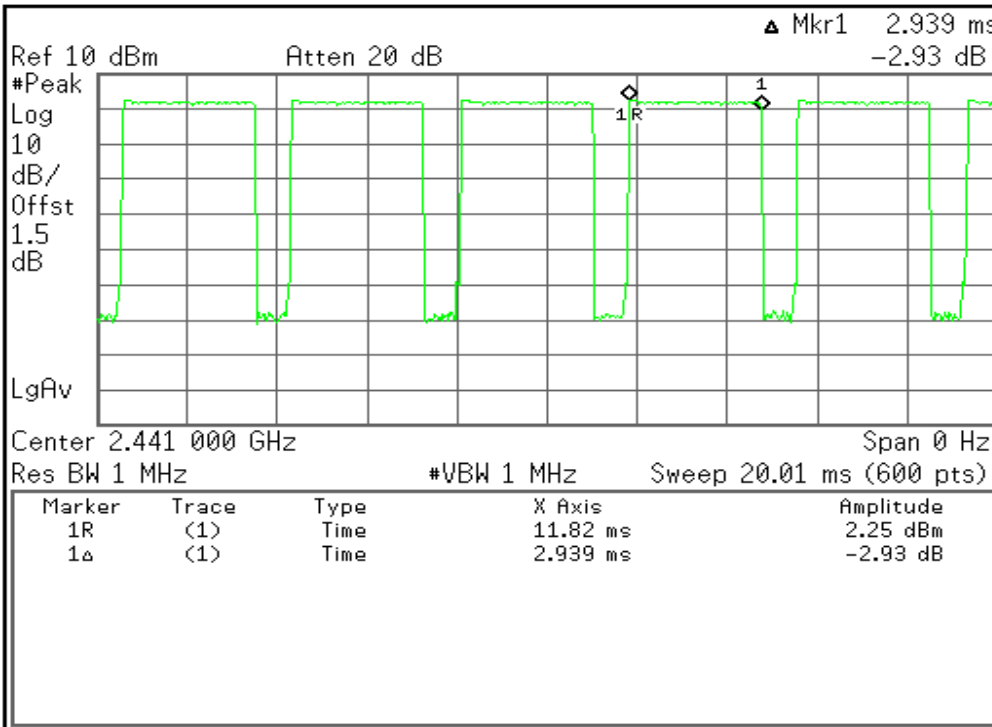

Marker			
Select Marker			
1	2	3	4
Normal			
Delta			
Delta Pair (Tracking Ref)			
Ref	▲		
Span Pair			
Span	Center		
Off			
More 1 of 2			

Copyright 2000-2007 Agilent Technologies



RADIO FREQUENCY EXPOSURE

LIMIT

Systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy levels in excess of the Commission's guidelines. See §15.247(b)(4) and §1.1307(b)(1) of this chapter.

EUT Specification

EUT	UMPC
Frequency band (Operating)	<input type="checkbox"/> WLAN: 2.412GHz ~ 2.462GHz <input type="checkbox"/> WLAN: 5.18GHz ~ 5.32GHz / 5.50GHz ~ 5.70GHz <input type="checkbox"/> WLAN: 5.745GHz ~ 5.825GHz <input checked="" type="checkbox"/> Others: Bluetooth: 2.402GHz ~ 2.480GHz
Device category	<input checked="" type="checkbox"/> Portable (<20cm separation) <input type="checkbox"/> Mobile (>20cm separation) <input type="checkbox"/> Others
Exposure classification	<input type="checkbox"/> Occupational/Controlled exposure ($S = 5mW/cm^2$) <input checked="" type="checkbox"/> General Population/Uncontrolled exposure ($S=1mW/cm^2$)
Antenna diversity	<input checked="" type="checkbox"/> Single antenna <input type="checkbox"/> Multiple antennas <ul style="list-style-type: none"> <input type="checkbox"/> Tx diversity <input type="checkbox"/> Rx diversity <input type="checkbox"/> Tx/Rx diversity
Max. output power	1.89dBm (1.55mW)
Antenna gain (Max)	2dBi (Numeric gain: 1.585mW)
Evaluation applied	<input type="checkbox"/> MPE Evaluation <input type="checkbox"/> SAR Evaluation <input checked="" type="checkbox"/> N/A

Remark:

1. The maximum output power is 1.89dBm (1.55mW) at 2441MHz (with 1.585numeric antenna gain.)
2. DTS device is not subject to routine RF evaluation; MPE estimate is used to justify the compliance.
3. For mobile or fixed location transmitters, no SAR consideration applied. The minimum separation generally be used is at least 20 cm, even if the calculations indicate that the MPE distance would be lesser.

TEST RESULTS

Non-compliance.



SPURIOUS EMISSIONS

Conducted Measurement

LIMIT


In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

MEASUREMENT EQUIPMENT USED

Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
Spectrum Analyzer	Agilent	E4446A	MY44020154	11/16/2008

Remark: Each piece of equipment is scheduled for calibration once a year.

Test Configuration



TEST PROCEDURE

Conducted RF measurements of the transmitter output were made to confirm that the EUT antenna port conducted emissions meet the specified limit and to identify any spurious signals that require further investigation or measurements on the radiated emissions site.

The transmitter output is connected to the spectrum analyzer. The resolution bandwidth is set to 100 KHz. The video bandwidth is set to 100 KHz.

Measurements are made over the 30MHz to 26GHz range with the transmitter set to the lowest, middle, and highest channels.

TEST RESULTS

No non-compliance noted




Test Plot

CH Low

30MHz ~ 2.9GHz

Agilent 00:02:08 Aug 21, 2008

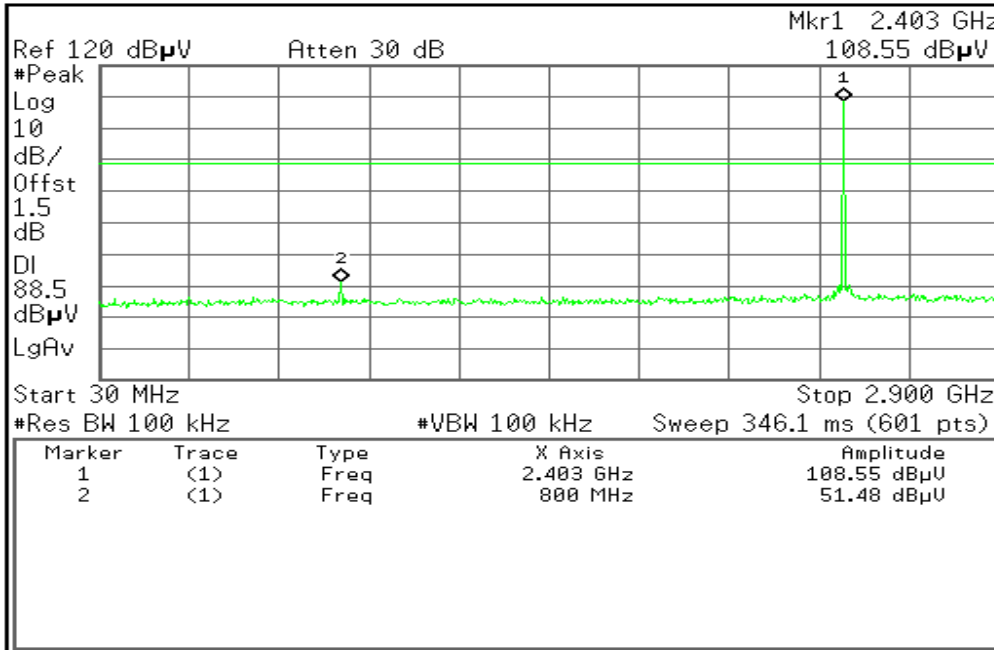


Marker				
Select Marker	1	2	3	4
Normal				
Delta				
Delta Pair (Tracking Ref)				
Span Pair				
Off				
More	1 of 2			

Copyright 2000-2007 Agilent Technologies

2.9GHz ~ 26.5GHz

Agilent 00:03:14 Aug 21, 2008

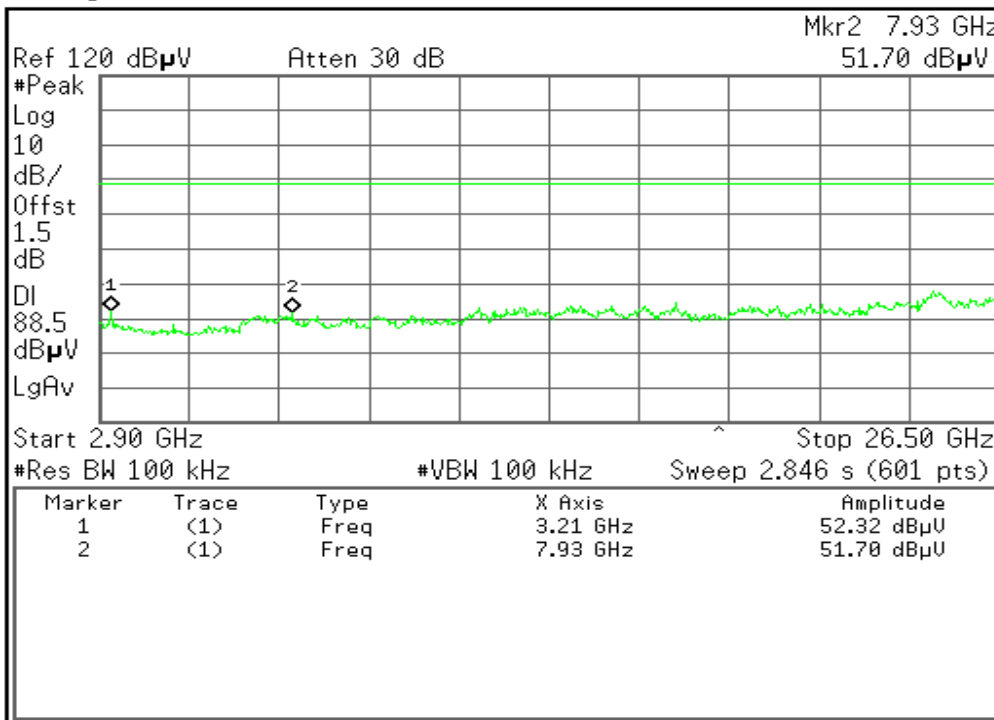

Marker				
Select Marker	1	2	3	4
Normal				
Delta				
Delta Pair (Tracking Ref)				
Span Pair				
Off				
More	1 of 2			


Copyright 2000-2007 Agilent Technologies



CH Mid

30MHz ~ 2.9GHz

Agilent 00:04:27 Aug 21, 2008

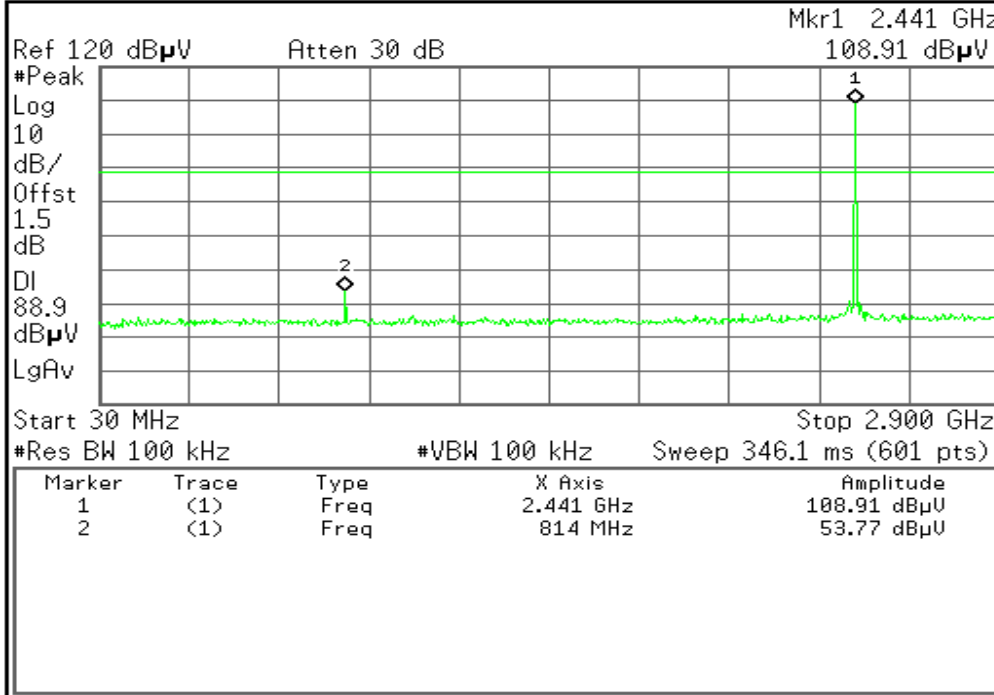


Marker				
Select Marker	1	2	3	4
Normal				
Delta				
Delta Pair (Tracking Ref)				
Span Pair Center				
Off				
More 1 of 2				

Copyright 2000-2007 Agilent Technologies

2.9GHz ~ 26.5GHz

Agilent 00:05:18 Aug 21, 2008

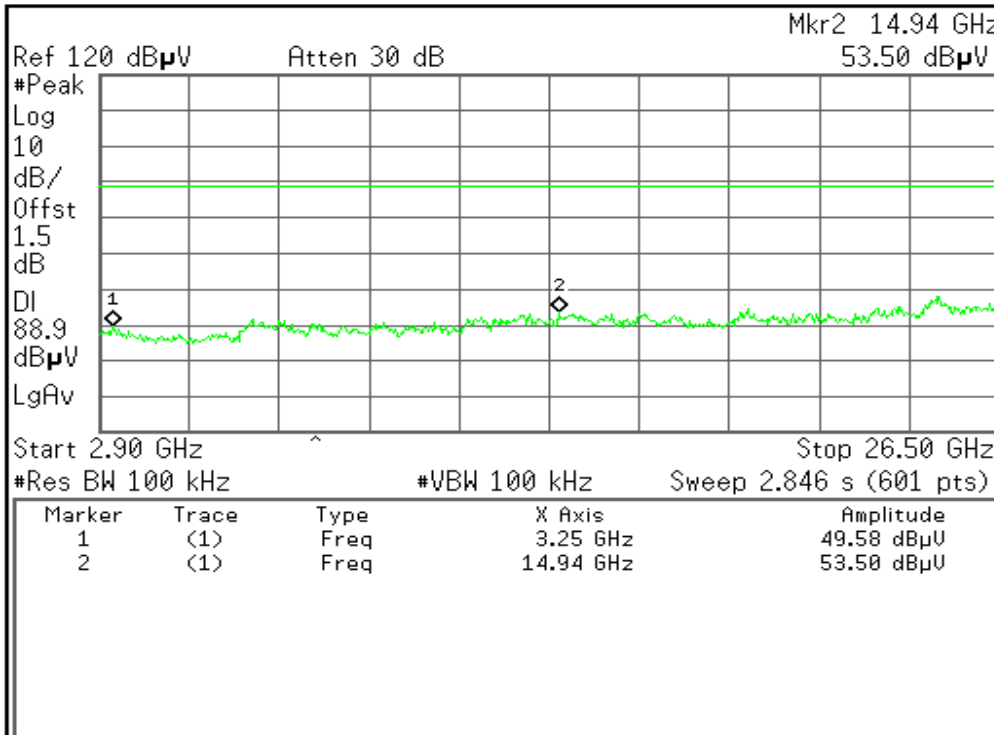

Marker				
Select Marker	1	2	3	4
Normal				
Delta				
Delta Pair (Tracking Ref)				
Span Pair Center				
Off				
More 1 of 2				


Copyright 2000-2007 Agilent Technologies



CH High

30MHz ~ 2.9GHz

Agilent 00:06:13 Aug 21, 2008

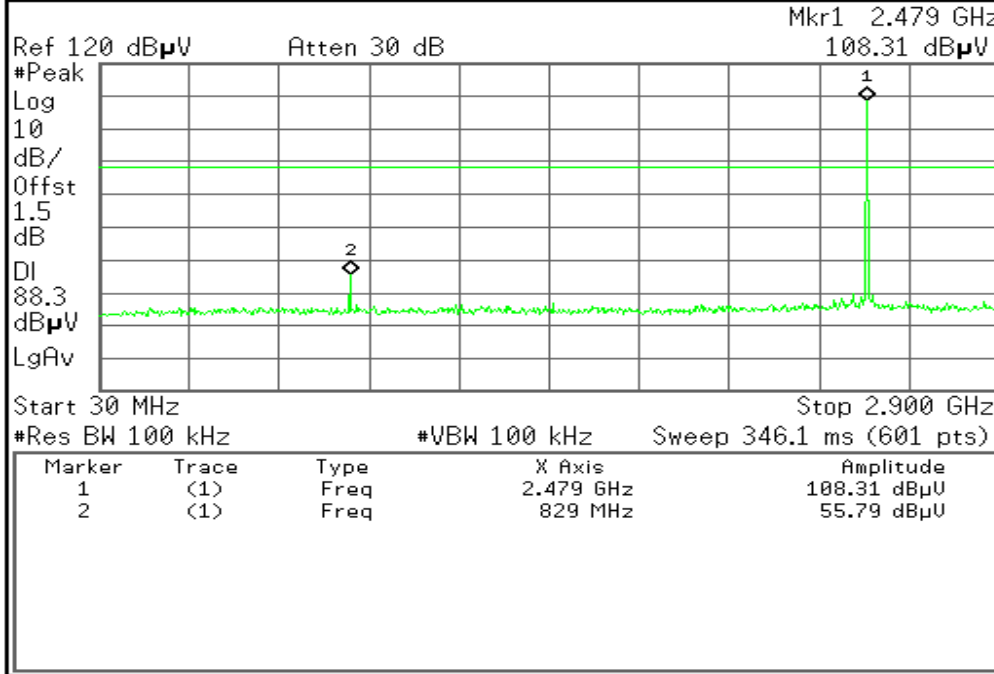


Marker				
Select Marker	1	2	3	4
Normal				
Delta				
Delta Pair (Tracking Ref) Ref ▲				
Span Pair Center				
Off				
More 1 of 2				

Copyright 2000-2007 Agilent Technologies

2.9GHz ~ 26.5GHz

Agilent 00:06:57 Aug 21, 2008

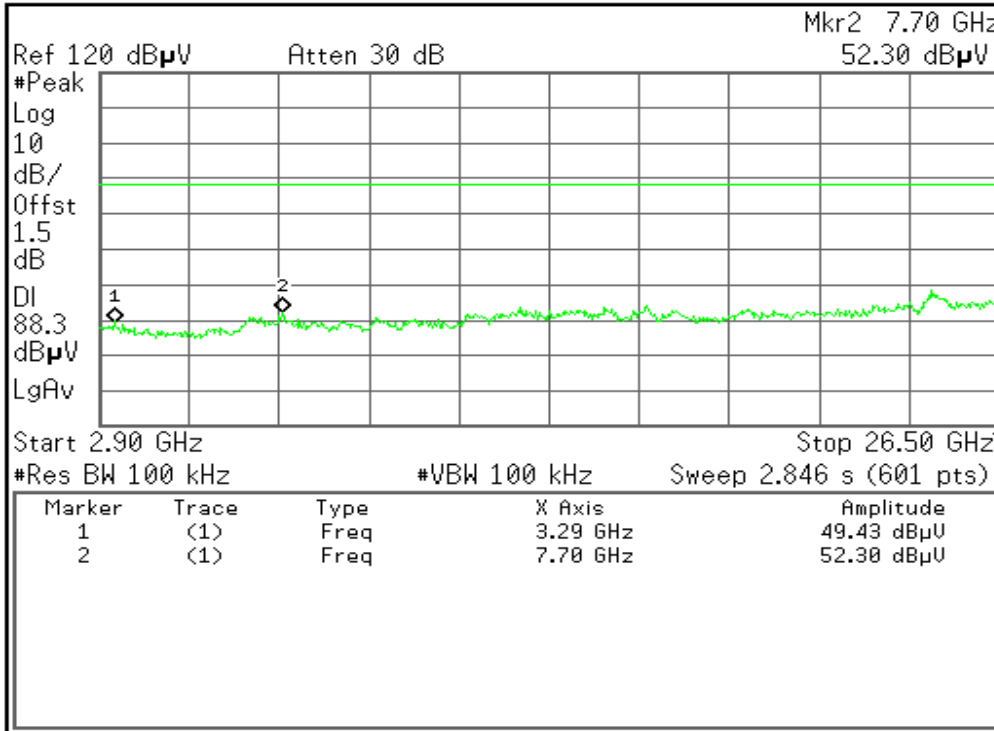

Marker				
Select Marker	1	2	3	4
Normal				
Delta				
Delta Pair (Tracking Ref) Ref ▲				
Span Pair Center				
Off				
More 1 of 2				

Copyright 2000-2007 Agilent Technologies



Radiated Emissions

LIMIT

1. Except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength (mV/m)	Measurement Distance (m)
30-88	100*	3
88-216	150*	3
216-960	200*	3
Above 960	500	3

Remark: Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.

2. In the above emission table, the tighter limit applies at the band edges.

Frequency (Hz)	Field Strength ($\mu\text{V/m}$ at 3-meter)	Field Strength ($\text{dB}\mu\text{V/m}$ at 3-meter)
30-88	100	40
88-216	150	43.5
216-960	200	46
Above 960	500	54


MEASUREMENT EQUIPMENT USED

3M Semi Anechoic Chamber (977)				
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
Spectrum Analyzer	Agilent	E4446A	MY44020154	11/16/2008
Spectrum Analyzer	Agilent	E4446A	US44300398	07/25/2009
EMI Test Receiver	R&S	ESPI3	101026	11/11/2008
Pre-Amplifier	MINI	ZFL-1000VH2	d041703	12/13/2008
Pre-Amplifier	Miteq	NSP4000-NF	870731	01/28/2009
Bilog Antenna	Sunol	JB1	A110204-2	11/22/2008
Horn-antenna	SCHWARZBECK	BBHA9120D	D:266	02/01/2009
PSG Analog Signal Generator	Agilent	E8257C	MY43321570	12/19/2008
Turn Table	CT	CT123	4165	N.C.R
Antenna Tower	CT	CTERG23	3256	N.C.R
Controller	CT	CT100	95637	N.C.R
Site NSA	CCS	N/A	N/A	04/06/2009


Remark: Each piece of equipment is scheduled for calibration once a year.

Test Configuration

Below 1 GHz

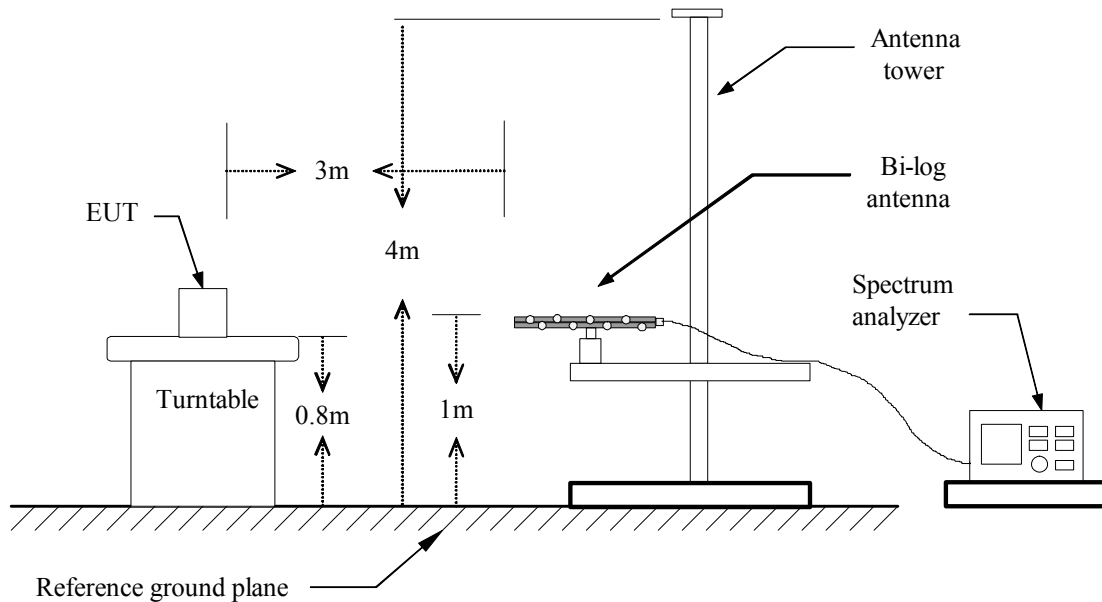

Above 1 GHz

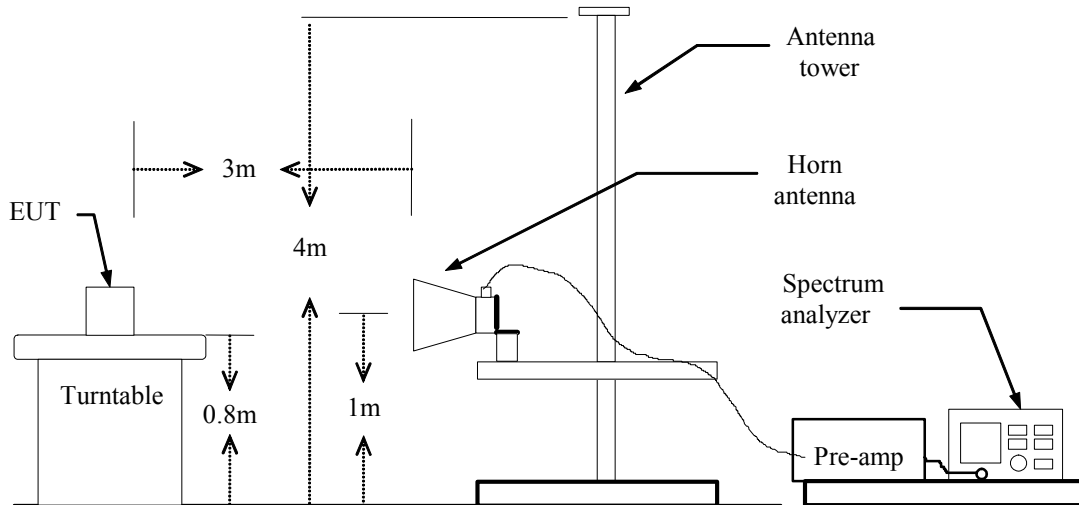

TEST PROCEDURE

1. The EUT is placed on a turntable, which is 0.8m above ground plane.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
6. Set the spectrum analyzer in the following setting as:

Below 1GHz:

RBW=100kHz / VBW=300kHz / Sweep=AUTO

Above 1GHz:

(a) PEAK: RBW=VBW=1MHz / Sweep=AUTO

(b) AVERAGE: RBW=1MHz / VBW=10Hz / Sweep=AUTO

7. Repeat above procedures until the measurements for all frequencies are complete.



TEST RESULTS

Below 1 GHz

Operation Mode: Normal Link

Test Date: August 21, 2008

Temperature: 26°C

TESTED BY: jeff

Humidity: 52 % RH

Polarity: Ver. / Hor.

Freq. (MHz)	Ant.Pol. H/V	Detector Mode (PK/QP)	Reading (dBuV)	Factor (dB)	Actual FS (dBuV/m)	Limit 3m (dBuV/m)	Safe Margin (dB)
111.31	V	Peak	41.25	-10.03	31.22	43.5	-12.28
166.97	V	Peak	43.67	-9.96	33.71	43.5	-9.79
177.67	V	Peak	43.82	-10.73	33.09	43.5	-10.41
193.33	V	Peak	44.01	-10.67	33.34	43.5	-10.16
366.56	V	Peak	42.09	-5.44	36.65	46.0	-9.35
855.64	V	Peak	34.99	3.08	38.07	46.0	-7.93
158.77	H	Peak	42.05	-9.74	32.31	43.5	-11.19
205.81	H	Peak	43.57	-10.03	33.54	43.5	-9.96
223.34	H	Peak	46.78	-10.29	36.49	46.0	-9.51
289.12	H	Peak	42.91	-7.72	35.19	46.0	-10.81
598.76	H	Peak	40.33	-1.03	39.3	46.0	-6.7
852.63	H	Peak	33.8	3.07	36.87	46.0	-9.13

Notes:

1. Measuring frequencies from 30 MHz to the 1GHz, No emission found between lowest internal used/generated frequency to 30 MHz.
2. Radiated emissions measured in frequency range from 30 MHz to 1000MHz were made with an instrument using Peak detector mode.
3. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
4. The IF bandwidth of SPA between 30MHz to 1GHz was 100kHz.



Above 1 GHz

Operation Mode: TX/ CH Low

Test Date: August 21, 2008

Temperature: 26°C

Tested by: jeff

Humidity: 52 % RH

Polarity: Ver. / Hor.

Freq. (MHz)	Ant. Pol H/V	Peak Reading (dBuV)	AV Reading (dBuV)	Ant. / CL CF (dB)	Actual Fs		Peak Limit (dBuV/m)	AV Limit (dBuV/m)	Margin (dB)	Remark
					Peak (dBuV/m)	AV (dBuV/m)				
4803.34	V	41.2	30.78	10.98	52.18	41.76	74	54	-12.24	Avg
7206.67	V	34.9	22.35	18.54	53.44	40.89	74	54	-13.11	Avg
4804.33	H	42.14	31.08	10.98	53.12	42.06	74	54	-11.94	Avg
7203.45	H	34.32	21.35	18.53	52.85	39.88	74	54	-14.12	Avg

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Spectrum setting:
 - a. Peak Setting 1GHz to 10th harmonics of fundamental, RBW = 1MHz, VBW = 1MHz, Sweep time = Auto.
 - b. AV Setting 1GHz to 10th harmonics of fundamental, RBW = 1MHz, VBW = 10Hz, Sweep time = Auto.



Operation Mode: TX/ CH Mid

Test Date: August 21, 2008

Temperature: 26°C

Tested by: jeff

Humidity: 52 % RH

Polarity: Ver. / Hor.

Freq (MHz)	Ant. Pol H/V	Peak Reading (dBuV)	AV Reading (dBuV)	Ant. / CL CF (dB)	Actual Fs		Peak Limit (dBuV/m)	AV Limit (dBuV/m)	Margin (dB)	Remark
					Peak (dBuV/m)	AV (dBuV/m)				
4885.32	V	40.73	28.68	11.09	51.82	39.77	74	54	-14.23	Avg
7324.66	V	32.72	20.4	18.18	50.9	38.58	74	54	-15.42	Avg
4884.33	H	41.7	28.92	11.09	52.79	40.01	74	54	-13.99	Avg
7325.34	H	33.7	21	18.17	51.87	39.17	74	54	-14.83	Avg

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz, were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Spectrum setting:
 - a. Peak Setting 1GHz to 10th harmonics of fundamental, RBW = 1MHz, VBW = 1MHz, Sweep time = Auto.
 - b. AV Setting 1GHz to 10th harmonics of fundamental, RBW = 1MHz, VBW = 10Hz, Sweep time = Auto.



Operation Mode: TX/ CH High

Test Date: August 21, 2008

Temperature: 26°C

Tested by: jeff

Humidity: 52 % RH

Polarity: Ver. / Hor.

Freq. (MHz)	Ant. Pol H/V	Peak Reading (dBuV)	AV Reading (dBuV)	Ant. / CL CF (dB)	Actual Fs		Peak Limit (dBuV/m)	AV Limit (dBuV/m)	Margin (dB)	Remark
					Peak (dBuV/m)	AV (dBuV/m)				
4958.86	V	43.09	31.67	11.22	54.31	42.89	74	54	-11.11	Avg
7445.35	V	34.81	22.11	18.00	52.81	40.11	74	54	-13.89	Avg
4961.33	H	41.88	30.53	11.20	53.08	41.73	74	54	-12.27	Avg
7444.66	H	33.99	22.02	18.00	51.99	40.02	74	54	-13.98	Avg

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Spectrum setting:
 - a. Peak Setting 1GHz to 10th harmonics of fundamental, RBW = 1MHz, VBW = 1MHz, Sweep time = Auto.
 - b. AV Setting 1GHz to 10th harmonics of fundamental, RBW = 1MHz, VBW = 10Hz, Sweep time = Auto.



POWERLINE CONDUCTED EMISSIONS

LIMIT

For an intentional radiator which is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed 250 microvolts (The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz). The limits at specific frequency range is listed as follows:

Frequency Range (MHz)	Limits (dB μ V)	
	Quasi-peak	Average
0.15 to 0.50	66 to 56	56 to 46
0.50 to 5	56	46
5 to 30	60	50


Compliance with this provision shall be based on the measurement of the radio frequency voltage between each power line (LINE and NEUTRAL) and ground at the power terminals.

MEASUREMENT EQUIPMENT USED

Conducted Emission				
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
EMC Analyzer	Agilent	E7402A	US41160329	03/05/2009
V (V-LISN)	Schwarzbeck	NNLK 8129	8129-143	05/06/2009
LISN (EUT)	FCC	FCC-LISN-50/250-5 0-2-02	SN:05012	05/06/2009
TRANSIENT LIMITER	SCHAFFNER	CFL9206	1710	04/18/2009
RF Current Probe	FCC	F-65A	147	05/06/2009

Remark: Each piece of equipment is scheduled for calibration once a year.

Test Configuration

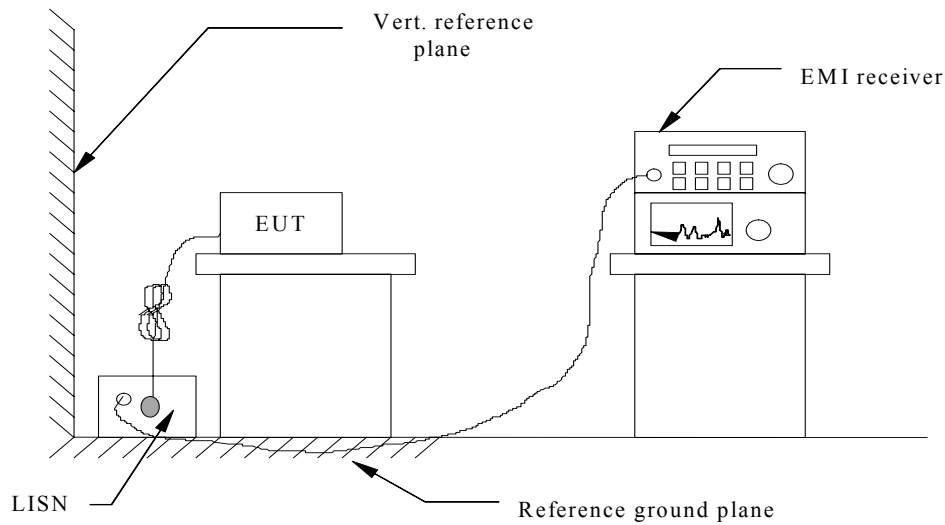

See test photographs attached in Appendix 1 for the actual connections between EUT and support equipment.

TEST PROCEDURE

1. The EUT was placed on a table, which is 0.8m above ground plane.
2. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
3. Repeat above procedures until all frequency measured were complete.



TEST RESULTS

The initial step in collecting conducted data is a spectrum analyzer peak scan of the measurement range. Significant peaks are then marked as shown on the following data page, and these signals are then quasi-peaked.

Test Data

For Adapter:DELTA

Model: CW0A1

Test Mode: Normal Link

Temperature: 25°C

Humidity: 43% RH

Tested by: jeff

Test Results: Pass

Freq. (MHz)	Q.P. Raw reading (dBuV)	AVG Raw reading (dBuV)	Correction factor(dB)	Q.P. Amp td. (dBuV)	AVG Amp td. (dBuV)	Q.P. Limit (dBuV)	AVG Limit (dBuV)	Q.P. Margin (dB)	AVG Margin (dB)	Line/Neutral
0.204	31.78	24.59	12.65	44.43	37.24	64.44	54.44	-20.01	-17.20	Line
0.338	29.45	28.33	12.88	42.33	41.21	60.61	50.61	-18.28	-9.40	Line
0.473	27.22	26.01	12.96	40.18	38.97	56.76	46.76	-16.58	-7.79	Line
1.012	20.99	18.31	13.08	34.07	31.39	56.00	46.00	-21.93	-14.61	Line
1.420	21.56	15.16	13.15	34.71	28.31	56.00	46.00	-21.29	-17.69	Line
4.465	26.87	16.97	13.59	40.46	30.56	56.00	46.00	-15.54	-15.44	Line
0.202	34.73	25.37	11.57	46.30	36.94	64.51	54.51	-18.21	-17.57	Neutral
0.335	29.94	28.50	11.68	41.62	40.18	60.70	50.70	-19.08	-10.52	Neutral
0.472	25.82	24.13	11.71	37.53	35.84	56.79	46.79	-19.26	-10.95	Neutral
1.352	23.46	21.16	11.84	35.30	33.00	56.00	46.00	-20.70	-13.00	Neutral
3.921	23.41	17.08	12.13	35.54	29.21	56.00	46.00	-20.46	-16.79	Neutral
4.531	26.80	17.68	12.19	38.99	29.87	56.00	46.00	-17.01	-16.13	Neutral

Remark:

1. The measuring frequencies range between 0.15 MHz and 30 MHz.
2. The emissions measured in the frequency range between 0.15 MHz and 30MHz were made with an instrument using Quasi-peak detector and Average detector.
3. “---” denotes the emission level was or more than 2dB below the Average limit, and no re-check was made.
4. The IF bandwidth of SPA between 0.15MHz and 30MHz was 10KHz. The IF bandwidth of Test Receiver between 0.15MHz and 30MHz was 9kHz.

Note:

Freq. = Emission frequency in KHz

Factor (dB) = cable loss + Insertion loss of LISN+ Insertion loss of TRANSIENT LIMITER (The



TRANSIENT LIMITER included 10 dB ATTENUATION)

Amptd dBuV = Uncorrected Analyzer/Receiver reading + cable loss + Insertion loss of LISN +
Insertion loss of TRANSIENT LIMITER,
if it > 0.5 dB

Limit dBuV = Limit stated in standard


Margin dB = Reading in reference to limit

Calculation Formula

Margin (dB) = Amptd (dBuV) – Limit (dBuV)


Test Plot

Conducted emissions (Line 1)

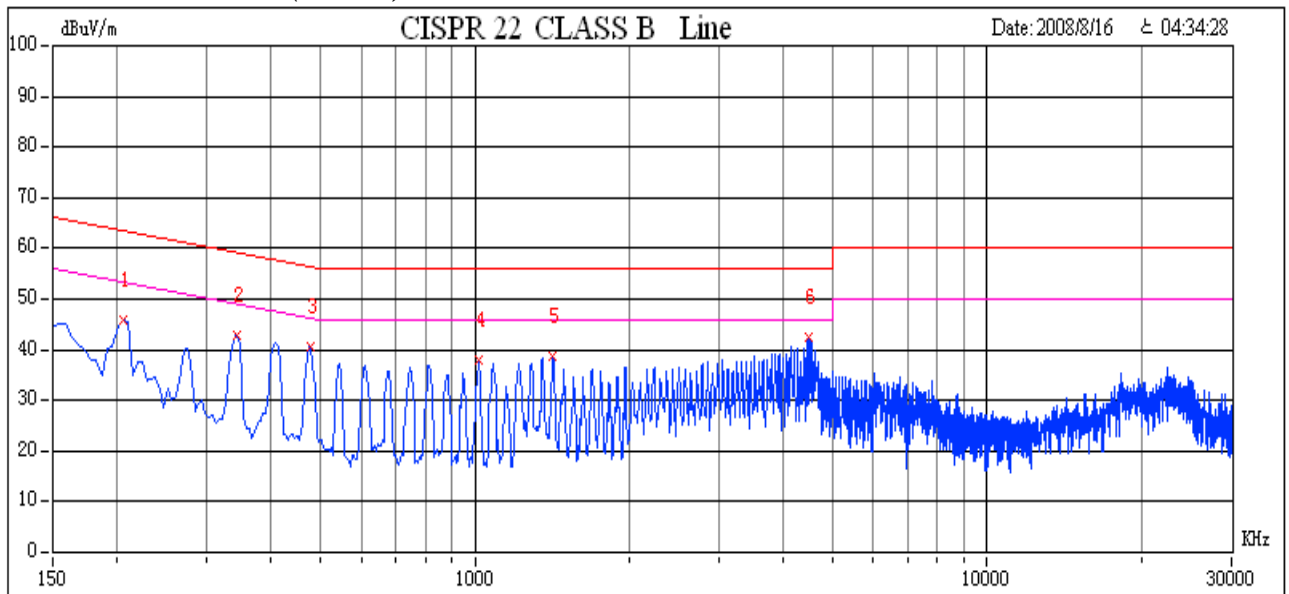

Test Plot

Conducted emissions (Line 2)

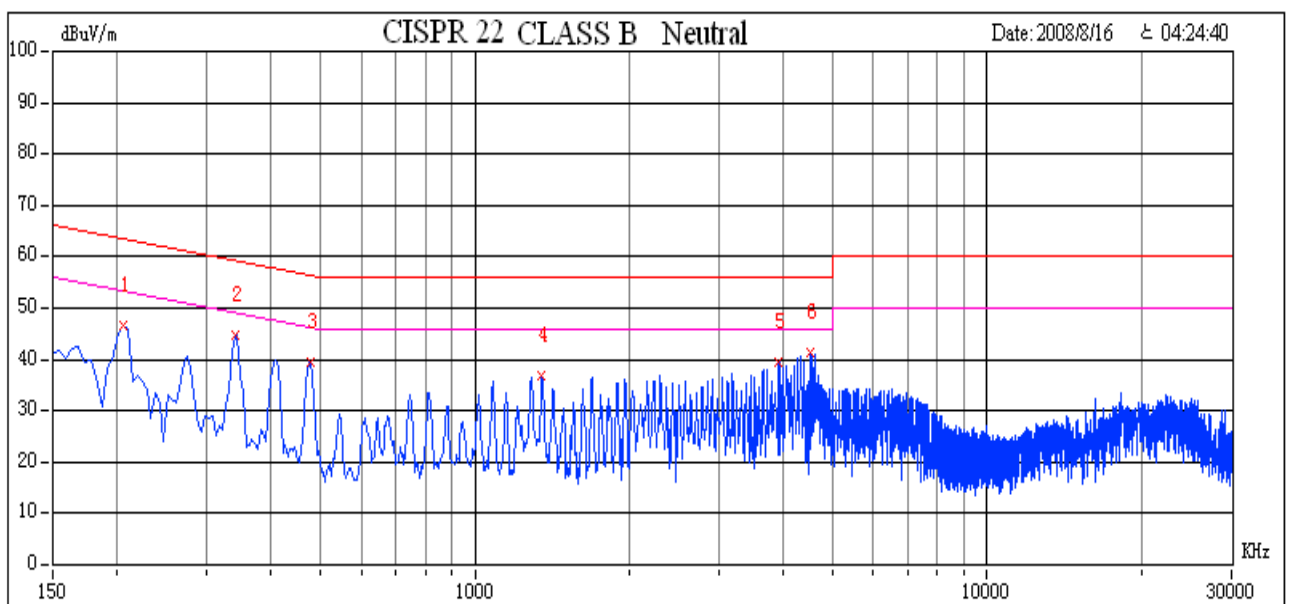

**For Adapter:LI SHIN****Model:** CW0A1**Test Mode:** Normal Link**Temperature:** 25°C**Humidity:** 43% RH**Tested by:** jeff**Test Results:** Pass

Freq. (MHz)	Q.P. Raw reading (dBuV)	AVG Raw reading (dBuV)	Correction factor(dB)	Q.P. Amptd. (dBuV)	AVG Amp td. (dBuV)	Q.P. Limit (dBuV)	AVG Limit (dBuV)	Q.P. Margin (dB)	AVG Margin (dB)	Line/Neutral
0.201	36.86	26.98	12.64	49.50	39.62	64.54	54.54	-15.04	-14.92	Line
0.531	29.99	25.06	12.98	42.97	38.04	56.00	46.00	-13.03	-7.96	Line
1.071	24.00	15.64	13.09	37.09	28.73	56.00	46.00	-18.91	-17.27	Line
1.679	23.09	13.40	13.20	36.29	26.60	56.00	46.00	-19.71	-19.40	Line
2.281	22.77	12.83	13.29	36.06	26.12	56.00	46.00	-19.94	-19.88	Line
23.493	19.19	10.82	14.66	33.85	25.48	60.00	50.00	-26.15	-24.52	Line
0.189	30.47	10.49	11.54	42.01	22.03	64.87	54.87	-22.86	-32.84	Neutral
0.267	26.64	15.66	11.64	38.28	27.30	62.65	52.65	-24.37	-25.35	Neutral
0.528	28.19	20.72	11.73	39.92	32.45	56.00	46.00	-16.08	-13.55	Neutral
0.602	27.18	20.86	11.74	38.92	32.60	56.00	46.00	-17.08	-13.40	Neutral
4.201	17.01	6.63	12.16	29.17	18.79	56.00	46.00	-26.83	-27.21	Neutral
23.644	19.11	10.91	13.87	32.98	24.78	60.00	50.00	-27.02	-25.22	Neutral

Remark:

1. The measuring frequencies range between 0.15 MHz and 30 MHz.
2. The emissions measured in the frequency range between 0.15 MHz and 30MHz were made with an instrument using Quasi-peak detector and Average detector.
3. “---” denotes the emission level was or more than 2dB below the Average limit, and no re-check was made.
4. The IF bandwidth of SPA between 0.15MHz and 30MHz was 10KHz. The IF bandwidth of Test Receiver between 0.15MHz and 30MHz was 9kHz.

Note:

Freq. = Emission frequency in KHz

Factor (dB) = cable loss + Insertion loss of LISN+ Insertion loss of TRANSIENT LIMITER (The TRANSIENT LIMITER included 10 dB ATTENUATION)

Amptd dBuV = Uncorrected Analyzer/Receiver reading + cable loss + Insertion loss of LISN+ Insertion loss of TRANSIENT LIMITER, if it > 0.5 dB

Limit dBuV = Limit stated in standard

Margin dB = Reading in reference to limit




Calculation Formula

$$\text{Margin (dB)} = \text{Amptd (dBuV)} - \text{Limit (dBuV)}$$


Test Plot

Conducted emissions (Line 1)

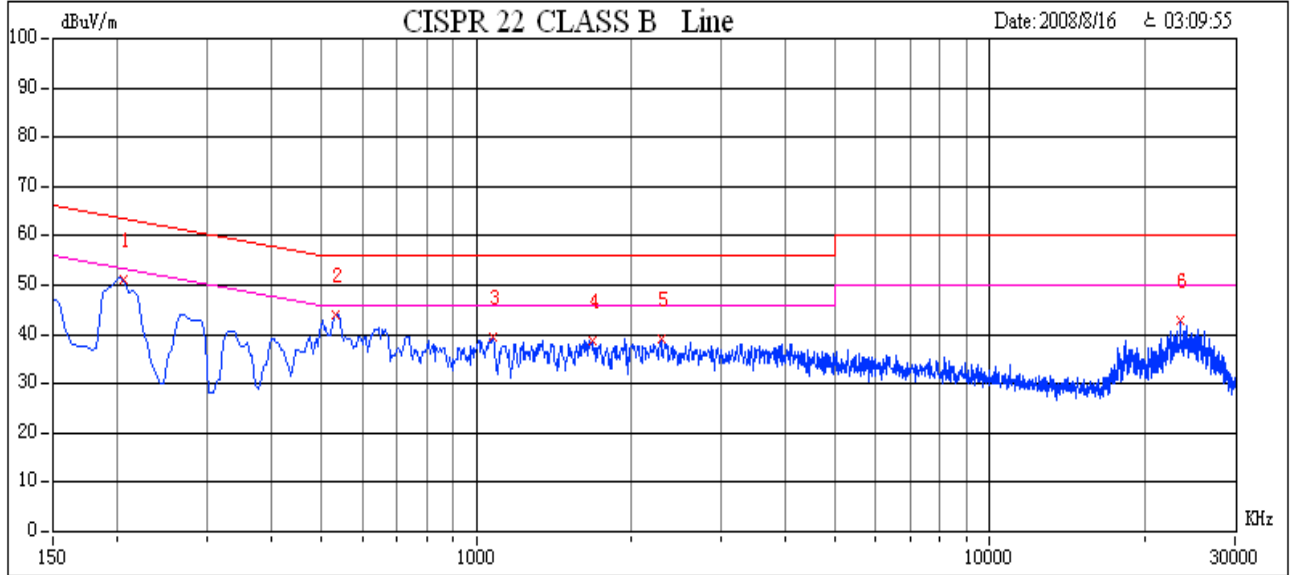

Test Plot

Conducted emissions (Line 2)

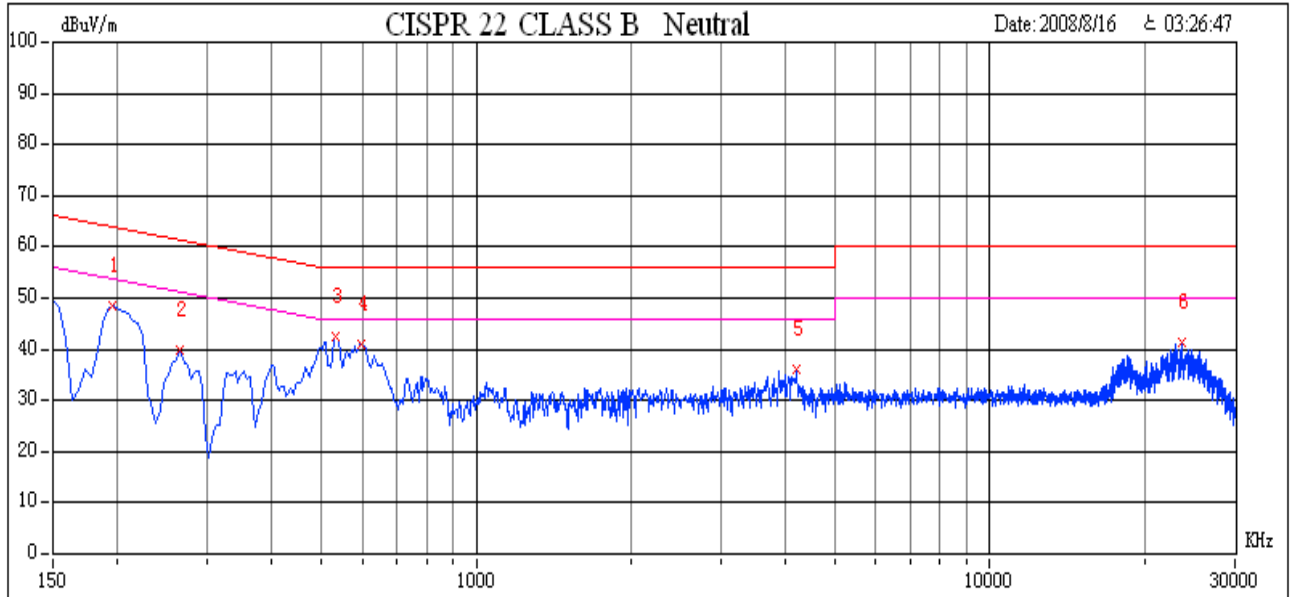


APPENDIX 1 PHOTOGRAPHS OF TEST SETUP

Radiated Emission Set up Photos

Front of view



Back of view

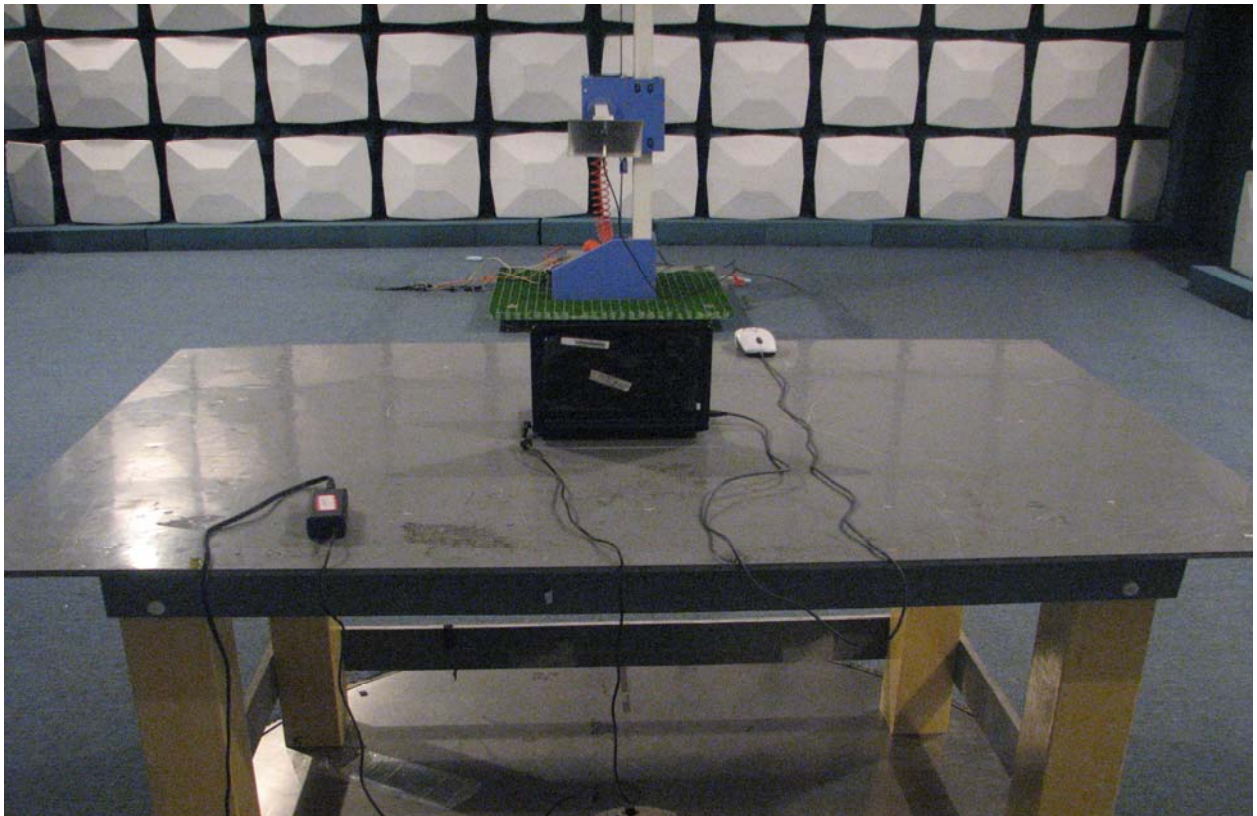

Conducted Emission Set Up Photos

