



**FCC 47 CFR PART 15 SUBPART E**

**TEST REPORT**

**For**

**Mini PC**

**Model: GE2; GE2 series**

**Trade Name: FIC**

**Wireless LAN module Brand name: Intel**

**Wireless LAN module Model Number: Intel WM3945ABG**

*Prepared for*

**First International Computer Inc.**

**NO.300, YangGuang St., NeiHu, Taipei, Taiwan, 114**

*Prepared by*

**COMPLIANCE CERTIFICATION SERVICES (KUNSHAN) INC.**

**10#Weiye Rd, Innovation Park Eco. & Tec. Development Zone**

**Kunshan city JiangSu, (215300) CHINA**

**TEL: 86-512-57355888**

**FAX: 86-512-57370818**



Lab. Code: 200581-0

---

*Note: This report shall not be reproduced except in full, without the written approval of Compliance Certification Services Inc. This document may be altered or revised by Compliance Certification Services Inc. personnel only, and shall be noted in the revision section of the document.*



TABLE OF CONTENTS

1. TEST RESULT CERTIFICATION..... 3
2. EUT DESCRIPTION ..... 4
3. TEST METHODOLOGY ..... 5
3.1 EUT CONFIGURATION .....5
3.2 EUT EXERCISE.....5
3.3 GENERAL TEST PROCEDURES.....5
3.4 FCC PART 15.205 RESTRICTED BANDS OF OPERATIONS.....6
3.5 DESCRIPTION OF TEST MODES .....6
4. INSTRUMENT CALIBRATION..... 7
5. FACILITIES AND ACCREDITATIONS ..... 8
5.1 FACILITIES8
5.2 EQUIPMENT.....8
5.3 LABORATORY ACCREDITATIONS AND LISTING.....8
5.4 TABLE OF ACCREDITATIONS AND LISTINGS.....9
6. SETUP OF EQUIPMENT UNDER TEST ..... 10
6.1 SETUP CONFIGURATION OF EUT..... 10
7. FCC PART 15.407 REQUIREMENTS..... 11
7.1 RADIO FREQUENCY EXPOSURE (15.407)..... 11
7.2 PEAK POWER (15.407) ..... 12
7.3 RADIATED UNDESIRABLE EMISSION (15.407) ..... 16
7.4 PEAK POWER SPECTRAL DENSITY (15.407) .....29
7.5 CONDUCTED UNDESIRABLE EMISSION (15.407) .....32
7.6 FREQUENCY STABILITY (15.407) .....38
7.7 26 DB EMISSION BANDWITH (15.407) .....39
7.8 PEAK EXCURSION (15.407) .....42
7.9 POWERLINE CONDUCTED EMISSION (15.407) .....45



# 1. TEST RESULT CERTIFICATION

**Applicant:** First International Computer Inc.  
No.300 YangGuang st., NeiHu, Taipei, 114

**Equipment Under Test:** Mini PC

**Trade Name:** FIC

**Model:** GE2;GE2 series

**Date of Test:** From April 9, 2006 to April 16, 2006

APPLICABLE STANDARDS	
STANDARD	TEST RESULT
FCC Part 15 Subpart E	No non-compliance noted


### We hereby certify that:

The above equipment was tested by Compliance Certification Services Inc. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.4 and the energy emitted by the sample EUT tested as described in this report is in compliance with the requirements of FCC Rules Part 15.407.

The test results of this report relate only to the tested sample EUT identified in this report.

Approved by:

Reviewed by:

  
 \_\_\_\_\_  
 Tony Hsiung  
 General Manager of Kunshan Laboratory  
 Compliance Certification Services Inc.

  
 \_\_\_\_\_  
 Miró Chueh  
 Section Manager of Kunshan Laboratory  
 Compliance Certification Services Inc.



## 2. EUT DESCRIPTION

<b>Product</b>	Mini PC
<b>Trade Name</b>	FIC
<b>Model Number</b>	GE2;GE2 series
<b>Model Discrepancy</b>	All the above models are identical except the model designation for different market.
<b>Wireless LAN module Model Number</b>	Intel WM3945ABG
<b>Wireless LAN module Brand name</b>	Intel
<b>EUT Power Rating</b>	Trade Name : LI SHIN Model Number: 0335C2065 Input: AC 100-240V, 1.7A, 50-60Hz DC 20V, 3.25A Trade Name : Delta Model Number: SADP-65KB A Input: AC 100-240V, 1.5A, 50-60Hz DC 20V, 3.25A
<b>Frequency Range</b>	5180 ~ 5240 MHz
<b>Modulation Technique</b>	OFDM (QPSK, BPSK, 16-QAM, 64-QAM)
<b>Transmit Power</b>	15.29 dBm
<b>Number of Channels</b>	4 Channels
<b>Air Data Rate</b>	54, 48, 36, 24, 18, 12, 9, 6 Mbps
<b>Antenna Specification</b>	2 PIFA antenna / Gain: 3.13 dB

*Note: This submittal(s) (test report) is intended for FCC ID: EUNGE2I filing to comply with Section 15.407 of the FCC Part 15, Subpart E Rules.*



### **3. TEST METHODOLOGY**

Both conducted and radiated testing was performed according to the procedures in ANSI C63.4 (1992). Radiated testing was performed at an antenna to EUT distance 3 meters.

#### **3.1 EUT CONFIGURATION**

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner that intends to maximize its emission characteristics in a continuous normal application.

#### **3.2 EUT EXERCISE**

The EUT is operated in the engineering mode to fix the Tx frequency for the purposes of measurement.

According to its specifications, the EUT must comply with the requirements of Section 15.407 under the FCC Rules Part 15 Subpart E. The composite system (Digital device) is in compliance with Subpart B authorized under the DoC procedure.

#### **3.3 GENERAL TEST PROCEDURES**

##### **Conducted Emissions**

The EUT is placed on the turntable, which is 0.8 m above ground plane. According to the requirements in Section 13.1.4.1 of ANSI C63.4-2001 Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using CISPR Quasi-peak and average detector modes.

##### **Radiated Emissions**

The EUT is placed on a turn table, which is 0.8 m above ground plane. The turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna, which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the max. emission, the relative positions of this hand-held transmitter (EUT) was rotated through three orthogonal axes according to the requirements in Section 13.1.4.1 of ANSI C63.4-2001.



### 3.4 FCC PART 15.205 RESTRICTED BANDS OF OPERATIONS

(a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
<sup>1</sup> 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 -	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.52525	2655 - 2900	22.01 - 23.12
8.41425 - 8.41475	156.7 - 156.9	3260 - 3267	23.6 - 24.0
12.29 - 12.293	162.0125 - 167.17	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	167.72 - 173.2	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	240 - 285	3600 - 4400	( <sup>2</sup> )
13.36 - 13.41	322 - 335.4		

<sup>1</sup> Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

<sup>2</sup> Above 38.6

(b) Except as provided in paragraphs (d) and (e), the field strength of emissions appearing within these frequency bands shall not exceed the limits shown in Section 15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in Section 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in Section 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in Section 15.35 apply to these measurements.

### 3.5 DESCRIPTION OF TEST MODES

The EUT has been tested under operating condition.

Software used to control the EUT for staying in continuous transmitting and receiving mode is programmed.

IEEE802.11a: Channel 1 (5180MHz), Channel 5 (5220MHz) and Channel 8 (5240MHz), which give the highest data rate of 54Mbps, are chosen for full testing.



#### **4. INSTRUMENT CALIBRATION**

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment, which is traceable to recognized national standards.



## **5. FACILITIES AND ACCREDITATIONS**

### **5.1 FACILITIES**

All measurement facilities used to collect the measurement data are located at CCS China Kunshan Lab at 10#, Weiye Rd, Innovation Park Eco. & Tec. Development Zone Kunshan city JiangSu, (215300)CHINA.

The measurement facilities are constructed in conformance with the requirements of CISPR 16-1, ANSI C63.4 and other equivalent standards.

### **5.2 EQUIPMENT**

Radiated emissions are measured with one or more of the following types of linearly polarized antennas: tuned dipole, biconical, log periodic, bi-log, and/or ridged waveguide, horn. Spectrum analyzers with pre-selectors and quasi-peak detectors are used to perform radiated measurements.

Conducted emissions are measured with Line Impedance Stabilization Networks and EMI Test Receivers.

Calibrated wideband preamplifiers, coaxial cables, and coaxial attenuators are also used for making measurements.




All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

### **5.3 LABORATORY ACCREDITATIONS AND LISTING**

The test facilities used to perform radiated and conducted emissions tests are accredited by National Voluntary Laboratory Accreditation Program for the specific scope of accreditation under Lab Code: 200581-0 to perform Electromagnetic Interference tests according to FCC PART 15 AND CISPR 22 requirements. No part of this report may be used to claim or imply product endorsement by NVLAP or any agency of the US Government. In addition, the test facilities are listed with Federal Communications Commission.



### 5.4 TABLE OF ACCREDITATIONS AND LISTINGS

Country	Agency	Scope of Accreditation	Logo
USA	NVLAP	EN 55022, EN 61000-3-2, EN 61000-3-3, EN550024, EN 61000-4-2, EN 61000-4-3, EN61000-4-4, EN 61000-4-5, EN 61000-4-6, IEC 61000-4-8, EN 61000-4-11 ANSI C63.4, CISPR16-1, IEC61000-3-2, IEC61000-3-3, IEC 61000-4-2, IEC 61000-4-3, IEC 61000-4-4, IEC 61000-4-5, IEC 61000-4-6, IEC 61000-4-8, IEC 61000-4-11	 Lab. Code: 200581-0
USA	FCC	3/10 meter Sites to perform FCC Part 15/18 measurements	 93105, 90471
Japan	VCCI	3/10 meter Sites and conducted test sites to perform radiated/conducted measurements	<b>VCCI</b> R-1600 C-1707
Norway	NEMKO	EN61000-6-1/2/3/4, EN 50082-1/2, IEC 61000-6-1/2/3/4, EN 50091-2, EN 55011, EN 55022, EN 55024, EN 61000-3-2/3, EN 61000-11, IEC 61000-4-2/3/4/5/6/8/11, CISPR16-1/2/3/4	 ELA 105

*\* No part of this report may be used to claim or imply product endorsement by NVLAP or any agency of the US Government.*



## 6. SETUP OF EQUIPMENT UNDER TEST

### 6.1 SETUP CONFIGURATION OF EUT

See test photographs attached in Appendix 1 for the actual connections between EUT and support equipment.

#### *SUPPORT EQUIPMENT*

No	Equipment	Model	Serial No.	FCC ID	Trade Name	Data Cable	Power Cord
1	LCD	SDM-HX73	2404608	DoC	SONY	Shielded 1.8m with a Core	Un-Shielded, 1.5m
2	Keyboard	KB-7953	0154096	DoC	IBM	Un-Shielded, 2.0m	N/A
3	Mouse	M-BJ58	HCA42101722	DoC	Logitech	Shielded, 1.8m	N/A

#### *Notes:*

- 1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.*
- 2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.*



## 7. FCC PART 15.407 REQUIREMENTS

### 7.1 RADIO FREQUENCY EXPOSURE (15.407)

In adopt with the Human Exposure IEEE C95.1, and according to the FCC 1.1310. The *Maximum Permissible Exposure (MPE)* is obligated to measure in order to prove the safety of radiation harmfulness to the human body.

The *Gain* of the antenna used is measured in an *anechoic chamber*. The *maximum total power to the antenna* is to be recorded. By adopting the *Friis Transmission Formula* and the *power gain of the antenna*, we can find the distance right away from the product, where the limit of the MPE is.

#### Limits for Maximum Permissible Exposure (MPE)

Frequency Range (MHz)	Electric Field Strength (V/m)	Magnetic Field Strength (H) (A/m)	Power Density (S) (mW/cm <sup>2</sup> )	Averaging Time  E  <sup>2</sup> ,  H  <sup>2</sup> or S (minutes)
<b>(A) Limits for Occupational/Controlled Exposure</b>				
0.3-3.0	614	1.63	100	6
3.0-30	1842/f	4.89/f	900/f <sup>2</sup>	6
30-300	61.4	0.163	1.0	6
300-1500	--	--	f/300	6
1500-100,000	--	--	5	6
<b>(B) Limits for General Population/Uncontrolled Exposure</b>				
0.3-1.34	614	1.63	100	30
1.34-30	824/f	2.19/f	180/f <sup>2</sup>	30
30-300	27.5	0.073	0.2	30
300-1500	--	--	f/1500	30
1500-100,000	--	--	1.0	30

According to **OET BULLETIN 56 Fourth Edition/August 1999, Equation for Predicting RF Fields:**

$$\text{Power density at the specific separation (portable): } S = \frac{PG}{4\pi R^2} = \frac{33.81 \times 2.06}{4\pi(20)^2} = 0.0139 \text{ mW/cm}^2$$

Where:  $S$  = power density (in appropriate units, e.g. mW/cm<sup>2</sup>)

$P$  = power input to the antenna (in appropriate units, e.g., mW)

$G$  = power gain of the antenna in the direction of interest relative to an isotropic radiator

$R$  = distance to the center of radiation of the antenna (appropriate units, e.g., cm)

The *Numeric gain*  $G$  of antenna with a gain specified in dB is determined by:

$$G = \text{Log}^{-1} (\text{dB antenna gain}/10)$$

$$G = \text{Log}^{-1} (3.13 / 10) = 2.06$$



## 7.2 PEAK POWER (15.407)

### LIMIT

- For the band 5.15-5.25 GHz, the peak transmit power over the frequency band of operation shall not exceed the lesser of 50mW (17dBm) or  $4\text{dBm} + 10\log B$ , where B is the 26dB emission bandwidth in MHz. In addition, the peak power spectral density shall not exceed 4dBm in any 1 MHz band.
- For the band 5.25-5.35 GHz, the peak transmit power over the frequency band of operation shall not exceed the lesser of 250mW (24dBm) or  $11\text{dBm} + 10\log B$ , where B is the 26dB emission bandwidth in MHz. In addition, the peak power spectral density shall not exceed 11dBm in any 1 MHz band.
- For the band 5.725-5.825 GHz, the peak transmit power over the frequency band of operation shall not exceed the lesser of 1mW (30dBm) or  $17\text{dBm} + 10\log B$ , where B is the 26dB emission bandwidth in MHz. In addition, the peak power spectral density shall not exceed 17dBm in any 1 MHz band.

*If transmitting antennas of directional gain greater than 6dBi are used, both the peak transmit power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi. The peak power shall not exceed the limit as follows:*

### Specified Limit of the Peak Power

Frequency (MHz)	10 Log B (dB)	4 + 10 Log B	Power Limit (dBm)
5240	14.8	18.8	17




**MEASUREMENT EQUIPMENT USED**

Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
Spectrum Analyzer	Agilent	E4446A	MY44020154	11/16/2006
Low-Loss RF Cable	Huber + Suhner	Sucoflex 104	N/A	N/A

*Remark: Each piece of equipment is scheduled for calibration once a year.*

**Test Configuration**



**TEST PROCEDURE**

The test is performed in accordance with <FCC Public Notice: APPENDIX A Guidelines for Assessing Unlicensed National Information Infrastructure (U-NII) Devices> – Part 15, Subpart E, August 2002.

**TEST RESULTS**

No non-compliance noted

**Base Mode**


Channel	Frequency (MHz)	Peak Power (dBm)	Limit (dBm)	Margin (dB)
Low	5180	14.76	17	-2.24
Middle	5220	14.92	17	-2.08
High	5240	15.29	17	-1.71



### TEST DATA PLOTS

#### CH Low

Agilent 11:08:41 Jun 13, 2006

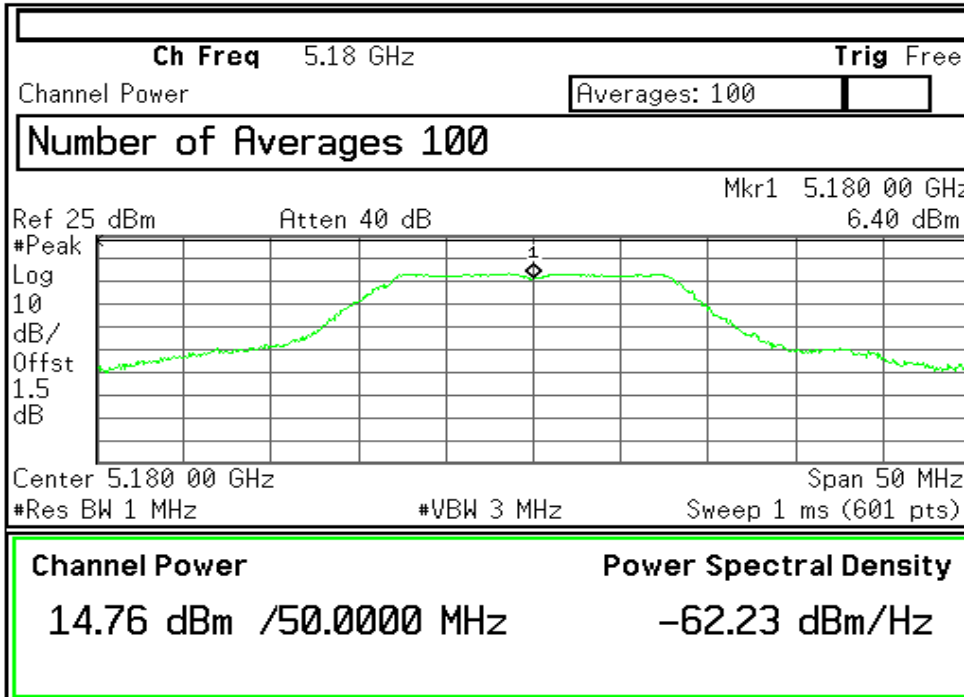


Meas Setup	
<b>Avg Number</b>	100
On	Off
<b>Avg Mode</b>	Repeat
Exp	
<b>Integ BW</b>	50.0000 MHz
<b>Chan Pwr Span</b>	50.0000000 MHz
<b>Optimize Ref Level</b>	
<b>More</b>	1 of 2

File Operation Status, A:\SCREEN328.GIF file saved

#### CH Mid

Agilent 11:13:10 Jun 13, 2006

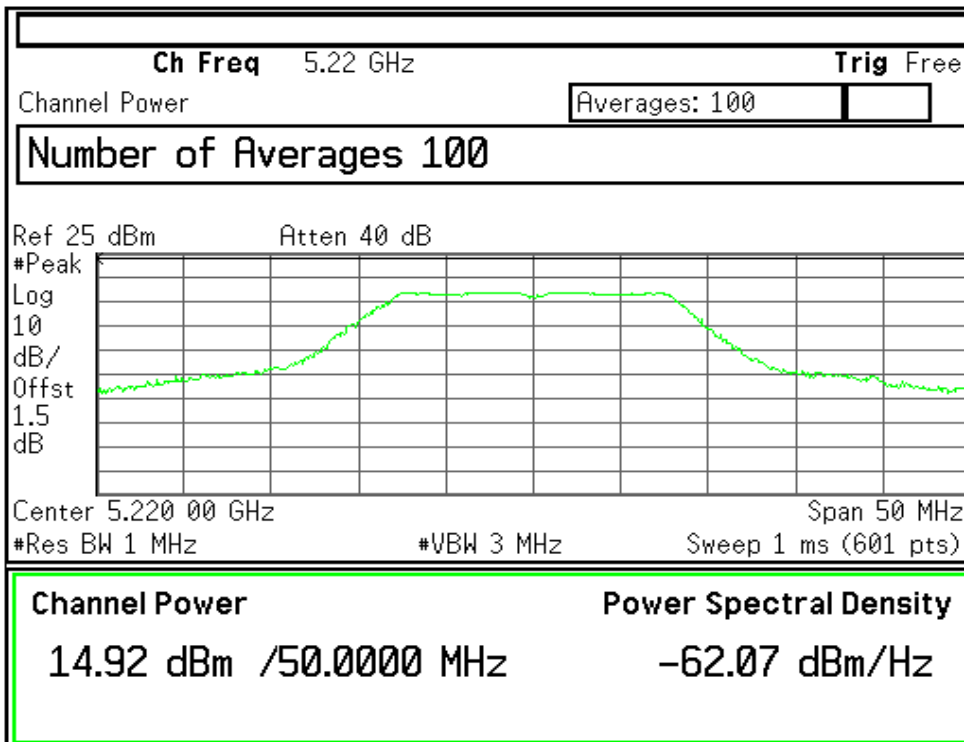


Meas Setup	
<b>Avg Number</b>	100
On	Off
<b>Avg Mode</b>	Repeat
Exp	
<b>Integ BW</b>	50.0000 MHz
<b>Chan Pwr Span</b>	50.0000000 MHz
<b>Optimize Ref Level</b>	
<b>More</b>	1 of 2

File Operation Status, A:\SCREEN331.GIF file saved



CH High

Agilent 11:14:11 Jun 13, 2006

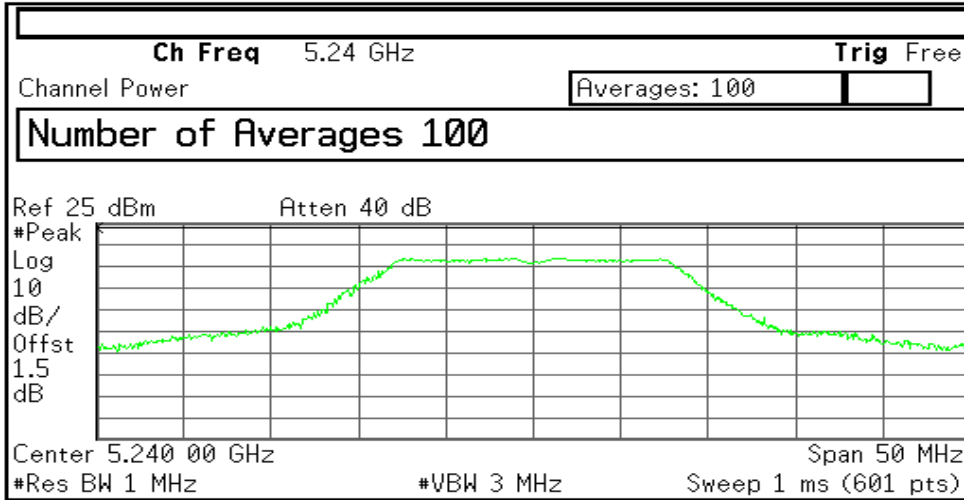

<b>Channel Power</b>	<b>Power Spectral Density</b>
15.29 dBm /50.0000 MHz	-61.70 dBm/Hz

<b>Meas Setup</b>	
<b>Avg Number</b>	100
On	Off
<b>Avg Mode</b>	Repeat
Exp	
<b>Integ BW</b>	50.0000 MHz
<b>Chan Pwr Span</b>	50.0000000 MHz
<b>Optimize Ref Level</b>	
<b>More</b>	1 of 2

File Operation Status, A:\SCREN332.GIF file saved



### 7.3 RADIATED UNDESIRABLE EMISSION (15.407)

#### LIMIT

For transmitters operating in the 5.15-5.35 GHz band: all emissions outside of the 5.15-5.35 GHz band shall not exceed an EIRP of -27dBm / MHz (68.2dBuV/m). But Unwanted emissions below 1 GHz must comply with the general field strength limits set forth in §15.209. Further, any U-NII devices using an AC power line are required to comply also with the conducted limits set forth in §15.207.

The provisions of §15.205 apply to intentional radiators operating under this section. The EUT is set to transmit in a continuous mode.

#### MEASUREMENT EQUIPMENT USED



Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
Spectrum Analyzer	Agilent	E4446A	MY44020154	11/16/2006
Pre-Amplifier	Miteq	NSP4000-NF	870731	01/21/2007
Horn Antenna	Austriah	BBHA9120D	D267	09/20/2006
Turn Table	CT	CT123	4162	N.C.R
Antenna Tower	CT	CTERG23	3253	N.C.R
Controller	CT	CT100	95635	N.C.R
Coax Switch	Anitsu	MP 598	M 80094	N/A
Site NSA	CCS Lab.	N/A	N/A	12/11/2006

**Remark:** Each piece of equipment is scheduled for calibration once a year.



**Test Configuration**

**Radiated Emission Test Setup (for frequency below 1000MHz)**

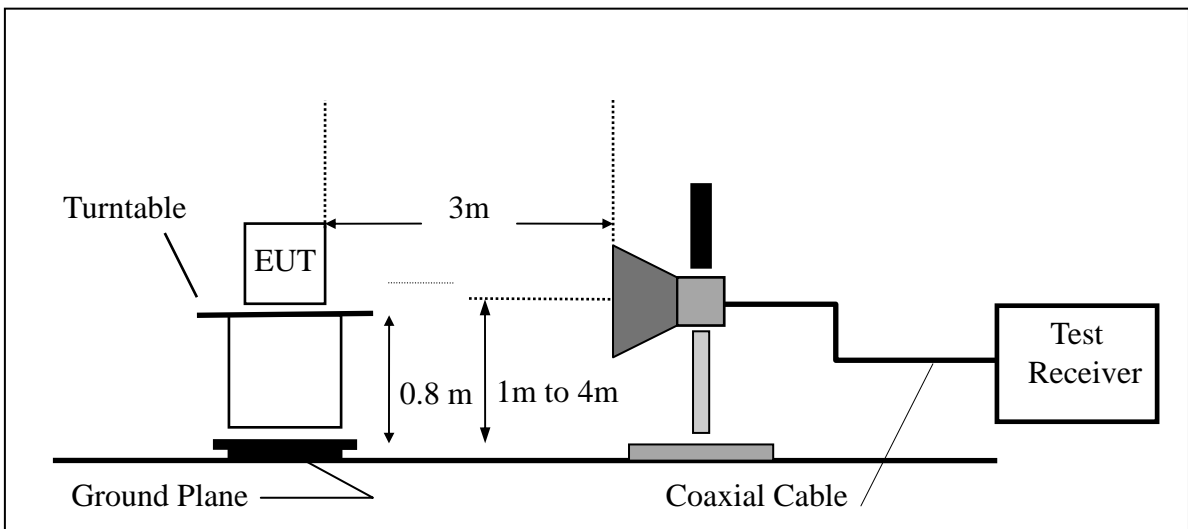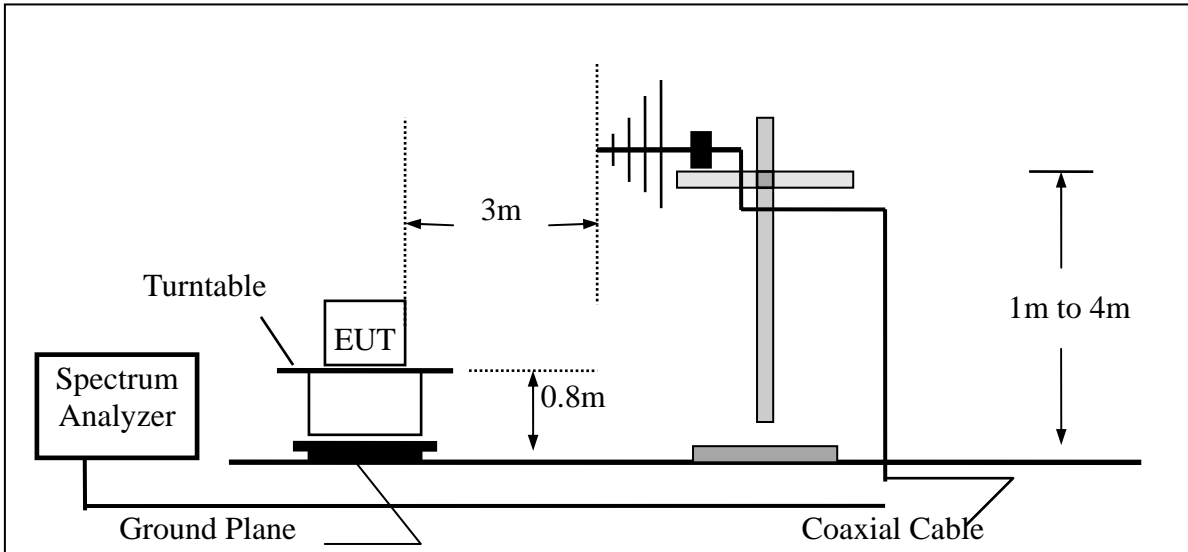

**Radiated Emission Test Setup (for frequency over 1 GHz)**

**TEST PROCEDURE**

1. The EUT is placed on a turntable, which is 0.8m above ground plane.
2. The turntable is rotated for 360 degrees to determine the orientation for generating the maximum emission level.
3. The EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.
4. Maximum procedure is performed on the six highest emissions to ensure EUT compliance.
5. Then, each emission is to be maximized by changing the polarization of receiving antenna both horizontal and vertical.



6. Repeat the above procedure until all channels are recorded.

*Note: The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 100kHz for Peak detection (PK) and Quasi-peak detection (QP) at frequency below 1GHz.*

### **Factor Calculation**

The Factor is calculated by adding the Antenna Factor and Cable Factor and subtracting the Amplifier Gain and Duty Cycle Correction Factor(if any) from the measured reading. The basic equation with a sample calculation is as follows:

$$F = AF + CL - AG$$

Where  $F = \text{Factor}$

$E = \text{Field Strength in Volts / meter}$

$AF = \text{Antenna factor}$

$CL = \text{Cable attenuation factor (cable loss)}$

$AG = \text{Amplifier gain}$

### **EIRP Calculation**

$$\text{Given } E = \frac{\sqrt{(30 \times P \times G)}}{d}$$

Where  $E = \text{Field strength (Volts/Meter)}$

$P = \text{Power (Watts)}$

$G = \text{Numeric antenna gain}$

$d = \text{Distance (Meter)}$

Combining equations and re-arranging the terms to express the distance as a function of the remaining variables yields

$$P \times G = \frac{(d \times E)^2}{30}$$

Re-arranging the terms yields

$$P (mW) = P (W) / 1000 \text{ and}$$

$$d (cm) = 100 * d (m)$$

Converting to the logarithmic form and changing to units of mW and  $\mu\text{V/m}$ , using

$$P (mW) = P (W) / 1000 \text{ and } E (\mu\text{V/m}) = E (V/m) / 1000000$$

Yields

$$10 \log(P \times G) = 10 \log d^2 + 10 \log E^2 - 10 \log 30 - 10 \log 10^9 = 20 \log d + 20 \log E - 104.77$$

Where  $10 \log (P * G)$  is  $PG$  in dBm and  $20 \log (E)$  is  $E$  in dBuV/m

Since

$$EIRP = P * G$$

Then, at a specification distance of 3 meters, the EIRP, in terms of field strength, is

$$EIRP (dBm) = P * G (dBm) = E (dBuV/m) - 95.2$$



### Band-edge Radiated Emissions


### TEST RESULTS

No non-compliance noted

Band Edges (802.11a/ CH Low)


Detector mode: Peak

Polarity: Vertical

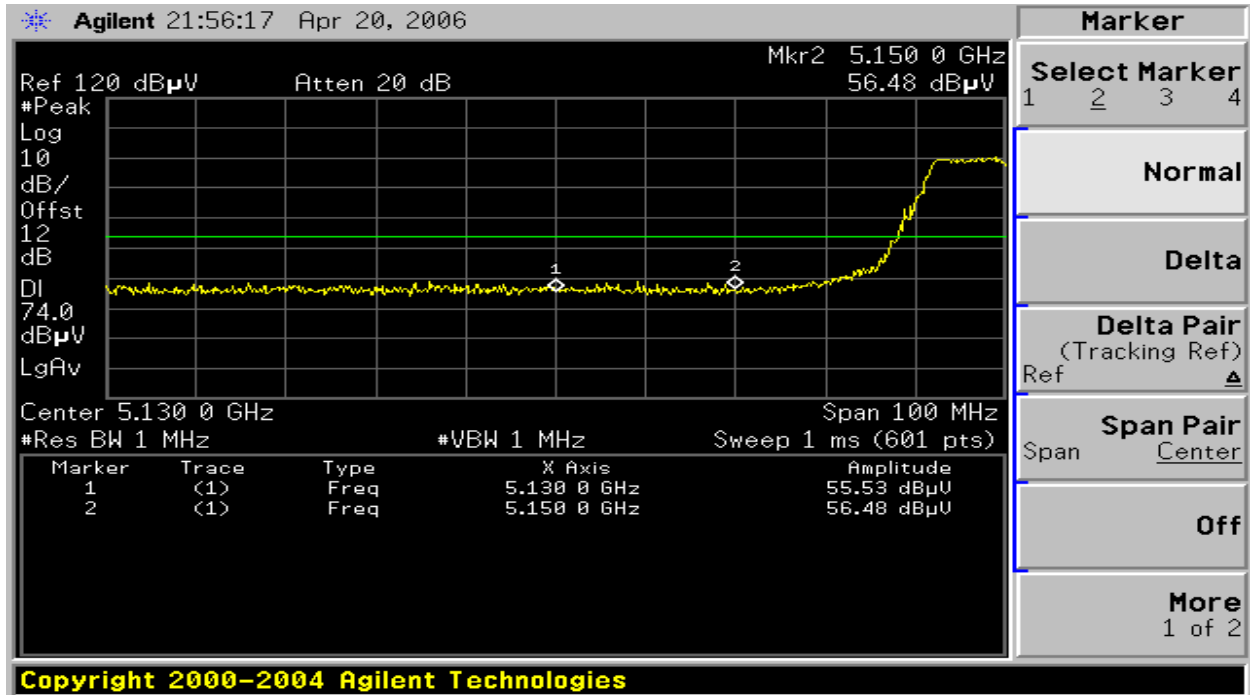

Detector mode: Average


Polarity: Vertical

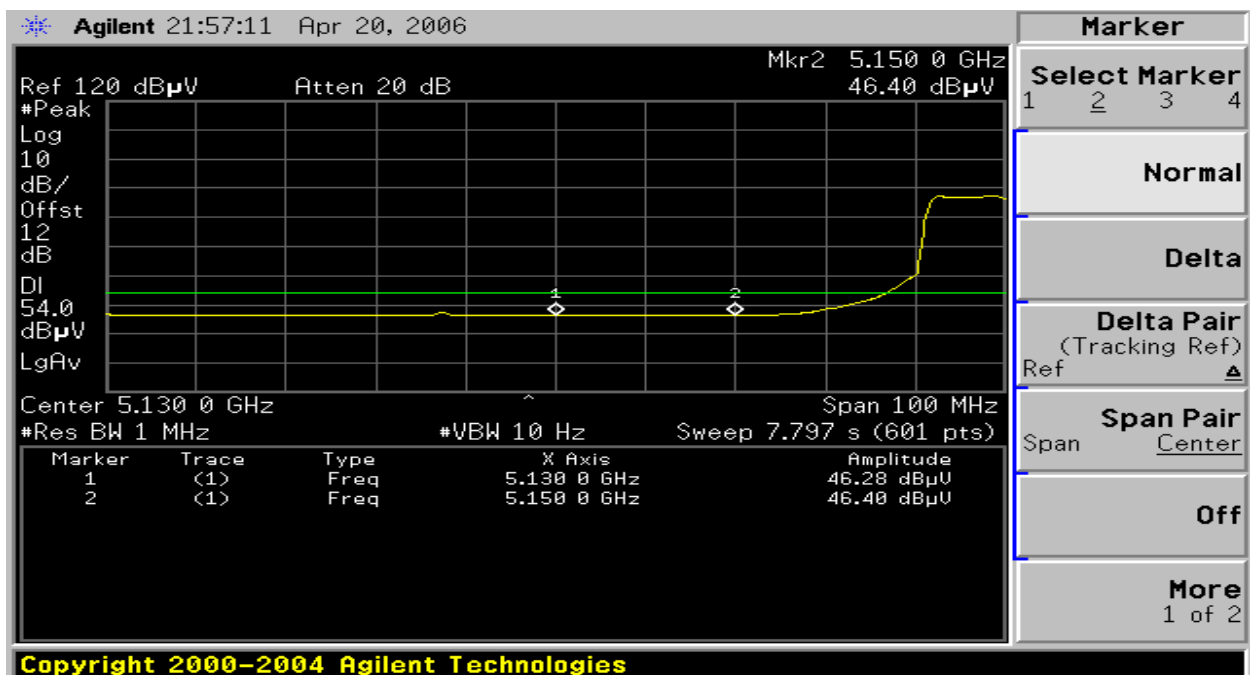




Detector mode: Peak

Polarity: Horizontal

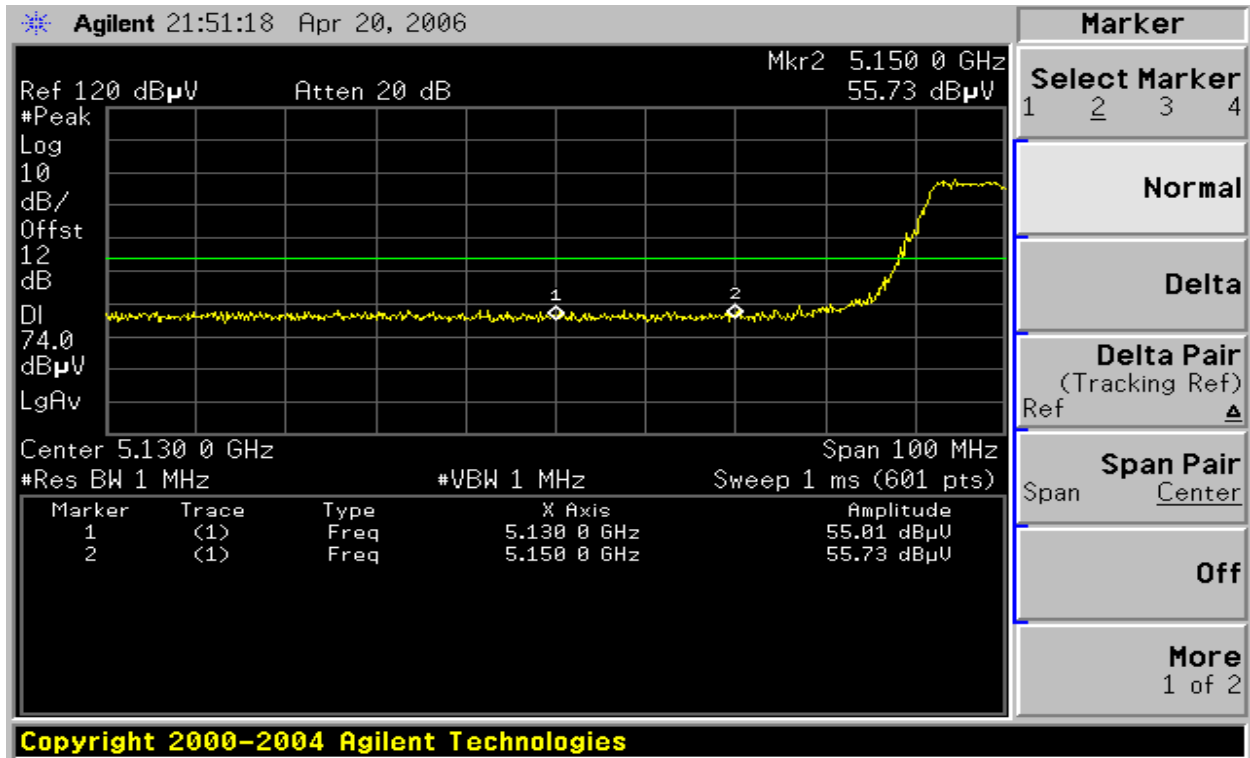

Detector mode: Average

Polarity: Horizontal

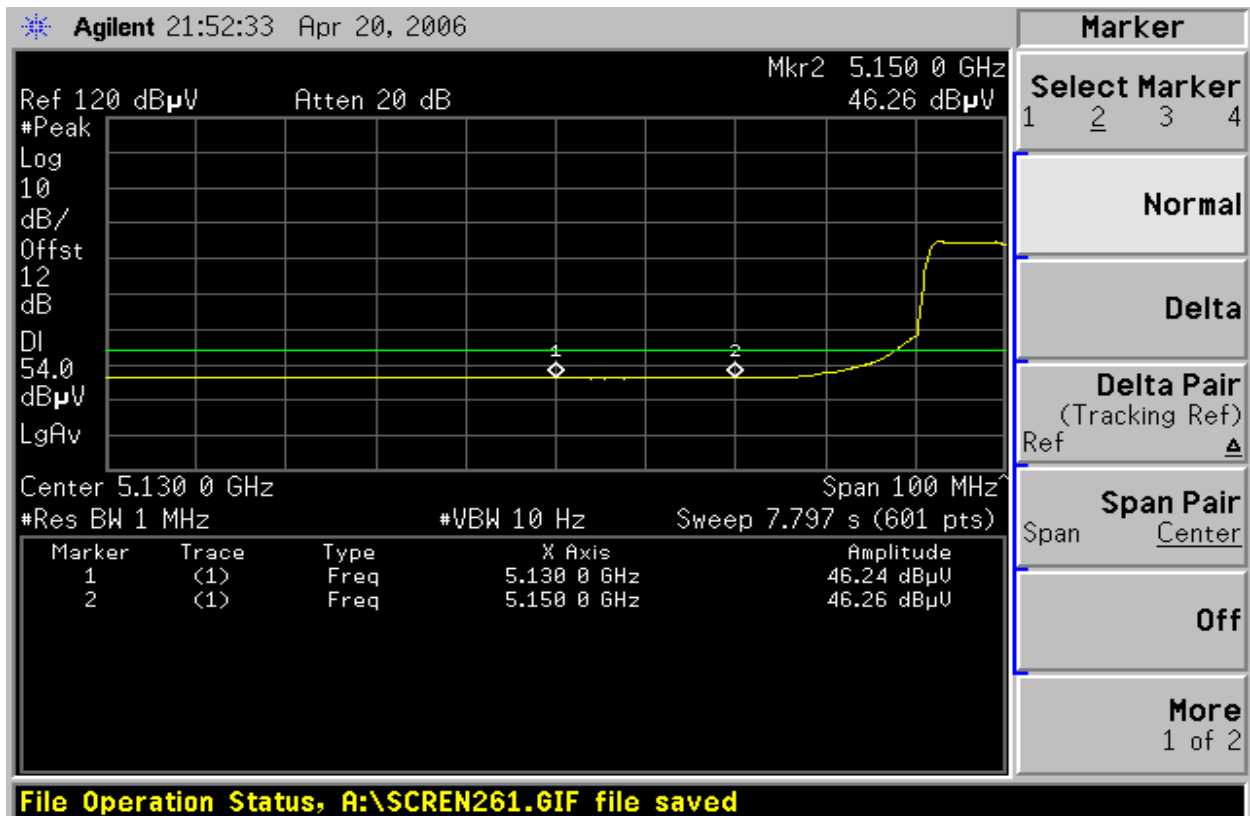




Band Edges (802.11a / CH High)


Detector mode: Peak

Polarity: Vertical

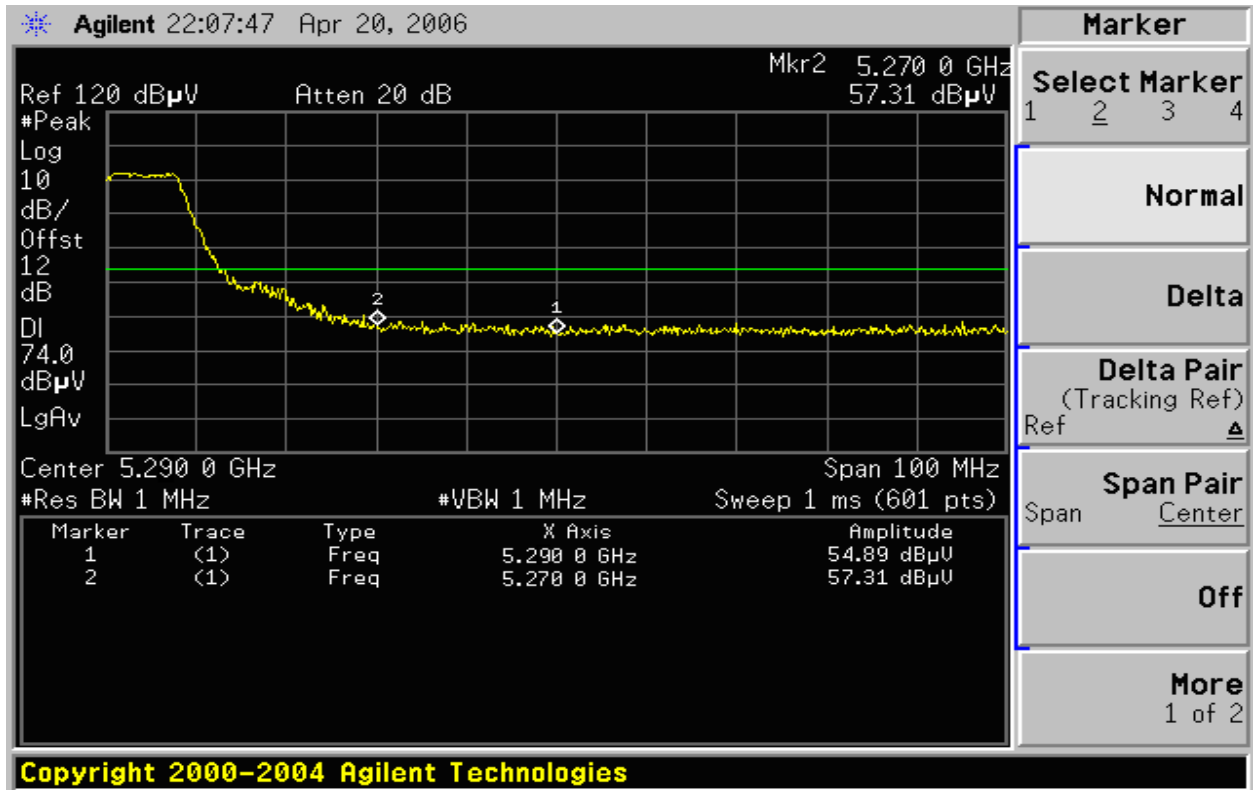

Detector mode: Average


Polarity: Vertical

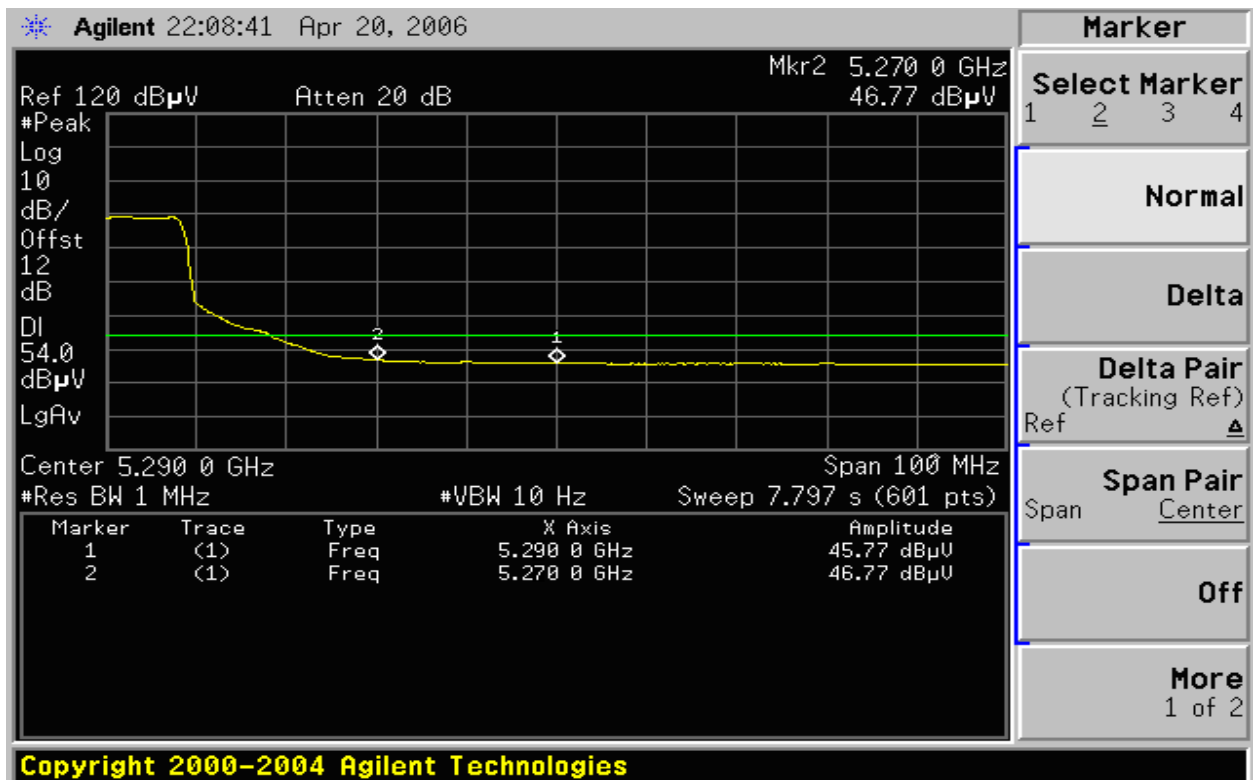




Detector mode: Peak

Polarity: Horizontal

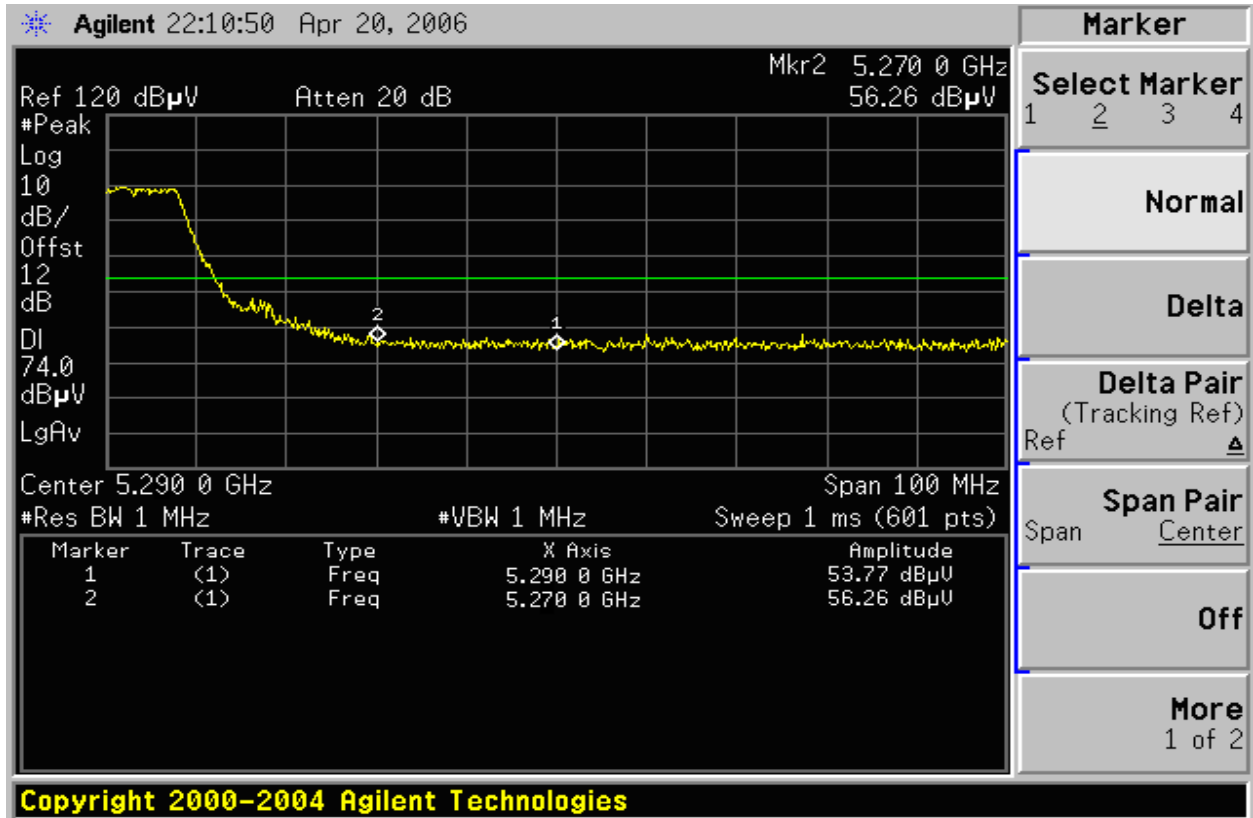

Detector mode: Average

Polarity: Horizontal

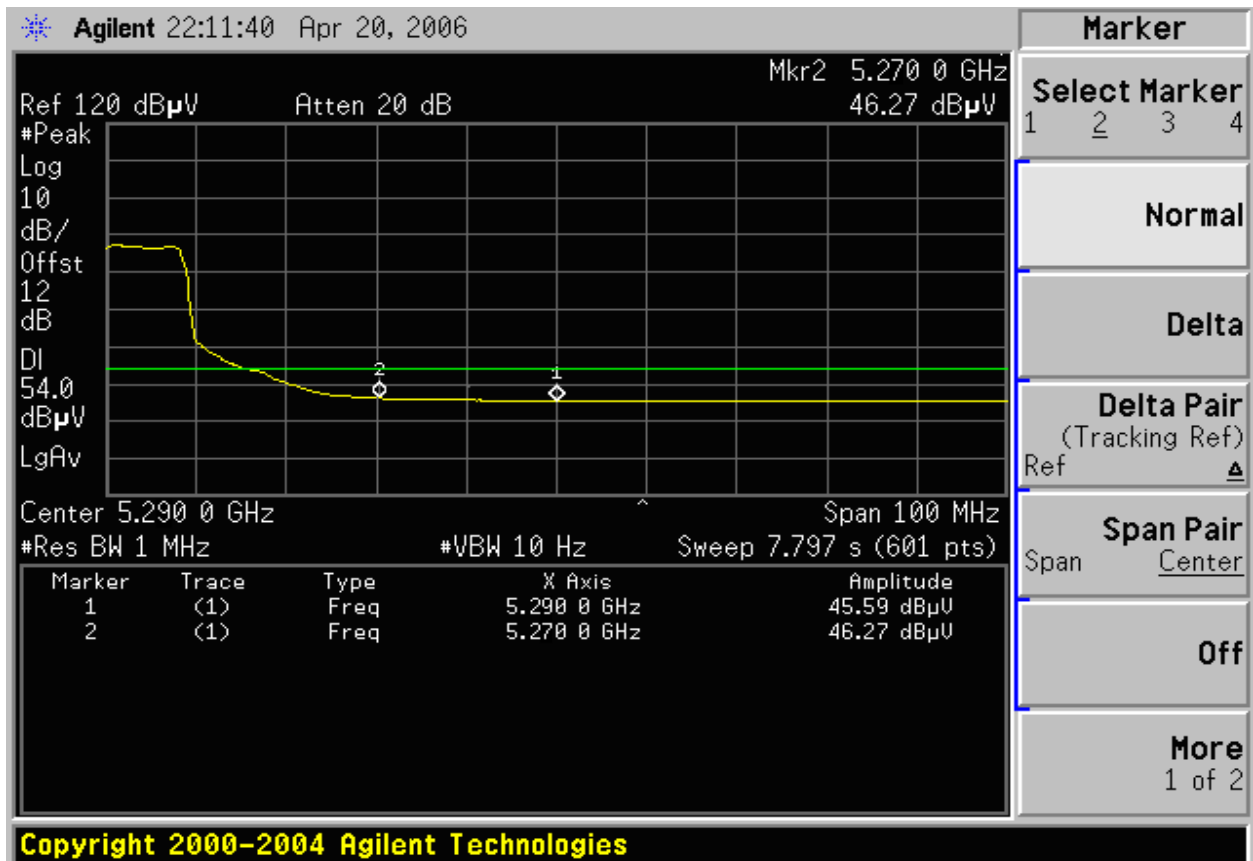



### Harmonic and Spurious Radiated Emission

#### TEST RESULTS

##### Below 1 GHz

Operation Mode: TX / IEEE 802.11a / CH Low

Test Date: April 19, 2006

Temperature: 20°C

Tested by: lin

Humidity: 70 % RH

Polarity: Ver. / Hor.

Freq. (MHz)	Ant.Pol. H/V	Detector Mode (PK/QP)	Reading (dBuV)	Factor (dB)	Actual FS (dBuV/m)	Limit 3m (dBuV/m)	Safe Margin (dB)
75.69	V	Peak	35.98	-5.59	30.39	40.00	-9.61
142.57	V	Peak	32.02	-1.73	30.29	43.50	-13.21
323.85	V	Peak	31.52	-2.29	29.23	46.00	-16.77
431.86	V	Peak	29.58	3.35	32.93	46.00	-13.07
649.29	V	Peak	30.02	7.35	37.37	46.00	-8.63
985.97	V	Peak	20.18	13.87	34.05	54.00	-19.95
77.46	H	Peak	35.69	-6.27	29.42	40.00	-10.58
152.83	H	Peak	31.25	-3.31	27.94	43.50	-15.56
323.85	H	Peak	36.02	-7.29	28.73	46.00	-17.27
431.83	H	Peak	36.14	-2.17	33.97	46.00	-12.03
649.29	H	Peak	29.68	5.74	35.42	46.00	-10.58
865.33	H	Peak	25.36	6.10	31.46	46.00	-14.54

**Notes:**

1. Measuring frequencies from 30 MHz to the 1GHz.
2. Radiated emissions measured in frequency range from 30 MHz to 1000MHz were made with an instrument using Peak detector mode.
3. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
4. The IF bandwidth of SPA between 30MHz to 1GHz was 100kHz.
5. EIRP Limit = -27dBm = 68.2dBuV/m,



Operation Mode: TX / IEEE 802.11a / CH Mid

Test Date: April 19, 2006

Temperature: 20°C

Tested by: lin

Humidity: 70 % RH

Polarity: Ver. / Hor.

Freq. (MHz)	Ant.Pol. H/V	Detector Mode (PK/QP)	Reading (dBuV)	Factor (dB)	Actual FS (dBuV/m)	Limit 3m (dBuV/m)	Safe Margin (dB)
79.25	V	Peak	39.35	-5.71	33.64	40.00	-6.36
156.36	V	Peak	36.95	-1.27	35.68	43.50	-7.82
323.85	V	Peak	35.25	-2.29	32.96	46.00	-13.04
539.88	V	Peak	34.96	3.16	38.12	46.00	-7.88
649.29	V	Peak	26.96	7.35	34.31	46.00	-11.69
757.31	V	Peak	25.02	8.82	33.84	46.00	-12.16
84.65	H	Peak	32.2	-7.25	24.95	40.00	-15.05
182.04	H	Peak	29.68	-4.96	24.72	43.50	-18.78
323.85	H	Peak	37.23	-7.29	29.94	46.00	-16.06
539.88	H	Peak	33.05	2.16	35.21	46.00	-10.79
649.29	H	Peak	30.25	5.74	35.99	46.00	-10.01
865.33	H	Peak	29.67	6.10	35.77	46.00	-10.23

Notes:

1. Measuring frequencies from 30 MHz to the 1GHz.
2. Radiated emissions measured in frequency range from 30 MHz to 1000MHz were made with an instrument using Peak detector mode.
3. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
4. The IF bandwidth of SPA between 30MHz to 1GHz was 100kHz.
5. EIRP Limit = -27dBm = 68.2dBuV/m





Operation Mode: TX / IEEE 802.11a / CH High

Test Date: April 19, 2006

Temperature: 20°C

Tested by: lin

Humidity: 70 % RH

Polarity: Ver. / Hor.

Freq. (MHz)	Ant.Pol. H/V	Detector Mode (PK/QP)	Reading (dBuV)	Factor (dB)	Actual FS (dBuV/m)	Limit 3m (dBuV/m)	Safe Margin (dB)
100.21	V	Peak	35.69	-4.71	30.98	43.50	-12.52
154.99	V	Peak	32.05	-1.29	30.76	43.50	-12.74
323.85	V	Peak	37.25	-2.29	34.96	46.00	-11.04
539.88	V	Peak	34.69	3.16	37.85	46.00	-8.15
701.2	V	Peak	29.36	6.24	35.6	46.00	-10.4
977.55	V	Peak	20.56	13.31	33.87	54.00	-20.13
77.62	H	Peak	34.78	-6.27	28.51	40.00	-11.49
159.32	H	Peak	32.86	-3.26	29.6	43.50	-13.9
252.93	H	Peak	40.25	-8.80	31.45	46.00	-14.55
323.85	H	Peak	39.65	-7.29	32.36	46.00	-13.64
539.88	H	Peak	37.73	-2.17	35.56	46.00	-10.44
757.31	H	Peak	30.14	2.82	32.96	46.00	-13.04

Notes:

1. Measuring frequencies from 30 MHz to the 1GHz.
2. Radiated emissions measured in frequency range from 30 MHz to 1000MHz were made with an instrument using Peak detector mode.
3. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
4. The IF bandwidth of SPA between 30MHz to 1GHz was 100kHz.
5. EIRP Limit = -27dBm = 68.2dBuV/m



**Above 1 GHz**

**Operation Mode:** TX / IEEE 802.11a / CH Low

**Test Date:** April 19, 2006

**Temperature:** 23°C

**Tested by:** lin

**Humidity:** 56 % RH

**Polarity:** Ver. / Hor.

Freq. (MHz)	Ant. Pol H/V	Peak Reading (dBuV)	AV Reading (dBuV)	Ant. / CL CF (dB)	Actual Fs		Peak Limit (dBuV/m)	AV Limit (dBuV/m)	Margin (dB)	Remark
					Peak (dBuV/m)	AV (dBuV/m)				
3675.00	V	38.52		7.56	46.08		68.2		-22.12	
10350.0	V	32.52	25.85	21.67	54.19	47.52	74	54	-6.48	Avg
3783.33	H	36.22		8.19	44.41		68.2		-23.79	
10350.2	H	33.36	26.28	21.67	55.03	47.95	74	54	-6.05	Avg

**Notes:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Spectrum setting:
  - a. Peak Setting 1GHz - 26GHz, RBW = 1MHz, VBW = 1MHz, Sweep time = 200 ms.
  - b. AV Setting 1GHz - 26GHz, RBW = 1MHz, VBW = 10Hz, Sweep time = 200 ms.
5. EIRP Limit = -27dBm = 68.2dBuV/m



Operation Mode: TX / IEEE 802.11a / CH Mid

Test Date: April 19, 2006

Temperature: 20°C

Tested by: lin

Humidity: 70 % RH

Polarity: Ver. / Hor.

Freq. (MHz)	Ant. Pol H/V	Peak Reading (dBuV)	AV Reading (dBuV)	Ant. / CL CF (dB)	Actual Fs		Peak Limit (dBuV/m)	AV Limit (dBuV/m)	Margin (dB)	Remark
					Peak (dBuV/m)	AV (dBuV/m)				
3678.67	V	35.69		7.56	43.25		68.2		-24.95	
10440.4	V	34.02	24.56	22.13	56.15	46.69	74	54	-7.31	Avg
3783.33	H	33.58		8.19	41.77		68.2		-26.43	
10441.7	H	32.25	24.69	22.13	54.38	46.82	74	54	-7.18	Avg

Notes:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Spectrum setting:
  - a. Peak Setting 1GHz - 26GHz, RBW = 1MHz, VBW = 1MHz, Sweep time = 200 ms.
  - b. AV Setting 1GHz - 26GHz, RBW = 1MHz, VBW = 10Hz, Sweep time = 200 ms.
5. EIRP Limit=-27dBm=68.2dBuV/m



Operation Mode: TX / IEEE 802.11a / CH High

Test Date: April 19, 2006

Temperature: 20°C

Tested by: lin

Humidity: 70 % RH

Polarity: Ver. / Hor.

Freq. (MHz)	Ant. Pol H/V	Peak Reading (dBuV)	AV Reading (dBuV)	Ant. / CL CF (dB)	Actual Fs		Peak Limit (dBuV/m)	AV Limit (dBuV/m)	Margin (dB)	Remark
					Peak (dBuV/m)	AV (dBuV/m)				
3678.23	V	33.25		7.56	40.81		68.2		-27.39	
10480.2	V	32.02	23.28	23.02	55.04	46.3	74	54	-7.7	Avg
3783.33	H	32.96		8.19	41.15		68.2		-27.05	
10481.7	H	32.52	21.26	23.01	55.53	44.27	74	54	-9.73	Avg

Notes:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Spectrum setting:
  - a. Peak Setting 1GHz - 26GHz, RBW = 1MHz, VBW = 1MHz, Sweep time = 200 ms.
  - b. AV Setting 1GHz - 26GHz, RBW = 1MHz, VBW = 10Hz, Sweep time = 200 ms.
5. EIRP Limit=-27dBm=68.2dBuV/m

## 7.4 PEAK POWER SPECTRAL DENSITY (15.407)

### LIMIT

- For the band 5.15-5.25 GHz, the peak transmit power over the frequency band of operation shall not exceed the lesser of 50mW or  $4\text{dBm} + 10\log B$ , where B is the 26dB emission bandwidth in MHz. In addition, the peak power spectral density shall not exceed 4dBm in any 1MHz band.
- For the band 5.25-5.35 GHz, the peak transmit power over the frequency band of operation shall not exceed the lesser of 250mW or  $11\text{dBm} + 10\log B$ , where B is the 26dB emission bandwidth in MHz. In addition, the peak power spectral density shall not exceed 11dBm in any 1MHz band.


*If transmitting antennas of directional gain greater than 6dBi are used, both the peak transmit power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.*

### MEASUREMENT EQUIPMENT USED

Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
Spectrum Analyzer	Agilent	E4446A	MY44020154	11/16/2006
Low-Loss RF Cable	Huber + Suhner	Sucoflex 104	N/A	N/A

**Remark:** Each piece of equipment is scheduled for calibration once a year.

### Test Configuration



### TEST PROCEDURE

The test is performed in accordance with <FCC Public Notice: APPENDIX A Guidelines for Assessing Unlicensed National Information Infrastructure (U-NII) Devices> – Part 15, Subpart E, August 2002, Method 2.

1. Place the EUT on the table and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to Spectrum.
3. Set RBW = 1MHz, VBW = 3MHz, Span = 30MHz, Sweep time = Auto.
4. Record the maximum reading.
5. The above procedure is repeated until all the channels are recorded.



### TEST RESULTS

No non-compliance noted

#### Base mode


Channel	Frequency (MHz)	PPSD (dBm)	Limit (dBm)	Margin (dB)
Low	5180	2.15	4.00	-1.85
Middle	5220	2.81	4.00	-1.19
High	5240	3.05	4.00	-0.95

(Note: Maximum antenna gain = 3.13 dBi, therefore there is no reduction due to antenna gain.)

#### Test Data Plots

##### PPSD


##### CH Low

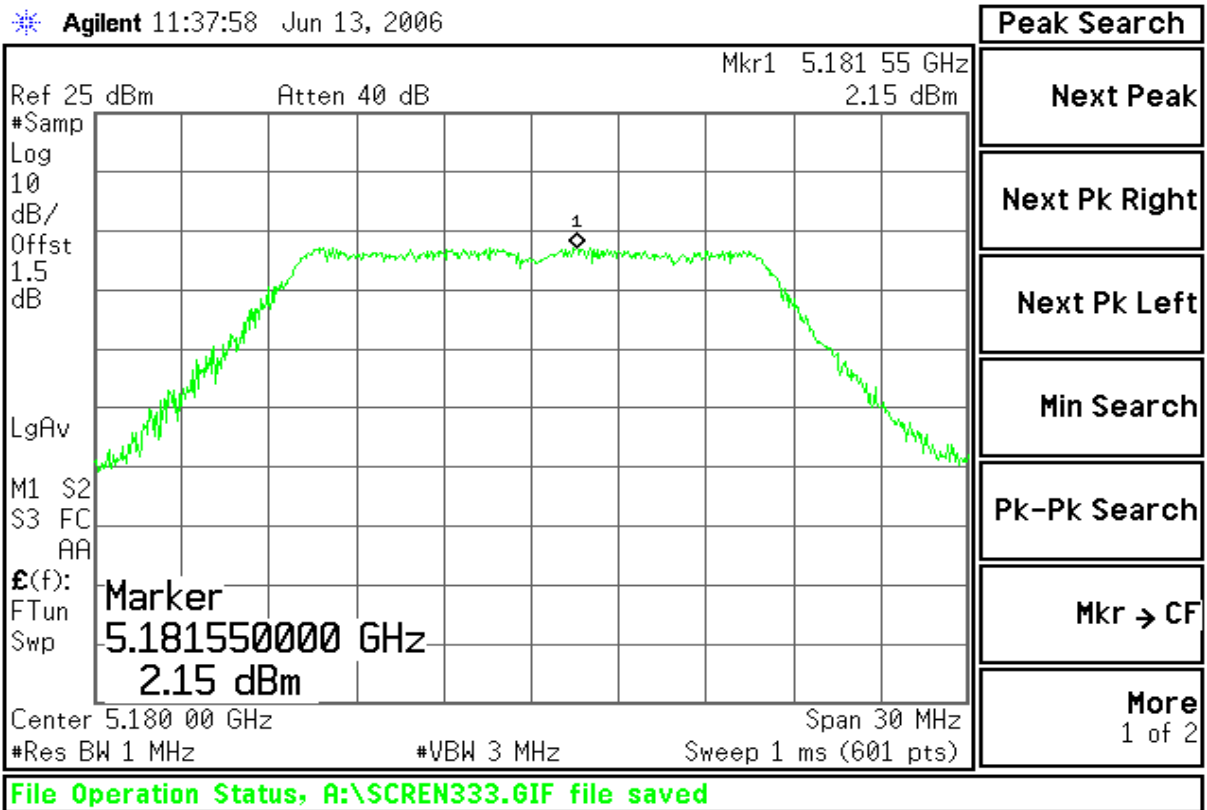



### CH Mid

Agilent 11:39:21 Jun 13, 2006

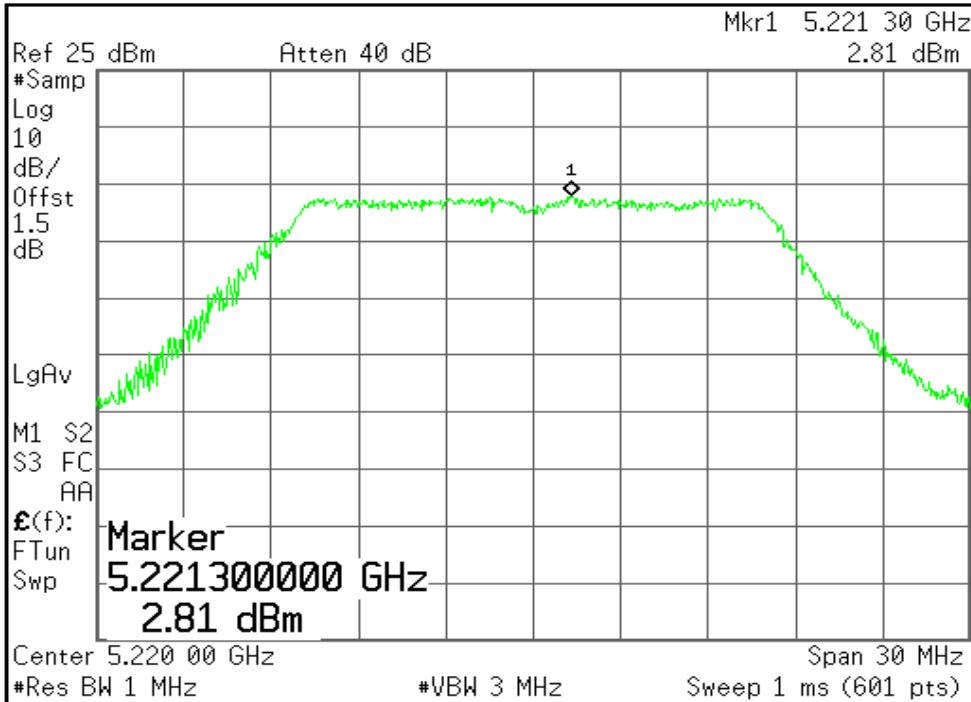


Peak Search
Next Peak
Next Pk Right
Next Pk Left
Min Search
Pk-Pk Search
Mkr → CF
More 1 of 2

File Operation Status, A:\SCREN334.GIF file saved

### CH High

Agilent 11:45:07 Jun 13, 2006

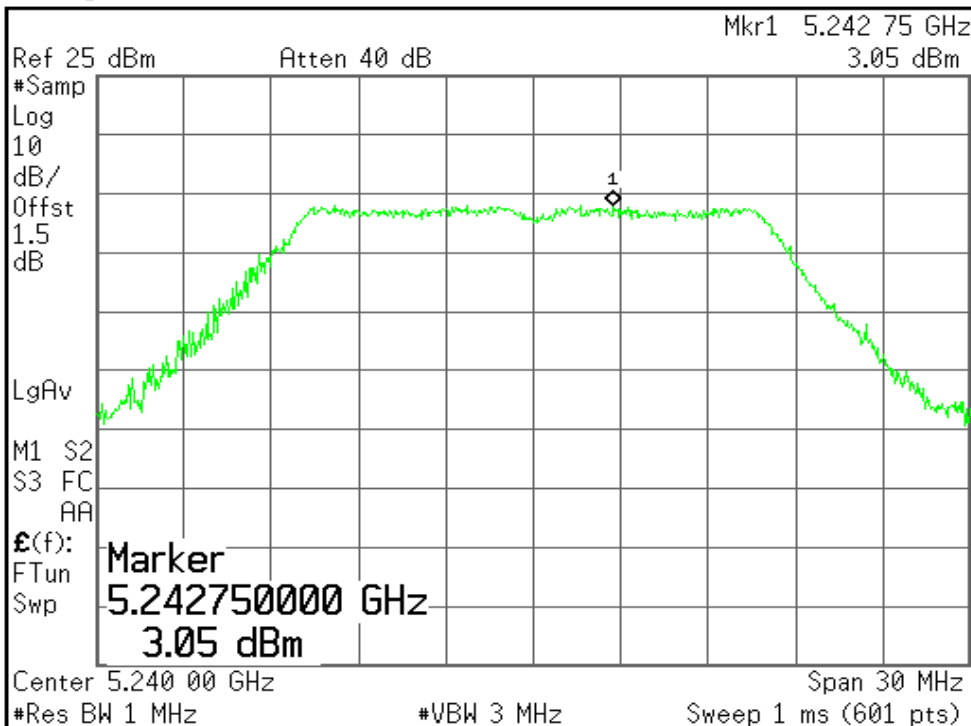

Peak Search
Next Peak
Next Pk Right
Next Pk Left
Min Search
Pk-Pk Search
Mkr → CF
More 1 of 2

Printer not responding

## 7.5 CONDUCTED UNDESIRABLE EMISSION (15.407)

### LIMIT

Transmitters operating in the 5.15-5.35 GHz band: all emissions outside of the 5.15-5.35 GHz band shall not exceed an EIRP of -27dBm / MHz. Unwanted emissions below 1 GHz must comply with the general field strength limits set forth in §15.209. Further, any U-NII devices using an AC power line are required to comply also with the conducted limits set forth in §15.207.


The provisions of §15.205 apply to intentional radiators operating under this section.

### MEASUREMENT EQUIPMENT USED

Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
Spectrum Analyzer	Agilent	E4446A	MY44020154	11/16/2006
Low-Loss RF Cable	Huber + Suhner	Sucoflex 104	N/A	N/A

*Remark: Each piece of equipment is scheduled for calibration once a year.*

### Test Configuration



### TEST PROCEDURE

Conducted RF measurements of the transmitter output were made to confirm that the EUT antenna port conducted emissions meet the specified limit and to identify any spurious signals that require further investigation or measurements on the radiated emissions site.

The transmitter output is connected to the spectrum analyzer. The resolution bandwidth is set to 1 MHz. The video bandwidth is set to 1 MHz. Peak detection measurements are compared to the average EIRP limit, adjusted for the maximum antenna gain. If necessary, additional average detection measurements are made.

Measurements are made over the 30 MHz to 40 GHz range with the transmitter set to the lowest, middle, and highest channels.

### TEST RESULTS

No non-compliance noted

*(Note: Maximum antenna gain = 3.13 dBi, therefore there is no reduction due to antenna gain.)*






**Test Data Plots**

**Conducted Spurious Emissions**

**CH Low**


\* Agilent 20:05:38 Apr 25, 2006

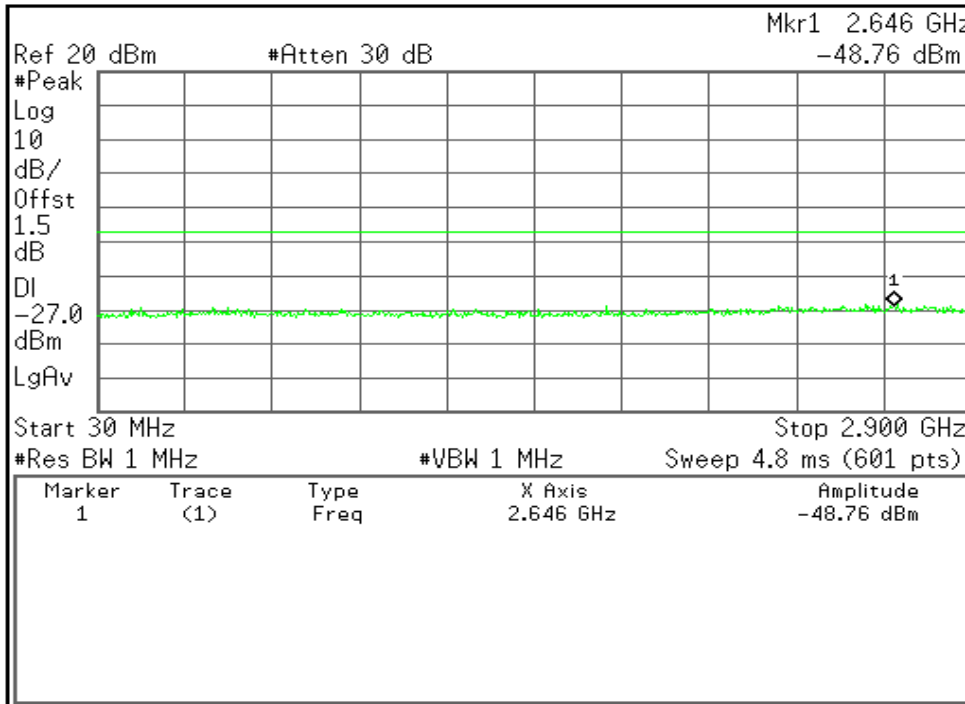

<b>Freq/Channel</b>
<b>Center Freq</b> 1.46500000 GHz
<b>Start Freq</b> 30.0000000 MHz
<b>Stop Freq</b> 2.90000000 GHz
<b>CF Step</b> 287.000000 MHz Auto Man
<b>Freq Offset</b> 0.00000000 Hz
<b>Signal Track</b> On Off

Copyright 2000-2004 Agilent Technologies

\* Agilent 20:06:07 Apr 25, 2006

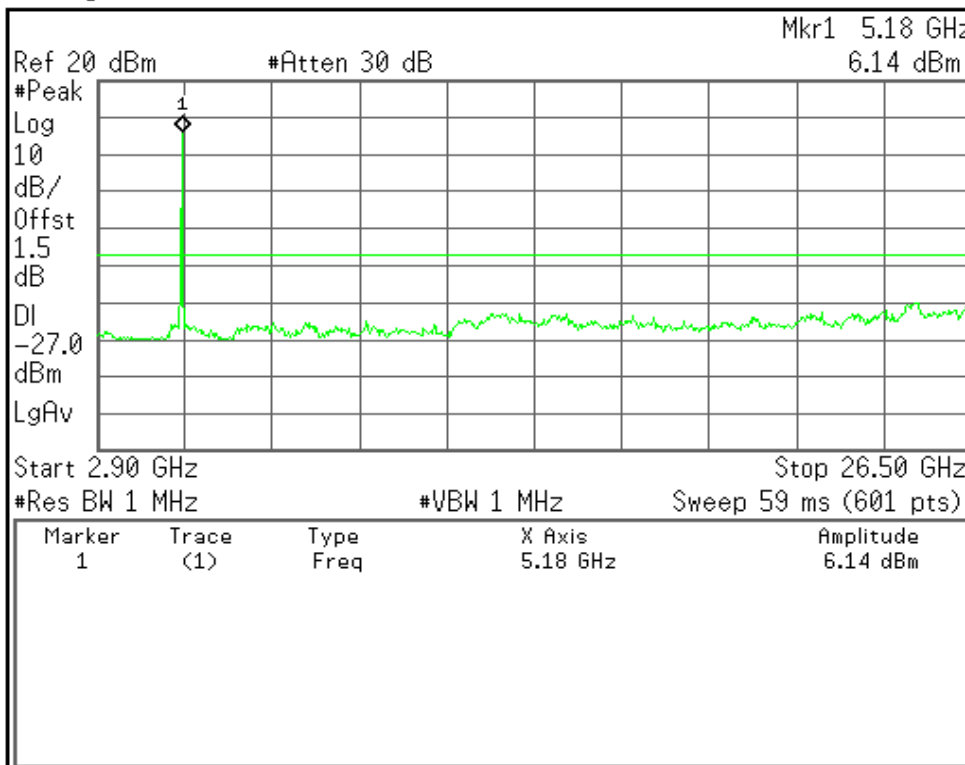


<b>Freq/Channel</b>
<b>Center Freq</b> 14.7000000 GHz
<b>Start Freq</b> 2.90000000 GHz
<b>Stop Freq</b> 26.5000000 GHz
<b>CF Step</b> 2.36000000 GHz Auto Man
<b>Freq Offset</b> 0.00000000 Hz
<b>Signal Track</b> On Off

Copyright 2000-2004 Agilent Technologies



Agilent 20:06:38 Apr 25, 2006

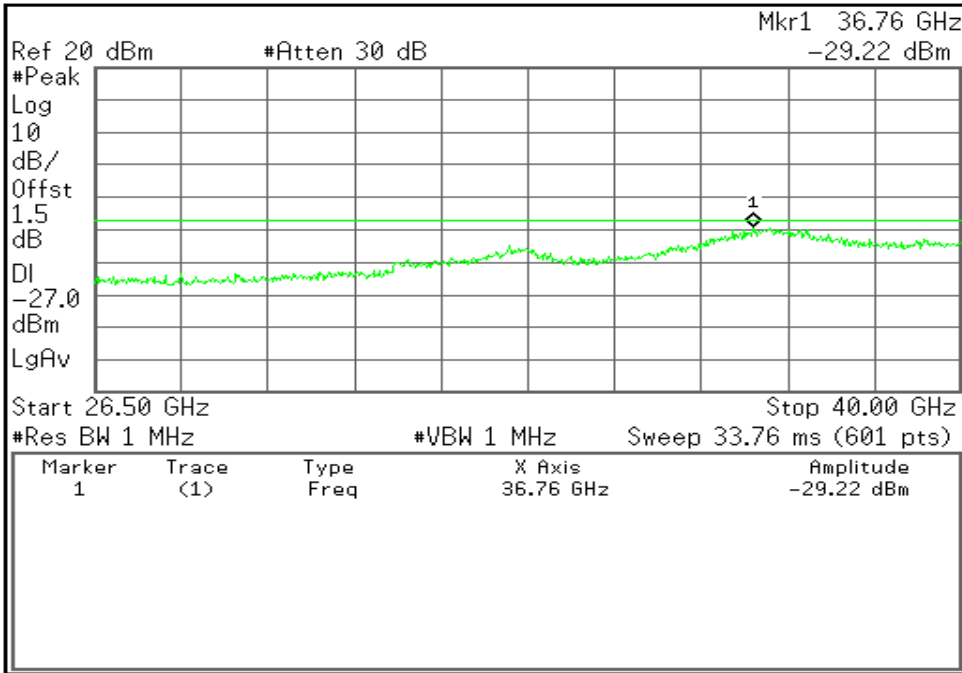


<b>Freq/Channel</b>	
<b>Center Freq</b>	33.2500000 GHz
<b>Start Freq</b>	26.5000000 GHz
<b>Stop Freq</b>	40.0000000 GHz
<b>CF Step</b>	1.35000000 GHz Auto Man
<b>Freq Offset</b>	0.00000000 Hz
<b>Signal Track</b>	On Off

Copyright 2000-2004 Agilent Technologies

CH Mid

Agilent 20:08:59 Apr 25, 2006

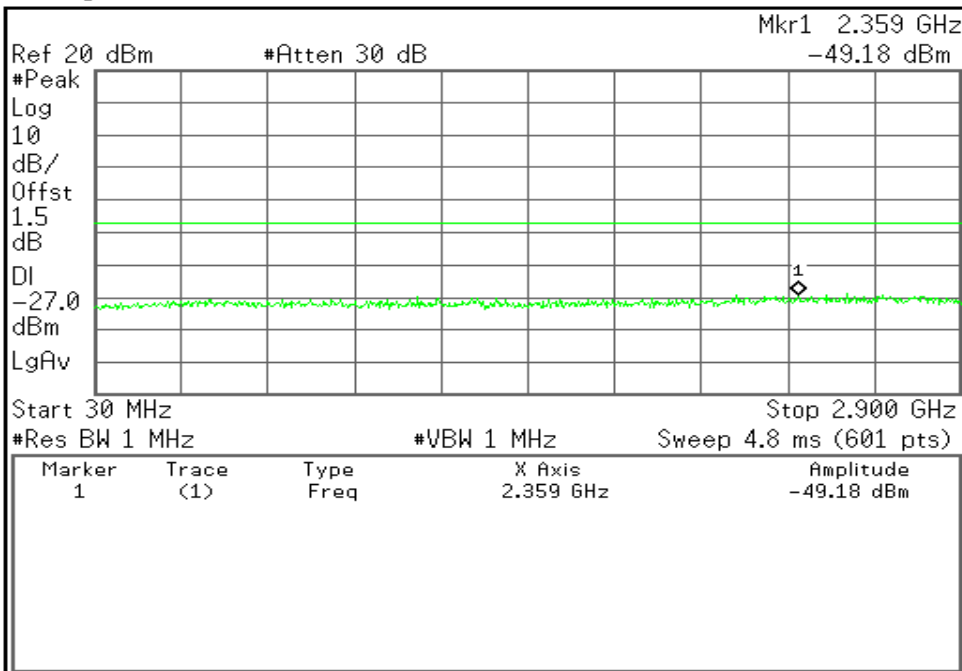


<b>Freq/Channel</b>	
<b>Center Freq</b>	1.46500000 GHz
<b>Start Freq</b>	30.0000000 MHz
<b>Stop Freq</b>	2.90000000 GHz
<b>CF Step</b>	287.000000 MHz Auto Man
<b>Freq Offset</b>	0.00000000 Hz
<b>Signal Track</b>	On Off

Copyright 2000-2004 Agilent Technologies




Agilent 20:09:35 Apr 25, 2006

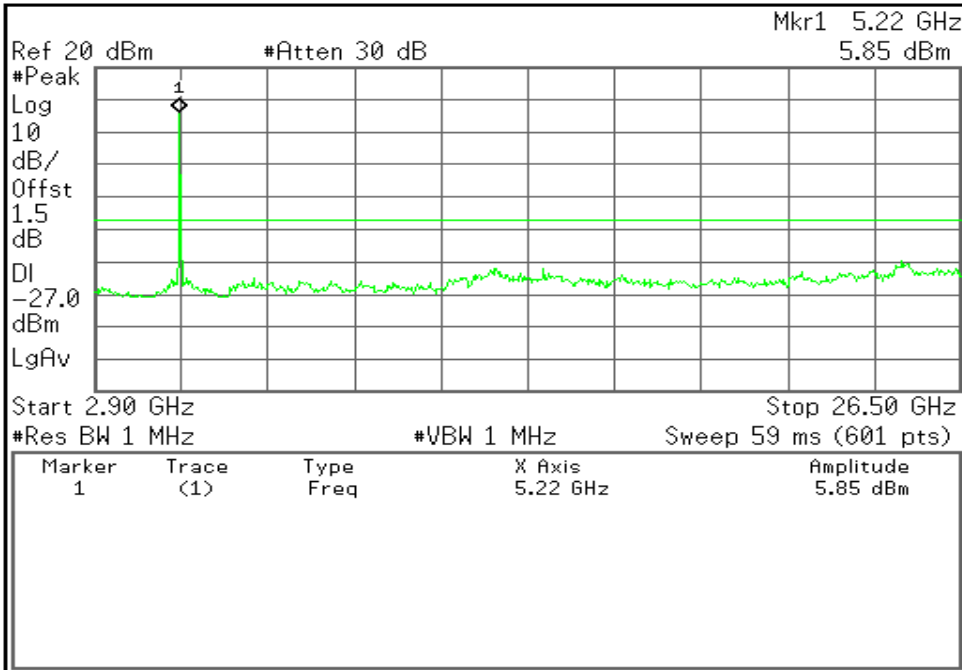

<b>Freq/Channel</b>	
<b>Center Freq</b>	14.70000000 GHz
<b>Start Freq</b>	2.90000000 GHz
<b>Stop Freq</b>	26.50000000 GHz
<b>CF Step</b>	2.36000000 GHz Auto Man
<b>Freq Offset</b>	0.00000000 Hz
<b>Signal Track</b>	On Off

Copyright 2000-2004 Agilent Technologies

Agilent 20:10:02 Apr 25, 2006

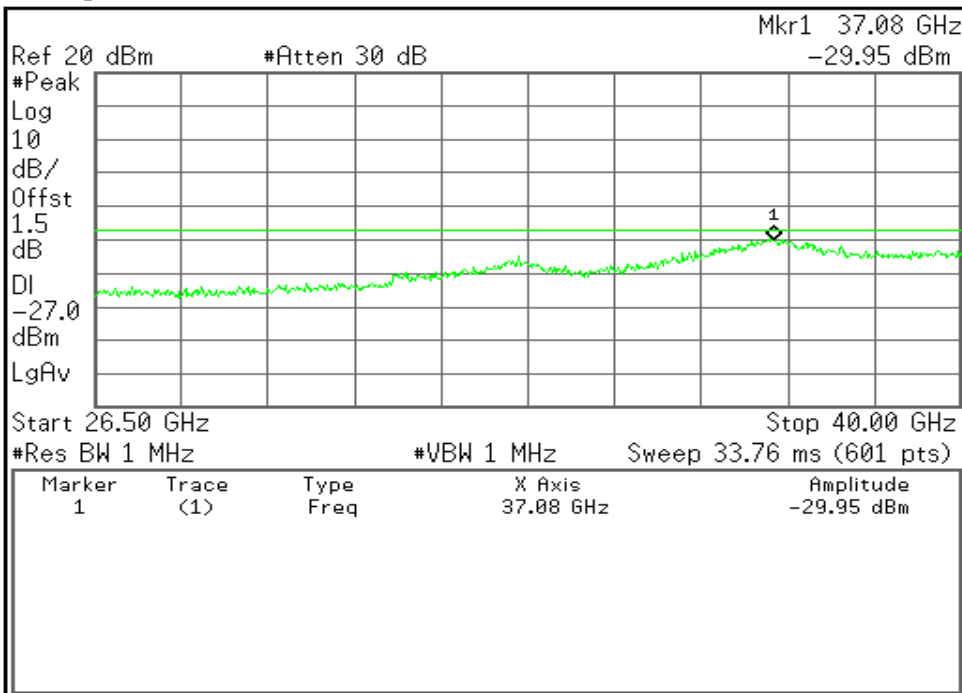


<b>Freq/Channel</b>	
<b>Center Freq</b>	33.25000000 GHz
<b>Start Freq</b>	26.50000000 GHz
<b>Stop Freq</b>	40.00000000 GHz
<b>CF Step</b>	1.35000000 GHz Auto Man
<b>Freq Offset</b>	0.00000000 Hz
<b>Signal Track</b>	On Off

Copyright 2000-2004 Agilent Technologies



CH High


Agilent 20:17:23 Apr 25, 2006

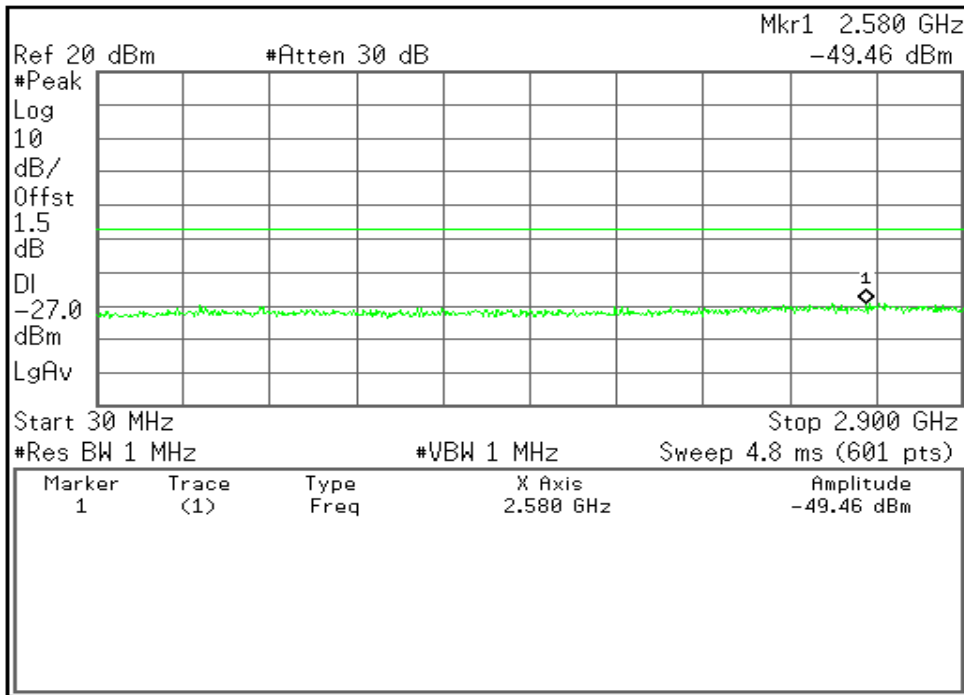

<b>Freq/Channel</b>
<b>Center Freq</b> 1.46500000 GHz
<b>Start Freq</b> 30.0000000 MHz
<b>Stop Freq</b> 2.90000000 GHz
<b>CF Step</b> 287.000000 MHz Auto Man
<b>Freq Offset</b> 0.00000000 Hz
<b>Signal Track</b> On Off

Copyright 2000-2004 Agilent Technologies

Agilent 20:18:34 Apr 25, 2006

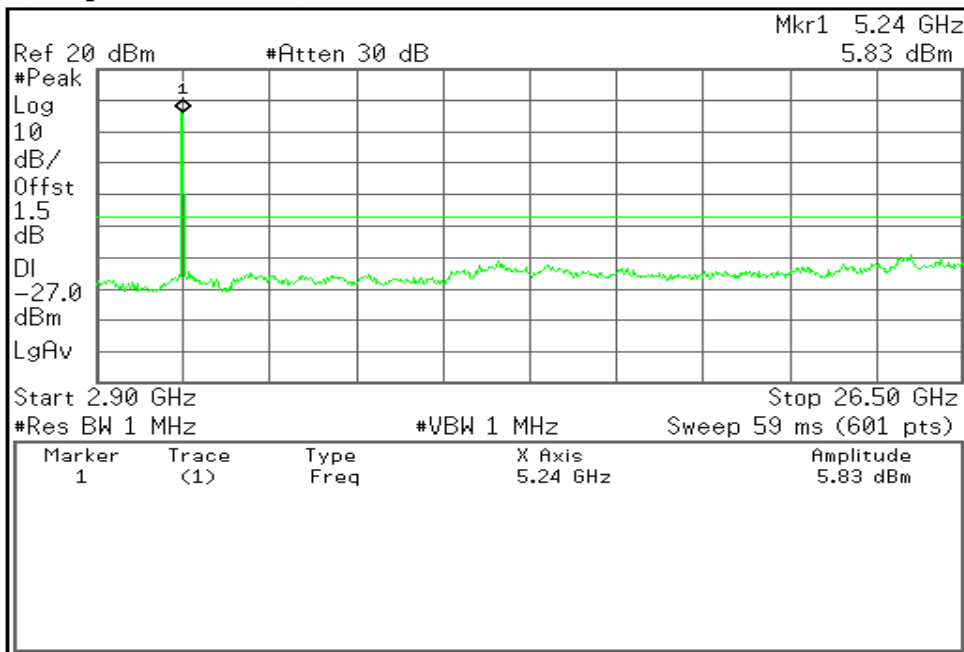


<b>Freq/Channel</b>
<b>Center Freq</b> 14.7000000 GHz
<b>Start Freq</b> 2.90000000 GHz
<b>Stop Freq</b> 26.5000000 GHz
<b>CF Step</b> 2.36000000 GHz Auto Man
<b>Freq Offset</b> 0.00000000 Hz
<b>Signal Track</b> On Off

Copyright 2000-2004 Agilent Technologies



Agilent 20:19:14 Apr 25, 2006

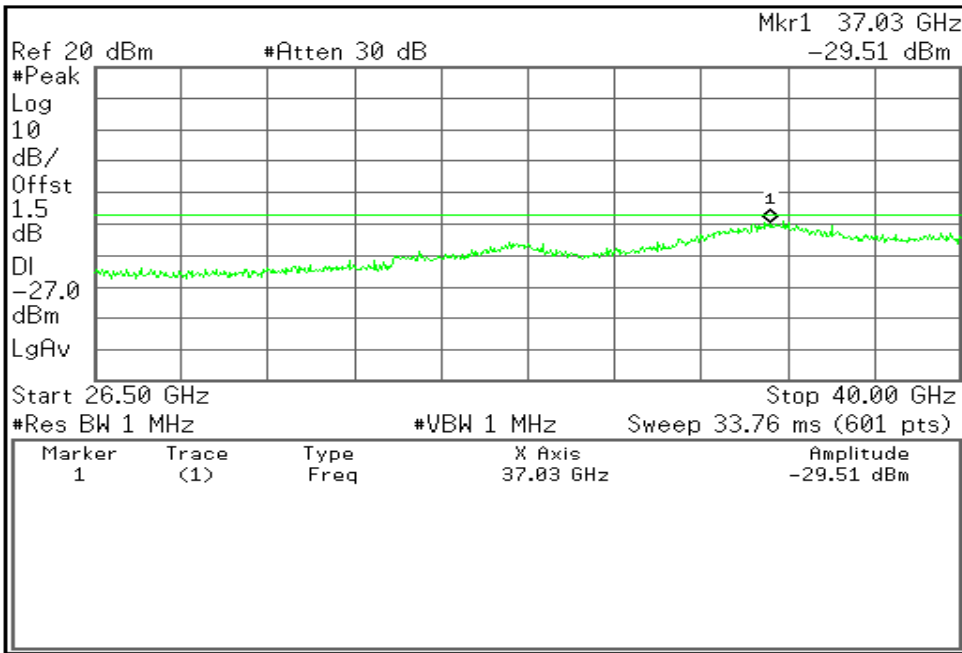

<b>Freq/Channel</b>
<b>Center Freq</b> 33.25000000 GHz
<b>Start Freq</b> 26.50000000 GHz
<b>Stop Freq</b> 40.00000000 GHz
<b>CF Step</b> 1.35000000 GHz Auto Man
<b>Freq Offset</b> 0.00000000 Hz
<b>Signal Track</b> On Off

Copyright 2000-2004 Agilent Technologies



## 7.6 FREQUENCY STABILITY (15.407)

### LIMIT

Manufacturers of U-NII devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified in the user's manual.

Referring to the theory of operation, the crystal used to set the frequency has a temperature coefficient of +/- 20 ppm over the specified rated temperature range. For a transmitter fundamental frequency of 5.24 GHz, this corresponds to +/- 106.4 kHz.

### TEST RESULTS

No non-compliance noted

Channel Frequency (MHz)	Measured Frequency (MHz)	Delta Frequency (kHz)	20 ppm Limit ( $\pm$ kHz)	Margin (kHz)
5240	5319.974	-26.00	106.40	-80.40

*Note: An examination of the band-edge plots shows that the emission will stay within the authorized band over the entire temperature range.*

## 7.7 26 DB EMISSION BANDWIDTH (15.407)

### LIMIT


For purposes of this subpart, the emission bandwidth shall be determined by measuring the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, that are 26 dB down relative to the maximum level of the modulated carrier. Determination of the emissions bandwidth is based on the use of measurement instrumentation employing a peak detector function with an instrument resolutions bandwidth approximately equal to 1.0 percent of the emission bandwidth of the device under measurement.

### MEASUREMENT EQUIPMENT USED

Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
Spectrum Analyzer	Agilent	E4446A	MY44020154	11/16/2006
Low-Loss RF Cable	Huber + Suhner	Sucoflex 104	N/A	N/A

*Remark: Each piece of equipment is scheduled for calibration once a year.*

### Test Configuration



### TEST PROCEDURE

1. Place the EUT on the table and set it in the transmitting mode.
2. Remove the antenna from the EUT and then connect a low-loss RF cable from the antenna port to the spectrum analyzer.
3. Set the spectrum analyzer as RBW = 1%EBW, VBW = RBW, Span = 50MHz / 100MHz (Turbo Mode), and Sweep = auto.
4. Mark the peak frequency and -26dBc (upper and lower) frequency.
5. Repeat until all the rest channels were investigated.




### TEST RESULTS

No non-compliance noted

Channel	Frequency (MHz)	Bandwidth (kHz)	PASS/FAIL
Low	5180	17311	PASS
Middle	5260	17258	PASS
High	5320	17249	PASS

### TEST DATA PLOTS

CH Low

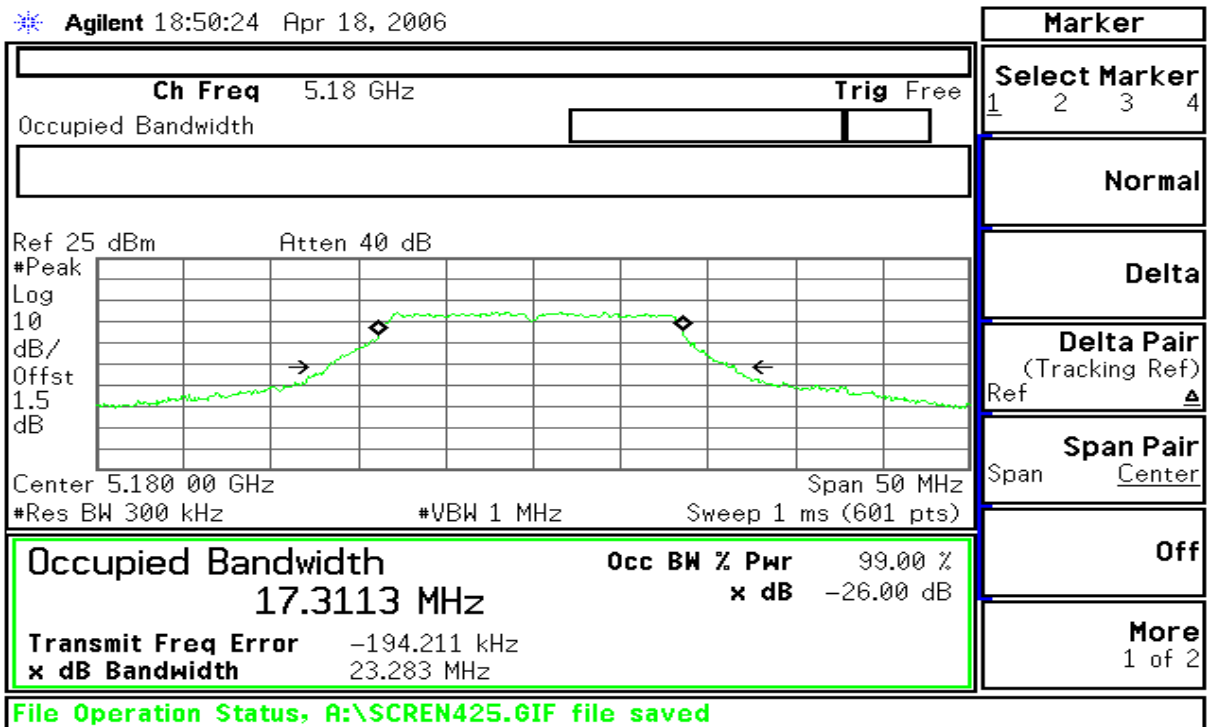






### CH Mid

Agilent 18:51:24 Apr 18, 2006

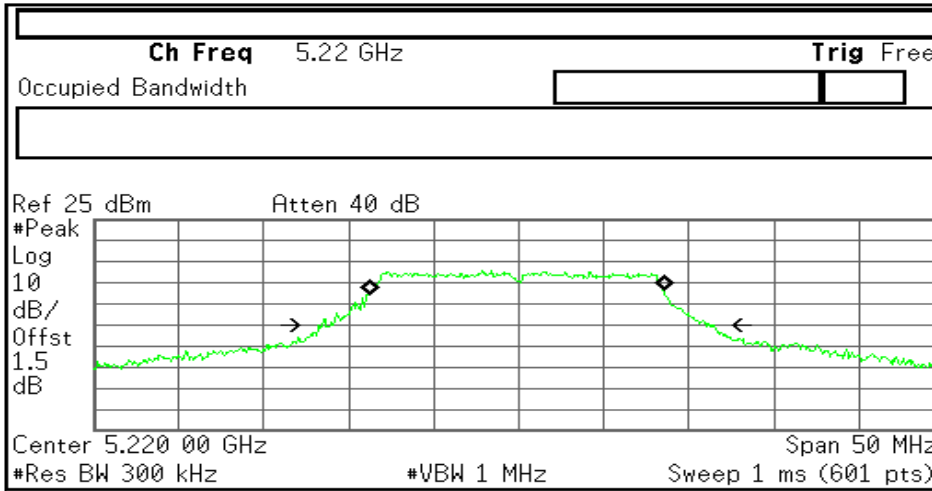


<b>Occupied Bandwidth</b>		<b>Occ BW % Pwr</b>	99.00 %
17.2577 MHz		<b>x dB</b>	-26.00 dB
<b>Transmit Freq Error</b>	-153.717 kHz		
<b>x dB Bandwidth</b>	23.261 MHz		

File Operation Status, A:\SCREN426.GIF file saved

Marker				
Select Marker	1	2	3	4
Normal				
Delta				
Delta Pair (Tracking Ref)				
Ref	▲			
Span Pair				
Span	Center			
Off				
More				
1 of 2				

### CH High

Agilent 18:52:48 Apr 18, 2006

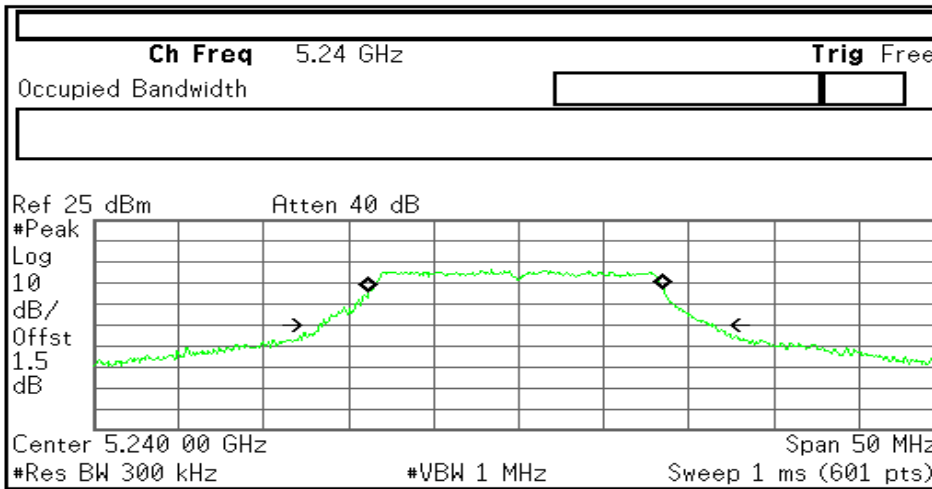

<b>Occupied Bandwidth</b>		<b>Occ BW % Pwr</b>	99.00 %
17.2489 MHz		<b>x dB</b>	-26.00 dB
<b>Transmit Freq Error</b>	-194.015 kHz		
<b>x dB Bandwidth</b>	23.074 MHz		

File Operation Status, A:\SCREN427.GIF file saved

Marker				
Select Marker	1	2	3	4
Normal				
Delta				
Delta Pair (Tracking Ref)				
Ref	▲			
Span Pair				
Span	Center			
Off				
More				
1 of 2				

## 7.8 PEAK EXCURSION (15.407)

### LIMIT

The ratio of the peak excursion of the modulation envelope (measured using a peak hold function) to the peak transmit power (measured as specified above) shall not exceed 13 dB across any 1 MHz bandwidth or the emission bandwidth whichever is less.


### MEASUREMENT EQUIPMENT USED

#### *Remark*

Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
Spectrum Analyzer	Agilent	E4446A	MY44020154	11/16/2006
Low-Loss RF Cable	Huber + Suhner	Sucoflex 104	N/A	N/A

: Each piece of equipment is scheduled for calibration once a year.

### Test Configuration



### TEST PROCEDURE

The test is performed in accordance with <FCC Public Notice: APPENDIX A Guidelines for Assessing Unlicensed National Information Infrastructure (U-NII) Devices> – Part 15, Subpart E, August 2002.

1. Place the EUT on the table and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to spectrum.
3. Trace A, Set RBW = 1MHz, VBW = 3MHz, Span = 50MHz, Max. hold.
4. Trace B, Set RBW = 1MHz, VBW = 30kHz, Span = 50MHz, Max. hold.
5. Delta Mark trace A Maximum frequency and trace B same frequency.
6. Repeat the above procedure until measurements for all frequencies were complete.

### TEST RESULTS

No non-compliance noted




Channel	Frequency (MHz)	Peak Excursion (dB)	Limit (dB)	Margin (dB)
Low	5180	7.17	13	-5.83
Middle	5220	6.66		-6.34
High	5240	7.06		-5.94

(Note: Maximum antenna gain = 3.13 dBi, therefore there is no reduction due to antenna gain.)


**Test Data Plots**

**Peak Excursion**

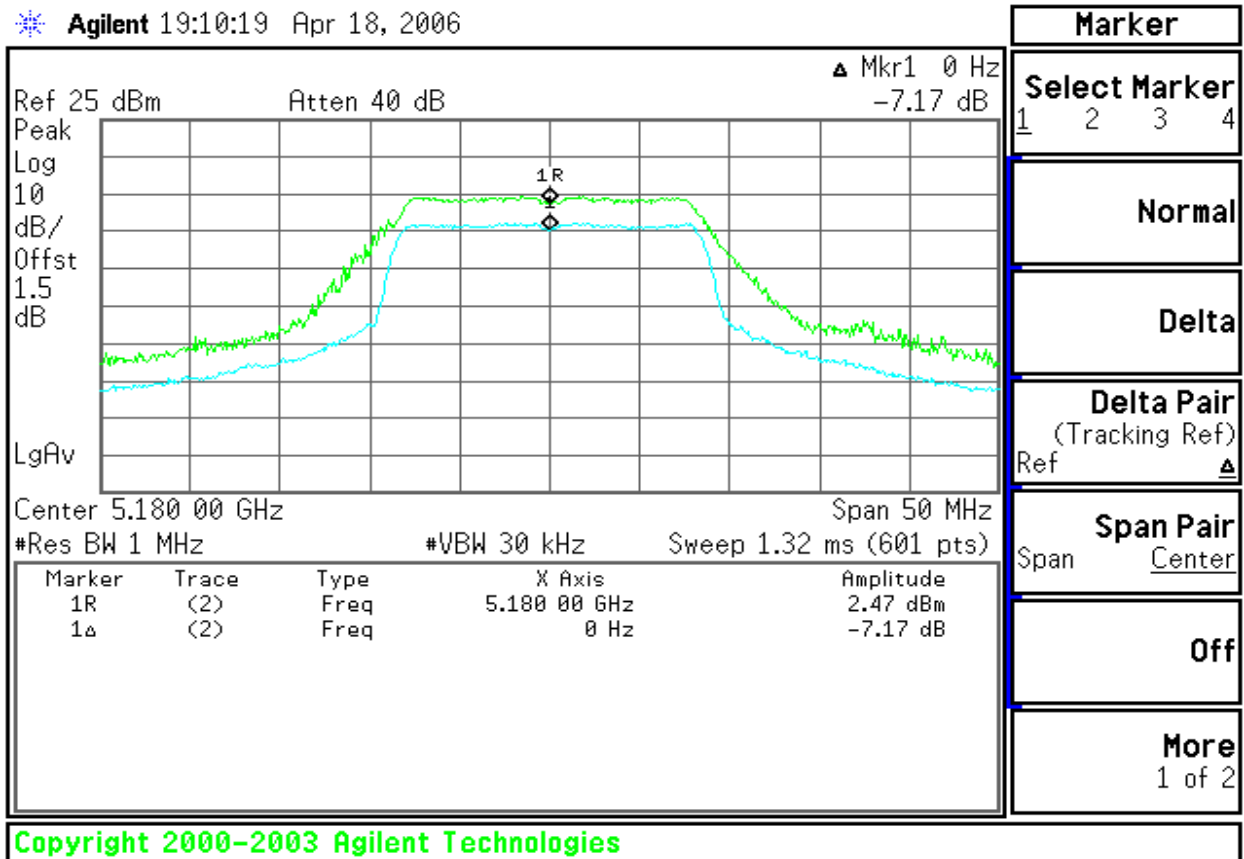




Agilent 19:06:44 Apr 18, 2006

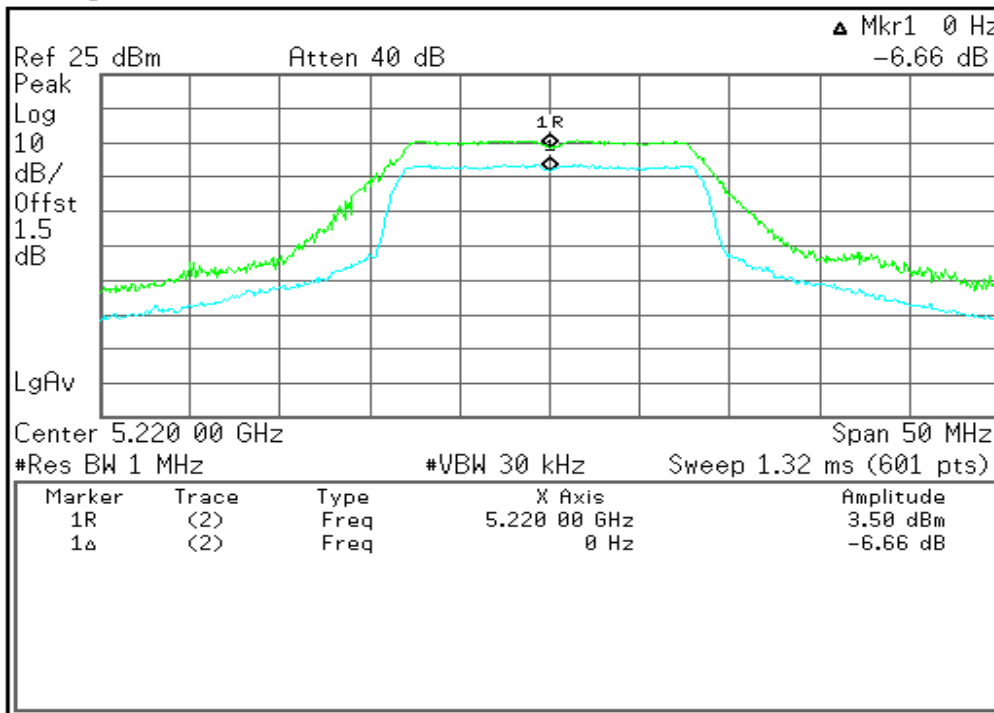

<b>Marker</b>
Select Marker 1 2 3 4
Normal
Delta
Delta Pair (Tracking Ref) Ref $\Delta$
Span Pair Span Center
Off
More 1 of 2

Copyright 2000-2003 Agilent Technologies

Agilent 19:04:03 Apr 18, 2006

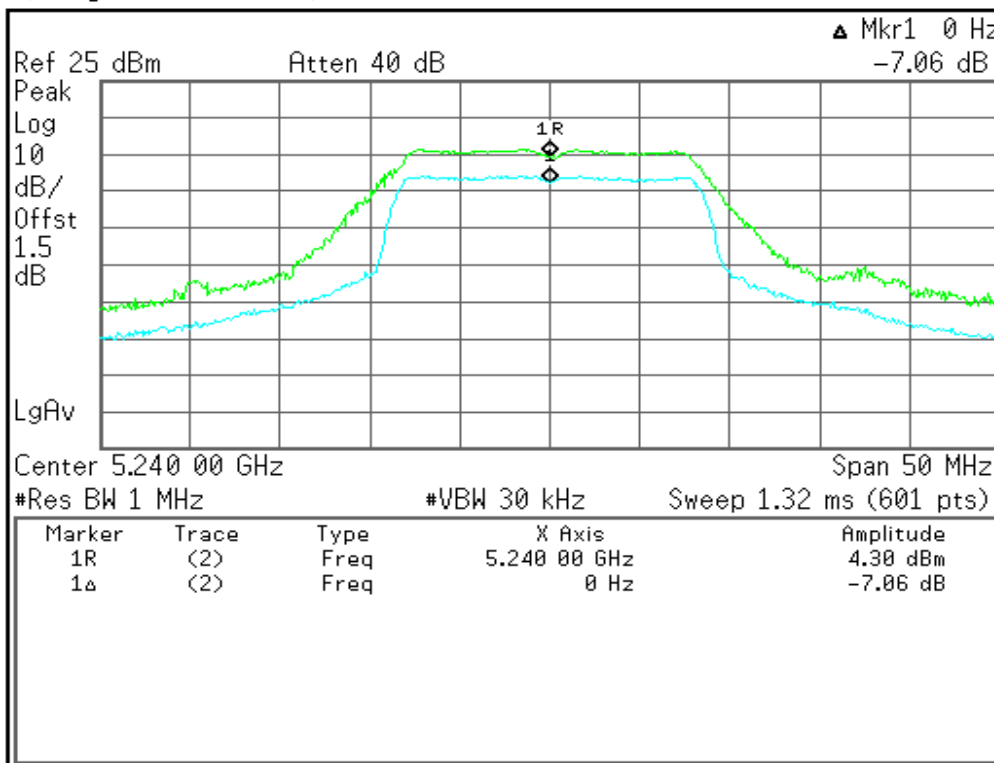

<b>Marker</b>
Select Marker 1 2 3 4
Normal
Delta
Delta Pair (Tracking Ref) Ref $\Delta$
Span Pair Span Center
Off
More 1 of 2

Unable to save file



## 7.9 POWERLINE CONDUCTED EMISSION (15.407)

### LIMIT

For an intentional radiator, which is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band of 150 kHz to 30 MHz shall not exceed 250 microvolts (The limit decreases linearly with the logarithm of the frequency in the range of 0.15 MHz to 0.50 MHz). The limits at a specific frequency range is listed as follows:

Frequency Range (MHz)	Limit (dB $\mu$ V)	
	Quasi-peak	Average
0.15 to 0.50	66 to 56	56 to 46
0.50 to 5	56	46
5 to 30	60	50

Compliance with this provision shall be based on the measurement of the radio frequency voltage between each power line (LINE and NEUTRAL) and ground at the power terminals.

### MEASUREMENT EQUIPMENT USED


Conducted Emission Test Site A (10m chamber)				
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
EMI Test Receiver	R&S	ESI26	100068	01/21/2007
EMC Analyzer	Agilent	E7402A	US41160329	01/21/2007
LISN	FCC	FCC-LISN-50-50-2-M	01067	N/A
LISN (EUT)	FCC	FCC-LISN-50-50-2-M	01068	07/29/2006
FOUR BALANCED TELECOM PAIRS ISN	FCC	FCC-TLISN-T8-02	20165	08/30/2006
4-WIRE ISN	R&S	ENY41	830663/024	08/30/2006
Double 2-Wire ISN	R&S	ENY22	830661/027	08/30/2006
TRANSIENT LIMITER	SCHAFFNER	CFL9206	1710	05/19/2007
EMI Monitor control box	FCC	0-SVDC	N/A	N/A

*Remark: Each piece of equipment is scheduled for calibration once a year.*

### TEST PROCEDURE

Please refer to ETSI EN 301 489-1 Clause 8.4.3 and EN 55022:1998 Clause 5 for the measurement methods.

### Test Configuration

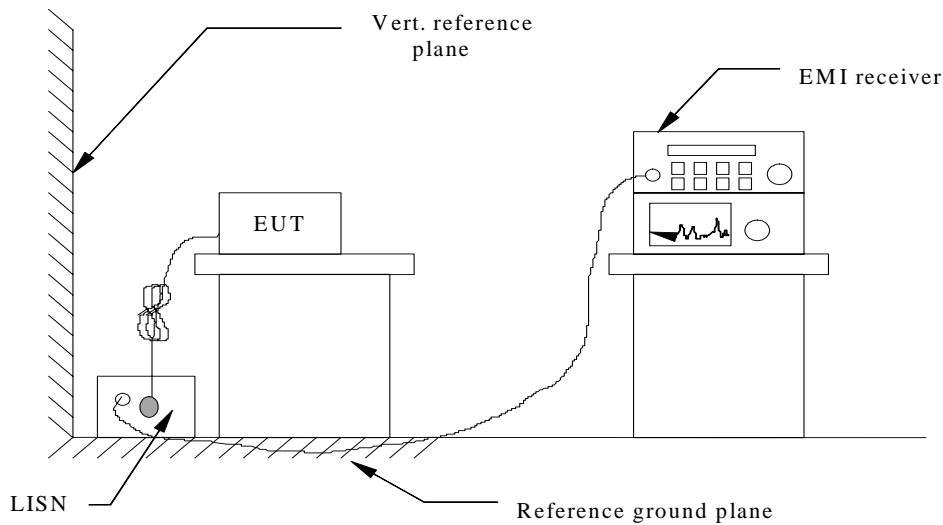

**TEST RESULTS**

No non-compliance noted

**Test Data**

**Model:** GE2

**Test Mode:** Mode1

**Temperature:** 25°C

**Humidity:** 62% RH

**Tested by:** meteor

**Test Results:** Pass

(The chart below shows the highest readings taken from the final data)

Freq. (MHz)	PEAK. Raw (dBuV)	Q.P. Raw (dBuV)	AVG Raw (dBuV)	Q.P. Limit (dBuV)	AVG Limit (dBuV)	Margin (dB)	Factor (dB)	Remark
0.215	46.65	40.11	40.22	64.14	54.14	-13.92	10.37	Line
0.280	37.12	19.24	19.75	62.29	52.29	-32.54	10.39	Line
0.360	34.98	29.28	29.90	60.00	50.00	-20.10	10.41	Line
0.565	37.98	19.43	19.67	56.00	46.00	-26.33	10.40	Line
0.645	36.62	33.92	33.88	56.00	46.00	-12.12	10.41	Line
18.210	36.87	14.58	15.67	60.00	50.00	-34.33	12.08	Line
0.215	51.77	37.53	37.47	64.14	54.14	-16.67	10.37	Neutral
0.280	46.13	25.04	26.57	62.29	52.29	-25.72	10.39	Neutral
0.350	39.27	16.64	17.28	60.29	50.29	-33.01	10.41	Neutral
0.430	35.29	22.33	22.16	58.00	48.00	-25.84	10.41	Neutral
0.560	38.02	20.44	20.48	56.00	46.00	-25.52	10.40	Neutral
0.645	37.76	30.70	30.98	60.00	50.00	-19.02	10.41	Neutral



Remark:

1. The measuring frequencies range between 0.15 MHz and 30 MHz.
2. The emissions measured in the frequency range between 0.15 MHz and 30MHz were made with an instrument using Quasi-peak detector and Average detector.
3. “---” denotes the emission level was or more than 2dB below the Average limit, and no re-check was made.
4. The IF bandwidth of SPA between 0.15MHz and 30MHz was 10KHz. The IF bandwidth of Test Receiver between 0.15MHz and 30MHz was 9kHz.

**Note:**

*Freq.* = Emission frequency in KHz

*Factor (dB)* = cable loss + Insertion loss of LISN+ Insertion loss of TRANSIENT LIMITER (The TRANSIENT LIMITER included 10 dB ATTENUATION)

*Amptd dBuV* = Uncorrected Analyzer/Receiver reading + cable loss + Insertion loss of LISN+ Insertion loss of TRANSIENT LIMITER, if it > 0.5 dB

*Limit dBuV* = Limit stated in standard


*Margin dB* = Reading in reference to limit

**Calculation Formula**

*Margin (dB)* = *Amptd (dBuV)* – *Limit (dBuV)*

### Test Plot

#### *Conducted emissions (Line 1)*

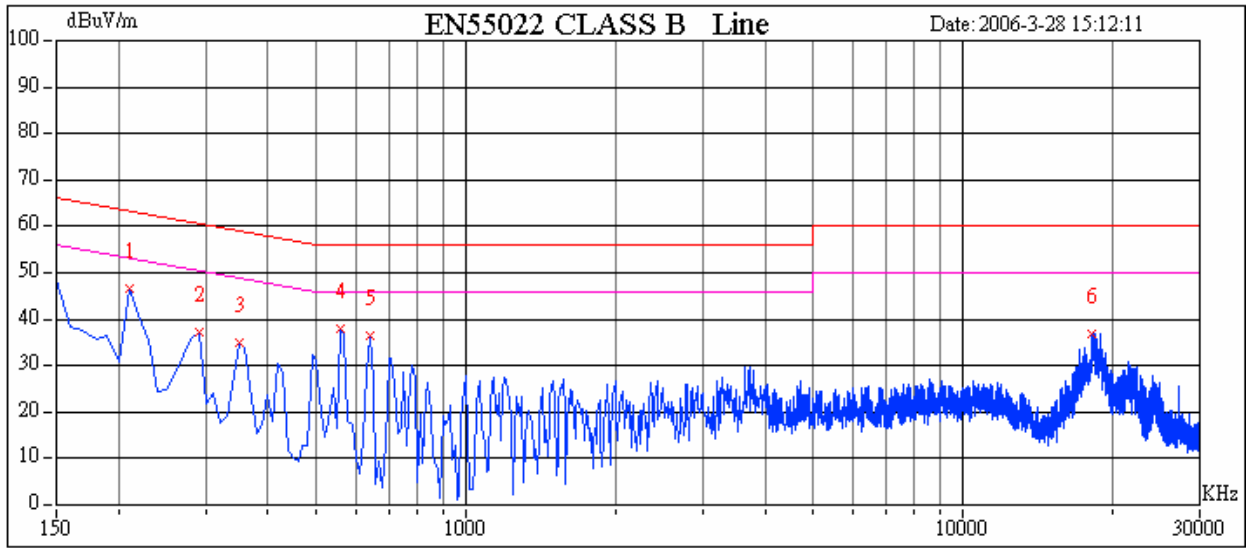

### Test Plot

#### *Conducted emissions (Line 2)*

