



**FCC CFR47 PART 15 SUBPART C
INDUSTRY CANADA RSS-210 ISSUE 8**

CERTIFICATION TEST REPORT

FOR

WIRELESS LAN Module

MODEL NUMBER: DWM-W082

FCC ID: EW4DWMW082

IC: 4250A-DWMW082

REPORT NUMBER: 32FE0108-HO-01-B-R1

ISSUE DATE: June 27, 2012

Prepared for

Mitsumi Electric Co., Ltd.

1601, Sakai, Atsugi-shi, Kanagawa-ken 243, Japan

Prepared by

UL Japan, Inc.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

TEL: +81 596 24 8116

FAX: +81 596 24 8124



NVLAP LAB CODE: 200572-0

This laboratory is accredited by the NVLAP LAB CODE 200572-0, U.S.A. The tests reported herein have been performed in accordance with its terms of accreditation.

*As for the range of Accreditation in NVLAP, you may refer to the WEB address,
[http://www.ul.com/japan/jpn/pages/services/emc/abot/mark1/index.jsp#nvlap](http://www.ul.com/japan/jpn/pages/services/emc/about/mark1/index.jsp#nvlap)

Revision History

Rev.	Issue Date	Revisions	Revised By
--	02/16/12	Initial Issue	M.Nishiyama
1	06/27/12	Addition of the test equipment (MHA-16) *This report is a revised version of 32FE0108-HO-01-B, which is replaced with this report.	M.Nishiyama

TABLE OF CONTENTS

1. ATTESTATION OF TEST RESULTS	5
2. TEST METHODOLOGY	6
3. FACILITIES AND ACCREDITATION	6
4. CALIBRATION AND UNCERTAINTY	6
4.1. MEASURING INSTRUMENT CALIBRATION	6
4.2. SAMPLE CALCULATION	6
4.3. MEASUREMENT UNCERTAINTY.....	7
5. EQUIPMENT UNDER TEST	8
5.1. DESCRIPTION OF EUT	8
5.2. MAXIMUM OUTPUT POWER	8
5.3. SOFTWARE AND FIRMWARE	8
5.4. WORST-CASE CONFIGURATIONS	9
5.5. DESCRIPTION OF TEST SETUP	10
6. ANTENNA PORT TEST RESULTS	14
6.1 802.11b MODE IN THE 2.4 GHz BAND	14
6.1.1 dB BANDWIDTH.....	14
6.1.2 99% BANDWIDTH.....	17
6.1.3 OUTPUT POWER	20
6.1.4 AVERAGE POWER.....	21
6.1.5 POWER SPECTRAL DENSITY	22
6.1.6 CONDUCTED SPURIOUS EMISSIONS.....	25
6.2 802.11g MODE IN THE 2.4 GHz BAND	29
6.2.1 6 dB BANDWIDTH.....	29
6.2.2 99% BANDWIDTH.....	32
6.2.3 OUTPUT POWER	35
6.2.4 AVERAGE POWER.....	36
6.2.5 POWER SPECTRAL DENSITY	37
6.2.6 CONDUCTED SPURIOUS EMISSIONS.....	40
7. RADIATED TEST RESULTS.....	44
7.1 LIMITS AND PROCEDURE.....	44
7.2 TRANSMITTER ABOVE 1 GHz.....	45
7.2.1 TX ABOVE 1 GHz FOR 802.11b MODE IN THE 2.4 GHz BAND.....	45
7.2.2 TX ABOVE 1 GHz FOR 802.11g MODE IN THE 2.4 GHz BAND.....	51
7.3 RECEIVER ABOVE 1 GHz.....	56
7.3.1 RX ABOVE 1 GHz FOR 20 MHz BANDWIDTH IN THE 2.4 GHz BAND	56
7.4 WORST-CASE RADIATED EMISSIONS BELOW 1 GHz.....	57
8 AC POWER LINE CONDUCTED EMISSIONS.....	62

9	MAXIMUM PERMISSIBLE EXPOSURE.....	65
10	SETUP PHOTOS.....	69

1. ATTESTATION OF TEST RESULTS

COMPANY NAME: Mitsumi Electric Co., Ltd.
1601, Sakai, Atsugi-shi, Kanagawa-ken 243, Japan

EUT DESCRIPTION: WIRELESS LAN Module

MODEL: DWM-W082

SERIAL NUMBER: No. RJN10000231 7 (Radiated and Conducted tests),
No. RJN10000242 3 (Antenna Terminal Conducted test)

DATE TESTED: January 31 to February 5, 2012


APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
CFR 47 Part 15 Subpart C	Pass
INDUSTRY CANADA RSS-210 Issue 8 Annex 8	Pass
INDUSTRY CANADA RSS-GEN Issue 3	Pass

UL Japan, Inc. tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by UL Japan, Inc based on interpretations and/or observations of test results. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Note: The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by UL Japan, Inc. and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL Japan, Inc. will constitute fraud and shall nullify the document. No part of this report may be used to claim product certification, approval, or endorsement by any government agency.

Approved & Released For UL Japan, Inc. By:

Tested By:

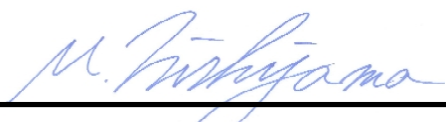

Masanori Nishiyama
Leader of WiSE Japan
UL Verification Services
UL Japan, Inc.



Satofumi Matsuyama
Engineer of WiSE Japan
UL Verification Services
UL Japan, Inc.

2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with ANSI C63.10-2009, FCC CFR 47 Part 2, FCC CFR 47 Part 15, RSS-GEN Issue 3, and RSS-210 Issue 8.

3. FACILITIES AND ACCREDITATION

The test sites and measurement facilities used to collect data are located at 4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN.

UL Japan, Inc. is accredited by NVLAP, Laboratory Code 200572-0
The full scope of accreditation can be viewed at
<http://www.ul.com/japan/jpn/pages/services/emc/about/mark1/index.jsp#nvlap>

4. CALIBRATION AND UNCERTAINTY

4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognized national standards.

4.2. SAMPLE CALCULATION

Where relevant, the following sample calculation is provided:

$$\begin{aligned} \text{Field Strength (dBuV/m)} &= \text{Measured Voltage (dBuV)} + \text{Antenna Factor (dB/m)} + \\ &\text{Cable Loss (dB)} - \text{Preamp Gain (dB)} \\ 36.5 \text{ dBuV} + 18.7 \text{ dB/m} + 0.6 \text{ dB} - 26.9 \text{ dB} &= 28.9 \text{ dBuV/m} \end{aligned}$$

4.3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

EMI

The following uncertainties have been calculated to provide a confidence level of 95% using a coverage factor k=2.

Test room (semi-anechoic chamber)	Conducted emission (±dB)
	150kHz-30MHz
No.1	3.1dB
No.2	3.3dB
No.3	3.7dB
No.4	3.2dB

Test room (semi-anechoic chamber)	Radiated emission						
	(3m*)(±dB)				(1m*)(±dB)		(0.5m*)(±dB)
	9kHz -30MHz	30MHz -300MHz	300MHz -1GHz	1GHz -10GHz	10GHz -18GHz	18GHz -26.5GHz	26.5GHz -40GHz
No.1	4.2dB	5.0dB	5.1dB	4.7dB	5.7dB	4.4dB	4.3dB
No.2	4.1dB	5.2dB	5.1dB	4.8dB	5.6dB	4.3dB	4.2dB
No.3	4.5dB	5.0dB	5.2dB	4.8dB	5.6dB	4.5dB	4.2dB
No.4	4.7dB	5.2dB	5.2dB	4.8dB	5.6dB	5.1dB	4.2dB

*3m/1m/0.5m = Measurement distance

Power meter (±dB)	
Below 1GHz	Above 1GHz
1.0dB	1.0dB

Antenna terminal conducted emission and Power density (±dB)			Antenna terminal conducted emission (±dB)		Channel power (±dB)
Below 1GHz	1GHz-3GHz	3GHz-18GHz	18GHz-26.5GHz	26.5GHz-40GHz	
1.0dB	1.1dB	2.7dB	3.2dB	3.3dB	1.5dB

5. EQUIPMENT UNDER TEST

5.1. DESCRIPTION OF EUT

The EUT is a Mitsumi Wireless LAN module (802.11b/g).

5.2. MAXIMUM OUTPUT POWER

The transmitter has a maximum peak conducted output power as follows:

Frequency Range (MHz)	Mode	Output Power (dBm)	Output Power (mW)
2412-2472	802.11b	7.95	6.24
2412-2462	802.11g	14.08	25.59

Model No/: 071-0001-1725, Dipole $\lambda/2$ built-in antenna, -1.5 dBi.

5.3 SOFTWARE AND FIRMWARE

Host of EUT Hardware version is 1.0.

Test Utility for RF:
HOSTIO-ART ver. 1.8

5.4 WORST-CASE CONFIGURATIONS

The worst-case data rate for each mode is determined to be as follows, based on preliminary tests of the chipset utilized in this radio.

All final tests in the 802.11b mode were made at 11 Mb/s.
All final tests in the 802.11g mode were made at 24 Mb/s.

For radiated emissions below 1 GHz the worst-case configuration is determined to be the mode and channel with the highest output power.

The EUT was investigated in three orthogonal orientations X,Y, and Z. Orientation Z was found to be worst-case orientation.

.

5.5 DESCRIPTION OF TEST SETUP

SUPPORT EQUIPMENT

PERIPHERAL SUPPORT EQUIPMENT LIST				
Description	Manufacturer	Model	Serial Number	FCC ID
Laptop PC	Lenovo	1952E69	L3KY127	DoC
AC Adapter	Lenovo	92P1156	1129P1156Z1ZDXN0991HM	N/A
UIC-MIDI Intercade	Kyoto Microcomputer Co.	Partner CTR	I0200185-UBA	N/A
EUT AC Adapter	Mitsumi	WAP-002 (USA)	-	N/A
EUT AC Adapter	Tabuchi	WAP-002 (USA)	C3ET101	N/A
Headset	-	-	-	N/A

I/O CABLES (ANTENNA PORT TEST CONFIGURATION)

I/O CABLE LIST						
Cable No.	Port	# of Identical Ports	Connector Type	Cable Type	Cable Length	Remarks
1	AC	1	AC	Unshielded	0.9m	
2	DC	1	DC	Unshielded	1.7m	
3	USB	1	USB	Shielded	1.5m	
4	DC	1	DC	Unshielded	1.9m	


I/O CABLES (RADIATED AND LINE CONDUCTED TEST CONFIGURATION)

I/O CABLE LIST						
Cable No.	Port	# of Identical Ports	Connector Type	Cable Type	Cable Length	Remarks
1	DC	1	DC	Unshielded	1.9m	
2	Headset	1	AUDIO	Unshielded	0.9m	


TEST SETUP

The EUT is connected to a Jig card and host laptop computer via a USB cable during the tests. Test software exercised the radio card. The Jig card is removed after the setup.

SETUP DIAGRAM FOR ANTENNA PORT TESTS

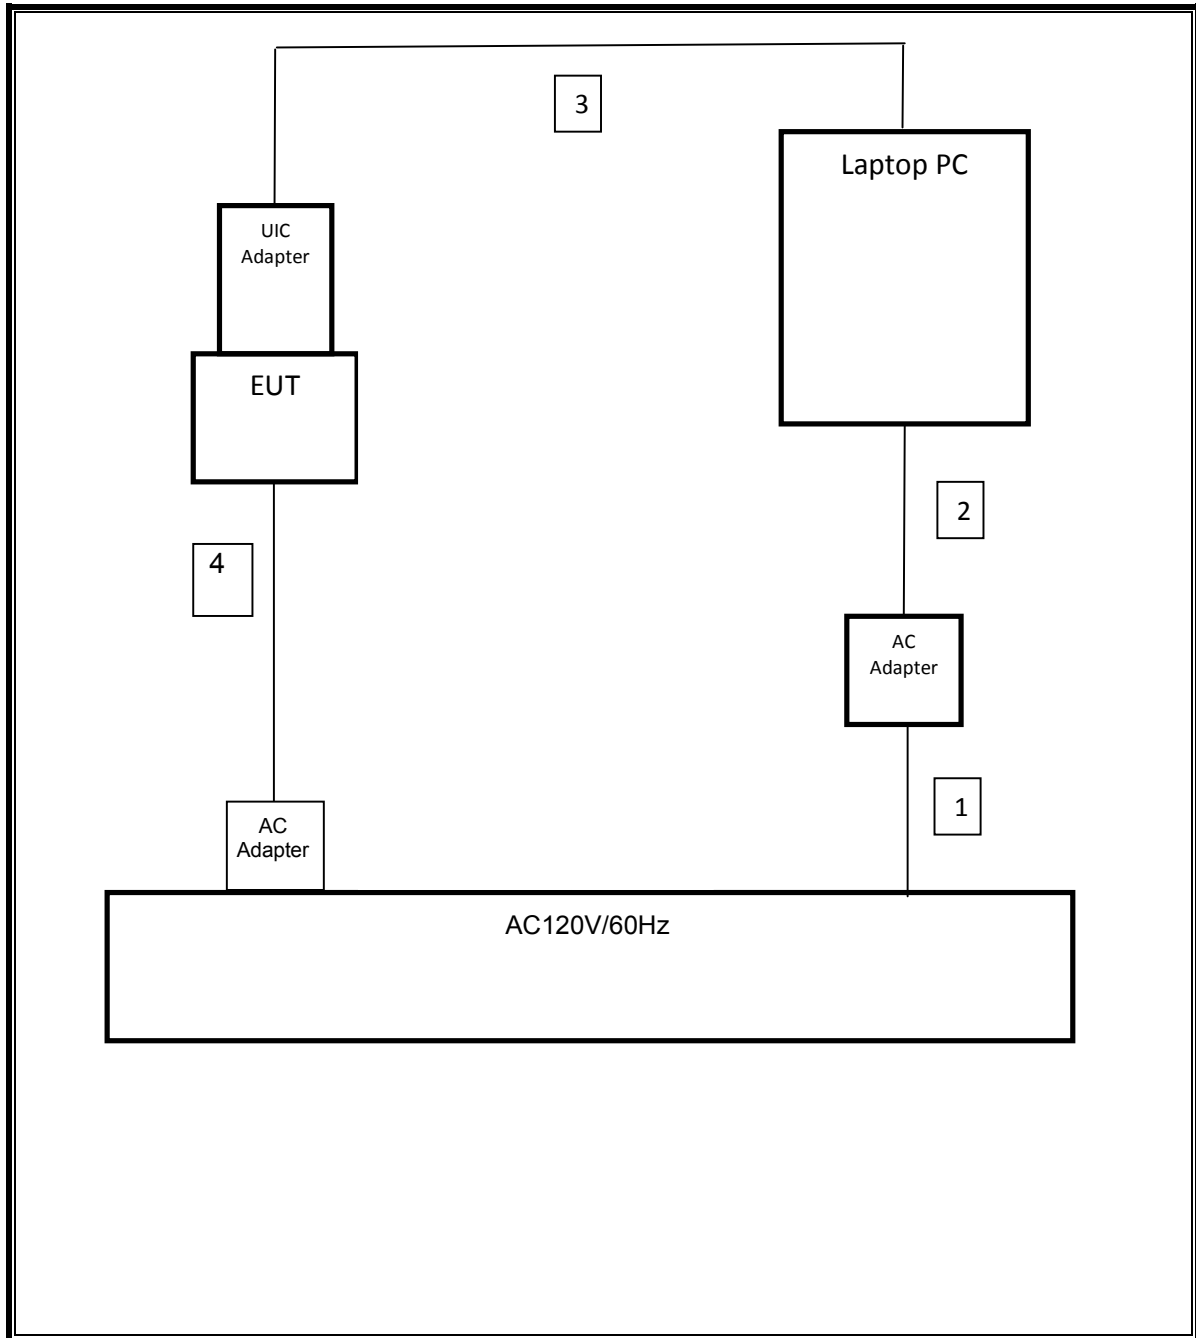

SETUP DIAGRAM FOR RADIATED EMISSIONS TESTS

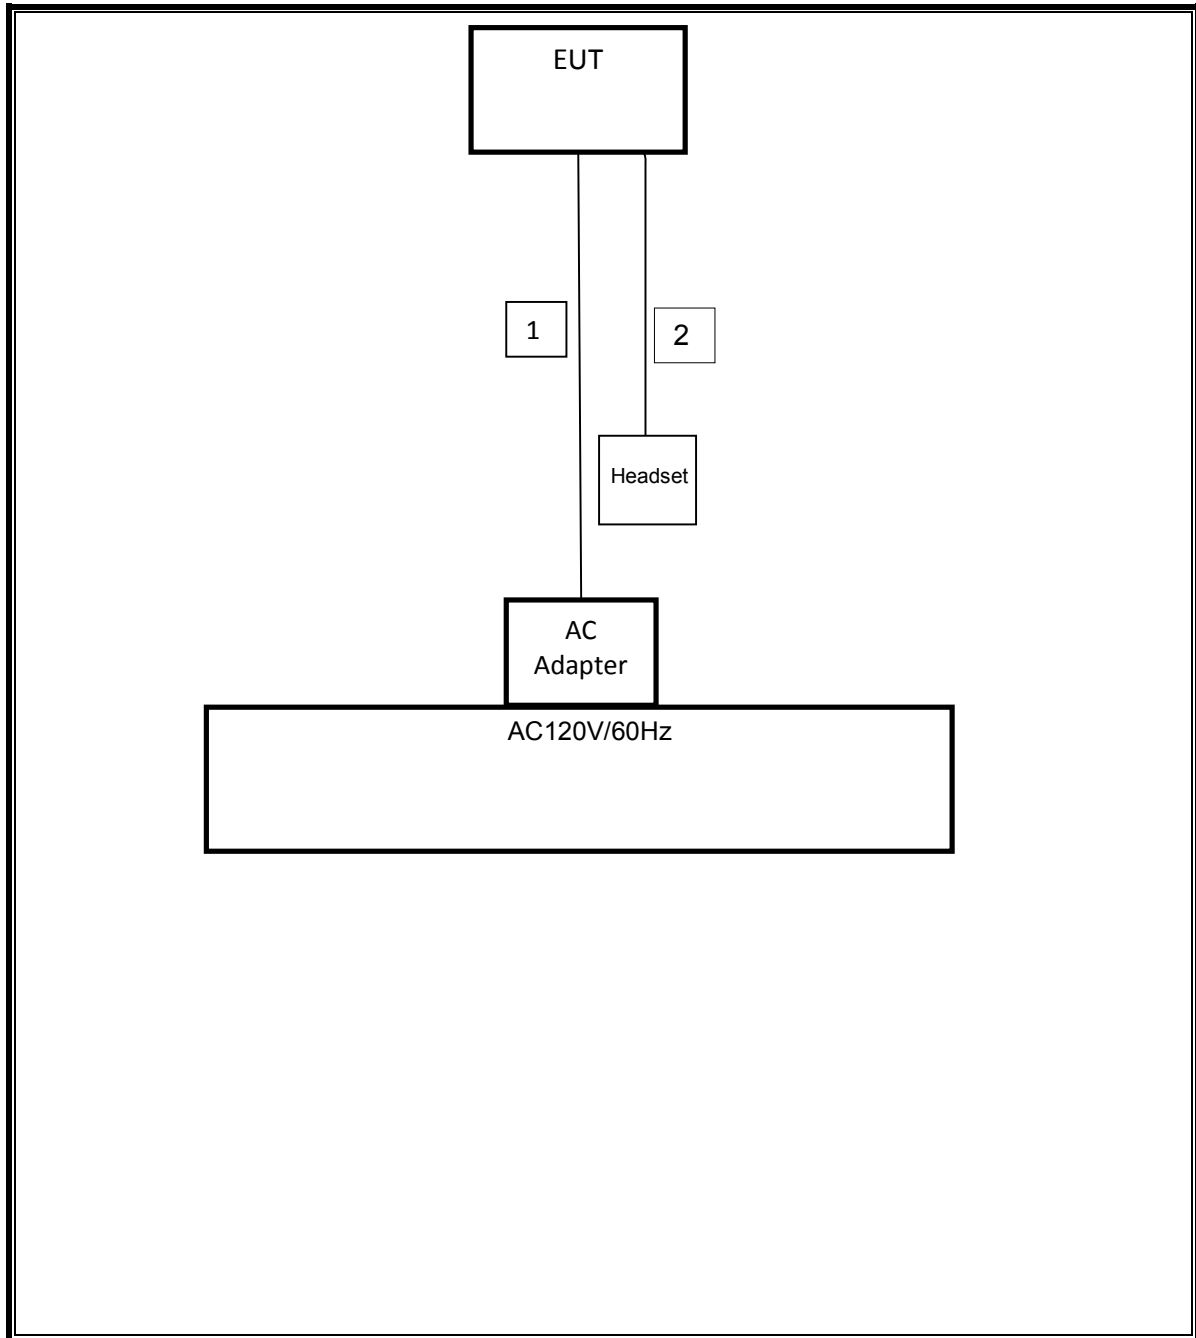

TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

Control No.	Instrument	Manufacturer	Model No	Serial No	Test Item	Calibration Date * Interval(month)
MSA-10	Spectrum Analyzer	Agilent	E4448A	MY46180655	AT	2011/02/15 * 12
MPM-08	Power Meter	Anritsu	ML2495A	6K00003338	AT	2011/09/13 * 12
MPSE-11	Power sensor	Anritsu	MA2411B	011737	AT	2011/09/13 * 12
MAT-23	Attenuator(10dB) 1-18GHz	Orient Microwave	BX10-0476-00	-	AT	2011/03/14 * 12
MCC-115	Microwave Cable 1G-26.5GHz	Suhner	SUCOFLEX104	290211/4	AT	2011/08/24 * 12
MCC-105	Microwave Cable	Hirose Electric	U.FL-2LP-066J1-A(200)	-	AT	2011/06/24 * 12
MOS-12	Thermo-Hygrometer	Custom	CTH-180	-	AT	2012/01/06 * 12
MAEC-03	Semi Anechoic Chamber(NSA)	TDK	Semi Anechoic Chamber 3m	DA-10005	RE	2011/02/22 * 12
MOS-13	Thermo-Hygrometer	Custom	CTH-180	-	RE	2011/02/23 * 12
MJM-06	Measure	PROMART	SEN1955	-	RE	
COTS-MEMI	EMI measurement program	TSJ	TEPTO-DV	-	RE/CE	-
MRENT-95	Spectrum Analyzer	Agilent	E4440A	MY46185823	RE	2011/06/30 * 12
MHA-20	Horn Antenna 1-18GHz	Schwarzbeck	BBHA9120D	258	RE	2011/05/23 * 12
MCC-133	Microwave Cable	HUBER+SUHNER	SUCOFLEX104	336164/4(1m) / 340640(5m)	RE	2011/09/07 * 12
MPA-11	MicroWave System Amplifier	Agilent	83017A	MY39500779	RE	2011/03/10 * 12
MHF-06	High Pass Filter 3.5-24GHz	TOKIMEC	TF323DCA	601	RE	2011/05/16 * 12
MSA-03	Spectrum Analyzer	Agilent	E4448A	MY44020357	RE	2011/11/23 * 12
MTR-08	Test Receiver	Rohde & Schwarz	ESCI	100767	RE	2011/08/11 * 12
MBA-03	Biconical Antenna	Schwarzbeck	BBA9106	1915	RE	2011/10/15 * 12
MLA-03	Logperiodic Antenna	Schwarzbeck	USLP9143	174	RE	2011/10/15 * 12
MCC-51	Coaxial cable	UL Japan	-	-	RE	2011/07/15 * 12
MAT-09	Attenuator(6dB)	Weinschel Corp	2	BK7973	RE	2011/11/02 * 12
MPA-13	Pre Amplifier	SONOMA INSTRUMENT	310	260834	RE	2011/03/04 * 12
MAEC-04	Semi Anechoic Chamber(NSA)	TDK	Semi Anechoic Chamber 3m	DA-10005	CE	2011/03/01 * 12
MOS-15	Thermo-Hygrometer	Custom	CTH-180	-	CE	2011/02/23 * 12
MJM-07	Measure	PROMART	SEN1955	-	CE	-
MTR-07	Test Receiver	Rohde & Schwarz	ESCI	100635	CE	2011/10/19 * 12
MLS-07	LISN(AMN)	Schwarzbeck	NSLK8127	8127364	CE	2011/02/22 * 12
MTA-31	Terminator	TME	CT-01	-	CE	2012/01/11 * 12
MAT-67	Attenuator(13dB)	JFW Industries, Inc.	50FP-013H2 N	-	CE	2012/01/28 * 12
MCC-113	Coaxial cable	Fujikura/Suhner/TSJ	5D-2W(10m)/SFM141(5m)/421-010(1m)/sucoform141-PE(1m)/RFM-E121(Switcher)	-/04178	CE	2011/07/04 * 12
MHA-16	Horn Antenna 15-40GHz	Schwarzbeck	BBHA9170	BBHA9170306	RE	2011/05/23 * 12

The expiration date of the calibration is the end of the expired month.

As for some calibrations performed after the tested dates, those test equipment have been controlled by means of an unbroken chains of calibrations.

All equipment is calibrated with valid calibrations. Each measurement data is traceable to the national or international standards.

Test Item:

RE: Radiated emission, CE: Conducted emission, AT: Antenna Terminal Conducted test

6. ANTENNA PORT TEST RESULTS

6.1 802.11b MODE IN THE 2.4 GHz BAND

6.1.1 dB BANDWIDTH

LIMITS

FCC §15.247 (a) (2)

IC RSS-210 A8.2 (a)

The minimum 6 dB bandwidth shall be at least 500 kHz.



TEST PROCEDURE


The transmitter output is connected to a spectrum analyzer. The RBW is set to 100 kHz and the VBW is set to 300 kHz. The sweep time is coupled.

RESULTS

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Minimum Limit (MHz)
Low	2412	11.577	0.5
Middle	2442	11.547	0.5
High	2472	11.754	0.5

6 dB BANDWIDTH

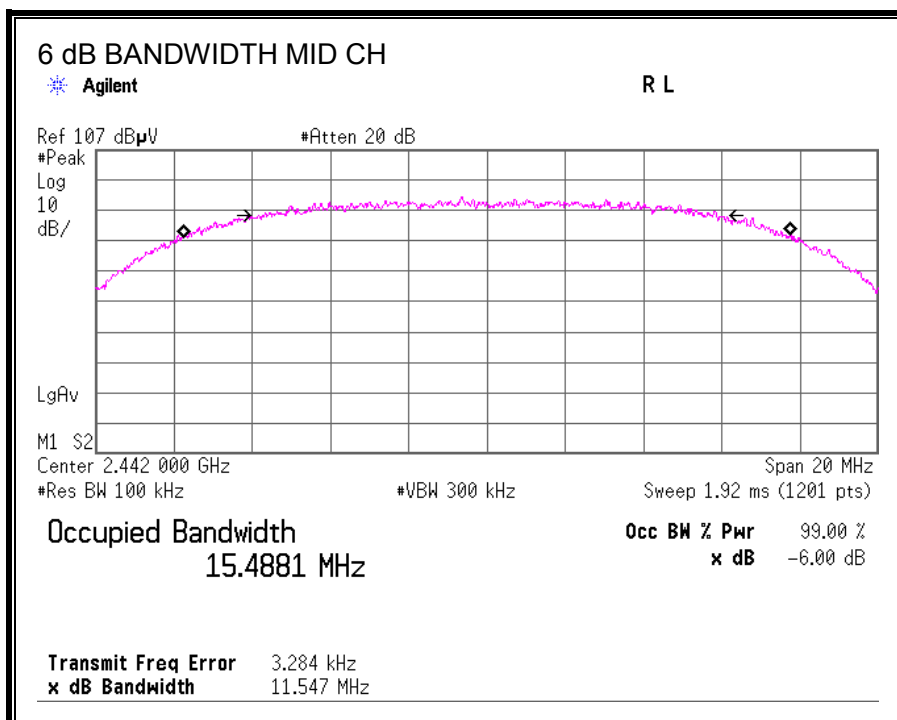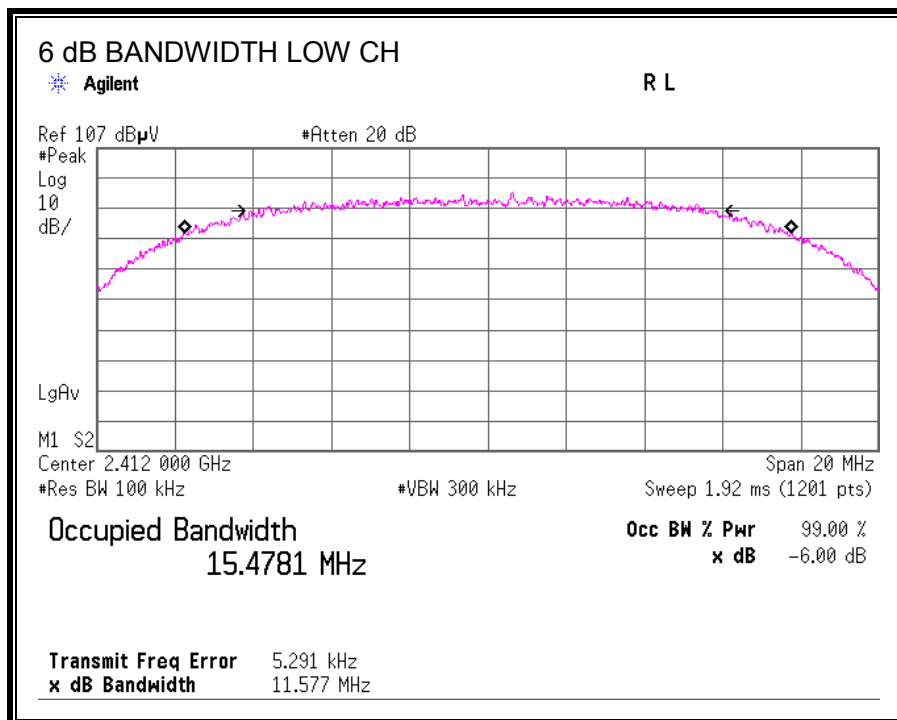

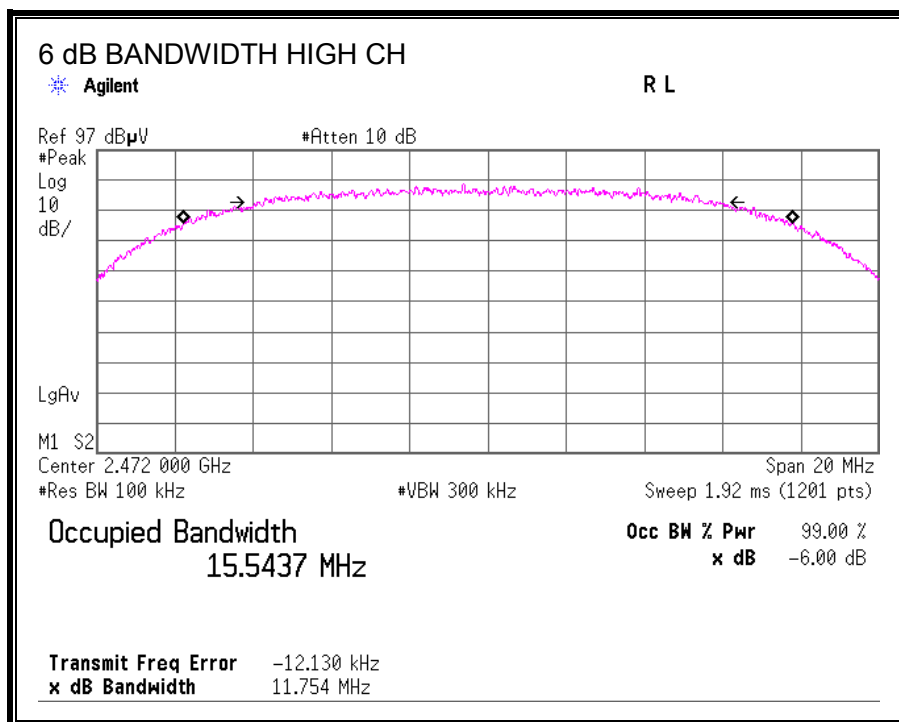

6.1.2 99% BANDWIDTH

LIMITS

None; for reporting purposes only.



TEST PROCEDURE


The transmitter output is connected to the spectrum analyzer. The RBW is set to 1% to 3% of the 99 % bandwidth. The VBW is set to 3 times the RBW. The sweep time is coupled. The spectrum analyzer internal 99% bandwidth function is utilized.

RESULTS

Channel	Frequency (MHz)	99% Bandwidth (MHz)
Low	2412	15.5550
Middle	2442	15.6216
High	2472	15.6672

99% BANDWIDTH

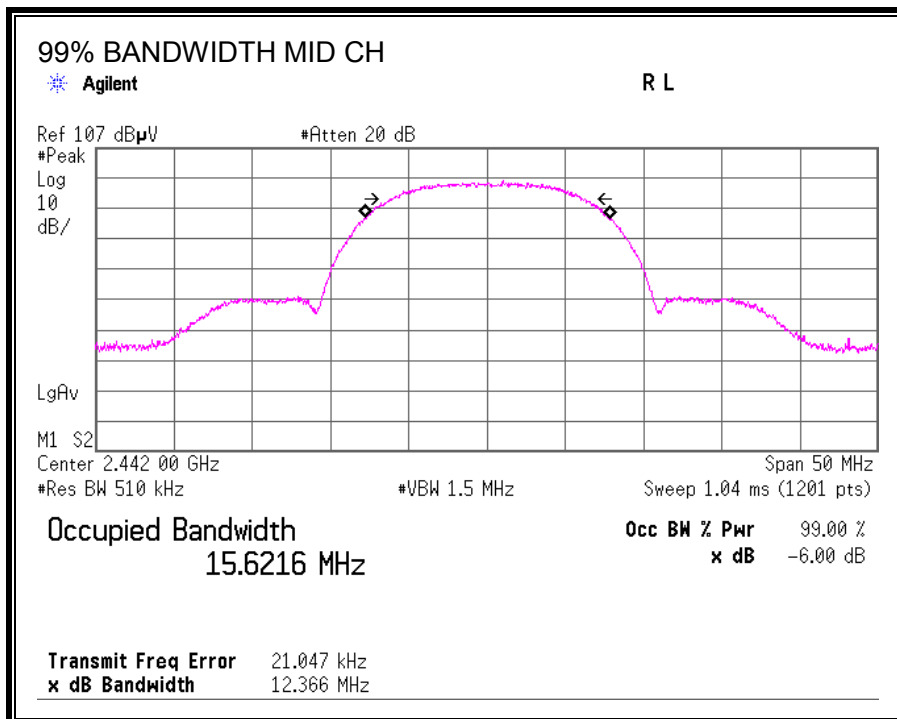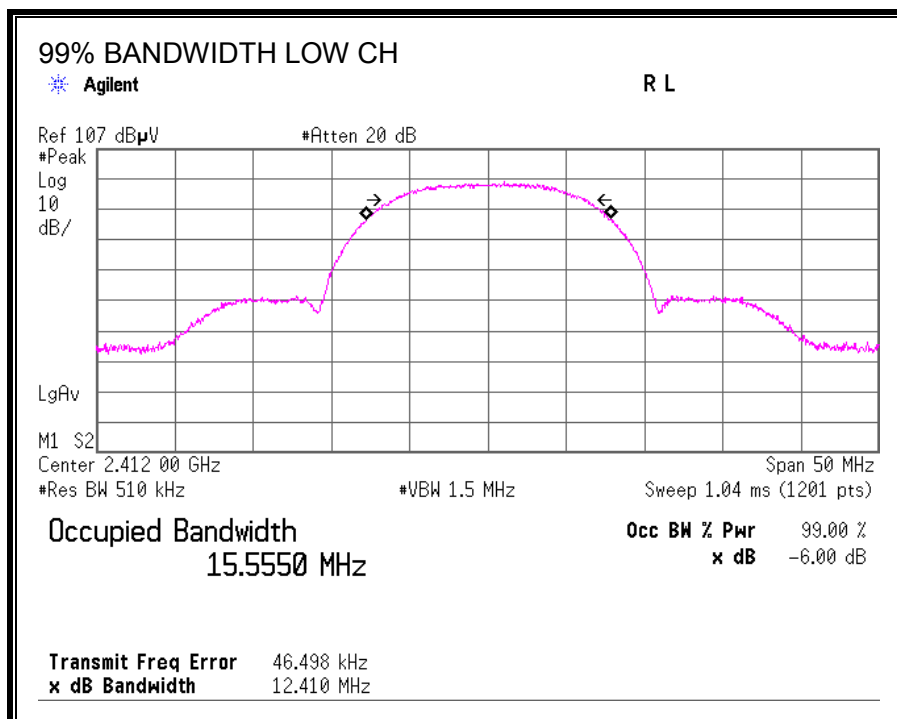

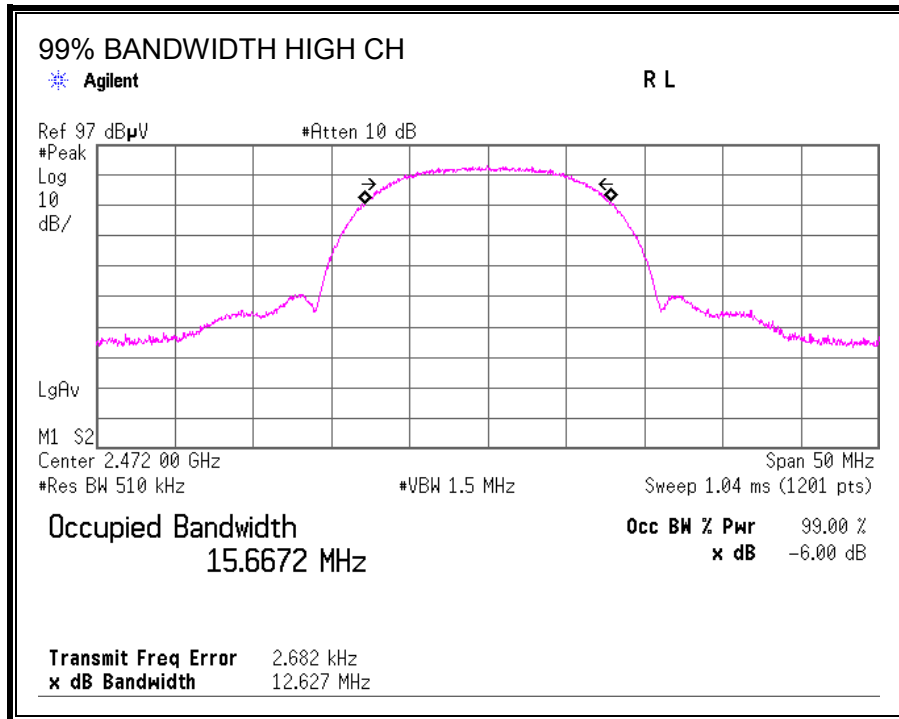

6.1.3 OUTPUT POWER

LIMITS

FCC §15.247 (b)

IC RSS-210 A8.4

The maximum antenna gain is less than or equal to 6 dBi, therefore the limit is 30 dBm.

TEST PROCEDURE

Peak power is measured using a wide bandwidth Peak Power Meter.

The cable assembly insertion loss of 11.68 dB (including 10.07 dB pad and 1.61 dB cable for 2412MHz/2442MHz) or 11.7 dB (including 10.07 dB pad and 1.63 dB cable for 2472MHz) was entered as an offset in the power meter to allow for direct reading of power.

RESULTS

Channel	Frequency (MHz)	Power Meter Reading (dBm)	Limit (dBm)	Margin (dB)
Low	2412	7.95	30	-22.05
Middle	2442	7.72	30	-22.28
High	2472	1.83	30	-28.17

6.1.4 AVERAGE POWER

LIMITS

None; for reporting purposes only.

TEST PROCEDURE

The transmitter output is connected to a Power meter.

RESULTS

The cable assembly insertion loss of 11.68 dB (including 10.07 dB pad and 1.61 dB cable for 2412MHz/2442MHz) or 11.7 dB (including 10.07 dB pad and 1.63 dB cable for 2472MHz) was entered as an offset in the power meter to allow for direct reading of power.

Channel	Frequency (MHz)	Power (dBm)
Low	2412	5.50
Middle	2442	5.24
High	2472	-0.64

6.1.5 POWER SPECTRAL DENSITY

LIMITS

FCC §15.247 (e)

IC RSS-210 A8.2 (b)

The power spectral density conducted from the transmitter to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.



TEST PROCEDURE


Output power was measured based on the use of a peak measurement, therefore the power spectral density was measured using PSD Option 1 in accordance with FCC document "Measurement of Digital Transmission Systems Operating under Section 15.247", March 23, 2005.

RESULTS

Channel	Frequency (MHz)	PPSD (dBm)	Limit (dBm)	Margin (dB)
Low	2412	-16.18	8	-24.18
Middle	2442	-15.54	8	-23.54
High	2472	-23.60	8	-31.60

POWER SPECTRAL DENSITY

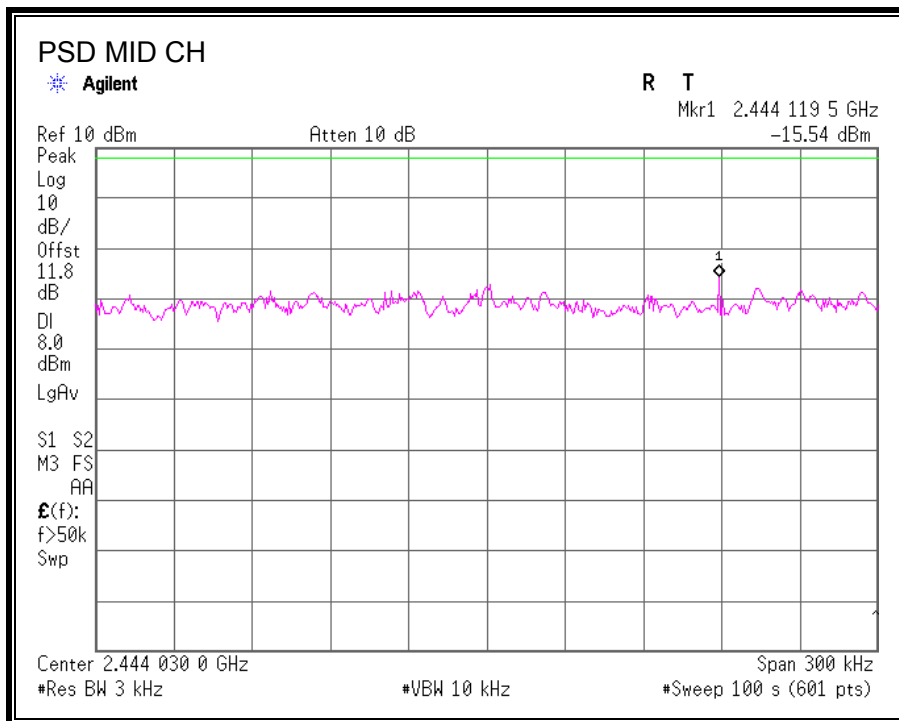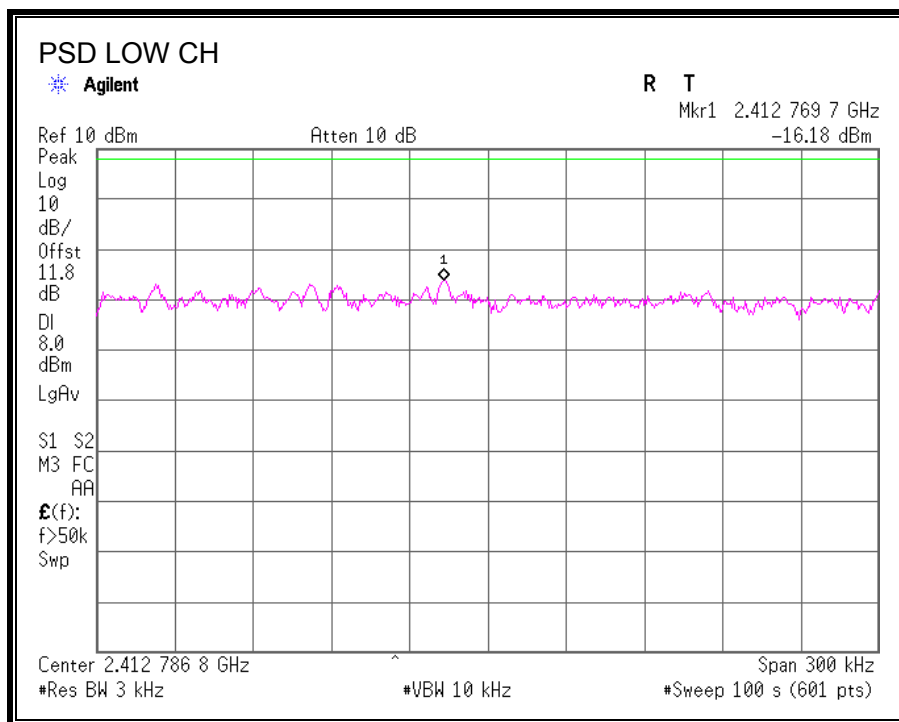

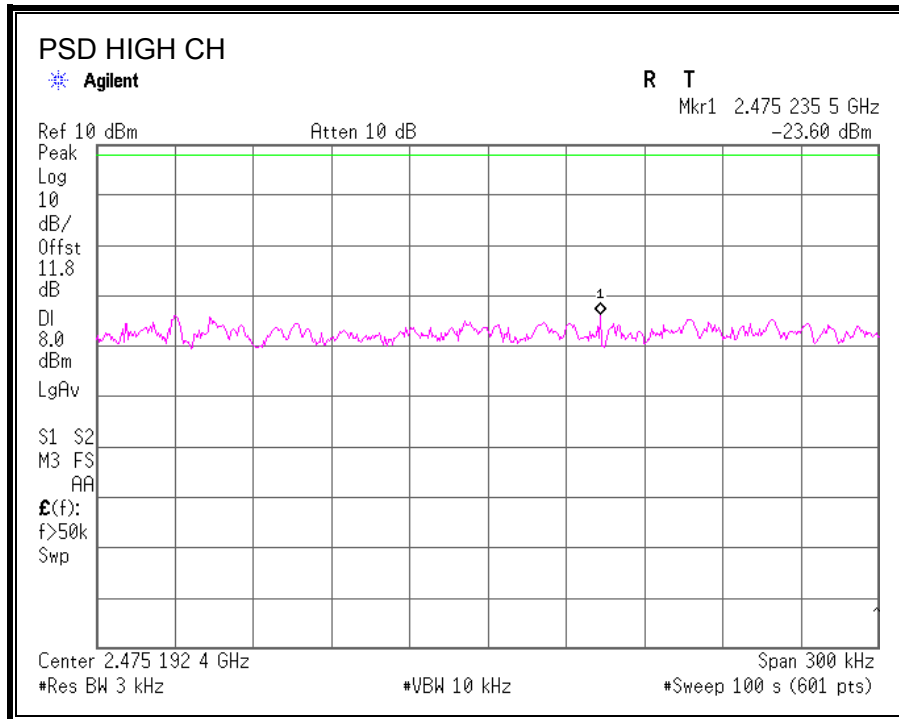

6.1.6 CONDUCTED SPURIOUS EMISSIONS

LIMITS

FCC §15.247 (d)

IC RSS-210 A8.5

Output power was measured based on the use of a peak measurement, therefore the required attenuation is 20 dB.



TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer. The resolution bandwidth is set to 100 kHz. The video bandwidth is set to 300 kHz.



The spectrum from 30 MHz to 26 GHz is investigated with the transmitter set to the lowest, middle, and highest channels.

RESULTS



SPURIOUS EMISSIONS, LOW CHANNEL

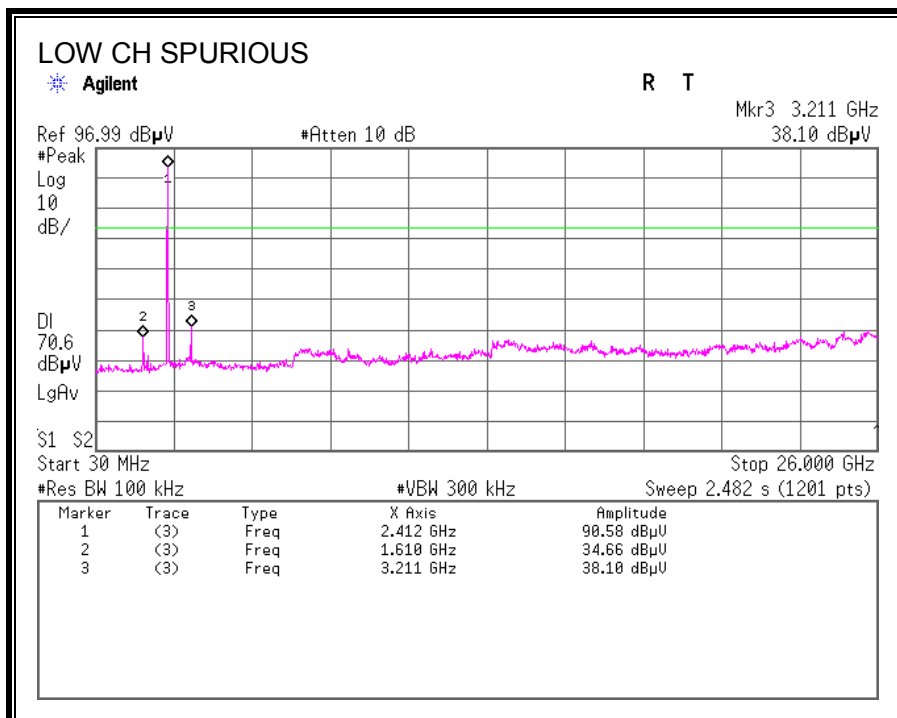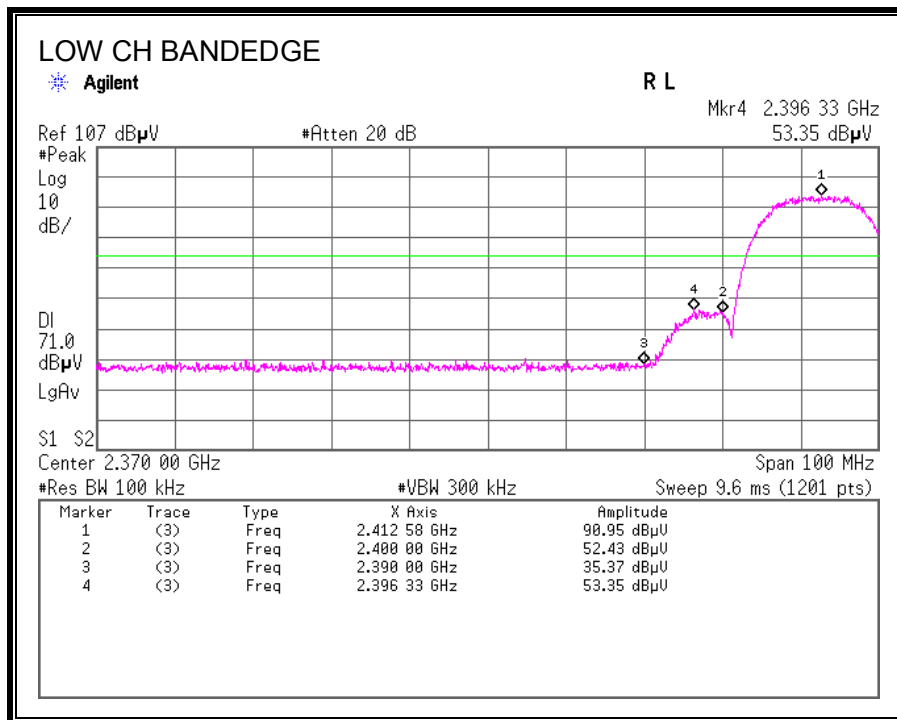

SPURIOUS EMISSIONS, MID CHANNEL

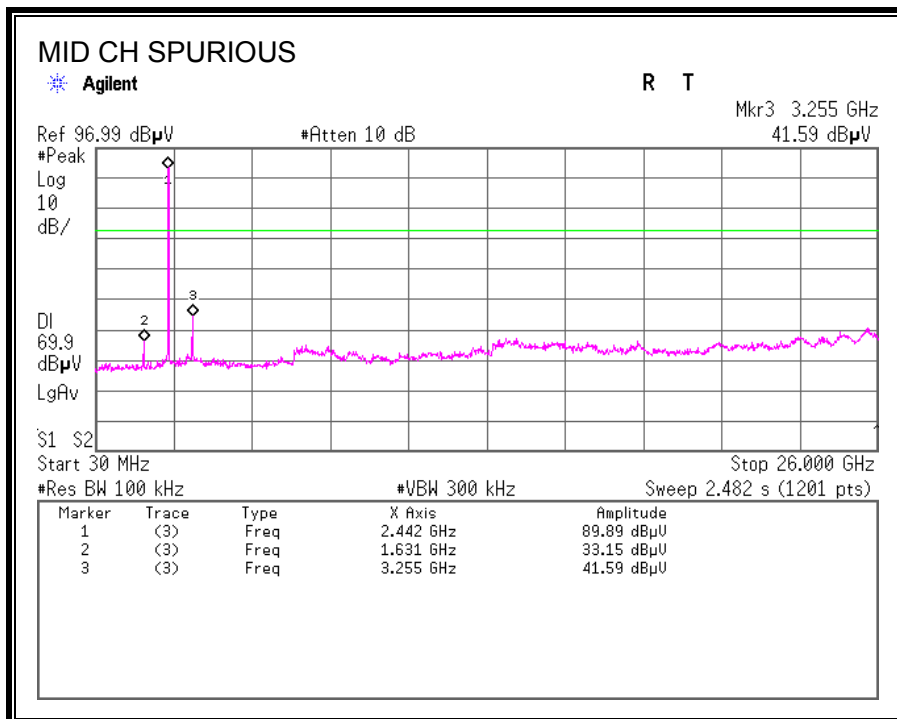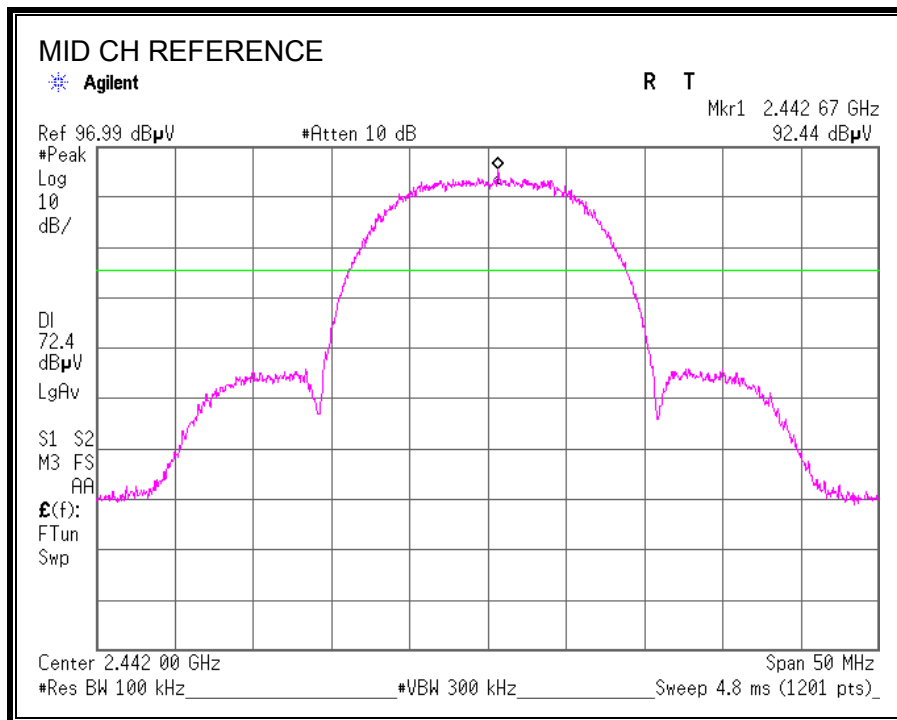

SPURIOUS EMISSIONS, HIGH CHANNEL

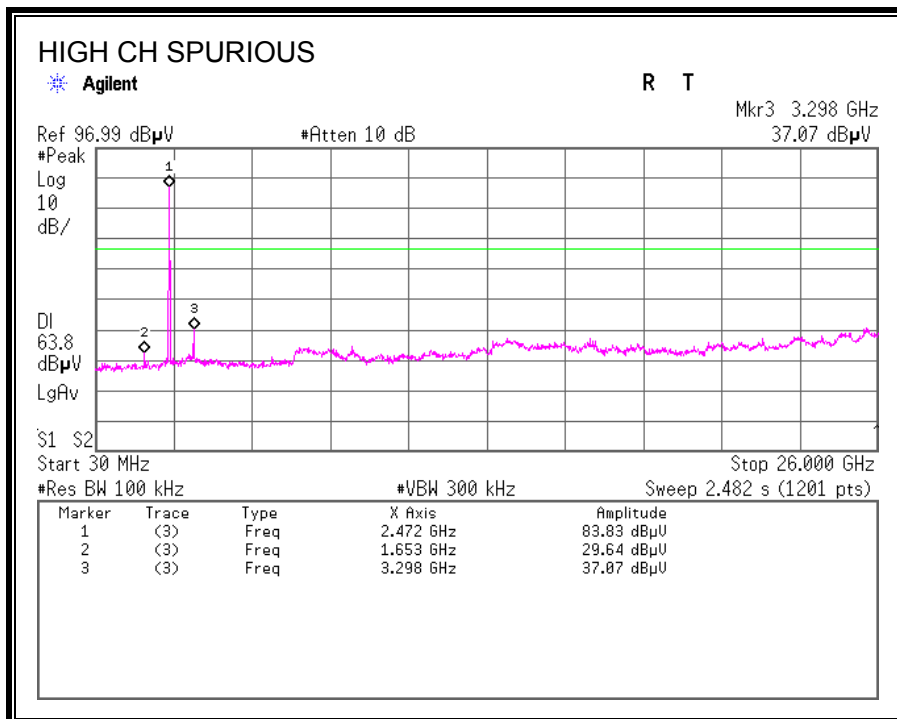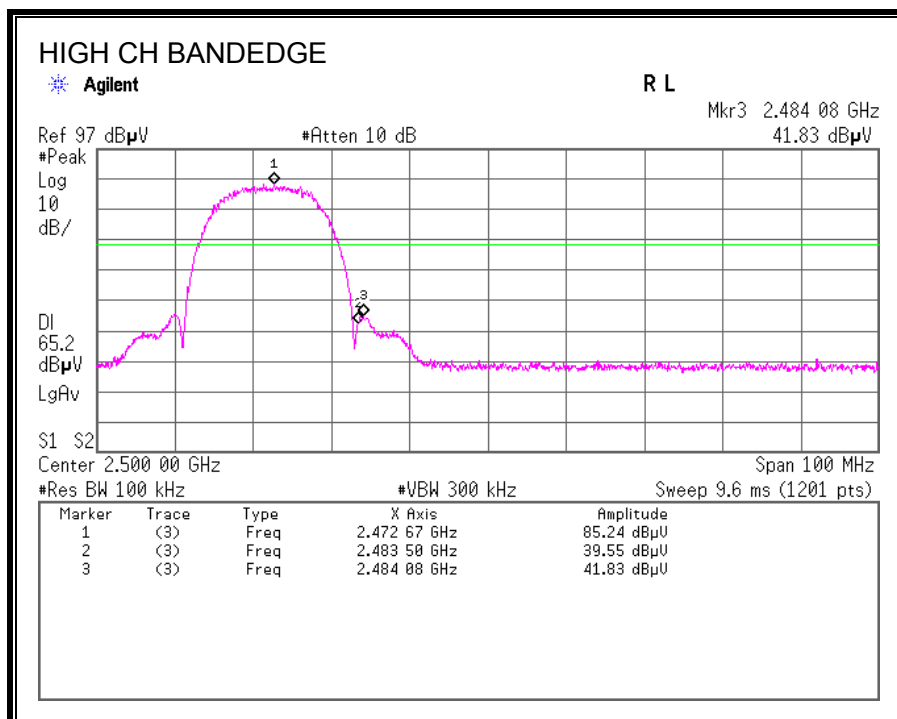

6.2 802.11g MODE IN THE 2.4 GHz BAND

6.2.1 6 dB BANDWIDTH

LIMITS

FCC §15.247 (a) (2)

IC RSS-210 A8.2 (a)

The minimum 6 dB bandwidth shall be at least 500 kHz.



TEST PROCEDURE


The transmitter output is connected to a spectrum analyzer. The RBW is set to 100 kHz and the VBW is set to 300 kHz. The sweep time is coupled.

RESULTS

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Minimum Limit (MHz)
Low	2412	16.471	0.5
Middle	2437	16.483	0.5
High	2462	16.517	0.5

6 dB BANDWIDTH

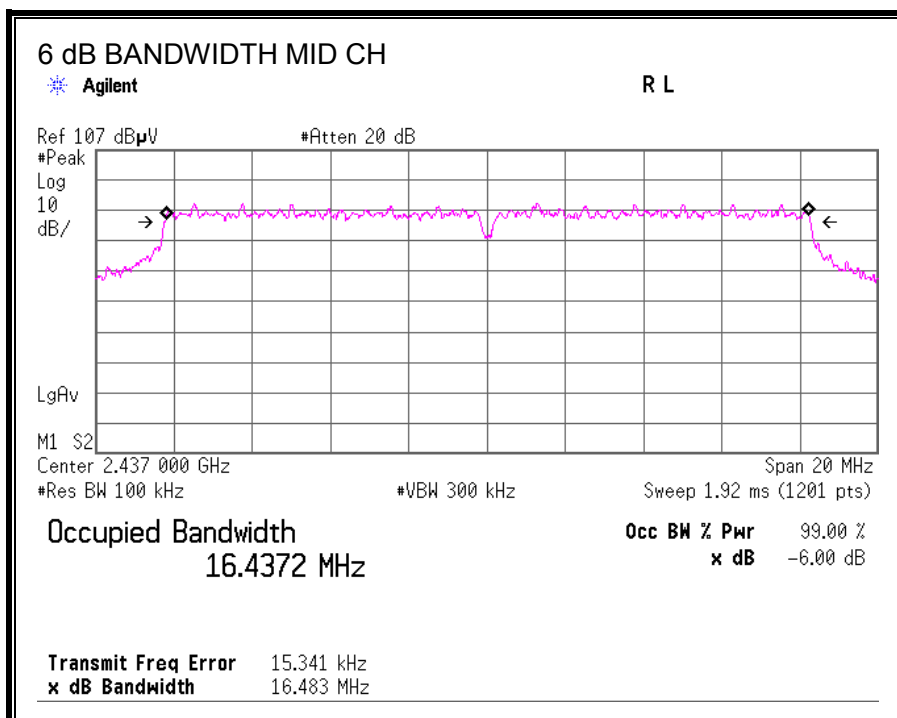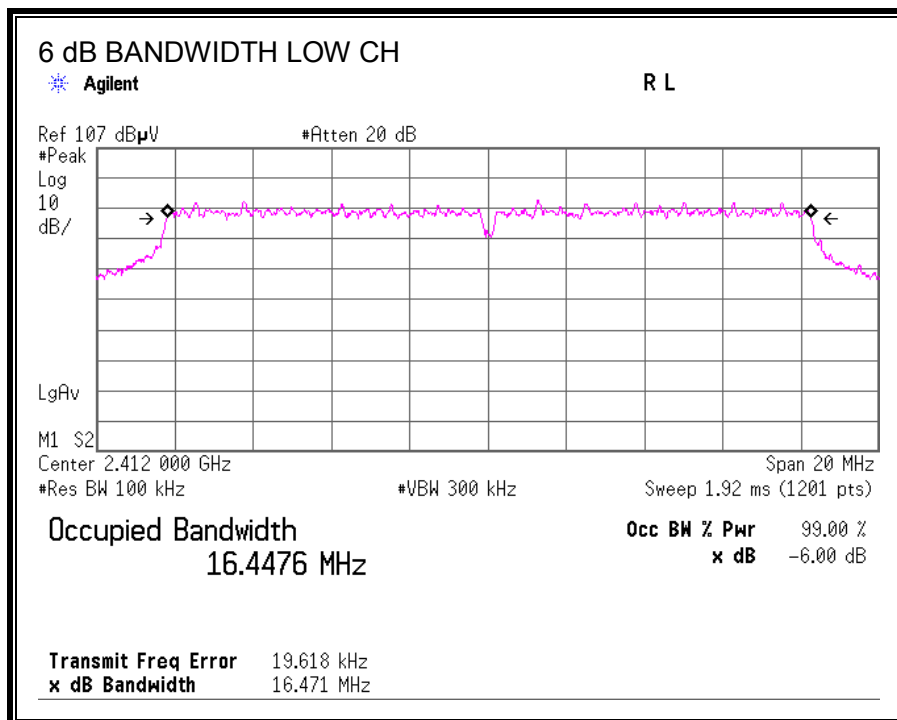

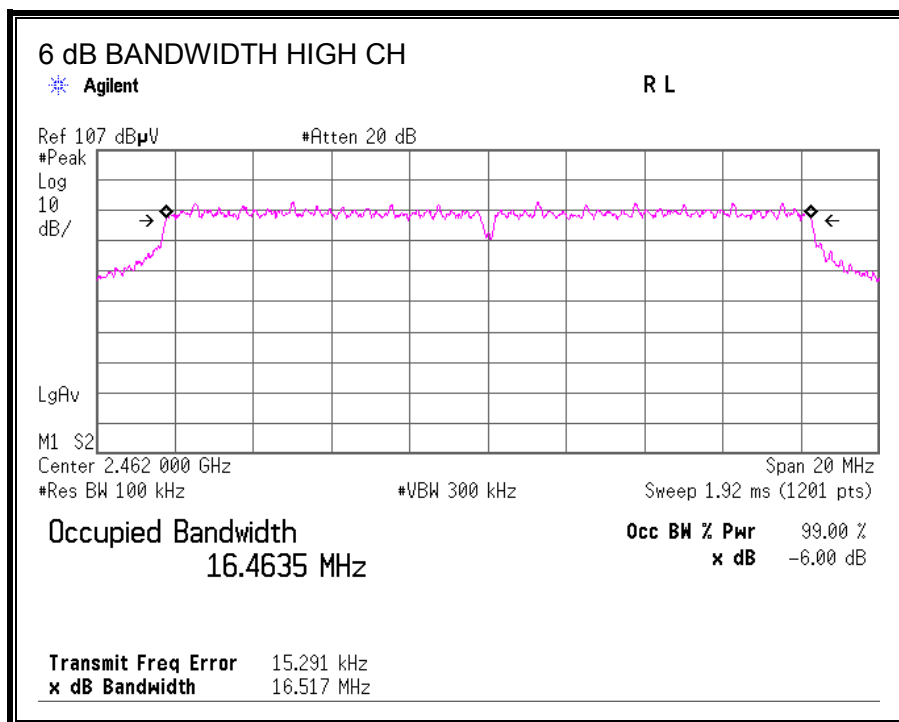

6.2.2 99% BANDWIDTH

LIMITS

None; for reporting purposes only.



TEST PROCEDURE


The transmitter output is connected to the spectrum analyzer. The RBW is set to 1% to 3% of the 99 % bandwidth. The VBW is set to 3 times the RBW. The sweep time is coupled. The spectrum analyzer internal 99% bandwidth function is utilized.

RESULTS

Channel	Frequency (MHz)	99% Bandwidth (MHz)
Low	2412	17.6417
Middle	2437	17.5653
High	2462	17.6498

99% BANDWIDTH

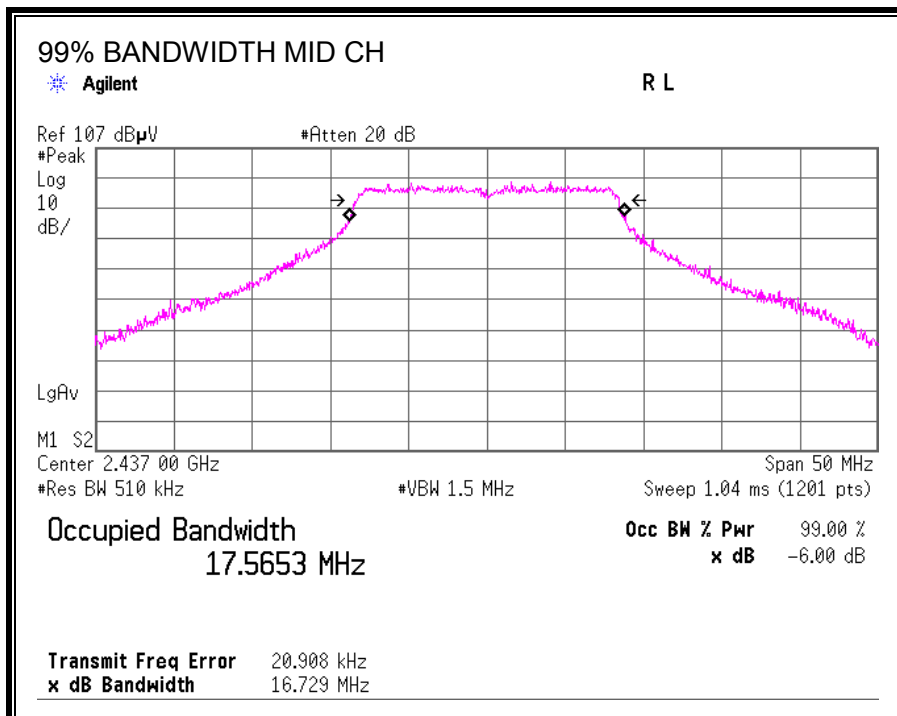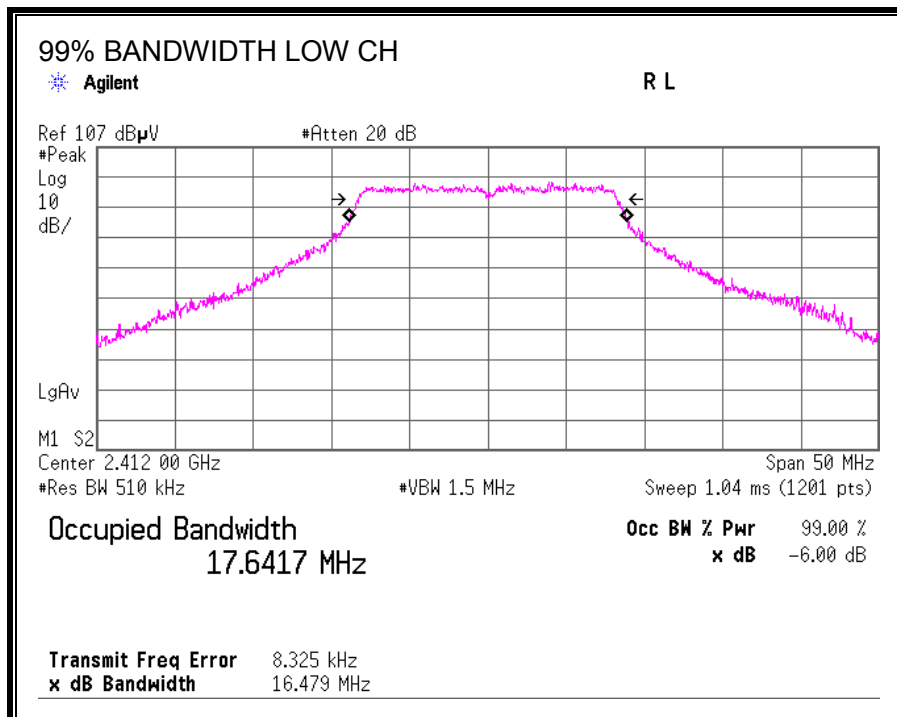

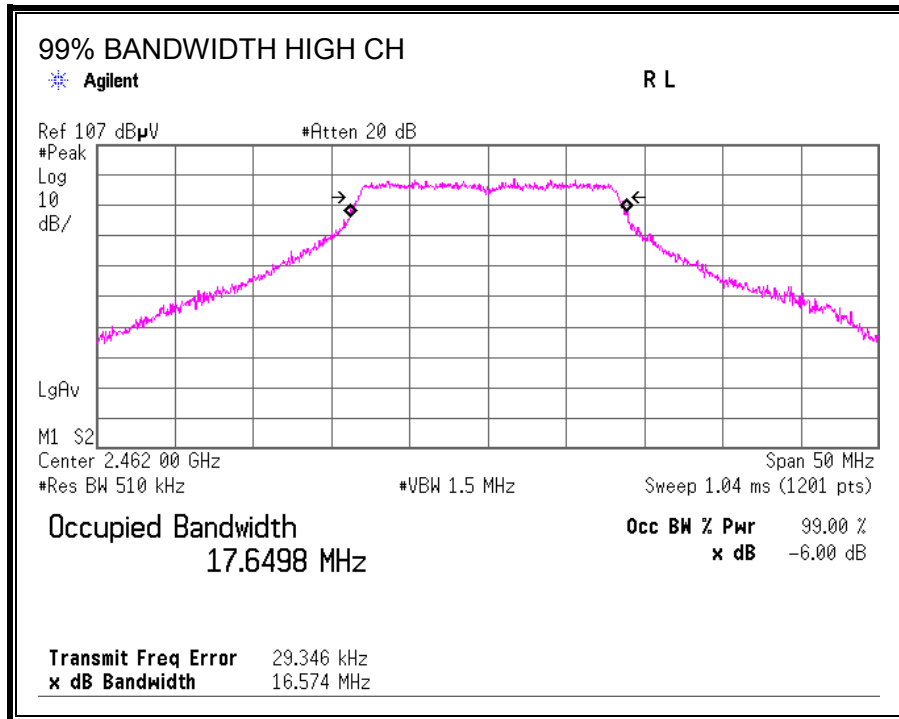

6.2.3 OUTPUT POWER

LIMITS

FCC §15.247 (b)

IC RSS-210 A8.4

The maximum antenna gain is less than or equal to 6 dBi, therefore the limit is 30 dBm.

TEST PROCEDURE

Peak power is measured using a wide bandwidth Peak Power Meter.

The cable assembly insertion loss of 11.68 dB or 11.7 dB (including 10.07 dB pad and 1.61 dB cable for 2412MHz/2442MHz or 1.63 dB cable for 2472MHz) was entered as an offset in the power meter to allow for direct reading of power.

RESULTS

Channel	Frequency (MHz)	Power Meter (dBm)	Limit (dBm)	Margin (dB)
Low	2412	14.05	30	-15.95
Middle	2437	14.02	30	-15.98
High	2462	14.08	30	-15.92

6.2.4 AVERAGE POWER

LIMITS

None; for reporting purposes only.

TEST PROCEDURE

The transmitter output is connected to a power meter.

RESULTS

The cable assembly insertion loss of 11.68 dB or 11.7 dB (including 10.07 dB pad and 1.61 dB cable for 2412MHz/2442MHz or 1.63 dB cable for 2472MHz) was entered as an offset in the power meter to allow for direct reading of power.

Channel	Frequency (MHz)	Power (dBm)
Low	2412	5.04
Middle	2437	5.08
High	2462	5.04

6.2.5 POWER SPECTRAL DENSITY

LIMITS

FCC §15.247 (e)

IC RSS-210 A8.2 (b)

The power spectral density conducted from the transmitter to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.



TEST PROCEDURE


Output power was measured based on the use of a peak measurement, therefore the power spectral density was measured using PSD Option 1 in accordance with FCC document "Measurement of Digital Transmission Systems Operating under Section 15.247", March 23, 2005.

RESULTS

Channel	Frequency (MHz)	PPSD (dBm)	Limit (dBm)	Margin (dB)
Low	2412	-17.46	8	-25.46
Middle	2437	-16.86	8	-24.86
High	2462	-18.14	8	-26.14

POWER SPECTRAL DENSITY

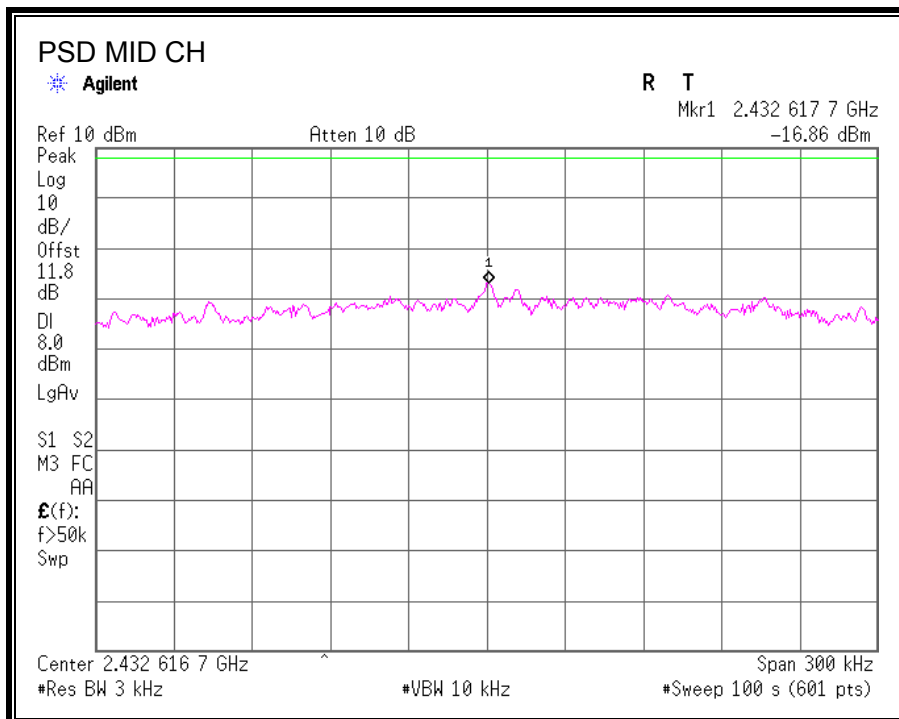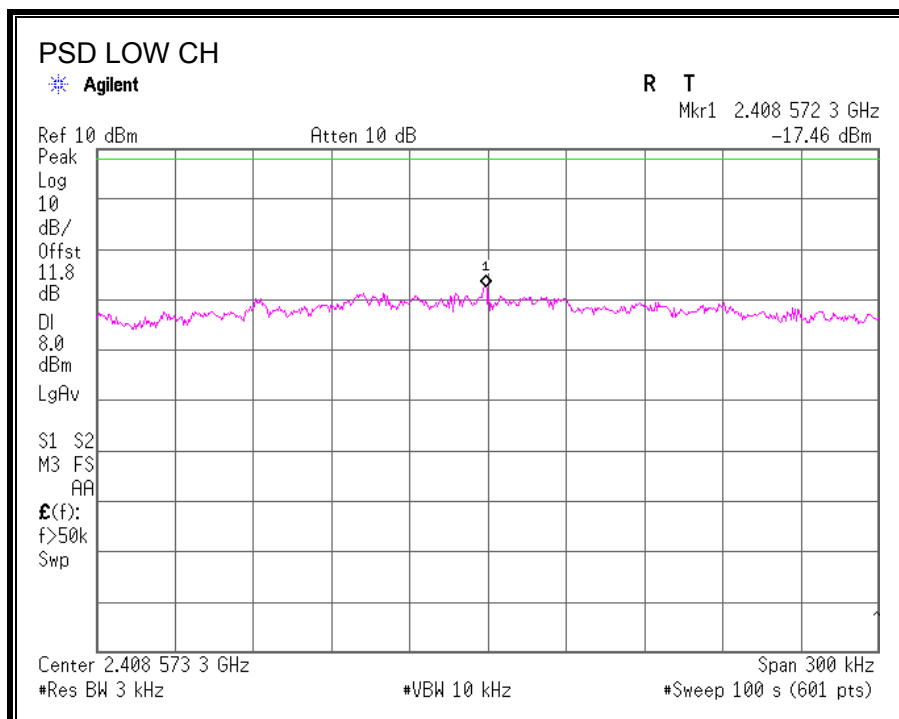

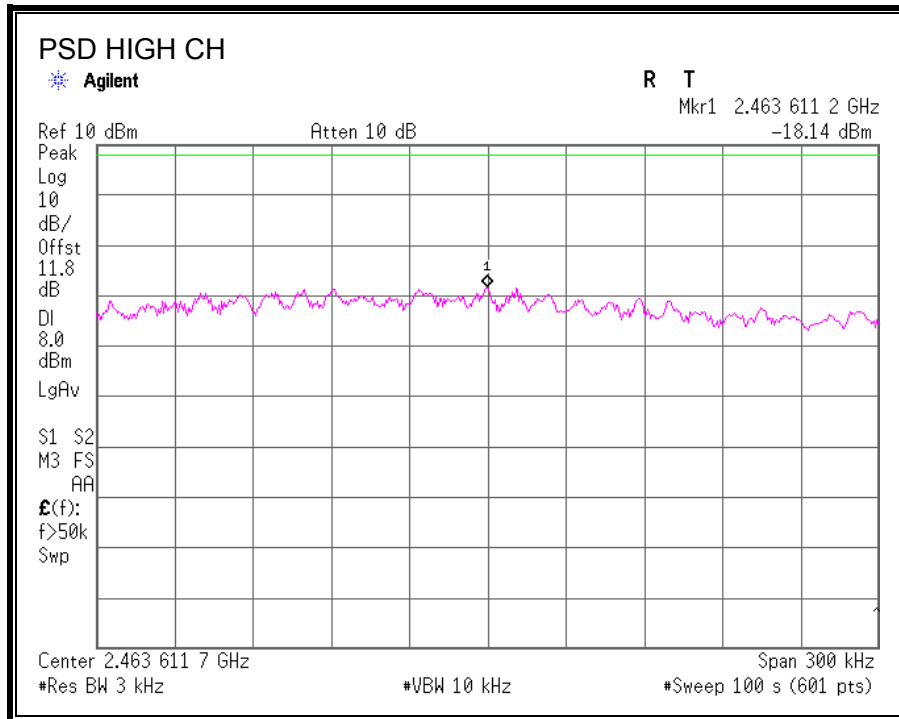

6.2.6 CONDUCTED SPURIOUS EMISSIONS

LIMITS

FCC §15.247 (d)

IC RSS-210 A8.5

Output power was measured based on the use of a peak measurement, therefore the required attenuation is 20 dB.



TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer. The resolution bandwidth is set to 100 kHz. The video bandwidth is set to 300 kHz.



The spectrum from 30 MHz to 26 GHz is investigated with the transmitter set to the lowest, middle, and highest channels.

RESULTS



SPURIOUS EMISSIONS, LOW CHANNEL

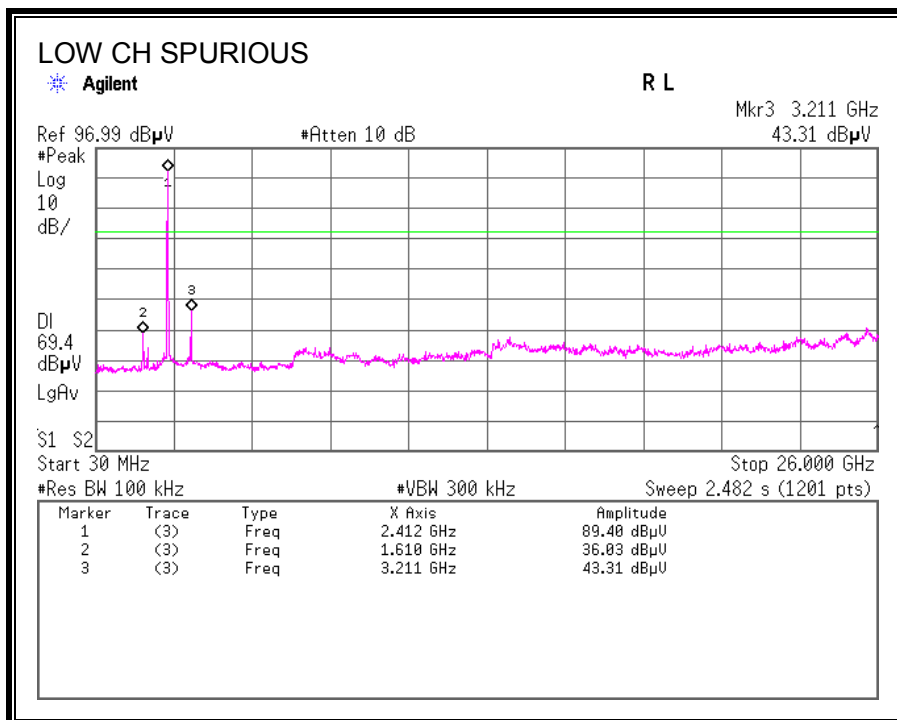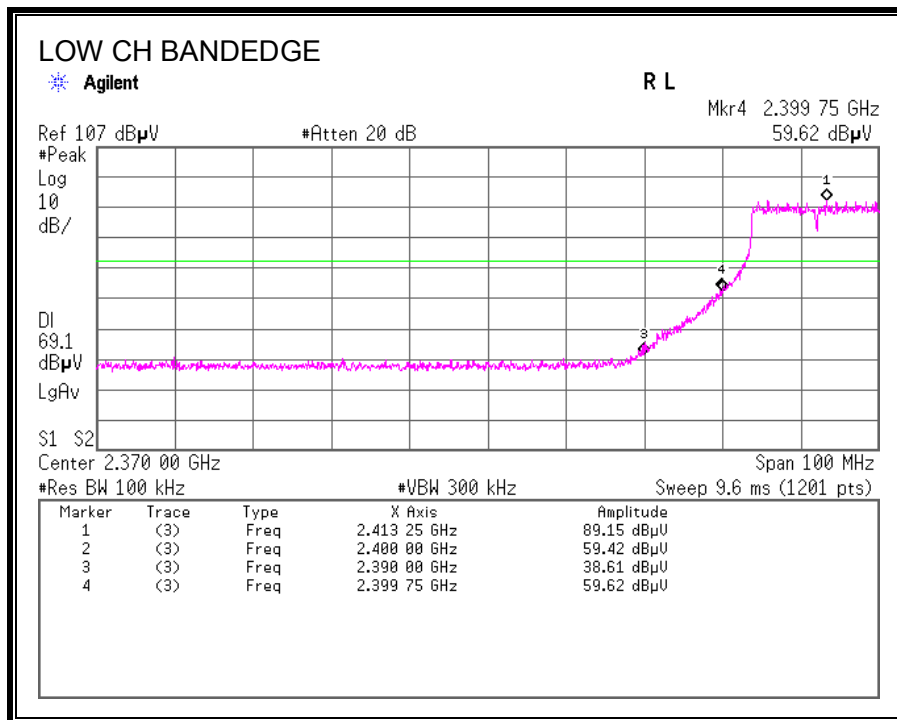

SPURIOUS EMISSIONS, MID CHANNEL

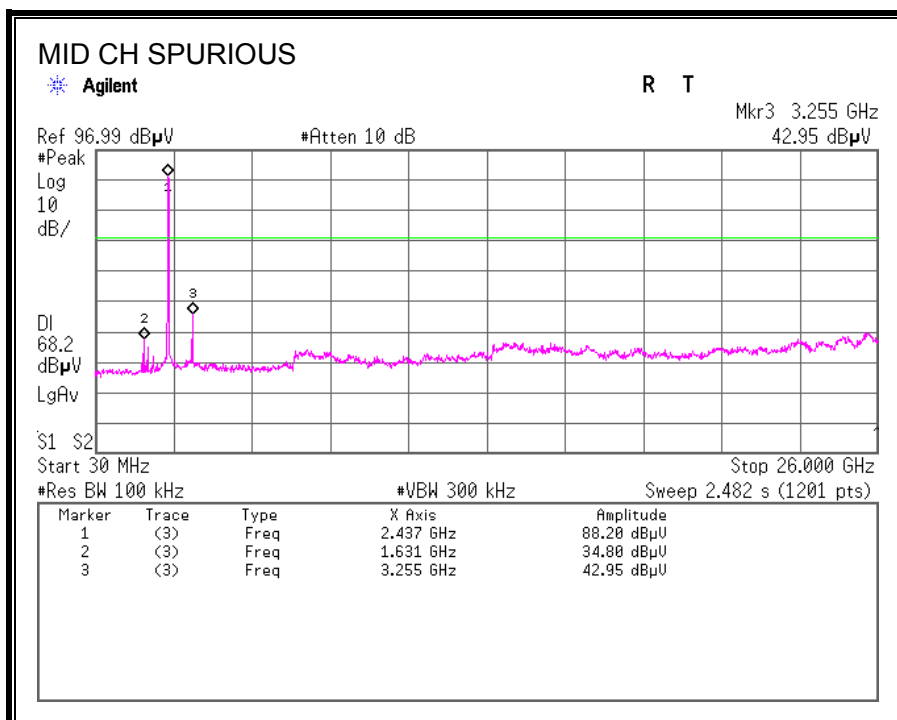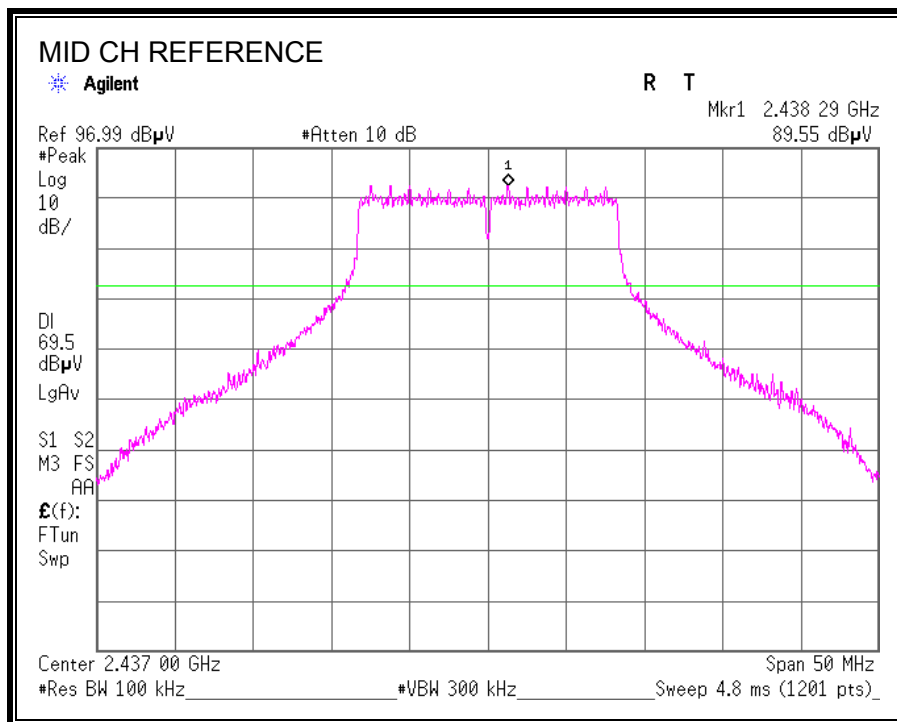

SPURIOUS EMISSIONS, HIGH CHANNEL

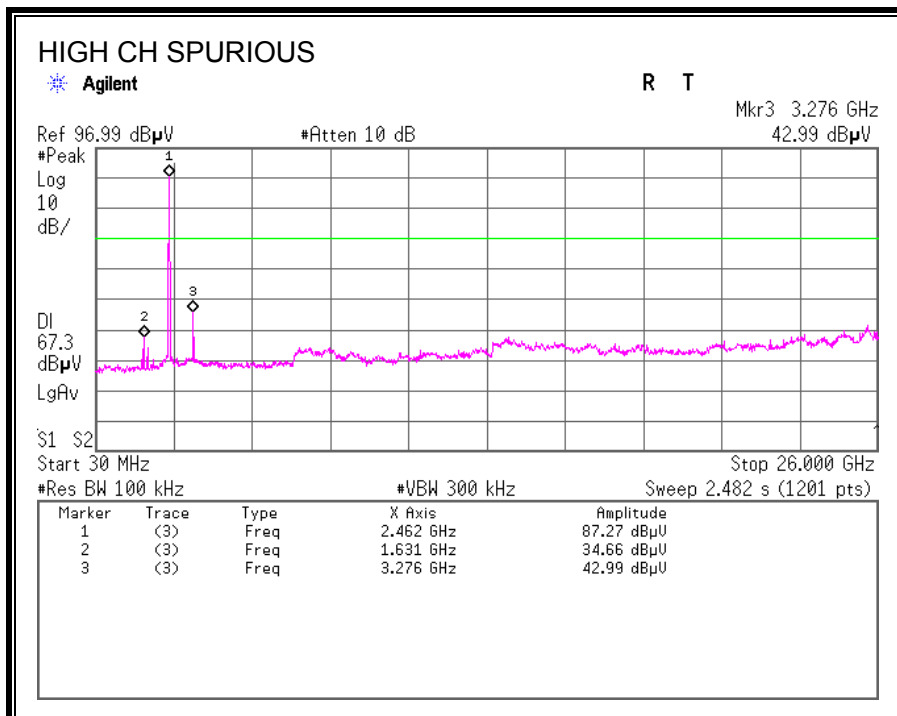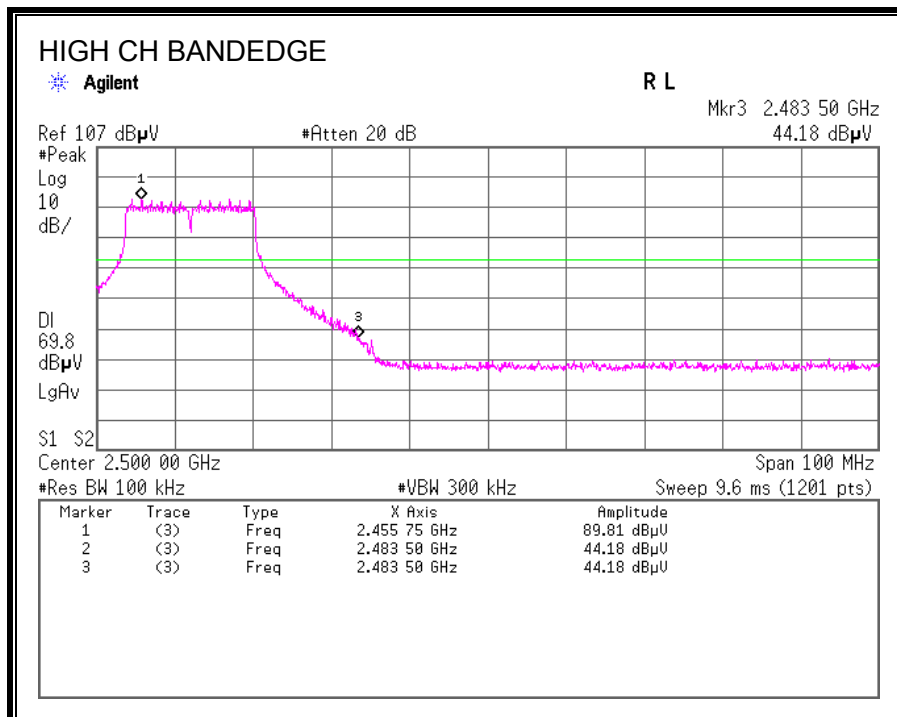

7. RADIATED TEST RESULTS

7.1 LIMITS AND PROCEDURE

LIMITS

FCC §15.205 and §15.209

IC RSS-210 Clause 2.5 (Transmitter)

IC RSS-GEN Clause 6 (Receiver)

Frequency Range (MHz)	Field Strength Limit (uV/m) at 3 m	Field Strength Limit (dBuV/m) at 3 m
30 - 88	100	40
88 - 216	150	43.5
216 - 960	200	46
Above 960	500	54

TEST PROCEDURE

The EUT is placed on a non-conducting table 80 cm above the ground plane. The antenna to EUT distance is 3 meters. The EUT is configured in accordance with ANSI C63.4. The EUT is set to transmit in a continuous mode.

For measurements below 1 GHz the resolution bandwidth is set to 100 kHz for peak detection measurements or 120 kHz for quasi-peak detection measurements. Peak detection is used unless otherwise noted as quasi-peak.

For measurements above 1 GHz the resolution bandwidth is set to 1 MHz, then the video bandwidth is set to 1 MHz for peak measurements and 10 Hz for average measurements.



The spectrum from 30 MHz to 26 GHz is investigated with the transmitter set to the lowest, middle, and highest channels in the 2.4 GHz band.

The frequency range of interest is monitored at a fixed antenna height and EUT azimuth. The EUT is rotated through 360 degrees to maximize emissions received. The antenna is scanned from 1 to 4 meters above the ground plane to further maximize the emission. Measurements are made with the antenna polarized in both the vertical and the horizontal positions.



7.2 TRANSMITTER ABOVE 1 GHz

7.2.1 TX ABOVE 1 GHz FOR 802.11b MODE IN THE 2.4 GHz BAND



RESTRICTED BANDEDGE (LOW CHANNEL, HORIZONTAL)

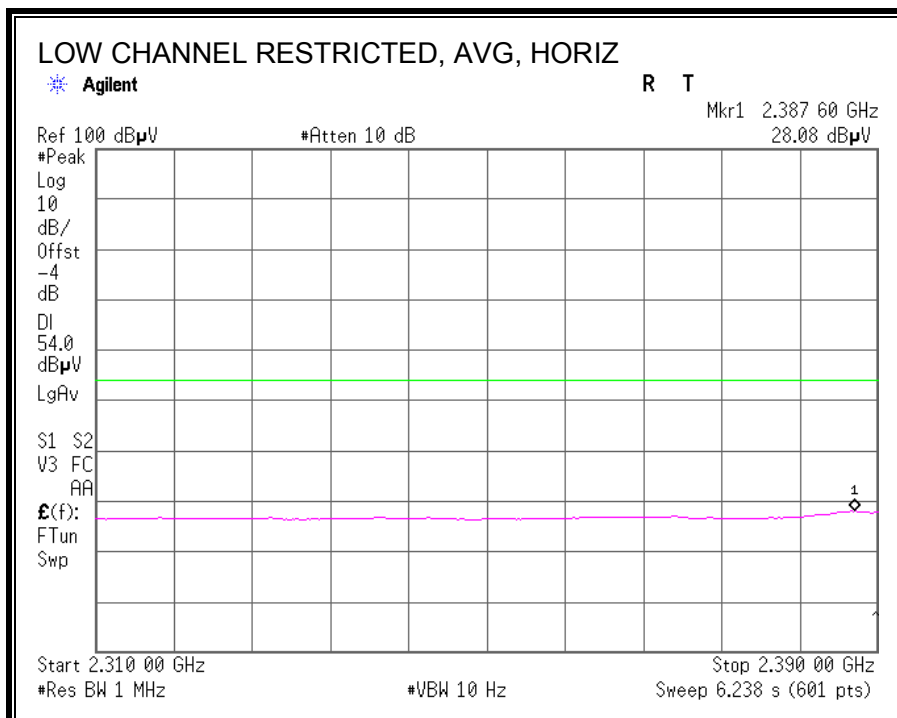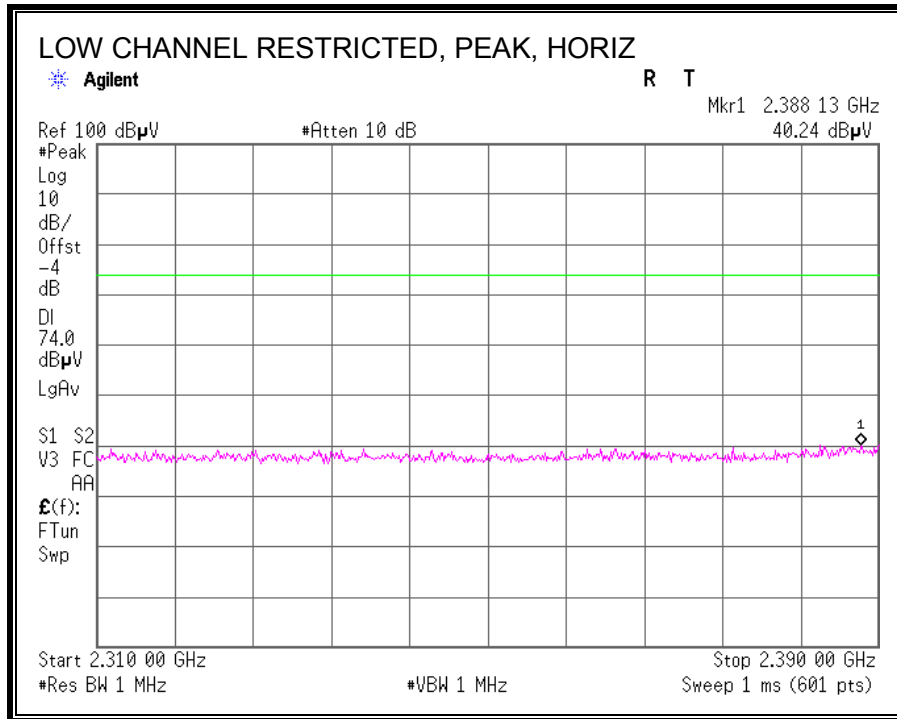



RESTRICTED BANDEDGE (LOW CHANNEL, VERTICAL)

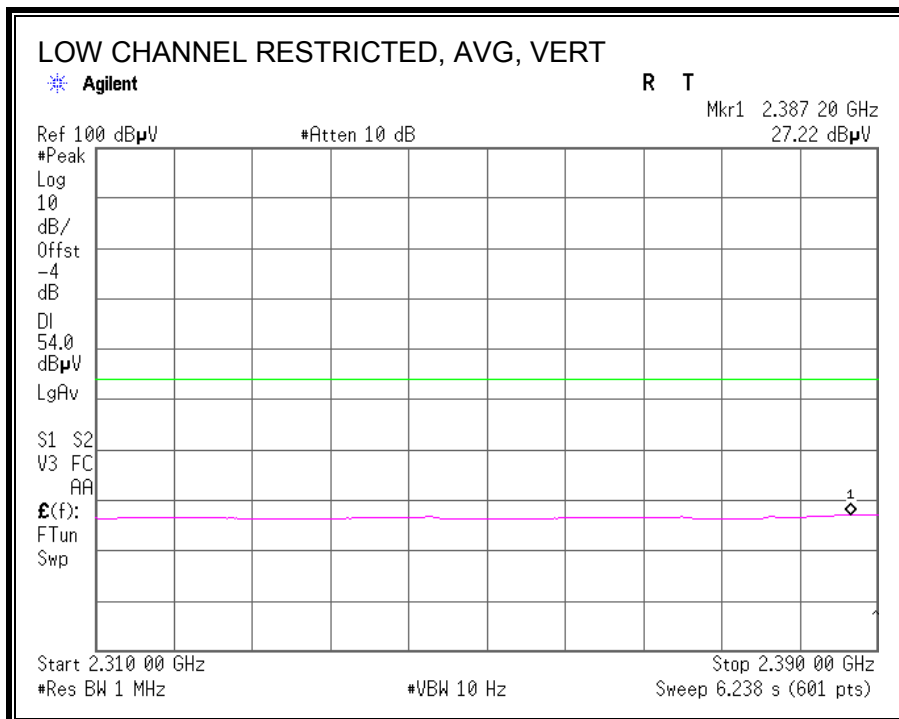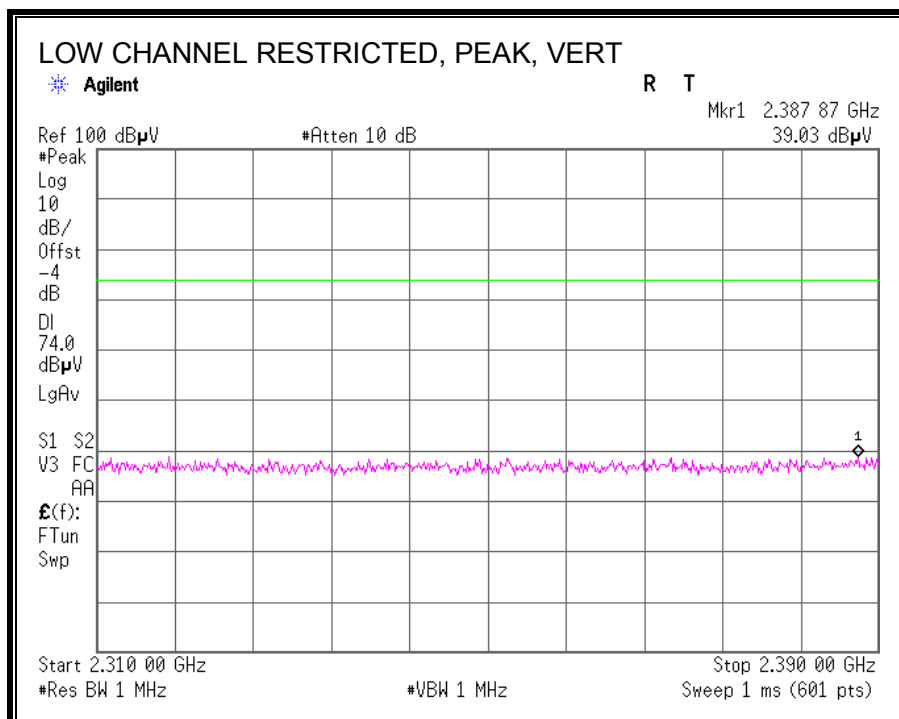

RESTRICTED BANDEDGE (HIGH CHANNEL, HORIZONTAL)

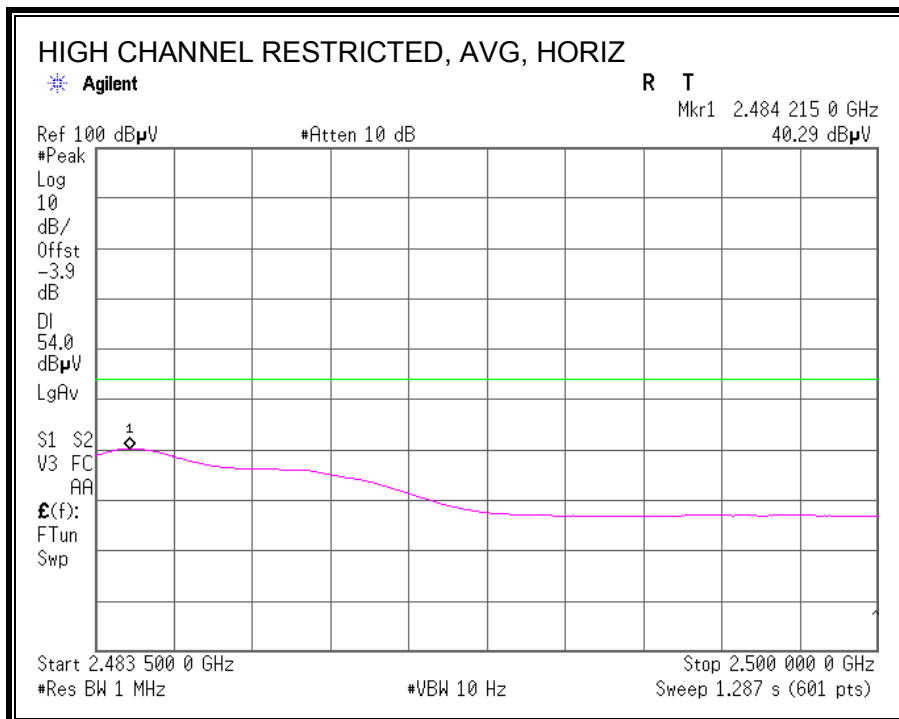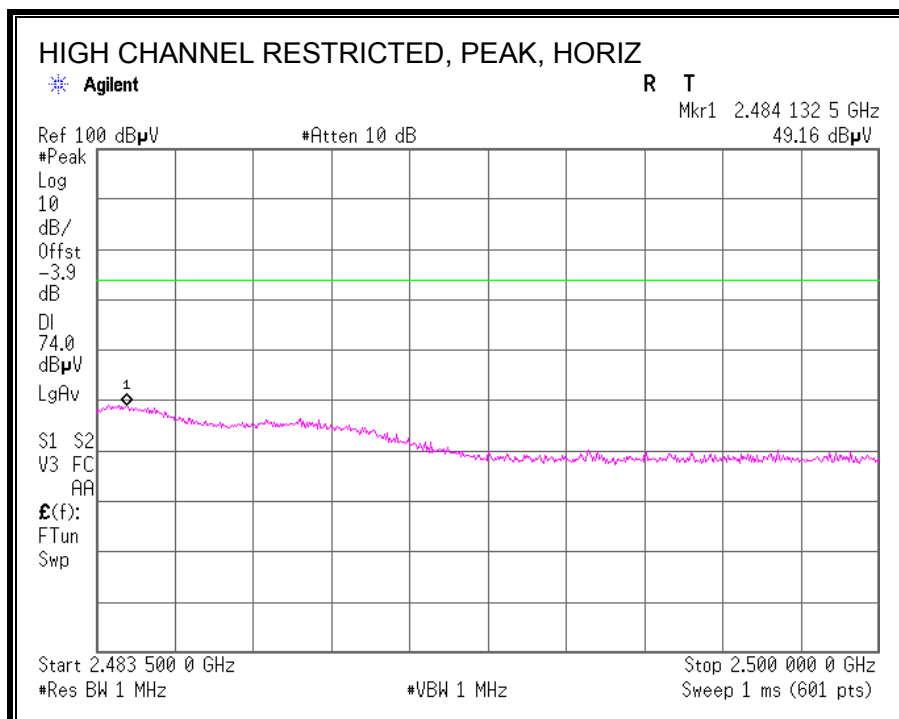

RESTRICTED BANDEDGE (HIGH CHANNEL, VERTICAL)

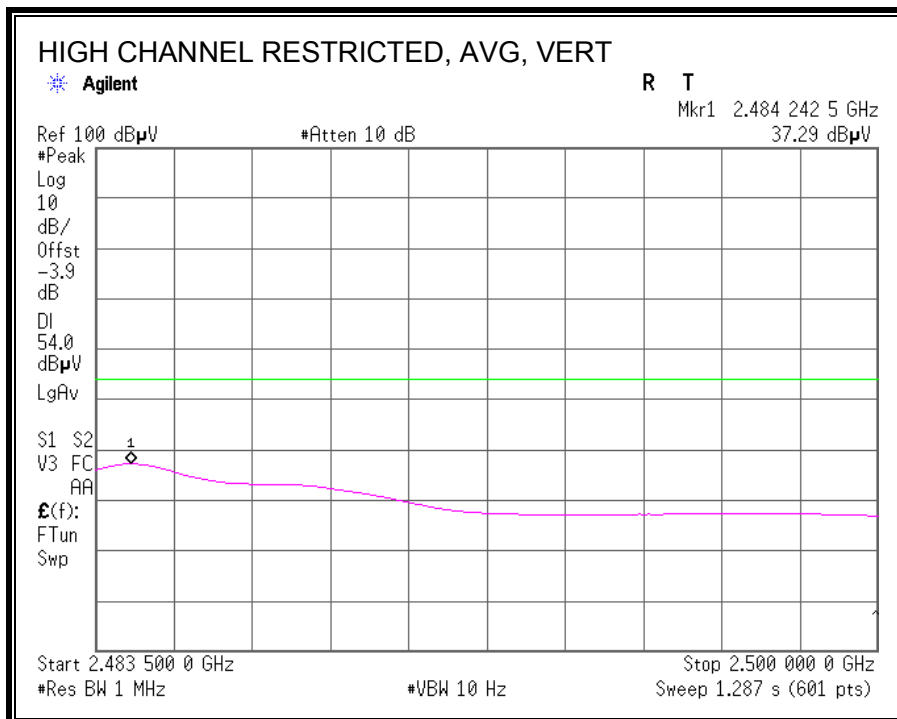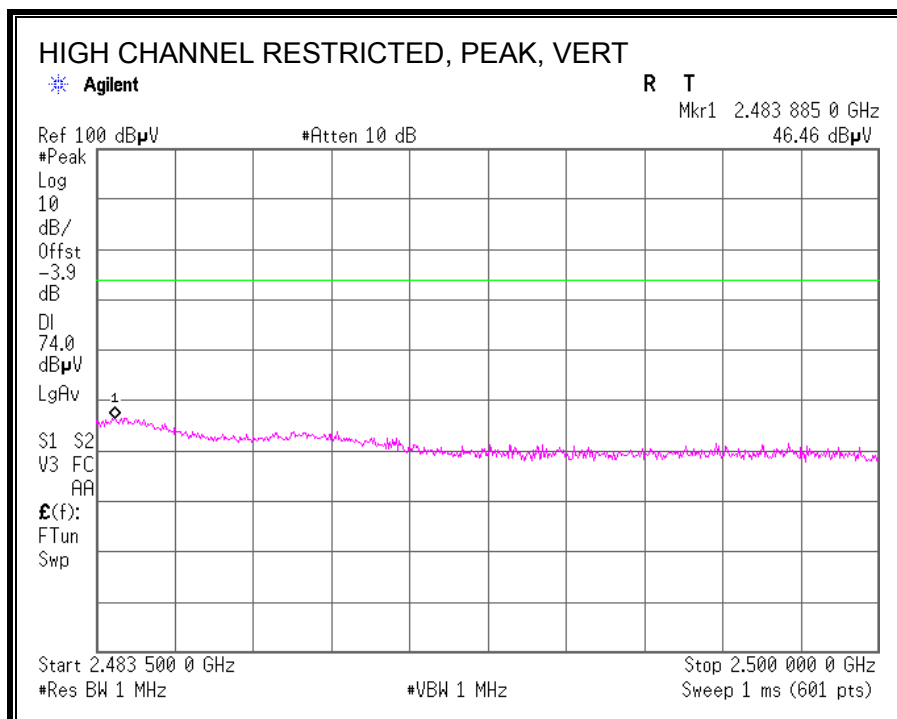

HARMONICS AND SPURIOUS EMISSIONS

Test place Head Office EMC Lab. No.3 Semi Anechoic Chamber
 Report No. 32FE0108-HO
 Date 01/31/2012 02/01/2012
 Temperature/ Humidity 22 deg.C/ 30% RH 23 deg.C/ 32% RH
 Engineer Katsunori Okai Katsunori Okai
 Mode 11b Tx

Low Ch. 2412MHz

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
Hori	2388.670	PK	44.5	26.4	2.2	32.6	40.5	74	33.4	
Hori	2390.000	PK	46.8	26.4	2.2	32.6	42.8	74	31.1	
Hori	2397.016	PK	63.0	26.4	2.2	32.6	59.0	-	-	- See 20dBc Data Sheet
Hori	2400.000	PK	63.2	26.4	2.2	32.6	59.2	-	-	- See 20dBc Data Sheet
Hori	4824.000	PK	39.8	30.4	3.8	31.9	42.1	74	31.8	
Hori	7236.000	PK	40.5	35.2	4.6	32.4	47.9	74	26.0	
Hori	2388.670	AV	32.3	26.4	2.2	32.6	28.3	54	25.6	
Hori	2390.000	AV	32.3	26.4	2.2	32.6	28.3	54	25.6	
Hori	2397.016	AV	54.5	26.4	2.2	32.6	50.5	-	-	- See 20dBc Data Sheet
Hori	2400.000	AV	54.2	26.4	2.2	32.6	50.2	-	-	- See 20dBc Data Sheet
Hori	4824.000	AV	28.1	30.4	3.8	31.9	30.4	54	23.5	
Hori	7236.000	AV	29.8	35.2	4.6	32.4	37.2	54	16.7	
Vert	2388.670	PK	43.8	26.4	2.2	32.6	39.8	74	34.1	
Vert	2390.000	PK	43.1	26.4	2.2	32.6	39.1	74	34.8	
Vert	2397.017	PK	60.8	26.4	2.2	32.6	56.8	-	-	- See 20dBc Data Sheet
Vert	2400.000	PK	60.9	26.4	2.2	32.6	56.9	-	-	- See 20dBc Data Sheet
Vert	4824.000	PK	38.8	30.4	3.8	31.9	41.1	74	32.8	
Vert	7236.000	PK	41.5	35.2	4.6	32.4	48.9	74	25.0	
Vert	2388.670	AV	31.5	26.4	2.2	32.6	27.5	54	26.4	
Vert	2390.000	AV	31.3	26.4	2.2	32.6	27.3	54	26.6	
Vert	2397.017	AV	52.4	26.4	2.2	32.6	48.4	-	-	- See 20dBc Data Sheet
Vert	2400.000	AV	52.1	26.4	2.2	32.6	48.1	-	-	- See 20dBc Data Sheet
Vert	4824.000	AV	28.1	30.4	3.8	31.9	30.4	54	23.5	
Vert	7236.000	AV	29.8	35.2	4.6	32.4	37.2	54	16.7	

20dBc Data Sheet

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant Factor [dB/m]	Loss [dB]	Gain [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
Hori	2412.000	PK	95.9	26.4	2.2	32.6	91.9	-	-	Carrier
Hori	2400.000	PK	55.9	26.4	2.2	32.6	51.9	71.9	20.0	
Hori	2397.016	PK	57.2	26.4	2.2	32.6	53.2	71.9	18.7	
Vert	2412.000	PK	93.4	26.4	2.2	32.6	89.4	-	-	Carrier
Vert	2400.000	PK	53.5	26.4	2.2	32.6	49.5	69.4	19.9	
Vert	2397.017	PK	55.0	26.4	2.2	32.6	51.0	69.4	18.4	

Result = Reading + Ant Factor + Loss (Cable+Attenuator+Filter-Distance factor(above 10GHz)) - Gain(Amplifier)

Mid Ch. 2442MHz

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
Hori	4884.000	PK	39.0	30.5	3.8	31.9	41.4	74	32.5	
Hori	7326.000	PK	40.7	35.2	4.6	32.4	48.1	74	25.8	
Hori	4884.000	AV	28.2	30.5	3.8	31.9	30.6	54	23.3	
Hori	7326.000	AV	29.8	35.2	4.6	32.4	37.2	54	16.7	
Vert	4884.000	PK	38.7	30.5	3.8	31.9	41.1	74	32.8	
Vert	7326.000	PK	39.9	35.2	4.6	32.4	47.3	74	26.6	
Vert	4884.000	AV	28.2	30.5	3.8	31.9	30.6	54	23.3	
Vert	7326.000	AV	29.8	35.2	4.6	32.4	37.2	54	16.7	

Test place Head Office EMC Lab. No.3 Semi Anechoic Chamber
 Report No. 32FE0108-HO
 Date 01/31/2012 02/01/2012
 Temperature/ Humidity 22 deg.C/ 30% RH 23 deg.C/ 32% RH
 Engineer Katsunori Okai Katsunori Okai
 Mode 11b Tx

High Ch. 2472MHz

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
Hori	2483.500	PK	54.4	26.5	2.2	32.6	50.5	74	23.4	
Hori	2483.912	PK	54.9	26.5	2.2	32.6	51.0	74	22.9	
Hori	4944.000	PK	39.3	30.6	3.9	31.9	41.9	74	32.0	
Hori	7416.000	PK	40.5	35.2	4.6	32.4	47.9	74	26.0	
Hori	2483.500	AV	43.5	26.5	2.2	32.6	39.6	54	14.3	
Hori	2484.297	AV	45.3	26.5	2.2	32.6	41.4	54	12.5	
Hori	4944.000	AV	28.0	30.6	3.9	31.9	30.6	54	23.3	
Hori	7416.000	AV	30.0	35.2	4.6	32.4	37.4	54	16.5	
Vert	2483.500	PK	51.0	26.5	2.2	32.6	47.1	74	26.8	
Vert	2483.967	PK	51.3	26.5	2.2	32.6	47.4	74	26.5	
Vert	4944.000	PK	38.7	30.6	3.9	31.9	41.3	74	32.6	
Vert	7416.000	PK	40.2	35.2	4.6	32.4	47.6	74	26.3	
Vert	2483.500	AV	40.2	26.5	2.2	32.6	36.3	54	17.6	
Vert	2484.325	AV	41.9	26.5	2.2	32.6	38.0	54	15.9	
Vert	4944.000	AV	28.0	30.6	3.9	31.9	30.6	54	23.3	
Vert	7416.000	AV	30.0	35.2	4.6	32.4	37.4	54	16.5	



Result = Reading + Ant Factor + Loss (Cable+Attenuator+Filter-Distance factor(above 10GHz)) - Gain(Amplifier)

*Other frequency noises omitted in this report were not seen or had enough margin (more than 20dB).



Distance factor: 10GHz-26.5GHz 20log(3.0m/1.0m)= 9.5dB
 26.5GHz-40GHz 20log(3.0m/0.5m)=15.6dB

7.2.2 TX ABOVE 1 GHz FOR 802.11g MODE IN THE 2.4 GHz BAND



RESTRICTED BANDEDGE (LOW CHANNEL, HORIZONTAL)

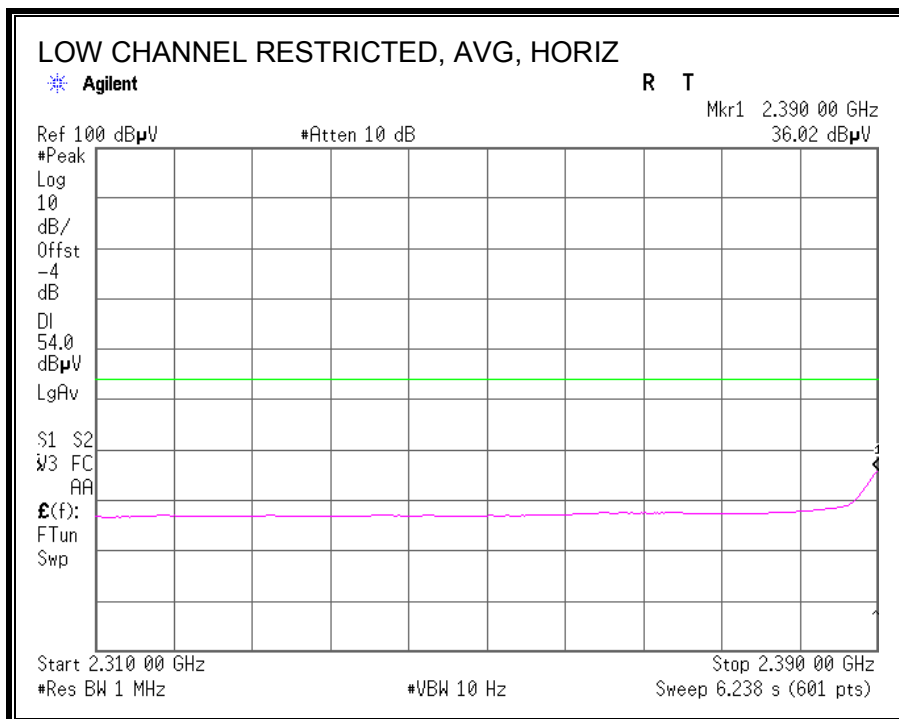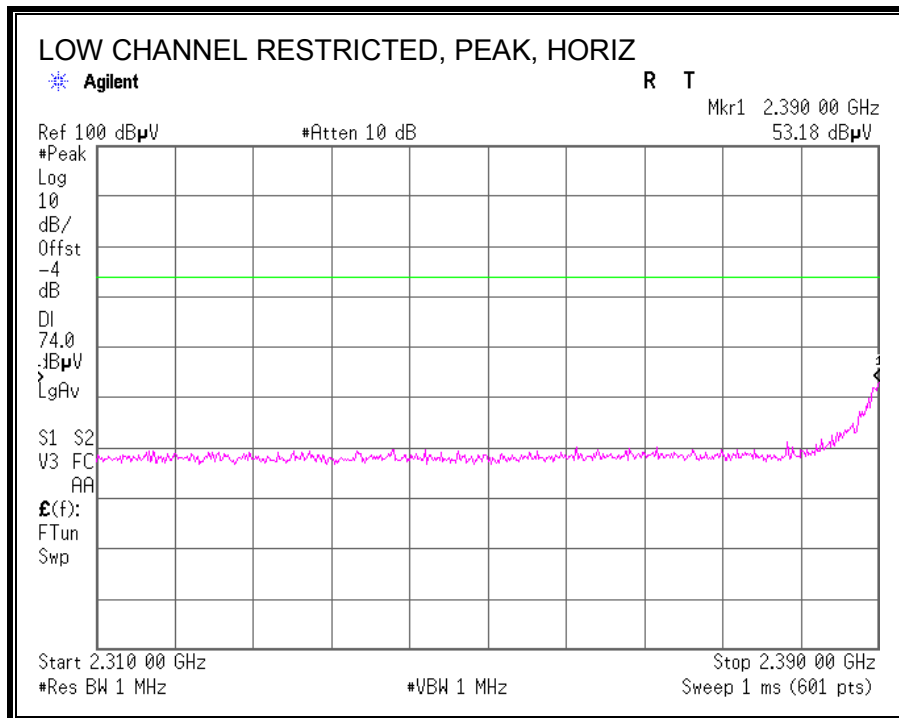



RESTRICTED BANDEDGE (LOW CHANNEL, VERTICAL)

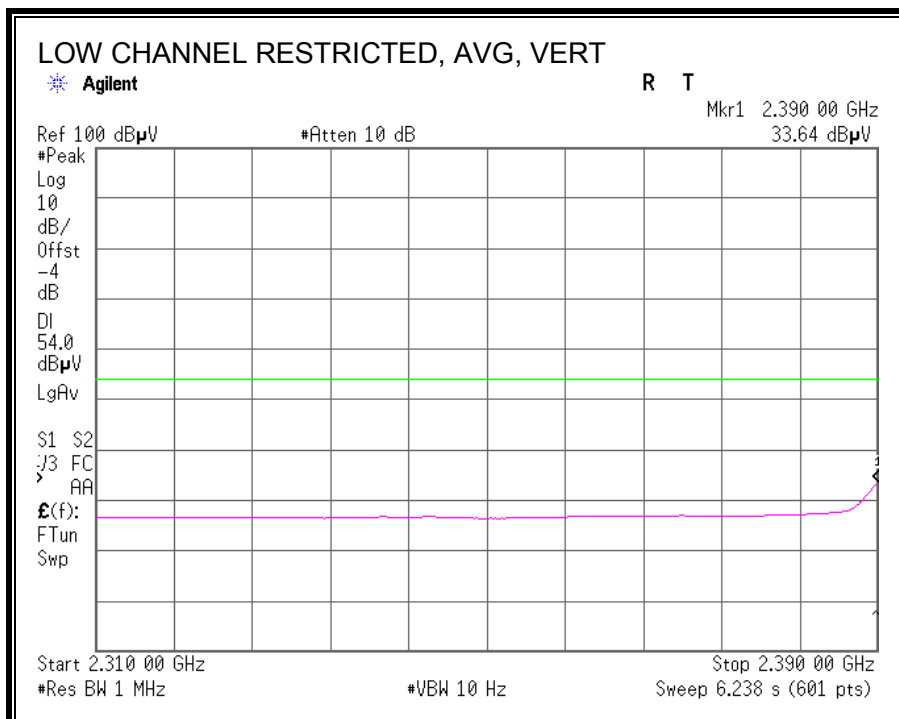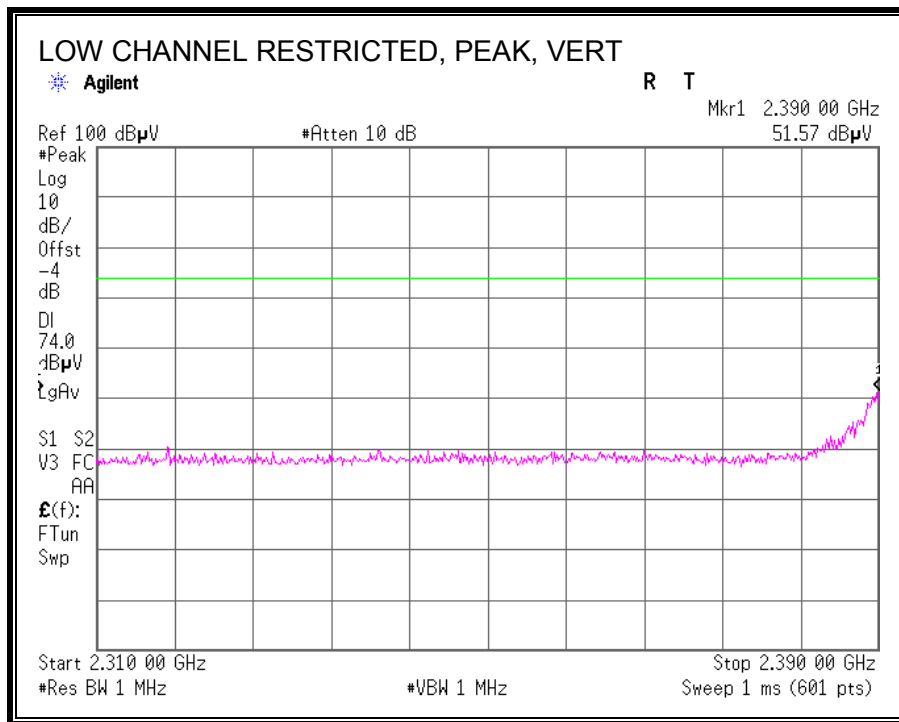

RESTRICTED BANDEDGE (HIGH CHANNEL, HORIZONTAL)

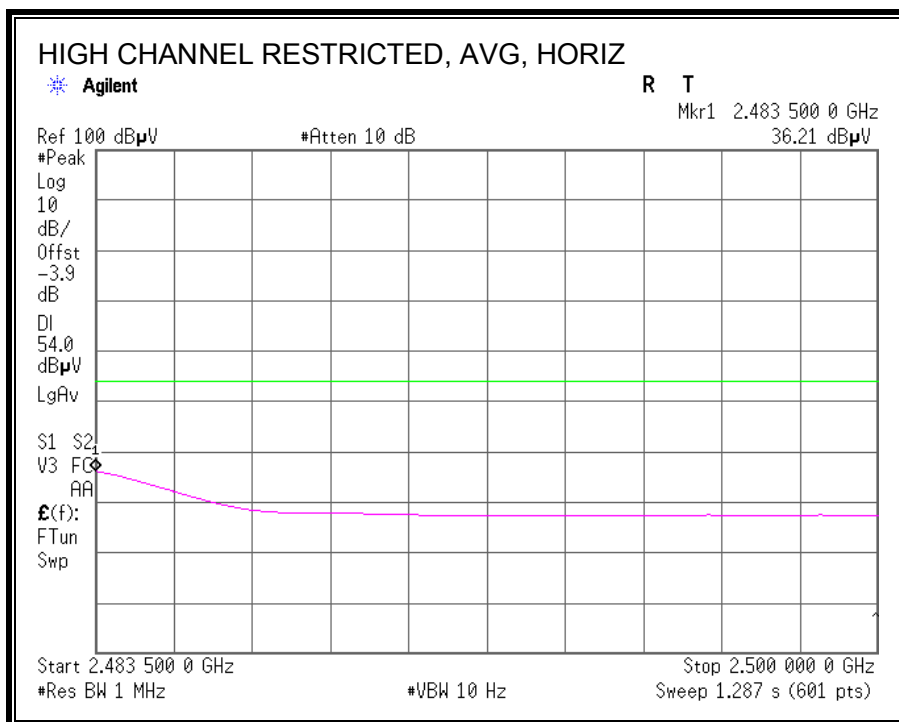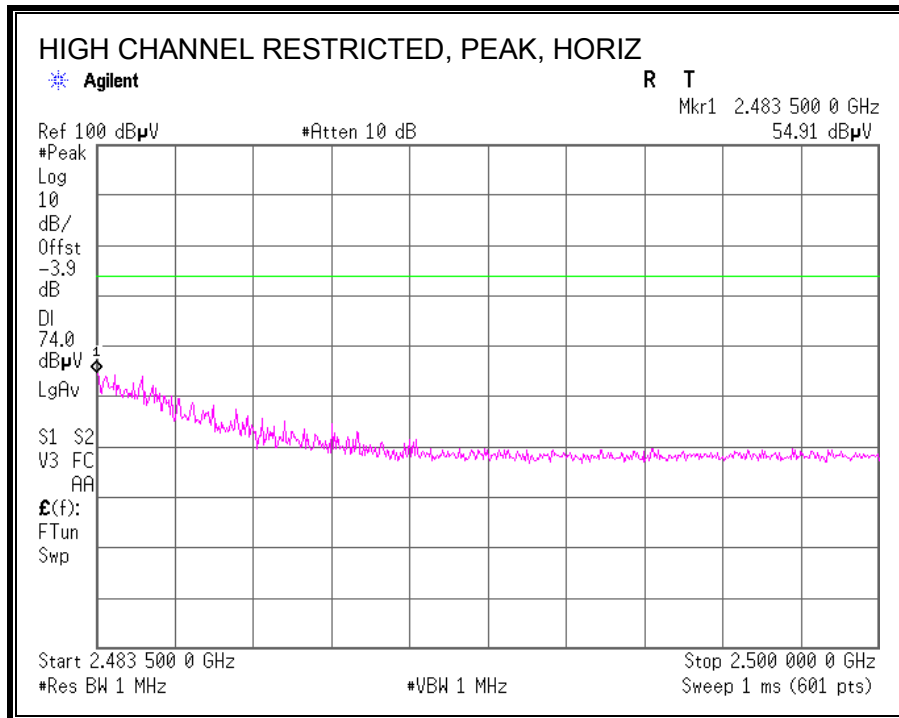

RESTRICTED BANDEDGE (HIGH CHANNEL, VERTICAL)

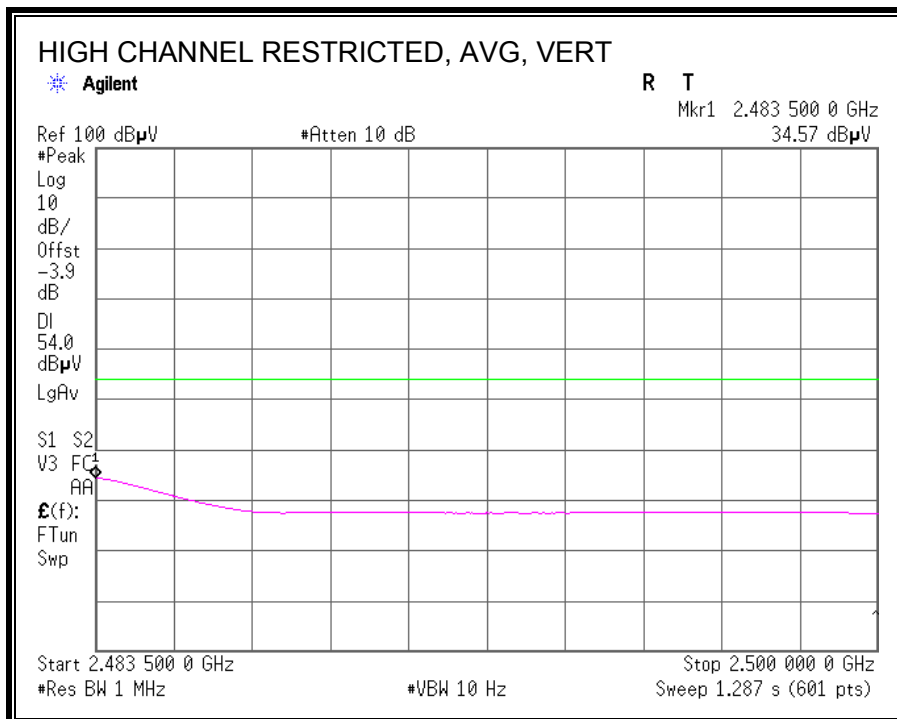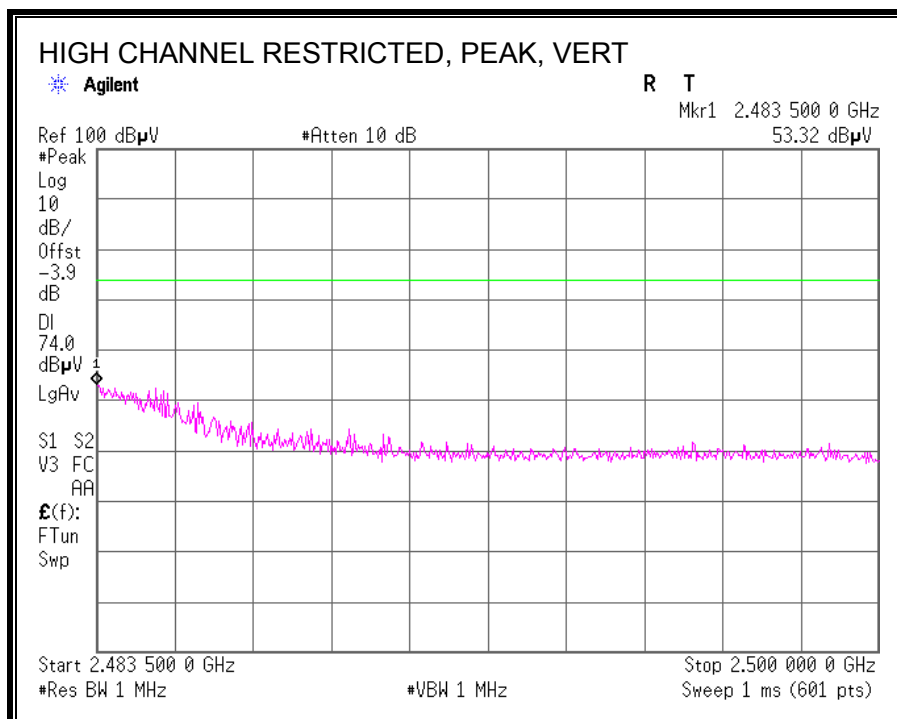

HARMONICS AND SPURIOUS EMISSIONS

Test place Head Office EMC Lab. No.3 Semi Anechoic Chamber
 Report No. 32FE0108-HO
 Date 01/31/2012 02/01/2012
 Temperature/ Humidity 22 deg.C/ 30% RH 23 deg.C/ 32% RH
 Engineer Katsunori Okai Katsunori Okai
 Mode 11g Tx

Low Ch, 2412MHz

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
Hori	2390.000	PK	59.3	26.4	2.2	32.6	55.3	74	18.6	See 20dBc Data Sheet
Hori	2400.000	PK	78.3	26.4	2.2	32.6	74.3	-	-	
Hori	4824.000	PK	40.5	30.4	3.8	31.9	42.8	74	31.1	
Hori	7236.000	PK	41.5	35.2	4.6	32.4	48.9	74	25.1	
Hori	2390.000	AV	40.9	26.4	2.2	32.6	36.9	54	17.0	See 20dBc Data Sheet
Hori	2400.000	AV	58.9	26.4	2.2	32.6	54.9	-	-	
Hori	4824.000	AV	28.1	30.4	3.8	31.9	30.4	54	23.5	
Hori	7236.000	AV	29.8	35.2	4.6	32.4	37.2	54	16.7	
Vert	2390.000	PK	57.1	26.4	2.2	32.6	53.1	74	20.8	See 20dBc Data Sheet
Vert	2400.000	PK	75.6	26.4	2.2	32.6	71.6	-	-	
Vert	4824.000	PK	40.1	30.4	3.8	31.9	42.4	74	31.5	
Vert	7236.000	PK	41.2	35.2	4.6	32.4	48.6	74	25.3	
Vert	2390.000	AV	39.0	26.4	2.2	32.6	35.0	54	18.9	See 20dBc Data Sheet
Vert	2400.000	AV	56.3	26.4	2.2	32.6	52.3	-	-	
Vert	4824.000	AV	28.1	30.4	3.8	31.9	30.4	54	23.5	
Vert	7236.000	AV	29.8	35.2	4.6	32.4	37.2	54	16.7	

20dBc Data Sheet

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant Factor [dB/m]	Loss [dB]	Gain [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
Hori	2412.000	PK	92.9	26.4	2.2	32.6	88.9	-	-	Carrier
Hori	2400.000	PK	62.8	26.4	2.2	32.6	58.8	68.9	10.1	
Vert	2412.000	PK	90.6	26.4	2.2	32.6	86.6	-	-	Carrier
Vert	2400.000	PK	60.3	26.4	2.2	32.6	56.3	66.6	10.3	

Result = Reading + Ant Factor + Loss (Cable+Attenuator+Filter-Distance factor(above 10GHz)) - Gain(Amplifier)

Mid Ch, 2437MHz

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
Hori	4874.000	PK	37.8	30.5	3.8	31.9	40.2	74	33.7	
Hori	7311.000	PK	40.3	35.2	4.6	32.4	47.7	74	26.2	
Hori	4874.000	AV	27.9	30.5	3.8	31.9	30.3	54	23.6	
Hori	7311.000	AV	29.5	35.2	4.6	32.4	36.9	54	17.0	
Vert	4874.000	PK	39.2	30.5	3.8	31.9	41.6	74	32.3	
Vert	7311.000	PK	40.6	35.2	4.6	32.4	48.0	74	25.9	
Vert	4874.000	AV	27.9	30.5	3.8	31.9	30.3	54	23.6	
Vert	7311.000	AV	29.5	35.2	4.6	32.4	36.9	54	17.0	

High Ch, 2462MHz

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
Hori	2483.500	PK	58.8	26.5	2.2	32.6	54.9	74	19.0	
Hori	4924.000	PK	39.4	30.5	3.8	31.9	41.8	74	32.1	
Hori	7386.000	PK	41.1	35.2	4.6	32.4	48.5	74	25.4	
Hori	2483.500	AV	40.1	26.5	2.2	32.6	36.2	54	17.7	
Hori	4924.000	AV	27.9	30.5	3.8	31.9	30.3	54	23.6	
Hori	7386.000	AV	30.1	35.2	4.6	32.4	37.5	54	16.4	
Vert	2483.500	PK	58.2	26.5	2.2	32.6	54.3	74	19.6	
Vert	4924.000	PK	39.7	30.5	3.8	31.9	42.1	74	31.8	
Vert	7386.000	PK	41.9	35.2	4.6	32.4	49.3	74	24.6	
Vert	2483.500	AV	39.4	26.5	2.2	32.6	35.5	54	18.4	
Vert	4924.000	AV	27.9	30.5	3.8	31.9	30.3	54	23.6	
Vert	7386.000	AV	30.1	35.2	4.6	32.4	37.5	54	16.4	

Result = Reading + Ant Factor + Loss (Cable+Attenuator+Filter-Distance factor(above 10GHz)) - Gain(Amplifier)

*Other frequency noises omitted in this report were not seen or had enough margin (more than 20dB).

Distance factor: 10GHz-26.5GHz 20log(3.0m/1.0m)= 9.5dB
 26.5GHz-40GHz 20log(3.0m/0.5m)=15.6dB

7.3 RECEIVER ABOVE 1 GHz

7.3.1 RX ABOVE 1 GHz FOR 20 MHz BANDWIDTH IN THE 2.4 GHz BAND

Test place Head Office EMC Lab. No.3 Semi Anechoic Chamber
 Report No. 32FE0108-HO
 Date 02/02/2012
 Temperature/ Humidity 23 deg.C/ 31% RH
 Engineer Tomohisa Nakagawa
 Mode Rx 2437MHz


Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
Hori	1209.001	PK	46.8	24.5	1.5	34.7	38.1	74	35.8	
Hori	1479.728	PK	44.5	25.5	1.7	34.0	37.7	74	36.2	
Hori	1741.005	PK	47.4	25.7	1.9	33.4	41.6	74	32.3	
Hori	2437.000	PK	42.6	26.4	2.2	32.6	38.6	74	35.3	
Hori	1209.001	AV	38.1	24.5	1.5	34.7	29.4	54	24.5	
Hori	1479.728	AV	32.3	25.5	1.7	34.0	25.5	54	28.4	
Hori	1741.005	AV	41.1	25.7	1.9	33.4	35.3	54	18.6	
Hori	2437.000	AV	30.1	26.4	2.2	32.6	26.1	54	27.8	
Vert	1209.001	PK	49.6	24.5	1.5	34.7	40.9	74	33.0	
Vert	1479.728	PK	44.7	25.5	1.7	34.0	37.9	74	36.0	
Vert	1741.005	PK	47.0	25.7	1.9	33.4	41.2	74	32.7	
Vert	2437.000	PK	43.3	26.4	2.2	32.6	39.3	74	34.6	
Vert	1209.001	AV	40.2	24.5	1.5	34.7	31.5	54	22.4	
Vert	1479.728	AV	33.1	25.5	1.7	34.0	26.3	54	27.6	
Vert	1741.005	AV	38.7	25.7	1.9	33.4	32.9	54	21.0	
Vert	2437.000	AV	30.0	26.4	2.2	32.6	26.0	54	27.9	

Result = Reading + Ant Factor + Loss (Cable+Attenuator+Filter-Distance factor(above 10GHz)) - Gain(Amplifier)


*Other frequency noises omitted in this report were not seen or had enough margin (more than 20dB).

7.4 WORST-CASE RADIATED EMISSIONS BELOW 1 GHz


SPURIOUS EMISSIONS 30 TO 1000 MHz (HORIZONTAL)

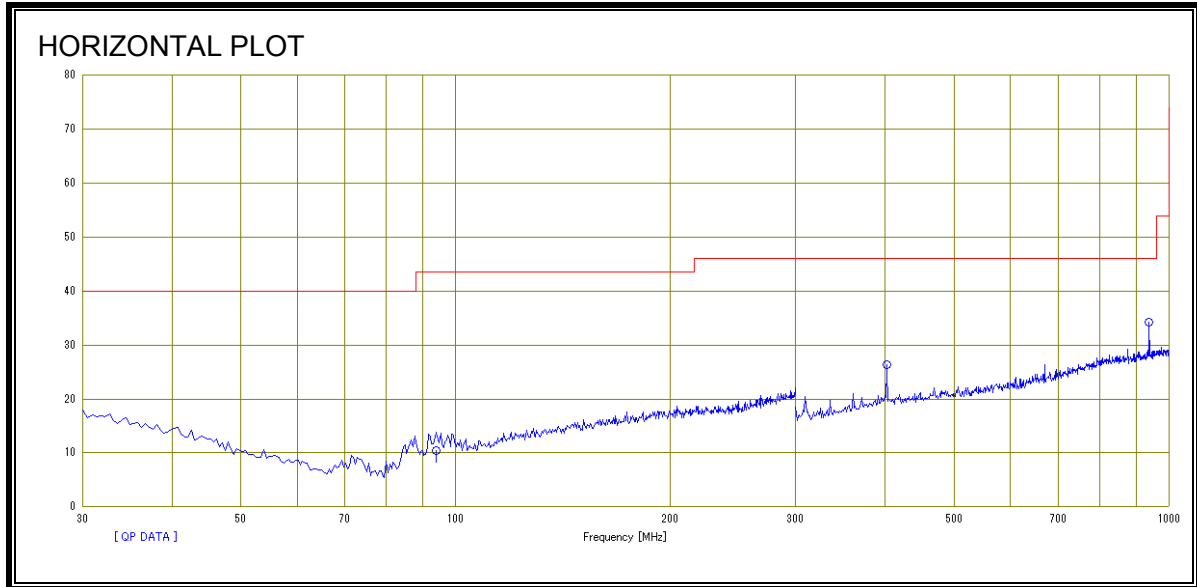


SPURIOUS EMISSIONS 30 TO 1000 MHz (VERTICAL)

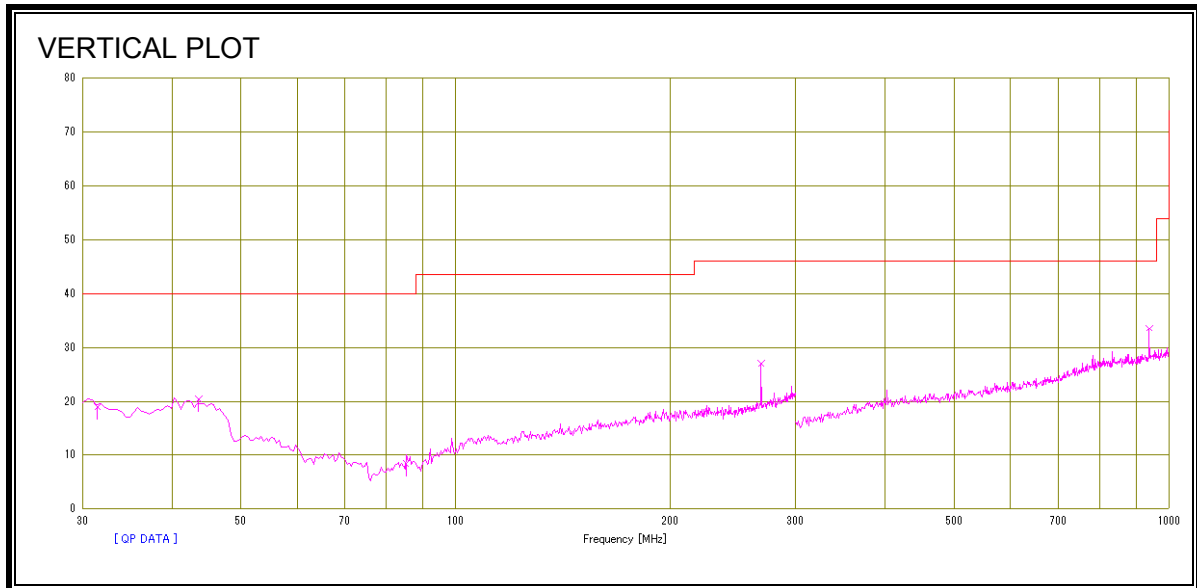

SPURIOUS EMISSIONS 30 TO 1000 MHz (HORIZONTAL)

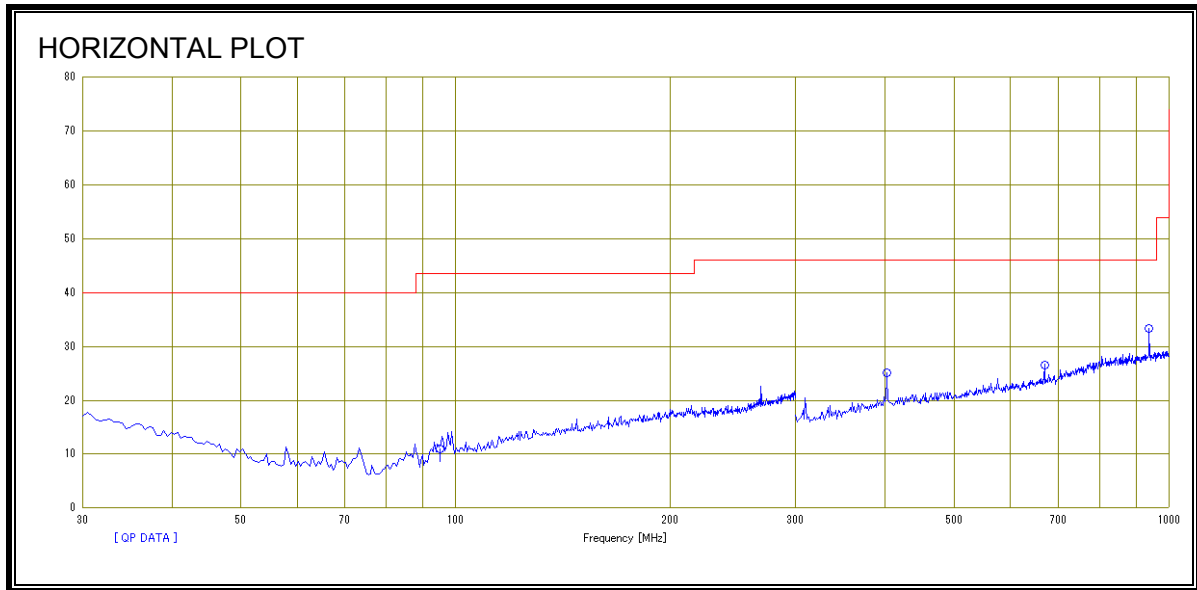

SPURIOUS EMISSIONS 30 TO 1000 MHz (VERTICAL)

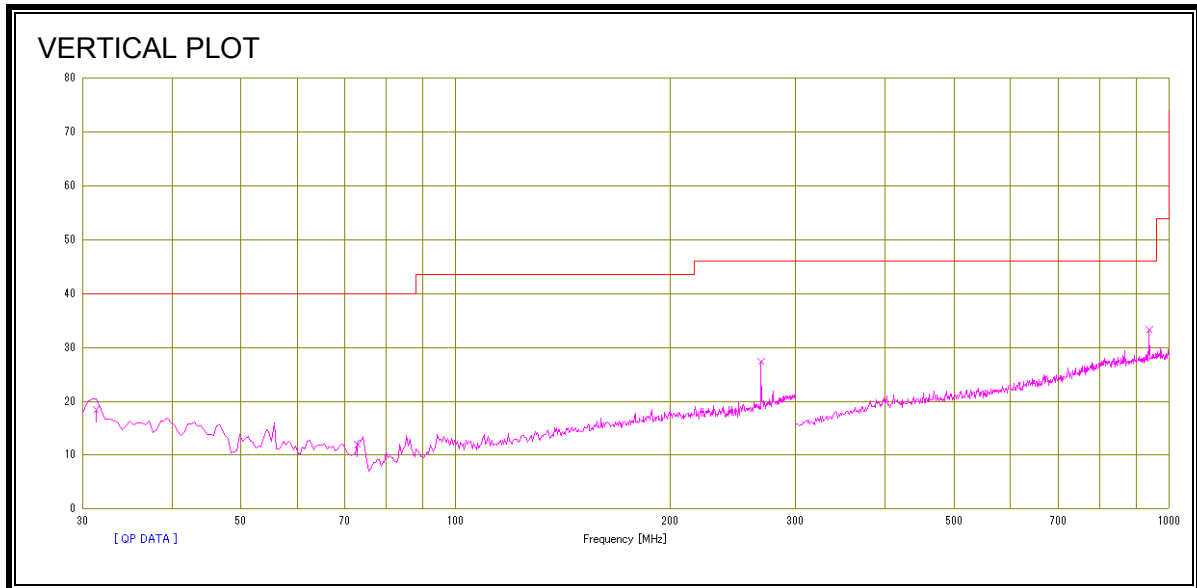

HORIZONTAL AND VERTICAL DATA

Test place Head Office EMC Lab. No.3 Semi Anechoic Chamber
 Report No. 32FE0108-HO
 Date 02/02/2012
 Temperature/ Humidity 23 deg.C/ 31% RH
 Engineer Tomohisa Nakagawa
 Mode Tx 11g 2462MHz

With Mitsumi AC Adaptor

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
Hori	93.900	QP	25.4	9.1	8.1	32.1	10.5	43.5	33.0	
Hori	402.170	QP	29.9	17.7	10.7	32.0	26.3	46.0	19.7	
Hori	938.397	QP	28.7	22.8	13.7	30.9	34.3	46.0	11.7	
Vert	31.461	QP	26.0	18.0	7.1	32.2	18.9	40.0	21.1	
Vert	43.615	QP	31.6	13.5	7.4	32.2	20.3	40.0	19.7	
Vert	85.294	QP	24.9	7.5	8.0	32.1	8.3	40.0	31.7	
Vert	268.114	QP	31.0	18.3	9.7	32.0	27.0	46.0	19.0	
Vert	938.397	QP	27.9	22.8	13.7	30.9	33.5	46.0	12.5	

Result = Reading + Ant Factor + Loss (Cable+Attenuator+Filter-Distance factor(above 10GHz)) - Gain(Amplifier)

*Other frequency noises omitted in this report were not seen or had enough margin (more than 20dB).

With Tabuchi AC Adaptor

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
Hori	94.993	QP	25.7	9.2	8.1	32.1	10.9	43.5	32.6	
Hori	402.171	QP	28.7	17.7	10.7	32.0	25.1	46.0	20.9	
Hori	670.884	QP	26.0	20.2	12.2	31.9	26.5	46.0	19.5	
Hori	938.397	QP	27.7	22.8	13.7	30.9	33.3	46.0	12.7	
Vert	31.350	QP	25.4	18.1	7.1	32.2	18.4	40.0	21.6	
Vert	72.856	QP	29.6	6.6	7.8	32.1	11.9	40.0	28.1	
Vert	268.049	QP	31.3	18.3	9.7	32.0	27.3	46.0	18.7	
Vert	938.367	QP	27.6	22.8	13.7	30.9	33.2	46.0	12.8	

Result = Reading + Ant Factor + Loss (Cable+Attenuator+Filter-Distance factor(above 10GHz)) - Gain(Amplifier)

*Other frequency noises omitted in this report were not seen or had enough margin (more than 20dB).

8 AC POWER LINE CONDUCTED EMISSIONS

LIMITS

FCC §15.207 (a)

RSS-Gen 7.2.4

Frequency of Emission (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.

TEST PROCEDURE

ANSI C63.4

RESULTS

With Mitsumi AC Adaptor


DATA OF CONDUCTED EMISSION TEST

UL Japan, Inc. Head Office EMC Lab. No. 4 Semi Anechoic Chamber
 Date : 2012/02/05

Report No. : 32FE0108-HO
 Power : AC 120V / 60Hz
 Temp./Humi. : 22deg. C / 32% RH
 Engineer : Takeshi Choda

Mode / Remarks : Mitsumi Adaptor Tx 11g 24Mbps 2462MHz

LIMIT : FCC15.207 QP
 FCC15.207 AV

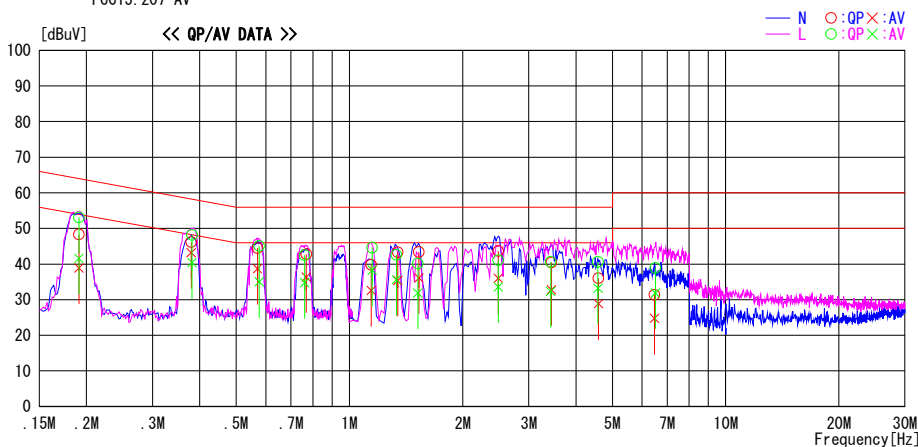

Frequency [MHz]	Reading Level		Corr. Factor	Results		Limit		Margin		Phase
	QP [dBuV]	AV [dBuV]		QP [dBuV]	AV [dBuV]	QP [dBuV]	AV [dBuV]	QP [dB]	AV [dB]	
0.19100	35.0	25.6	13.3	48.3	38.9	64.0	54.0	15.7	15.1	N
0.37997	32.9	29.9	13.3	46.2	43.2	58.3	48.3	12.1	5.1	N
0.56978	31.1	25.3	13.4	44.5	38.7	56.0	46.0	11.5	7.3	N
0.76822	29.4	23.0	13.4	42.8	36.4	56.0	46.0	13.2	9.6	N
1.14221	26.3	19.1	13.5	39.8	32.6	56.0	46.0	16.2	13.4	N
1.34375	29.8	21.9	13.5	43.3	35.4	56.0	46.0	12.7	10.6	N
1.53009	29.9	22.6	13.5	43.4	36.1	56.0	46.0	12.6	9.9	N
2.48864	29.9	22.3	13.7	43.6	36.0	56.0	46.0	12.4	10.0	N
3.44718	26.6	19.0	13.8	40.4	32.8	56.0	46.0	15.6	13.2	N
4.59212	22.0	14.9	14.0	36.0	28.9	56.0	46.0	20.0	17.1	N
6.46928	17.0	10.4	14.4	31.4	24.8	60.0	50.0	28.6	25.2	N
0.19088	39.8	28.3	13.3	53.1	41.6	64.0	54.0	10.9	12.4	L
0.38180	34.9	27.1	13.3	48.2	40.4	58.2	48.2	10.0	7.8	L
0.57614	31.7	21.6	13.4	45.1	35.0	56.0	46.0	10.9	11.0	L
0.76102	29.1	21.4	13.4	42.5	34.8	56.0	46.0	13.5	11.2	L
1.14979	31.1	24.8	13.5	44.6	38.3	56.0	46.0	11.4	7.7	L
1.33315	29.1	22.1	13.5	42.6	35.6	56.0	46.0	13.4	10.4	L
1.52071	26.6	18.4	13.5	40.1	31.9	56.0	46.0	15.9	14.1	L
2.48760	27.4	19.9	13.7	41.1	33.6	56.0	46.0	14.9	12.4	L
3.42600	26.8	18.5	13.8	40.6	32.3	56.0	46.0	15.4	13.7	L
4.57892	26.6	19.2	14.0	40.6	33.2	56.0	46.0	15.4	12.8	L
6.50563	24.5	17.5	14.4	38.9	31.9	60.0	50.0	21.1	18.1	L

CHART: WITH FACTOR. Peak hold data. CALCULATION: RESULT=READING+C. F (LISN LOSS+ATT LOSS +CABLE LOSS)
 Except for the above table : adequate margin data below the limits.

RESULTS

With Tabuchi AC Adaptor


DATA OF CONDUCTED EMISSION TEST

UL Japan, Inc. Head Office EMC Lab. No.4 Semi Anechoic Chamber
 Date : 2012/02/05

Report No. : 32FE0108-HO
 Power : AC 120V / 60Hz
 Temp./Humi. : 22deg. C / 32% RH
 Engineer : Takeshi Choda

Mode / Remarks : Tabuchi Adaptor Tx 11g 24Mbps 2462MHz

LIMIT : FCC15.207 QP
 FCC15.207 AV

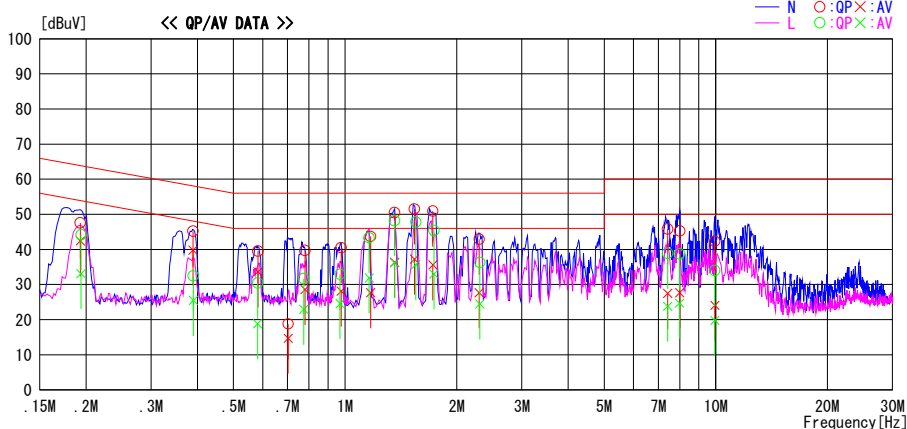

Frequency [MHz]	Reading Level		Corr. Factor	Results		Limit		Margin		Phase
	QP [dBuV]	AV [dBuV]		QP [dBuV]	AV [dBuV]	QP [dBuV]	AV [dBuV]	QP [dB]	AV [dB]	
0.19310	34.3	29.1	13.3	47.6	42.4	63.9	53.9	16.3	11.5	N
0.19410	30.9	19.8	13.3	44.2	33.1	63.9	53.9	19.7	20.8	L
0.38900	31.9	26.5	13.3	45.2	39.8	58.1	48.1	12.9	8.3	N
0.38936	19.2	12.2	13.3	32.5	25.5	58.1	48.1	25.6	22.6	L
0.58240	26.1	20.2	13.4	39.5	33.6	56.0	46.0	16.5	12.4	N
0.58104	17.0	5.4	13.4	30.4	18.8	56.0	46.0	25.6	27.2	L
0.70269	5.4	1.3	13.4	18.8	14.7	56.0	46.0	37.2	31.3	N
0.77363	18.3	9.5	13.4	31.7	22.9	56.0	46.0	24.3	23.1	L
0.77980	26.3	15.2	13.4	39.7	28.6	56.0	46.0	16.3	17.4	N
0.97600	27.1	14.7	13.4	40.5	28.1	56.0	46.0	15.5	17.9	N
0.96940	19.5	11.2	13.4	32.9	24.6	56.0	46.0	23.1	21.4	L
1.17199	30.2	14.2	13.5	43.7	27.7	56.0	46.0	12.3	18.3	N
1.16176	29.8	18.4	13.5	43.3	31.9	56.0	46.0	12.7	14.1	L
1.36010	37.0	22.8	13.5	50.5	36.3	56.0	46.0	5.5	9.7	N
1.36130	34.7	22.7	13.5	48.2	36.2	56.0	46.0	7.8	9.8	L
1.53800	38.0	23.7	13.5	51.5	37.2	56.0	46.0	4.5	8.8	N
1.55227	34.3	22.2	13.5	47.8	35.7	56.0	46.0	8.2	10.3	L
1.72640	37.4	22.1	13.5	50.9	35.6	56.0	46.0	5.1	10.4	N
1.73625	31.9	19.5	13.5	45.4	33.0	56.0	46.0	10.6	13.0	L
2.30270	29.3	14.1	13.6	42.9	27.7	56.0	46.0	13.1	18.3	N
2.31150	22.7	10.9	13.6	36.3	24.5	56.0	46.0	19.7	21.5	L
7.41606	31.3	13.0	14.5	45.8	27.5	60.0	50.0	14.2	22.5	N
7.41486	24.4	9.3	14.5	38.9	23.8	60.0	50.0	21.1	26.2	L
7.99318	30.6	13.0	14.7	45.3	27.7	60.0	50.0	14.7	22.3	N
7.98991	24.0	10.0	14.7	38.7	24.7	60.0	50.0	21.3	25.3	L
9.94095	27.5	9.3	14.8	42.3	24.1	60.0	50.0	17.7	25.9	N
9.94095	19.2	5.0	14.8	34.0	19.8	60.0	50.0	26.0	30.2	L

CHART: WITH FACTOR, Peak hold data. CALCULATION: RESULT=READING+C.F (LISN LOSS+ATT LOSS +CABLE LOSS)
 Except for the above table : adequate margin data below the limits.

9 MAXIMUM PERMISSIBLE EXPOSURE

FCC RULES

§1.1310 The criteria listed in Table 1 shall be used to evaluate the environmental impact of human exposure to radio-frequency (RF) radiation as specified in §1.1307(b), except in the case of portable devices which shall be evaluated according to the provisions of §2.1093 of this chapter.

TABLE 1—LIMITS FOR MAXIMUM PERMISSIBLE EXPOSURE (MPE)

Frequency range (MHz)	Electric field strength (V/m)	Magnetic field strength (A/m)	Power density (mW/cm ²)	Averaging time (minutes)
(A) Limits for Occupational/Controlled Exposures				
0.3–3.0	614	1.63	*(100)	6
3.0–30	1842/f	4.89/f	*(900/f ²)	6
30–300	61.4	0.163	1.0	6
300–1500	f/300	6
1500–100,000	5	6
(B) Limits for General Population/Uncontrolled Exposure				
0.3–1.34	614	1.63	*(100)	30
1.34–30	824/f	2.19/f	*(180/f ²)	30

TABLE 1—LIMITS FOR MAXIMUM PERMISSIBLE EXPOSURE (MPE)—Continued

Frequency range (MHz)	Electric field strength (V/m)	Magnetic field strength (A/m)	Power density (mW/cm ²)	Averaging time (minutes)
30–300	27.5	0.073	0.2	30
300–1500	f/1500	30
1500–100,000	1.0	30

f = frequency in MHz

* = Plane-wave equivalent power density

NOTE 1 TO TABLE 1: Occupational/controlled limits apply in situations in which persons are exposed as a consequence of their employment provided those persons are fully aware of the potential for exposure and can exercise control over their exposure. Limits for occupational/controlled exposure also apply in situations when an individual is transient through a location where occupational/controlled limits apply provided he or she is made aware of the potential for exposure.

NOTE 2 TO TABLE 1: General population/uncontrolled exposures apply in situations in which the general public may be exposed, or in which persons that are exposed as a consequence of their employment may not be fully aware of the potential for exposure or can not exercise control over their exposure.

IC RULES

IC Safety Code 6, Section 2.2.1 (a) A person other than an RF and microwave exposed worker shall not be exposed to electromagnetic radiation in a frequency band listed in Column 1 of Table 5, if the field strength exceeds the value given in Column 2 or 3 of Table 5, when averaged spatially and over time, or if the power density exceeds the value given in Column 4 of Table 5, when averaged spatially and over time.

**Table 5
 Exposure Limits for Persons Not Classed As RF and Microwave Exposed Workers (Including the General Public)**

1 Frequency (MHz)	2 Electric Field Strength; rms (V/m)	3 Magnetic Field Strength; rms (A/m)	4 Power Density (W/m ²)	5 Averaging Time (min)
0.003–1	280	2.19		6
1–10	280/ <i>f</i>	2.19/ <i>f</i>		6
10–30	28	2.19/ <i>f</i>		6
30–300	28	0.073	2*	6
300–1 500	1.585 <i>f</i> ^{0.5}	0.0042 <i>f</i> ^{0.5}	<i>f</i> /150	6
1 500–15 000	61.4	0.163	10	6
15 000–150 000	61.4	0.163	10	616 000 / <i>f</i> ^{1.2}
150 000–300 000	0.158 <i>f</i> ^{0.5}	4.21 x 10 ⁻⁴ <i>f</i> ^{0.5}	6.67 x 10 ⁻⁵ <i>f</i>	616 000 / <i>f</i> ^{1.2}

* Power density limit is applicable at frequencies greater than 100 MHz.

- Notes:**
1. Frequency, *f*, is in MHz.
 2. A power density of 10 W/m² is equivalent to 1 mW/cm².
 3. A magnetic field strength of 1 A/m corresponds to 1.257 microtesla (μT) or 12.57 milligauss (mG).

EQUATIONS

Power density is given by:

$$S = \text{EIRP} / (4 * \text{Pi} * \text{D}^2)$$

where

S = Power density in W/m²
EIRP = Equivalent Isotropic Radiated Power in W
D = Separation distance in m

Power density in units of W/m² is converted to units of mWc/m² by dividing by 10.

Distance is given by:

$$D = \text{SQRT} (\text{EIRP} / (4 * \text{Pi} * S))$$

where

D = Separation distance in m
EIRP = Equivalent Isotropic Radiated Power in W
S = Power density in W/m²

For multiple colocated transmitters operating simultaneously in frequency bands where the limit is identical, the total power density is calculated using the total EIRP obtained by summing the Power * Gain product (in linear units) of each transmitter.

$$\text{Total EIRP} = (P1 * G1) + (P2 * G2) + \dots + (Pn * Gn)$$

where

Px = Power of transmitter x
Gx = Numeric gain of antenna x

In the table(s) below, Power and Gain are entered in units of dBm and dBi respectively and conversions to linear forms are used for the calculations.

LIMITS

From FCC §1.1310 Table 1 (B), the maximum value of S = 1.0 mW/cm²

From IC Safety Code 6, Section 2.2 Table 5 Column 4, S = 10 W/m²

RESULTS

(MPE distance equals 20 cm)

Band	Mode	Separation Distance (m)	Output AV Power (dBm)	Antenna Gain (dBi)	IC Power Density (W/m ²)	FCC Power Density (mW/cm ²)
2.4 GHz	WLAN	0.20	5.50	-1.50	0.005	0.0005