



**FCC 47 CFR PART 15 SUBPART E &  
INDUSTRY CANADA RSS-210**

**TEST REPORT**

**For**

**Wireless LAN ,Bluetooth Combo Module**

**Model: DWM-W091**

**Trade Name: MITSUMI**

*Issued to*

**mitsumi electric co.,ltd.  
1601,SAKAI,ATSUGI-SHI,KANAGAWA, 243-8533 JAPAN**

*Issued by*

**Compliance Certification Services Inc.  
No.11, Wu-Gong 6th Rd., Wugu Industrial Park,  
New Taipei City 248, Taiwan (R.O.C.)  
<http://www.ccsrf.com>  
[service@ccsrf.com](mailto:service@ccsrf.com)  
Issued Date: August 20, 2012**



---

**Note:** This report shall not be reproduced except in full, without the written approval of Compliance Certification Services Inc. This document may be altered or revised by Compliance Certification Services Inc. personnel only, and shall be noted in the revision section of the document.



**Revision History**

Rev.	Issue Date	Revisions	Effect Page	Revised By
00	August 20, 2012	Initial Issue	ALL	Eunice Shen



## **TABLE OF CONTENTS**

<b>1. TEST RESULT CERTIFICATION.....</b>	<b>4</b>
<b>2. EUT DESCRIPTION .....</b>	<b>5</b>
<b>3. TEST METHODOLOGY .....</b>	<b>7</b>
3.1 EUT CONFIGURATION .....	7
3.2 EUT EXERCISE .....	7
3.3 GENERAL TEST PROCEDURES.....	7
3.4 FCC PART 15.205 RESTRICTED BANDS OF OPERATIONS.....	8
3.5 DESCRIPTION OF TEST MODES.....	9
<b>4. INSTRUMENT CALIBRATION.....</b>	<b>10</b>
4.1 MEASURING INSTRUMENT CALIBRATION .....	10
4.2 MEASUREMENT EQUIPMENT USED.....	10
4.3 MEASUREMENT UNCERTAINTY.....	11
<b>5. FACILITIES AND ACCREDITATIONS .....</b>	<b>12</b>
5.1 FACILITIES .....	12
5.2 EQUIPMENT .....	12
5.3 LABORATORY ACCREDITATIONS AND LISTING.....	12
5.4 TABLE OF ACCREDITATIONS AND LISTINGS .....	13
<b>6. SETUP OF EQUIPMENT UNDER TEST .....</b>	<b>14</b>
6.1 SETUP CONFIGURATION OF EUT .....	14
6.2 SUPPORT EQUIPMENT .....	14
<b>7. FCC PART 15 REQUIREMENTS &amp; RSS 210 REQUIREMENTS .....</b>	<b>15</b>
7.1 DUTY CYCLE.....	15
7.2 99% BANDWIDTH.....	17
7.3 26 DB EMISSION BANDWIDTH .....	28
7.4 MAXIMUM CONDUCTED OUTPUT POWER .....	39
7.5 BAND EDGES MEASUREMENT .....	53
7.6 PEAK POWER SPECTRAL DENSITY .....	62
7.7 PEAK EXCURSION .....	74
7.8 RADIATED UNDESIRABLE EMISSION.....	86
7.9 CONDUCTED UNDESIRABLE EMISSION .....	109
7.10 POWERLINE CONDUCTED EMISSIONS .....	119
7.11 FREQUENCY STABILITY .....	122
7.12 DYNAMIC FREQUENCY SELECTION.....	135
<b>APPENDIX I RADIO FREQUENCY EXPOSURE .....</b>	<b>160</b>
<b>APPENDIX 2 PHOTOGRAPHS OF TEST SETUP.....</b>	<b>163</b>
<b>APPENDIX 1 - PHOTOGRAPHS OF EUT</b>	



# 1. TEST RESULT CERTIFICATION

**Applicant:** MITSUMI ELECTRIC CO.,LTD.  
1601,SAKAI,ATSUGI-SHI,KANAGAWA, 243-8533 JAPAN

**Manufacturer:** MITSUMI ELECTRIC CO.,LTD.  
1601,SAKAI,ATSUGI-SHI,KANAGAWA, 243-8533 JAPAN

**Equipment Under Test:** Wireless LAN, Bluetooth Combo Module

**Trade Name:** MITSUMI

**Model:** DWM-W091

**Date of Test:** July 21 ~ August 18, 2008

APPLICABLE STANDARDS	
STANDARD	TEST RESULT
FCC 47 CFR Part 15 Subpart E & Industry Canada RSS-210 Issue 8 Annex 9 Industry Canada RSS-GEN Issue 3	No non-compliance noted

### We hereby certify that:

Compliance Certification Services Inc. tested the above equipment. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in **ANSI C63.4: 2003** and the energy emitted by the sample EUT tested as described in this report is in compliance with conducted and radiated emission limits of FCC Rules Part 15.407 and Industry Canada RSS-210 Issue 8.

The test results of this report relate only to the tested sample identified in this report.

Approved by:

Reviewed by:

---

Miller Lee  
Section Manager  
Compliance Certification Services Inc.

---

Gina Lo  
Section Manager  
Compliance Certification Services Inc.



## 2. EUT DESCRIPTION

<b>Product</b>	Wireless LAN ,Bluetooth Combo Module				
<b>Trade Name</b>	MITSUMI				
<b>Model Number</b>	DWM-W091				
<b>Model Discrepancy</b>	N/A				
<b>Received Date</b>	July 2, 2012				
<b>Power Supply</b>	Powered by host device				
<b>Operating Frequency Range &amp; Number of Channels</b>		<b>Mode</b>	<b>Frequency Range (MHz)</b>	<b>Number of Channels</b>	
	UNII Band I	IEEE 802.11a	5180 – 5240	4 Channels	
		IEEE 802.11n HT 20 MHz	5180 – 5240	4 Channels	
	UNII Band II	IEEE 802.11a	5260 - 5320	4 Channels	
		IEEE 802.11n HT 20 MHz	5260 - 5320	4 Channels	
	UNII Band III	IEEE 802.11a	5500 - 5700	11 Channels	
IEEE 802.11n HT 20 MHz		5500 – 5700	11 Channels		
<b>Transmit Power</b>		<b>Mode</b>	<b>Frequency Range (MHz)</b>	<b>Output Power (dBm)</b>	<b>Output Power (mw)</b>
	UNII Band I	IEEE 802.11a	5180 – 5240	11.87	15.3815
		IEEE 802.11n HT 20 MHz	5180 – 5240	11.50	14.1254
	UNII Band II	IEEE 802.11a	5260 - 5320	12.04	15.9956
		IEEE 802.11n HT 20 MHz	5260 - 5320	11.55	14.2889
	UNII Band III	IEEE 802.11a	5500 - 5700	11.20	13.1826
IEEE 802.11n HT 20 MHz		5500 – 5700	11.55	14.2889	
<b>Modulation Technique</b>	OFDM (QPSK, BPSK, 16-QAM, 64-QAM)				
<b>Transmit Data Rate</b>	IEEE 802.11a mode: 54, 48, 36, 24, 18, 12, 9, 6 Mbps IEEE 802.11n HT 20 MHz: OFDM (6.5, 7.2, 13, 14.4, 14.44, 19.5, 21.7, 26, 28.89, 28.9, 39, 43.3, 43.33 52, 57.78, 57.8, 58.5, 65.0, 72.2, 78, 86.67, 104, 115.56, 117, 130, 144.44 Mbps)				
<b>Antenna Specification</b>	1. Wieson Technologies Co., LTD. / PIFA Antenna P/N: GY196HT0321-024-H(WLAN Main) / Gain: 2.89 dBi GY196HT0321-023-H (WLAN Aux) / Gain: 1.02 dBi 2. Jieng Tai International Electric Corporation / PIFA Antenna P/N: JT1201507Y0311 (WLAN Main) / Gain: 2.31 dBi JT1201507Y1511 (WLAN Aux) / Gain: -0.98 dBi				



**Operation Frequency:**

UNLICENSED NATIONAL INFORMATION INFRASTRUCTURE (U-NII)	
CHANNEL	MHz
36	5180
38	5190
40	5200
44	5220
46	5230
48	5240
52	5260
54	5270
56	5280
60	5300
62	5310
64	5320
100	5500
102	5510
104	5520
108	5540
110	5550
112	5560
116	5580
118	5590
120	5600
124	5620
126	5630
128	5640
132	5660
134	5670
136	5680
140	5700

**Remark:** *The sample selected for test was engineering sample that approximated to production product and was provided by manufacturer.*



### **3. TEST METHODOLOGY**

Both conducted and radiated testing was performed according to the procedures in ANSI C63.4: 2003 Radiated testing was performed at an antenna to EUT distance 3 meters.

The tests documented in this report were performed in accordance with ANSI C63.4: 2003 and FCC CFR 47 Part 15.207, 15.209 and 15.407, RSS-GEN Issue 3, and RSS-210 Issue 8.

#### **3.1 EUT CONFIGURATION**

The EUT configuration for testing is installed for RF field strength measurement to meet the Commissions requirement, and is operated in a manner intended to generate the maximum emission in a continuous normal application.

#### **3.2 EUT EXERCISE**

The EUT is operated in the engineering mode to fix the Tx frequency for the purposes of measurement.

According to its specifications, the EUT must comply with the requirements of Section 15.407 under the FCC Rules Part 15 Subpart E.

#### **3.3 GENERAL TEST PROCEDURES**

##### **Conducted Emissions**

The EUT is placed on the turntable, which is positioned at 0.8 m above the ground plane. According to the requirements in Section 13.1.4.1 of ANSI C63.4, the conducted emission from the EUT is measured in the frequency range between 0.15 MHz and 30MHz, using the CISPR Quasi-Peak detector mode.

##### **Radiated Emissions**

The EUT is placed on the turntable, which is 0.8 m above the ground plane. The turntable is then rotated for 360 degrees to determine the proper orientation for the maximum emission level. The EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emission level. And, each emission is to be maximized by changing the horizontal and vertical polarization of the receiving antenna. In order to find out the maximum emissions, exploratory radiated emission measurements were made according to the requirements in Section 13.1.4.1 of ANSI C63.4: 2003.



### 3.4 FCC PART 15.205 RESTRICTED BANDS OF OPERATIONS

(a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
<sup>1</sup> 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 -	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.52525	2655 - 2900	22.01 - 23.12
8.41425 - 8.41475	156.7 - 156.9	3260 - 3267	23.6 - 24.0
12.29 - 12.293	162.0125 - 167.17	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	167.72 - 173.2	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	240 - 285	3600 - 4400	( <sup>2</sup> )
13.36 - 13.41	322 - 335.4		

<sup>1</sup> Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

<sup>2</sup> Above 38.6

(b) Except as provided in paragraphs (d) and (e), the field strength of emissions appearing within these frequency bands shall not exceed the limits shown in Section 15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in Section 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in Section 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in Section 15.35 apply to these measurements.





### 3.5 DESCRIPTION OF TEST MODES

The EUT (model: DWM-W091) is a 1x1 802.11abgn+ BT combo card module. WLAN and Bluetooth cannot transmit simultaneously.

Two PIFA antennas are supplied: Wieson and Jieng Tai, Wieson with the higher gain was selected for final test.

Software used to control the EUT for staying in continuous transmitting mode was programmed.

After verification, all tests were carried out with the worst case test modes as shown below except radiated spurious emission below 1GHz, which worst case was in normal link mode only.

#### UNII Band I:

##### **IEEE 802.11a for 5180 ~ 5240MHz:**

Channel Low (5180MHz), Channel Mid (5220MHz) and Channel High (5240MHz) with 6Mbps data rate were chosen for full testing.

##### **IEEE 802.11n HT 20 MHz for 5180 ~ 5240MHz:**

Channel Low (5180MHz), Channel Mid (5220MHz) and Channel High (5240MHz) with 6.5Mbps data rate were chosen for full testing.

#### UNII Band II:

##### **IEEE 802.11a for 5260 ~ 5320MHz:**

Channel Low (5260MHz), Channel Mid (5280MHz) and Channel High (5320MHz) with 6Mbps data rate were chosen for full testing.

##### **IEEE 802.11n HT 20 MHz for 5260 ~ 5320MHz:**

Channel Low (5260MHz), Channel Mid (5280MHz) and Channel High (5320MHz) with 6.5Mbps data rate were chosen for full testing.

#### UNII Band III:

##### **IEEE 802.11a for 5500 ~ 5700MHz:**

Channel Low (5500MHz), Channel Mid (5600MHz) and Channel High (5700MHz) with 6Mbps data rate were chosen for full testing.

##### **IEEE 802.11n HT 20 MHz for 5500 ~ 5700MHz:**

Channel Low (5500MHz), Channel Mid (5600MHz) and Channel High (5700MHz) with 6.5Mbps data rate were chosen for full testing.



## 4. INSTRUMENT CALIBRATION

### 4.1 MEASURING INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment, which is traceable to recognized national standards.

### 4.2 MEASUREMENT EQUIPMENT USED

#### Equipment Used for Emissions Measurement

*Remark: Each piece of equipment is scheduled for calibration once a year and Loop Antenna is scheduled for calibration once three years.*

Conducted Emissions Test Site				
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
Spectrum Analyzer	Agilent	E4446A	MY43360131	03/16/2013
Power Meter	Anritsu	ML2495A	1012009	04/26/2013
Power Sensor	Anritsu	MA2411B	0917072	04/26/2013

Wugu 966 Chamber A				
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
Spectrum Analyzer	Agilent	E4446A	US42510252	11/02/2012
EMI Test Receiver	R&S	ESCI	100064	02/16/2013
Pre-Amplifier	Mini-Circuits	ZFL-1000LN	SF350700823	01/12/2013
Pre-Amplifier	MITEQ	AFS44-00102650-42-10P-44	1415367	11/19/2012
Bilog Antenna	Sunol Sciences	JB3	A030105	10/03/2012
Horn Antenna	EMCO	3117	00055165	01/11/2013
Horn Antenna	EMCO	3116	00026370	10/12/2012
Loop Antenna	EMCO	6502	8905/2356	06/10/2013
Turn Table	CCS	CC-T-1F	N/A	N.C.R
Antenna Tower	CCS	CC-A-1F	N/A	N.C.R
Controller	CCS	CC-C-1F	N/A	N.C.R
Site NSA	CCS	N/A	N/A	12/25/2012
Test S/W	EZ-EMC (CCS-3A1RE)			

Conducted Emission room # A				
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
EMI Test Receiver	R&S	ESCI	101203	07/25/2013
LISN	R&S	ESH3-Z5	848773/014	12/07/2012
LISN	SCHWARZBECK	NSLK 8127	8127-541	12/14/2012
Coaxial Cable	Commate	CFD300-NL	NA	12/07/2012
Test S/W	CCS-3A1-CE			

Dynamic Frequency Selection				
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
Spectrum Analyzer	Rohde&Schwarz	FSEK 30	100264	05/23/2013
Signal Generator	Agilent	E8267C	US42340162	08/07/2013



### 4.3 MEASUREMENT UNCERTAINTY

PARAMETER	UNCERTAINTY
Powerline Conducted Emission	+/- 1.2575
3M Semi Anechoic Chamber / 30M~200M	+/- 4.0138
3M Semi Anechoic Chamber / 200M~1000M	+/- 3.9483
3M Semi Anechoic Chamber / 1G~8G	+/- 2.5975
3M Semi Anechoic Chamber / 8G~18G	+/- 2.6112
3M Semi Anechoic Chamber / 18G~26G	+/- 2.7389
3M Semi Anechoic Chamber / 26G~40G	+/- 2.9683

**Remark:** This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of  $k=2$ .



## **5. FACILITIES AND ACCREDITATIONS**

### **5.1 FACILITIES**

All measurement facilities used to collect the measurement data are located at

No.199, Chunghsen Road, Hsintien City, Taipei Hsien, Taiwan, R.O.C.

Tel: 886-2-2217-0894 / Fax: 886-2-2217-1029

No.11, Wu-Gong 6th Rd., Wugu Industrial Park, New Taipei City 248, Taiwan (R.O.C.)

Tel: 886-2-2299-9720 / Fax: 886-2-2298-4045

No.81-1, Lane 210, Bade 2nd Rd., Luchu Hsiang, Taoyuan Hsien 338, Taiwan

Tel: 886-3-324-0332 / Fax: 886-3-324-5235

The sites are constructed in conformance with the requirements of ANSI C63.7, ANSI C63.4 and CISPR Publication 22.

### **5.2 EQUIPMENT**

Radiated emissions are measured with one or more of the following types of linearly polarized antennas: tuned dipole, biconical, log periodic, bi-log, and/or ridged waveguide, horn. Spectrum analyzers with pre-selectors and quasi-peak detectors are used to perform radiated measurements.

Conducted emissions are measured with Line Impedance Stabilization Networks and EMI Test Receivers.

Calibrated wideband preamplifiers, coaxial cables, and coaxial attenuators are also used for making measurements.




All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

### **5.3 LABORATORY ACCREDITATIONS AND LISTING**

The test facilities used to perform radiated and conducted emissions tests are accredited by American Association for Laboratory Accreditation Program for the specific scope accreditation under Lab Code: 0824-01 to perform Electromagnetic Interference tests according to FCC Part 15 and CISPR 22 requirements. In addition, the test facilities are listed with Industry Canada, Certification and Engineering Bureau, IC 2324G-1 for 3M Semi Anechoic Chamber A, 2324G-2 for 3M Semi Anechoic Chamber B.



### 5.4 TABLE OF ACCREDITATIONS AND LISTINGS

Country	Agency	Scope of Accreditation	Logo
USA	FCC	3M Semi Anechoic Chamber (FCC MRA: TW1039) to perform FCC Part 15 measurements	 FCC MRA: TW1039
Taiwan	TAF	LP0002, RTTE01, FCC Method-47 CFR Part 15 Subpart C, D, E, RSS-210, RSS-310 IDA TS SRD, AS/NZS 4268, AS/NZS 4771, TS 12.1 & 12.2, ETSI EN 300 440-1, ETSI EN 300 440-2, ETSI EN 300 328, ETSI EN 300 220-1, ETSI EN 300 220-2, ETSI EN 301 893, ETSI EN 301 489-1/3/7/17 FCC OET Bulletin 65 + Supplement C, EN 50360, EN 50361, EN 50371, RSS 102, EN 50383, EN 50385, EN 50392, IEC 62209, CNS 14958-1, CNS 14959 FCC Method -47 CFR Part 15 Subpart B IEC / EN 61000-3-2, IEC / EN 61000-3-3, IEC / EN 61000-4-2/3/4/5/6/8/11	
Canada	Industry Canada	3M Semi Anechoic Chamber (IC 2324G-1 / IC 2324G-2) to perform	 IC 2324G-1 IC 2324G-2

\* No part of this report may be used to claim or imply product endorsement by A2LA or any agency of the US Government.



## 6. SETUP OF EQUIPMENT UNDER TEST

### 6.1 SETUP CONFIGURATION OF EUT

See test photographs attached in Appendix I for the actual connections between EUT and support equipment.

### 6.2 SUPPORT EQUIPMENT

No.	Device Type	Brand	Model	Series No.	FCC ID	Data Cable	Power Cord
1	Notebook PC	HP	dv6-1332TX	CNF9491GPS	PD9112BNHU	N/A	AC I/P: Unshielded, 1.8m DC O/P: Unshielded, 1.8m with a core
2	Notebook PC	HP	N/A	N/A	FCC DoC	N/A	AC I/P: Unshielded, 1.8m DC O/P: Unshielded, 1.8m with a core
3	Test Kit	N/A	N/A	N/A	N/A	N/A	N/A
4	Power Supply	ABM	8301HD	D011531	FCC DoC	N/A	Shielded, 1.5m
5	LCD Monitor	DELL	3008WFP	CN-0XK290-7161 8-846-169L	FCC DoC	Unshielded, 1.8m	Shielded, 1.8m
6	HDD	TeraSyS	F12-UF(COMBO)	A0100215-420014	FCC DoC	Shielded, 1.8m	N/A
7	USB Mouse	DELL	MO56UC	E1G01GBO	FCC DoC	Shielded, 1.8m	N/A

**Remark:**

1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.



## 7. FCC PART 15 REQUIREMENTS & RSS 210 REQUIREMENTS

### 7.1 DUTY CYCLE

#### LIMIT

KDB 789033

#### TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer or radiated field strength. The RBW is set to 1 MHz and the VBW is set to 1 MHz. The sweep time is coupled and the span is set to 0 Hz.


#### TEST RESULTS

Mode	ON Time (msec)	Period (msec)	Duty Cycle (%)
802.11a	1.386	1.411	98
802.11n	1.292	1.321	98




### DUTY CYCLE PLOTS

802.11a

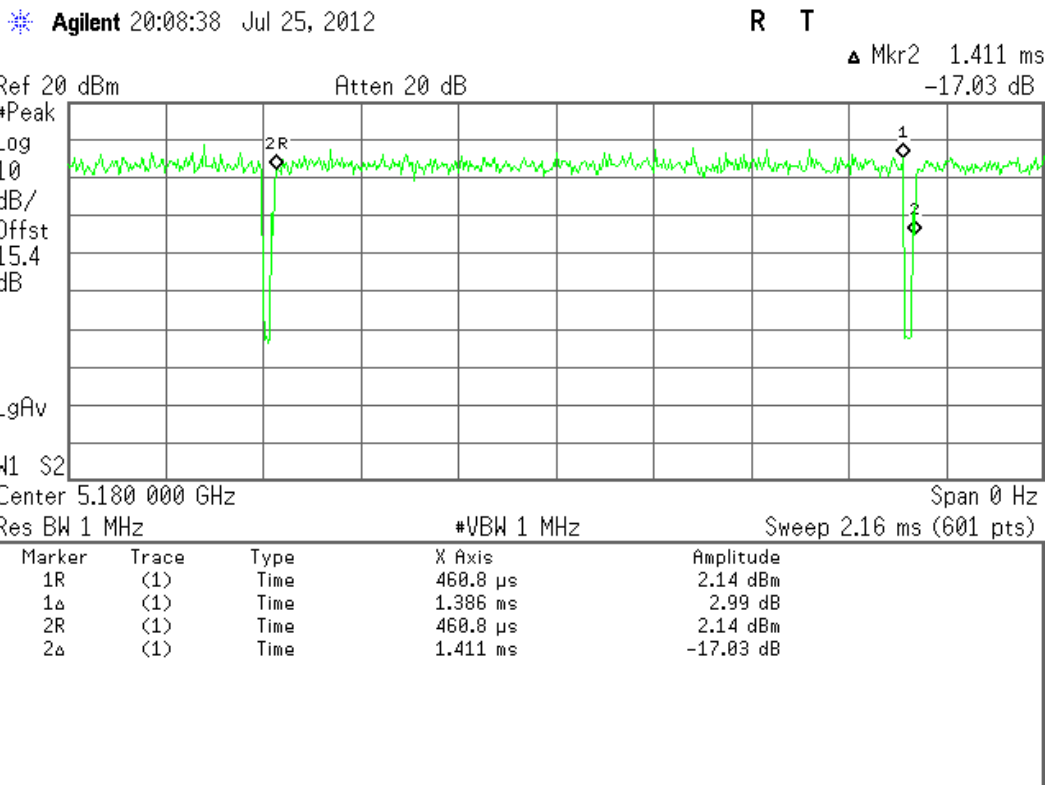

802.11HT20

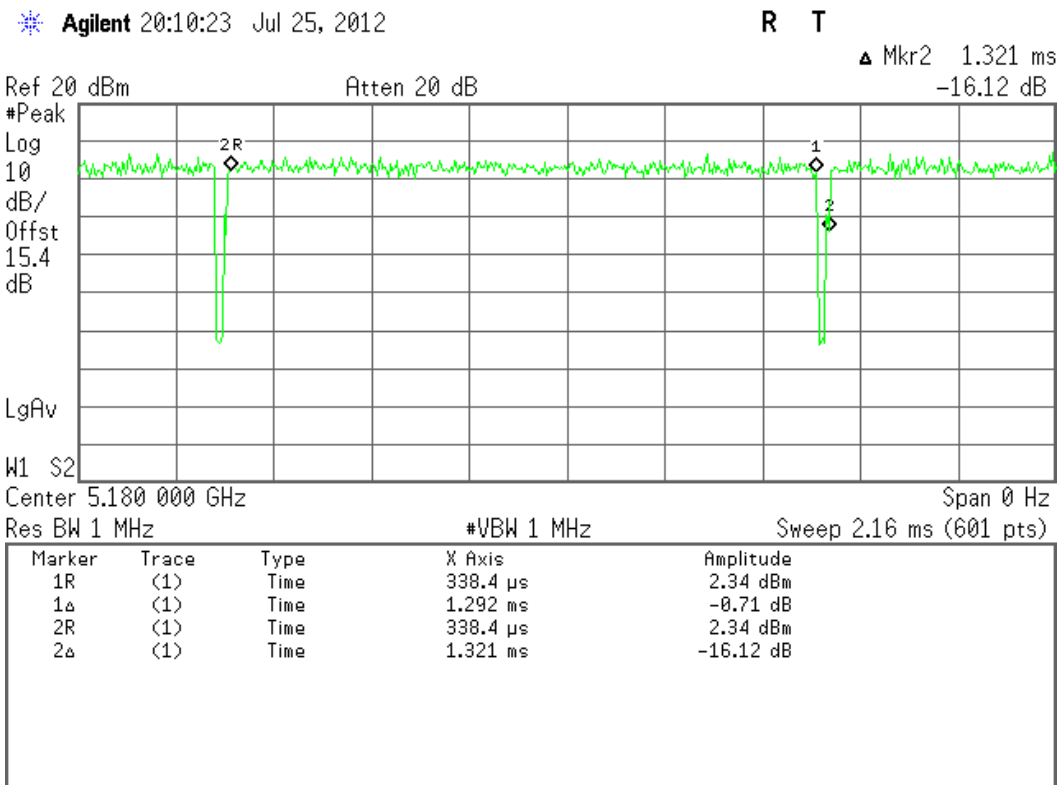






## **7.2 99% BANDWIDTH**

### **TEST CONFIGURATION**



### **TEST PROCEDURE**

The resolution bandwidth shall be set to as close to 1% of the selected span as is possible without being below 1%. The video bandwidth shall be set to 3 times the resolution bandwidth. Video averaging is not permitted. Where practical, a sampling detector shall be used since a peak or, peak hold.



## TEST RESULTS

### Test mode: IEEE 802.11a mode / 5180 ~ 5240MHz

Channel	Frequency (MHz)	Bandwidth (MHz)
Low	5180	16.3692
Mid	5220	16.3595
High	5240	16.3512

### Test mode: IEEE 802.11n HT 20 MHz Channel mode / 5180 ~ 5240MHz

Channel	Frequency (MHz)	Bandwidth (MHz)
Low	5180	17.4438
Mid	5220	17.4420
High	5240	17.4257

### Test mode: IEEE 802.11a mode / 5260 ~ 5320MHz

Channel	Frequency (MHz)	Bandwidth (MHz)
Low	5260	16.3579
Mid	5280	16.3456
High	5320	16.3562

### Test mode: IEEE 802.11n HT 20 MHz Channel mode / 5260 ~ 5320MHz

Channel	Frequency (MHz)	Bandwidth (MHz)
Low	5260	17.4325
Mid	5280	17.4396
High	5320	17.4379

### Test mode: IEEE 802.11a mode / 5500 ~ 5700MHz

Channel	Frequency (MHz)	Bandwidth (MHz)
Low	5500	16.3902
Mid	5600	16.3513
High	5700	16.3700

### Test mode: IEEE 802.11n HT 20 MHz Channel mode / 5500 ~ 5700MHz

Channel	Frequency (MHz)	Bandwidth (MHz)
Low	5500	17.4483
Mid	5600	17.4316
High	5700	17.4316




**Test Plot**

**IEEE 802.11a mode / 5180 ~ 5240MHz**

**99% Bandwidth (CH Low)**

Agilent 14:46:27 Jul 26, 2012

R T

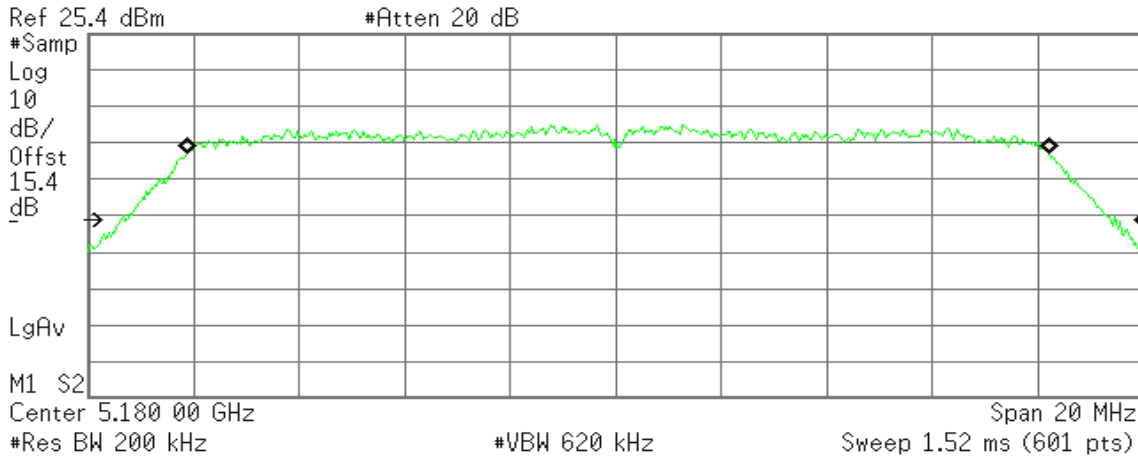

**Occupied Bandwidth**  
16.3692 MHz


**Occ BW % Pwr** 99.00 %  
**x dB** -26.00 dB

**Transmit Freq Error** 39.064 kHz  
**x dB Bandwidth** 18.869 MHz\*

**99% Bandwidth (CH Mid)**

Agilent 14:49:09 Jul 26, 2012

R T

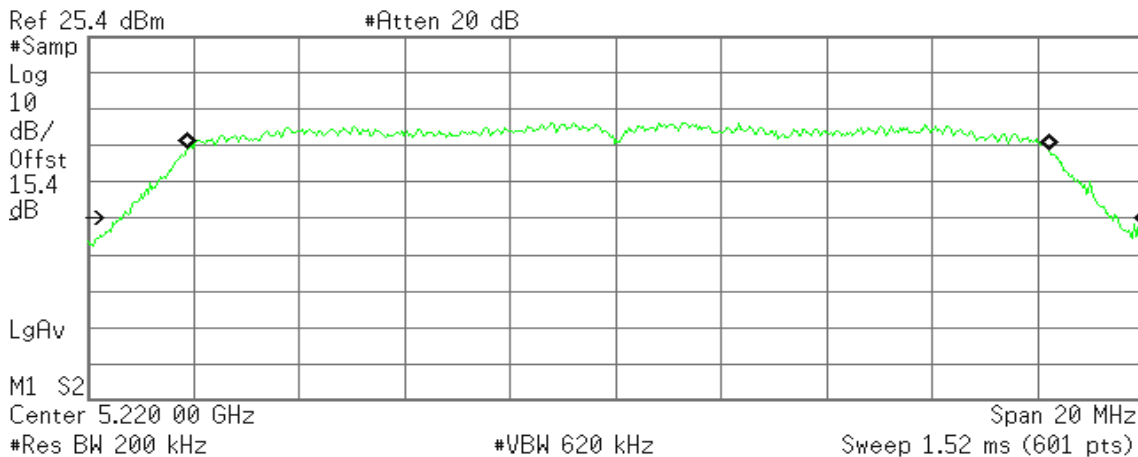

**Occupied Bandwidth**  
16.3595 MHz

**Occ BW % Pwr** 99.00 %  
**x dB** -26.00 dB


**Transmit Freq Error** 46.335 kHz  
**x dB Bandwidth** 18.849 MHz\*



### 99% Bandwidth (CH High)

Agilent 14:49:52 Jul 26, 2012

R T

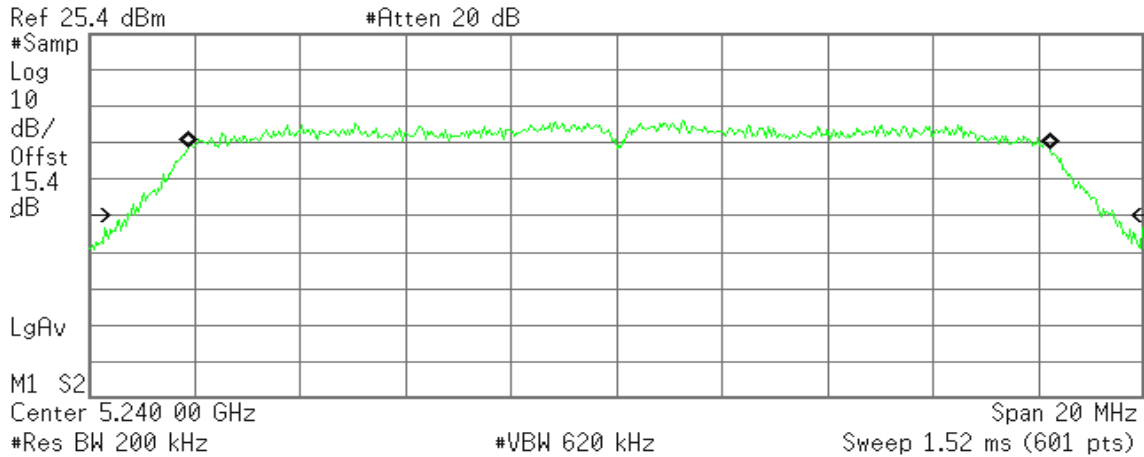

Occupied Bandwidth  
16.3512 MHz

Occ BW % Pwr 99.00 %  
x dB -26.00 dB


Transmit Freq Error 41.377 kHz  
x dB Bandwidth 18.698 MHz\*

### IEEE 802.11n HT 20 MHz Channel mode / 5180 ~ 5240MHz

#### 99% Bandwidth (CH Low)

Agilent 15:30:03 Jul 26, 2012

R T

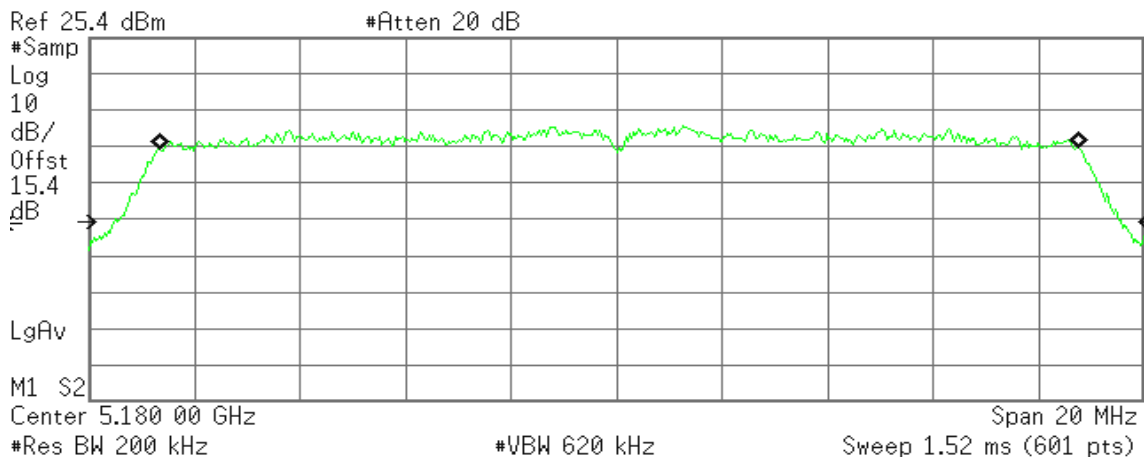

Occupied Bandwidth  
17.4438 MHz

Occ BW % Pwr 99.00 %  
x dB -26.00 dB


Transmit Freq Error 41.018 kHz  
x dB Bandwidth 19.094 MHz\*



### 99% Bandwidth (CH Mid)

Agilent 15:31:40 Jul 26, 2012

R T

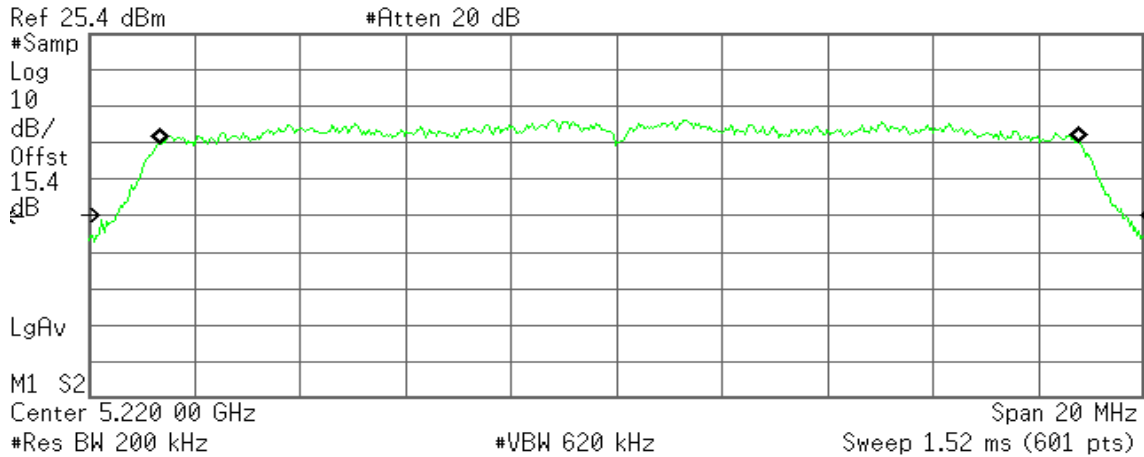

**Occupied Bandwidth**  
17.4420 MHz


**Occ BW % Pwr** 99.00 %  
**x dB** -26.00 dB

**Transmit Freq Error** 43.465 kHz  
**x dB Bandwidth** 19.058 MHz\*

### 99% Bandwidth (CH High)

Agilent 15:34:27 Jul 26, 2012

R T

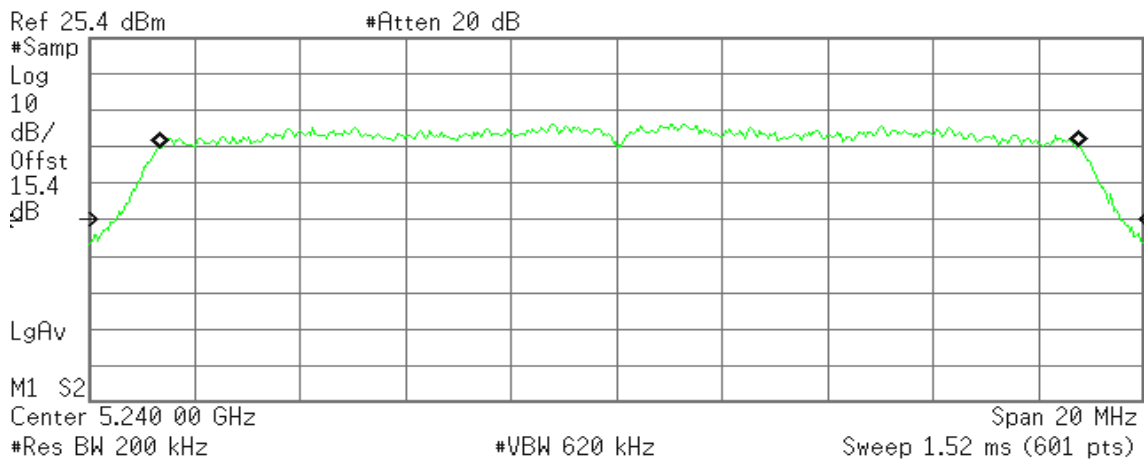

**Occupied Bandwidth**  
17.4257 MHz

**Occ BW % Pwr** 99.00 %  
**x dB** -26.00 dB

**Transmit Freq Error** 45.499 kHz  
**x dB Bandwidth** 19.061 MHz\*




**IEEE 802.11a mode / 5260 ~ 5320MHz**

**99% Bandwidth (CH Low)**

Agilent 14:50:36 Jul 26, 2012

R T

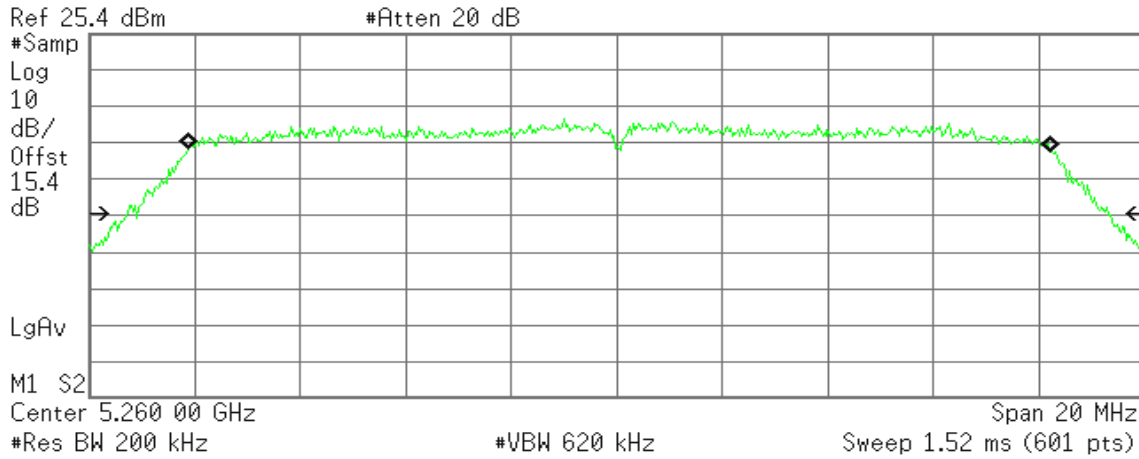

**Occupied Bandwidth**  
**16.3579 MHz**


**Occ BW % Pwr** 99.00 %  
**x dB** -26.00 dB

**Transmit Freq Error** 54.801 kHz  
**x dB Bandwidth** 18.624 MHz\*

**99% Bandwidth (CH Mid)**

Agilent 14:51:22 Jul 26, 2012

R T

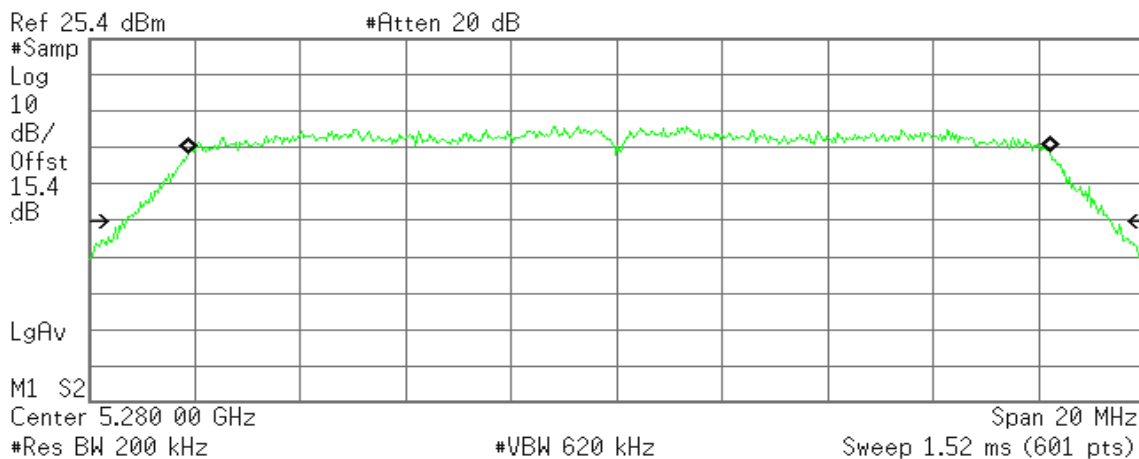

**Occupied Bandwidth**  
**16.3456 MHz**

**Occ BW % Pwr** 99.00 %  
**x dB** -26.00 dB


**Transmit Freq Error** 46.445 kHz  
**x dB Bandwidth** 18.680 MHz\*



### 99% Bandwidth (CH High)

Agilent 14:52:21 Jul 26, 2012

R T

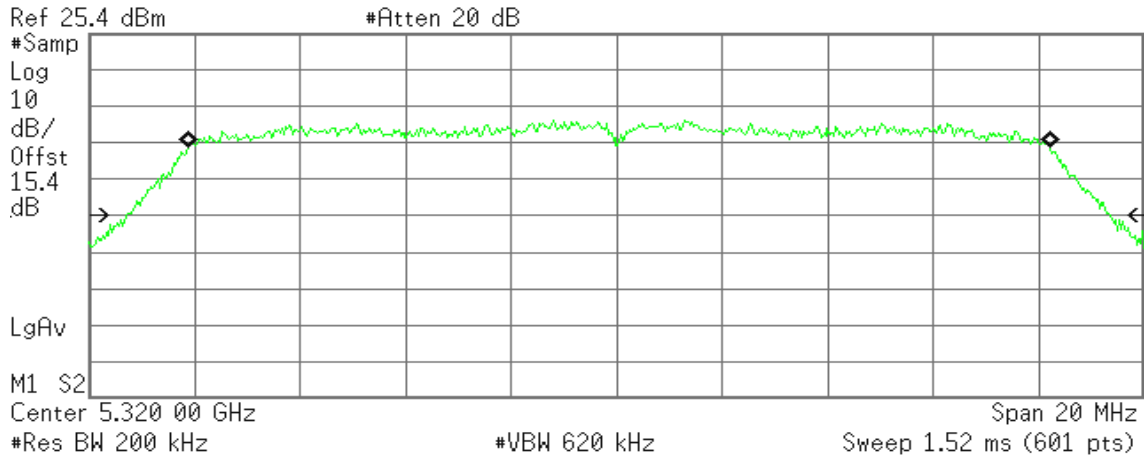

Occupied Bandwidth  
16.3562 MHz

Occ BW % Pwr 99.00 %  
x dB -26.00 dB


Transmit Freq Error 41.047 kHz  
x dB Bandwidth 18.656 MHz\*

### IEEE 802.11n HT 20 MHz Channel mode / 5260 ~ 5320MHz

### 99% Bandwidth (CH Low)

Agilent 15:39:00 Jul 26, 2012

R T

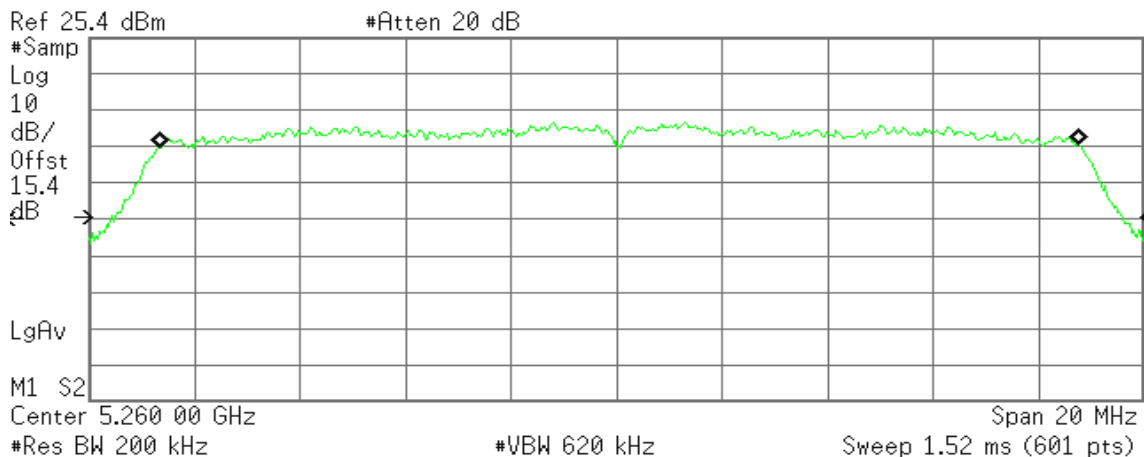

Occupied Bandwidth  
17.4325 MHz

Occ BW % Pwr 99.00 %  
x dB -26.00 dB


Transmit Freq Error 47.662 kHz  
x dB Bandwidth 19.180 MHz\*



### 99% Bandwidth (CH Mid)

Agilent 15:40:33 Jul 26, 2012

R T

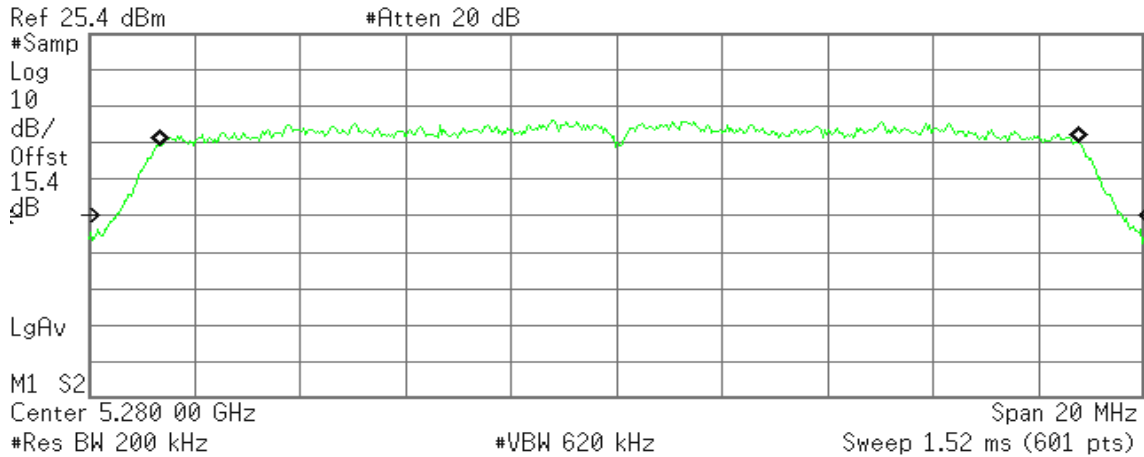

**Occupied Bandwidth**  
17.4396 MHz


**Occ BW % Pwr** 99.00 %  
**x dB** -26.00 dB

**Transmit Freq Error** 45.423 kHz  
**x dB Bandwidth** 19.058 MHz\*

### 99% Bandwidth (CH High)

Agilent 15:41:29 Jul 26, 2012

R T

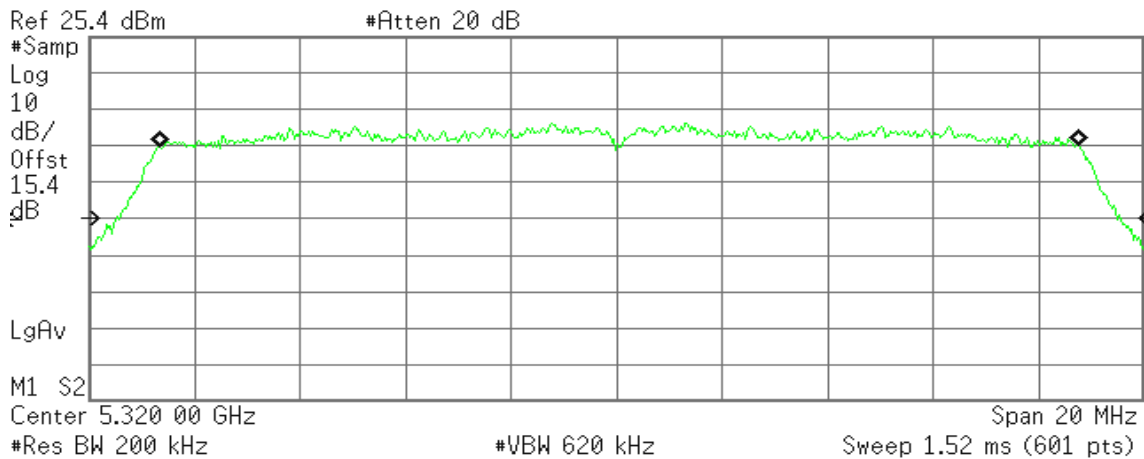

**Occupied Bandwidth**  
17.4379 MHz

**Occ BW % Pwr** 99.00 %  
**x dB** -26.00 dB

**Transmit Freq Error** 44.354 kHz  
**x dB Bandwidth** 19.031 MHz\*






**Test mode: IEEE 802.11a mode / 5500 ~ 5700MHz**

**99% Bandwidth (CH Low)**

Agilent 15:16:46 Jul 26, 2012

R T

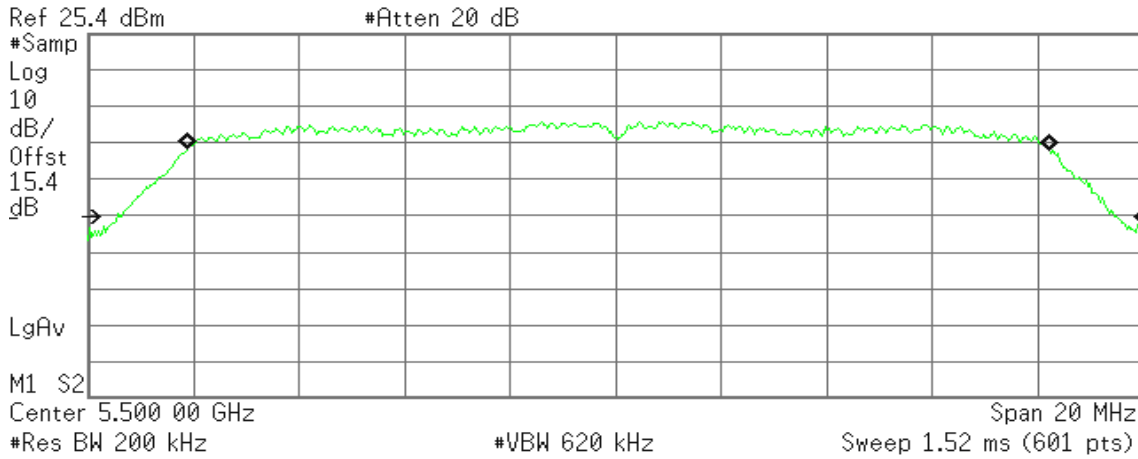

**Occupied Bandwidth**  
**16.3902 MHz**


**Occ BW % Pwr** 99.00 %  
**x dB** -26.00 dB

**Transmit Freq Error** 50.556 kHz  
**x dB Bandwidth** 18.956 MHz\*

**99% Bandwidth (CH Mid)**

Agilent 15:20:47 Jul 26, 2012

R T

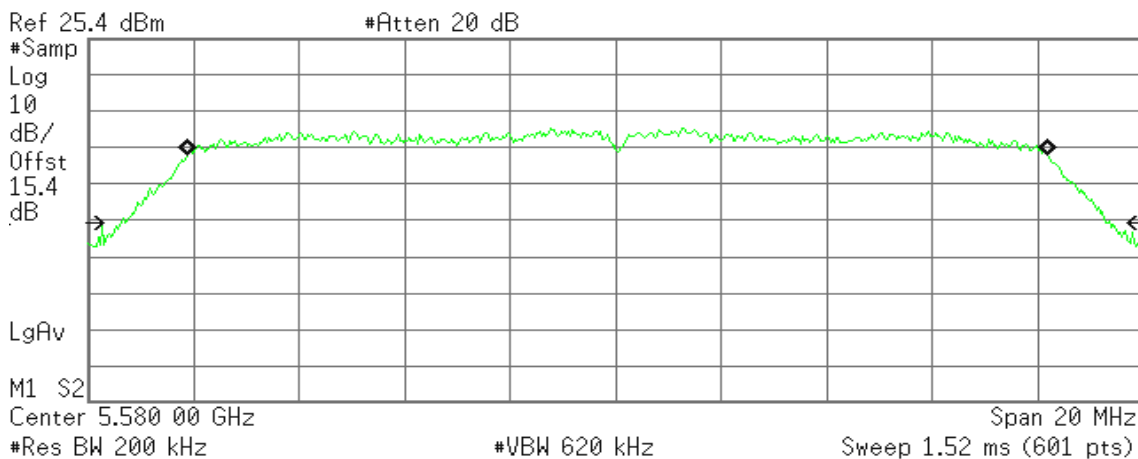

**Occupied Bandwidth**  
**16.3513 MHz**

**Occ BW % Pwr** 99.00 %  
**x dB** -26.00 dB


**Transmit Freq Error** 35.185 kHz  
**x dB Bandwidth** 18.742 MHz\*



### 99% Bandwidth (CH High)

Agilent 15:22:41 Jul 26, 2012

R T

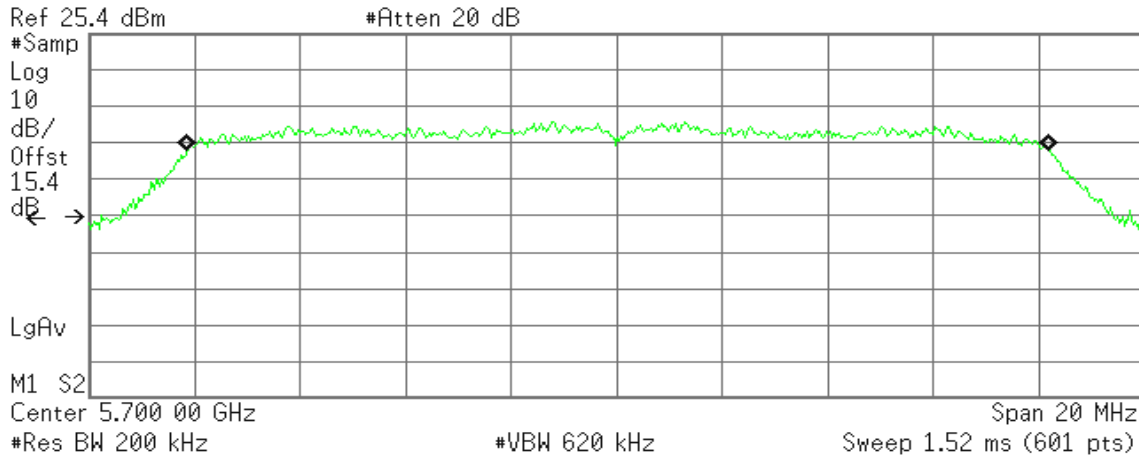

Occupied Bandwidth  
16.3700 MHz

Occ BW % Pwr 99.00 %  
x dB -26.00 dB


Transmit Freq Error 30.964 kHz  
x dB Bandwidth 19.773 MHz\*

### IEEE 802.11n HT 20 MHz Channel mode / 5500 ~ 5700MHz

### 99% Bandwidth (CH Low)

Agilent 15:42:11 Jul 26, 2012

R T

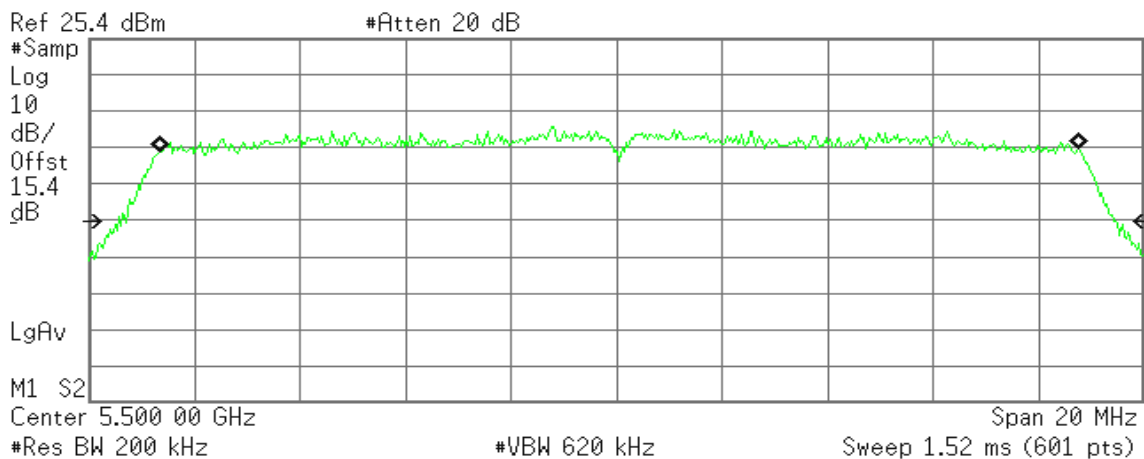

Occupied Bandwidth  
17.4483 MHz

Occ BW % Pwr 99.00 %  
x dB -26.00 dB


Transmit Freq Error 46.538 kHz  
x dB Bandwidth 18.912 MHz\*



### 99% Bandwidth (CH Mid)

Agilent 15:43:48 Jul 26, 2012

R T

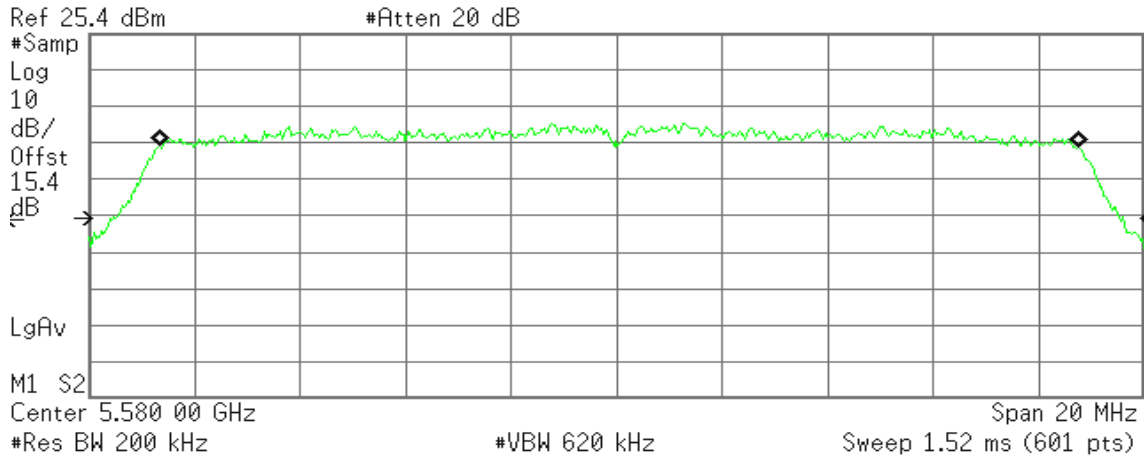

Occupied Bandwidth  
17.4316 MHz


Occ BW % Pwr 99.00 %  
x dB -26.00 dB

Transmit Freq Error 36.410 kHz  
x dB Bandwidth 19.214 MHz\*

### 99% Bandwidth (CH High)

Agilent 15:45:48 Jul 26, 2012

R T

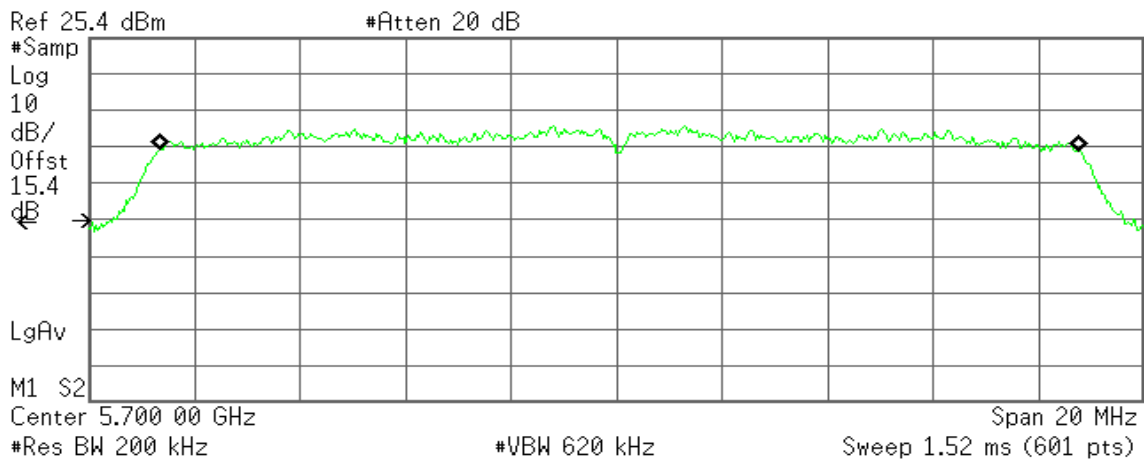

Occupied Bandwidth  
17.4316 MHz

Occ BW % Pwr 99.00 %  
x dB -26.00 dB

Transmit Freq Error 34.476 kHz  
x dB Bandwidth 19.436 MHz\*




### 7.3 26 dB EMISSION BANDWIDTH

#### LIMIT

According to §15.303(c), for purposes of this subpart the emission bandwidth shall be determined by measuring the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, that are 26 dB down relative to the maximum level of the modulated carrier. Compliance with the emissions limits is based on the use of measurement instrumentation employing a peak detector function with an instrument resolutions bandwidth approximately equal to 1.0 percent of the emission bandwidth of the device under measurement.

#### Test Configuration

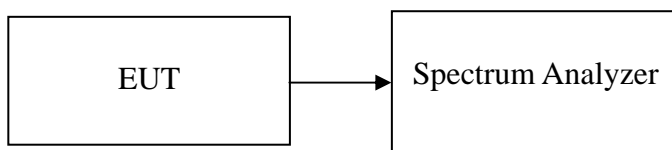

#### TEST PROCEDURE

1. Place the EUT on the table and set it in the transmitting mode.
2. Remove the antenna from the EUT and then connect a low-loss RF cable from the antenna port to the spectrum analyzer.
3. Set the spectrum analyzer as  $RBW > 1\%EBW$ ,  $VBW > RBW$ ,  $Span > 26dB$  bandwidth, and Sweep = auto.
4. Mark the peak frequency and  $-26dB$  (upper and lower) frequency.
5. Repeat until all the rest channels were investigated.

#### TEST RESULTS

*No non-compliance noted*



**Test Data**

**Test mode: IEEE 802.11a mode / 5180 ~ 5240MHz**

Channel	Frequency (MHz)	Bandwidth (B) (MHz)
Low	5180	18.807
Mid	5220	18.642
High	5240	18.763

**Test mode: IEEE 802.11n HT 20 MHz Channel mode / 5180 ~ 5240MHz**

Channel	Frequency (MHz)	Bandwidth (B) (MHz)
Low	5180	19.109
Mid	5220	19.127
High	5240	18.955

**Test mode: IEEE 802.11a mode / 5260 ~ 5320MHz**

Channel	Frequency (MHz)	Bandwidth (B) (MHz)
Low	5260	18.663
Mid	5280	18.719
High	5320	18.693

**Test mode: IEEE 802.11n HT 20 MHz Channel mode / 5260 ~ 5320MHz**

Channel	Frequency (MHz)	Bandwidth (B) (MHz)
Low	5180	19.168
Mid	5260	18.974
High	5320	19.113

**Test mode: IEEE 802.11a mode / 5500 ~ 5700MHz**

Channel	Frequency (MHz)	Bandwidth (MHz)
Low	5500	18.628
Mid	5600	18.480
High	5700	20.326

**Test mode: IEEE 802.11n HT 20 MHz Channel mode / 5500 ~ 5700MHz**

Channel	Frequency (MHz)	Bandwidth (MHz)
Low	5500	19.031
Mid	5600	18.964
High	5700	19.246




**Test Plot**

**IEEE 802.11a for 5180 ~ 5240MHz**

**CH Low**

Agilent 13:57:46 Jul 25, 2012

R T

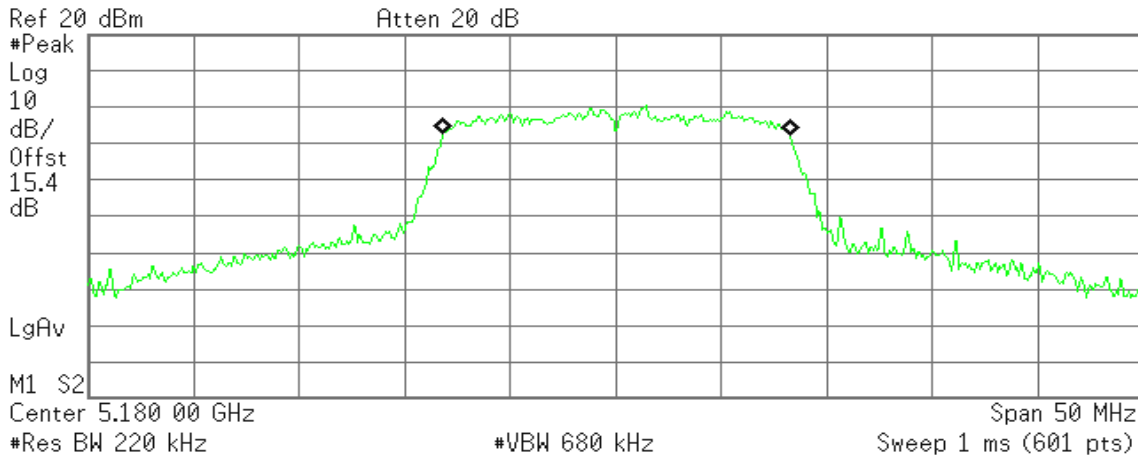

**Occupied Bandwidth**  
**16.4019 MHz**


**Occ BW % Pwr** 99.00 %  
**x dB** -26.00 dB

**Transmit Freq Error** 37.511 kHz  
**x dB Bandwidth** 18.807 MHz

**CH Mid**

Agilent 14:07:26 Jul 25, 2012

R T

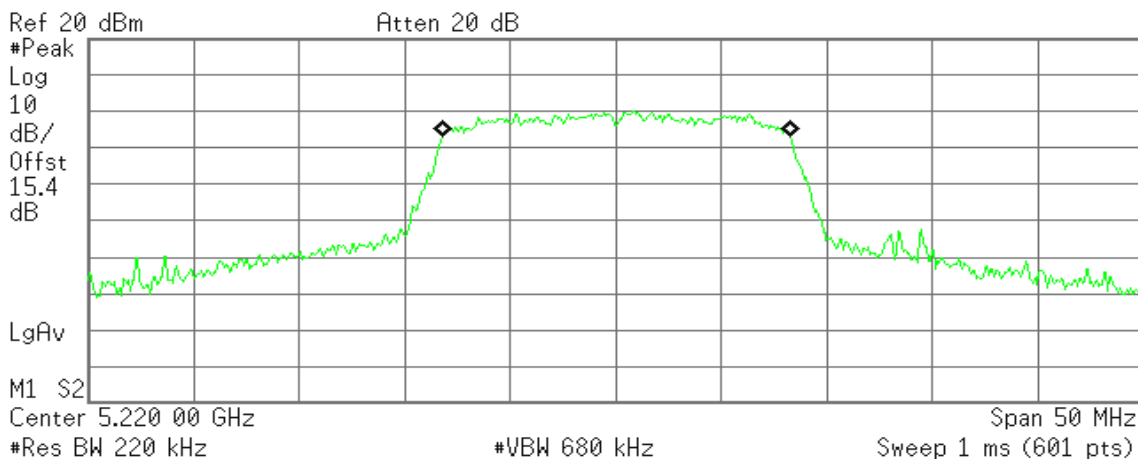

**Occupied Bandwidth**  
**16.4239 MHz**

**Occ BW % Pwr** 99.00 %  
**x dB** -26.00 dB


**Transmit Freq Error** 32.881 kHz  
**x dB Bandwidth** 18.642 MHz



CH High

Agilent 14:14:01 Jul 25, 2012

R T

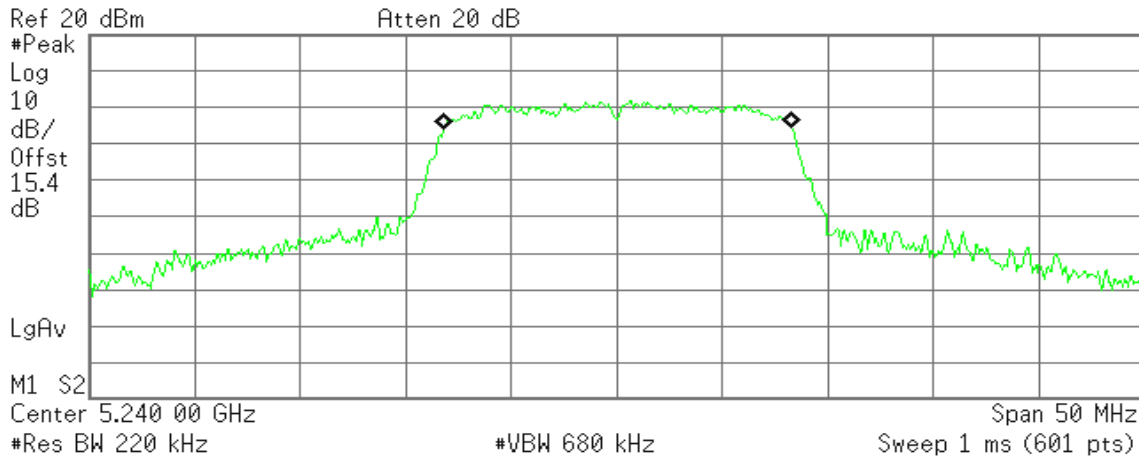

Occupied Bandwidth 16.4225 MHz

Occ BW % Pwr 99.00 %  
x dB -26.00 dB


Transmit Freq Error 35.107 kHz  
x dB Bandwidth 18.763 MHz

IEEE 802.11n HT 20 MHz Channel mode / 5180 ~ 5240MHz

CH Low

Agilent 15:00:48 Jul 25, 2012

R T

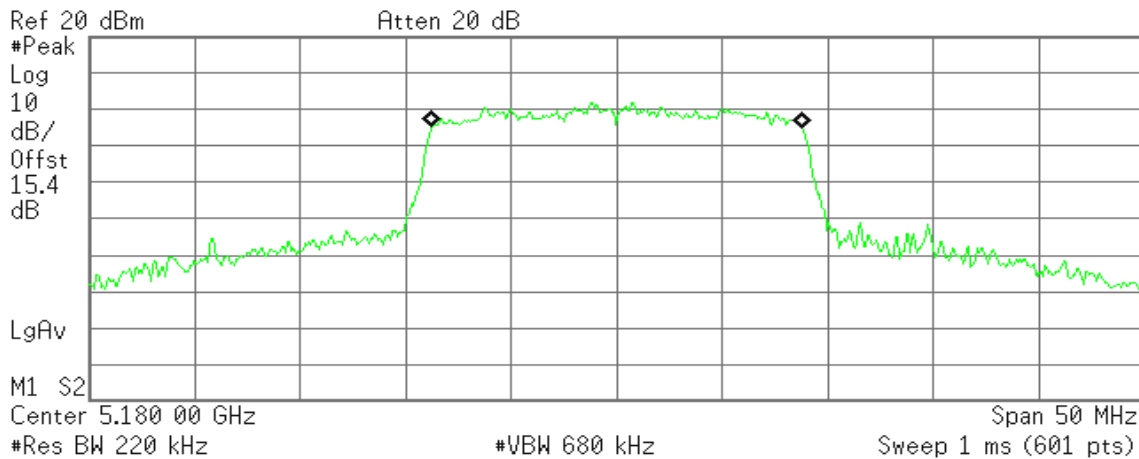

Occupied Bandwidth 17.4890 MHz

Occ BW % Pwr 99.00 %  
x dB -26.00 dB


Transmit Freq Error 32.740 kHz  
x dB Bandwidth 19.109 MHz



### CH Mid

Agilent 15:04:35 Jul 25, 2012

R T

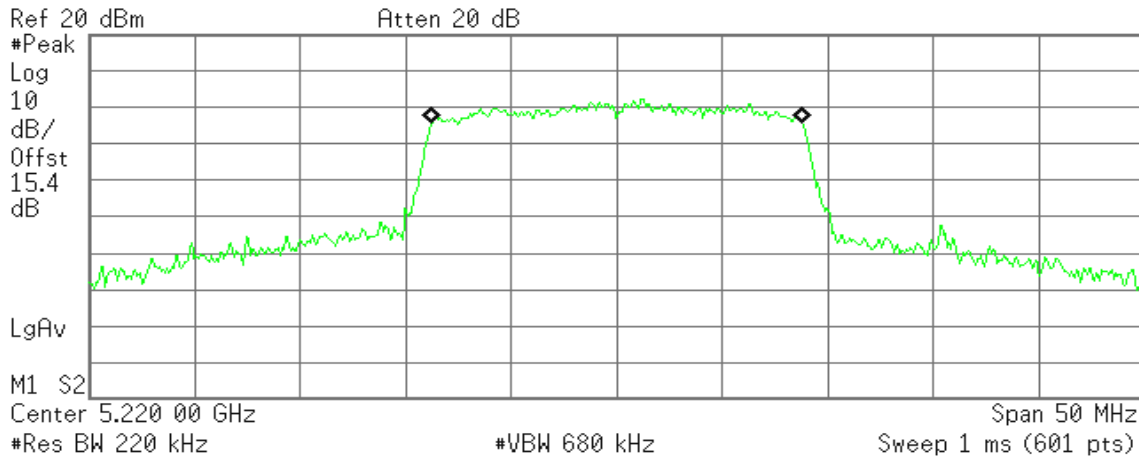

Occupied Bandwidth  
17.5212 MHz


Occ BW % Pwr 99.00 %  
x dB -26.00 dB

Transmit Freq Error 26.052 kHz  
x dB Bandwidth 19.127 MHz

### CH High

Agilent 15:09:39 Jul 25, 2012

R T

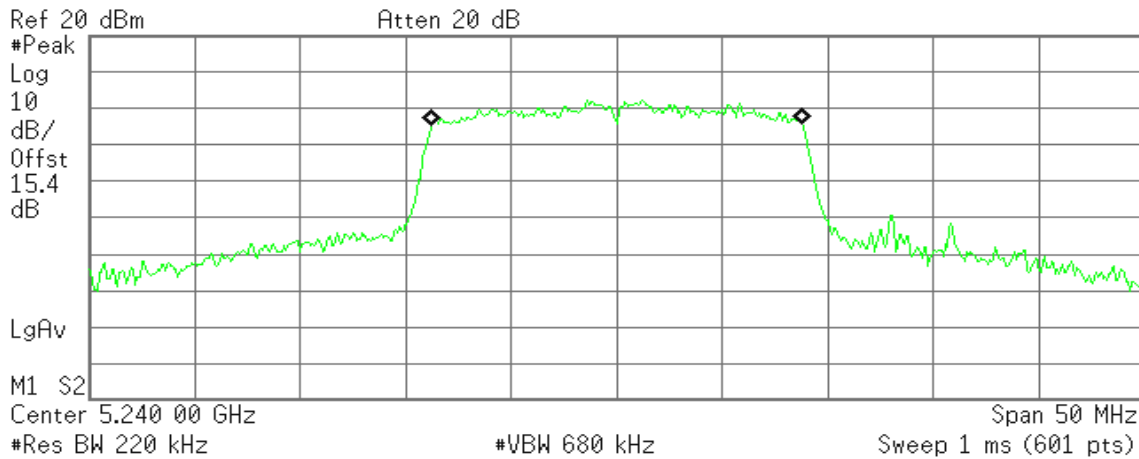

Occupied Bandwidth  
17.4782 MHz

Occ BW % Pwr 99.00 %  
x dB -26.00 dB

Transmit Freq Error 21.278 kHz  
x dB Bandwidth 18.955 MHz






**IEEE 802.11a mode / 5260 ~ 5320MHz**

**CH Low**

Agilent 14:19:50 Jul 25, 2012

R T

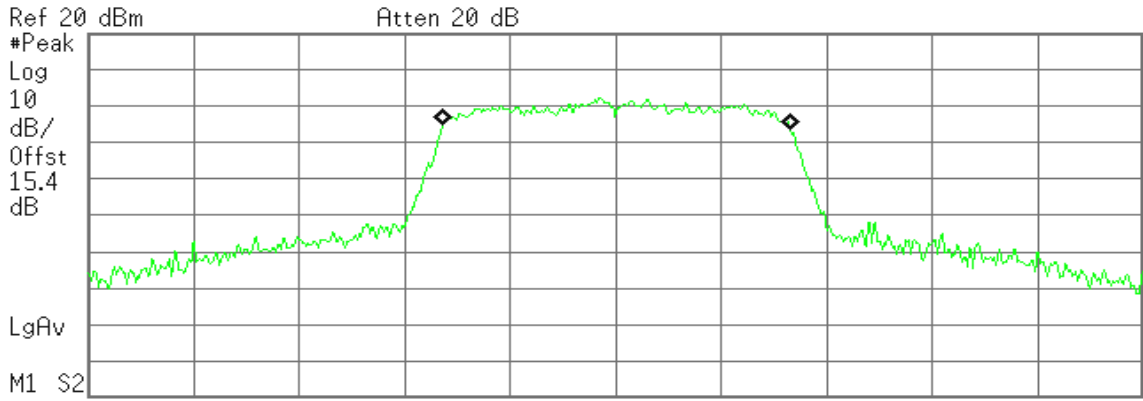

Ref 20 dBm Atten 20 dB  
Center 5.260 00 GHz Span 50 MHz  
#Res BW 220 kHz #VBW 680 kHz Sweep 1 ms (601 pts)

**Occupied Bandwidth**  
16.4069 MHz


**Occ BW % Pwr** 99.00 %  
**x dB** -26.00 dB

**Transmit Freq Error** 46.158 kHz  
**x dB Bandwidth** 18.663 MHz

**CH Mid**

Agilent 14:23:19 Jul 25, 2012

R T

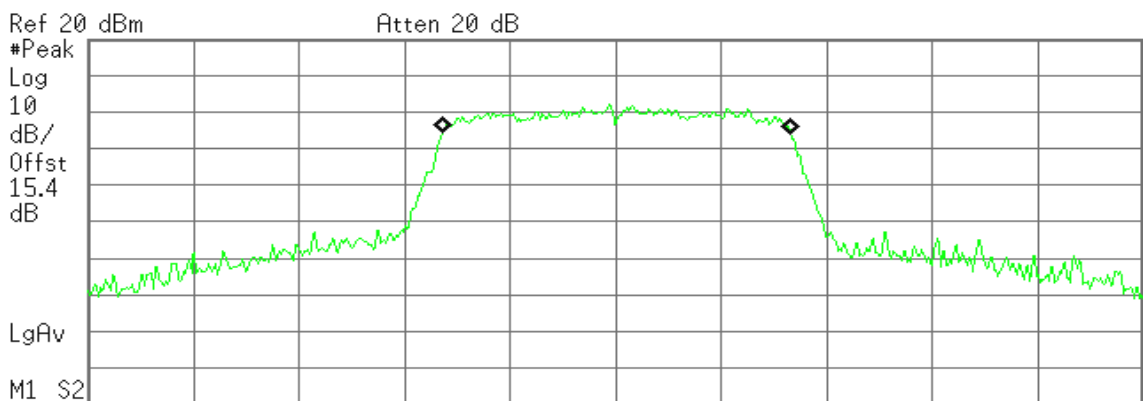

Ref 20 dBm Atten 20 dB  
Center 5.280 00 GHz Span 50 MHz  
#Res BW 220 kHz #VBW 680 kHz Sweep 1 ms (601 pts)

**Occupied Bandwidth**  
16.4493 MHz

**Occ BW % Pwr** 99.00 %  
**x dB** -26.00 dB


**Transmit Freq Error** 51.012 kHz  
**x dB Bandwidth** 18.719 MHz



**CH High**

Agilent 14:27:35 Jul 25, 2012

R T

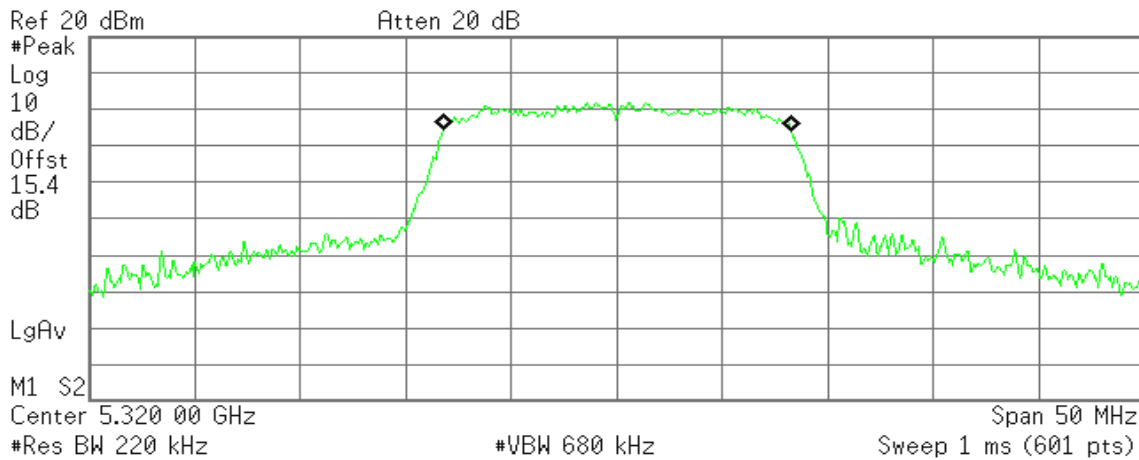

**Occupied Bandwidth**  
16.4244 MHz

**Occ BW % Pwr** 99.00 %  
**x dB** -26.00 dB


**Transmit Freq Error** 38.294 kHz  
**x dB Bandwidth** 18.693 MHz

**IEEE 802.11n HT 20 MHz Channel mode / 5260 ~ 5320MHz**

**CH Low**

Agilent 15:13:40 Jul 25, 2012

R T

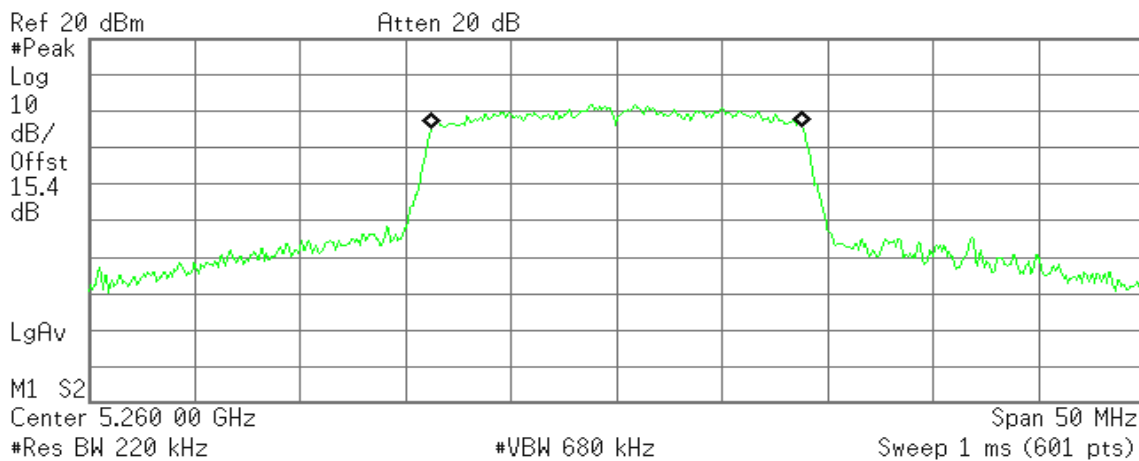

**Occupied Bandwidth**  
17.4925 MHz

**Occ BW % Pwr** 99.00 %  
**x dB** -26.00 dB


**Transmit Freq Error** 33.886 kHz  
**x dB Bandwidth** 19.168 MHz



### CH Mid

Agilent 15:20:55 Jul 25, 2012

R T

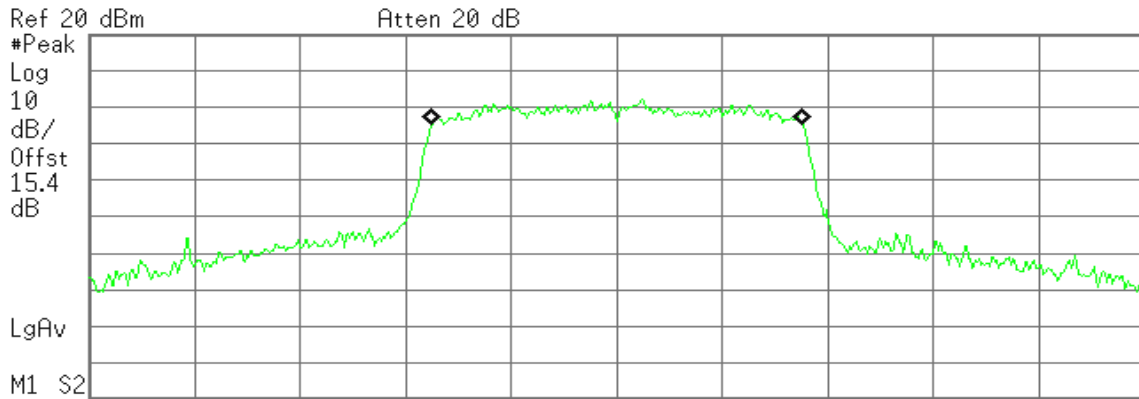

Center 5.280 00 GHz Span 50 MHz  
#Res BW 220 kHz #VBW 680 kHz Sweep 1 ms (601 pts)

**Occupied Bandwidth**  
17.4955 MHz


**Occ BW % Pwr** 99.00 %  
**x dB** -26.00 dB

**Transmit Freq Error** 25.665 kHz  
**x dB Bandwidth** 18.974 MHz

### CH High

Agilent 15:27:02 Jul 25, 2012

R T

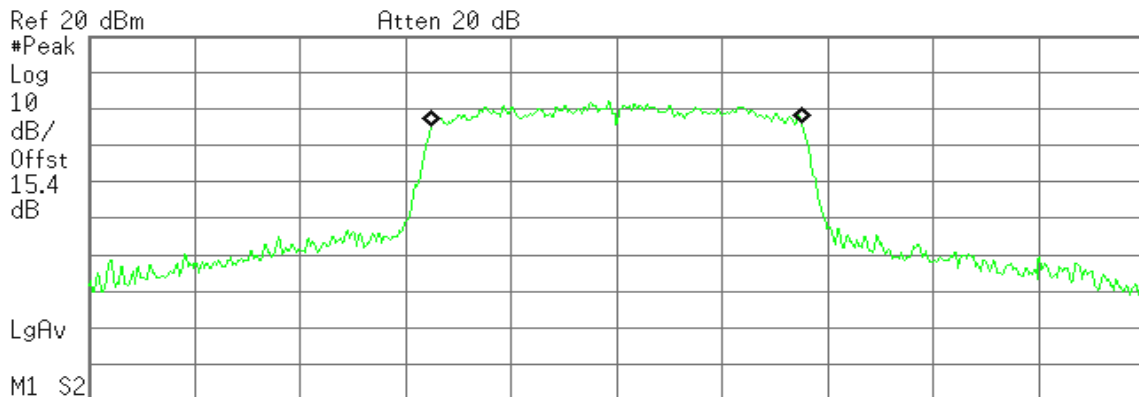

Center 5.320 00 GHz Span 50 MHz  
#Res BW 220 kHz #VBW 680 kHz Sweep 1 ms (601 pts)

**Occupied Bandwidth**  
17.4596 MHz

**Occ BW % Pwr** 99.00 %  
**x dB** -26.00 dB

**Transmit Freq Error** 18.256 kHz  
**x dB Bandwidth** 19.113 MHz




**Test mode: IEEE 802.11a mode / 5500 ~ 5700MHz**

**CH Low**

Agilent 14:41:46 Jul 25, 2012

R T

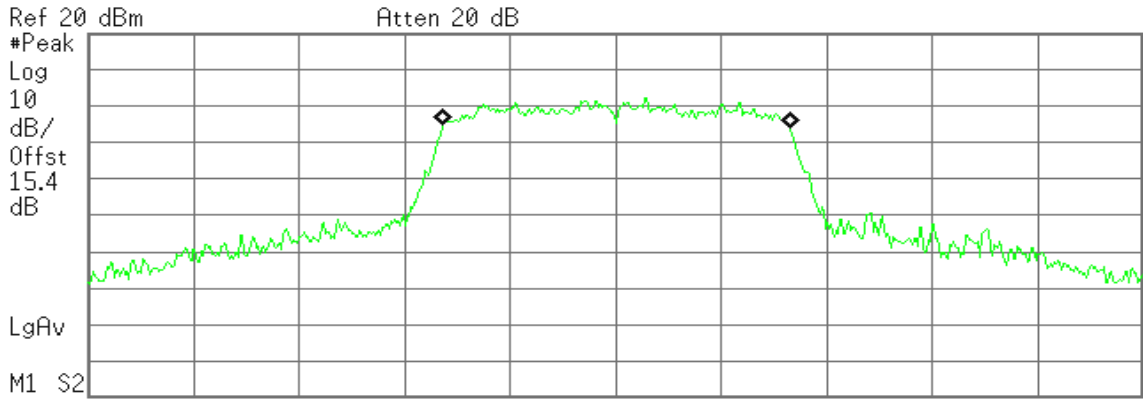

Ref 20 dBm Atten 20 dB  
#Peak Log 10 dB/Offst 15.4 dB  
LgAv  
M1 S2  
Center 5.500 00 GHz Span 50 MHz  
#Res BW 220 kHz #VBW 680 kHz Sweep 1 ms (601 pts)

**Occupied Bandwidth**  
**16.4058 MHz**


**Occ BW % Pwr** 99.00 %  
**x dB** -26.00 dB

**Transmit Freq Error** 29.754 kHz  
**x dB Bandwidth** 18.628 MHz

**CH Mid**

Agilent 14:49:58 Jul 25, 2012

R T

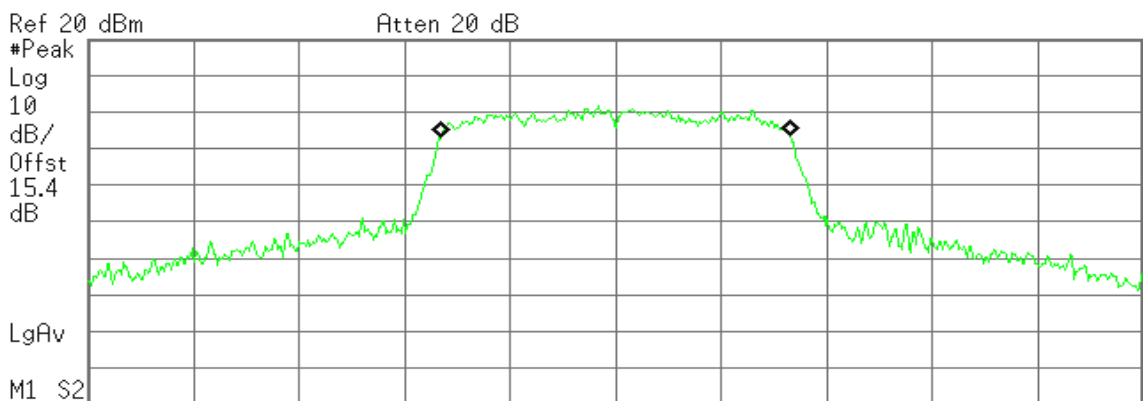

Ref 20 dBm Atten 20 dB  
#Peak Log 10 dB/Offst 15.4 dB  
LgAv  
M1 S2  
Center 5.580 00 GHz Span 50 MHz  
#Res BW 220 kHz #VBW 680 kHz Sweep 1 ms (601 pts)

**Occupied Bandwidth**  
**16.4774 MHz**

**Occ BW % Pwr** 99.00 %  
**x dB** -26.00 dB


**Transmit Freq Error** 5.071 kHz  
**x dB Bandwidth** 18.480 MHz



CH High

Agilent 14:53:48 Jul 25, 2012

R T

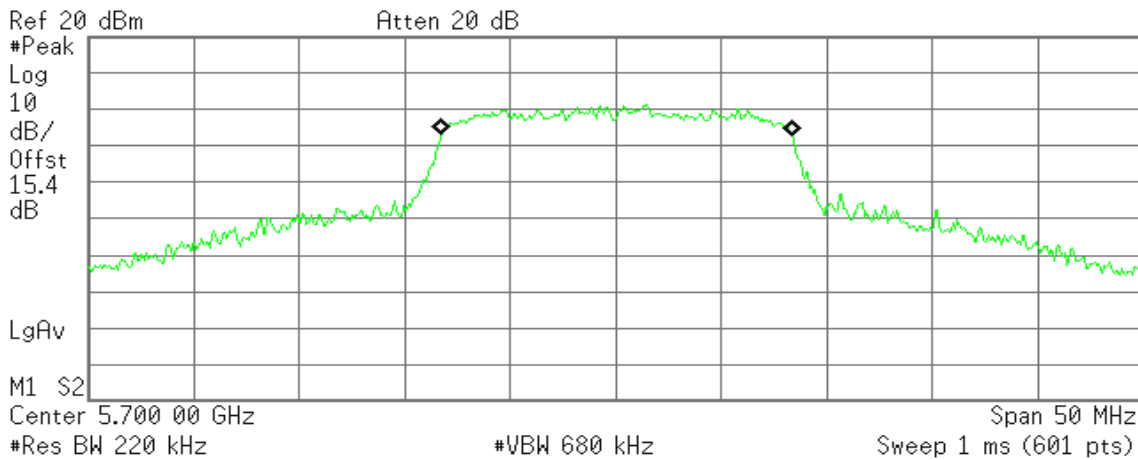

Occupied Bandwidth  
16.5343 MHz

Occ BW % Pwr 99.00 %  
x dB -26.00 dB


Transmit Freq Error 49.770 kHz  
x dB Bandwidth 20.326 MHz

IEEE 802.11n HT 20 MHz Channel mode / 5500 ~ 5700MHz

CH Low

Agilent 15:31:51 Jul 25, 2012

R T

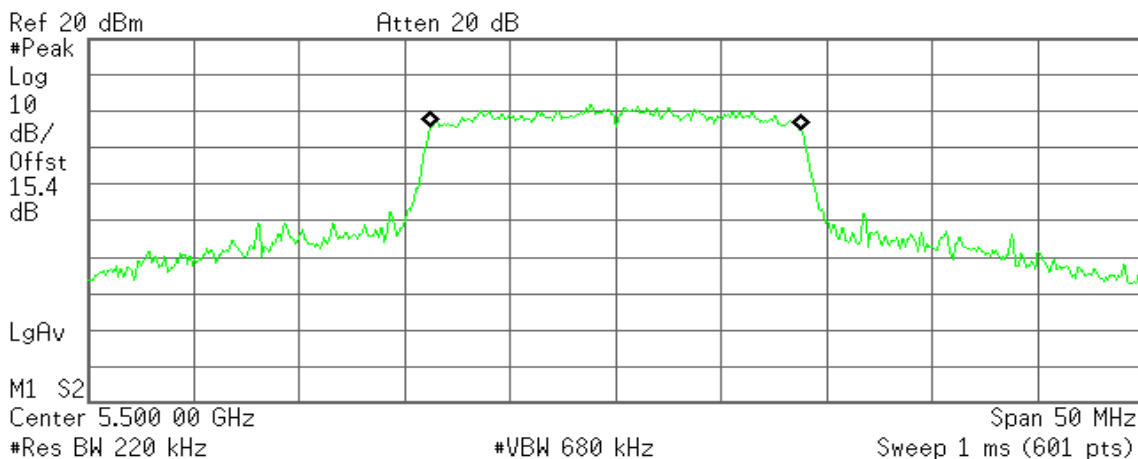

Occupied Bandwidth  
17.4887 MHz

Occ BW % Pwr 99.00 %  
x dB -26.00 dB


Transmit Freq Error 4.972 kHz  
x dB Bandwidth 19.031 MHz



### CH Mid

Agilent 15:36:06 Jul 25, 2012

R T

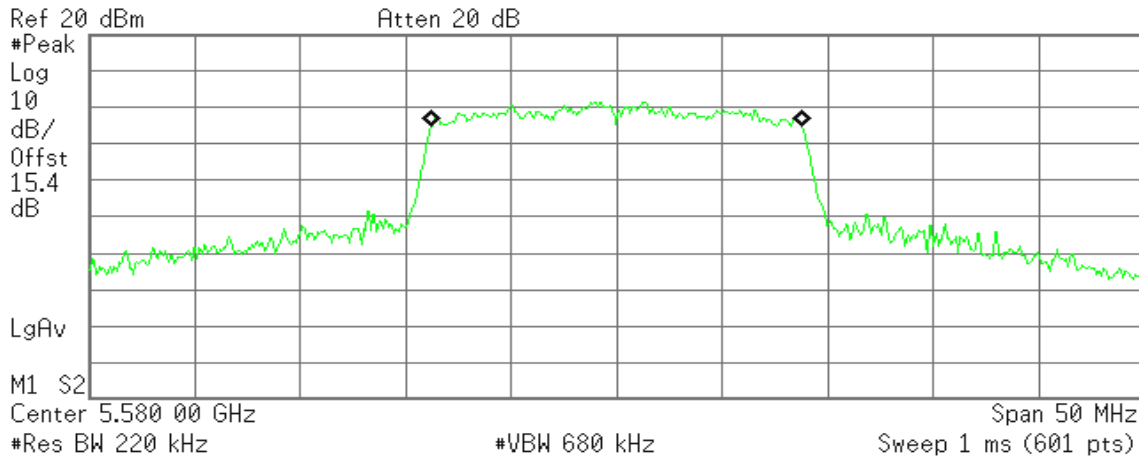

Occupied Bandwidth  
17.4870 MHz


Occ BW % Pwr 99.00 %  
x dB -26.00 dB

Transmit Freq Error 9.275 kHz  
x dB Bandwidth 18.964 MHz

### CH High

Agilent 15:51:11 Jul 25, 2012

R T

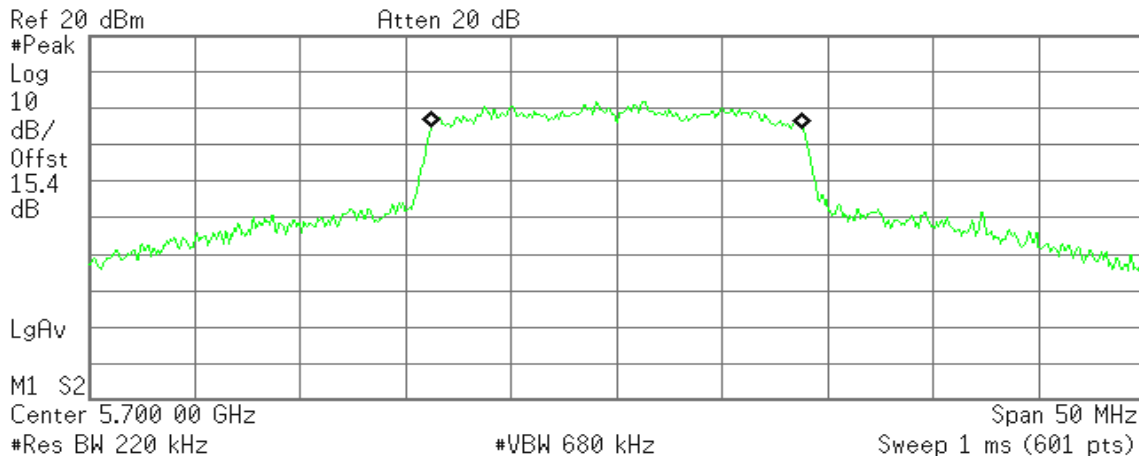

Occupied Bandwidth  
17.5401 MHz

Occ BW % Pwr 99.00 %  
x dB -26.00 dB

Transmit Freq Error 19.336 kHz  
x dB Bandwidth 19.246 MHz



## 7.4 MAXIMUM CONDUCTED OUTPUT POWER

### LIMIT

#### §15.407(a)

#### RSS-210 §A9.2

- (1) For the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed the lesser of 50 mW or  $4 \text{ dBm} + 10\log B$ , where B is the 26 dB emission bandwidth in MHz.
- (2) For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or  $11 \text{ dBm} + 10\log B$ , where B is the 26 dB emission bandwidth in MHz.

*If transmitting antennas of directional gain greater than 6dBi are used, the peak transmit power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.*



**Specified Limit of the Peak Power**

**Test mode: IEEE 802.11a mode / 5180 ~ 5240MHz**

Channel	Frequency (MHz)	26dB Bandwidth (B) (MHz)	10 Log B (dB)	4 + 10 Log B (dBm)	Power Limit (dBm)
Low	5180	18.81	12.74	16.74	17.00
Mid	5220	18.64	12.70	16.70	17.00
High	5240	18.76	12.73	16.73	17.00

**Test mode: IEEE 802.11n HT 20 MHz Channel mode / 5180 ~ 5240MHz**

Channel	Frequency (MHz)	26dB Bandwidth (B) (MHz)	10 Log B (dB)	4 + 10 Log B (dBm)	Power Limit (dBm)
Low	5180	19.11	12.81	16.81	17.00
Mid	5220	19.13	12.82	16.82	17.00
High	5240	18.96	12.78	16.78	17.00

**Test mode: IEEE 802.11a mode / 5260 ~ 5320MHz**

Channel	Frequency (MHz)	26dB Bandwidth (B) (MHz)	10 Log B (dB)	11 + 10 Log B (dBm)	Power Limit (dBm)
Low	5260	18.66	12.71	23.71	24.00
Mid	5280	18.72	12.72	23.72	24.00
High	5320	18.69	12.72	23.72	24.00

**Test mode: IEEE 802.11n HT 20 MHz Channel mode / 5260 ~ 5320MHz**

Channel	Frequency (MHz)	26dB Bandwidth (B) (MHz)	10 Log B (dB)	11 + 10 Log B (dBm)	Power Limit (dBm)
Low	5260	19.17	12.83	23.83	24.00
Mid	5280	18.97	12.78	23.78	24.00
High	5320	19.11	12.81	23.81	24.00

**Test mode: IEEE 802.11a mode / 5500 ~ 5700MHz**

Channel	Frequency (MHz)	26dB Bandwidth (B) (MHz)	10 Log B (dB)	11 + 10 Log B (dBm)	Power Limit (dBm)
Low	5500	18.63	12.70	22.70	24.00
Mid	5580	18.48	12.67	22.67	24.00
High	5700	20.33	13.08	23.08	24.00

**Test mode: IEEE 802.11n HT 20 MHz Channel mode/ 5500 ~ 5700MHz**


Channel	Frequency (MHz)	26dB Bandwidth (B) (MHz)	10 Log B (dB)	11 + 10 Log B (dBm)	Power Limit (dBm)
Low	5500	19.03	12.79	22.79	24.00
Mid	5580	18.96	12.78	22.78	24.00
High	5700	19.25	12.84	22.84	24.00





### **Test Configuration**

*The EUT was connected to a spectrum analyzer through a 50Ω RF cable.*



### **TEST PROCEDURE**

Set span to encompass the entire emission bandwidth (EBW) of the signal.

Set RBW = 1 MHz / Set VBW = 3 MHz.

Use sample detector mode if bin width (i.e., span/number of points in spectrum display) < 0.5 RBW. Otherwise use peak detector mode. Use a video trigger with the trigger level set to enable triggering only on full power pulses. Transmitter must operate at full control power for entire sweep of every sweep. If the device transmits continuously, with no off intervals or reduced power intervals, the trigger may be set to “free run”. Trace average 100 traces in power averaging mode. Compute power by integrating the spectrum across the 26 dB EBW of the signal. The integration can be performed using the spectrum analyzer’s band power measurement function with band limits set equal to the EBW band edges or by summing power levels in each 1 MHz band in linear power terms. The 1 MHz band power levels to be summed can be obtained by averaging, in linear power terms, power levels in each frequency bin across the 1 MHz.

### **TEST RESULTS**

*No non-compliance noted*



**Test Data**

**Test mode: IEEE 802.11a mode / 5180 ~ 5240MHz**

Channel	Frequency (MHz)	Output Power (dBm)	Maximum Output Power (dBm)	Limit (dBm)	Result
Low	5180	10.61	10.70	16.743	PASS
Mid	5220	11.78	11.87	16.705	PASS
High	5240	11.16	11.25	16.733	PASS

**Test mode: IEEE 802.11n HT 20 MHz Channel mode / 5180 ~ 5240MHz**

Channel	Frequency (MHz)	Output Power (dBm)	Maximum Output Power (dBm)	Limit (dBm)	Result
Low	5180	11.3	11.39	16.81	PASS
Mid	5220	11.41	11.50	16.82	PASS
High	5240	11.19	11.28	16.78	PASS

**Test mode: IEEE 802.11a mode / 5260 ~ 5320MHz**

Channel	Frequency (MHz)	Output Power (dBm)	Maximum Output Power (dBm)	Limit (dBm)	Result
Low	5260	11.85	11.94	23.71	PASS
Mid	5280	11.21	11.30	23.72	PASS
High	5320	11.95	12.04	23.72	PASS

**Test mode: IEEE 802.11n HT 20 MHz Channel mode / 5260 ~ 5320MHz**

Channel	Frequency (MHz)	Output Power (dBm)	Maximum Output Power (dBm)	Limit (dBm)	Result
Low	5260	10.95	11.04	23.83	PASS
Mid	5280	11.18	11.27	23.78	PASS
High	5320	11.46	11.55	23.81	PASS



**Test mode: IEEE 802.11a mode / 5500 ~ 5700MHz**

Channel	Frequency (MHz)	Output Power (dBm)	Maximum Output Power (dBm)	Limit (dBm)	Result
Low	5500	11.11	11.20	22.70	PASS
Mid	5580	10.71	10.80	22.67	PASS
High	5700	10.47	10.56	23.08	PASS

**Test mode: IEEE 802.11n HT 20 MHz Channel mode / 5500 ~ 5700MHz**

Channel	Frequency (MHz)	Output Power (dBm)	Maximum Output Power (dBm)	Limit (dBm)	Result
Low	5500	11.46	11.55	22.79	PASS
Mid	5580	10.58	10.67	22.78	PASS
High	5700	10.82	10.91	22.84	PASS




**Test Plot**

**IEEE 802.11a mode / 5180 ~ 5240MHz**

**CH Low**

Agilent 13:58:56 Jul 25, 2012

R T

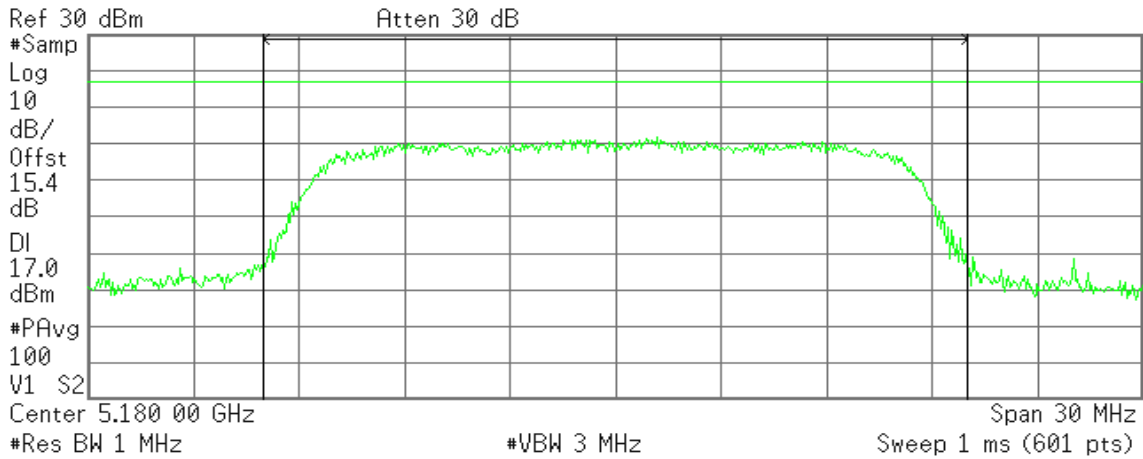

**Channel Power**

10.61 dBm /20.0000 MHz


**Power Spectral Density**

-62.40 dBm/Hz

**CH Mid**

Agilent 14:09:31 Jul 25, 2012

R T

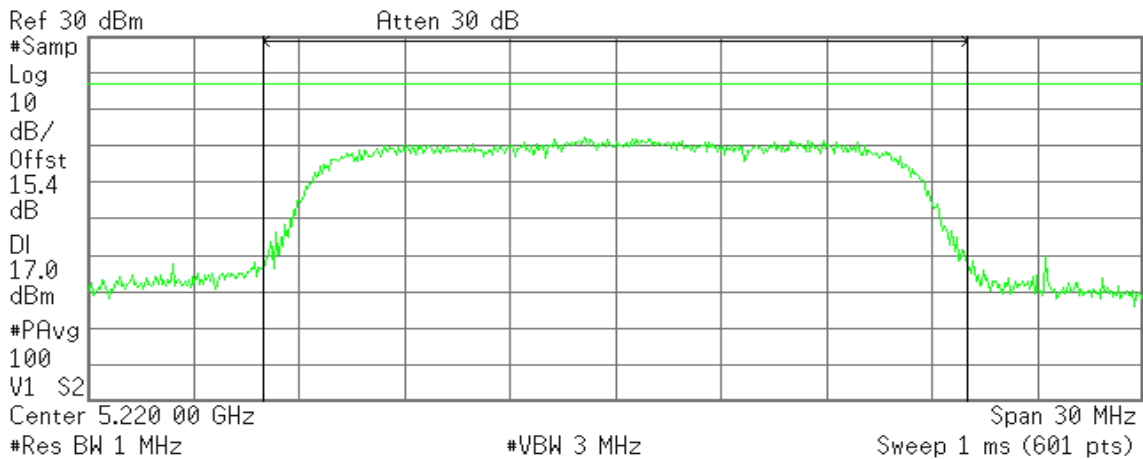

**Channel Power**

11.78 dBm /20.0000 MHz

**Power Spectral Density**


-61.23 dBm/Hz



**CH High**

Agilent 14:14:26 Jul 25, 2012

R T

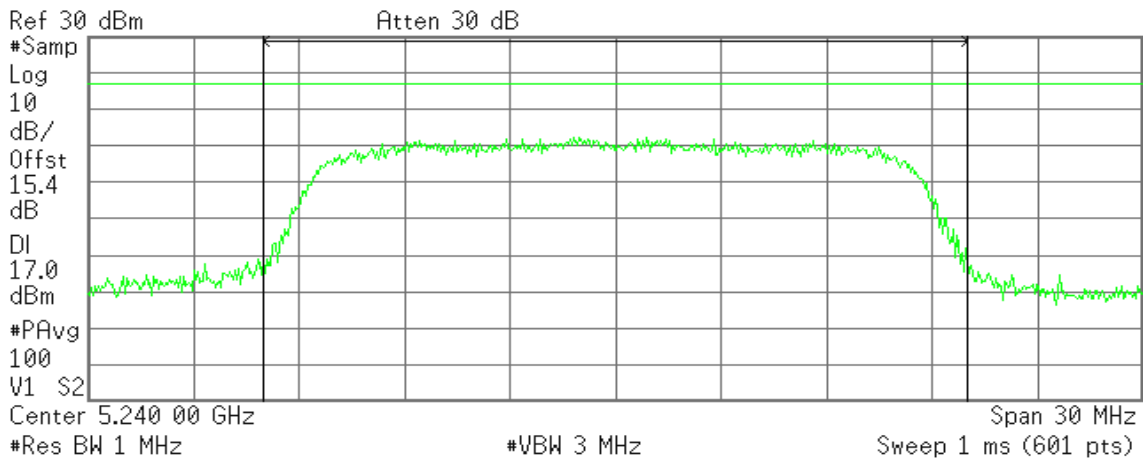

**Channel Power**

11.16 dBm /20.0000 MHz

**Power Spectral Density**


-61.85 dBm/Hz

**IEEE 802.11n HT 20 MHz Channel mode / 5180 ~ 5240MHz**

**CH Low**

Agilent 15:01:33 Jul 25, 2012

R T

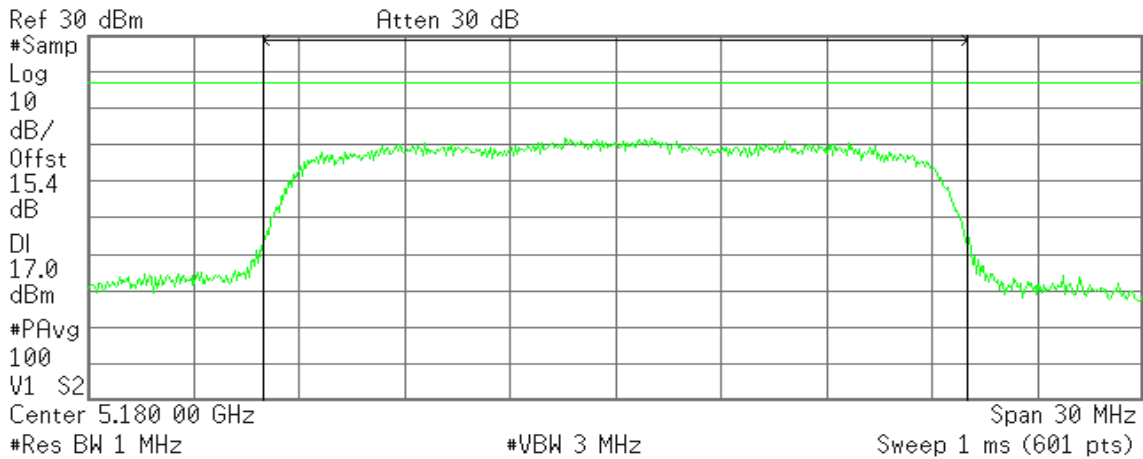

**Channel Power**

11.30 dBm /20.0000 MHz

**Power Spectral Density**


-61.71 dBm/Hz



### CH Mid

Agilent 15:04:58 Jul 25, 2012

R T

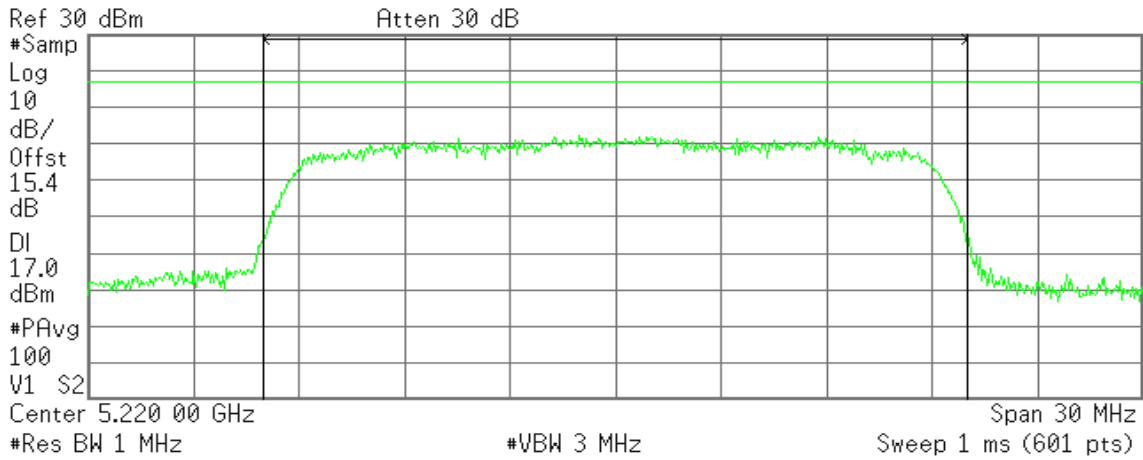

**Channel Power**

11.41 dBm /20.0000 MHz


**Power Spectral Density**

-61.60 dBm/Hz

### CH High

Agilent 15:10:01 Jul 25, 2012

R T

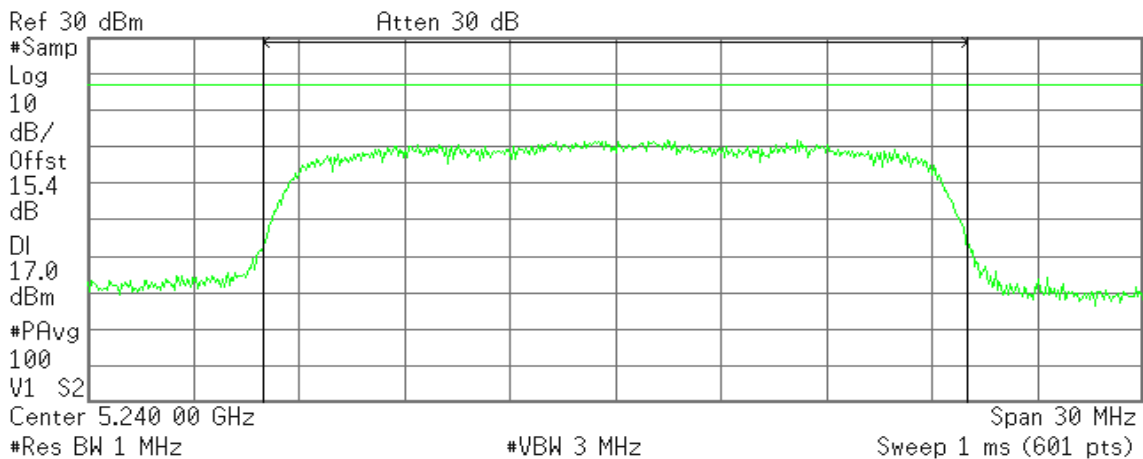

**Channel Power**

11.19 dBm /20.0000 MHz

**Power Spectral Density**

-61.82 dBm/Hz




**IEEE 802.11a mode / 5260 ~ 5320MHz**

**CH Low**

Agilent 14:20:13 Jul 25, 2012

R T

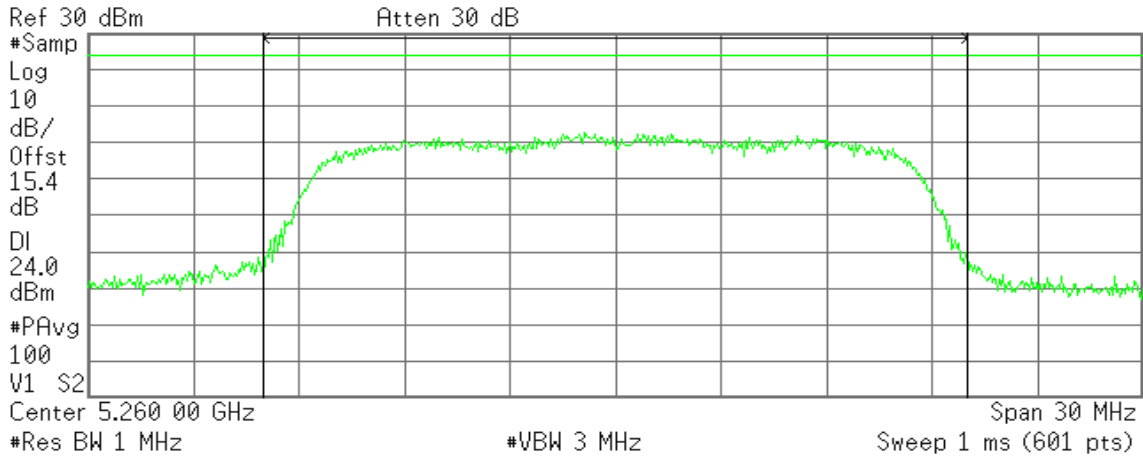

**Channel Power**

11.85 dBm /20.0000 MHz


**Power Spectral Density**

-61.16 dBm/Hz

**CH Mid**

Agilent 14:24:06 Jul 25, 2012

R T

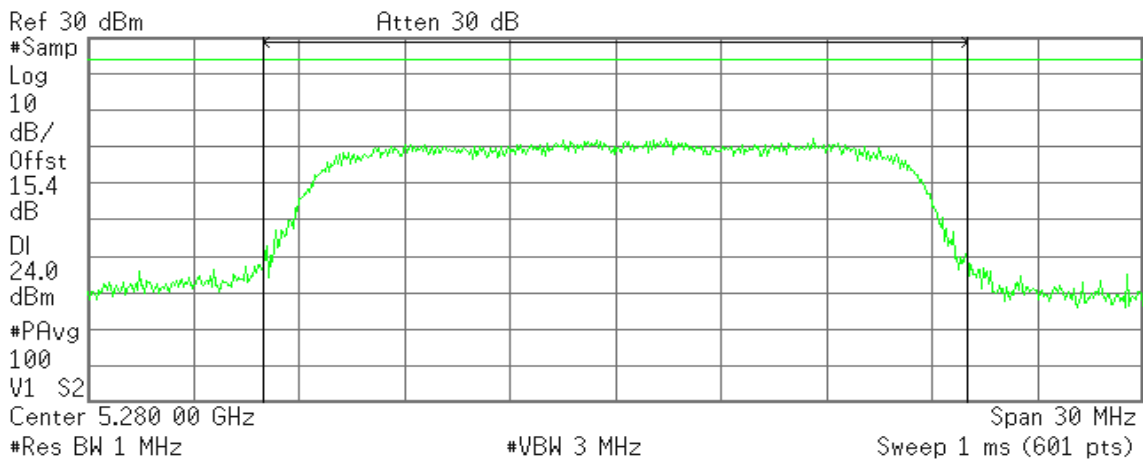

**Channel Power**

11.21 dBm /20.0000 MHz

**Power Spectral Density**


-61.80 dBm/Hz



**CH High**

Agilent 14:27:58 Jul 25, 2012

R T

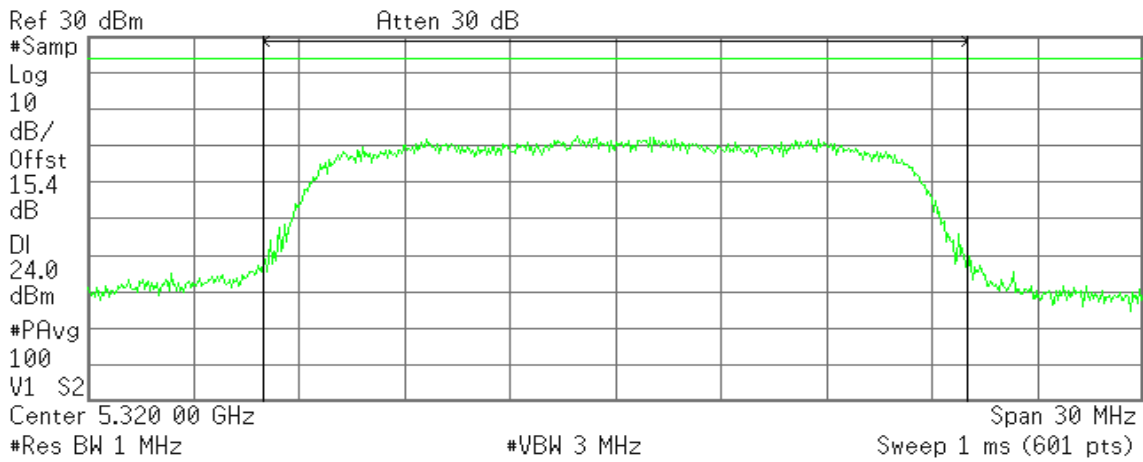

**Channel Power**

11.95 dBm /20.0000 MHz

**Power Spectral Density**


-61.06 dBm/Hz

**IEEE 802.11n HT 20 MHz Channel mode / 5260 ~ 5320MHz**

**CH Low**

Agilent 15:14:17 Jul 25, 2012

R T

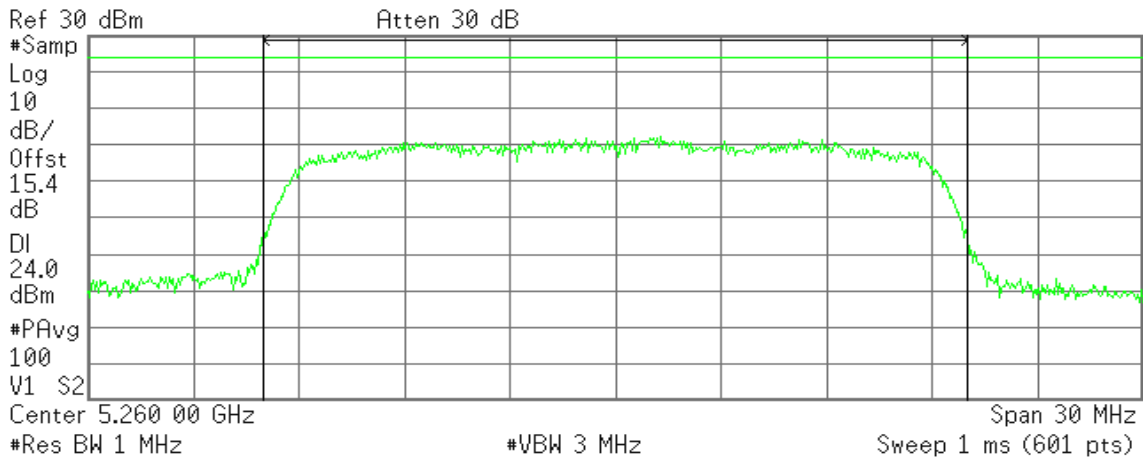

**Channel Power**

10.95 dBm /20.0000 MHz

**Power Spectral Density**

-62.06 dBm/Hz






### CH Mid

Agilent 15:21:38 Jul 25, 2012

R T

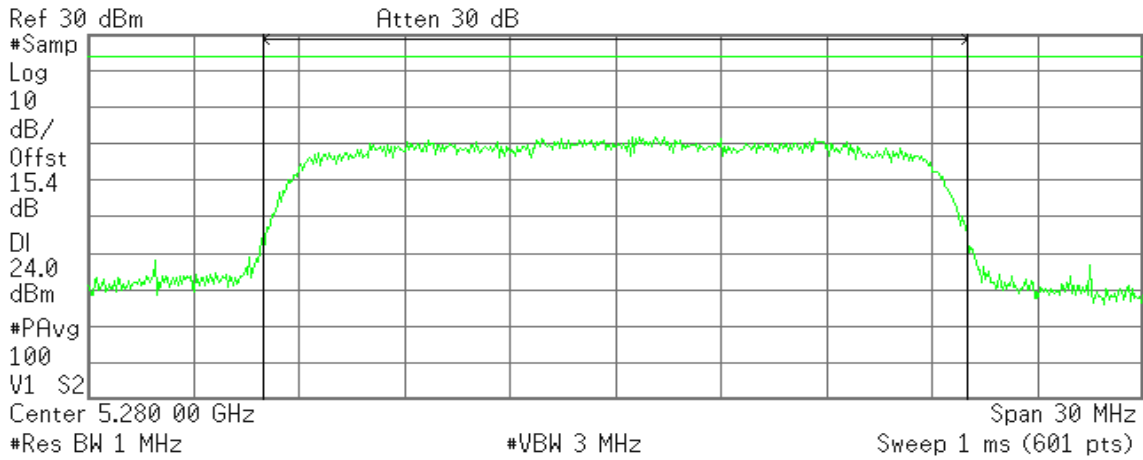

Channel Power

11.18 dBm /20.0000 MHz


Power Spectral Density

-61.83 dBm/Hz

### CH High

Agilent 15:27:49 Jul 25, 2012

R T

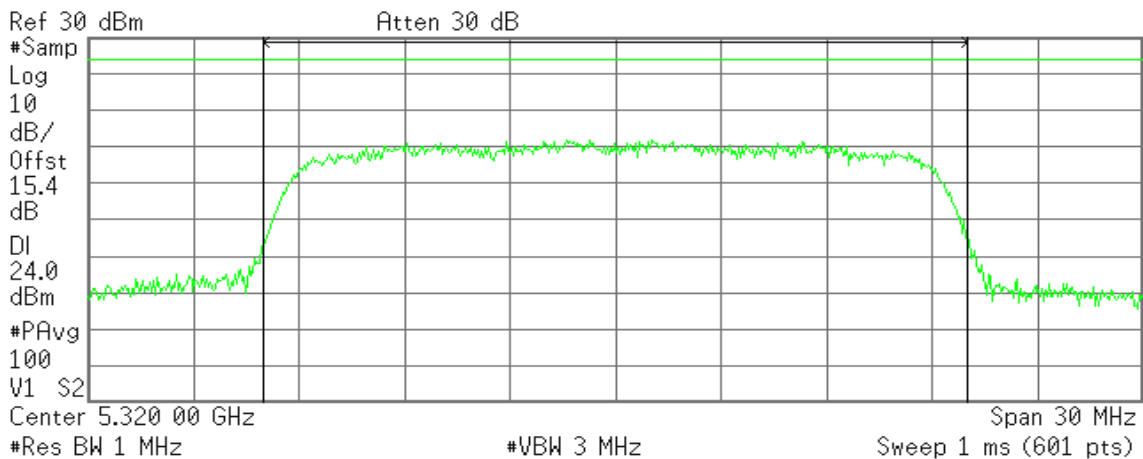

Channel Power

11.46 dBm /20.0000 MHz

Power Spectral Density

-61.55 dBm/Hz




**Test mode: IEEE 802.11a mode / 5500 ~ 5700MHz**

**CH Low**

Agilent 14:46:19 Jul 25, 2012

R T

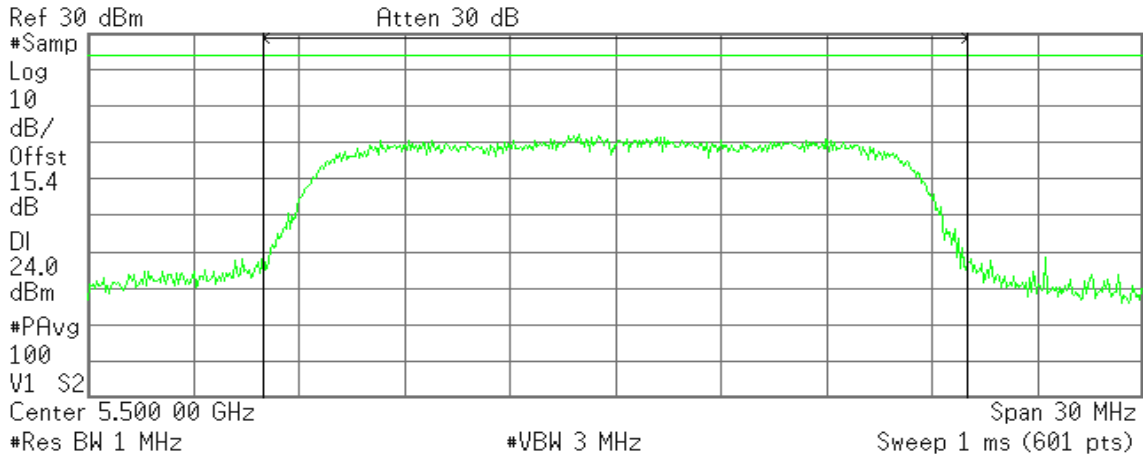

**Channel Power**

11.11 dBm /20.0000 MHz


**Power Spectral Density**

-61.90 dBm/Hz

**CH Mid**

Agilent 14:50:24 Jul 25, 2012

R T

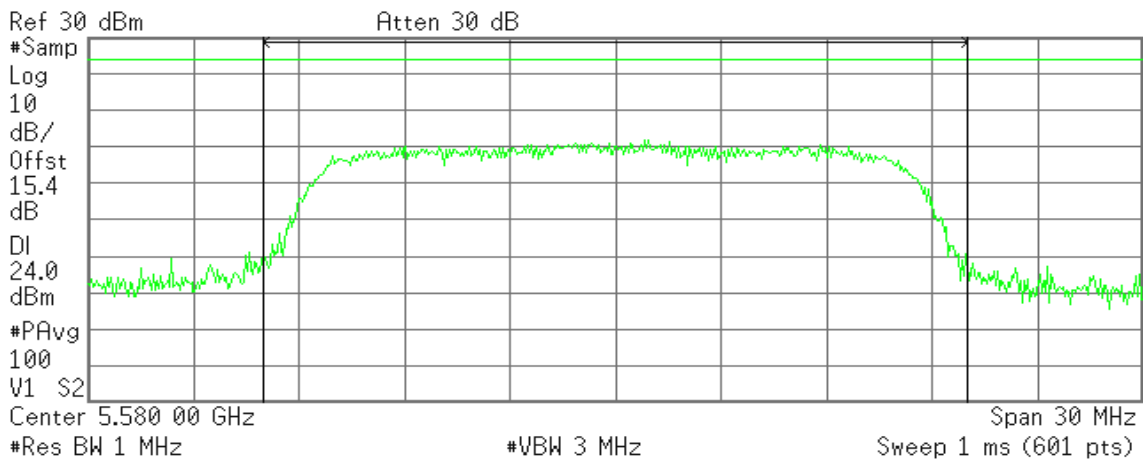

**Channel Power**

10.71 dBm /20.0000 MHz

**Power Spectral Density**


-62.30 dBm/Hz



**CH High**

Agilent 14:54:11 Jul 25, 2012

R T

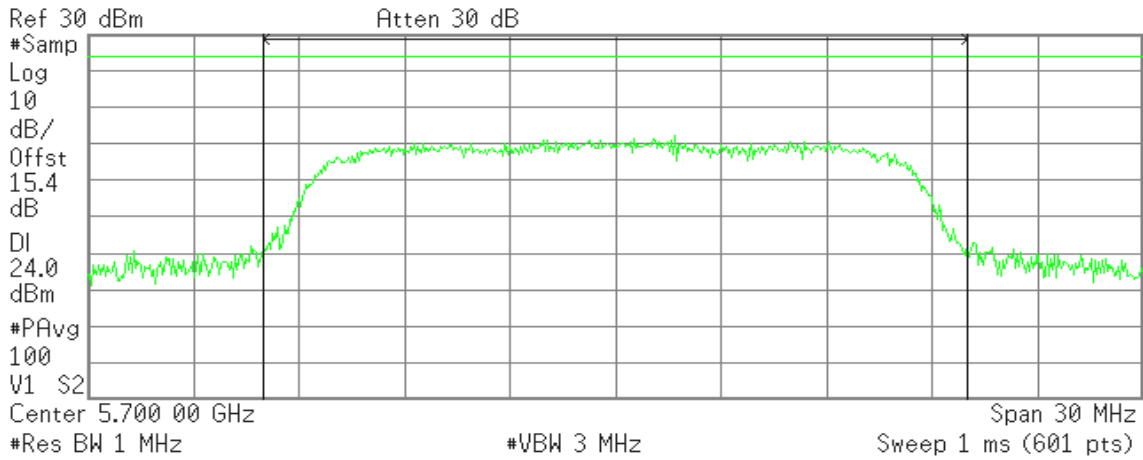

**Channel Power**

10.47 dBm /20.0000 MHz

**Power Spectral Density**


-62.54 dBm/Hz

**IEEE 802.11n HT 20 MHz Channel mode / 5500 ~ 5700MHz**

**CH Low**

Agilent 15:32:16 Jul 25, 2012

R T

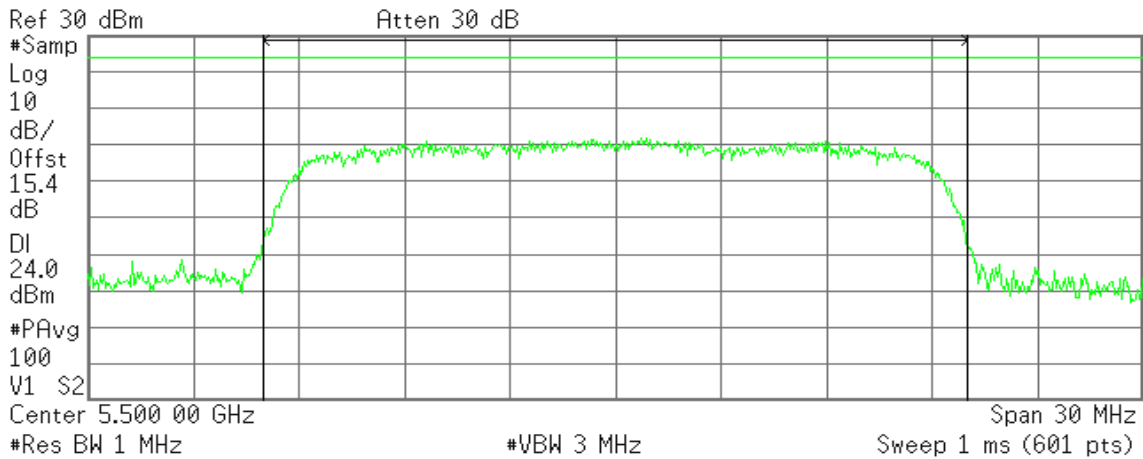

**Channel Power**

11.46 dBm /20.0000 MHz

**Power Spectral Density**


-61.55 dBm/Hz



### CH Mid

Agilent 15:44:08 Jul 25, 2012

R T

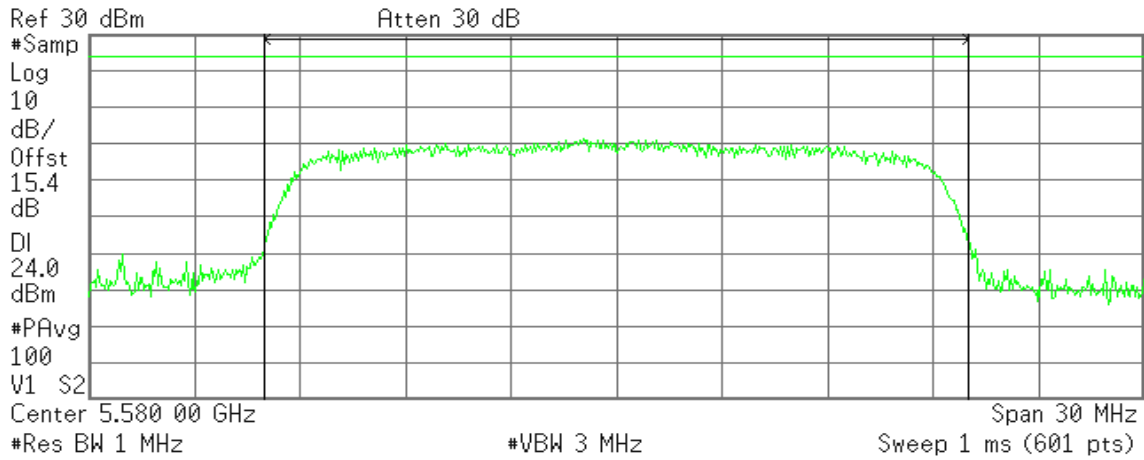

**Channel Power**

10.58 dBm /20.0000 MHz


**Power Spectral Density**

-62.43 dBm/Hz

### CH High

Agilent 15:51:47 Jul 25, 2012

R T

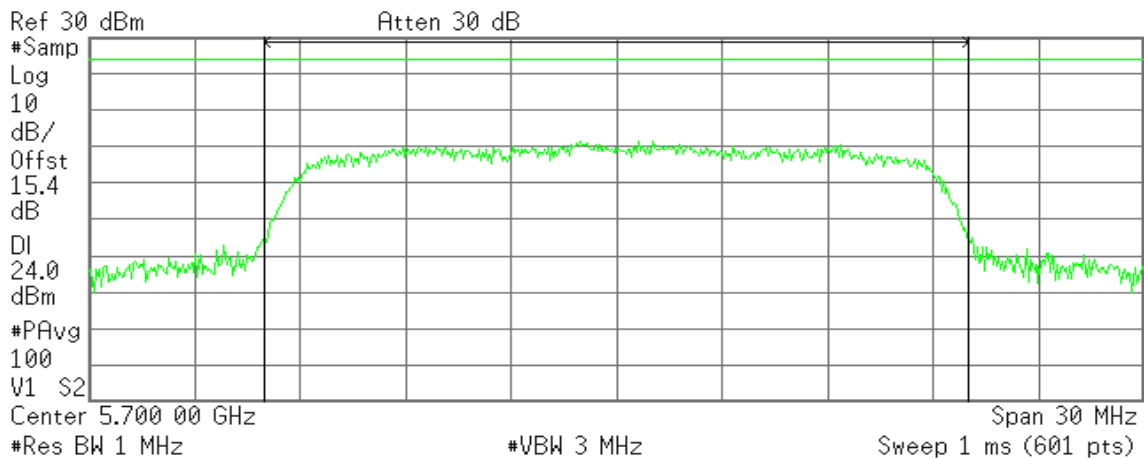

**Channel Power**

10.82 dBm /20.0000 MHz

**Power Spectral Density**

-62.19 dBm/Hz




## 7.5 BAND EDGES MEASUREMENT

### LIMIT

According to §15.407(b) & RSS-210 §A8.5,

- (1) The provisions of Section 15.205 of this part apply to intentional radiators operating under this section.
- (2) When measuring the emission limits, the nominal carrier frequency shall be adjusted as close to the upper and lower frequency block edges as the design of the equipment permits.

### Test Configuration

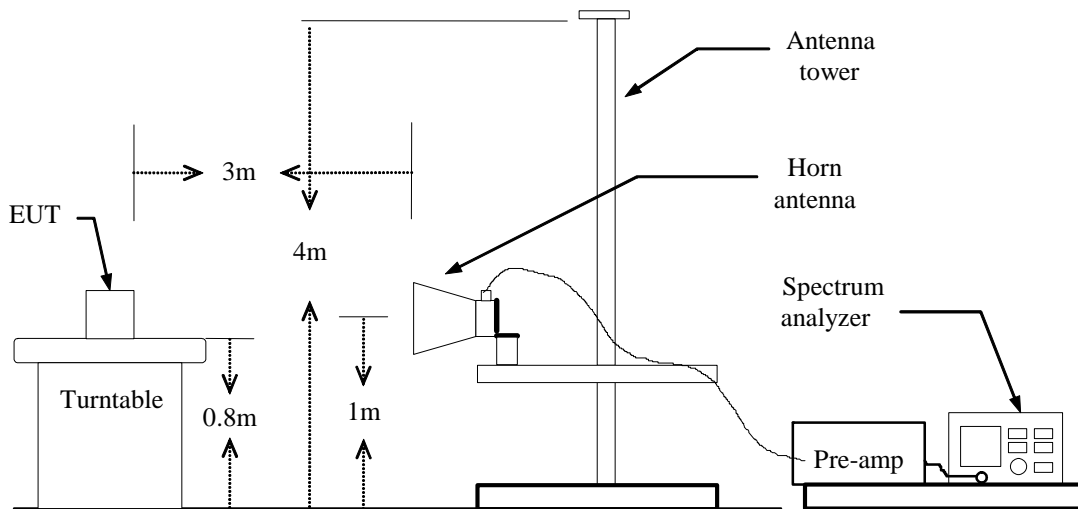

### TEST PROCEDURE

1. The EUT is placed on a turntable, which is 0.8m above the ground plane.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emission.
4. Set the spectrum analyzer in the following setting in order to capture the lower and upper band-edges of the emission:
  - (a) PEAK: RBW=VBW=1MHz / Sweep=AUTO
  - (b) AVERAGE: RBW=1MHz / VBW=10Hz / Sweep=AUTO
5. Repeat the procedures until all the PEAK and AVERAGE versus POLARIZATION are measured.

### TEST RESULTS


Refer to attach spectrum analyzer data chart.



### Band Edges (IEEE 802.11a mode / 5180 MHz)


Detector mode: Peak

Polarity: Vertical

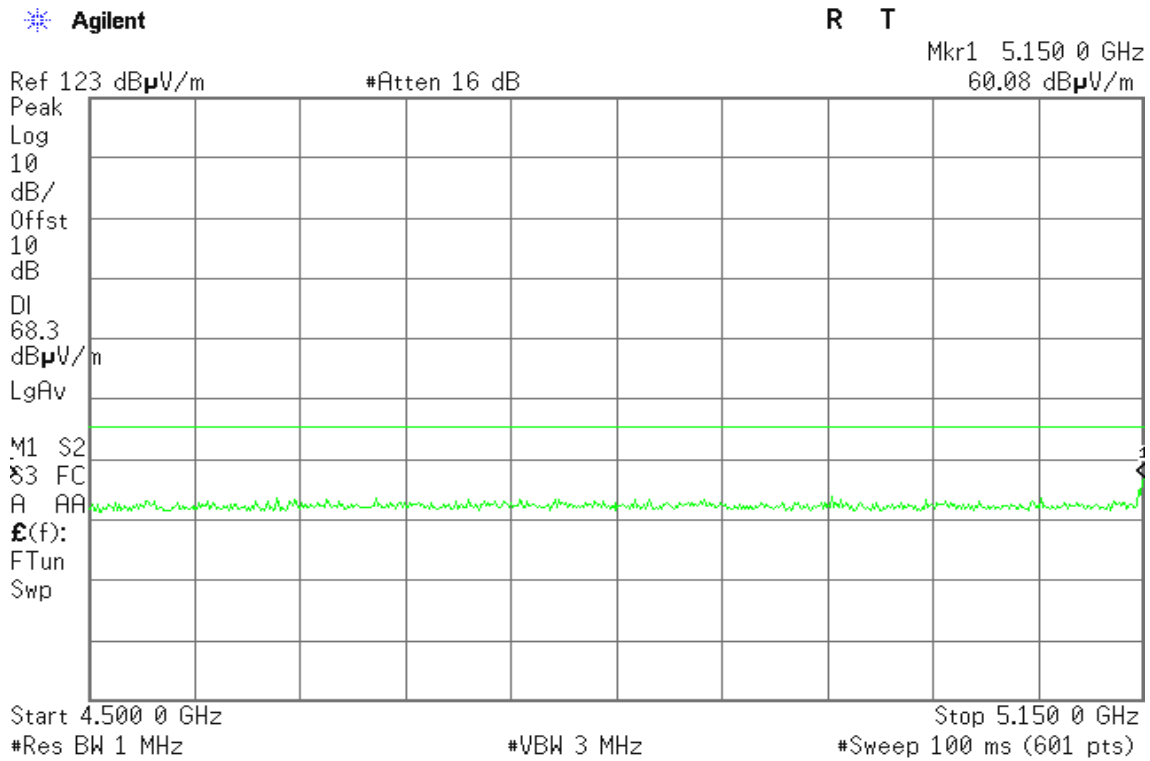

Detector mode: Average

Polarity: Vertical

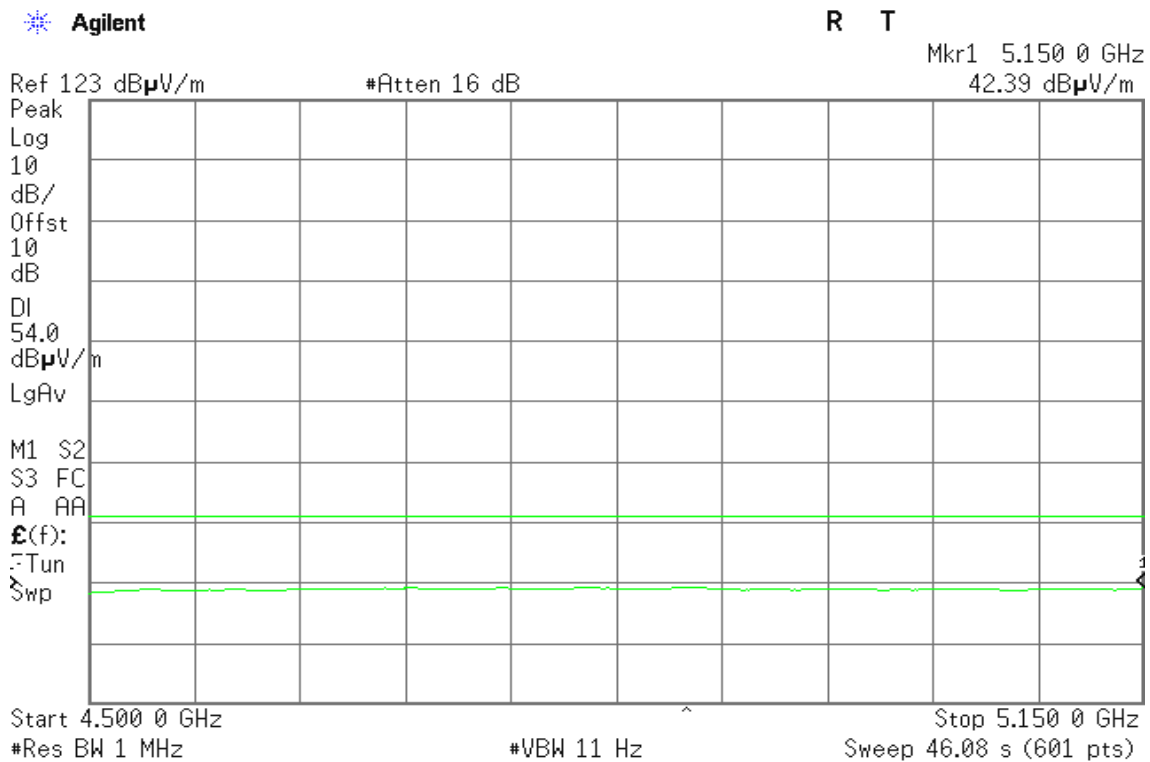




Detector mode: Peak

Polarity: Horizontal

Agilent

R T

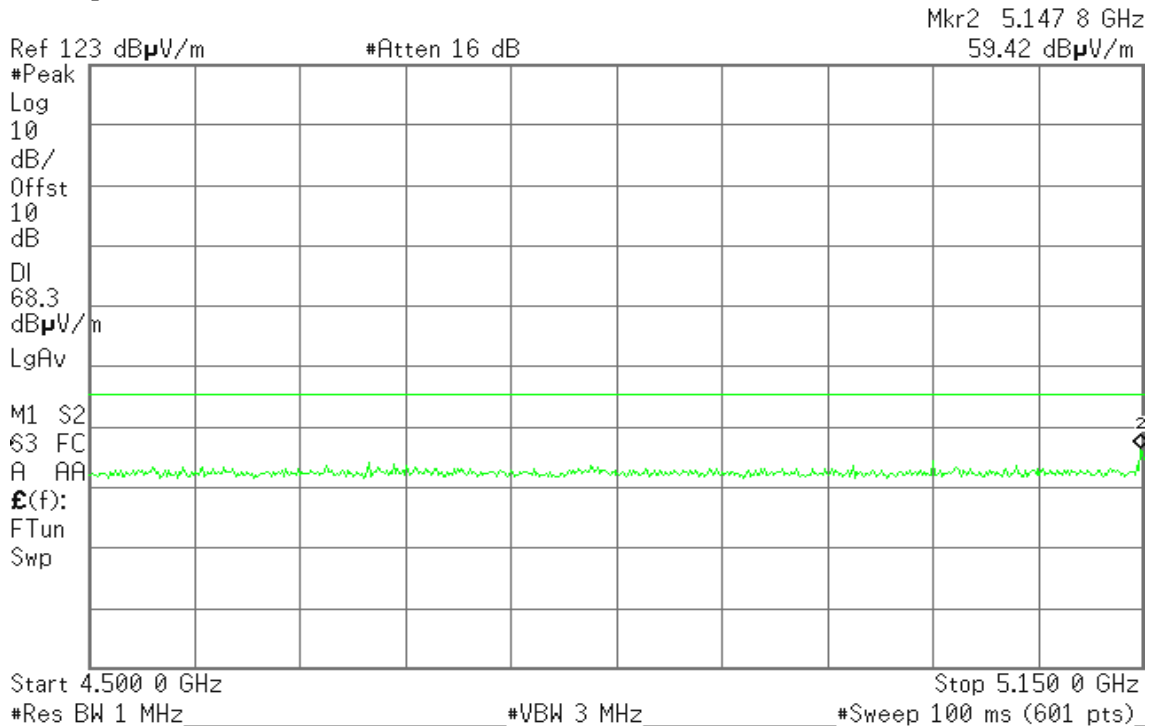


Detector mode: Average

Polarity: Horizontal

Agilent

R T

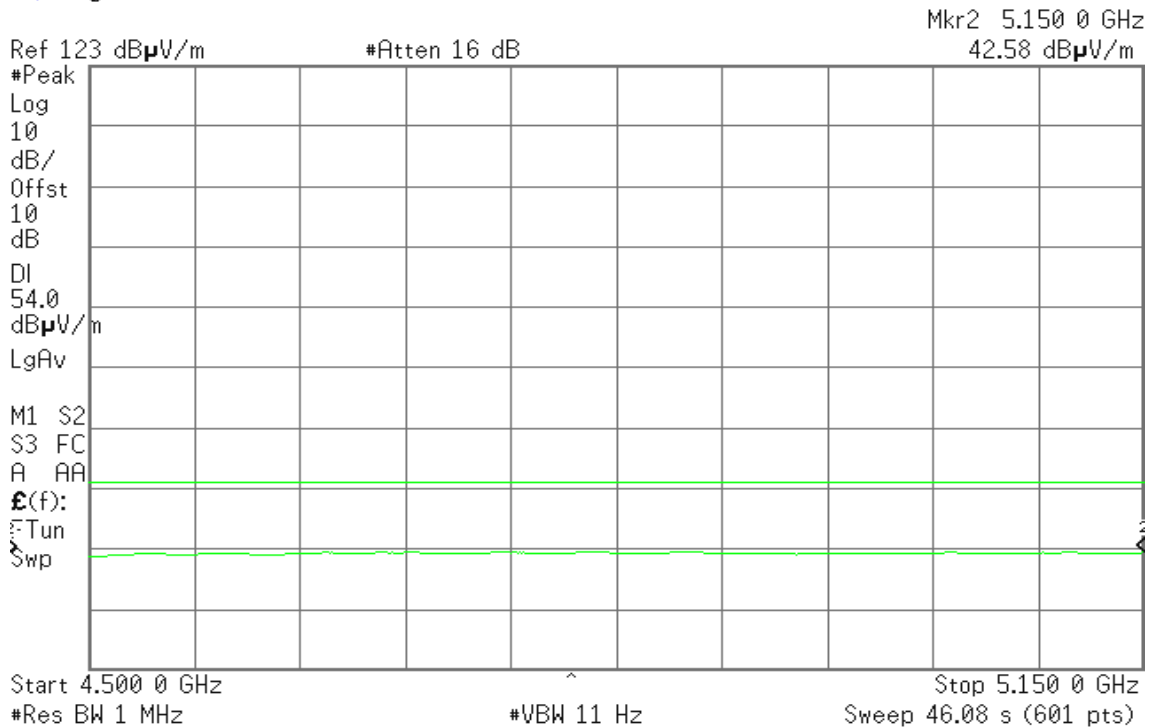




### Band Edges (IEEE 802.11a mode / 5320 MHz)


Detector mode: Peak

Polarity: Vertical

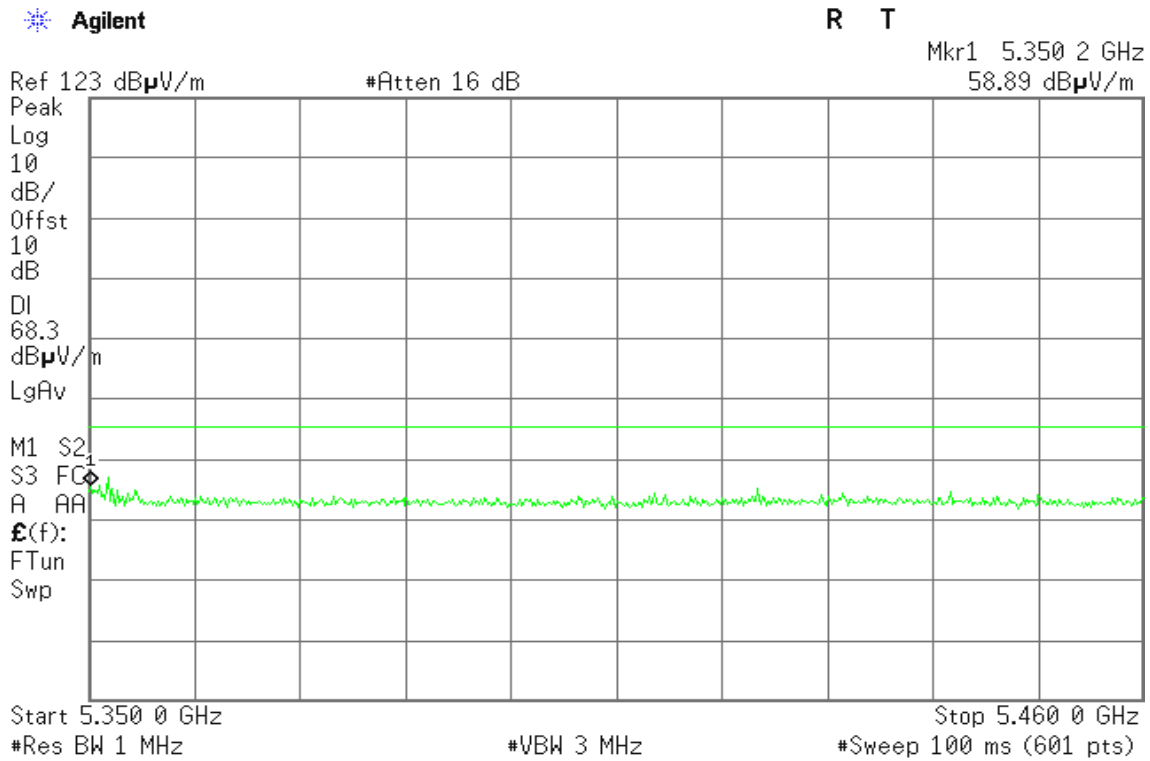

Detector mode: Average

Polarity: Vertical

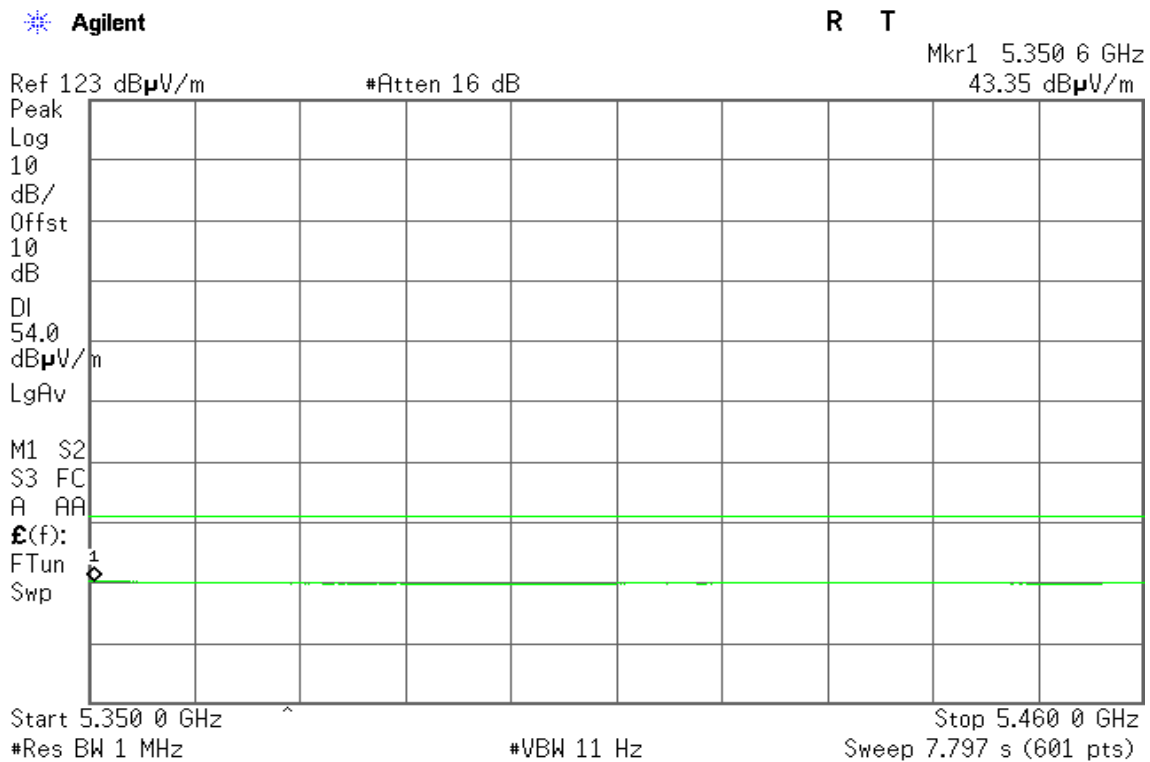






Detector mode: Peak

Polarity: Horizontal

Agilent

R T

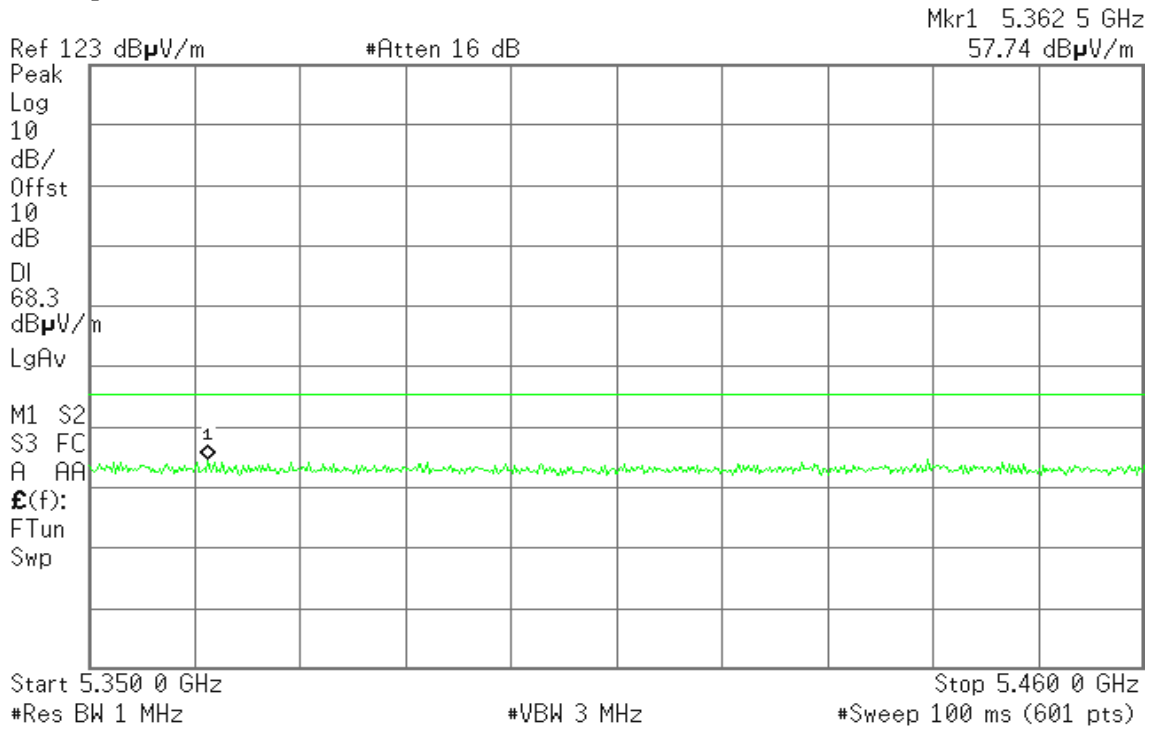


Detector mode: Average

Polarity: Horizontal

Agilent

R T

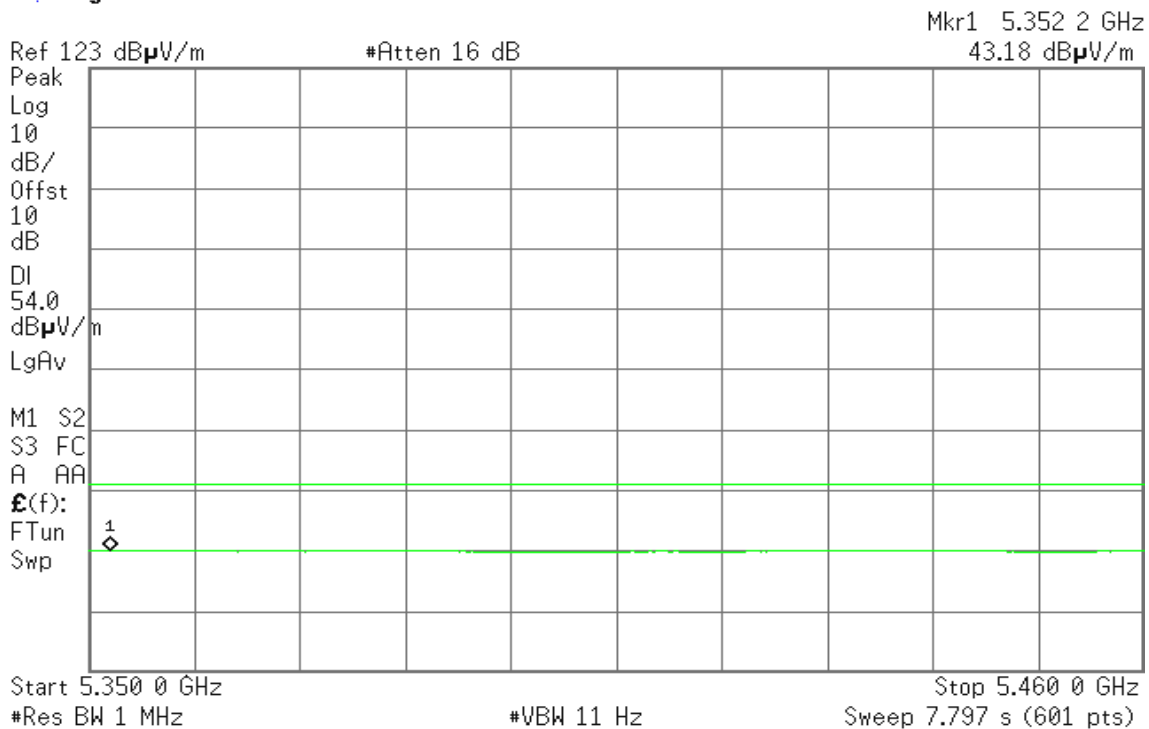




### Band Edges (IEEE 802.11n HT 20 MHz Channel mode / 5180 MHz)

Detector mode: Peak

Polarity: Vertical

Agilent

R T

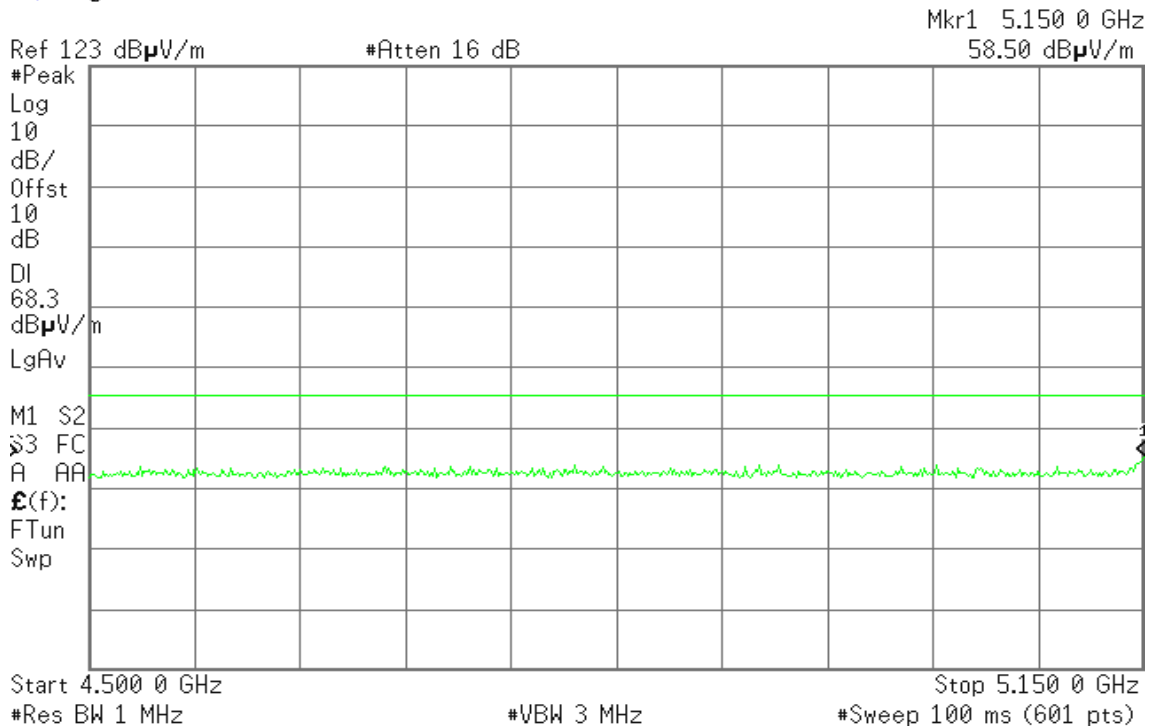


Detector mode: Average

Polarity: Vertical

Agilent

R T

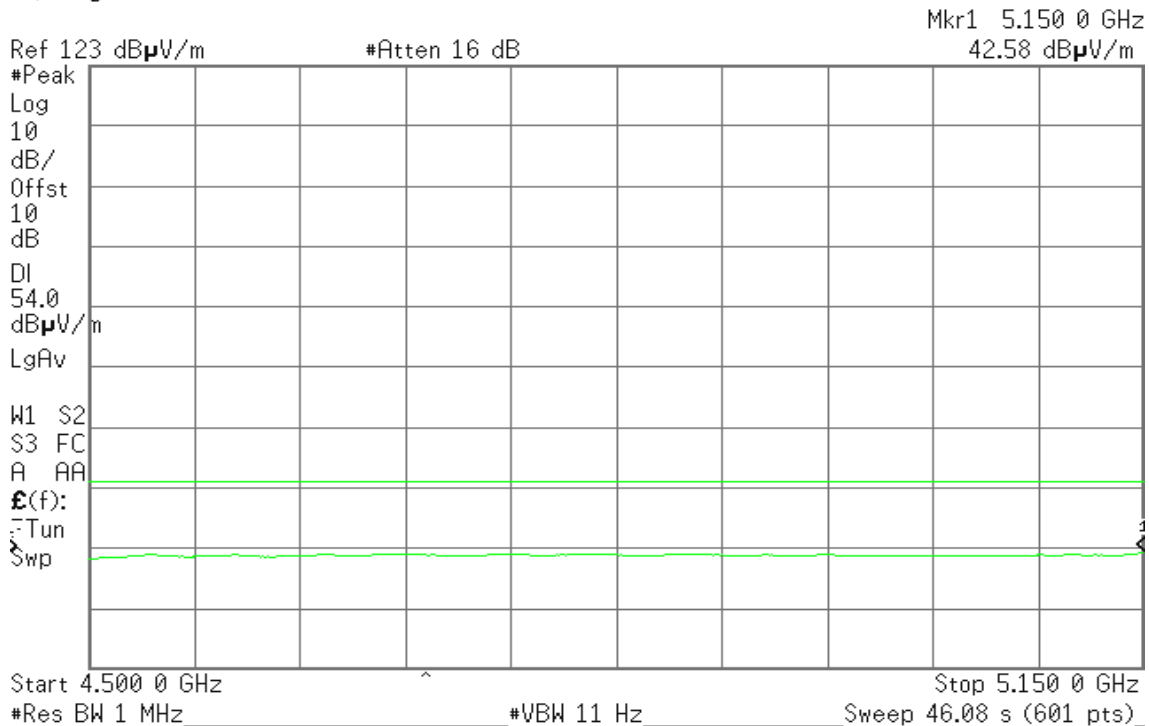




Detector mode: Peak

Polarity: Horizontal

Agilent

R T

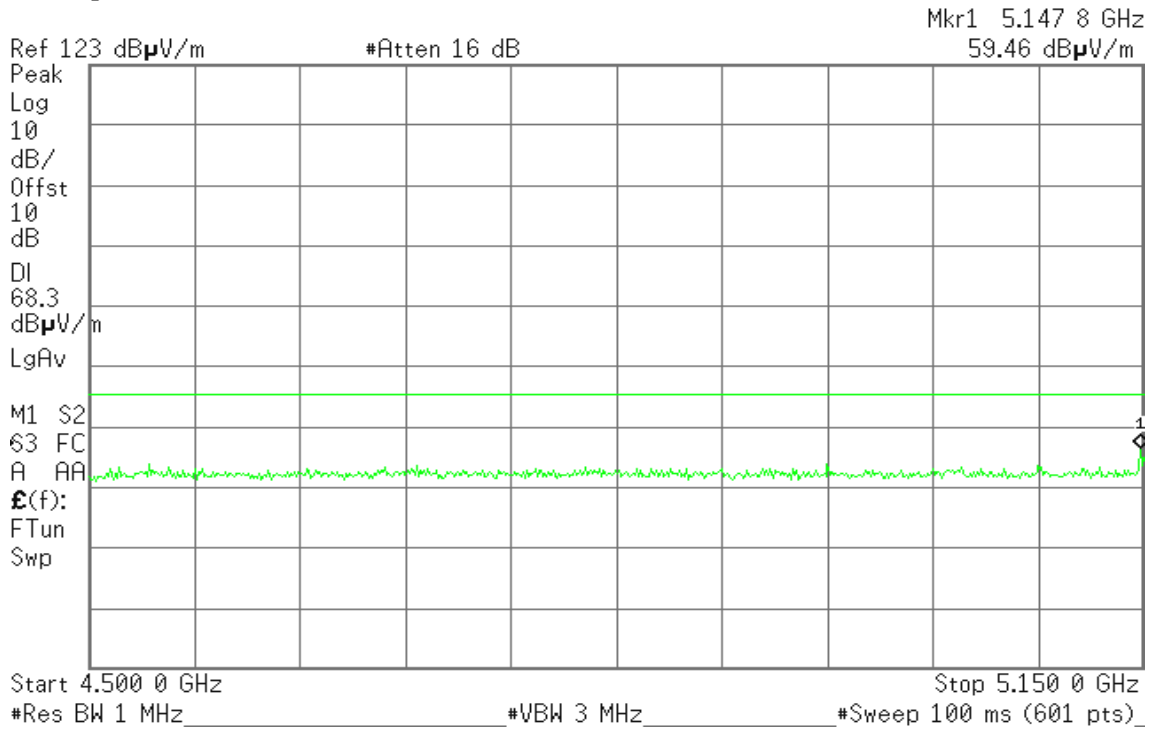


Detector mode: Average

Polarity: Horizontal

Agilent

R T

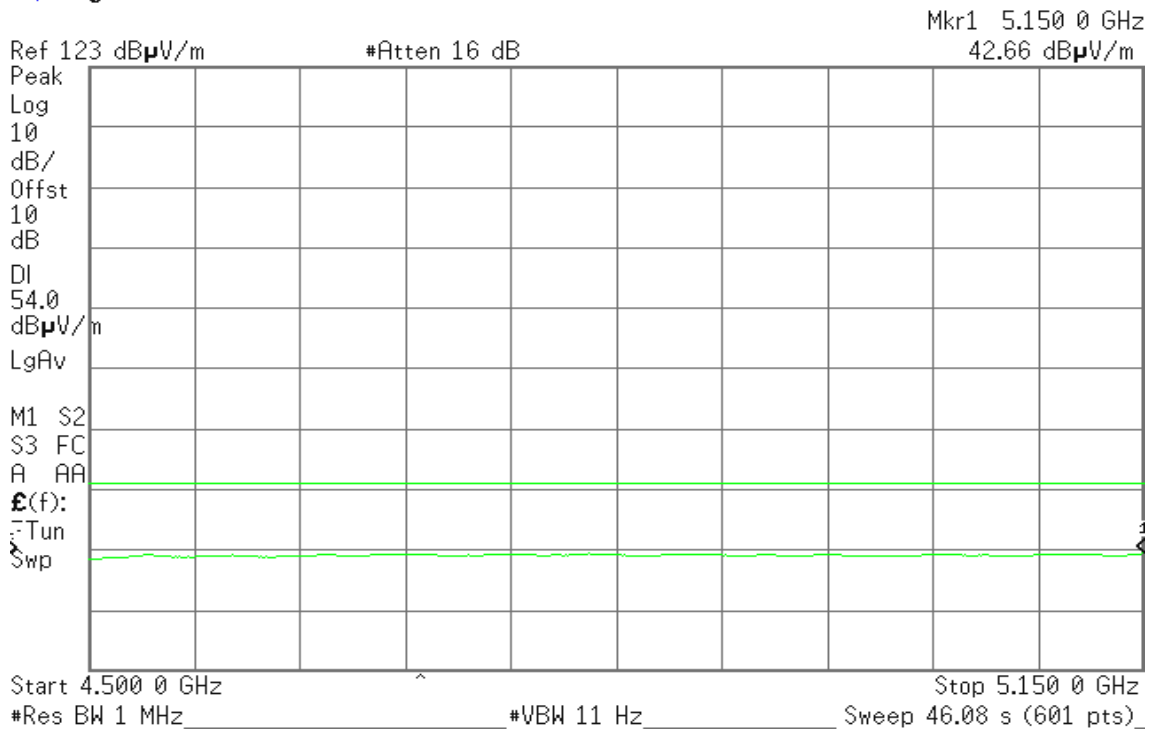



Band Edges (IEEE 802.11n HT 20 MHz Channel mode / 5320 MHz)


Detector mode: Peak

Polarity: Vertical

Agilent

R T

Mkr1 5.350 0 GHz  
59.45 dBµV/m

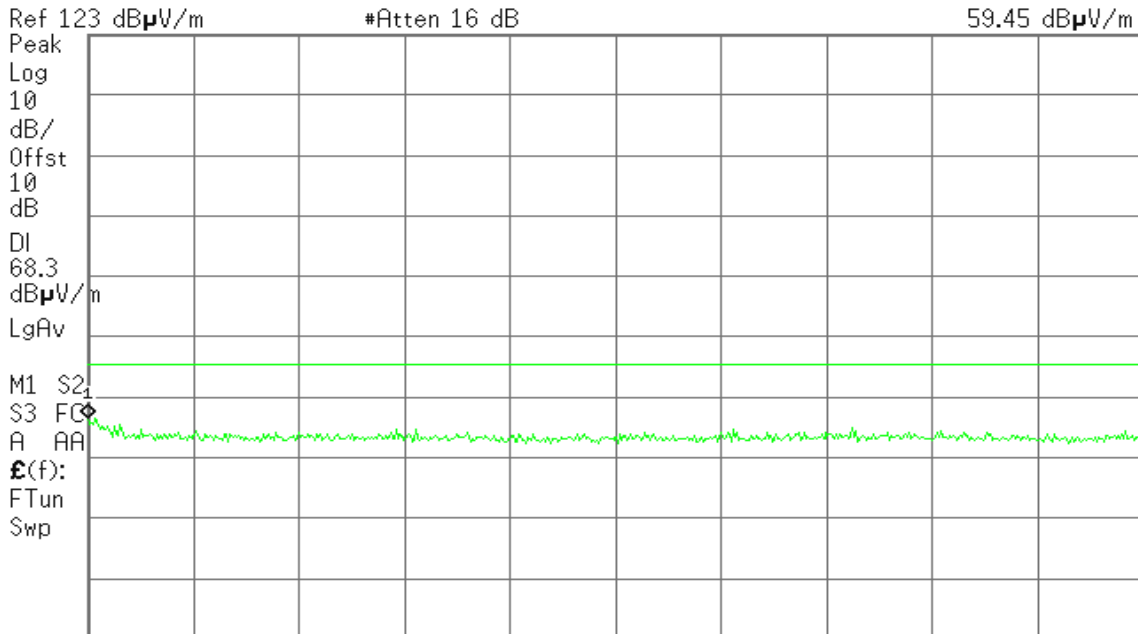

Start 5.350 0 GHz Stop 5.460 0 GHz  
#Res BW 1 MHz #VBW 3 MHz #Sweep 100 ms (601 pts)


Detector mode: Average

Polarity: Vertical

Agilent

R T

Mkr1 5.432 0 GHz  
43.22 dBµV/m

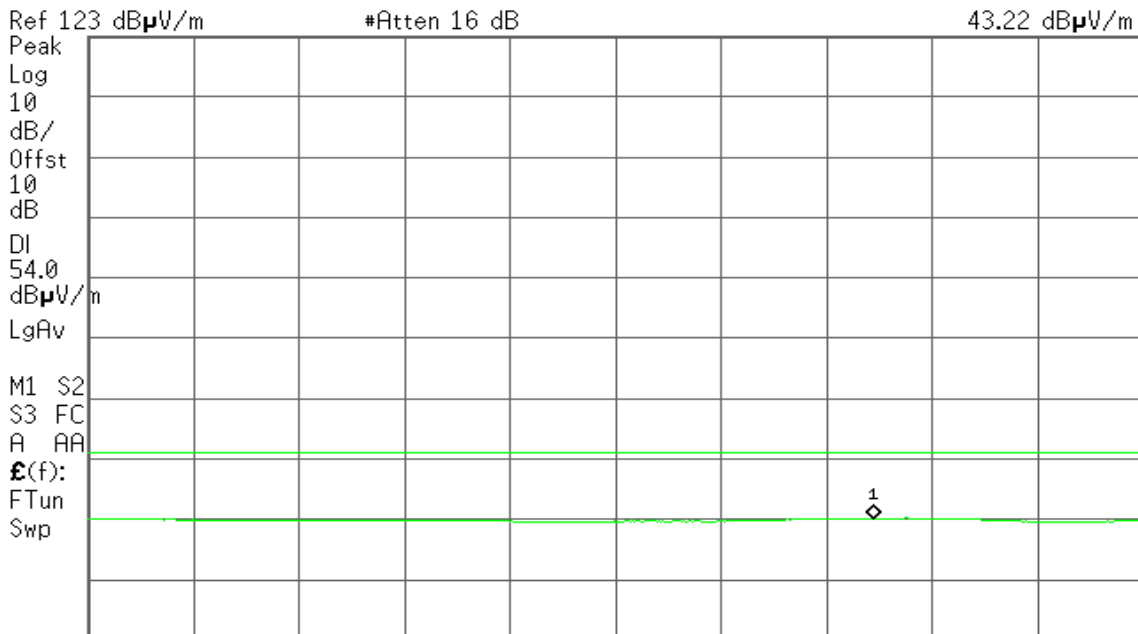

Start 5.350 0 GHz Stop 5.460 0 GHz  
#Res BW 1 MHz #VBW 11 Hz Sweep 7.797 s (601 pts)




Detector mode: Peak

Polarity: Horizontal

Agilent

R T

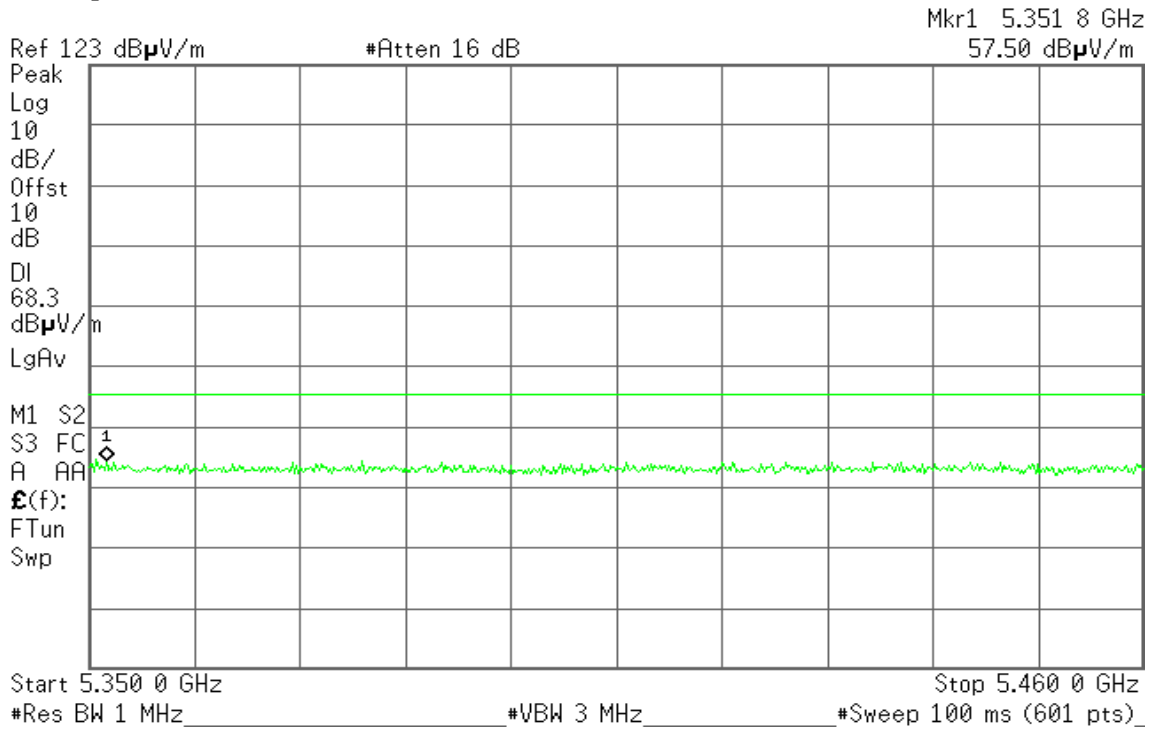


Detector mode: Average

Polarity: Horizontal

Agilent

R T

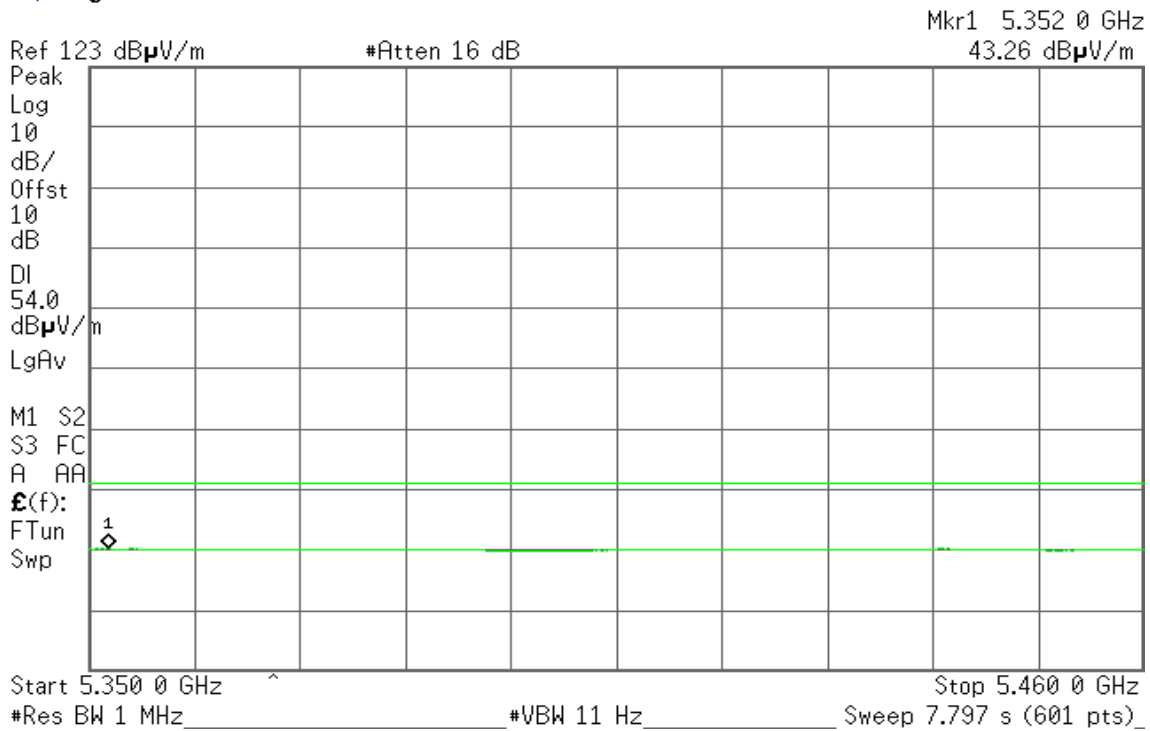



## 7.6 PEAK POWER SPECTRAL DENSITY

### LIMIT

According to §15.407(a)


- (1) For the band 5.15-5.25 GHz, the peak power spectral density shall not exceed 4dBm in any 1MHz band.
- (2) For the band 5.25-5.35 GHz, the peak power spectral density shall not exceed 11dBm in any 1MHz band.

According to RSS-210 §A9.2,

- (1) The e.i.r.p. spectral density shall not exceed 10 dBm in any 1.0 MHz band.
- (2) The power spectral density shall not exceed 11 dBm in any 1.0 MHz band.

*If transmitting antennas of directional gain greater than 6dBi are used, both the peak transmit power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.*

### Test Configuration



### TEST PROCEDURE

1. Place the EUT on the table and set it in transmitting mode.  
Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
2. Set the spectrum analyzer as RBW = 1MHz, VBW = 3MHz, Span = Sweep= AUTO
3. Record the max. reading.
4. Repeat the above procedure until the measurements for all frequencies are completed

### TEST RESULTS

*No non-compliance noted*



**Test Data**

**Test mode: IEEE 802.11a mode / 5180 ~ 5240MHz**

Channel	Frequency (MHz)	PPSD (dBm)	MAX PPSD (dBm)	Limit (dBm)	Margin	Result
Low	5180	1.79	1.88	4.00	2.12	PASS
Mid	5220	2.39	2.48	4.00	1.52	PASS
High	5240	2.43	2.52	4.00	1.48	PASS

**Test mode: IEEE 802.11n HT 20 MHz Channel mode / 5180 ~ 5240MHz**

Channel	Frequency (MHz)	PPSD (dBm)	MAX PPSD (dBm)	Limit (dBm)	Margin	Result
Low	5180	1.78	1.87	4.00	2.13	PASS
Mid	5220	2.33	2.41	4.00	1.59	PASS
High	5240	1.87	1.96	4.00	2.04	PASS

**Test mode: IEEE 802.11a mode/ 5260 ~ 5320MHz**

Channel	Frequency (MHz)	PPSD (dBm)	MAX PPSD (dBm)	Limit (dBm)	Margin	Result
Low	5260	2.75	2.84	11.00	8.16	PASS
Mid	5280	2.26	2.35	11.00	8.65	PASS
High	5320	2.70	2.78	11.00	8.22	PASS

**Test mode: IEEE 802.11n HT 20 MHz Channel mode / 5260 ~ 5320MHz**

Channel	Frequency (MHz)	PPSD (dBm)	MAX PPSD (dBm)	Limit (dBm)	Margin	Result
Low	5260	2.42	2.51	11.00	8.49	PASS
Mid	5280	1.87	1.95	11.00	9.05	PASS
High	5320	1.89	1.98	11.00	9.02	PASS

**Note: MAX PPSD= PPSD+10log(1/x), where x=duty cycle**



**Test mode: IEEE 802.11a mode / 5500 ~ 5700MHz**

Channel	Frequency	PPSD (dBm)	MAX PPSD (dBm)	Limit (dBm)	Margin	Result
	(MHz)					
Low	5500	2.49	2.58	11.00	8.42	PASS
Mid	5580	1.96	2.04	11.00	8.96	PASS
High	5700	2.14	2.23	11.00	8.77	PASS

**Test mode: IEEE 802.11n HT 20 MHz Channel mode / 5500 ~ 5700MHz**

Channel	Frequency	PPSD (dBm)	MAX PPSD (dBm)	Limit (dBm)	Margin	Result
	(MHz)					
Low	5500	1.79	1.87	11.00	9.13	PASS
Mid	5580	1.52	1.61	11.00	9.39	PASS
High	5700	1.57	1.65	11.00	9.35	PASS

**Note: MAX PPSD= PPSD+10log(1/x), where x=duty cycle**





Test Plot


IEEE 802.11a mode / 5180 ~ 5240MHz

CH Low

Agilent 13:59:10 Jul 25, 2012

R T

Mkr1 5.181 20 GHz  
1.789 dBm

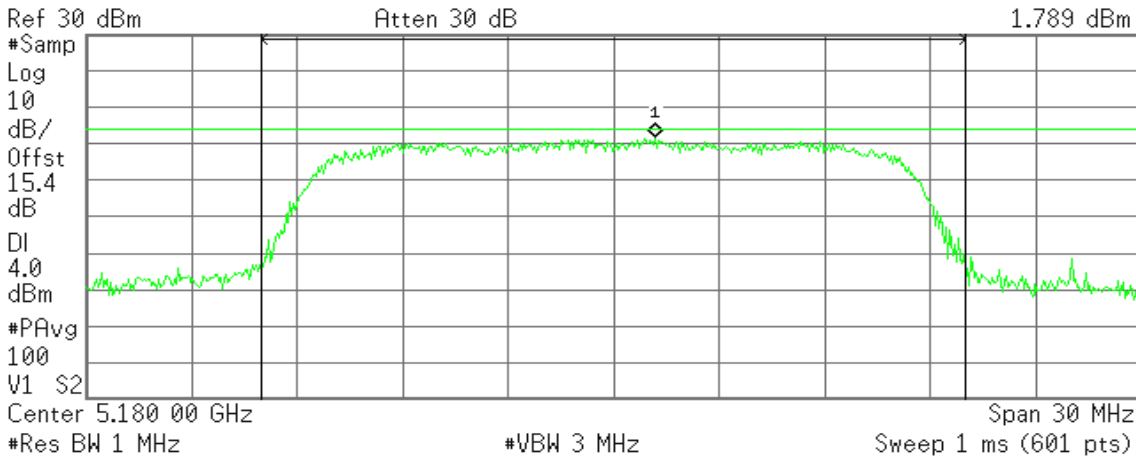

Channel Power

10.71 dBm /20.0000 MHz

Power Spectral Density


-62.30 dBm/Hz

CH Mid

Agilent 14:09:45 Jul 25, 2012

R T

Mkr1 5.219 10 GHz  
2.390 dBm

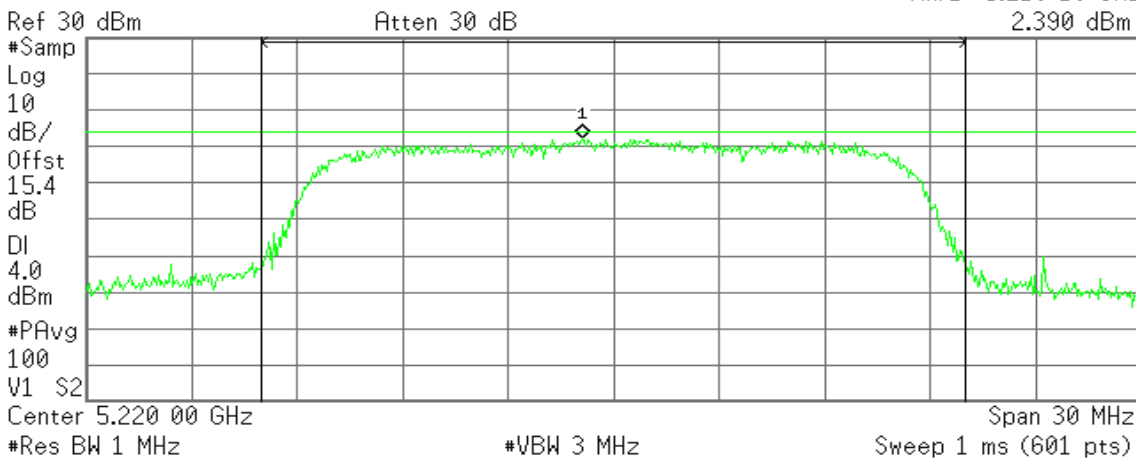

Channel Power

11.48 dBm /20.0000 MHz

Power Spectral Density

-61.53 dBm/Hz




**CH High**

Agilent 14:14:36 Jul 25, 2012

R T

Mkr1 5.240 90 GHz  
2.434 dBm

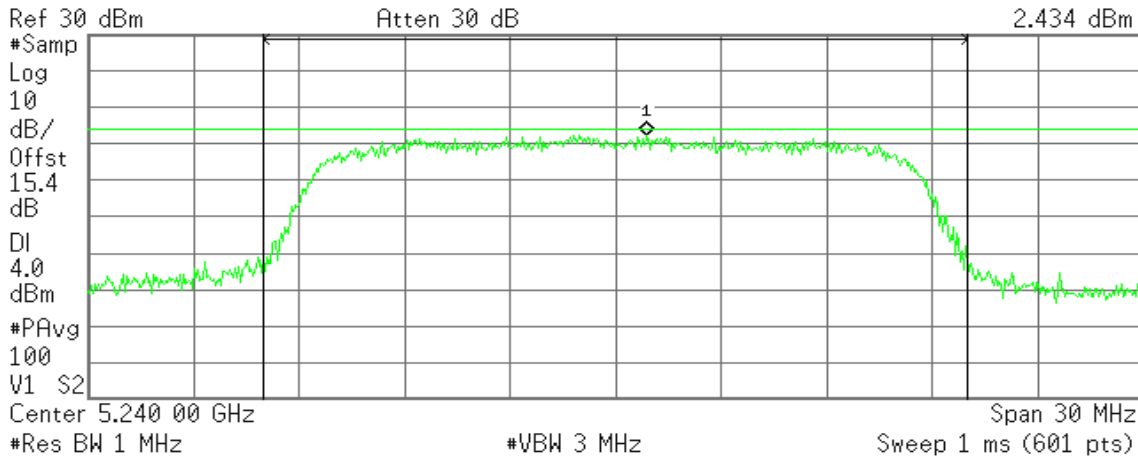

**Channel Power**

11.43 dBm /20.0000 MHz

**Power Spectral Density**

-61.58 dBm/Hz


**IEEE 802.11n HT 20 MHz Channel mode / 5180 ~ 5240MHz**

**CH Low**

Agilent 15:01:43 Jul 25, 2012

R T

Mkr1 5.178 55 GHz  
1.778 dBm

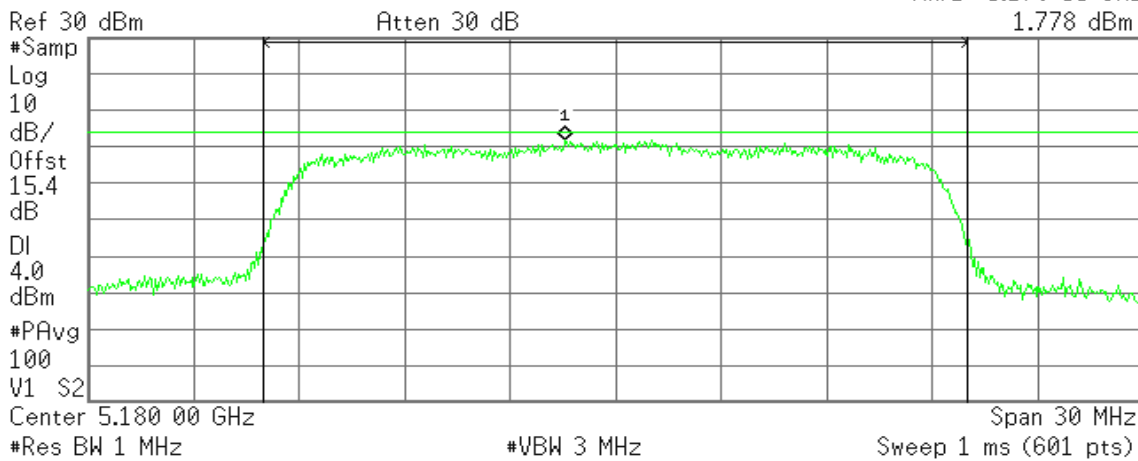

**Channel Power**

11.38 dBm /20.0000 MHz

**Power Spectral Density**

-61.64 dBm/Hz




### CH Mid

Agilent 15:05:08 Jul 25, 2012

R T

Mkr1 5.218 95 GHz  
2.326 dBm

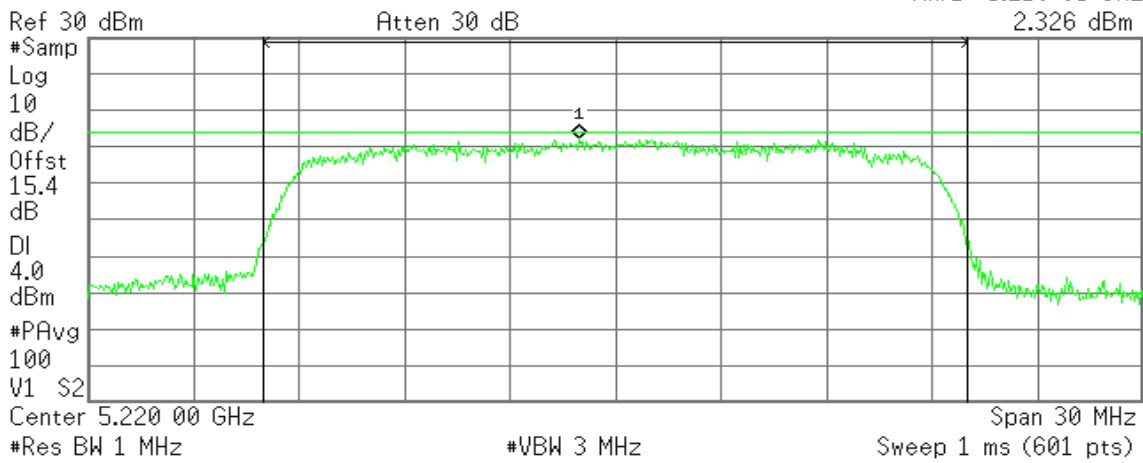

**Channel Power**

11.63 dBm /20.0000 MHz

**Power Spectral Density**


-61.38 dBm/Hz

### CH High

Agilent 15:10:14 Jul 25, 2012

R T

Mkr1 5.240 95 GHz  
1.873 dBm

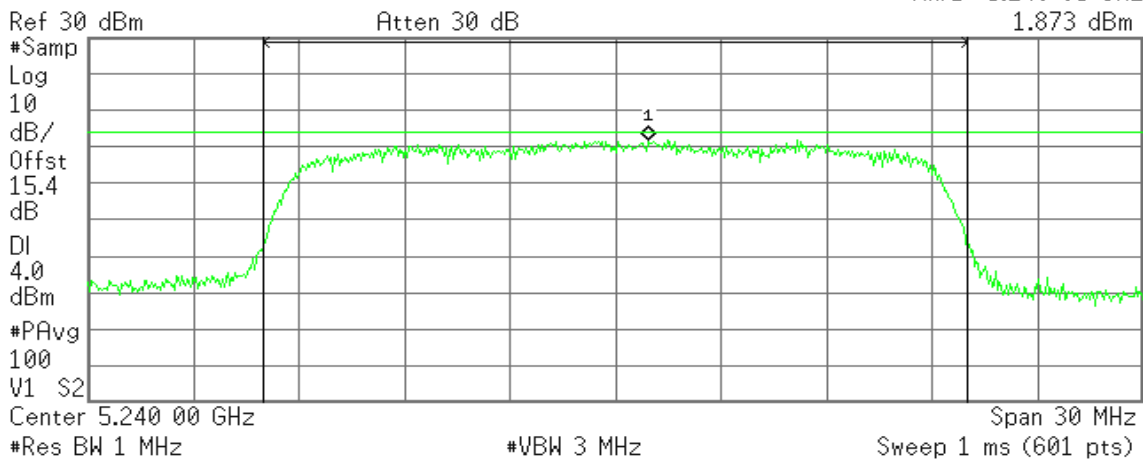

**Channel Power**

11.45 dBm /20.0000 MHz

**Power Spectral Density**

-61.56 dBm/Hz




**IEEE 802.11a mode / 5260 ~ 5320MHz**

**CH Low**

Agilent 14:20:26 Jul 25, 2012

R T

Mkr1 5.259 10 GHz  
2.748 dBm

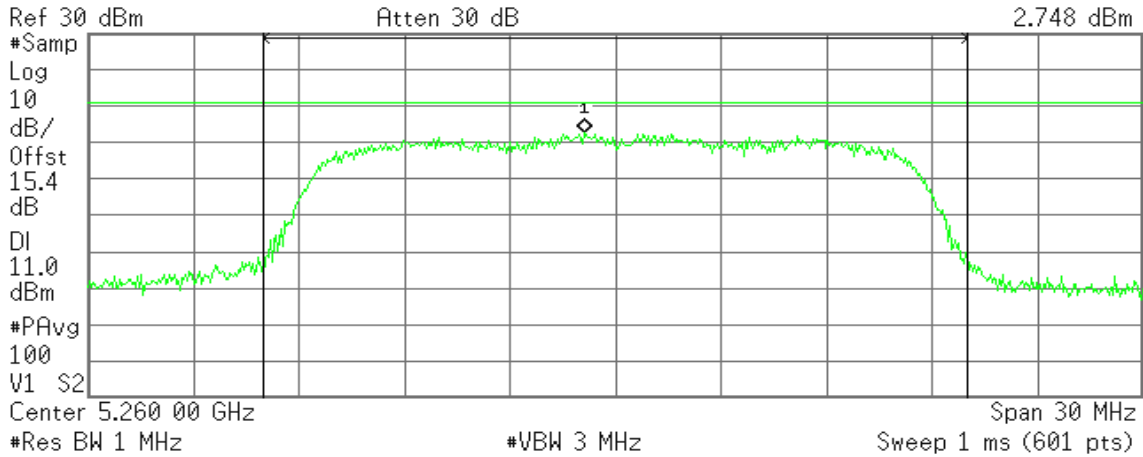

**Channel Power**

11.87 dBm /20.0000 MHz

**Power Spectral Density**


-61.14 dBm/Hz

**CH Mid**

Agilent 14:24:16 Jul 25, 2012

R T

Mkr1 5.281 45 GHz  
2.264 dBm

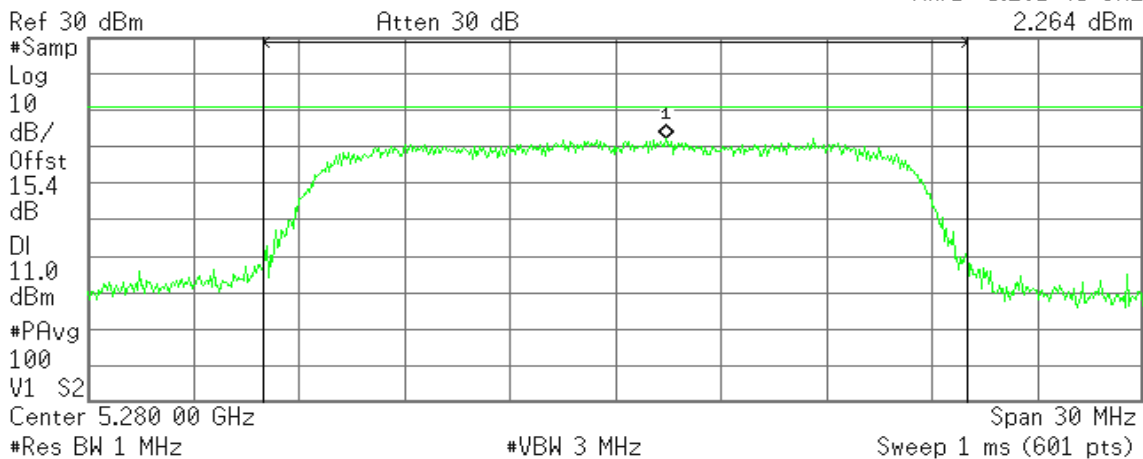

**Channel Power**

11.32 dBm /20.0000 MHz

**Power Spectral Density**

-61.69 dBm/Hz




**CH High**

Agilent 14:28:10 Jul 25, 2012

R T

Mkr1 5.318 90 GHz  
2.695 dBm

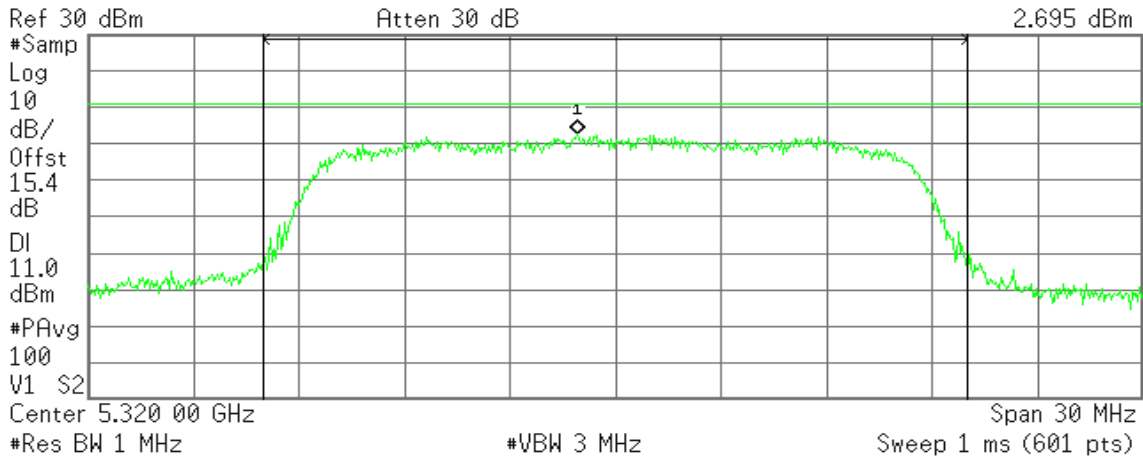

**Channel Power**

11.45 dBm /20.0000 MHz

**Power Spectral Density**

-61.56 dBm/Hz


**IEEE 802.11n HT 20 MHz Channel mode / 5260 ~ 5320MHz**

**CH Low**

Agilent 15:14:27 Jul 25, 2012

R T

Mkr1 5.261 30 GHz  
2.419 dBm

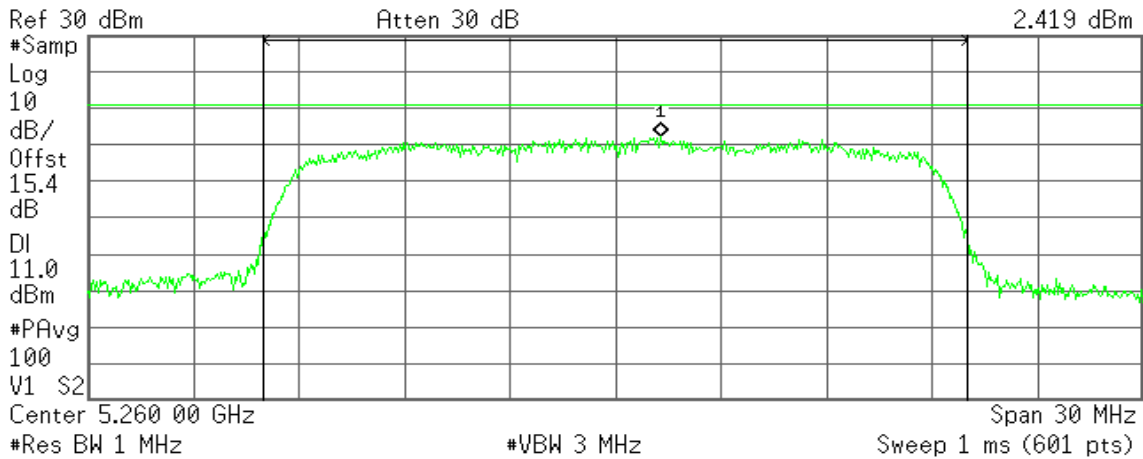

**Channel Power**

11.25 dBm /20.0000 MHz

**Power Spectral Density**

-61.76 dBm/Hz




### CH Mid

Agilent 15:21:49 Jul 25, 2012

R T

Mkr1 5.280 50 GHz  
1.865 dBm

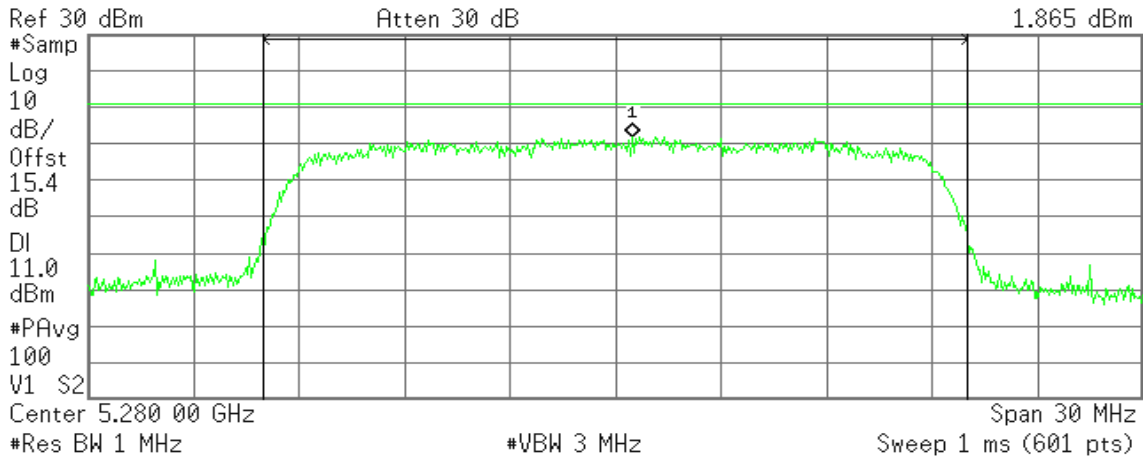

Channel Power

11.39 dBm /20.0000 MHz

Power Spectral Density


-61.62 dBm/Hz

### CH High

Agilent 15:28:02 Jul 25, 2012

R T

Mkr1 5.319 25 GHz  
1.891 dBm

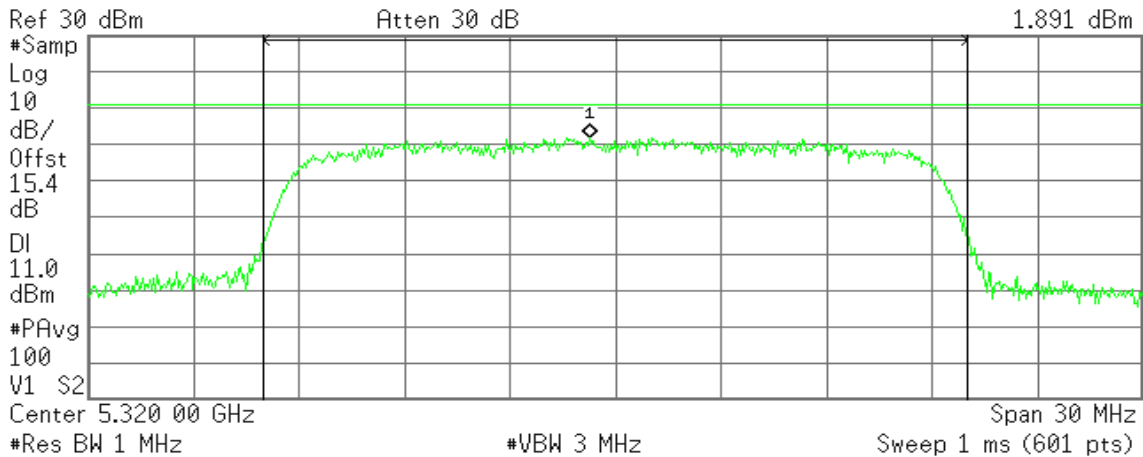

Channel Power

11.28 dBm /20.0000 MHz

Power Spectral Density

-61.73 dBm/Hz




**Test mode: IEEE 802.11a mode / 5500 ~ 5700MHz**

**CH Low**

Agilent 14:46:31 Jul 25, 2012

R T

Mkr1 5.498 95 GHz  
2.493 dBm

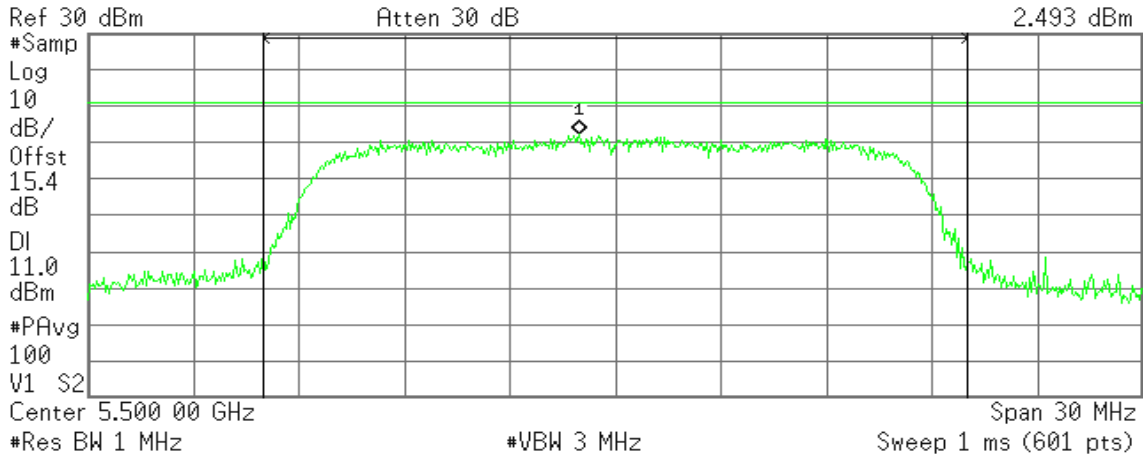

**Channel Power**

10.93 dBm /20.0000 MHz

**Power Spectral Density**


-62.08 dBm/Hz

**CH Mid**

Agilent 14:50:35 Jul 25, 2012

R T

Mkr1 5.581 55 GHz  
1.955 dBm

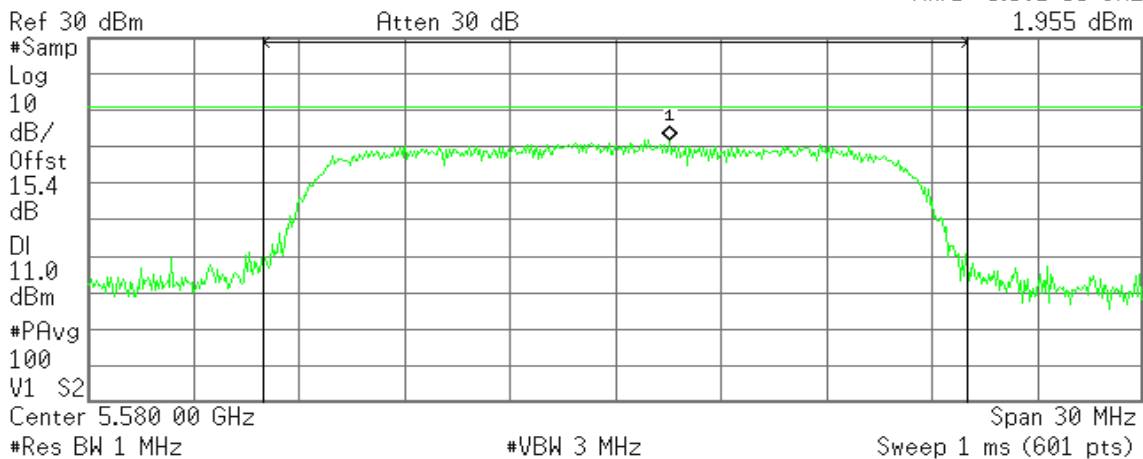

**Channel Power**

10.84 dBm /20.0000 MHz

**Power Spectral Density**

-62.17 dBm/Hz




### CH High

Agilent 14:54:24 Jul 25, 2012

R T

Mkr1 5.701 70 GHz  
2.143 dBm

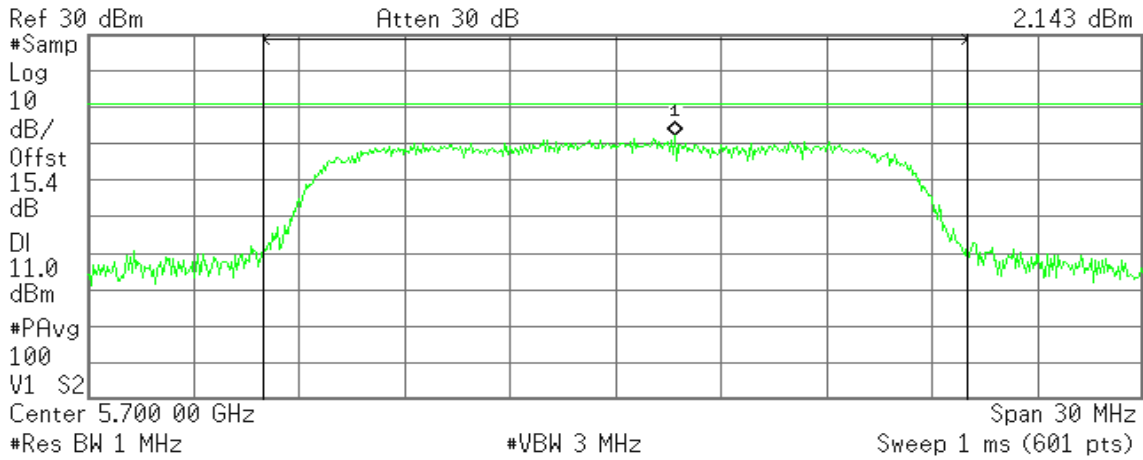

**Channel Power**

10.25 dBm /20.0000 MHz

**Power Spectral Density**

-62.76 dBm/Hz


### IEEE 802.11n HT 20 MHz Channel mode / 5500 ~ 5700MHz

#### CH Low

Agilent 15:32:27 Jul 25, 2012

R T

Mkr1 5.500 75 GHz  
1.787 dBm

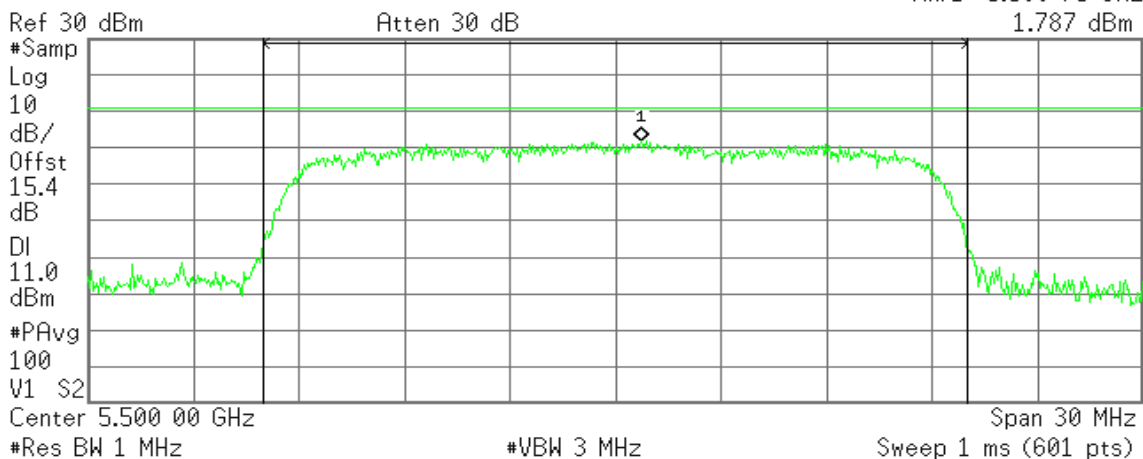

**Channel Power**

11.30 dBm /20.0000 MHz

**Power Spectral Density**

-61.71 dBm/Hz






### CH Mid

Agilent 15:44:19 Jul 25, 2012

R T

Mkr1 5.579 05 GHz  
1.522 dBm

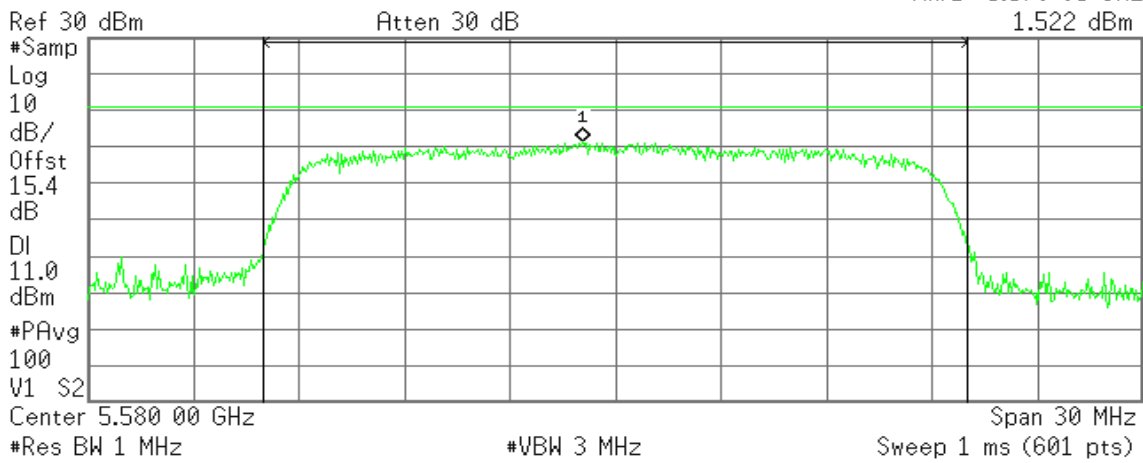

Channel Power

10.46 dBm /20.0000 MHz

Power Spectral Density


-62.55 dBm/Hz

### CH High

Agilent 15:51:58 Jul 25, 2012

R T

Mkr1 5.701 05 GHz  
1.565 dBm

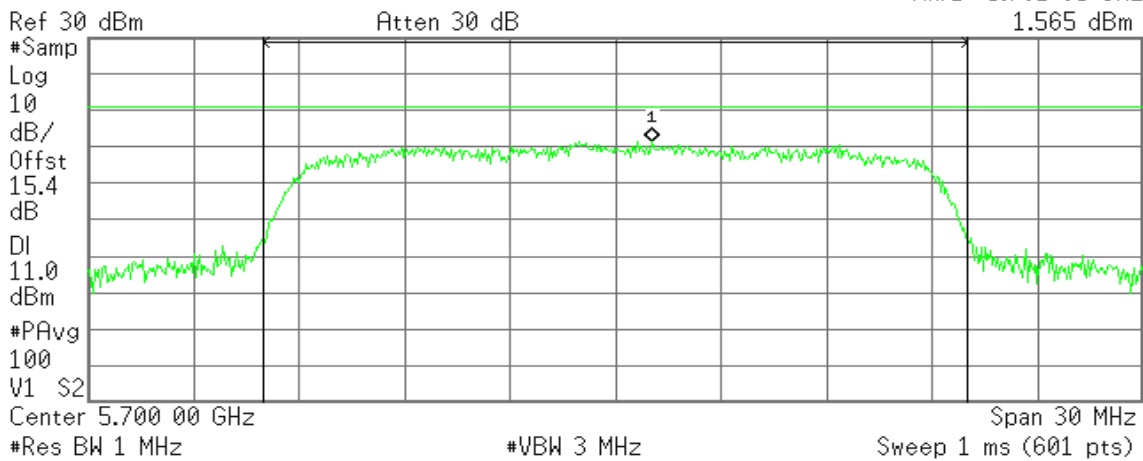

Channel Power

10.32 dBm /20.0000 MHz

Power Spectral Density

-62.69 dBm/Hz




## **7.7 PEAK EXCURSION**

### **LIMIT**

According to §15.407(a)(6), the ratio of the peak excursion of the modulation envelope (measured using a peak hold function) to the maximum conducted output power (measured as specified above) shall not exceed 13 dB across any 1 MHz bandwidth or the emission bandwidth whichever is less.

### **Test Configuration**



### **TEST PROCEDURE**

The test is performed in accordance with 789033 D01 General UNII Test Procedures v01.

1. Place the EUT on the table and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to spectrum.
3. Trace A, Set RBW = 1MHz, VBW = 3MHz, Span >26dB bandwidth, Max. hold.
4. Delta Mark trace A Maximum frequency and trace B same frequency.
5. Repeat the above procedure until measurements for all frequencies were complete.

### **TEST RESULTS**

*No non-compliance noted*



**Test Data**

**Test mode: IEEE 802.11a mode / 5180 ~ 5240MHz**

Channel	Frequency (MHz)	Peak Excursion (dB)	Limit (dB)	Margin (dB)	Result
Low	5180	10.55	13.00	-2.45	PASS
Mid	5220	10.69	13.00	-2.31	PASS
High	5240	12.36	13.00	-0.64	PASS

**Test mode: IEEE 802.11n HT 20 MHz Channel mode / 5180 ~ 5240MHz**

Channel	Frequency (MHz)	Peak Excursion (dB)	Limit (dB)	Margin (dB)	Result
Low	5180	9.54	13.00	-3.46	PASS
Mid	5220	10.54	13.00	-2.46	PASS
High	5240	9.04	13.00	-3.96	PASS

**Test mode: IEEE 802.11a mode / 5260 ~ 5320MHz**

Channel	Frequency (MHz)	Peak Excursion (dB)	Limit (dB)	Margin (dB)	Result
Low	5260	9.36	13.00	-3.64	PASS
Mid	5280	8.28	13.00	-4.72	PASS
High	5320	10.62	13.00	-2.38	PASS

**Test mode: IEEE 802.11n HT 20 MHz Channel mode / 5260 ~ 5320MHz**

Channel	Frequency (MHz)	Peak Excursion (dB)	Limit (dB)	Margin (dB)	Result
Low	5260	11.77	13.00	-1.23	PASS
Mid	5280	11.60	13.00	-1.40	PASS
High	5320	11.37	13.00	-1.63	PASS



**Test mode: IEEE 802.11a mode / 5500 ~ 5700MHz**

Channel	Frequency (MHz)	Peak Excursion (dB)	Limit (dB)	Margin (dB)	Result
Low	5500	9.19	13.00	-3.81	PASS
Mid	5600	10.77	13.00	-2.23	PASS
High	5700	9.63	13.00	-3.37	PASS

**Test mode: IEEE 802.11n HT 20 MHz Channel mode / 5500 ~ 5700MHz**

Channel	Frequency (MHz)	Peak Excursion (dB)	Limit (dB)	Margin (dB)	Result
Low	5500	10.23	13.00	-2.77	PASS
Mid	5600	8.87	13.00	-4.13	PASS
High	5700	8.22	13.00	-4.78	PASS



### Test Plot


#### IEEE 802.11a mode / 5180 ~ 5240MHz

##### CH Low

Agilent 13:59:33 Jul 25, 2012

R T

Mkr1 0 Hz  
10.55 dB

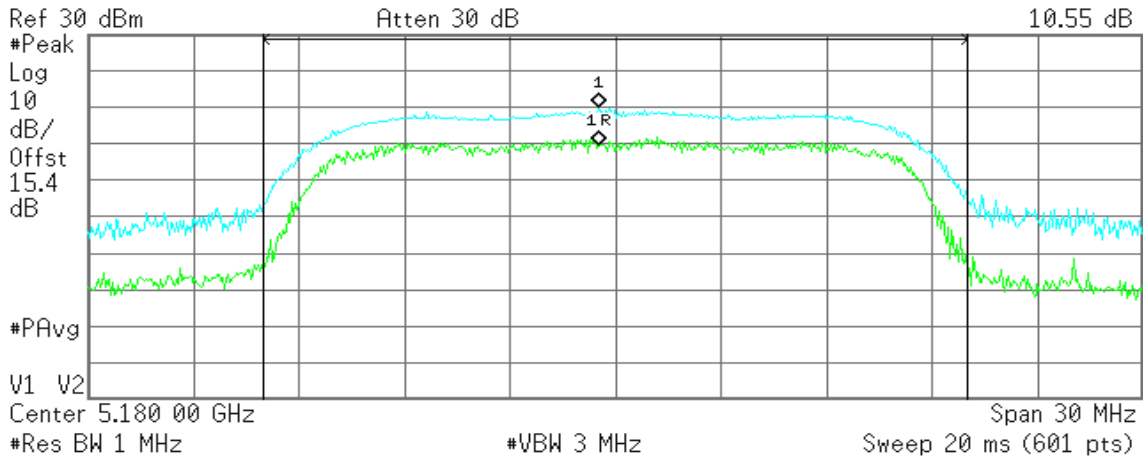

Channel Power

17.39 dBm /20.0000 MHz

Power Spectral Density


-55.62 dBm/Hz

##### CH Mid

Agilent 14:10:09 Jul 25, 2012

R T

Mkr1 0 Hz  
10.69 dB

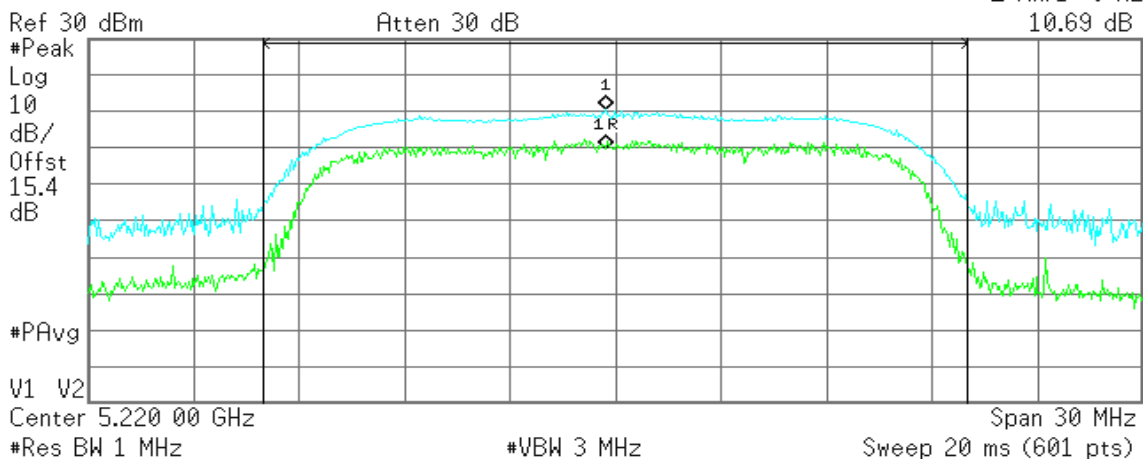

Channel Power

18.09 dBm /20.0000 MHz

Power Spectral Density

-54.92 dBm/Hz




**CH High**

Agilent 14:15:00 Jul 25, 2012

R T

Mkr1 0 Hz  
12.36 dB

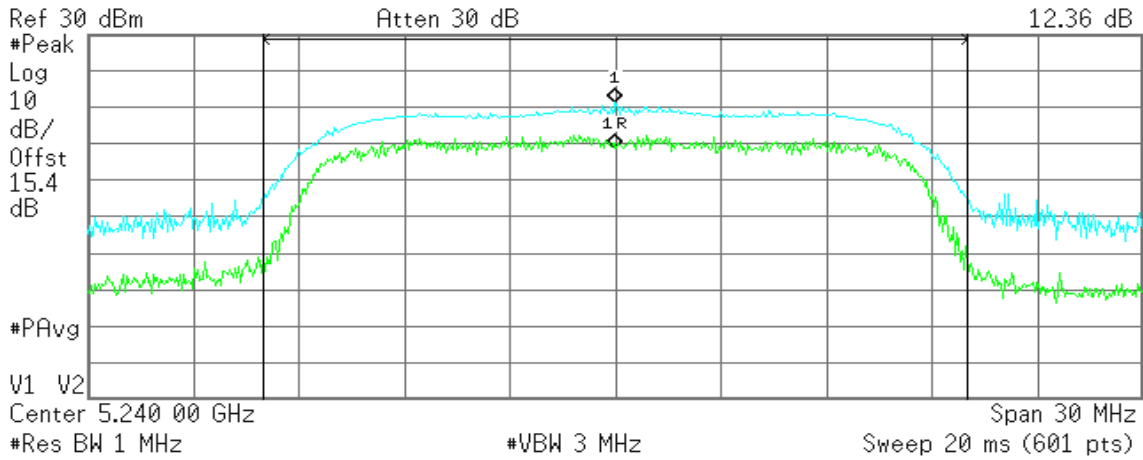

**Channel Power**

18.00 dBm /20.0000 MHz

**Power Spectral Density**

-55.01 dBm/Hz


**IEEE 802.11n HT 20 MHz Channel mode / 5180 ~ 5240MHz**

**CH Low**

Agilent 15:02:05 Jul 25, 2012

R T

Mkr1 0 Hz  
9.54 dB

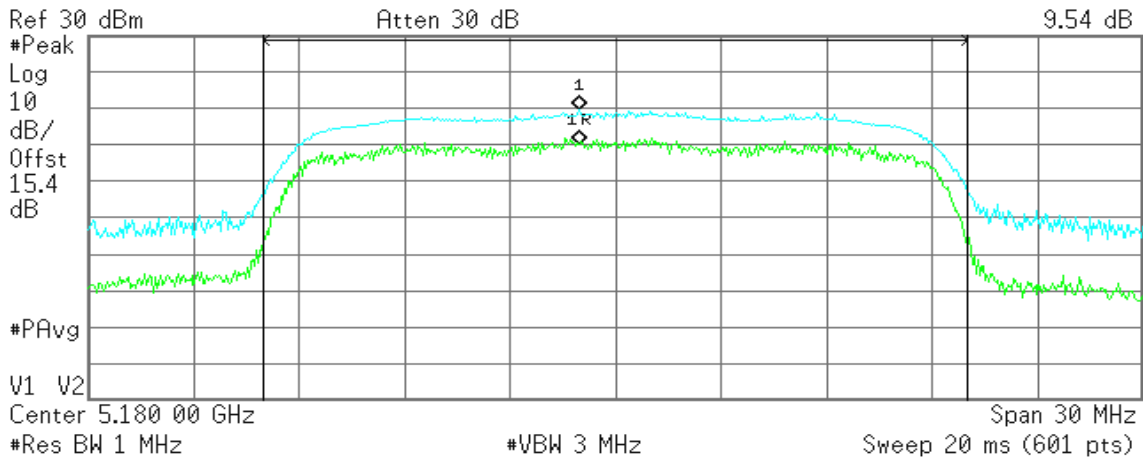

**Channel Power**

17.47 dBm /20.0000 MHz

**Power Spectral Density**

-55.54 dBm/Hz




### CH Mid

Agilent 15:06:07 Jul 25, 2012

R T

Mkr1 0 Hz  
10.45 dB

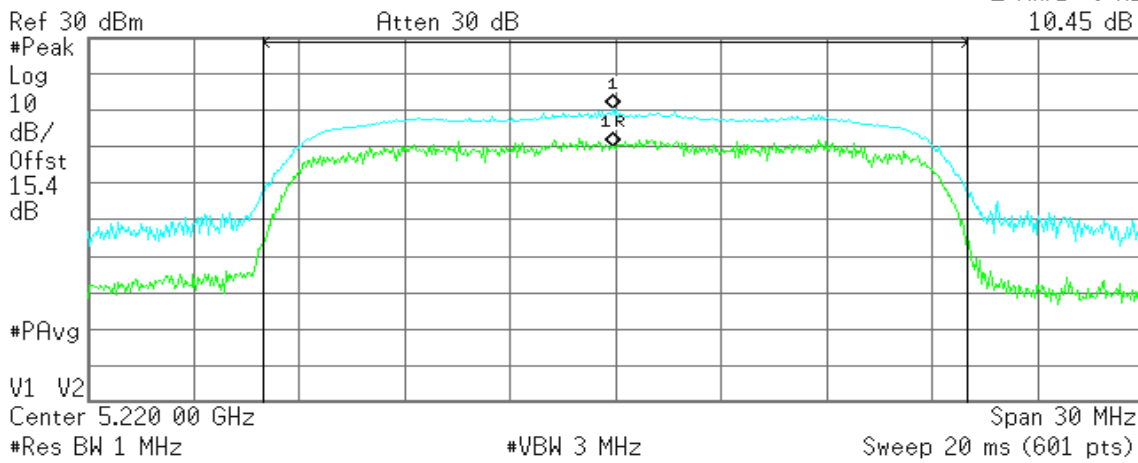

Channel Power

17.96 dBm /20.0000 MHz

Power Spectral Density


-55.05 dBm/Hz

### CH High

Agilent 15:10:37 Jul 25, 2012

R T

Mkr1 0 Hz  
9.04 dB

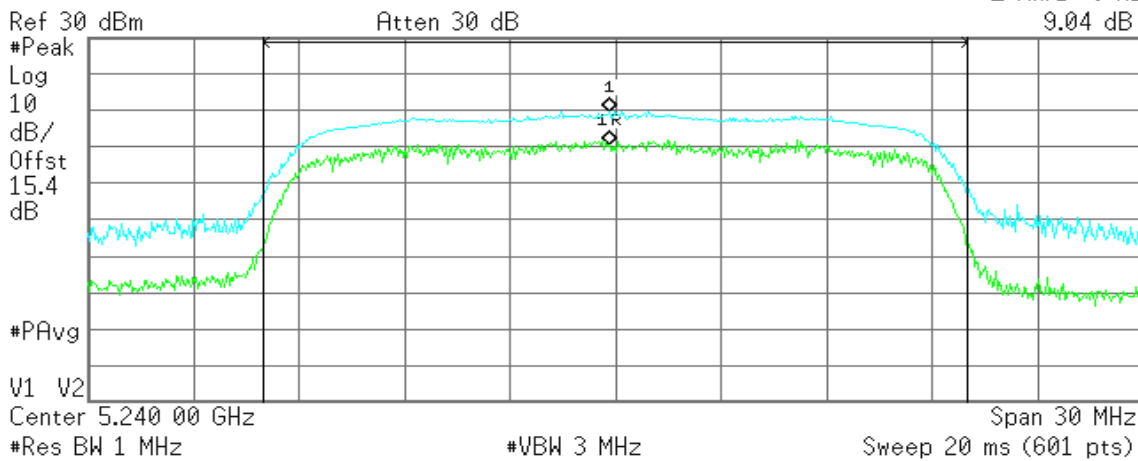

Channel Power

17.77 dBm /20.0000 MHz

Power Spectral Density

-55.24 dBm/Hz




**IEEE 802.11a mode / 5260 ~ 5320MHz**

**CH Low**

Agilent 14:20:52 Jul 25, 2012

R T

Mkr1 0 Hz  
9.36 dB

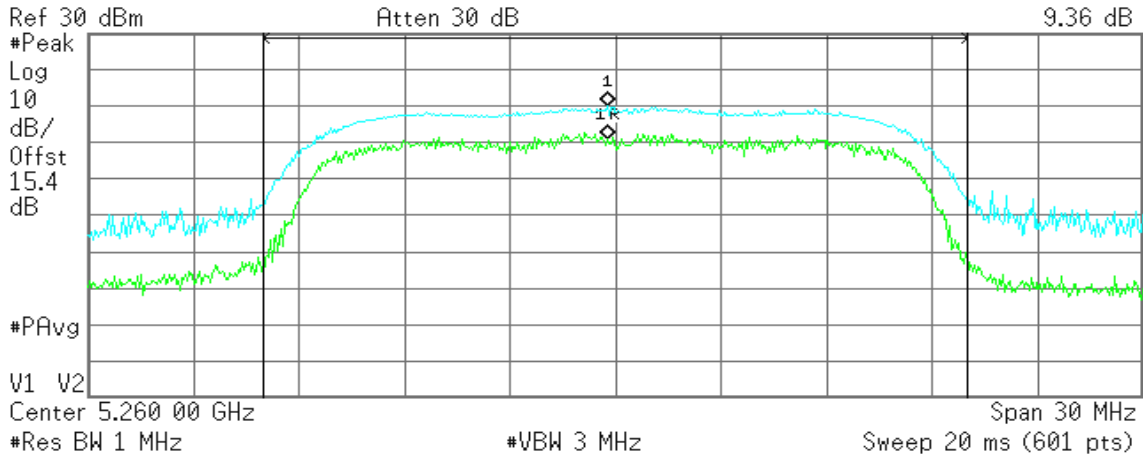

**Channel Power**

17.94 dBm /20.0000 MHz

**Power Spectral Density**


-55.07 dBm/Hz

**CH Mid**

Agilent 14:24:39 Jul 25, 2012

R T

Mkr1 0 Hz  
8.28 dB

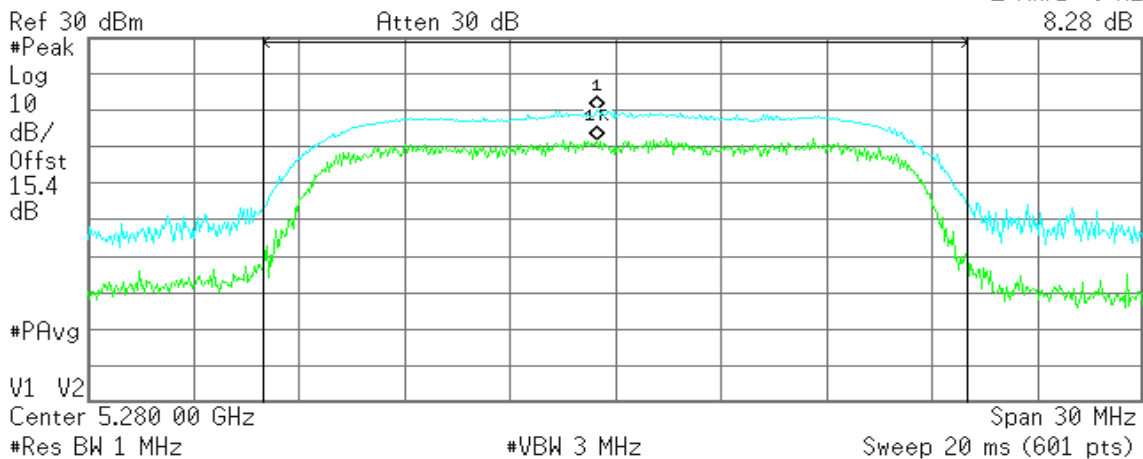

**Channel Power**

17.89 dBm /20.0000 MHz

**Power Spectral Density**

-55.12 dBm/Hz






**CH High**

Agilent 14:28:32 Jul 25, 2012

R T

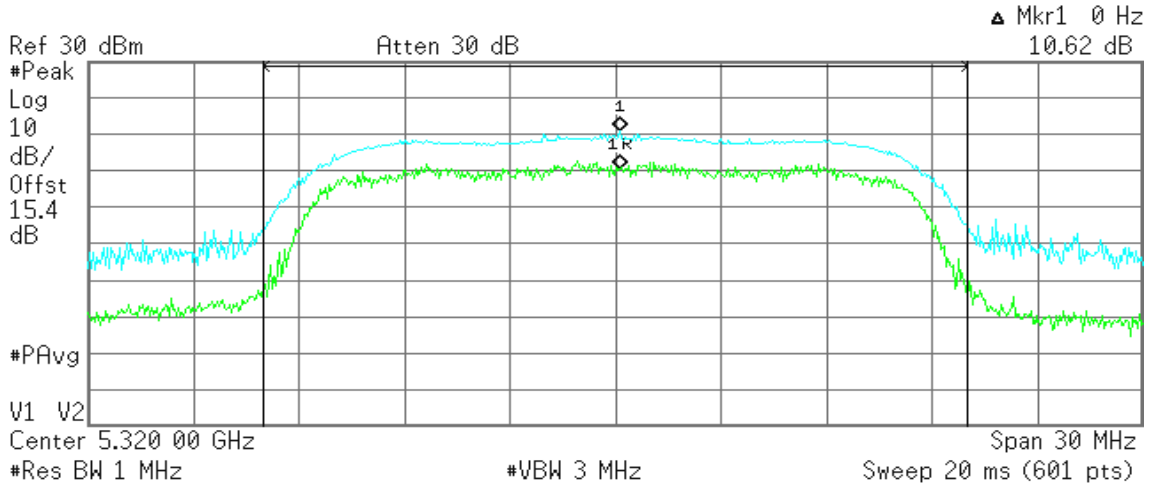

**Channel Power**

18.10 dBm /20.0000 MHz

**Power Spectral Density**


-54.91 dBm/Hz

**IEEE 802.11n HT 20 MHz Channel mode / 5260 ~ 5320MHz**

**CH Low**

Agilent 15:14:52 Jul 25, 2012

R T

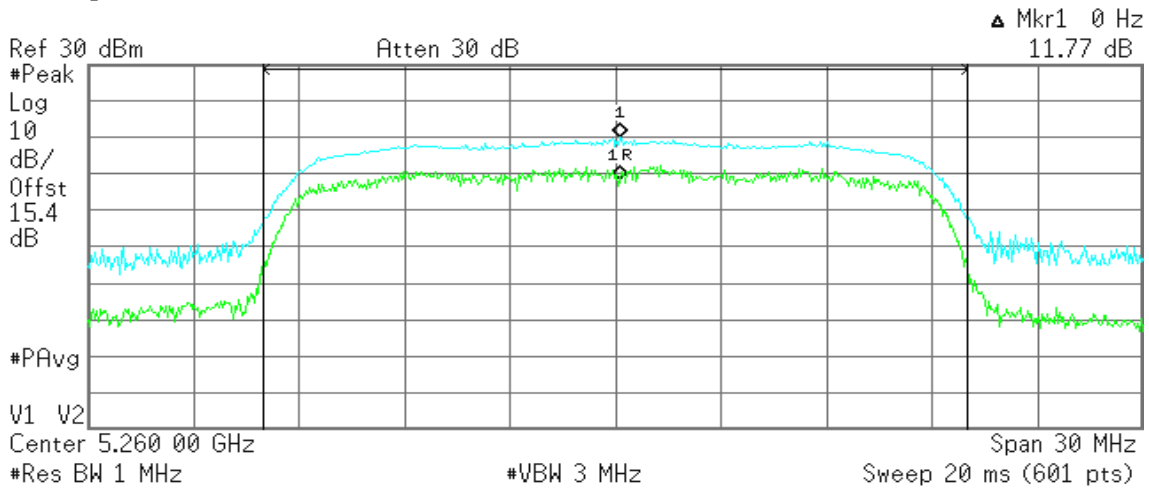

**Channel Power**

17.90 dBm /20.0000 MHz

**Power Spectral Density**

-55.11 dBm/Hz




### CH Mid

Agilent 15:22:14 Jul 25, 2012

R T

Mkr1 0 Hz  
11.60 dB

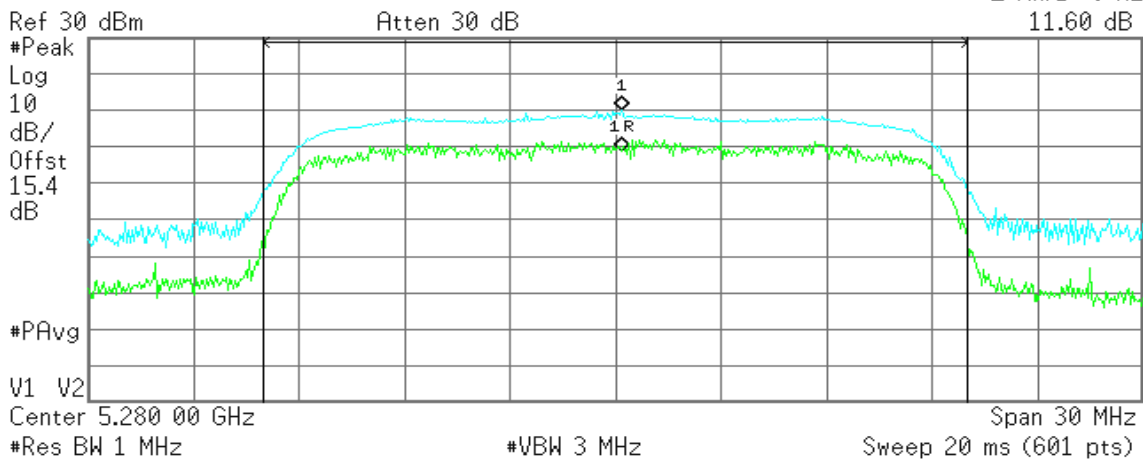

Channel Power

17.77 dBm /20.0000 MHz

Power Spectral Density


-55.24 dBm/Hz

### CH High

Agilent 15:28:28 Jul 25, 2012

R T

Mkr1 0 Hz  
11.37 dB

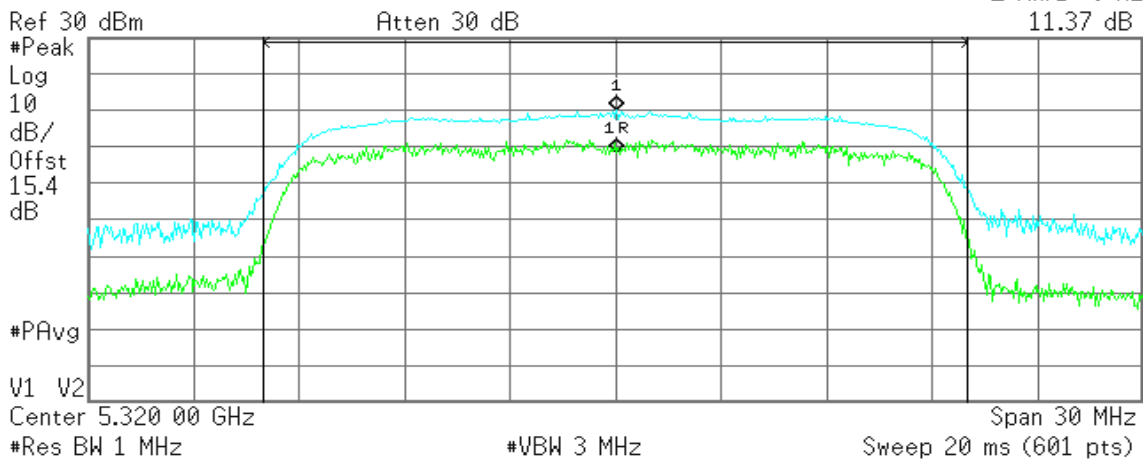

Channel Power

17.89 dBm /20.0000 MHz

Power Spectral Density

-55.12 dBm/Hz




**Test mode: IEEE 802.11a mode / 5500 ~ 5700MHz**

**CH Low**

Agilent 14:46:56 Jul 25, 2012

R T

Mkr1 0 Hz  
9.19 dB

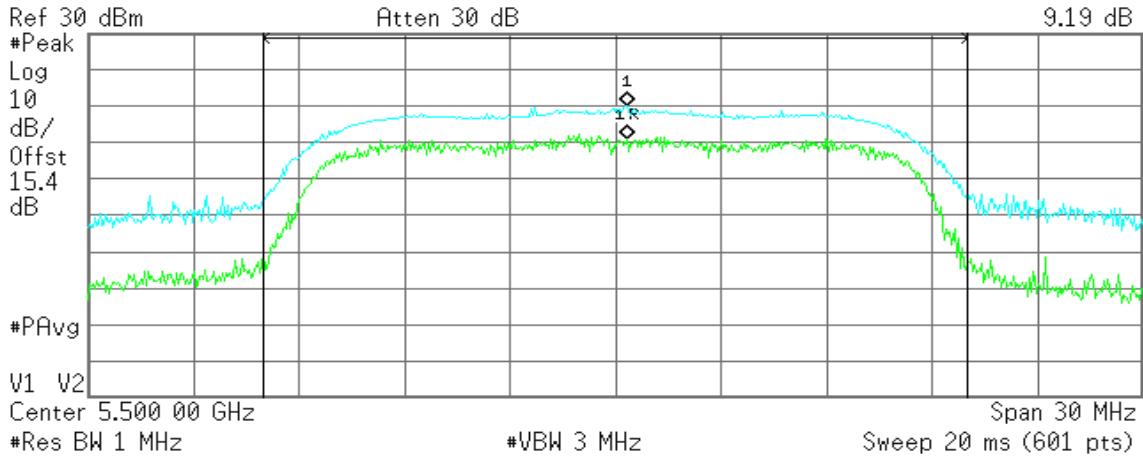

**Channel Power**

17.43 dBm /20.0000 MHz

**Power Spectral Density**


-55.58 dBm/Hz

**CH Mid**

Agilent 14:51:02 Jul 25, 2012

R T

Mkr1 0 Hz  
10.77 dB

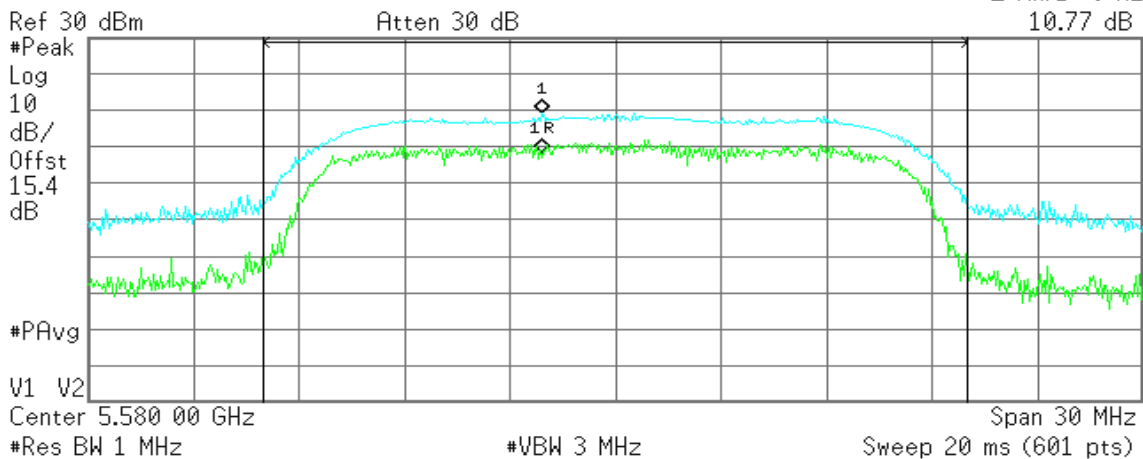

**Channel Power**

17.11 dBm /20.0000 MHz

**Power Spectral Density**

-55.90 dBm/Hz




**CH High**

Agilent 14:54:48 Jul 25, 2012

R T

Mkr1 0 Hz  
9.63 dB

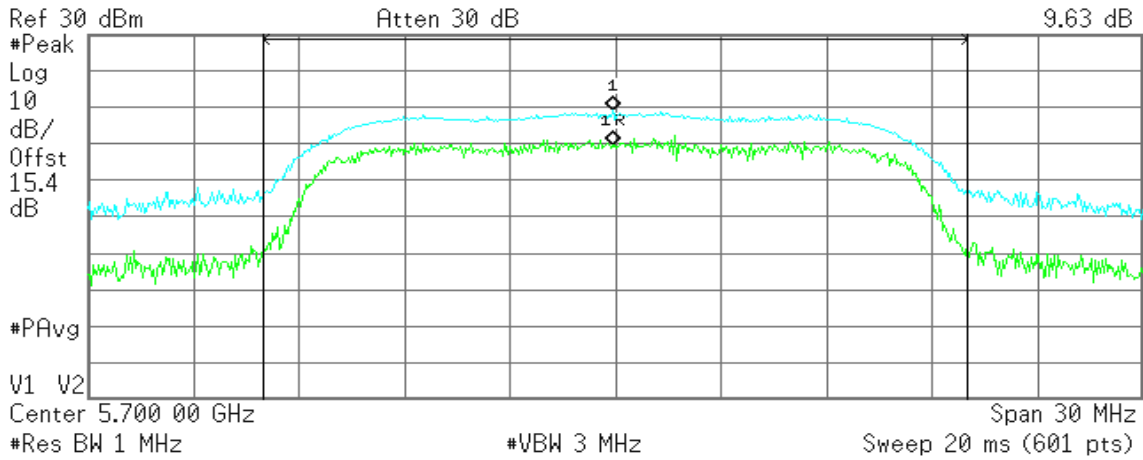

**Channel Power**

16.97 dBm /20.0000 MHz

**Power Spectral Density**

-56.05 dBm/Hz


**IEEE 802.11n HT 20 MHz Channel mode / 5500 ~ 5700MHz**

**CH Low**

Agilent 15:32:53 Jul 25, 2012

R T

Mkr1 0 Hz  
10.23 dB

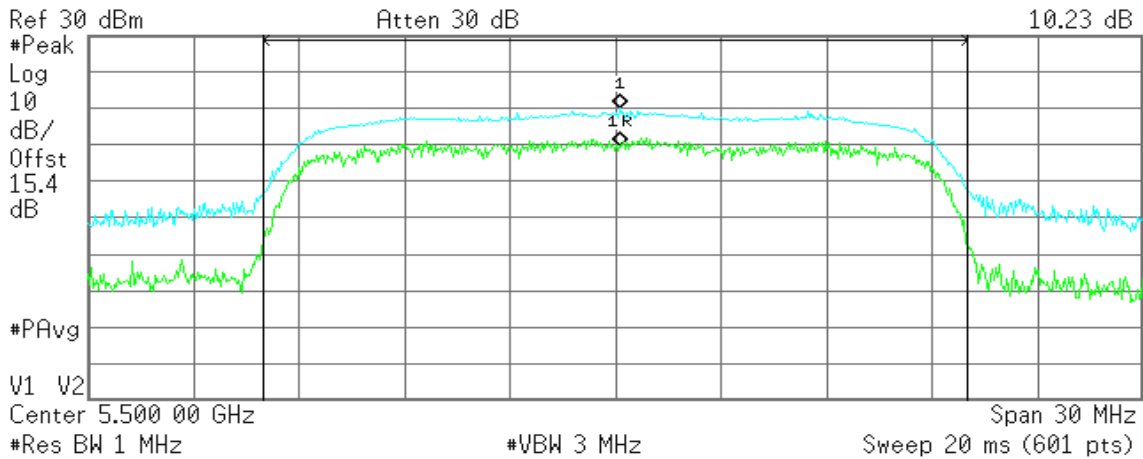

**Channel Power**

17.58 dBm /20.0000 MHz

**Power Spectral Density**

-55.43 dBm/Hz




### CH Mid

Agilent 15:44:49 Jul 25, 2012

R T

Mkr1 0 Hz  
8.87 dB

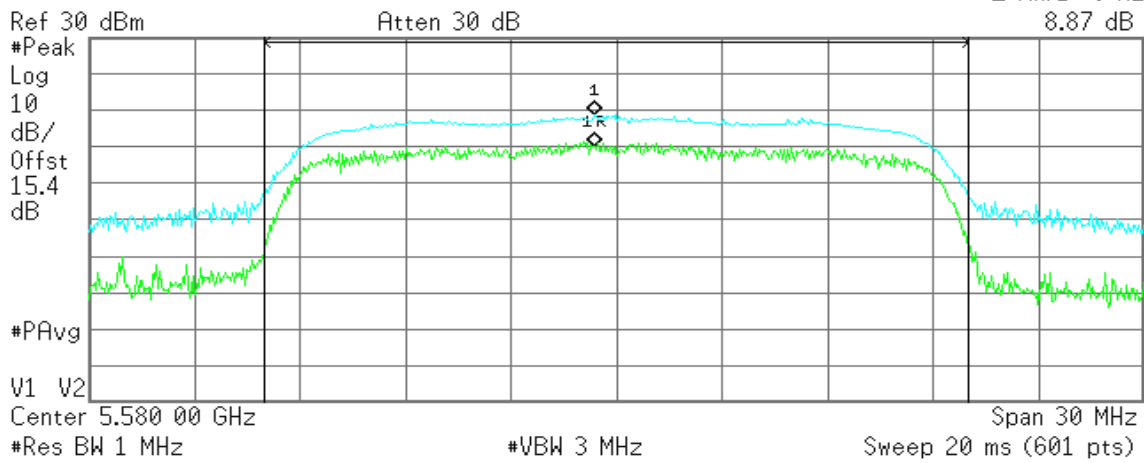

Channel Power

16.90 dBm /20.0000 MHz

Power Spectral Density


-56.11 dBm/Hz

### CH High

Agilent 15:52:23 Jul 25, 2012

R T

Mkr1 0 Hz  
8.22 dB

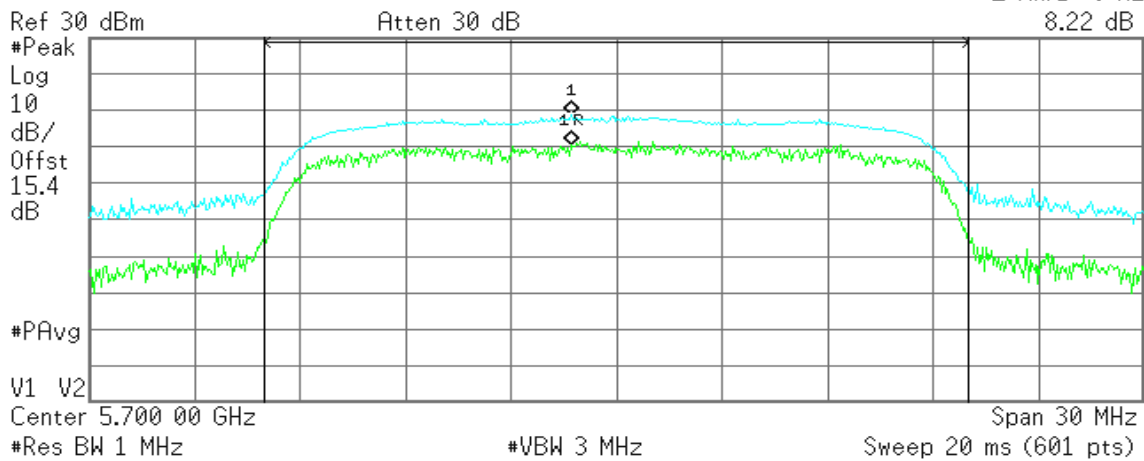

Channel Power

16.89 dBm /20.0000 MHz

Power Spectral Density

-56.12 dBm/Hz



## 7.8 RADIATED UNDESIRABLE EMISSION

1. According to §15.209(a) & RSS-210 §A9.3, except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength ( $\mu\text{V/m}$ )	Measurement Distance (m)
30-88	100*	3
88-216	150*	3
216-960	200*	3
Above 960	500	3

*Remark: Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.*


2. In the emission table above, the tighter limit applies at the band edges.

Frequency (MHz)	Field Strength ( $\mu\text{V/m}$ at 3-meter)	Field Strength (dB $\mu\text{V/m}$ at 3-meter)
30-88	100	40
88-216	150	43.5
216-960	200	46
Above 960	500	54




### Test Configuration

#### 9kHz ~ 30MHz

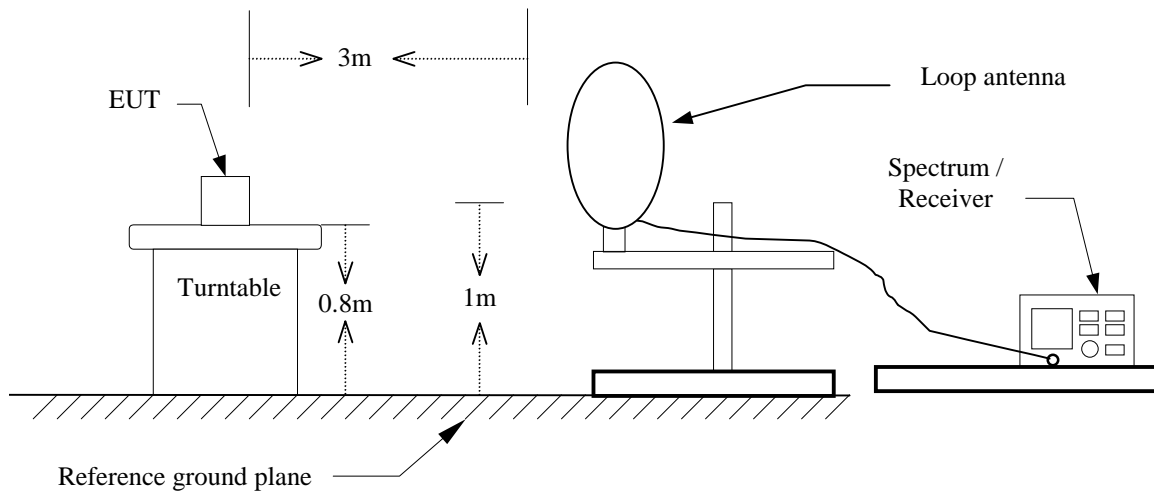


#### 30MHz ~ 1GHz

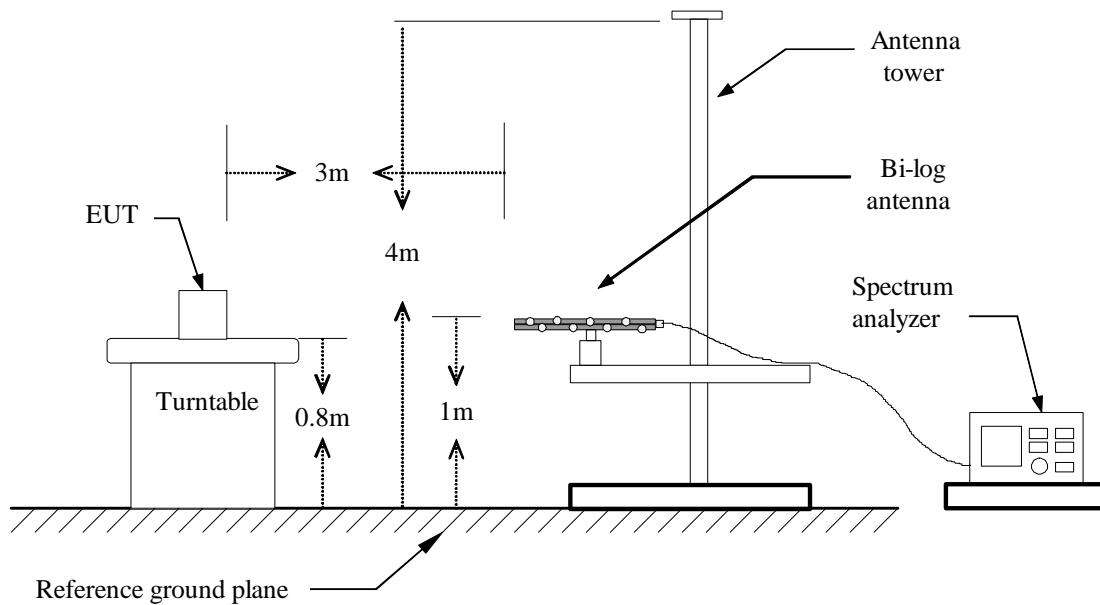



Above 1 GHz

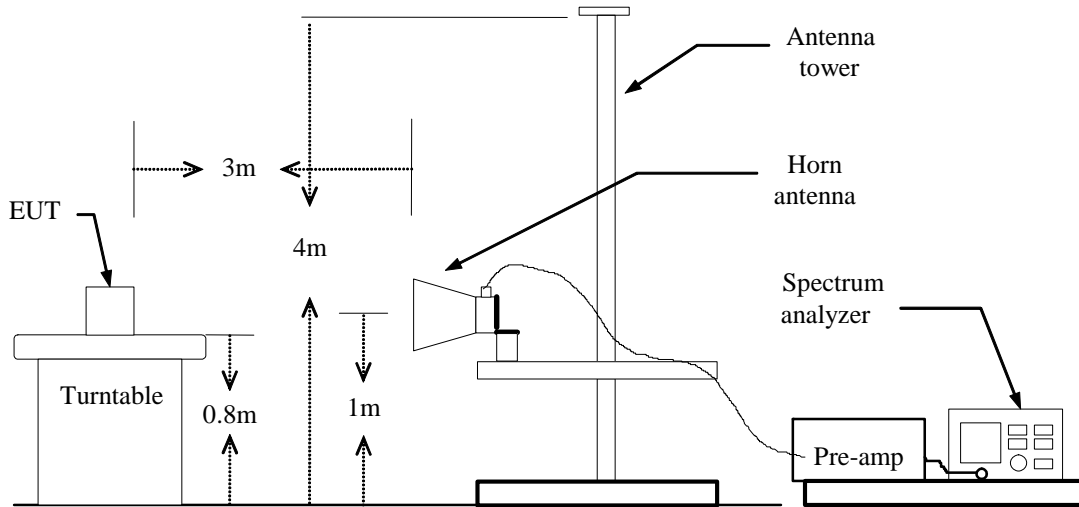





## **TEST PROCEDURE**

1. The EUT is placed on a turntable, which is 0.8m above ground plane.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
6. Set the spectrum analyzer in the following setting as:

Below 1GHz:

RBW=100kHz / VBW=300kHz / Sweep=AUTO

Above 1GHz:

(a) PEAK: RBW=VBW=1MHz / Sweep=AUTO

(b) AVERAGE: RBW=1MHz / VBW=10Hz / Sweep=AUTO

7. Repeat above procedures until the measurements for all frequencies are complete.



**Below 1 GHz**

**Operation Mode:** Normal Link                      **Test Date:** July 23, 2012  
**Temperature:** 26°C                                      **Tested by:** Shawn Wu  
**Humidity:** 50% RH                                      **Polarity:** Ver. / Hor.

Frequency (MHz)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Pol. (H/V)
47.78	50.05	-16.97	33.08	40.00	-6.92	Peak	V
84.97	56.12	-18.31	37.81	40.00	-2.19	Peak	V
96.28	55.51	-16.87	38.64	43.50	-4.86	Peak	V
138.32	45.06	-12.68	32.38	43.50	-11.12	Peak	V
448.72	36.27	-8.66	27.62	46.00	-18.38	Peak	V
639.48	34.87	-6.32	28.55	46.00	-17.45	Peak	V
84.97	56.23	-18.31	37.92	40.00	-2.08	Peak	H
96.28	57.67	-16.87	40.80	43.50	-2.70	Peak	H
149.63	48.14	-12.96	35.17	43.50	-8.33	Peak	H
162.57	48.81	-13.36	35.45	43.50	-8.05	Peak	H
354.95	41.37	-10.22	31.15	46.00	-14.85	Peak	H
639.48	43.04	-6.32	36.72	46.00	-9.28	Peak	H

**Remark:**

- 1 Measuring frequencies from 30 MHz to the 1GHz.
- 2 Radiated emissions measured in frequency range from 30 MHz to 1000MHz were made with an instrument using peak/quasi-peak detector mode.
- 3 Quasi-peak test would be performed if the peak result were greater than the quasi-peak limit or as required by the applicant.
- 4 Measurements above show only up to 6 maximum emissions noted, or would be lesser; with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
- 5 Margin (dB) = Remark result (dBuV/m) – Quasi-peak limit (dBuV/m).



**Above 1 GHz**

**Operation Mode:** Tx / IEEE 802.11a mode / 5180 ~ 5240MHz / CH Low

**Test Date:** July 21, 2012

**Temperature:** 26°C

**Tested by:** Shawn Wu

**Humidity:** 50% RH

**Polarity:** Ver. / Hor.

Frequency (MHz)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark	Ant.Pol. (H/V)
1933.33	69.10	---	-19.76	49.34	---	68.30	54.00	-4.66	Peak	V
N/A										
2318.33	68.80	---	-18.38	50.42	---	68.30	54.00	-3.58	Peak	H
N/A										

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



Operation Mode: Tx / IEEE 802.11a mode / 5180 ~ 5240MHz / CH Mid

Test Date: July 21, 2012

Temperature: 26°C

Tested by: Shawn Wu

Humidity: 50% RH

Polarity: Ver. / Hor.

Frequency (MHz)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark	Ant.Pol. (H/V)
2073.33	67.83	---	-18.98	48.86	---	68.30	54.00	-5.14	Peak	V
N/A										
1875.00	68.01	---	-20.30	47.71	---	68.30	54.00	-6.29	Peak	H
N/A										

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



Operation Mode: Tx / IEEE 802.11a mode / 5180 ~ 5240MHz / CH High

Test Date: July 21, 2012

Temperature: 26°C

Tested by: Shawn Wu

Humidity: 50% RH

Polarity: Ver. / Hor.

Frequency (MHz)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark	Ant.Pol. (H/V)
1793.33	68.29	---	-21.04	47.24	---	68.30	54.00	-6.76	Peak	V
N/A										
1665.00	69.29	---	-22.22	47.07	---	68.30	54.00	-6.93	Peak	H
N/A										

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



**Operation Mode:** Tx / IEEE 802.11n HT 20 MHz Channel mode / 5180 ~ 5240MHz / CH Low      **Test Date:** July 21, 2012

**Temperature:** 26°C      **Tested by:** Shawn Wu

**Humidity:** 50% RH      **Polarity:** Ver. / Hor.

Frequency (MHz)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark	Ant.Pol. (H/V)
1805.00	68.21	---	-20.94	47.28	---	68.30	54.00	-6.72	Peak	V
N/A										
1921.67	67.91	---	-19.87	48.04	---	68.30	54.00	-5.96	Peak	H
N/A										

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit.
4. Data of measurement within this frequency range shown “ --- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with “ N/A ” remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



**Operation Mode:** Tx / IEEE 802.11n HT 20 MHz Channel mode / 5180 ~ 5240MHz / CH Mid      **Test Date:** July 21, 2012

**Temperature:** 26°C      **Tested by:** Shawn Wu

**Humidity:** 50% RH      **Polarity:** Ver. / Hor.

Frequency (MHz)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark	Ant.Pol. (H/V)
1886.67	67.94	---	-20.19	47.75	---	68.30	54.00	-6.55	Peak	V
N/A										
1781.67	68.30	---	-21.15	47.15	---	68.30	54.00	-6.85	Peak	H
N/A										

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit.
4. Data of measurement within this frequency range shown “ --- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with “ N/A ” remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



Operation Mode: Tx / IEEE 802.11n HT 20 MHz Channel mode / 5180 ~ 5240MHz / CH High

Test Date: July 21, 2012

Temperature: 26°C

Tested by: Shawn Wu

Humidity: 50% RH

Polarity: Ver. / Hor.

Frequency (MHz)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark	Ant.Pol. (H/V)
1770.00	68.45	---	-21.26	47.20	---	68.30	54.00	-6.80	Peak	V
N/A										
1770.00	69.55	---	-21.26	48.30	---	68.30	54.00	-5.70	Peak	H
N/A										

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).





Operation Mode: Tx / IEEE 802.11a mode / 5260 ~ 5320MHz / CH Low

Test Date: July 21, 2012

Temperature: 26°C

Tested by: Shawn Wu

Humidity: 50% RH

Polarity: Ver. / Hor.

Frequency (MHz)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark	Ant.Pol. (H/V)
1676.67	68.43	---	-22.11	46.32	---	68.30	54.00	-7.68	Peak	V
N/A										
1828.33	68.73	---	-20.72	48.01	---	68.30	54.00	-5.99	Peak	H
N/A										

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



Operation Mode: Tx / IEEE 802.11a mode / 5260 ~ 5320MHz / CH Mid

Test Date: July 21, 2012

Temperature: 26°C

Tested by: Shawn Wu

Humidity: 50% RH

Polarity: Ver. / Hor.

Frequency (MHz)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark	Ant.Pol. (H/V)
1898.33	68.80	---	-20.08	48.71	---	68.30	54.00	-5.29	Peak	V
N/A										
1723.33	69.27	---	-21.68	47.59	---	68.30	54.00	-6.41	Peak	H
N/A										

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



Operation Mode: Tx / IEEE 802.11a mode / 5260 ~ 5320MHz / CH High

Test Date: July 21, 2012

Temperature: 26°C

Tested by: Shawn Wu

Humidity: 50% RH

Polarity: Ver. / Hor.

Frequency (MHz)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark	Ant.Pol. (H/V)
1875.00	69.05	---	-20.30	48.75	---	68.30	54.00	-5.25	Peak	V
N/A										
1793.33	68.85	---	-21.04	47.81	---	68.30	54.00	-6.19	Peak	H
N/A										

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



**Operation Mode:** Tx / IEEE 802.11n HT 20 MHz Channel mode / 5260 ~ 5320MHz / CH Low      **Test Date:** July 21, 2012

**Temperature:** 26°C      **Tested by:** Shawn Wu

**Humidity:** 50% RH      **Polarity:** Ver. / Hor.

Frequency (MHz)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark	Ant.Pol. (H/V)
1828.33	68.06	---	-20.72	47.33	---	68.30	54.00	-6.67	Peak	V
N/A										
1711.67	69.28	---	-21.79	47.49	---	68.30	54.00	-6.51	Peak	H
N/A										

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



**Operation Mode:** Tx / IEEE 802.11n HT 20 MHz Channel mode / 5260 ~ 5320MHz / CH Mid      **Test Date:** July 21, 2012

**Temperature:** 26°C      **Tested by:** Shawn Wu

**Humidity:** 50% RH      **Polarity:** Ver. / Hor.

Frequency (MHz)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark	Ant.Pol. (H/V)
1735.00	68.79	---	-21.58	47.21	---	68.30	54.00	-6.79	Peak	V
N/A										
1723.33	69.83	---	-21.68	48.15	---	68.30	54.00	-5.85	Peak	H
N/A										

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



Operation Mode: Tx / IEEE 802.11n HT 20 MHz Channel mode / 5260 ~ 5320MHz / CH High

Test Date: July 21, 2012

Temperature: 26°C

Tested by: Shawn Wu

Humidity: 50% RH

Polarity: Ver. / Hor.

Frequency (MHz)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark	Ant.Pol. (H/V)
1851.67	69.04	---	-20.51	48.53	---	68.30	54.00	-5.47	Peak	V
N/A										
1606.67	69.63	---	-22.75	46.87	---	68.30	54.00	-7.13	Peak	H
N/A										

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



Operation Mode: Tx / IEEE 802.11a mode / 5500 ~ 5700MHz / CH Low

Test Date: July 21, 2012

Temperature: 26°C

Tested by: Shawn Wu

Humidity: 50% RH

Polarity: Ver. / Hor.

Frequency (MHz)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark	Ant.Pol. (H/V)
1793.33	69.59	---	-21.04	48.55	---	68.30	54.00	-5.54	Peak	V
N/A										
1875.00	67.72	---	-20.30	47.42	---	68.30	54.00	-6.58	Peak	H
N/A										

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



Operation Mode: Tx / IEEE 802.11a mode / 5500 ~ 5700MHz /CH Mid

Test Date: July 21, 2012

Temperature: 26°C

Tested by: Shawn Wu

Humidity: 50% RH

Polarity: Ver. / Hor.

Frequency (MHz)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark	Ant.Pol. (H/V)
1723.33	70.60	---	-21.68	48.92	---	68.30	54.00	-5.08	Peak	V
N/A										
1723.33	68.82	---	-21.68	47.13	---	68.30	54.00	-6.87	Peak	H
N/A										

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).





Operation Mode: Tx / IEEE 802.11a mode / 5500 ~ 5700MHz / CH High

Test Date: July 21, 2012

Temperature: 26°C

Tested by: Shawn Wu

Humidity: 50% RH

Polarity: Ver. / Hor.

Frequency (MHz)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark	Ant.Pol. (H/V)
1851.67	68.48	---	-20.51	47.97	---	68.30	54.00	-6.03	Peak	V
N/A										
1805.00	68.64	---	-20.94	47.71	---	68.30	54.00	-6.29	Peak	H
N/A										

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



**Operation Mode:** Tx / IEEE 802.11n HT 20 MHz Channel mode / 5500 ~ 5700MHz / CH Low      **Test Date:** July 21, 2012

**Temperature:** 26°C      **Tested by:** Shawn Wu

**Humidity:** 50% RH      **Polarity:** Ver. / Hor.

Frequency (MHz)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark	Ant.Pol. (H/V)
1723.33	69.17	---	-21.68	47.48	---	68.30	54.00	-6.52	Peak	V
N/A										
1781.67	68.34	---	-21.15	47.19	---	68.30	54.00	-6.81	Peak	H
N/A										

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



**Operation Mode:** Tx / IEEE 802.11n HT 20 MHz Channel mode / 5500 ~ 5700MHz / CH Mid      **Test Date:** July 21, 2012

**Temperature:** 26°C      **Tested by:** Shawn Wu

**Humidity:** 50% RH      **Polarity:** Ver. / Hor.

Frequency (MHz)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark	Ant.Pol. (H/V)
1676.67	68.87	---	-22.11	46.76	---	68.30	54.00	-7.24	Peak	V
N/A										
1758.33	69.14	---	-21.36	47.78	---	68.30	54.00	-6.22	Peak	H
N/A										

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



**Operation Mode:** Tx / IEEE 802.11n HT 20 MHz Channel mode / 5500 ~ 5700MHz / CH High      **Test Date:** July 21, 2012

**Temperature:** 26°C      **Tested by:** Shawn Wu

**Humidity:** 50% RH      **Polarity:** Ver. / Hor.

Frequency (MHz)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark	Ant.Pol. (H/V)
1851.67	68.83	---	-20.51	48.33	---	68.30	54.00	-5.67	Peak	V
N/A										
1758.33	68.20	---	-21.36	46.84	---	68.30	54.00	-7.16	Peak	H
N/A										

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



## 7.9 CONDUCTED UNDESIRABLE EMISSION


### LIMIT

According to 15.407(b) & RSS-210 §A9.3,

- (1) For transmitters operating in the 5.15-5.25 GHz band: all emissions outside of the 5.15-5.35 GHz band shall not exceed an EIRP of -27 dBm/MHz.
- (2) For transmitters operating in the 5.25-5.35 GHz band: all emissions outside of the 5.15-5.35 GHz band shall not exceed an EIRP of -27 dBm/MHz. Devices operating in the 5.25-5.35 GHz band that generate emissions in the 5.15-5.25 GHz band must meet all applicable technical requirements for operation in the 5.15-5.25 GHz band (including indoor use) or alternatively meet an out-of-band emission EIRP limit of -27 dBm/MHz in the 5.15-5.25 GHz band.

The provisions of §15.205 apply to intentional radiators operating under this section.

### Test Configuration



### TEST PROCEDURE

Conducted RF measurements of the transmitter output were made to confirm that the EUT antenna port conducted emissions meet the specified limit and to identify any spurious signals that require further investigation or measurements on the radiated emissions site.

The transmitter output is connected to the spectrum analyzer. The resolution bandwidth is set to 1 MHz. The video bandwidth is set to 1 MHz. Peak detection measurements are compared to the average EIRP limit, adjusted for the maximum antenna gain. If necessary, additional average detection measurements are made.

Measurements are made over the 30 MHz to 40 GHz range with the transmitter set to the lowest, middle, and highest channels.

### TEST RESULTS

*No non-compliance noted*




**Test Plot**

**IEEE 802.11a (5180 ~ 5240MHz)**

**CH Low**

Agilent 14:01:53 Jul 25, 2012


R T

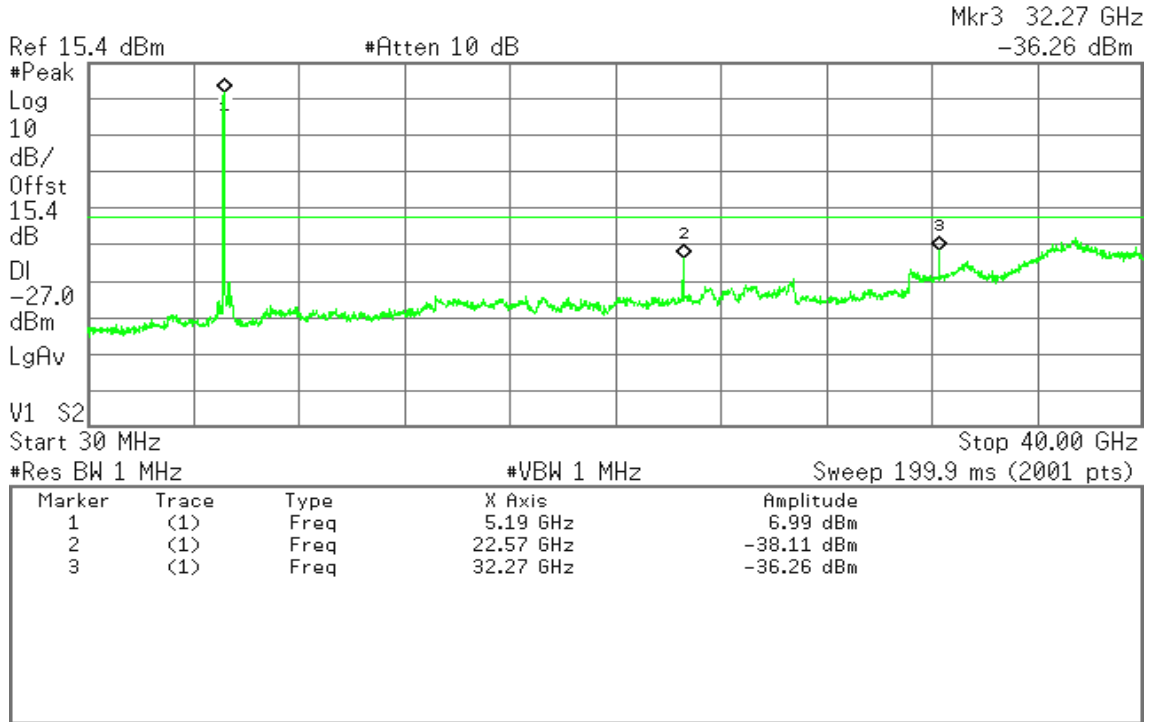

**CH Mid**

Agilent 14:11:02 Jul 25, 2012

R T

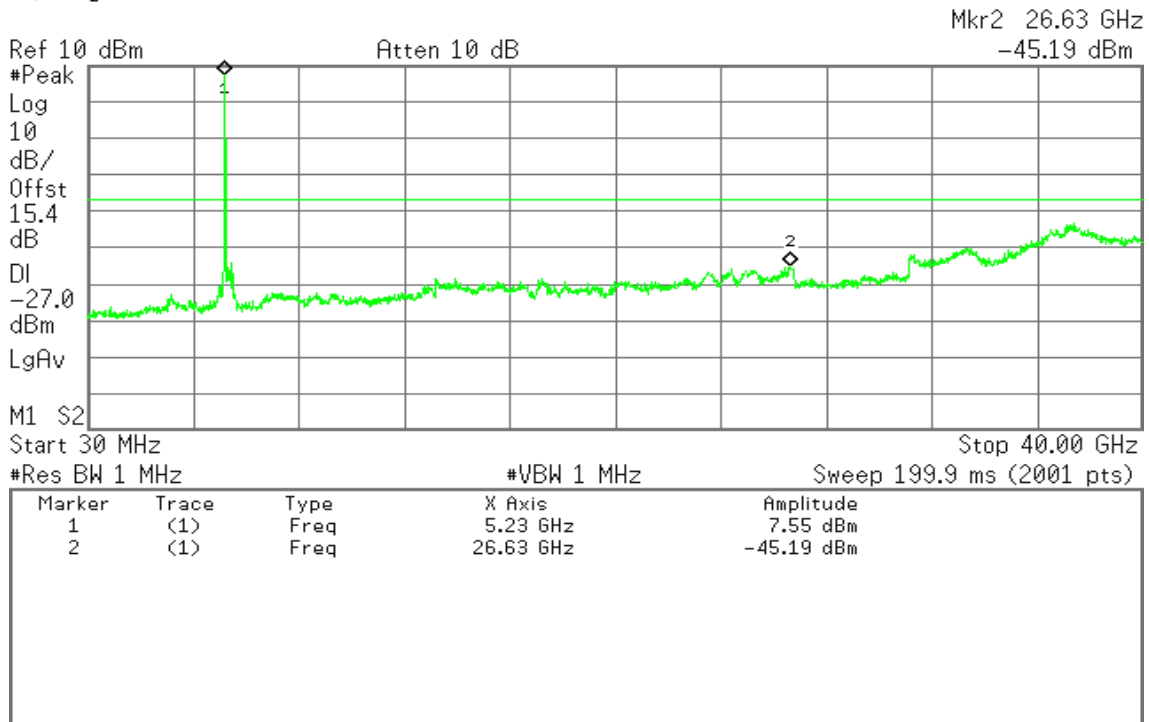




### CH High

Agilent 14:16:05 Jul 25, 2012

R T

Mkr4 37.54 GHz  
-32.67 dBm

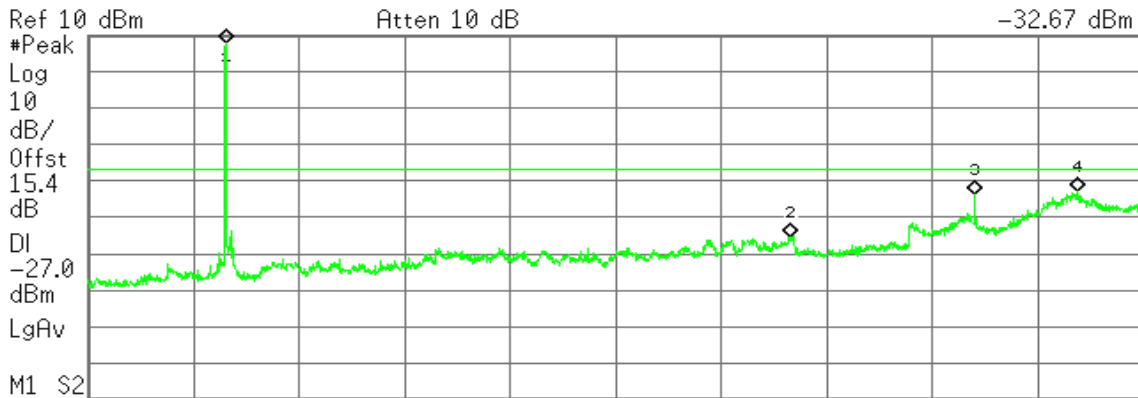

Start 30 MHz Stop 40.00 GHz  
#Res BW 1 MHz #VBW 1 MHz Sweep 199.9 ms (2001 pts)

Marker	Trace	Type	X Axis	Amplitude
1	(1)	Freq	5.25 GHz	7.69 dBm
2	(1)	Freq	26.63 GHz	-45.27 dBm
3	(1)	Freq	33.62 GHz	-33.91 dBm
4	(1)	Freq	37.54 GHz	-32.67 dBm


### IEEE 802.11n HT 20 MHz (5180 ~ 5240MHz)

#### CH Low

Agilent 15:03:09 Jul 25, 2012

R T

Mkr3 10.66 GHz  
-42.66 dBm

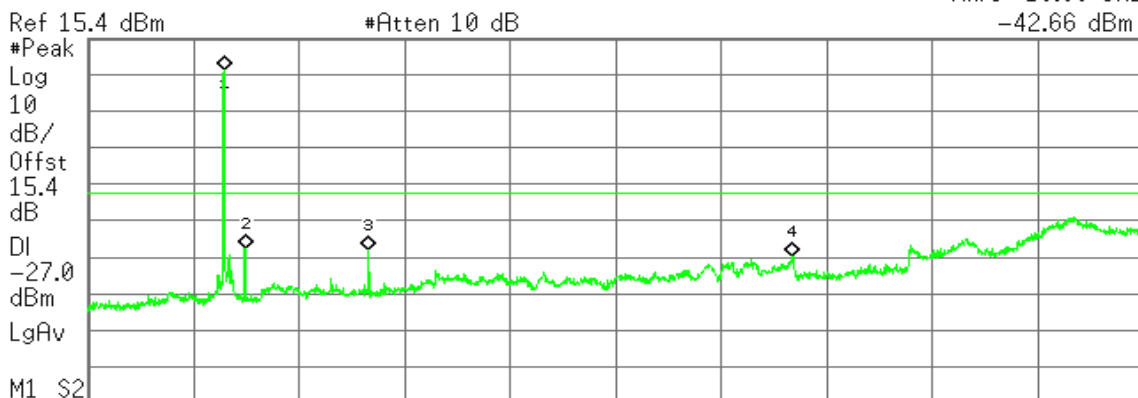

Start 30 MHz Stop 40.00 GHz  
#Res BW 1 MHz #VBW 1 MHz Sweep 199.9 ms (2001 pts)

Marker	Trace	Type	X Axis	Amplitude
1	(1)	Freq	5.19 GHz	6.93 dBm
2	(1)	Freq	5.99 GHz	-42.13 dBm
3	(1)	Freq	10.66 GHz	-42.66 dBm
4	(1)	Freq	26.67 GHz	-44.14 dBm




### CH Mid

Agilent 15:07:35 Jul 25, 2012

R T

Mkr3 26.65 GHz  
-44.35 dBm

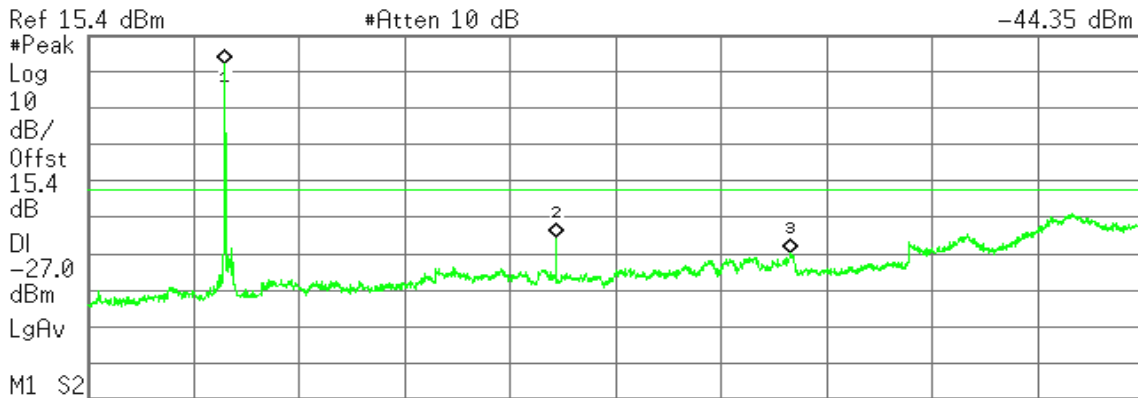

Start 30 MHz Stop 40.00 GHz #Res BW 1 MHz #VBW 1 MHz Sweep 199.9 ms (2001 pts)


Marker	Trace	Type	X Axis	Amplitude
1	(1)	Freq	5.23 GHz	7.74 dBm
2	(1)	Freq	17.76 GHz	-40.22 dBm
3	(1)	Freq	26.65 GHz	-44.35 dBm

### CH High

Agilent 15:11:38 Jul 25, 2012

R T

Mkr4 37.38 GHz  
-33.11 dBm

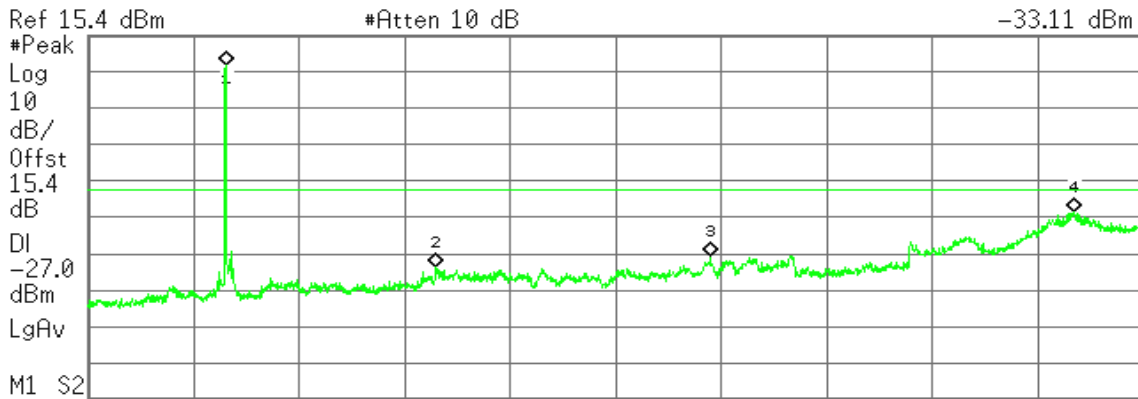

Start 30 MHz Stop 40.00 GHz #Res BW 1 MHz #VBW 1 MHz Sweep 199.9 ms (2001 pts)

Marker	Trace	Type	X Axis	Amplitude
1	(1)	Freq	5.25 GHz	7.07 dBm
2	(1)	Freq	13.20 GHz	-48.37 dBm
3	(1)	Freq	23.61 GHz	-45.42 dBm
4	(1)	Freq	37.38 GHz	-33.11 dBm






**IEEE 802.11a mode / 5260 ~ 5320MHz**

**CH Low**

Agilent 14:21:53 Jul 25, 2012

R T

Mkr4 33.25 GHz  
-37.99 dBm

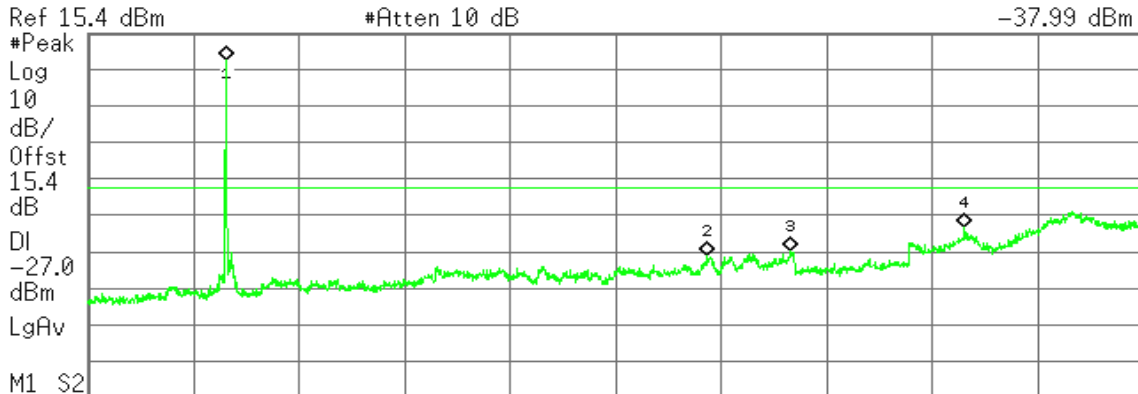

Start 30 MHz Stop 40.00 GHz  
#Res BW 1 MHz #VBW 1 MHz Sweep 199.9 ms (2001 pts)


Marker	Trace	Type	X Axis	Amplitude
1	(1)	Freq	5.27 GHz	7.87 dBm
2	(1)	Freq	23.49 GHz	-45.66 dBm
3	(1)	Freq	26.65 GHz	-44.53 dBm
4	(1)	Freq	33.25 GHz	-37.99 dBm

**CH Mid**

Agilent 14:25:39 Jul 25, 2012

R T

Mkr4 37.34 GHz  
-32.73 dBm

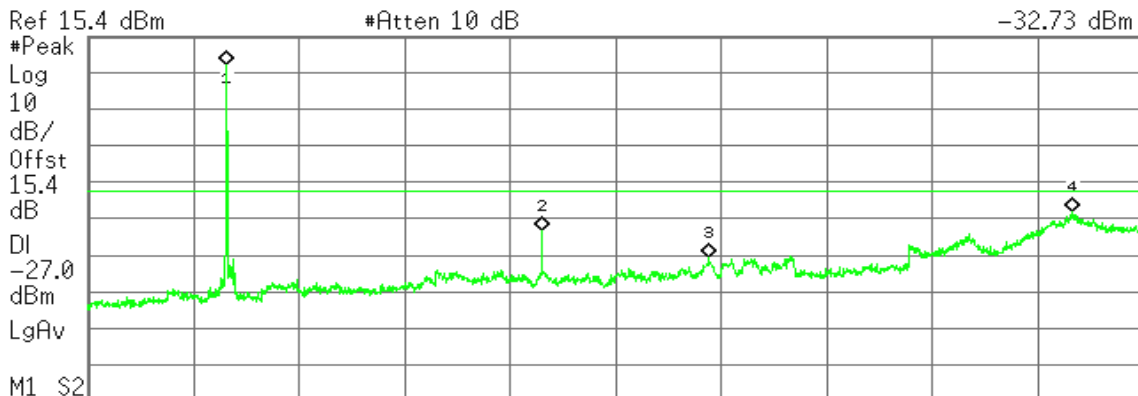

Start 30 MHz Stop 40.00 GHz  
#Res BW 1 MHz #VBW 1 MHz Sweep 199.9 ms (2001 pts)

Marker	Trace	Type	X Axis	Amplitude
1	(1)	Freq	5.29 GHz	7.49 dBm
2	(1)	Freq	17.22 GHz	-37.79 dBm
3	(1)	Freq	23.53 GHz	-45.29 dBm
4	(1)	Freq	37.34 GHz	-32.73 dBm




### CH High

Agilent 14:29:49 Jul 25, 2012

R T

Mkr4 33.40 GHz  
-38.53 dBm

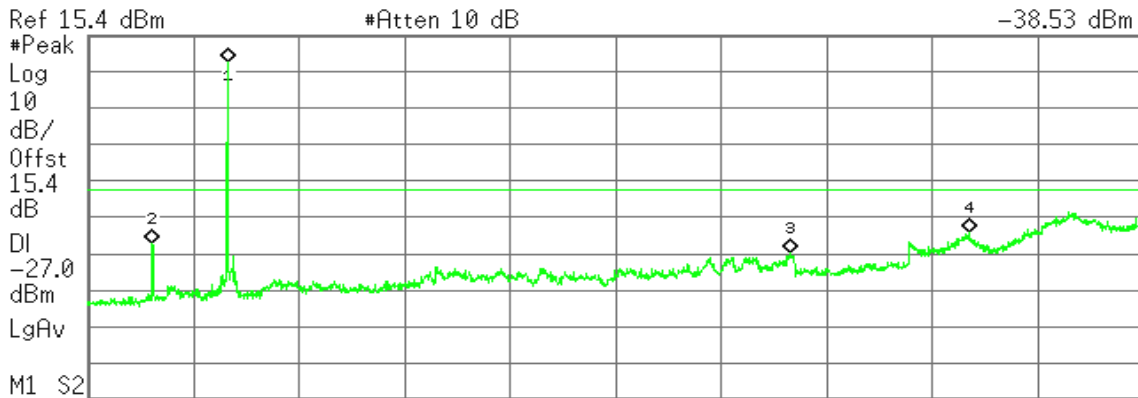

Start 30 MHz Stop 40.00 GHz  
#Res BW 1 MHz #VBW 1 MHz Sweep 199.9 ms (2001 pts)

Marker	Trace	Type	X Axis	Amplitude
1	(1)	Freq	5.33 GHz	8.25 dBm
2	(1)	Freq	2.47 GHz	-41.81 dBm
3	(1)	Freq	26.65 GHz	-44.44 dBm
4	(1)	Freq	33.40 GHz	-38.53 dBm


### IEEE 802.11n HT 20 MHz Channel mode / 5260 ~ 5320MHz

#### CH Low

Agilent 15:16:12 Jul 25, 2012

R T

Mkr3 37.40 GHz  
-33.74 dBm

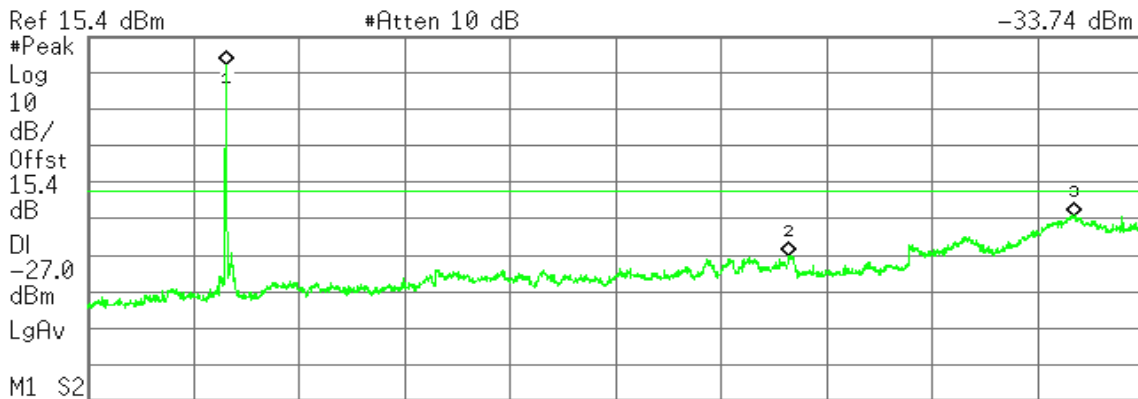

Start 30 MHz Stop 40.00 GHz  
#Res BW 1 MHz #VBW 1 MHz Sweep 199.9 ms (2001 pts)

Marker	Trace	Type	X Axis	Amplitude
1	(1)	Freq	5.27 GHz	7.61 dBm
2	(1)	Freq	26.59 GHz	-44.95 dBm
3	(1)	Freq	37.40 GHz	-33.74 dBm




### CH Mid

Agilent 15:23:43 Jul 25, 2012

R T

Mkr2 26.71 GHz  
-44.57 dBm

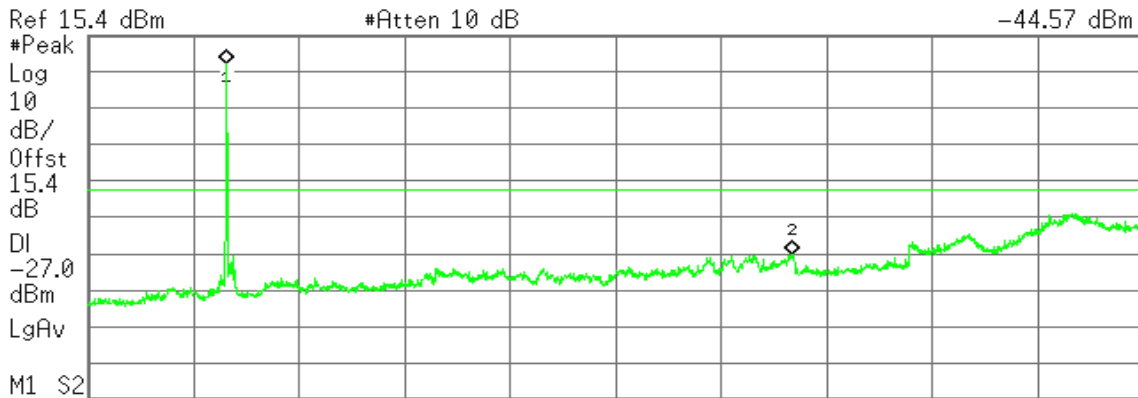

Start 30 MHz Stop 40.00 GHz  
#Res BW 1 MHz #VBW 1 MHz Sweep 199.9 ms (2001 pts)


Marker	Trace	Type	X Axis	Amplitude
1	(1)	Freq	5.29 GHz	7.64 dBm
2	(1)	Freq	26.71 GHz	-44.57 dBm

### CH High

Agilent 15:29:31 Jul 25, 2012

R T

Mkr2 26.75 GHz  
-44.81 dBm

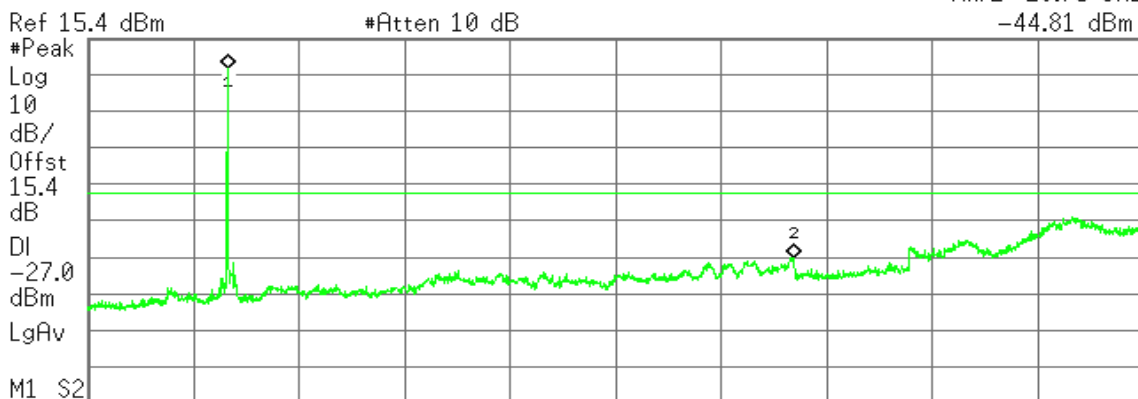

Start 30 MHz Stop 40.00 GHz  
#Res BW 1 MHz #VBW 1 MHz Sweep 199.9 ms (2001 pts)

Marker	Trace	Type	X Axis	Amplitude
1	(1)	Freq	5.33 GHz	7.24 dBm
2	(1)	Freq	26.75 GHz	-44.81 dBm




**Test mode: IEEE 802.11a mode / 5500 ~ 5700MHz**

**CH Low**

Agilent 14:48:02 Jul 25, 2012

R T

Mkr4 33.40 GHz  
-38.58 dBm

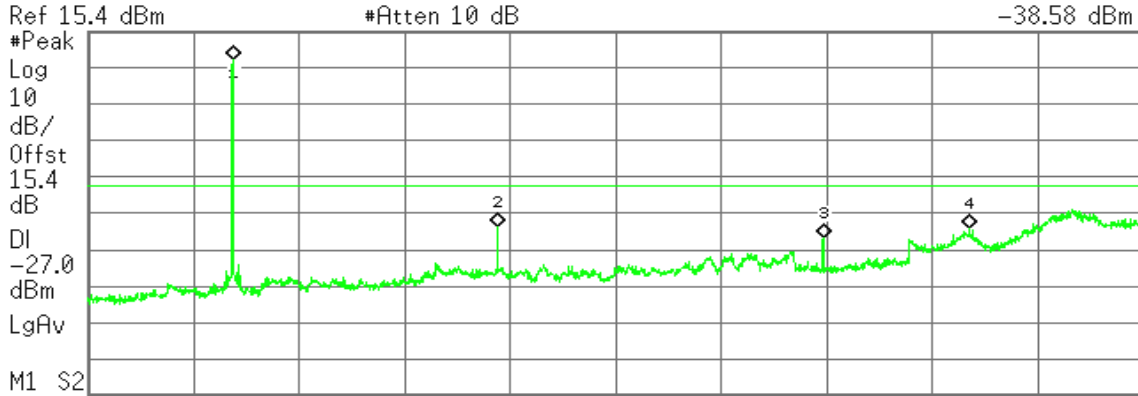

Start 30 MHz Stop 40.00 GHz  
#Res BW 1 MHz #VBW 1 MHz Sweep 199.9 ms (2001 pts)


Marker	Trace	Type	X Axis	Amplitude
1	(1)	Freq	5.51 GHz	7.47 dBm
2	(1)	Freq	15.54 GHz	-38.31 dBm
3	(1)	Freq	27.89 GHz	-41.12 dBm
4	(1)	Freq	33.40 GHz	-38.58 dBm

**CH Mid**

Agilent 14:52:13 Jul 25, 2012

R T

Mkr4 26.31 GHz  
-37.17 dBm

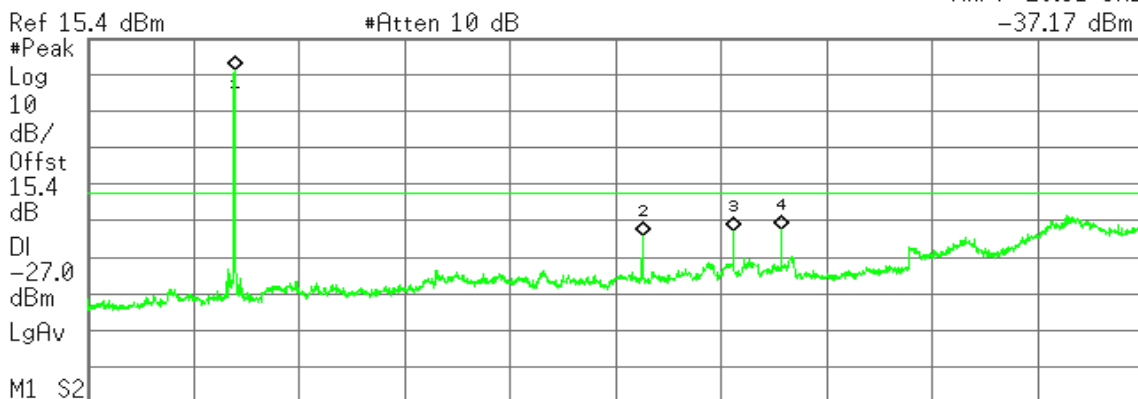

Start 30 MHz Stop 40.00 GHz  
#Res BW 1 MHz #VBW 1 MHz Sweep 199.9 ms (2001 pts)

Marker	Trace	Type	X Axis	Amplitude
1	(1)	Freq	5.59 GHz	6.64 dBm
2	(1)	Freq	21.03 GHz	-38.68 dBm
3	(1)	Freq	24.47 GHz	-37.60 dBm
4	(1)	Freq	26.31 GHz	-37.17 dBm




### CH High

Agilent 14:55:40 Jul 25, 2012

R T

Mkr4 37.34 GHz  
-33.15 dBm

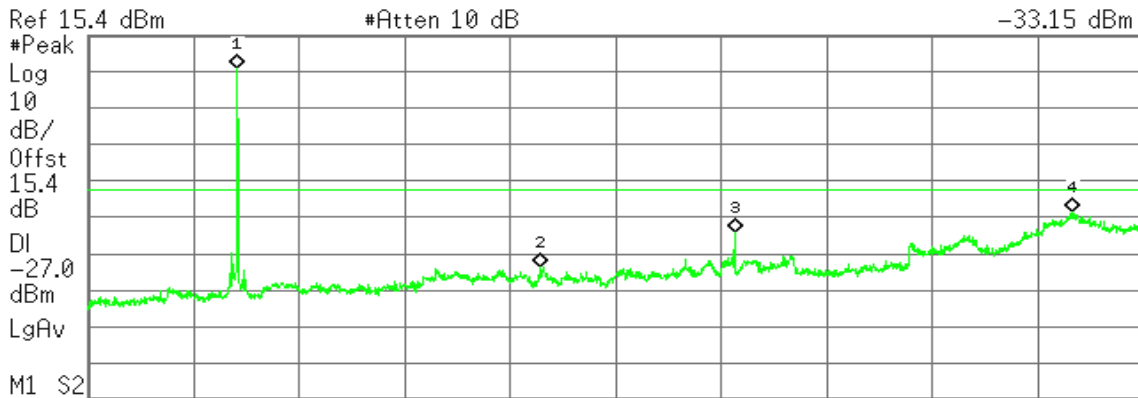

Marker	Trace	Type	X Axis	Amplitude
1	(1)	Freq	5.71 GHz	6.46 dBm
2	(1)	Freq	17.18 GHz	-48.09 dBm
3	(1)	Freq	24.53 GHz	-38.65 dBm
4	(1)	Freq	37.34 GHz	-33.15 dBm


### IEEE 802.11n HT 20 MHz Channel mode / 5500 ~ 5700MHz

#### CH Low

Agilent 15:33:52 Jul 25, 2012

R T

Mkr2 27.93 GHz  
-40.08 dBm

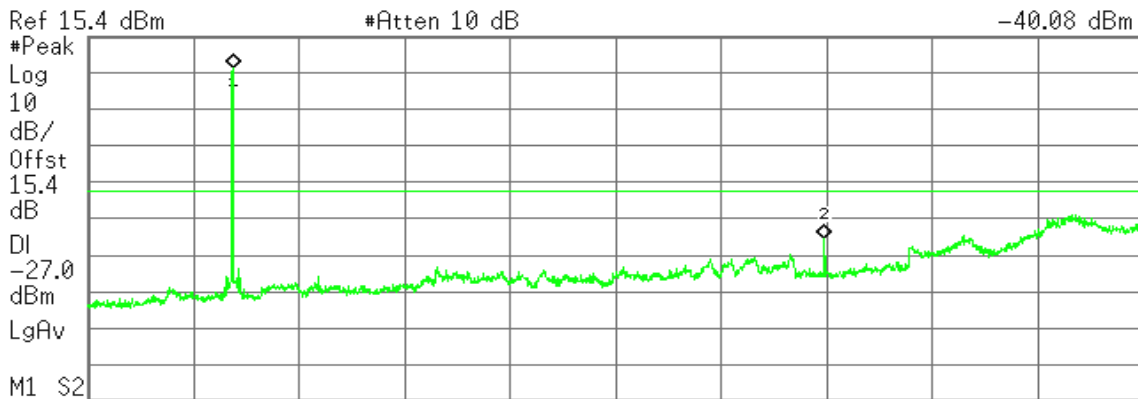

Marker	Trace	Type	X Axis	Amplitude
1	(1)	Freq	5.51 GHz	6.57 dBm
2	(1)	Freq	27.93 GHz	-40.08 dBm




CH Mid

Agilent 15:47:13 Jul 25, 2012

R T

Mkr4 26.67 GHz  
-43.78 dBm

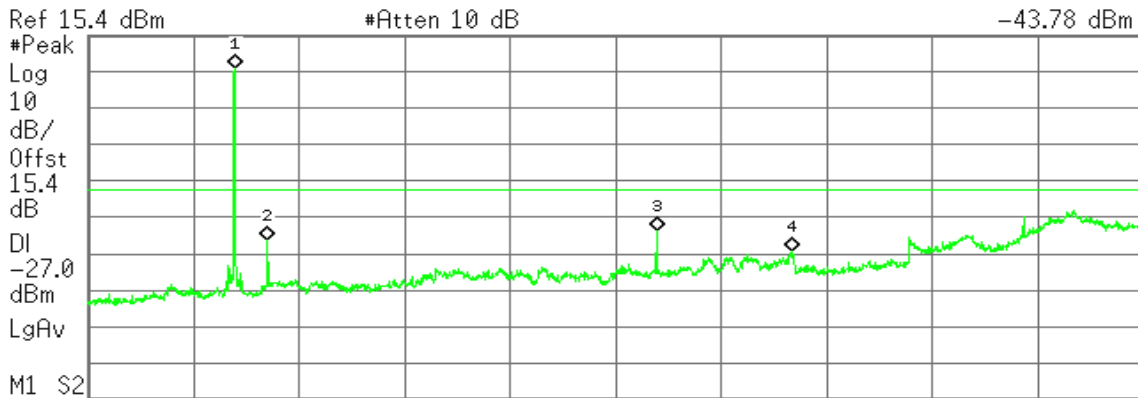

Start 30 MHz Stop 40.00 GHz  
#Res BW 1 MHz #VBW 1 MHz Sweep 199.9 ms (2001 pts)


Marker	Trace	Type	X Axis	Amplitude
1	(1)	Freq	5.59 GHz	6.48 dBm
2	(1)	Freq	6.82 GHz	-40.76 dBm
3	(1)	Freq	21.57 GHz	-38.27 dBm
4	(1)	Freq	26.67 GHz	-43.78 dBm

CH High

Agilent 15:54:23 Jul 25, 2012

R T

Mkr3 31.21 GHz  
-40.59 dBm

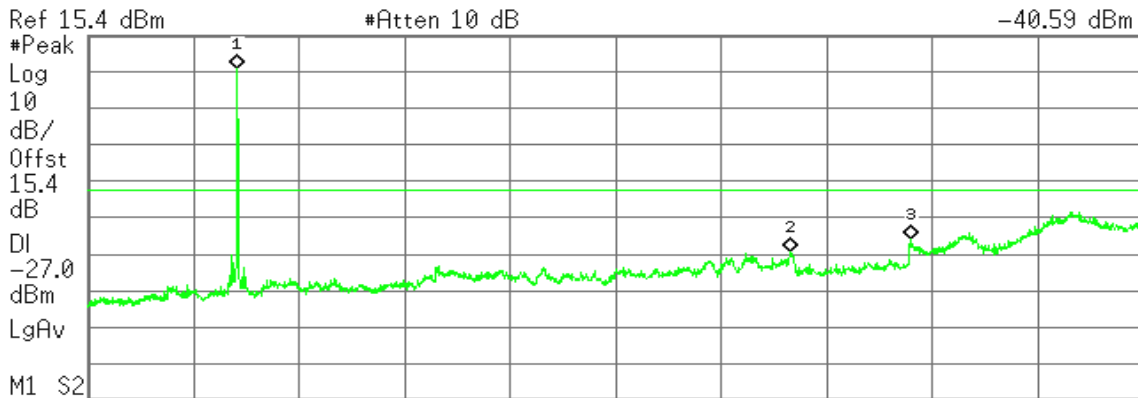

Start 30 MHz Stop 40.00 GHz  
#Res BW 1 MHz #VBW 1 MHz Sweep 199.9 ms (2001 pts)

Marker	Trace	Type	X Axis	Amplitude
1	(1)	Freq	5.71 GHz	6.32 dBm
2	(1)	Freq	26.65 GHz	-43.93 dBm
3	(1)	Freq	31.21 GHz	-40.59 dBm



## 7.10 POWERLINE CONDUCTED EMISSIONS

### LIMIT

According to §15.207(a) & RSS-Gen §7.2.4, except as shown in paragraphs (b) and (c) of this section, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50  $\mu$ H/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the boundary between the frequency ranges.

Frequency Range (MHz)	Limits (dB $\mu$ V)	
	Quasi-peak	Average
0.15 to 0.50	66 to 56*	56 to 46*
0.50 to 5	56	46
5 to 30	60	50

\* Decreases with the logarithm of the frequency.

### Test Configuration

See test photographs attached in Appendix II for the actual connections between EUT and support equipment.

### TEST PROCEDURE

1. The EUT was placed on a table, which is 0.8m above ground plane.
2. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
3. Repeat above procedures until all frequency measured were complete.



## TEST RESULTS

The initial step in collecting conducted data is a spectrum analyzer peak scan of the measurement range. Significant peaks are then marked as shown on the following data page, and these signals are then quasi-peaked.

### Test Data

**Operation Mode:** Normal Link                      **Test Date:** August 3, 2012  
**Temperature:** 26°C                                      **Tested by:** David Shu  
**Humidity:** 60% RH

Freq. (MHz)	QP Reading (dBuV)	AV Reading (dBuV)	Corr. factor (dB/m)	QP Result (dBuV/m)	AV Result (dBuV/m)	QP Limit (dBuV)	AV Limit (dBuV)	QP Margin (dB)	AV Margin (dB)	Note
0.2018	48.73	39.11	0.06	48.79	39.17	63.54	53.54	-14.75	-14.37	L1
0.2687	41.13	34.67	0.06	41.19	34.73	61.16	51.16	-19.97	-16.43	L1
0.4712	37.17	35.52	0.07	37.24	35.59	56.49	46.49	-19.25	-10.90	L1
2.1535	35.37	35.29	0.08	35.45	35.37	56.00	46.00	-20.55	-10.63	L1
3.8552	14.42	2.32	0.12	14.54	2.44	56.00	46.00	-41.46	-43.56	L1
5.2553	33.08	24.44	0.14	33.22	24.58	60.00	50.00	-26.78	-25.42	L1
0.2004	47.96	37.23	0.03	47.99	37.26	63.59	53.59	-15.60	-16.33	L2
0.4712	34.42	28.50	0.02	34.44	28.52	56.49	46.49	-22.05	-17.97	L2
1.0035	20.99	18.86	0.03	21.02	18.89	56.00	46.00	-34.98	-27.11	L2
1.5476	29.84	29.23	0.04	29.88	29.27	56.00	46.00	-26.12	-16.73	L2
3.3033	27.63	14.24	0.06	27.69	14.30	56.00	46.00	-28.31	-31.70	L2
5.1815	38.72	32.41	0.09	38.81	32.50	60.00	50.00	-21.19	-17.50	L2

### **Remark:**


1. Measuring frequencies from 0.15 MHz to 30MHz.
2. The emissions measured in frequency range from 0.15 MHz to 30MHz were made with an instrument using Quasi-peak detector and average detector.
3. The IF bandwidth of SPA between 0.15MHz to 30MHz was 10kHz; the IF bandwidth of Test Receiver between 0.15MHz to 30MHz was 9kHz;
4. L1 = Line One (Live Line) / L2 = Line Two (Neutral Line)






**Test Plots**

*Conducted emissions (Line 1)*

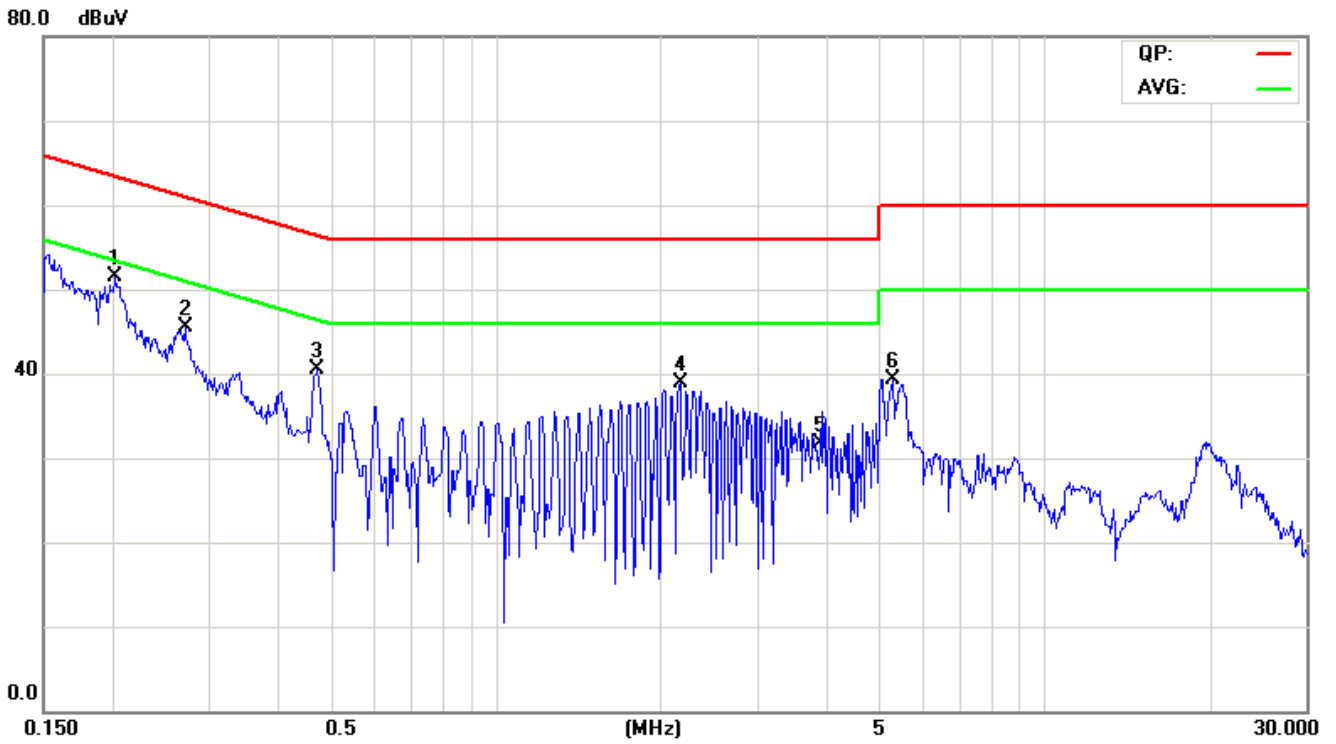

*Conducted emissions (Line 2)*

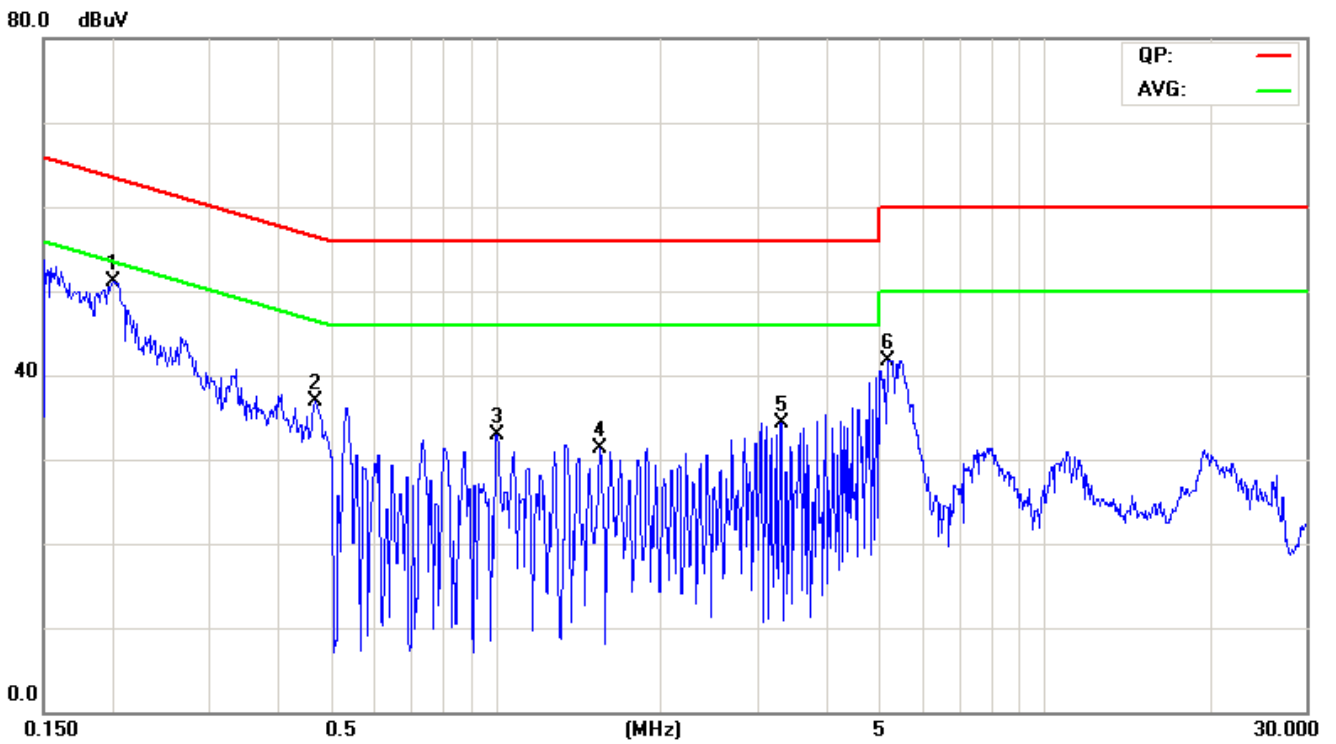




## 7.11 FREQUENCY STABILITY

### LIMIT

According to §15.407(g) & RSS-210 §A9.5(5), manufacturers of U-NII devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified in the operational description.

### Test Configuration

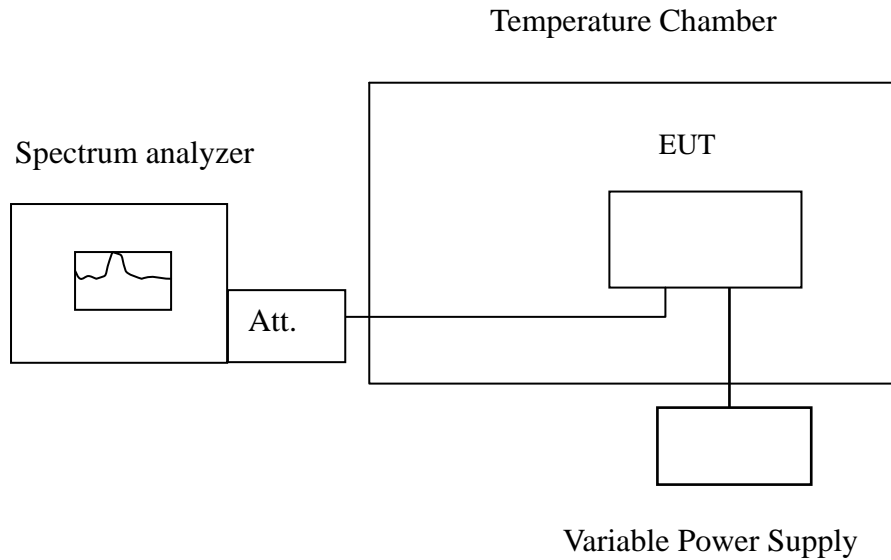

**Remark:** Measurement setup for testing on Antenna connector



### TEST PROCEDURE

The equipment under test was connected to an external AC or DC power supply and input rated voltage. RF output was connected to a frequency counter or spectrum analyzer via feed through attenuators. The EUT was placed inside the temperature chamber. Set the spectrum analyzer RBW low enough to obtain the desired frequency resolution and measure EUT 20°C operating frequency as reference frequency. Turn EUT off and set the chamber temperature to -20°C. After the temperature stabilized for approximately 30 minutes recorded the frequency. Repeat step measure with 10°C increased per stage until the highest temperature of +50°C reached.

### TEST RESULTS

*No non-compliance noted.*

#### **IEEE 802.11a mode / 5180 ~ 5240 MHz:**

##### CH Low

Operating Frequency: 5180 MHz				
Environment Temperature (°C)	Voltage (V)	Measured Frequency (MHz)	Limit Range	Test Result
50	110	5179.989529	5150~5250	Pass
40	110	5179.988312	5150~5250	Pass
30	110	5179.998286	5150~5250	Pass
20	110	5180.007437	5150~5250	Pass
10	110	5179.991483	5150~5250	Pass
0	110	5179.985953	5150~5250	Pass
-10	110	5179.974197	5150~5250	Pass
-20	110	5179.990587	5150~5250	Pass

Operating Frequency: 5180 MHz				
Environment Temperature (°C)	Voltage (V)	Measured Frequency (MHz)	Limit Range	Test Result
20	99	5180.00355	5150~5250	Pass
	110	5180.004409	5150~5250	Pass
	121	5179.998988	5150~5250	Pass



**CH High**

Operating Frequency: 5240 MHz				
Environment Temperature (°C)	Voltage (V)	Measured Frequency (MHz)	Limit Range	Test Result
50	110	5239.989419	5150~5250	Pass
40	110	5240.020681	5150~5250	Pass
30	110	5240.003290	5150~5250	Pass
20	110	5239.970001	5150~5250	Pass
10	110	5239.998110	5150~5250	Pass
0	110	5240.018288	5150~5250	Pass
-10	110	5240.002642	5150~5250	Pass
-20	110	5239.977821	5150~5250	Pass

Operating Frequency: 5240 MHz				
Environment Temperature (°C)	Voltage (V)	Measured Frequency (MHz)	Limit Range	Test Result
20	99	5240.017469	5150~5250	Pass
	110	5239.996448	5150~5250	Pass
	121	5239.988832	5150~5250	Pass



**IEEE 802.11n HT 20 MHz Channel mode / 5180 ~ 5240 MHz:**

**CH Low**

Operating Frequency: 5180 MHz				
Environment Temperature (°C)	Voltage (V)	Measured Frequency (MHz)	Limit Range	Test Result
50	110	5179.997416	5150~5250	Pass
40	110	5179.979583	5150~5250	Pass
30	110	5179.979588	5150~5250	Pass
20	110	5179.998196	5150~5250	Pass
10	110	5180.003426	5150~5250	Pass
0	110	5179.982241	5150~5250	Pass
-10	110	5179.986851	5150~5250	Pass
-20	110	5179.990860	5150~5250	Pass

Operating Frequency: 5180 MHz				
Environment Temperature (°C)	Voltage (V)	Measured Frequency (MHz)	Limit Range	Test Result
20	99	5179.970218	5150~5250	Pass
	110	5180.014203	5150~5250	Pass
	121	5180.017003	5150~5250	Pass



**CH High**

Operating Frequency: 5240 MHz				
Environment Temperature (°C)	Voltage (V)	Measured Frequency (MHz)	Limit Range	Test Result
50	110	5240.007435	5150~5250	Pass
40	110	5239.974199	5150~5250	Pass
30	110	5239.994157	5150~5250	Pass
20	110	5240.015372	5150~5250	Pass
10	110	5239.998311	5150~5250	Pass
0	110	5240.014170	5150~5250	Pass
-10	110	5239.985436	5150~5250	Pass
-20	110	5239.999026	5150~5250	Pass

Operating Frequency: 5240 MHz				
Environment Temperature (°C)	Voltage (V)	Measured Frequency (MHz)	Limit Range	Test Result
20	99	5239.985865	5150~5250	Pass
	110	5240.00024	5150~5250	Pass
	121	5239.976755	5150~5250	Pass



**IEEE 802.11a mode / 5260 ~ 5320 MHz:**

**CH Low**

Operating Frequency: 5260 MHz				
Environment Temperature (°C)	Voltage (V)	Measured Frequency (MHz)	Limit Range	Test Result
50	110	5260.000790	5150~5250	Pass
40	110	5259.981939	5150~5250	Pass
30	110	5260.004912	5150~5250	Pass
20	110	5260.013449	5150~5250	Pass
10	110	5260.009856	5150~5250	Pass
0	110	5259.978192	5150~5250	Pass
-10	110	5259.971300	5150~5250	Pass
-20	110	5260.015207	5150~5250	Pass

Operating Frequency: 5260 MHz				
Environment Temperature (°C)	Voltage (V)	Measured Frequency (MHz)	Limit Range	Test Result
20	99	5260.008806	5150~5250	Pass
	110	5259.987984	5150~5250	Pass
	121	5260.001798	5150~5250	Pass



**CH High**

Operating Frequency: 5320 MHz				
Environment Temperature (°C)	Voltage (V)	Measured Frequency (MHz)	Limit Range	Test Result
50	110	5320.015003	5150~5250	Pass
40	110	5320.010180	5150~5250	Pass
30	110	5319.983557	5150~5250	Pass
20	110	5320.009328	5150~5250	Pass
10	110	5319.995049	5150~5250	Pass
0	110	5319.988055	5150~5250	Pass
-10	110	5319.982589	5150~5250	Pass
-20	110	5319.997877	5150~5250	Pass

Operating Frequency: 5320 MHz				
Environment Temperature (°C)	Voltage (V)	Measured Frequency (MHz)	Limit Range	Test Result
20	99	5319.979245	5150~5250	Pass
	110	5319.983498	5150~5250	Pass
	121	5320.016241	5150~5250	Pass





IEEE 802.11n HT 20 MHz Channel mode / 5260 ~ 5320 MHz:

**CH Low**

Operating Frequency: 5260 MHz				
Environment Temperature (°C)	Voltage (V)	Measured Frequency (MHz)	Limit Range	Test Result
50	110	5260.006767	5150~5250	Pass
40	110	5259.988355	5150~5250	Pass
30	110	5259.991982	5150~5250	Pass
20	110	5259.995440	5150~5250	Pass
10	110	5260.014623	5150~5250	Pass
0	110	5259.983867	5150~5250	Pass
-10	110	5259.994107	5150~5250	Pass
-20	110	5259.981503	5150~5250	Pass

Operating Frequency: 5260 MHz				
Environment Temperature (°C)	Voltage (V)	Measured Frequency (MHz)	Limit Range	Test Result
20	99	5260.0097	5150~5250	Pass
	110	5259.993322	5150~5250	Pass
	121	5259.978913	5150~5250	Pass



**CH High**

Operating Frequency: 5320 MHz				
Environment Temperature (°C)	Voltage (V)	Measured Frequency (MHz)	Limit Range	Test Result
50	110	5320.008093	5150~5250	Pass
40	110	5319.974507	5150~5250	Pass
30	110	5320.010987	5150~5250	Pass
20	110	5320.008051	5150~5250	Pass
10	110	5319.999249	5150~5250	Pass
0	110	5320.014166	5150~5250	Pass
-10	110	5319.974986	5150~5250	Pass
-20	110	5319.999356	5150~5250	Pass

Operating Frequency: 5320 MHz				
Environment Temperature (°C)	Voltage (V)	Measured Frequency (MHz)	Limit Range	Test Result
20	99	5319.970161	5150~5250	Pass
	110	5319.984009	5150~5250	Pass
	121	5319.987334	5150~5250	Pass



**IEEE 802.11a mode / 5500 ~ 5700 MHz:**

**CH Low**

Operating Frequency: 5500 MHz				
Environment Temperature (°C)	Voltage (V)	Measured Frequency (MHz)	Limit Range	Test Result
50	110	5499.981556	5150~5250	Pass
40	110	5499.980743	5150~5250	Pass
30	110	5500.018759	5150~5250	Pass
20	110	5500.006819	5150~5250	Pass
10	110	5499.971269	5150~5250	Pass
0	110	5500.002637	5150~5250	Pass
-10	110	5500.020558	5150~5250	Pass
-20	110	5499.994926	5150~5250	Pass

Operating Frequency: 5500 MHz				
Environment Temperature (°C)	Voltage (V)	Measured Frequency (MHz)	Limit Range	Test Result
20	99	5499.976246	5150~5250	Pass
	110	5500.002323	5150~5250	Pass
	121	5499.974829	5150~5250	Pass



**CH High**

Operating Frequency: 5700 MHz				
Environment Temperature (°C)	Voltage (V)	Measured Frequency (MHz)	Limit Range	Test Result
50	110	5699.990575	5150~5250	Pass
40	110	5700.017006	5150~5250	Pass
30	110	5700.008576	5150~5250	Pass
20	110	5699.972451	5150~5250	Pass
10	110	5700.012964	5150~5250	Pass
0	110	5699.994966	5150~5250	Pass
-10	110	5700.013206	5150~5250	Pass
-20	110	5700.017128	5150~5250	Pass

Operating Frequency: 5700 MHz				
Environment Temperature (°C)	Voltage (V)	Measured Frequency (MHz)	Limit Range	Test Result
20	99	5700.005735	5150~5250	Pass
	110	5699.992222	5150~5250	Pass
	121	5699.98768	5150~5250	Pass



IEEE 802.11n HT 20 MHz Channel mode / 5500 ~ 5700 MHz:

**CH Low**

Operating Frequency: 5500 MHz				
Environment Temperature (°C)	Voltage (V)	Measured Frequency (MHz)	Limit Range	Test Result
50	110	5499.984976	5150~5250	Pass
40	110	5499.971681	5150~5250	Pass
30	110	5500.007799	5150~5250	Pass
20	110	5499.977233	5150~5250	Pass
10	110	5500.012248	5150~5250	Pass
0	110	5499.999387	5150~5250	Pass
-10	110	5499.991675	5150~5250	Pass
-20	110	5499.984289	5150~5250	Pass

Operating Frequency: 5500 MHz				
Environment Temperature (°C)	Voltage (V)	Measured Frequency (MHz)	Limit Range	Test Result
20	99	5499.990697	5150~5250	Pass
	110	5500.009397	5150~5250	Pass
	121	5499.970732	5150~5250	Pass



**CH High**

Operating Frequency: 5700 MHz				
Environment Temperature (°C)	Voltage (V)	Measured Frequency (MHz)	Limit Range	Test Result
50	110	5699.972288	5150~5250	Pass
40	110	5699.987482	5150~5250	Pass
30	110	5699.972719	5150~5250	Pass
20	110	5699.982575	5150~5250	Pass
10	110	5700.013833	5150~5250	Pass
0	110	5699.973165	5150~5250	Pass
-10	110	5700.002159	5150~5250	Pass
-20	110	5699.982367	5150~5250	Pass

Operating Frequency: 5700 MHz				
Environment Temperature (°C)	Voltage (V)	Measured Frequency (MHz)	Limit Range	Test Result
20	99	5699.972476	5150~5250	Pass
	110	5699.991943	5150~5250	Pass
	121	5700.012427	5150~5250	Pass



## 7.12 DYNAMIC FREQUENCY SELECTION

### LIMIT

According to §15.407 (h) and FCC 06-96 appendix “compliance measurement procedures for unlicensed-national information infrastructure devices operating in the 5250-5350 MHz and 5470-5725 MHz bands incorporating dynamic frequency selection”.

*Remark: IC RSS-210 §A9.5 is closely harmonized with FCC Part 15 DFS rules.*

**Table 1: Applicability of DFS requirements prior to use of a channel**

Requirement	Operational Mode		
	Master	Client (without radar detection)	Client(with radar detection)
Non-Occupancy Period	Yes	Not required	Yes
DFS Detection Threshold	Yes	Not required	Yes
Channel Availability Check Time	Yes	Not required	Not required
Uniform Spreading	Yes	Not required	Not required

**Table 2: Applicability of DFS requirements during normal operation**

Requirement	Operational Mode		
	Master	Client (without radar detection)	Client(with radar detection)
DFS Detection Threshold	Yes	Not required	Yes
Channel Closing Transmission Time	Yes	Yes	Yes
Channel Move Time	Yes	Yes	Yes

**Table 3: Interference Threshold values, Master or Client incorporating In-Service**

Maximum Transmit Power	Value (see note)
≥200 Milliwatt	-64 dBm
< 200 Milliwatt	-62 dBm

Note 1: This is the level at the input of the receiver assuming a 0 dBi receive antenna.

Note 2: Throughout these test procedures an additional 1 dB has been added to the amplitude of the test transmission waveforms to account for variations in measurement equipment. This will ensure that the test signal is at or above the detection threshold level to trigger a DFS response.



**Table 4: DFS Response requirement values**

Parameter	Value
Non-occupancy period	30 minutes
Channel Availability Check Time	60 seconds
Channel Move Time	10 seconds
Channel Closing Transmission Time	200 milliseconds + approx. 60 milliseconds over remaining 10 second period

The instant that the Channel Move Time and the Channel Closing Transmission Time begins is as follows:

- For the Short pulse radar Test Signals this instant is the end of the Burst.
- For the Frequency Hopping radar Test Signal, this instant is the end of the last radar burst generated.
- For the Long Pulse radar Test Signal this instant is the end of the 12 second period defining the radar transmission.

The Channel Closing Transmission Time is comprised of 200 milliseconds starting at the beginning of the Channel Move Time plus any additional intermittent control signals required to facilitate channel changes (an aggregate of approximately 60 milliseconds) during the remainder of the 10 second period. The aggregate duration of control signals will not count quiet periods in between transmissions.

**Table 5 – Short Pulse Radar Test Waveforms**

Radar Type	Pulse Width (Microseconds)	PRI (Microseconds)	Pulses	Minimum Percentage of Successful Detection	Minimum Trials
1	1	1428	18	60%	30
2	1-5	150-230	23-29	60%	30
3	6-10	200-500	16-18	60%	30
4	11-20	200-500	12-16	60%	30
Aggregate (Radar Types 1-4)				80%	120

**Table 6 – Long Pulse Radar Test Signal**

Radar Waveform	Bursts	Pulses per Burst	Pulse Width (µsec)	Chirp Width (µsec)	PRI (µsec)	Minimum Percentage of Successful Detection	Minimum Trials
5	8-20	1-3	50-100	5-20	1000-2000	80%	30

**Table 7 – Frequency Hopping Radar Test Signal**

Radar Waveform	Pulse Width (µsec)	PRI (µsec)	Burst Length (ms)	Pulses Per Hop	Hopping Rate (kHz)	Minimum Percentage of Successful Detection	Minimum Trials
6	1	333	300	9	0.33	70%	30





## **DESCRIPTION OF EUT**

### **Overview Of EUT With Respect To §15.407 (H) Requirements**

The firmware installed in the EUT during testing was:

Firmware Rev: 5.93.97.53

The EUT operates over the 5250-5350 MHz range as a Client Device that does not have radar detection capability.

The antenna assembly utilized with the EUT has a gain of 2.89 dBi.

The highest power level is 12.04 dBm EIRP in the 5260 ~ 5320MHz band.

The EUT uses one transmitter connected to two 50-ohm coaxial antenna ports via a diversity switch. Only one antenna port is connected to the test system since the EUT has one antenna only.

The Slave device associated with the EUT during these tests does not have radar detection capability.

WLAN traffic is generated by streaming the video file TestFile.mp2 “6 ½ Magic Hours” from the Master to the Slave in full motion video mode using the media player with the V2.61 Codec package.

The EUT utilizes the 802.11a architecture, with a nominal channel bandwidth of 20 MHz.

The Master Device is a Cisco Aironet 802.11a/b/g Access Point, FCC ID: LDK102073.

The rated output power of the Master unit is < 23dBm (EIRP). Therefore the required interference threshold level is -62 dBm. After correction for antenna gain and procedural adjustments, the required conducted threshold at the antenna port is  $-62 + 2.89 = -59.11$ dBm.

The calibrated conducted DFS Detection Threshold level is set to -59.11 dBm. The tested level is lower than the required level hence it provides margin to the limit.

### **Manufacturer’s Statement Regarding Uniform Channel Spreading**

The end product implements an automatic channel selection feature at startup such that operation commences on channels distributed across the entire set of allowed 5GHz channels. This feature will ensure uniform spreading is achieved while avoiding non-allowed channels due to prior radar events.



## **TEST AND MEASUREMENT SYSTEM**

### **System Overview**

The measurement system is based on a conducted test method.

The short pulse and long pulse signal generating system utilizes the NTIA software. The Vector Signal Generator has been validated by the NTIA. The hopping signal generating system utilizes the CCS simulated hopping method and system, which has been validated by the DoD, FCC and NTIA. The software selects waveform parameters from within the bounds of the signal type on a random basis using uniform distribution.


The short pulse types 2, 3 and 4, and the long pulse type 5 parameters are randomized at run-time.

The hopping type 6 pulse parameters are fixed while the hopping sequence is based on the August 2005 NTIA Hopping Frequency List. The initial starting point randomized at run-time and each subsequent starting point is incremented by 475. Each frequency in the 100-length segment is compared to the boundaries of the EUT Detection Bandwidth and the software creates a hopping burst pattern in accordance with Section 7.4.1.3 Method #2 Simulated Frequency Hopping Radar Waveform Generating Subsystem of FCC 06-96 APPENDIX. The frequency of the signal generator is incremented in 1 MHz steps from FL to FH for each successive trial. This incremental sequence is repeated as required to generate a minimum of 30 total trials and to maintain a uniform frequency distribution over the entire Detection Bandwidth.

The signal monitoring equipment consists of a spectrum analyzer set to display 8001 bins on the horizontal axis. The time-domain resolution is 2 msec / bin with a 16 second sweep time, meeting the 10 second short pulse reporting criteria. The aggregate ON time is calculated by multiplying the number of bins above a threshold during a particular observation period by the dwell time per bin, with the analyzer set to peak detection and max hold. The time-domain resolution is 3 msec / bin with a 24 second sweep time, meeting the 22 second long pulse reporting criteria and allowing a minimum of 10 seconds after the end of the long pulse waveform.

Should multiple RF ports be utilized for the Master and/or Slave devices (for example, for diversity or MIMO implementations), 50 ohm termination would be removed from the splitter so that connection can be established between splitter and the Master and/or Slave devices.

### **Conducted Method System Block Diagram**

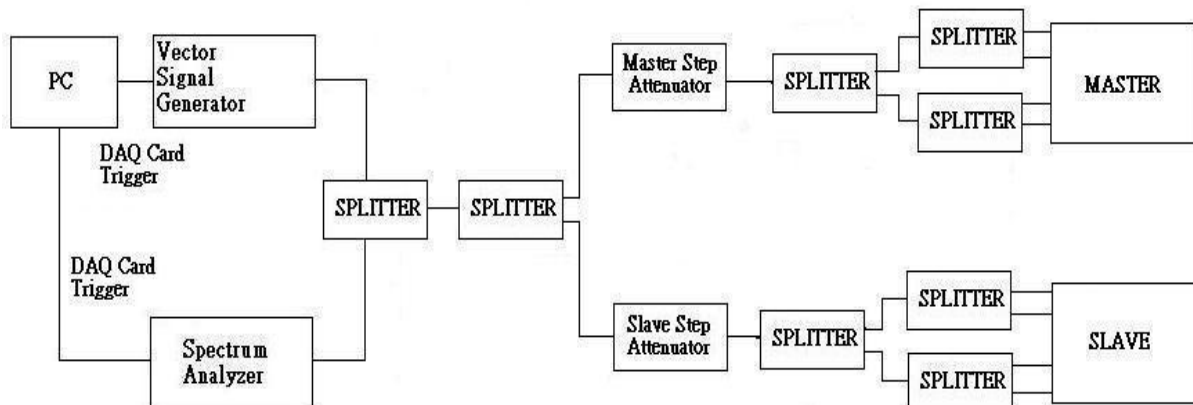



### **System Calibration**

Connect the spectrum analyzer to the test system in place of the master device. Set the signal generator to CW mode. Adjust the amplitude of the signal generator to yield a measured level of  $-62$  dBm on the spectrum analyzer.

Without changing any of the instrument settings, reconnect the spectrum analyzer to the Common port of the Spectrum Analyzer Combiner/Divider and connect a 50 ohm load to the Master Device port of the test system.

Measure the amplitude and calculate the difference from  $-62$  dBm. Adjust the Reference Level Offset of the spectrum analyzer to this difference. Confirm that the signal is displayed at  $-62$  dBm. Readjust the RBW and VBW to 3 MHz, set the span to 10 MHz, and confirm that the signal is still displayed at  $-62$  dBm.

The spectrum analyzer displays the level of the signal generator as received at the antenna ports of the Master Device. The interference detection threshold may be varied from the calibrated value of  $-62$  dBm and the spectrum analyzer will still indicate the level as received by the Master Device.

Set the signal generator to produce a radar waveform, trigger a burst manually and measure the level on the spectrum analyzer. Readjust the amplitude of the signal generator as required so that the peak level of the waveform is at a displayed level equal to the required or desired interference detection threshold. Separate signal generator amplitude settings are determined as required for each radar type.


### **Adjustment Of Displayed Traffic Level**

Establish a link between the Master and Slave, adjusting the Link Step Attenuator as needed to provide a suitable received level at the Master and Slave devices. Stream the video test file to generate WLAN traffic. Confirm that the WLAN traffic level, as displayed on the spectrum analyzer, is at lower amplitude than the radar detection threshold. Confirm that the displayed traffic is from the Master Device. For Master Device testing confirm that the displayed traffic does not include Slave Device traffic. For Slave Device testing confirm that the displayed traffic does not include Master Device traffic.

If a different setting of the Master Step Attenuator is required to meet the above conditions, perform a new System Calibration for the new Master Step Attenuator setting.



**Test Setup**

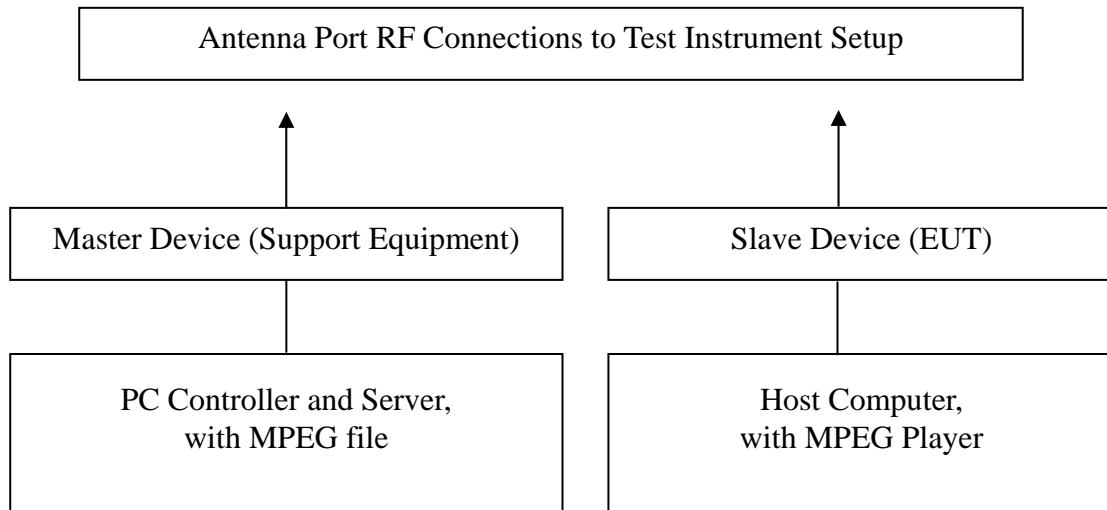

**TEST RESULTS**

*No non-compliance noted*




**Test Plot**

**PLOTS OF RADAR WAVEFORMS**

**Sample of Short Pulse Radar Type 1**

Agilent 15:21:19 Aug 18, 2012


T

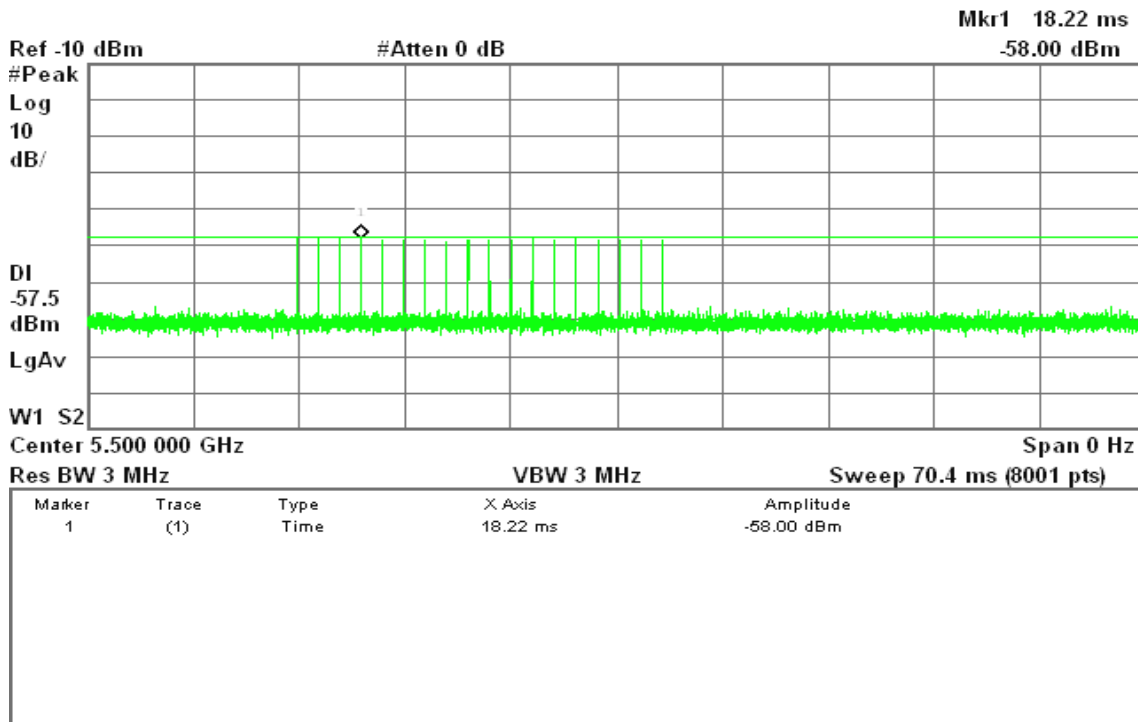

**Sample of Short Pulse Radar Type 2**

Agilent 15:24:52 Aug 18, 2012

T

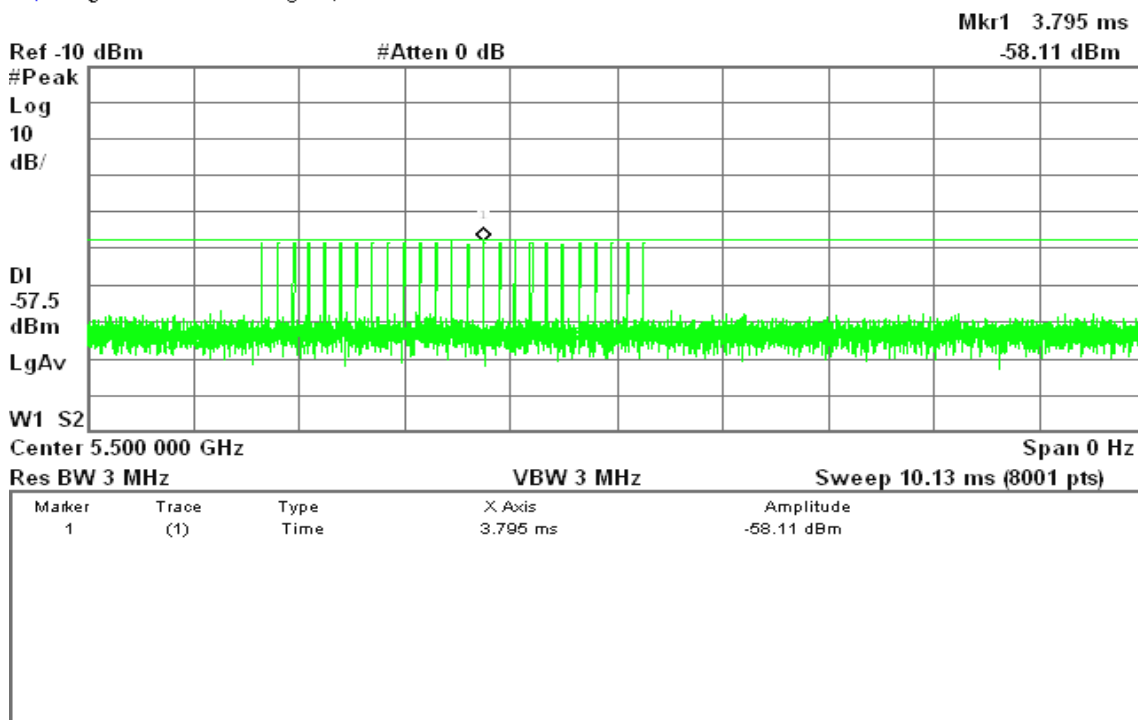




### Sample of Short Pulse Radar Type 3

Agilent 15:25:57 Aug 18, 2012


T

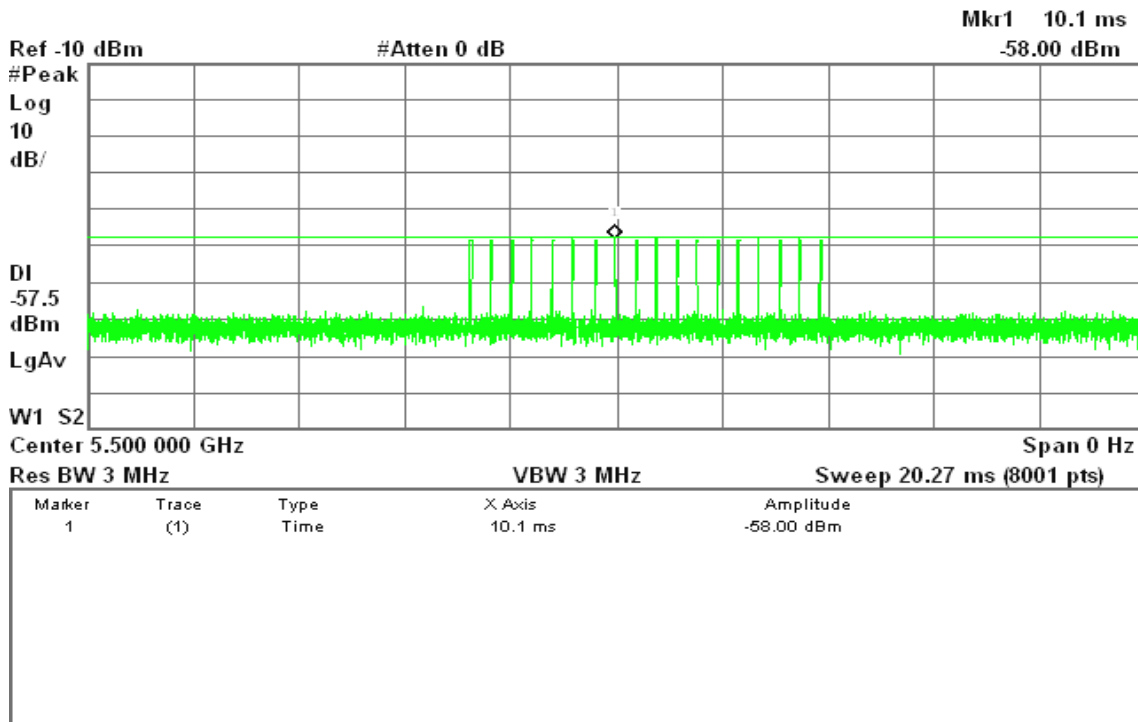

### Sample of Short Pulse Radar Type 4

Agilent 15:26:54 Aug 18, 2012

T

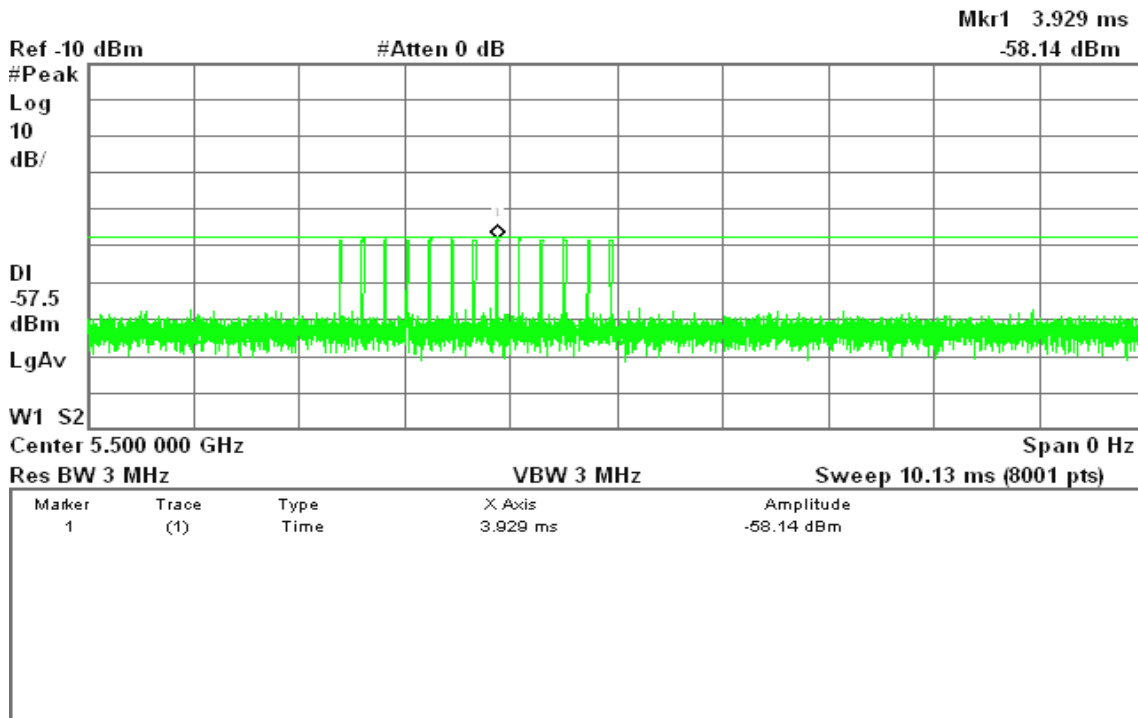




### Sample of Long Pulse Radar Type 5

Agilent 15:29:35 Aug 18, 2012


T

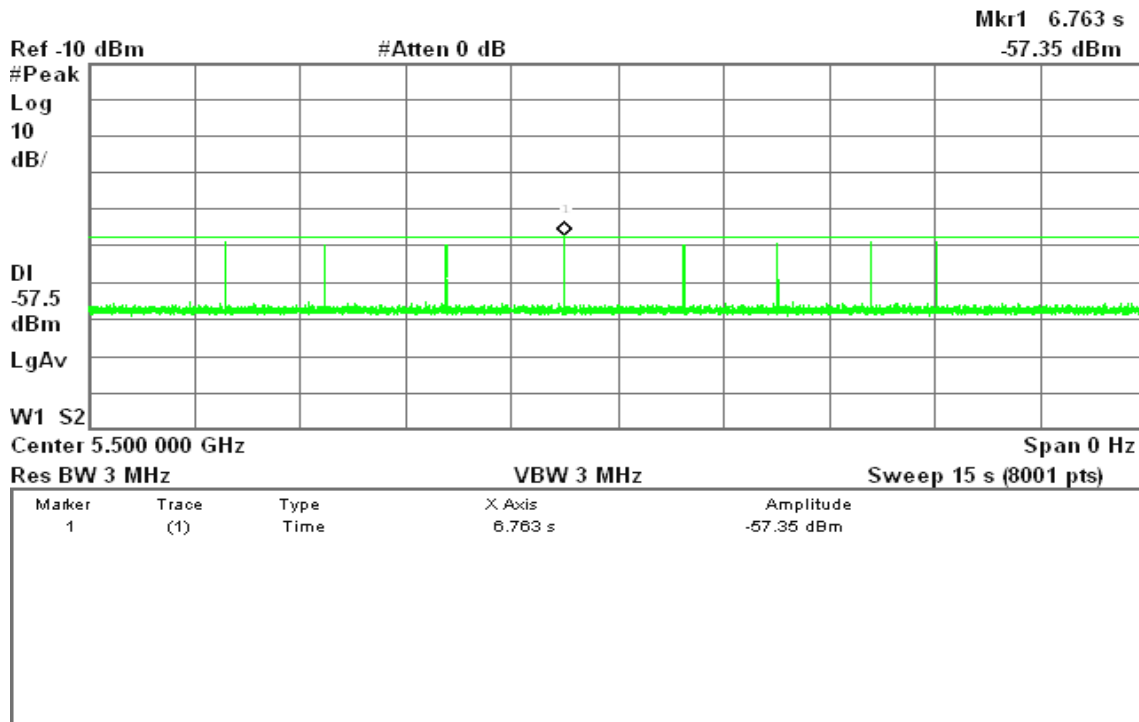

### Sample of Frequency Hopping Radar Type 6

Agilent 15:27:41 Aug 18, 2012

T

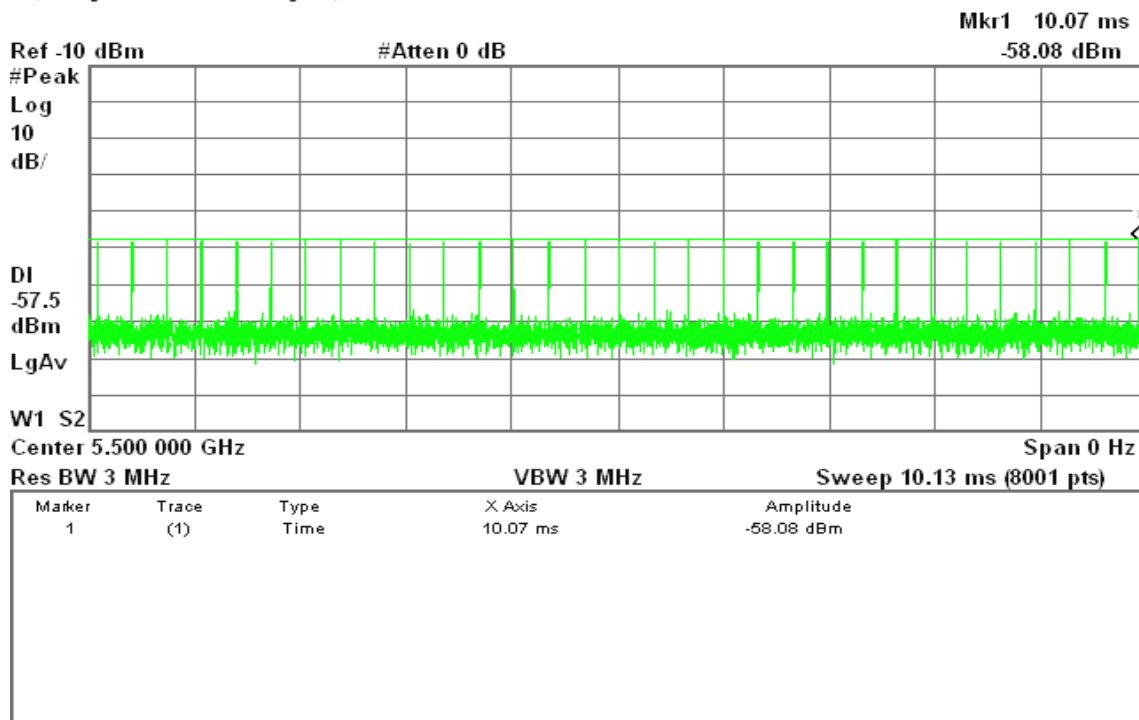




### Plot of WLAN Traffic from Slave

Agilent 15:43:19 Aug 18, 2012

T

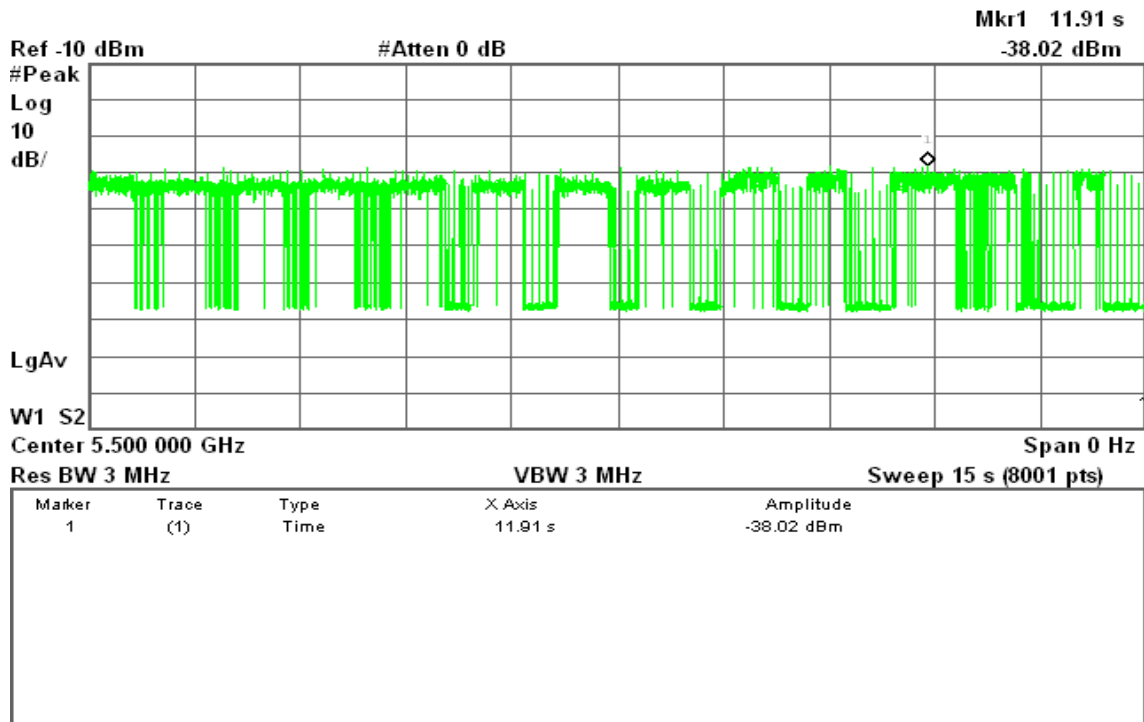





## **TEST CHANNEL AND METHOD**

All tests were performed at a channel center frequency of 5300 MHz utilizing a conducted test method.

## **CHANNEL MOVE TIME AND CHANNEL CLOSING TRANSMISSION TIME**

### **GENERAL REPORTING NOTES**

The reference marker is set at the end of last radar pulse.

The delta marker is set at the end of the last WLAN transmission following the radar pulse. This delta is the channel move time.

The aggregate channel closing transmission time is calculated as follows:

Aggregate Transmission Time =

(Number of analyzer bins showing transmission) \* (dwell time per bin)

The observation period over which the aggregate time is calculated

Begins at (Reference Marker + 200 msec) and

Ends no earlier than (Reference Marker + 10 sec).



### LOW BAND RESULTS

#### Bandwidth 20 MHz Mode

#### Type 1 Channel Move Time Results


No non-compliance noted.

Channel Move Time (s)	Limit (s)
1.213	10

Agilent 15:20:27 Aug 17, 2012

R T

Δ Mkr2 506.3 ms  
-29.40 dB

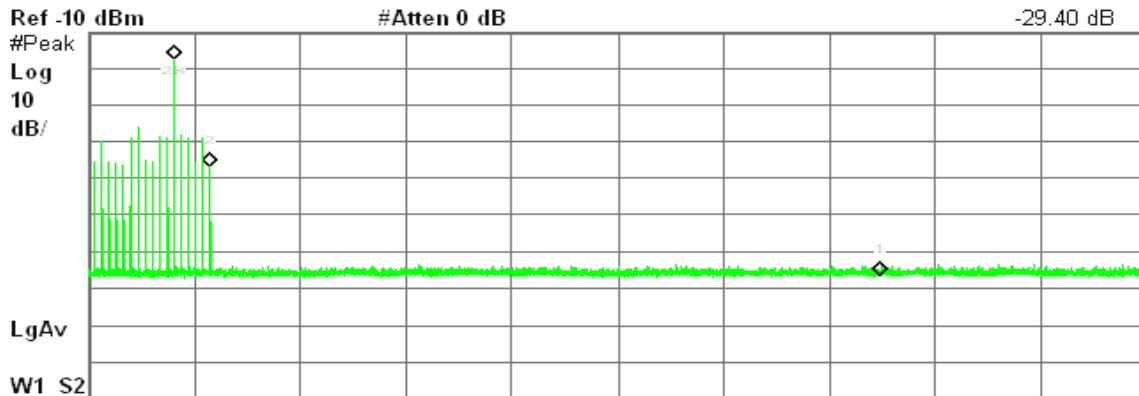

Center 5.300 000 GHz      Span 0 Hz  
 Res BW 3 MHz      VBW 3 MHz      Sweep 15 s (8001 pts)

Marker	Trace	Type	X Axis	Amplitude
1R	(1)	Time	1.213 s	-17.48 dBm
1Δ	(1)	Time	10 s	-59.27 dB
2R	(1)	Time	1.213 s	-17.48 dBm
2Δ	(1)	Time	506.3 ms	-29.40 dB



### Type 5 Channel Move Time Results


No non-compliance noted.

Channel Move Time (s)	Limit (s)
1.05	10

Agilent 10:15:25 Aug 18, 2012

R T

Δ Mkr2 568.1 ms  
-30.75 dB

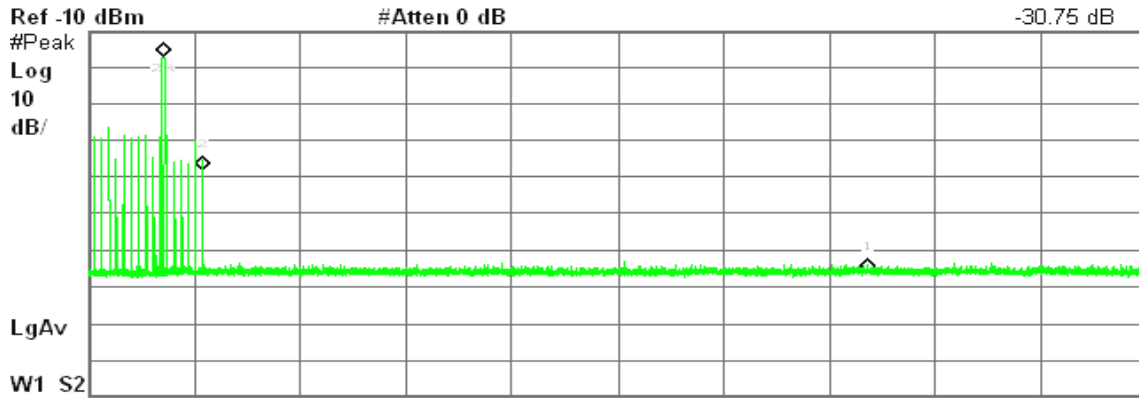

Center 5.300 000 GHz Span 0 Hz  
 Res BW 3 MHz VBW 3 MHz Sweep 15 s (8001 pts)

Marker	Trace	Type	X Axis	Amplitude
1R	(1)	Time	1.05 s	-17.14 dBm
1Δ	(1)	Time	10 s	-58.94 dB
2R	(1)	Time	1.05 s	-17.14 dBm
2Δ	(1)	Time	568.1 ms	-30.75 dB




## Bandwidth 20 MHz Mode



### Type 1 Channel Closing Transmission Time Results

No non-compliance noted.

For R1

Aggregate Transmission Time (ms)	Limit (ms)	Margin (ms)
16.87	60	-43.13

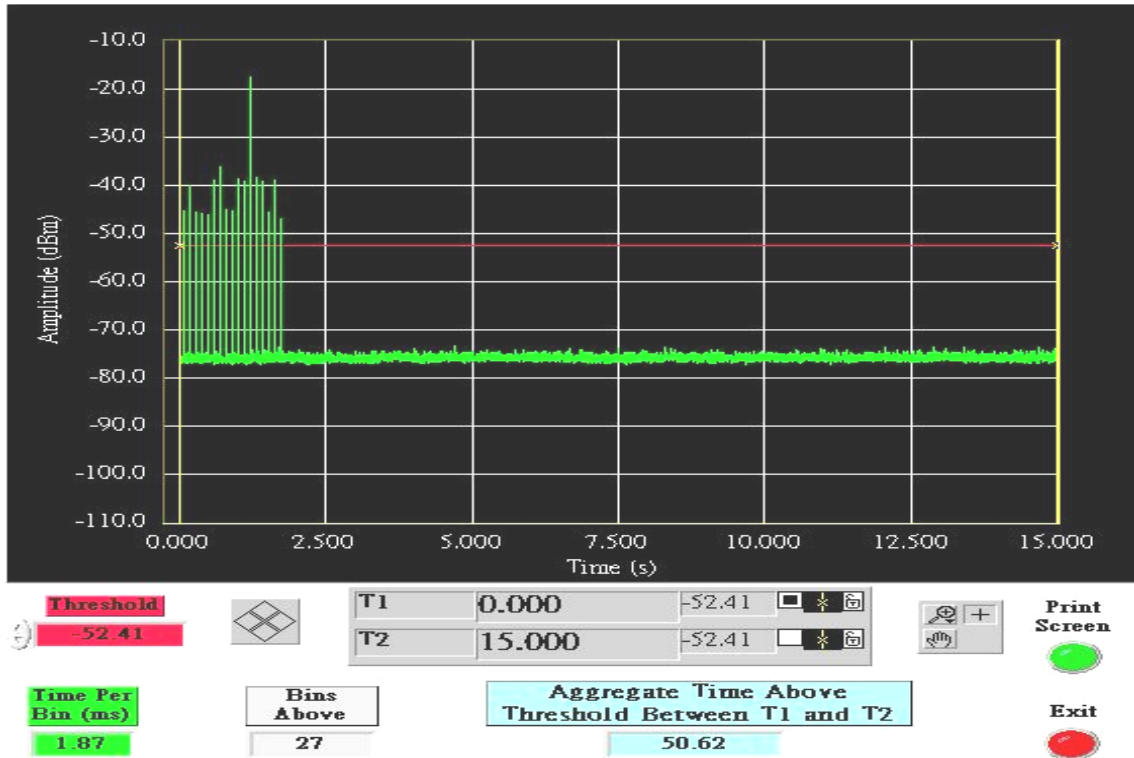


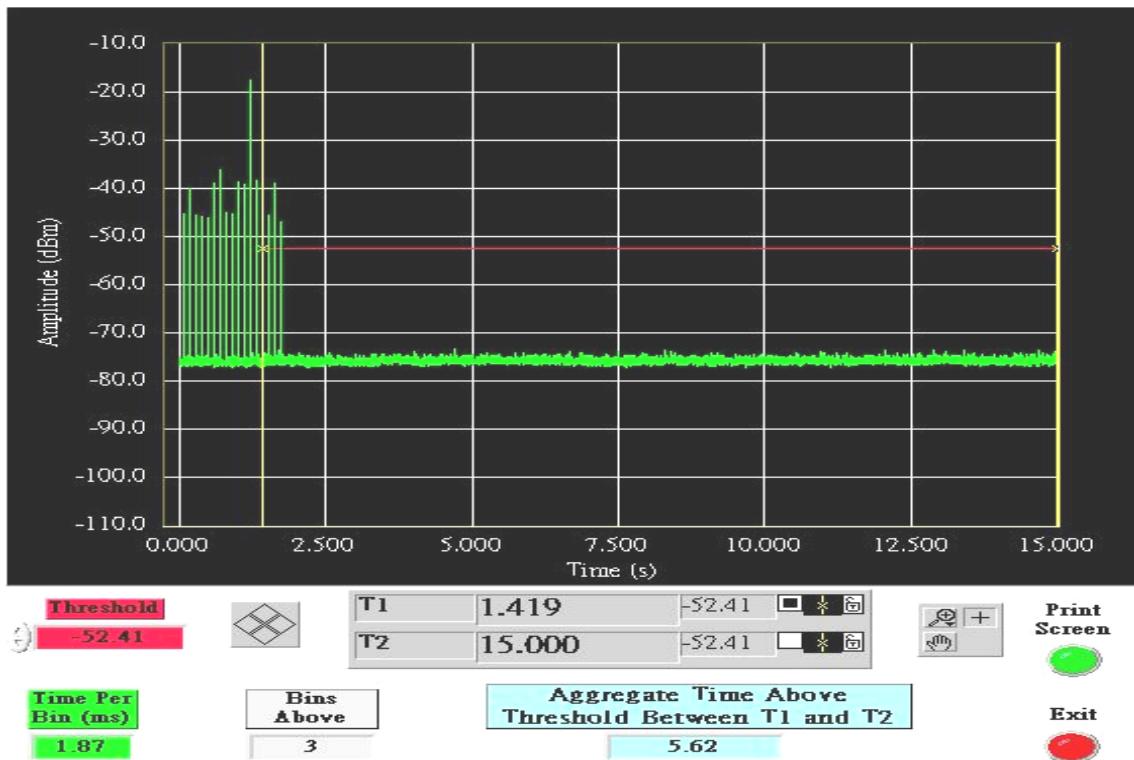
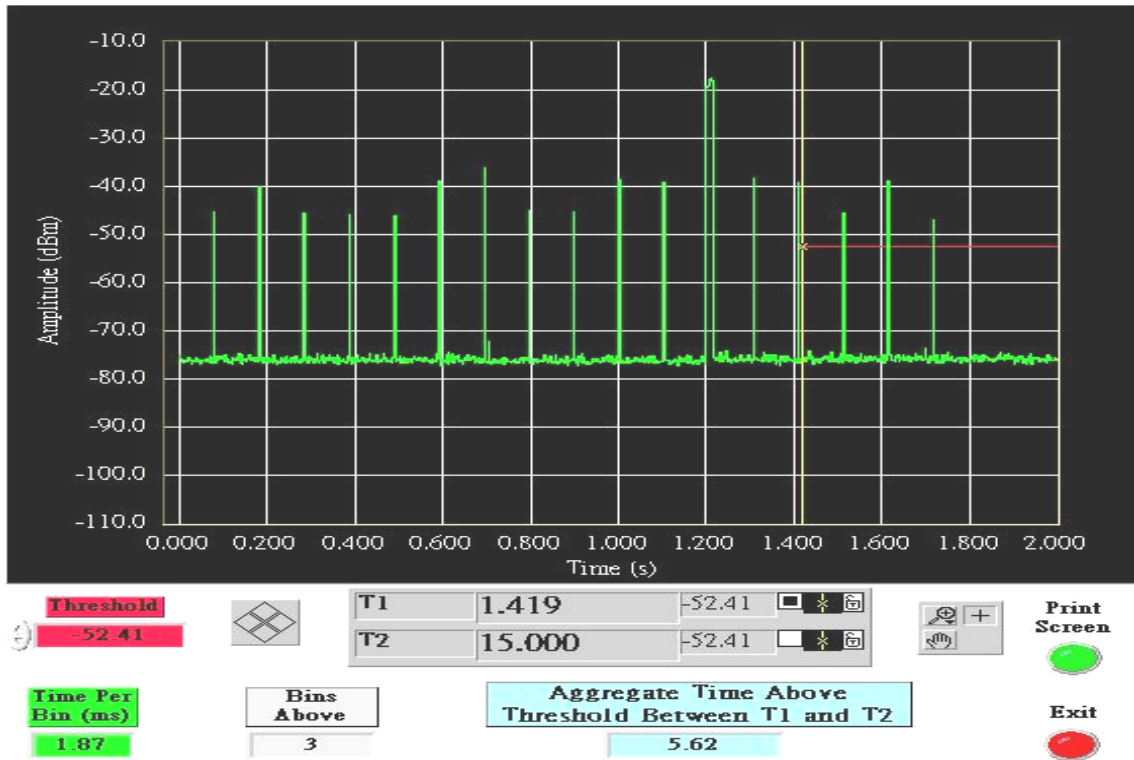




For R5

Aggregate Transmission Time (ms)	Limit (ms)	Margin (ms)
20.62	60	-39.38

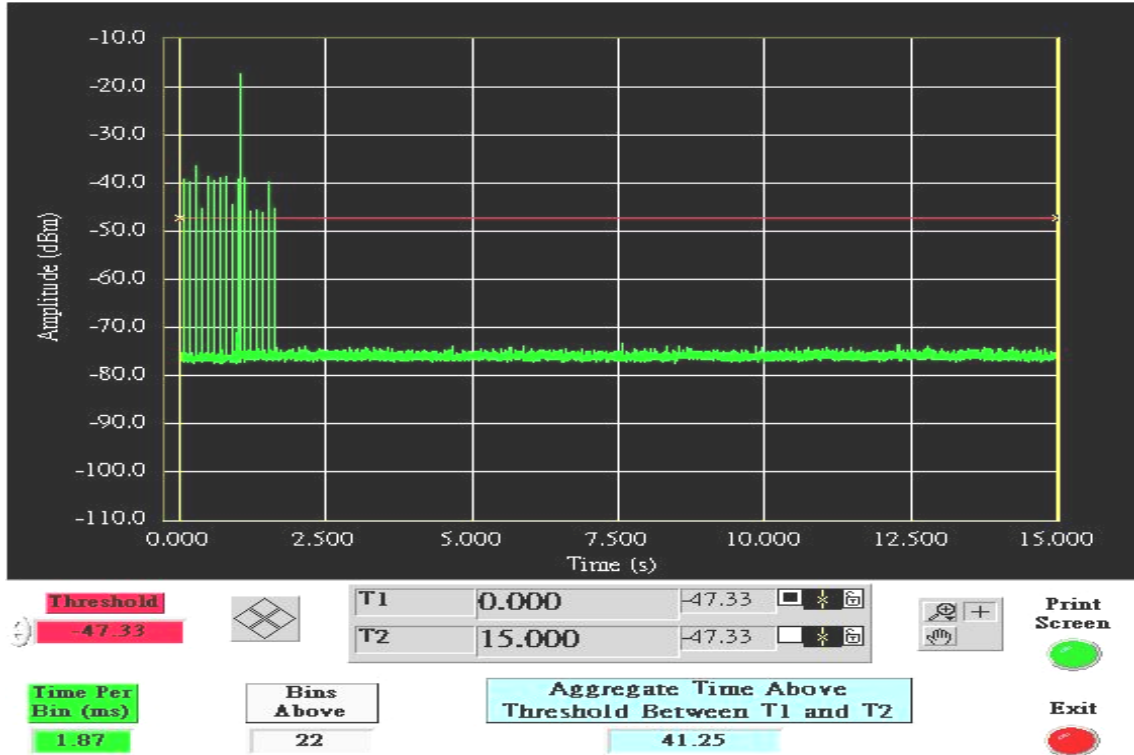

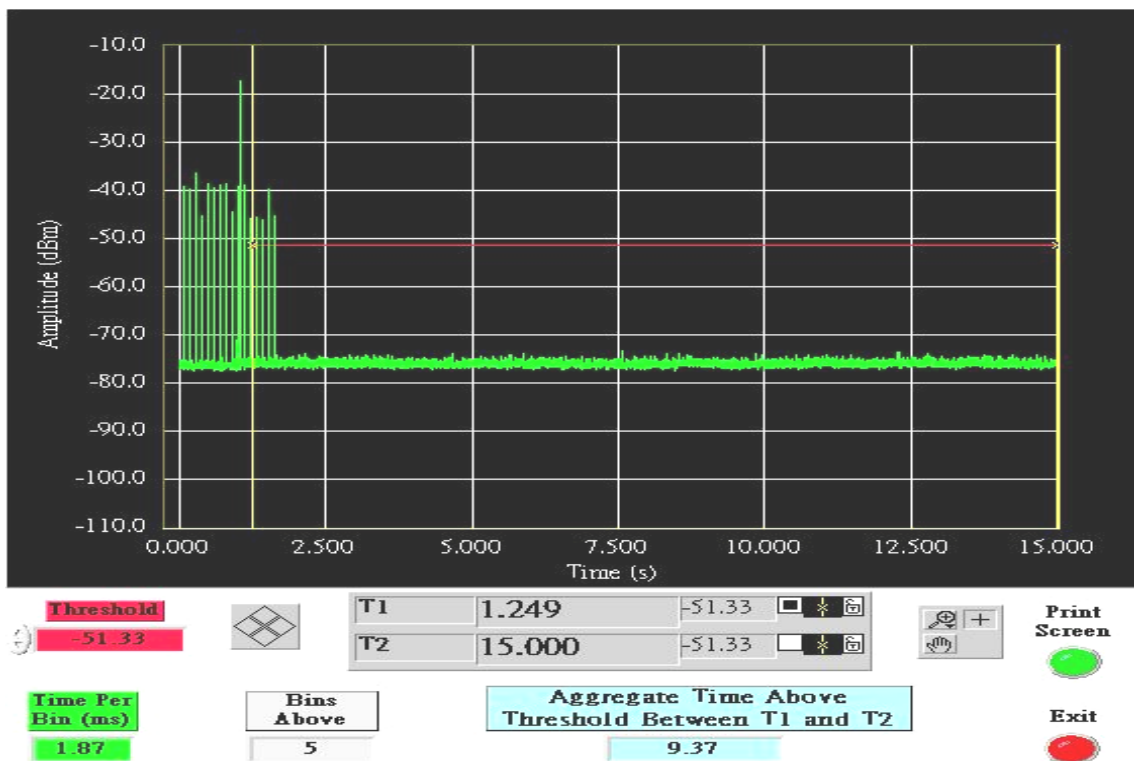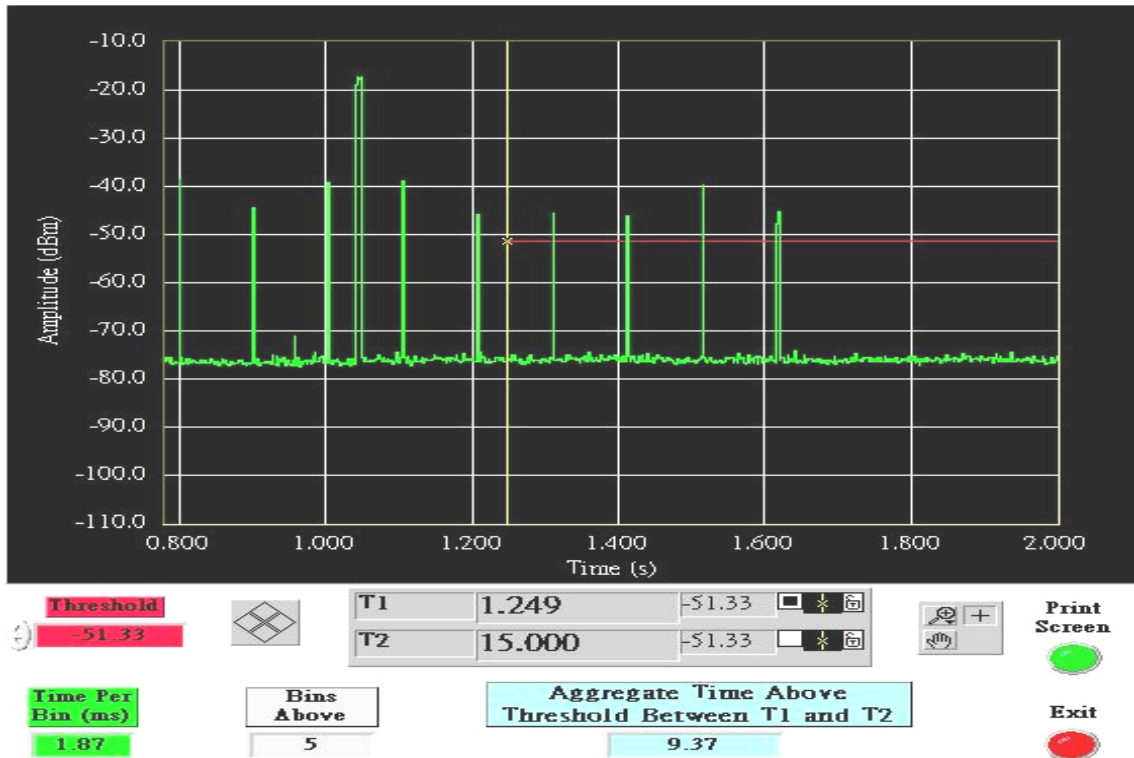



### HIGH BAND RESULTS

#### Bandwidth 20 MHz Mode

#### Type 1 Channel Move Time Results


No non-compliance noted.

Channel Move Time (s)	Limit (s)
1.5626	10

Agilent 14:39:19 Aug 17, 2012

R T

Δ Mkr2 1.526 s

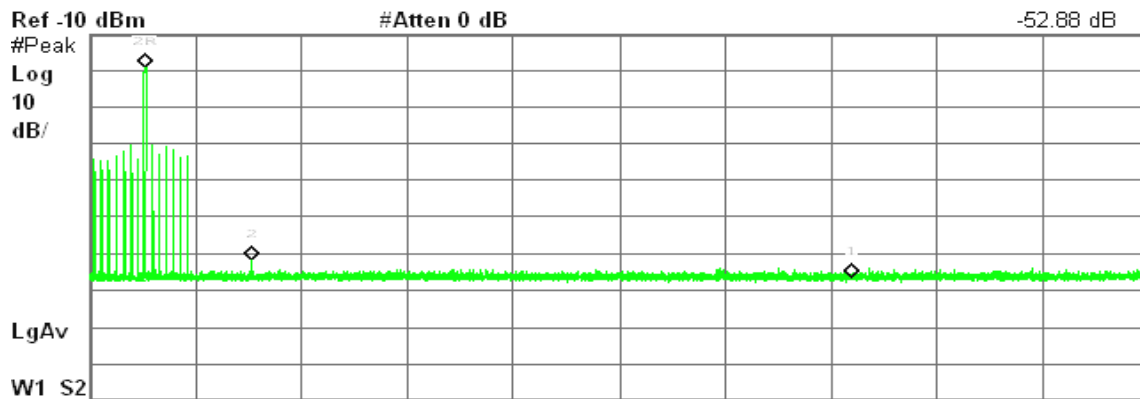

Ref -10 dBm #Atten 0 dB -52.88 dB

Center 5.500 000 GHz Span 0 Hz

Res BW 3 MHz VBW 3 MHz Sweep 15 s (8001 pts)

Marker	Trace	Type	X Axis	Amplitude
1R	(1)	Time	778.1 ms	-19.06 dBm
1Δ	(1)	Time	10 s	-57.80 dB
2R	(1)	Time	778.1 ms	-19.06 dBm
2Δ	(1)	Time	1.526 s	-52.88 dB





### Type 5 Channel Move Time Results


No non-compliance noted.

Channel Move Time (s)	Limit (s)
0.5381	10

Agilent 10:07:02 Aug 18, 2012

R T

Δ Mkr2 538.1 ms  
-21.69 dB

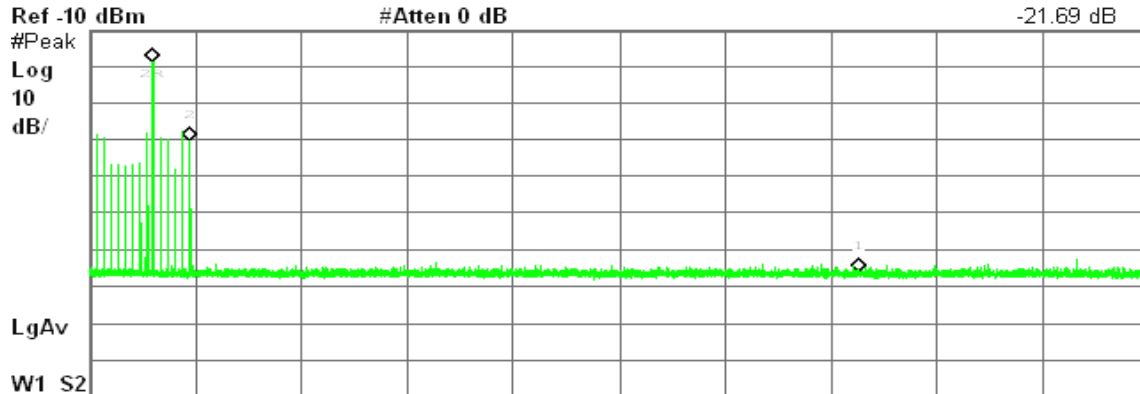

Ref -10 dBm #Atten 0 dB  
Center 5.500 000 GHz Res BW 3 MHz VBW 3 MHz Span 0 Hz Sweep 15 s (8001 pts)

Maker	Trace	Type	X Axis	Amplitude
1R	(1)	Time	885 ms	-18.57 dBm
1Δ	(1)	Time	10 s	-57.59 dB
2R	(1)	Time	885 ms	-18.57 dBm
2Δ	(1)	Time	538.1 ms	-21.69 dB




### Bandwidth 20 MHz Mode



#### Type 1 Channel Closing Transmission Time Results

No non-compliance noted.

For R1

Aggregate Transmission Time (ms)	Limit (ms)	Margin (ms)
9.37	60	-50.63

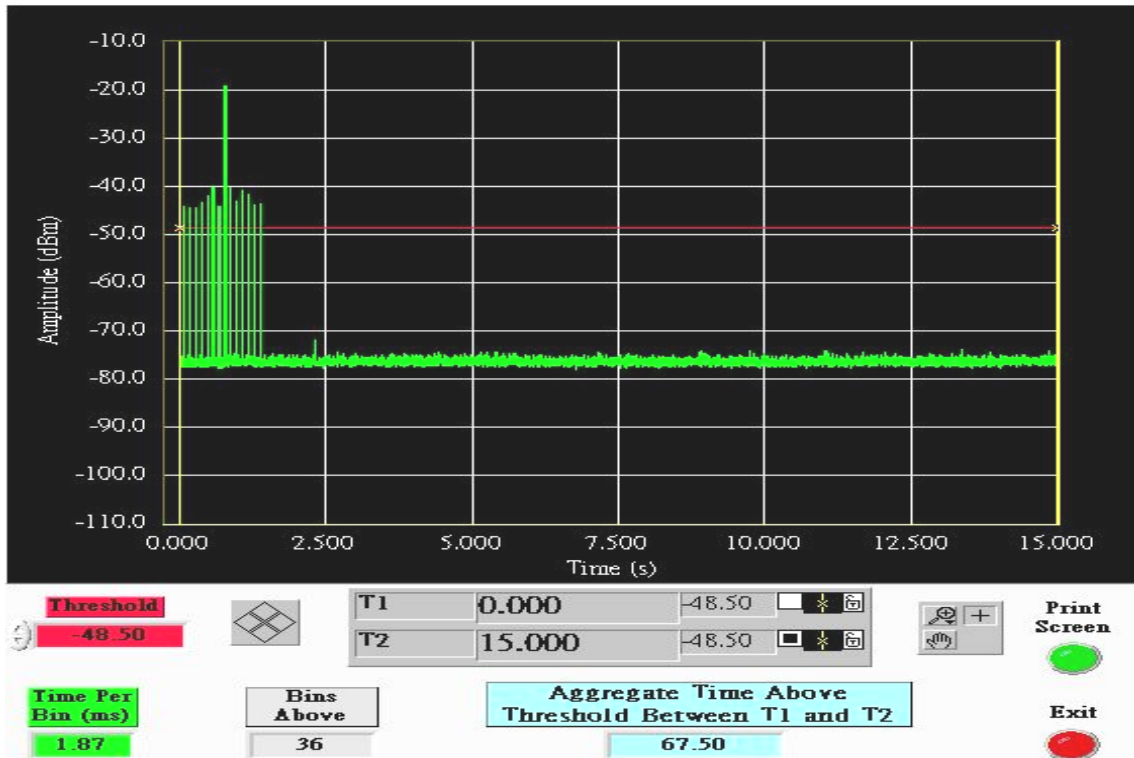


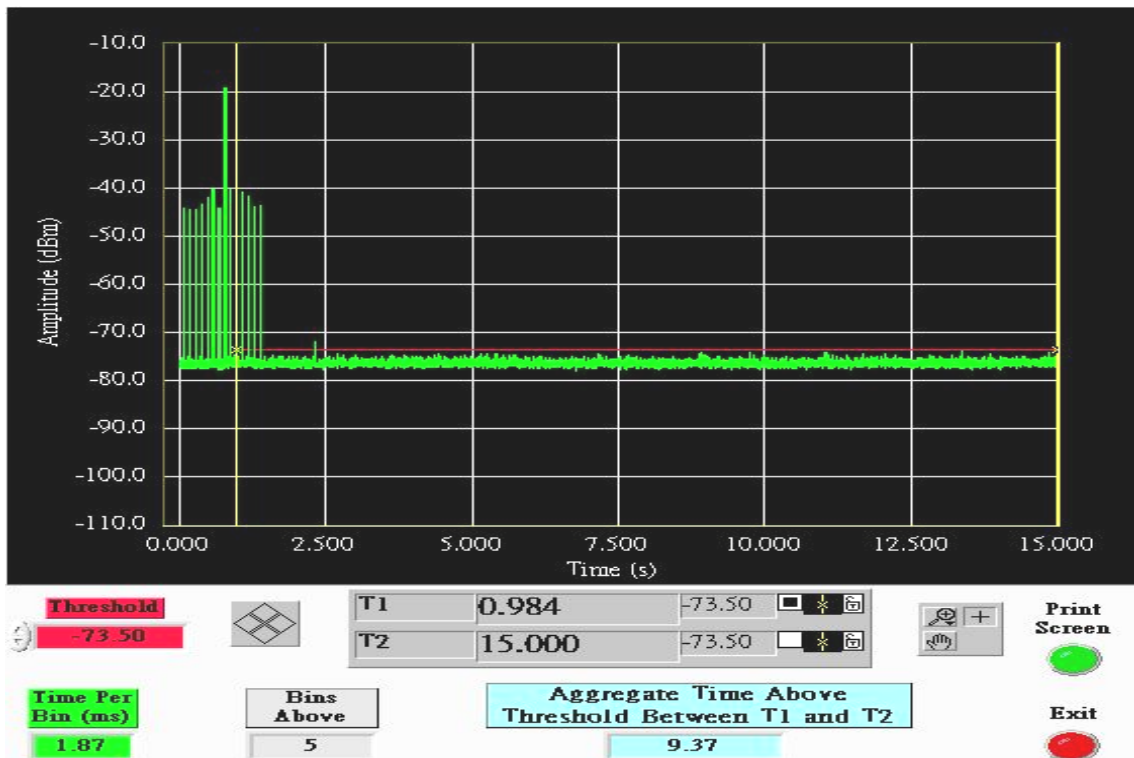
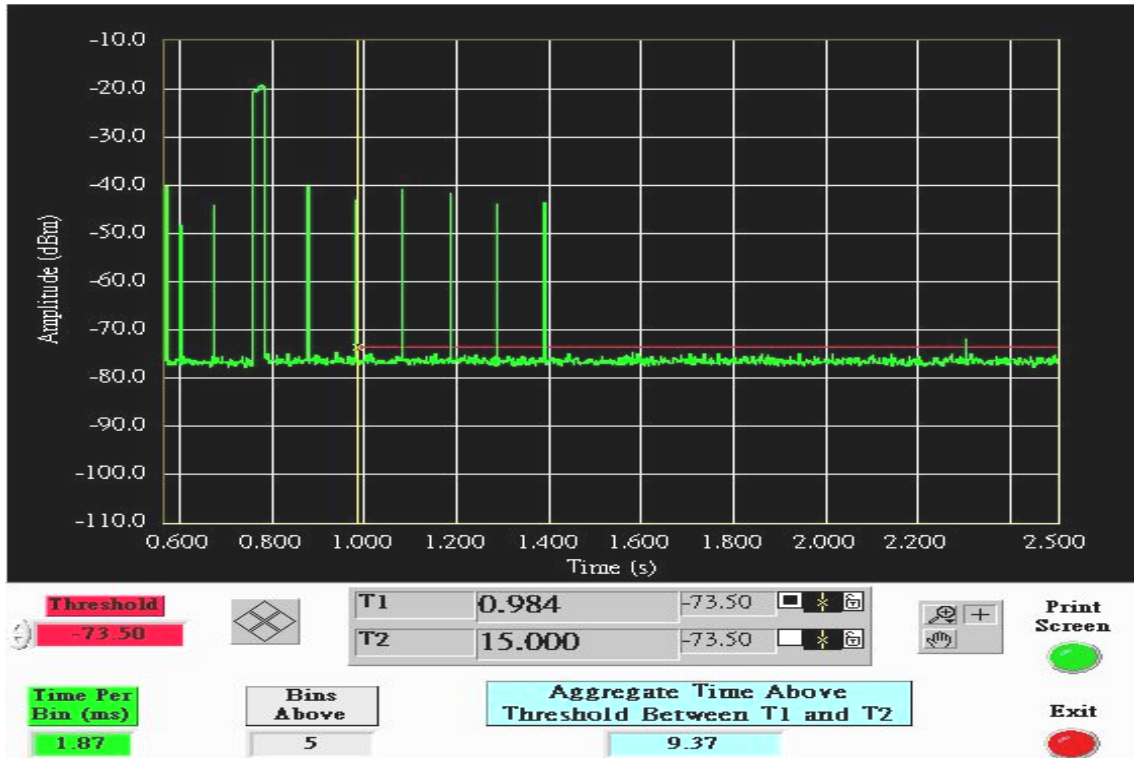




For R5

Aggregate Transmission Time (ms)	Limit (ms)	Margin (ms)
7.50	60	-52.5

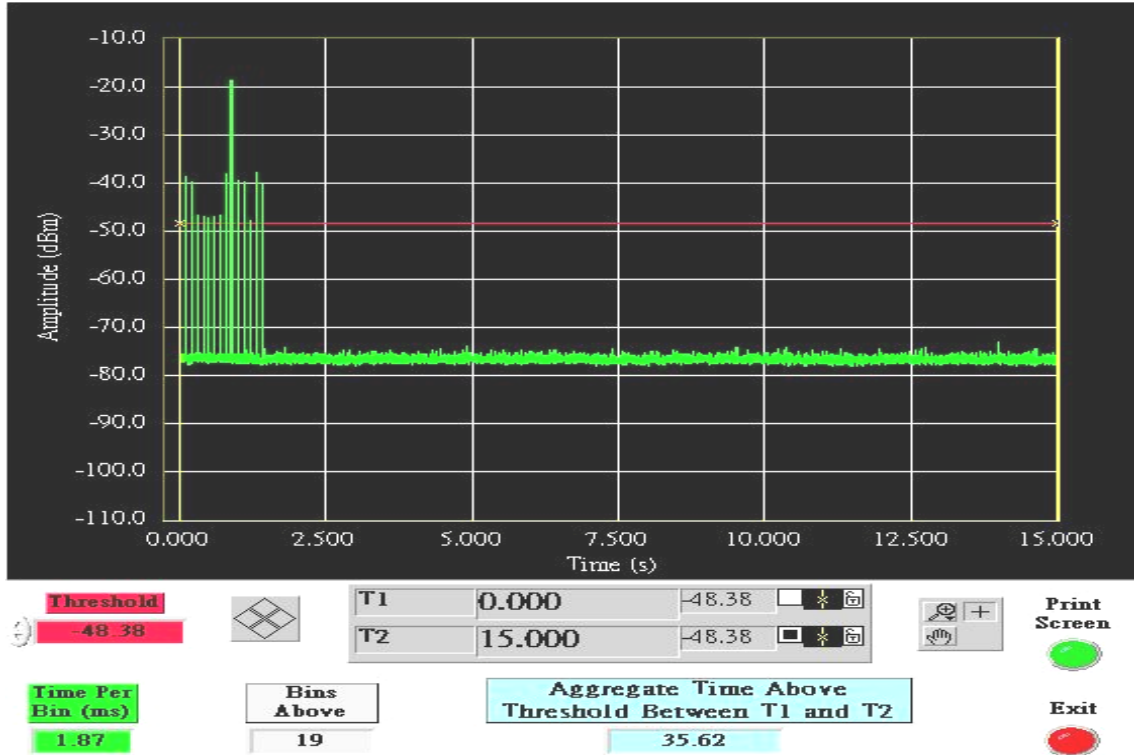

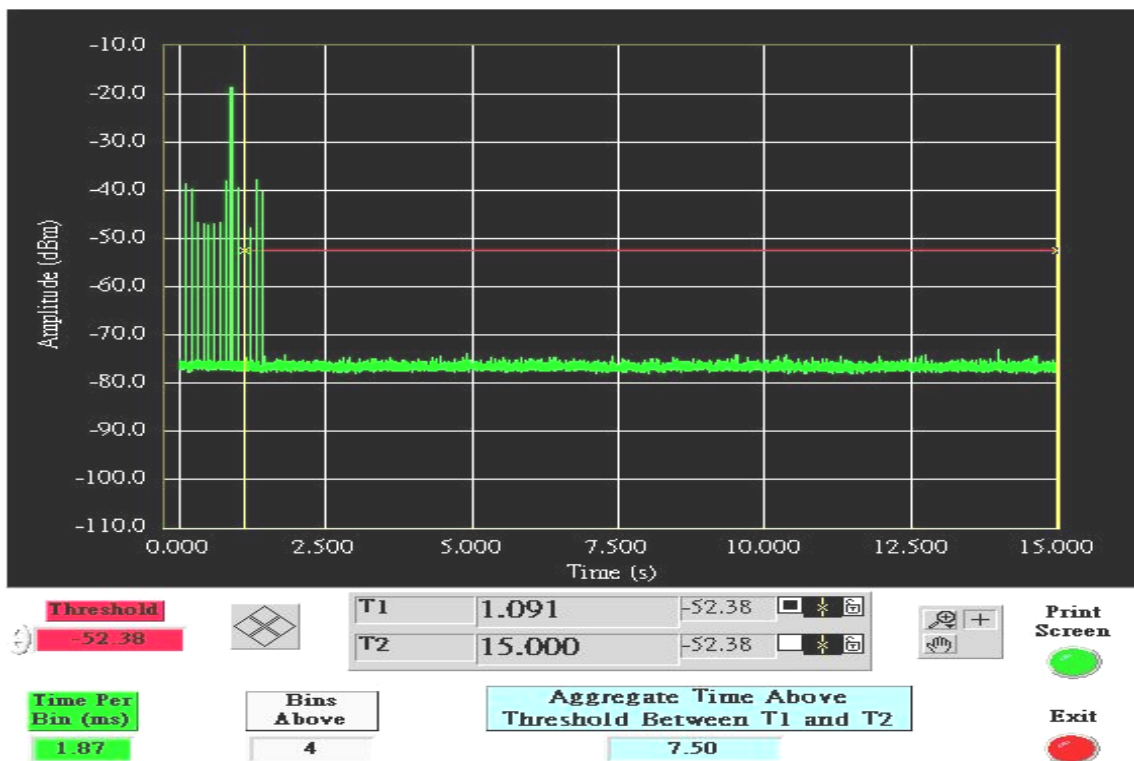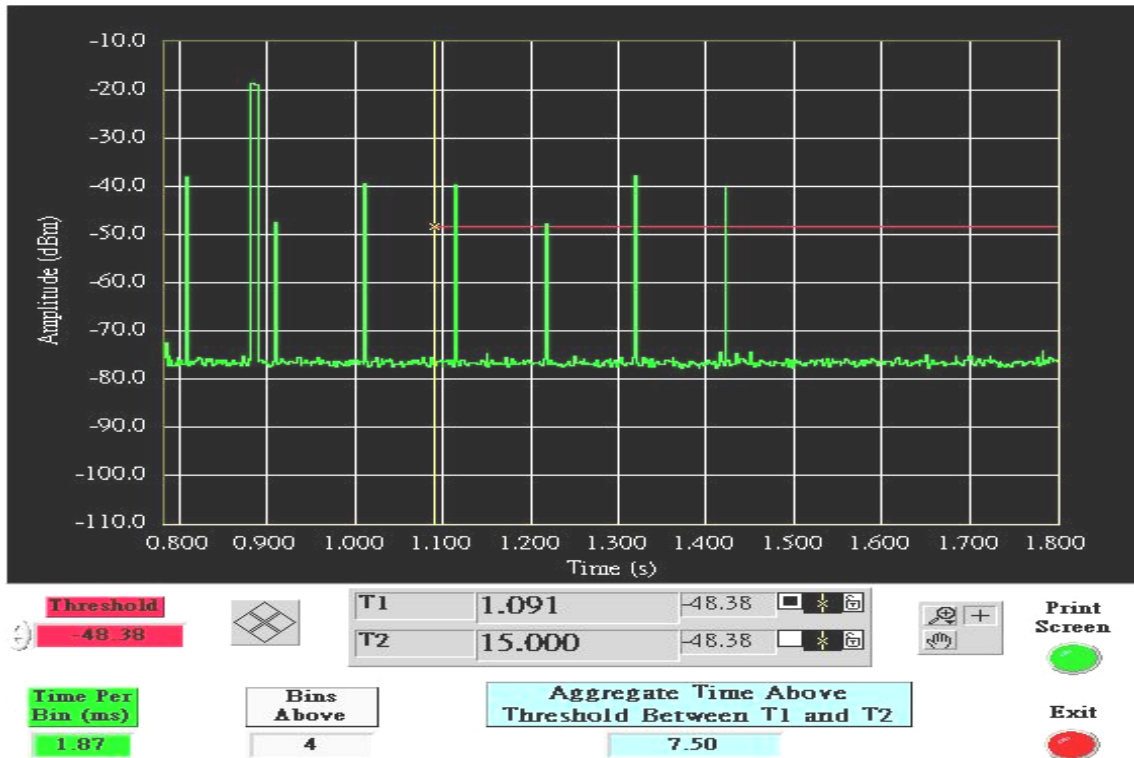



### NON-OCCUPANCY PERIOD

### LOW BAND RESULTS / Bandwidth mode


#### Type 1 Non-Occupancy Period Test Results

No non-compliance noted.

No EUT transmissions were observed on the test channel during the 30 minute observation time.

Agilent 16:28:45 Aug 17, 2012


T

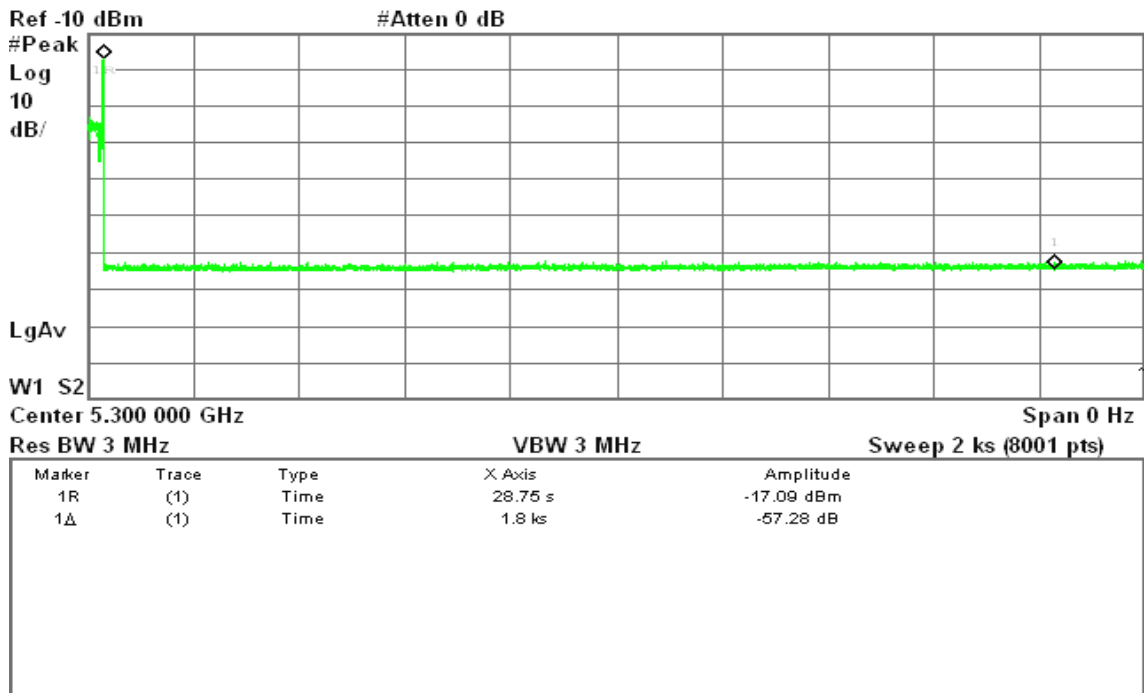

#### Type 5 Non-Occupancy Period Test Results

Agilent 10:56:13 Aug 18, 2012

R T

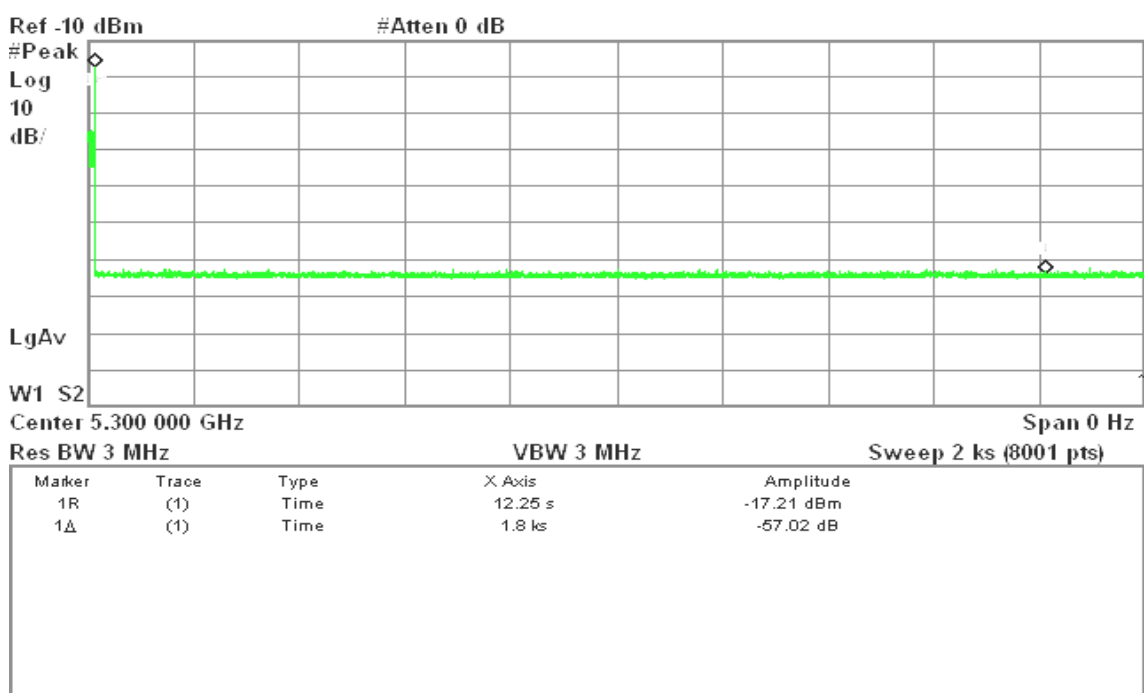



### HIGH BAND RESULTS / Bandwidth 20 MHz Mode

#### Type 1 Non-Occupancy Period Test Results


No non-compliance noted.

No EUT transmissions were observed on the test channel during the 30 minute observation time.

Agilent 13:38:24 Aug 18, 2012

R T

Δ Mkr1 1.8 ks

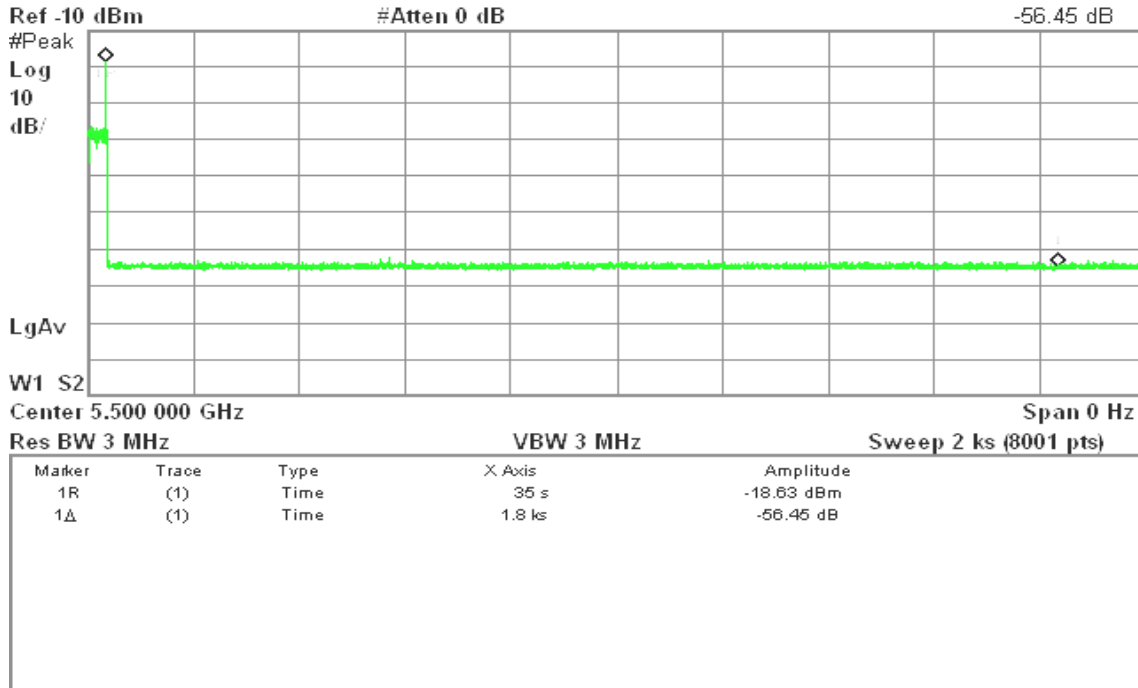

#### Type 5 Non-Occupancy Period Test Results

Agilent 12:47:15 Aug 18, 2012

R T

Δ Mkr1 1.8 ks

