

UNII-3 ANT0 A Mode Power Spectral Density (5745 MHz; 22.0896 MHz)


Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v01r02 and ANSI C63.10

Result

DUT Frequency (MHz)	Frequency (MHz)	PSD (dBm)	Limit Max (dBm)	Result
5745.000000	5751.172094	4.900	30.0	PASS

Ports

Port	Duty Cycle (%)
1	96.466

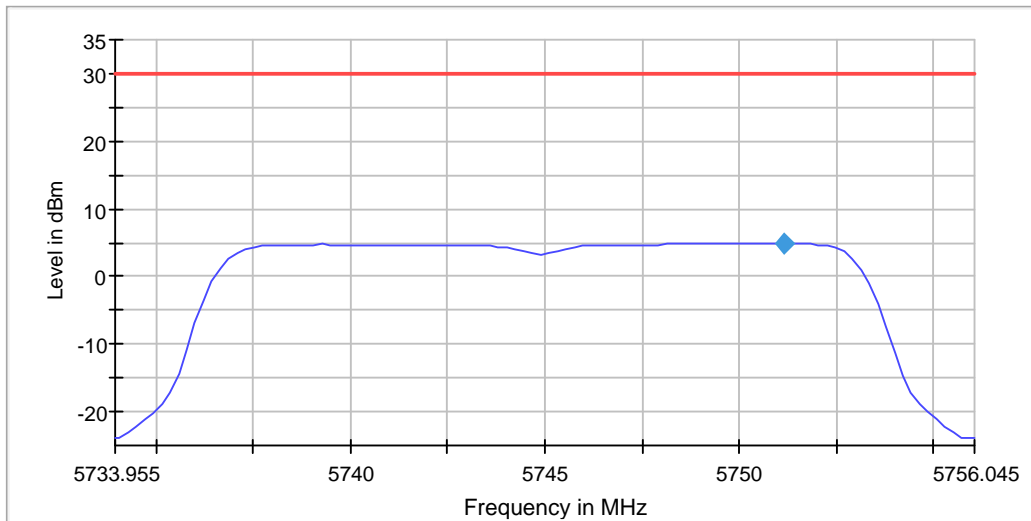

Measurement


Setting	Instrument Value	Target Value
Start Frequency	5.73396 GHz	5.73396 GHz
Stop Frequency	5.75604 GHz	5.75604 GHz
Span	22.090 MHz	22.090 MHz
RBW	1.000 MHz	<= 1.000 MHz
VBW	3.000 MHz	>= 3.000 MHz
SweepPoints	101	~ 44
SweepTime	2.020 s	2.020 s
Reference Level	-20.000 dBm	-20.000 dBm
Attenuation	0.000 dB	AUTO
Detector	RMS	RMS
SweepCount	3	3
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.30	0.30
Run	3 / max. 15	max. 15
Stable	3 / 3	3

Minimum Emission Bandwidth 6 dB (5745 MHz; 20 MHz)

Test according to FCC title 47 part 15 §15.407(a),(e), KDB 789033 D02 General U-NII Test Procedures New Rules v01r02 and ANSI C63.10

6 dB Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)	Max Level (dBm)	Result
5745.000000	16.458853	0.500000	---	5736.720698	5753.179551	4.9	PASS

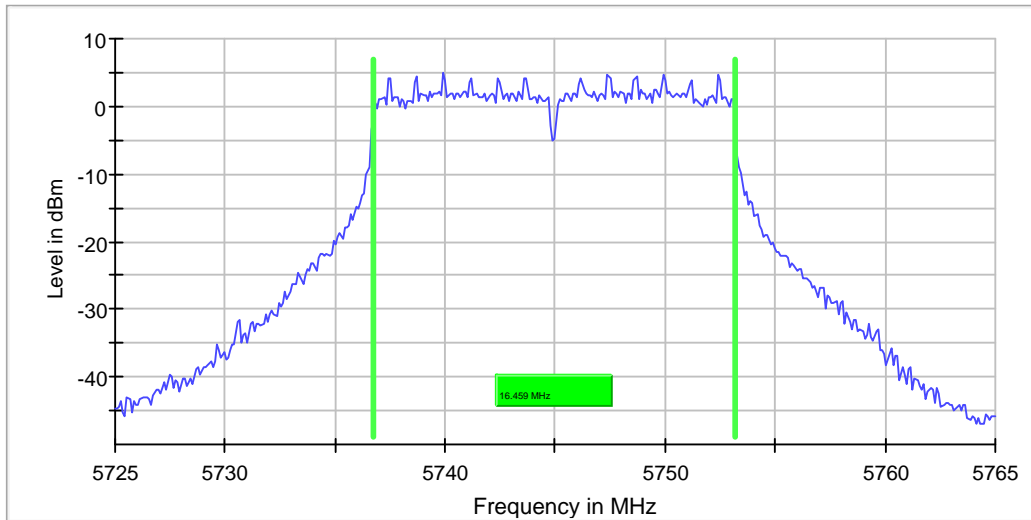

Measurement


Setting	Instrument Value	Target Value
Start Frequency	5.72500 GHz	5.72500 GHz
Stop Frequency	5.76500 GHz	5.76500 GHz
Span	40.000 MHz	40.000 MHz
RBW	100.000 kHz	~ 100.000 kHz
VBW	300.000 kHz	~ 300.000 kHz
SweepPoints	400	~ 400
Sweeptime	56.886 µs	AUTO
Reference Level	-1	-1
Attenuation	10.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	200	200
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
Sweeptype	FFT	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.30	0.30
Run	42 / max. 150	max. 150
Stable	5 / 5	5

Emission Bandwidth 26 dB (5745 MHz; 20 MHz)

Test according to FCC title 47 part 15 §15.407(a),(e), KDB 789033 D02 General U-NII Test Procedures New Rules v01r02 and ANSI C63.10

26 dB Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)	Max Level (dBm)	Result
5745.000000	22.089553	---	---	5734.054726	5756.144279	5.9	PASS

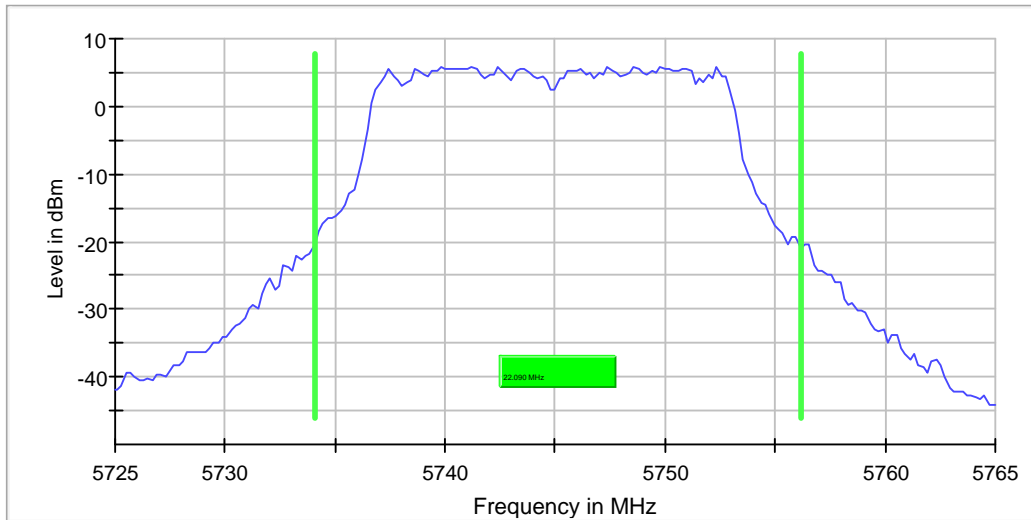

Measurement


Setting	Instrument Value	Target Value
Start Frequency	5.72500 GHz	5.72500 GHz
Stop Frequency	5.76500 GHz	5.76500 GHz
Span	40.000 MHz	40.000 MHz
RBW	200.000 kHz	~ 200.000 kHz
VBW	1.000 MHz	>= 600.000 kHz
SweepPoints	200	~ 200
Sweeptime	28.443 μs	AUTO
Reference Level	-1	-1
Attenuation	10.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	200	200
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
Sweeptype	FFT	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.30	0.30
Run	35 / max. 150	max. 150
Stable	5 / 5	5

Occupied Channel Bandwidth 99% (5745 MHz; 20 MHz)

Test according to FCC title 47 part 15 §15.407(a),(e), KDB 789033 D02 General U-NII Test Procedures New Rules v01r02 and ANSI C63.10

99 % Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)	Result
5745.000000	16.517413	---	---	5736.641791	5753.159204	PASS

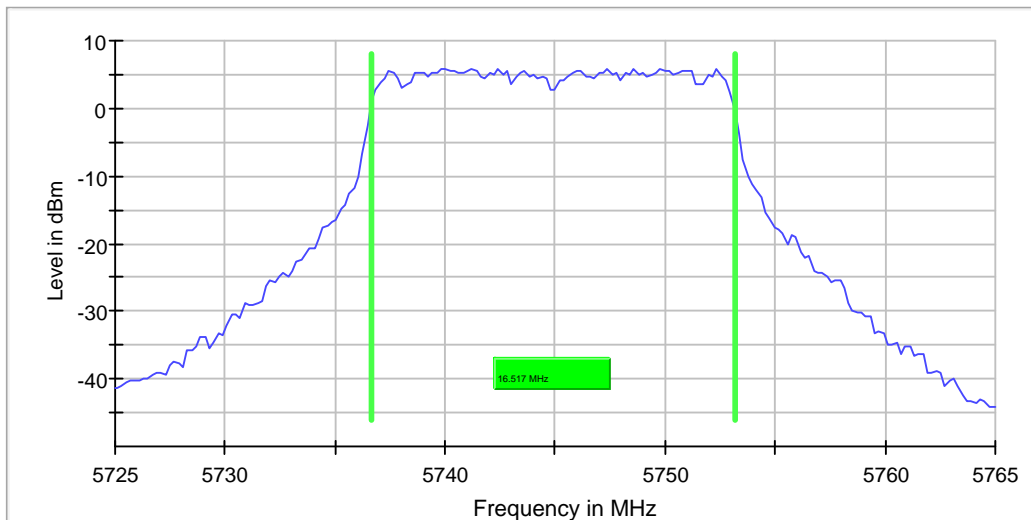

Measurement

Setting	Instrument Value	Target Value
Start Frequency	5.72500 GHz	5.72500 GHz
Stop Frequency	5.76500 GHz	5.76500 GHz
Span	40.000 MHz	40.000 MHz
RBW	200.000 kHz	<= 200.000 kHz
VBW	1.000 MHz	>= 600.000 kHz
SweepPoints	200	~ 200
Sweeptime	28.443 μs	AUTO
Reference Level	-1	-1
Attenuation	10.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	200	200
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
Sweeptype	FFT	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.30	0.30
Run	41 / max. 150	max. 150
Stable	5 / 5	5

Band Edge low (5745 MHz; 20 MHz)

Test according to FCC title 47 part 15 §15.407(b), KDB 789033 D02 General U-NII Test Procedures New Rules v01r02 and ANSI C63.10

Result


DUT Frequency (MHz)	Result
5745.000000	PASS

Inband Peak

Frequency (MHz)	Level (dBm)
5750.149402	4.9

Measurements

Frequency (MHz)	Level (dBm)	Margin (dB)	Limit (dBm)	Result
5393.691744	-51.9	10.7	-41.2	PASS
5376.215047	-51.9	10.7	-41.2	PASS
5381.707723	-52.0	10.7	-41.2	PASS
5392.193742	-52.0	10.7	-41.2	PASS
5389.697071	-52.0	10.7	-41.2	PASS
5385.203063	-52.0	10.7	-41.2	PASS
5375.715712	-52.0	10.7	-41.2	PASS
5373.718375	-52.0	10.7	-41.2	PASS
5390.196405	-52.0	10.7	-41.2	PASS
5394.690413	-52.0	10.7	-41.2	PASS
5372.220373	-52.0	10.8	-41.2	PASS
5393.192410	-52.0	10.8	-41.2	PASS
5378.212383	-52.0	10.8	-41.2	PASS
5389.197736	-52.0	10.8	-41.2	PASS
5383.205726	-52.0	10.8	-41.2	PASS

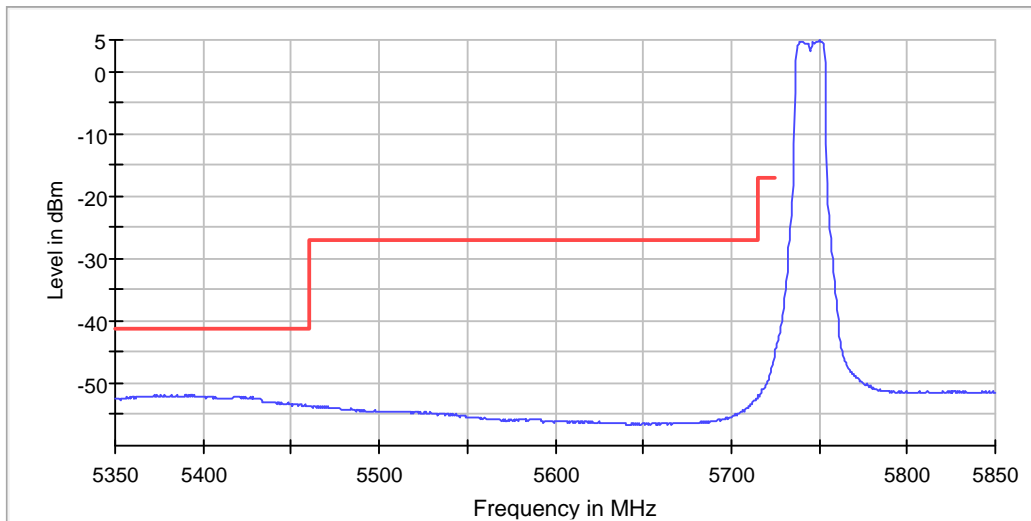

Measurement 1

Setting	Instrument Value	Target Value
RBW	1.000 MHz	<= 1.000 MHz
VBW	3.000 MHz	>= 3.000 MHz
SweepPoints	250	~ 250
SweepTime	250.000 ms	250.000 ms
Reference Level	-1	-1
Attenuation	10.000 dB	AUTO
Detector	RMS	RMS
SweepCount	5	5
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.30	0.30
Run	3 / max. 15	max. 15
Stable	3 / 3	3

Measurement 2

Setting	Instrument Value	Target Value
RBW	1.000 MHz	<= 1.000 MHz
VBW	3.000 MHz	>= 3.000 MHz
SweepPoints	750	~ 750
SweepTime	750.000 ms	750.000 ms
Reference Level	-2	-2
Attenuation	0.000 dB	AUTO
Detector	RMS	RMS
SweepCount	5	5
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.30	0.30
Run	3 / max. 15	max. 15
Stable	3 / 3	3

Tx Spurious Emission (5745 MHz; 20 MHz)

Test according to FCC title 47 part 15 §15.407(b), KDB 789033 D02 General U-NII Test Procedures New Rules v01r02 and ANSI C63.10

Result

DUT Frequency (MHz)	Result
5745.000000	PASS

Final measurements


Frequency (MHz)	Level Pre Measurement (dBm)	level (dBm)	Limit (dBm)	Margin (dB)	Result
1536.370754	-43.0	-55.7	-41.2	14.5	PASS
5412.975207	-43.1	-53.2	-41.2	11.9	PASS

Pre Measurements

Frequency (MHz)	Level (dBm)	Margin (dB)	Limit (dBm)
1536.370754	-43.0	1.7	-41.2
5412.975207	-43.1	1.9	-41.2
5368.347107	-43.3	2.1	-41.2
5395.123967	-43.4	2.2	-41.2
5404.049587	-43.8	2.5	-41.2
5454.628099	-43.8	2.6	-41.2
5396.115702	-43.9	2.7	-41.2
5391.157025	-43.9	2.7	-41.2
5413.966942	-43.9	2.7	-41.2
5378.264463	-43.9	2.7	-41.2
5424.876033	-44.0	2.8	-41.2
5406.033058	-44.0	2.8	-41.2
5402.066116	-44.0	2.8	-41.2
5388.181818	-44.1	2.9	-41.2
5353.471074	-44.1	2.9	-41.2

Measurement Settings

Start Frequency (MHz)	Stop Frequency (MHz)	Pre Measurement	Final Measurement
30.000000	1000.000000	1	1
1000.000000	5150.000000	2	2
5150.000000	5250.000000	2	2
5250.000000	5350.000000	2	2
5350.000000	5470.000000	2	2
5470.000000	5725.000000	2	2
5725.000000	5850.000000	2	2
5850.000000	7000.000000	2	2
7000.000000	26000.000000	2	2
26000.000000	40000.000000	2	2

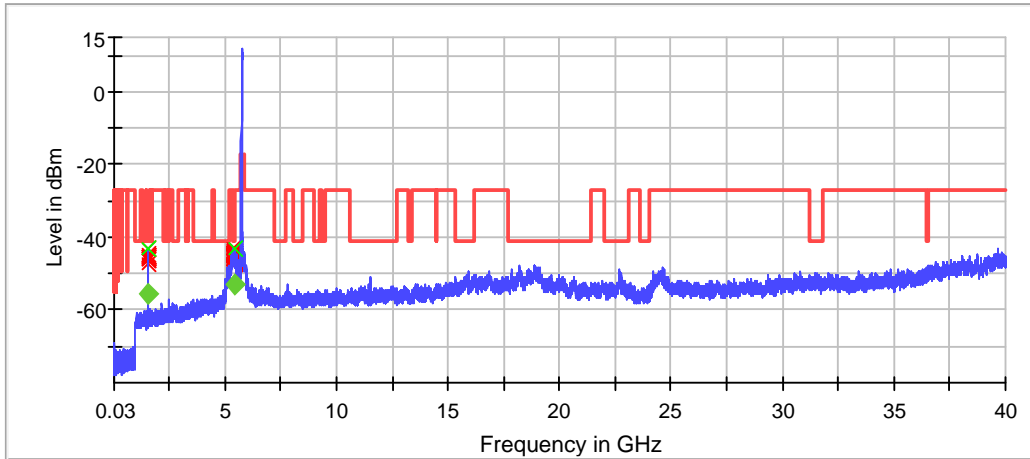

— Limit [limit.Result:1] × Threshold [limit.2.Result:1]
◆ Critical [Over Limit.Result:1] ◆ Sum Level [trace.Result:1]

Final Measurement

Setting	Instrument Value	Target Value
Span	ZeroSpan	ZeroSpan
RBW	1.000 MHz	~ 1.000 MHz
VBW	3.000 MHz	~ 3.000 MHz
SweepPoints	10001	~ 10001
Sweeptime	50.000 ms	50.000 ms
Reference Level	-1	-1
Attenuation	0.000 dB	0.000 dB
Detector	RMS	RMS
SweepCount	1	1
Filter	3 dB	3 dB
Trace Mode	Clear Write	Clear Write
Sweeptype	Sweep	AUTO
Preamp	off	off

Power Spectral Density (5785 MHz; 22.2886 MHz)


Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v01r02 and ANSI C63.10

Result

DUT Frequency (MHz)	Frequency (MHz)	PSD (dBm)	Limit Max (dBm)	Result
5785.000000	5790.790666	4.827	30.0	PASS

Ports

Port	Duty Cycle (%)
1	96.449

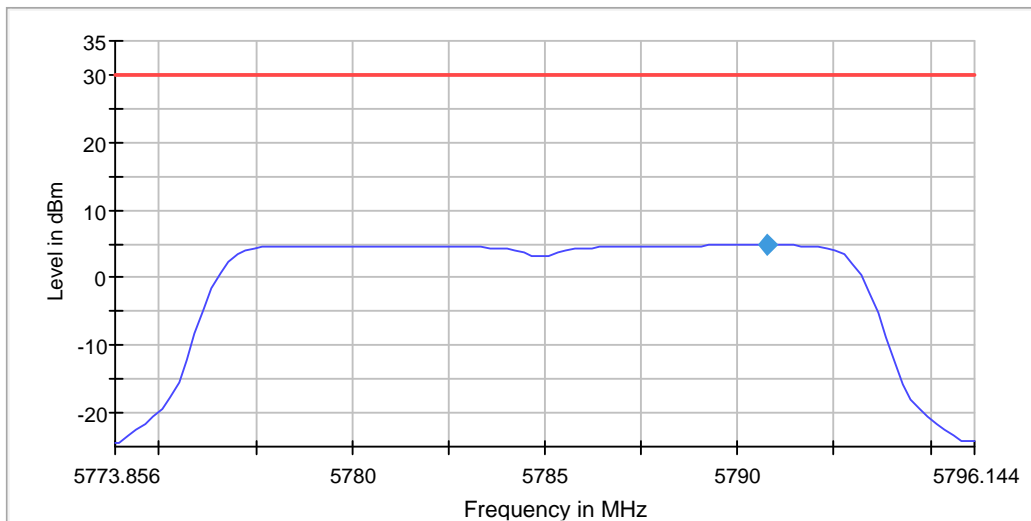

Measurement


Setting	Instrument Value	Target Value
Start Frequency	5.77386 GHz	5.77386 GHz
Stop Frequency	5.79614 GHz	5.79614 GHz
Span	22.289 MHz	22.289 MHz
RBW	1.000 MHz	<= 1.000 MHz
VBW	3.000 MHz	>= 3.000 MHz
SweepPoints	101	~ 45
SweepTime	2.020 s	2.020 s
Reference Level	-20.000 dBm	-20.000 dBm
Attenuation	0.000 dB	AUTO
Detector	RMS	RMS
SweepCount	3	3
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.30	0.30
Run	3 / max. 15	max. 15
Stable	3 / 3	3

Minimum Emission Bandwidth 6 dB (5785 MHz; 20 MHz)

Test according to FCC title 47 part 15 §15.407(a),(e), KDB 789033 D02 General U-NII Test Procedures New Rules v01r02 and ANSI C63.10

6 dB Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)	Max Level (dBm)	Result
5785.000000	16.458853	0.500000	---	5776.720698	5793.179551	4.3	PASS

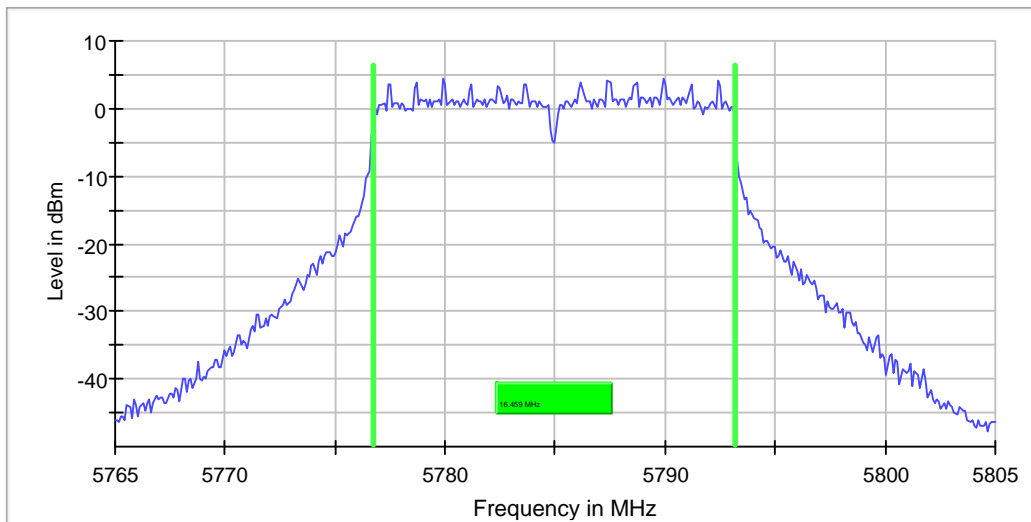

Measurement


Setting	Instrument Value	Target Value
Start Frequency	5.76500 GHz	5.76500 GHz
Stop Frequency	5.80500 GHz	5.80500 GHz
Span	40.000 MHz	40.000 MHz
RBW	100.000 kHz	~ 100.000 kHz
VBW	300.000 kHz	~ 300.000 kHz
SweepPoints	400	~ 400
SweepTime	56.886 µs	AUTO
Reference Level	-1	-1
Attenuation	10.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	200	200
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	FFT	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.30	0.30
Run	36 / max. 150	max. 150
Stable	5 / 5	5

Emission Bandwidth 26 dB (5785 MHz; 20 MHz)

Test according to FCC title 47 part 15 §15.407(a),(e), KDB 789033 D02 General U-NII Test Procedures New Rules v01r02 and ANSI C63.10

26 dB Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)	Max Level (dBm)	Result
5785.000000	22.288558	---	---	5773.656716	5795.945274	5.2	PASS

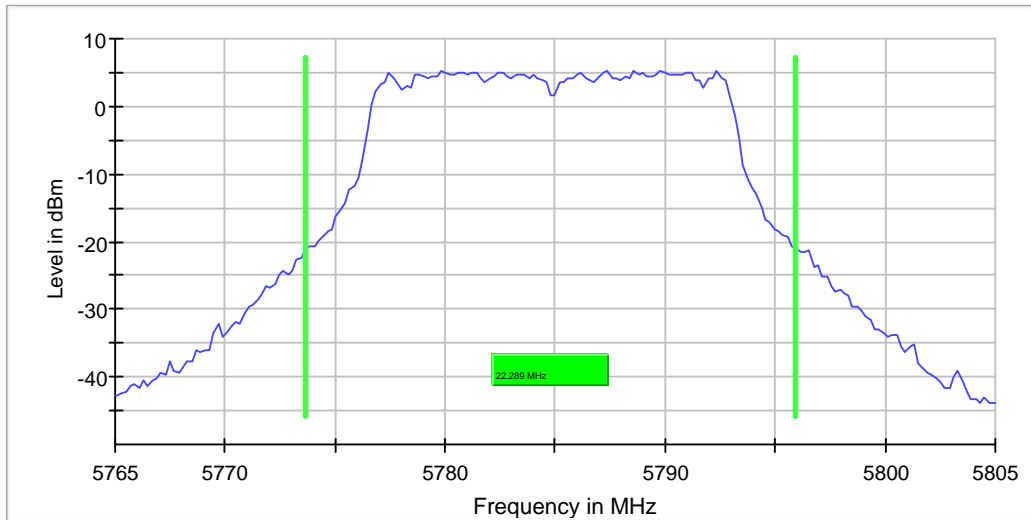

Measurement


Setting	Instrument Value	Target Value
Start Frequency	5.76500 GHz	5.76500 GHz
Stop Frequency	5.80500 GHz	5.80500 GHz
Span	40.000 MHz	40.000 MHz
RBW	200.000 kHz	~ 200.000 kHz
VBW	1.000 MHz	>= 600.000 kHz
SweepPoints	200	~ 200
Sweeptime	28.443 μs	AUTO
Reference Level	-1	-1
Attenuation	10.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	200	200
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
Sweeptype	FFT	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.30	0.30
Run	34 / max. 150	max. 150
Stable	5 / 5	5

Occupied Channel Bandwidth 99% (5785 MHz; 20 MHz)

Test according to FCC title 47 part 15 §15.407(a),(e), KDB 789033 D02 General U-NII Test Procedures New Rules v01r02 and ANSI C63.10

99 % Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)	Result
5785.000000	16.517413	---	---	5776.641791	5793.159204	PASS

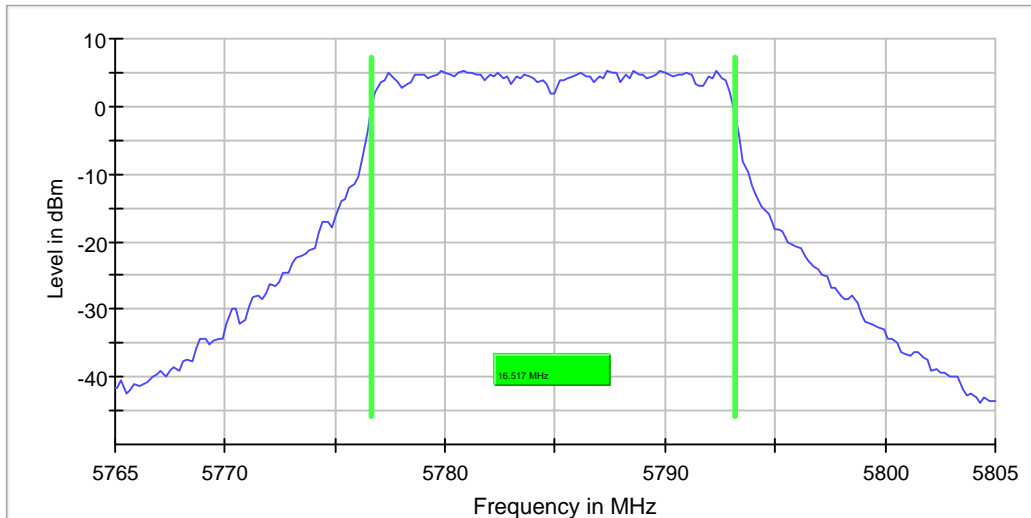

Measurement

Setting	Instrument Value	Target Value
Start Frequency	5.76500 GHz	5.76500 GHz
Stop Frequency	5.80500 GHz	5.80500 GHz
Span	40.000 MHz	40.000 MHz
RBW	200.000 kHz	<= 200.000 kHz
VBW	1.000 MHz	>= 600.000 kHz
SweepPoints	200	~ 200
Sweeptime	28.443 μs	AUTO
Reference Level	-1	-1
Attenuation	10.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	200	200
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
Sweeptype	FFT	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.30	0.30
Run	45 / max. 150	max. 150
Stable	5 / 5	5

Tx Spurious Emission (5785 MHz; 20 MHz)

Test according to FCC title 47 part 15 §15.407(b), KDB 789033 D02 General U-NII Test Procedures New Rules v01r02 and ANSI C63.10

Result

DUT Frequency (MHz)	Result
5785.000000	PASS

Final measurements


Frequency (MHz)	Level Pre Measurement (dBm)	level (dBm)	Limit (dBm)	Margin (dB)	Result
1582.359672	-43.9	-54.8	-41.2	13.6	PASS
5140.502289	-46.6	-56.1	-41.2	14.9	PASS
5391.157025	-40.3	-51.3	-41.2	10.1	PASS

Pre Measurements

Frequency (MHz)	Level (dBm)	Margin (dB)	Limit (dBm)
5391.157025	-40.3	-0.9	-41.2
5390.165289	-40.7	-0.5	-41.2
5436.776860	-40.7	-0.5	-41.2
5437.768595	-40.8	-0.4	-41.2
5459.586777	-42.4	1.1	-41.2
5373.305785	-42.6	1.4	-41.2
5383.223140	-42.7	1.4	-41.2
5380.247934	-42.7	1.4	-41.2
5386.198347	-42.7	1.5	-41.2
5395.123967	-42.8	1.5	-41.2
5379.256198	-42.9	1.6	-41.2
5354.462810	-42.9	1.7	-41.2
5426.859504	-42.9	1.7	-41.2
5425.867769	-42.9	1.7	-41.2
5435.785124	-43.0	1.7	-41.2

Measurement Settings

Start Frequency (MHz)	Stop Frequency (MHz)	Pre Measurement	Final Measurement
30.000000	1000.000000	1	1
1000.000000	5150.000000	2	2
5150.000000	5250.000000	2	2
5250.000000	5350.000000	2	2
5350.000000	5470.000000	2	2
5470.000000	5725.000000	2	2
5725.000000	5850.000000	2	2
5850.000000	7000.000000	2	2
7000.000000	26000.000000	2	2
26000.000000	40000.000000	2	2

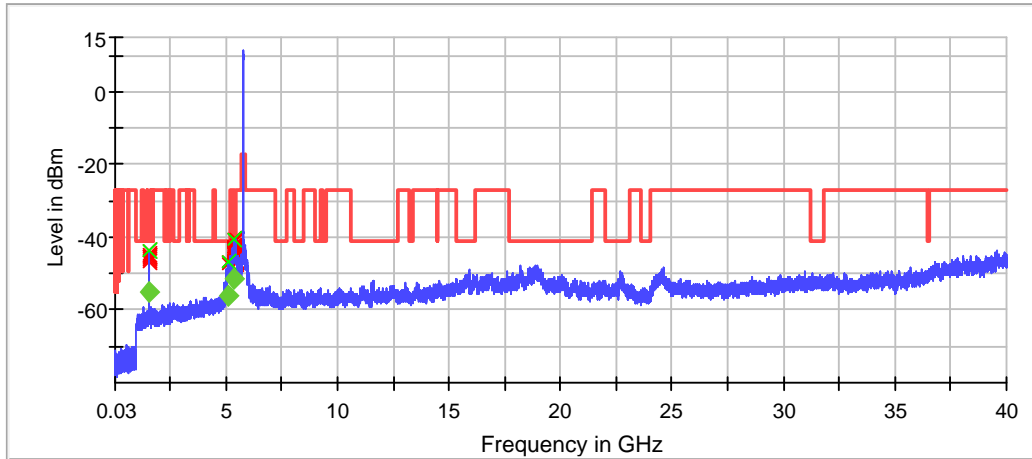

— Limit [limit.Result:1] × Threshold [limit.2.Result:1]
◆ Critical [Over Limit.Result:1] ◆ Sum Level [trace.Result:1]

Final Measurement

Setting	Instrument Value	Target Value
Span	ZeroSpan	ZeroSpan
RBW	1.000 MHz	~ 1.000 MHz
VBW	3.000 MHz	~ 3.000 MHz
SweepPoints	10001	~ 10001
Sweeptime	50.000 ms	50.000 ms
Reference Level	-1	-1
Attenuation	0.000 dB	0.000 dB
Detector	RMS	RMS
SweepCount	1	1
Filter	3 dB	3 dB
Trace Mode	Clear Write	Clear Write
Sweeptype	Sweep	AUTO
Preamp	off	off

Power Spectral Density (5825 MHz; 22.2886 MHz)


Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v01r02 and ANSI C63.10

Result

DUT Frequency (MHz)	Frequency (MHz)	PSD (dBm)	Limit Max (dBm)	Result
5825.000000	5830.790666	4.987	30.0	PASS

Ports

Port	Duty Cycle (%)
1	96.475

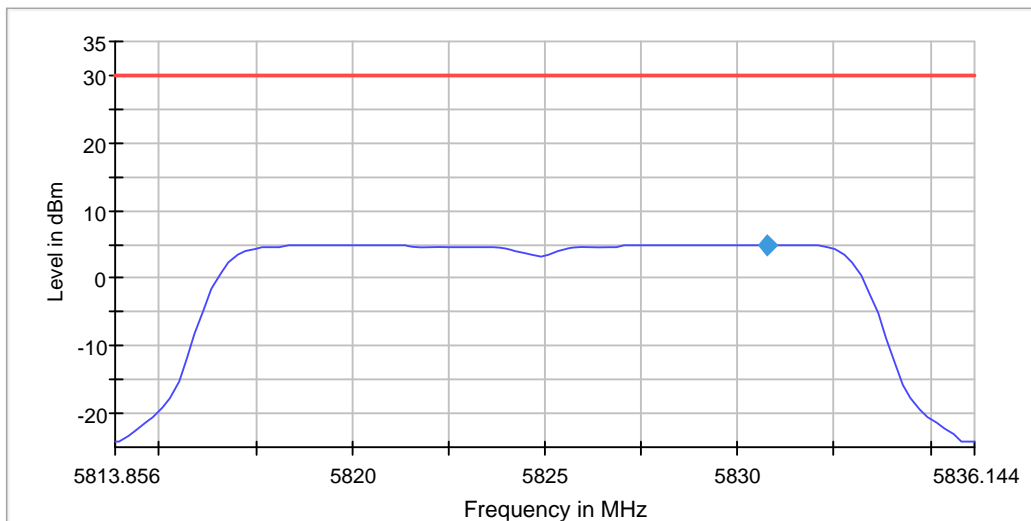

Measurement


Setting	Instrument Value	Target Value
Start Frequency	5.81386 GHz	5.81386 GHz
Stop Frequency	5.83614 GHz	5.83614 GHz
Span	22.289 MHz	22.289 MHz
RBW	1.000 MHz	<= 1.000 MHz
VBW	3.000 MHz	>= 3.000 MHz
SweepPoints	101	~ 45
SweepTime	2.020 s	2.020 s
Reference Level	-20.000 dBm	-20.000 dBm
Attenuation	0.000 dB	AUTO
Detector	RMS	RMS
SweepCount	3	3
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.30	0.30
Run	3 / max. 15	max. 15
Stable	3 / 3	3

Minimum Emission Bandwidth 6 dB (5825 MHz; 20 MHz)

Test according to FCC title 47 part 15 §15.407(a),(e), KDB 789033 D02 General U-NII Test Procedures New Rules v01r02 and ANSI C63.10

6 dB Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)	Max Level (dBm)	Result
5825.000000	16.458853	0.500000	---	5816.720698	5833.179551	4.3	PASS

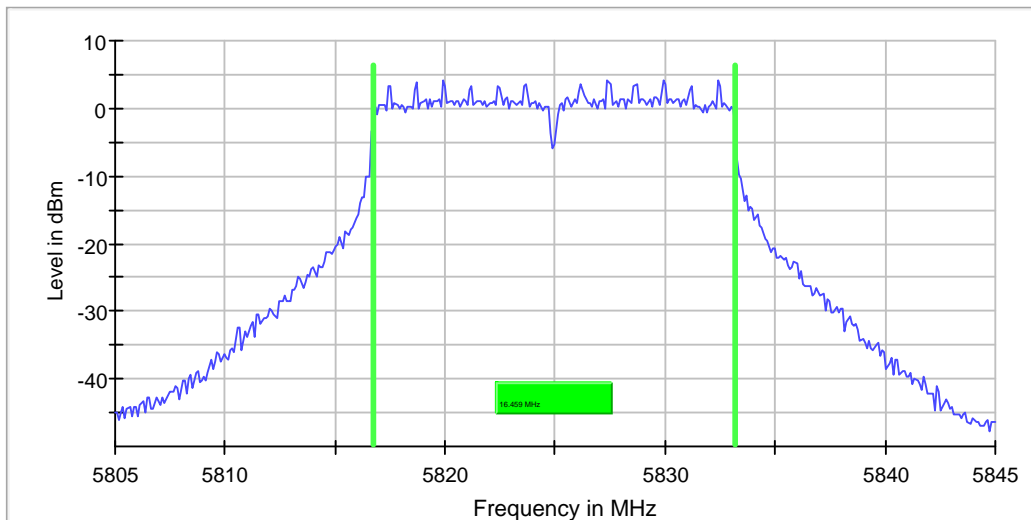

Measurement


Setting	Instrument Value	Target Value
Start Frequency	5.80500 GHz	5.80500 GHz
Stop Frequency	5.84500 GHz	5.84500 GHz
Span	40.000 MHz	40.000 MHz
RBW	100.000 kHz	~ 100.000 kHz
VBW	300.000 kHz	~ 300.000 kHz
SweepPoints	400	~ 400
Sweeptime	56.886 µs	AUTO
Reference Level	-1	-1
Attenuation	10.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	200	200
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
Sweeptype	FFT	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.30	0.30
Run	52 / max. 150	max. 150
Stable	5 / 5	5

Emission Bandwidth 26 dB (5825 MHz; 20 MHz)

Test according to FCC title 47 part 15 §15.407(a),(e), KDB 789033 D02 General U-NII Test Procedures New Rules v01r02 and ANSI C63.10

26 dB Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)	Max Level (dBm)	Result
5825.000000	22.288558	---	---	5814.054726	5836.343284	5.1	PASS

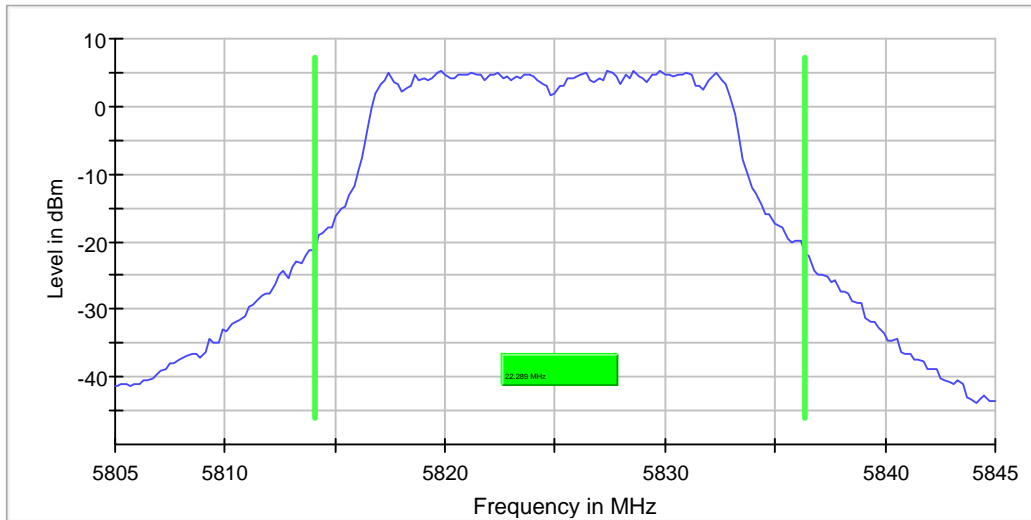

Measurement


Setting	Instrument Value	Target Value
Start Frequency	5.80500 GHz	5.80500 GHz
Stop Frequency	5.84500 GHz	5.84500 GHz
Span	40.000 MHz	40.000 MHz
RBW	200.000 kHz	~ 200.000 kHz
VBW	1.000 MHz	>= 600.000 kHz
SweepPoints	200	~ 200
Sweeptime	28.443 μs	AUTO
Reference Level	-1	-1
Attenuation	10.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	200	200
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
Sweeptype	FFT	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.30	0.30
Run	63 / max. 150	max. 150
Stable	5 / 5	5

Occupied Channel Bandwidth 99% (5825 MHz; 20 MHz)

Test according to FCC title 47 part 15 §15.407(a),(e), KDB 789033 D02 General U-NII Test Procedures New Rules v01r02 and ANSI C63.10

99 % Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)	Result
5825.000000	16.517413	---	---	5816.641791	5833.159204	PASS

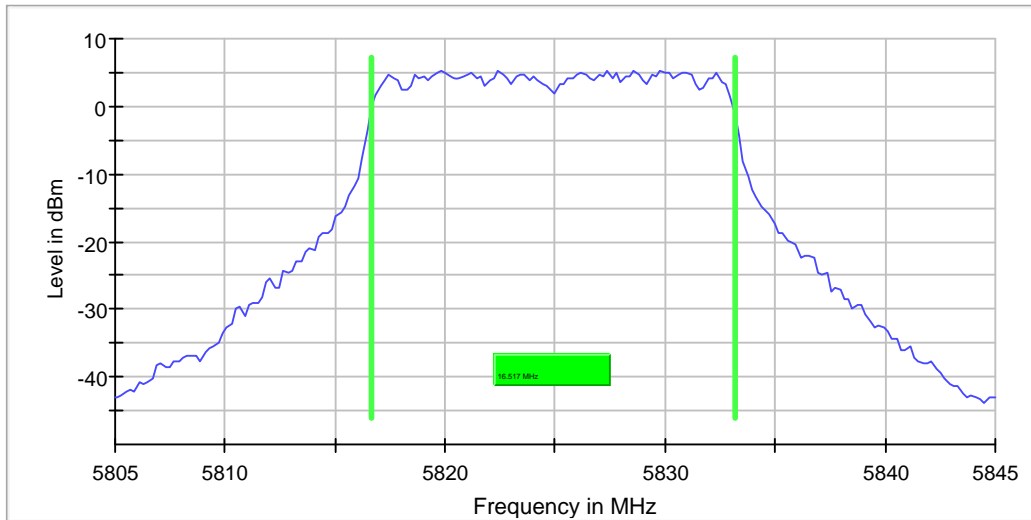

Measurement

Setting	Instrument Value	Target Value
Start Frequency	5.80500 GHz	5.80500 GHz
Stop Frequency	5.84500 GHz	5.84500 GHz
Span	40.000 MHz	40.000 MHz
RBW	200.000 kHz	<= 200.000 kHz
VBW	1.000 MHz	>= 600.000 kHz
SweepPoints	200	~ 200
Sweeptime	28.443 μs	AUTO
Reference Level	-1	-1
Attenuation	10.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	200	200
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
Sweeptype	FFT	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.30	0.30
Run	43 / max. 150	max. 150
Stable	5 / 5	5

Band Edge high (5825 MHz; 20 MHz)

Test according to FCC title 47 part 15 §15.407(b), KDB 789033 D02 General U-NII Test Procedures New Rules v01r02 and ANSI C63.10

Result


DUT Frequency (MHz)	Result
5825.000000	PASS

Inband Peak

Frequency (MHz)	Level (dBm)
5829.830677	4.0

Measurements

Frequency (MHz)	Level (dBm)	Margin (dB)	Limit (dBm)	Result
7295.418364	-64.1	22.8	-41.2	PASS
7294.418734	-64.1	22.9	-41.2	PASS
7298.917068	-64.1	22.9	-41.2	PASS
7301.915957	-64.1	22.9	-41.2	PASS
7313.411699	-64.1	22.9	-41.2	PASS
7305.414661	-64.1	22.9	-41.2	PASS
7302.415772	-64.1	22.9	-41.2	PASS
7296.917808	-64.1	22.9	-41.2	PASS
7302.915587	-64.1	22.9	-41.2	PASS
7306.914106	-64.1	22.9	-41.2	PASS
7299.916698	-64.1	22.9	-41.2	PASS
7298.417253	-64.1	22.9	-41.2	PASS
7291.419845	-64.1	22.9	-41.2	PASS
7299.416883	-64.1	22.9	-41.2	PASS
7285.921881	-64.2	22.9	-41.2	PASS

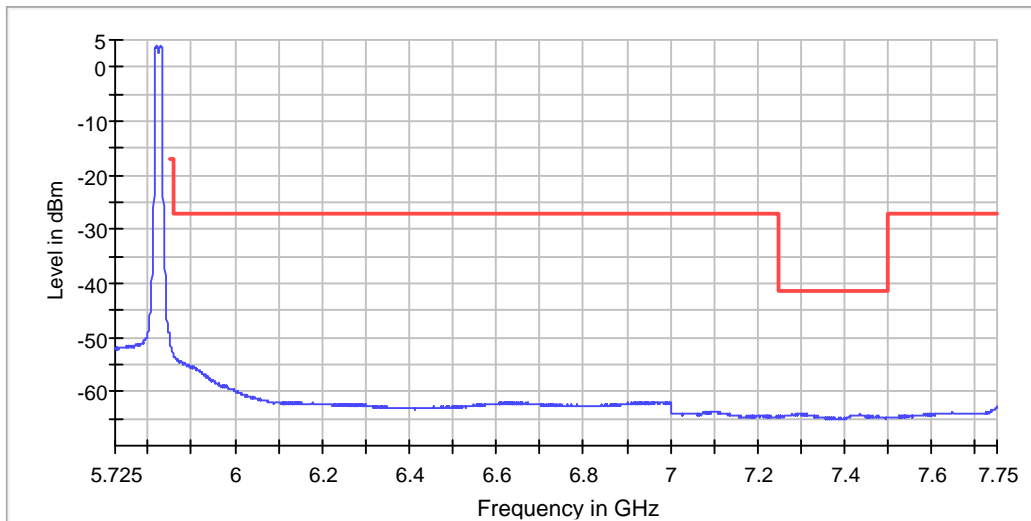

Measurement 1

Setting	Instrument Value	Target Value
RBW	1.000 MHz	<= 1.000 MHz
VBW	3.000 MHz	>= 3.000 MHz
SweepPoints	250	~ 250
SweepTime	250.000 ms	250.000 ms
Reference Level	-1	-1
Attenuation	10.000 dB	AUTO
Detector	RMS	RMS
SweepCount	5	5
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.30	0.30
Run	3 / max. 15	max. 15
Stable	3 / 3	3

Measurement 2

Setting	Instrument Value	Target Value
RBW	1.000 MHz	<= 1.000 MHz
VBW	3.000 MHz	>= 3.000 MHz
SweepPoints	1100	~ 1100
SweepTime	1.100 s	1.100 s
Reference Level	-2	-2
Attenuation	0.000 dB	AUTO
Detector	RMS	RMS
SweepCount	5	5
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.30	0.30
Run	3 / max. 15	max. 15
Stable	3 / 3	3

Tx Spurious Emission (5825 MHz; 20 MHz)

Test according to FCC title 47 part 15 §15.407(b), KDB 789033 D02 General U-NII Test Procedures New Rules v01r02 and ANSI C63.10

Result

DUT Frequency (MHz)	Result
5825.000000	PASS

Final measurements


Frequency (MHz)	Level Pre Measurement (dBm)	level (dBm)	Limit (dBm)	Margin (dB)	Result
1623.349795	-43.4	-54.1	-41.2	12.9	PASS
5122.506625	-46.4	-57.0	-41.2	15.8	PASS
5379.256198	-40.7	-51.1	-41.2	9.9	PASS

Pre Measurements

Frequency (MHz)	Level (dBm)	Margin (dB)	Limit (dBm)
5379.256198	-40.7	-0.5	-41.2
5390.165289	-40.8	-0.4	-41.2
5380.247934	-40.9	-0.3	-41.2
5391.157025	-41.4	0.2	-41.2
5357.438017	-41.7	0.5	-41.2
5378.264463	-41.7	0.5	-41.2
5366.363636	-41.9	0.6	-41.2
5375.289256	-41.9	0.7	-41.2
5356.446281	-41.9	0.7	-41.2
5435.785124	-42.0	0.8	-41.2
5374.297521	-42.1	0.8	-41.2
5350.495868	-42.1	0.9	-41.2
5350.000000	-42.1	0.9	-41.2
5367.355372	-42.3	1.1	-41.2
5352.479339	-42.4	1.1	-41.2

Measurement Settings

Start Frequency (MHz)	Stop Frequency (MHz)	Pre Measurement	Final Measurement
30.000000	1000.000000	1	1
1000.000000	5150.000000	2	2
5150.000000	5250.000000	2	2
5250.000000	5350.000000	2	2
5350.000000	5470.000000	2	2
5470.000000	5725.000000	2	2
5725.000000	5850.000000	2	2
5850.000000	7000.000000	2	2
7000.000000	26000.000000	2	2
26000.000000	40000.000000	2	2

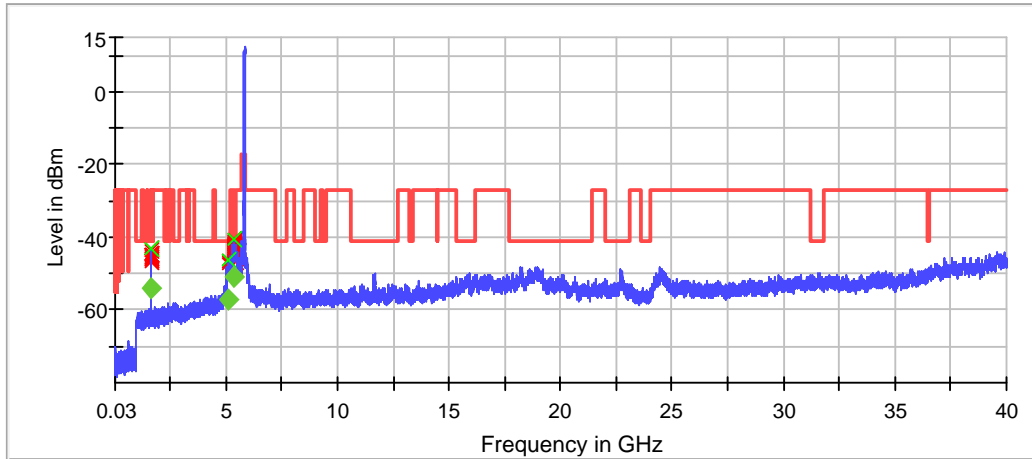

— Limit [limit.Result:1] X Threshold [limit.2.Result:1]
◆ Critical [Over Limit.Result:1] ◆ Sum Level [trace.Result:1]

Final Measurement

Setting	Instrument Value	Target Value
Span	ZeroSpan	ZeroSpan
RBW	1.000 MHz	~ 1.000 MHz
VBW	3.000 MHz	~ 3.000 MHz
SweepPoints	10001	~ 10001
Sweeptime	50.000 ms	50.000 ms
Reference Level	-1	-1
Attenuation	0.000 dB	0.000 dB
Detector	RMS	RMS
SweepCount	1	1
Filter	3 dB	3 dB
Trace Mode	Clear Write	Clear Write
Sweeptype	Sweep	AUTO
Preamp	off	off

UNII-3 ANT0 AC Mode 20MHz Power Spectral Density (5745 MHz; 23.0846 MHz)


Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v01r02 and ANSI C63.10

Result

DUT Frequency (MHz)	Frequency (MHz)	PSD (dBm)	Limit Max (dBm)	Result
5745.000000	5750.997470	1.786	30.0	PASS

Ports

Port	Duty Cycle (%)
1	95.216

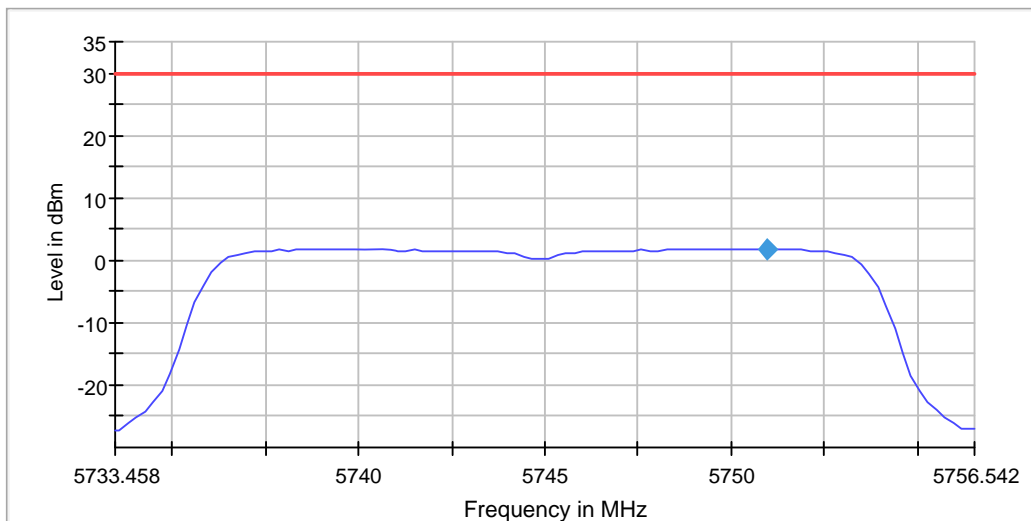

Measurement


Setting	Instrument Value	Target Value
Start Frequency	5.73346 GHz	5.73346 GHz
Stop Frequency	5.75654 GHz	5.75654 GHz
Span	23.085 MHz	23.085 MHz
RBW	1.000 MHz	<= 1.000 MHz
VBW	3.000 MHz	>= 3.000 MHz
SweepPoints	101	~ 46
SweepTime	2.020 s	2.020 s
Reference Level	-20.000 dBm	-20.000 dBm
Attenuation	0.000 dB	AUTO
Detector	RMS	RMS
SweepCount	3	3
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.30	0.30
Run	3 / max. 15	max. 15
Stable	3 / 3	3

Minimum Emission Bandwidth 6 dB (5745 MHz; 20 MHz)

Test according to FCC title 47 part 15 §15.407(a),(e), KDB 789033 D02 General U-NII Test Procedures New Rules v01r02 and ANSI C63.10

6 dB Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)	Max Level (dBm)	Result
5745.000000	17.755611	0.500000	---	5736.022444	5753.778055	1.5	PASS

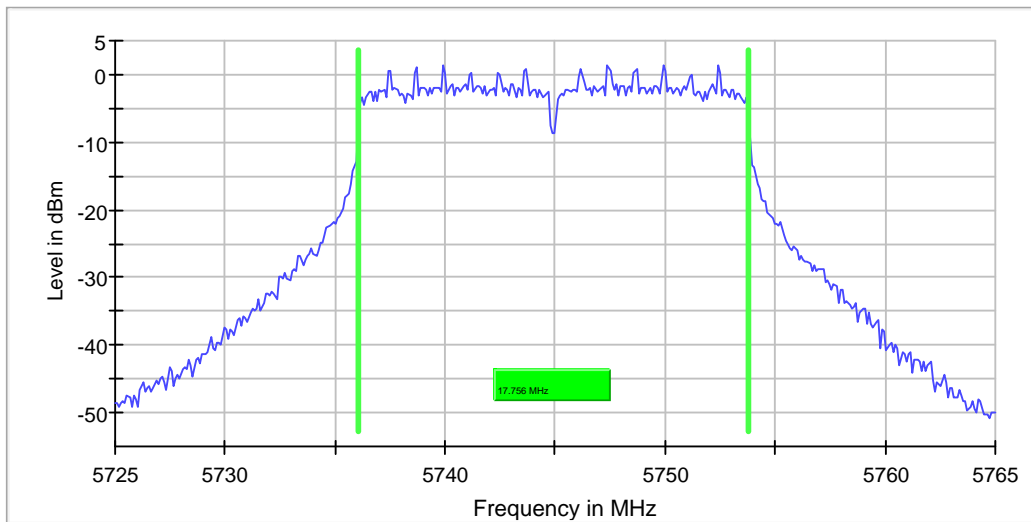

Measurement


Setting	Instrument Value	Target Value
Start Frequency	5.72500 GHz	5.72500 GHz
Stop Frequency	5.76500 GHz	5.76500 GHz
Span	40.000 MHz	40.000 MHz
RBW	100.000 kHz	~ 100.000 kHz
VBW	300.000 kHz	~ 300.000 kHz
SweepPoints	400	~ 400
Sweeptime	56.886 μs	AUTO
Reference Level	-20.000 dBm	-20.000 dBm
Attenuation	0.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	200	200
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
Sweeptype	FFT	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.30	0.30
Run	39 / max. 150	max. 150
Stable	5 / 5	5

Emission Bandwidth 26 dB (5745 MHz; 20 MHz)

Test according to FCC title 47 part 15 §15.407(a),(e), KDB 789033 D02 General U-NII Test Procedures New Rules v01r02 and ANSI C63.10

26 dB Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)	Max Level (dBm)	Result
5745.000000	23.084578	---	---	5733.457711	5756.542289	2.4	PASS

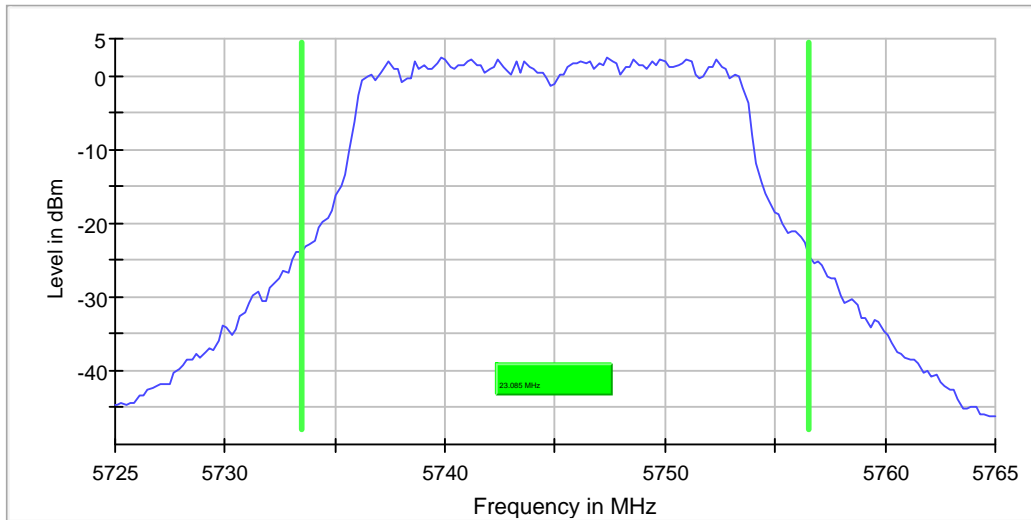

Measurement


Setting	Instrument Value	Target Value
Start Frequency	5.72500 GHz	5.72500 GHz
Stop Frequency	5.76500 GHz	5.76500 GHz
Span	40.000 MHz	40.000 MHz
RBW	200.000 kHz	~ 200.000 kHz
VBW	1.000 MHz	>= 600.000 kHz
SweepPoints	200	~ 200
Sweeptime	28.443 μs	AUTO
Reference Level	-10.000 dBm	-10.000 dBm
Attenuation	10.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	200	200
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
Sweeptype	FFT	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.30	0.30
Run	47 / max. 150	max. 150
Stable	5 / 5	5

Occupied Channel Bandwidth 99% (5745 MHz; 20 MHz)

Test according to FCC title 47 part 15 §15.407(a),(e), KDB 789033 D02 General U-NII Test Procedures New Rules v01r02 and ANSI C63.10

99 % Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)	Result
5745.000000	17.711443	---	---	5736.044776	5753.756219	PASS

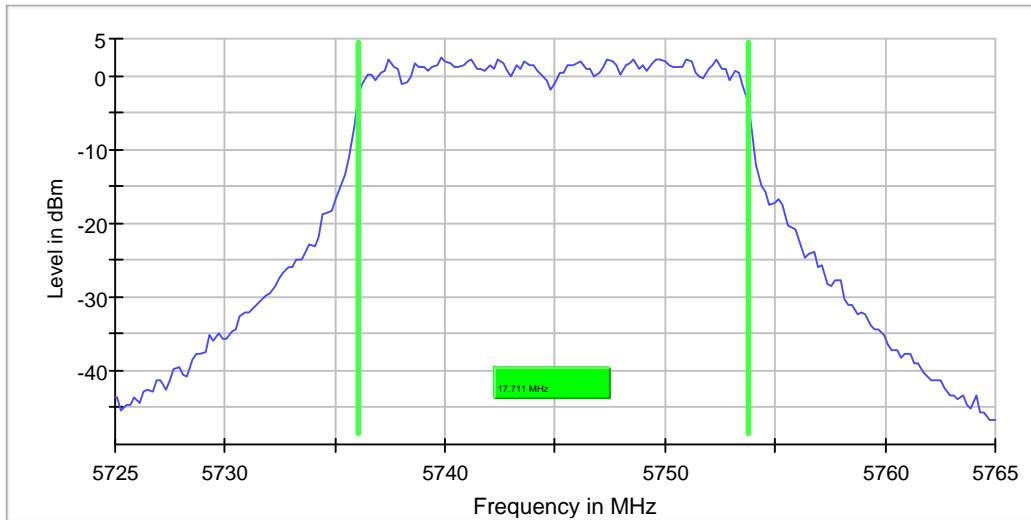

Measurement

Setting	Instrument Value	Target Value
Start Frequency	5.72500 GHz	5.72500 GHz
Stop Frequency	5.76500 GHz	5.76500 GHz
Span	40.000 MHz	40.000 MHz
RBW	200.000 kHz	<= 200.000 kHz
VBW	1.000 MHz	>= 600.000 kHz
SweepPoints	200	~ 200
SweepTime	28.443 μs	AUTO
Reference Level	-10.000 dBm	-10.000 dBm
Attenuation	10.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	200	200
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	FFT	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.30	0.30
Run	33 / max. 150	max. 150
Stable	5 / 5	5

Band Edge low (5745 MHz; 20 MHz)

Test according to FCC title 47 part 15 §15.407(b), KDB 789033 D02 General U-NII Test Procedures New Rules v01r02 and ANSI C63.10

Result


DUT Frequency (MHz)	Result
5745.000000	PASS

Inband Peak

Frequency (MHz)	Level (dBm)
5750.647410	0.9

Measurements

Frequency (MHz)	Level (dBm)	Margin (dB)	Limit (dBm)	Result
5380.209720	-53.3	12.1	-41.2	PASS
5396.687750	-53.4	12.2	-41.2	PASS
5386.701065	-53.4	12.2	-41.2	PASS
5390.695739	-53.4	12.2	-41.2	PASS
5382.207057	-53.5	12.2	-41.2	PASS
5388.199068	-53.5	12.3	-41.2	PASS
5389.197736	-53.5	12.3	-41.2	PASS
5389.697071	-53.5	12.3	-41.2	PASS
5371.721039	-53.5	12.3	-41.2	PASS
5379.211052	-53.5	12.3	-41.2	PASS
5375.216378	-53.5	12.3	-41.2	PASS
5377.213715	-53.5	12.3	-41.2	PASS
5383.705060	-53.5	12.3	-41.2	PASS
5376.714381	-53.5	12.3	-41.2	PASS
5388.698402	-53.5	12.3	-41.2	PASS

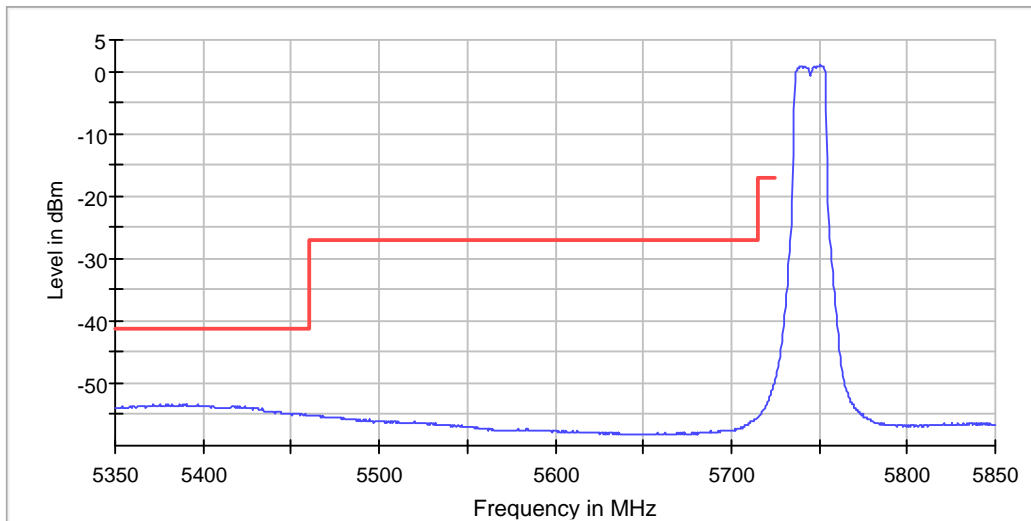

Measurement 1

Setting	Instrument Value	Target Value
RBW	1.000 MHz	<= 1.000 MHz
VBW	3.000 MHz	>= 3.000 MHz
SweepPoints	250	~ 250
SweepTime	250.000 ms	250.000 ms
Reference Level	-20.000 dBm	-20.000 dBm
Attenuation	0.000 dB	AUTO
Detector	RMS	RMS
SweepCount	5	5
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.30	0.30
Run	3 / max. 15	max. 15
Stable	3 / 3	3

Measurement 2

Setting	Instrument Value	Target Value
RBW	1.000 MHz	<= 1.000 MHz
VBW	3.000 MHz	>= 3.000 MHz
SweepPoints	750	~ 750
SweepTime	750.000 ms	750.000 ms
Reference Level	-20.000 dBm	-20.000 dBm
Attenuation	0.000 dB	AUTO
Detector	RMS	RMS
SweepCount	5	5
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.30	0.30
Run	3 / max. 15	max. 15
Stable	3 / 3	3

Tx Spurious Emission (5745 MHz; 20 MHz)

Test according to FCC title 47 part 15 §15.407(b), KDB 789033 D02 General U-NII Test Procedures New Rules v01r02 and ANSI C63.10

Result

DUT Frequency (MHz)	Result
5745.000000	PASS

Final measurements


Frequency (MHz)	Level Pre Measurement (dBm)	level (dBm)	Limit (dBm)	Margin (dB)	Result
5379.256198	-43.8	-54.1	-41.2	12.9	PASS

Pre Measurements

Frequency (MHz)	Level (dBm)	Margin (dB)	Limit (dBm)
5379.256198	-43.8	2.5	-41.2
5408.016529	-44.6	3.4	-41.2
5378.264463	-44.7	3.5	-41.2
5385.206612	-44.7	3.5	-41.2
5384.214876	-44.8	3.6	-41.2
5386.198347	-45.1	3.9	-41.2
5425.867769	-45.2	3.9	-41.2
5426.859504	-45.2	4.0	-41.2
5416.942149	-45.2	4.0	-41.2
5409.008264	-45.5	4.3	-41.2
5400.082645	-45.6	4.3	-41.2
5429.834711	-45.6	4.3	-41.2
5401.074380	-45.6	4.4	-41.2
5445.702479	-45.6	4.4	-41.2
5428.842975	-45.7	4.5	-41.2

Measurement Settings

Start Frequency (MHz)	Stop Frequency (MHz)	Pre Measurement	Final Measurement
30.000000	1000.000000	1	1
1000.000000	5150.000000	2	2
5150.000000	5250.000000	2	2
5250.000000	5350.000000	2	2
5350.000000	5470.000000	2	2
5470.000000	5725.000000	2	2
5725.000000	5850.000000	2	2
5850.000000	7000.000000	2	2
7000.000000	26000.000000	2	2
26000.000000	40000.000000	2	2

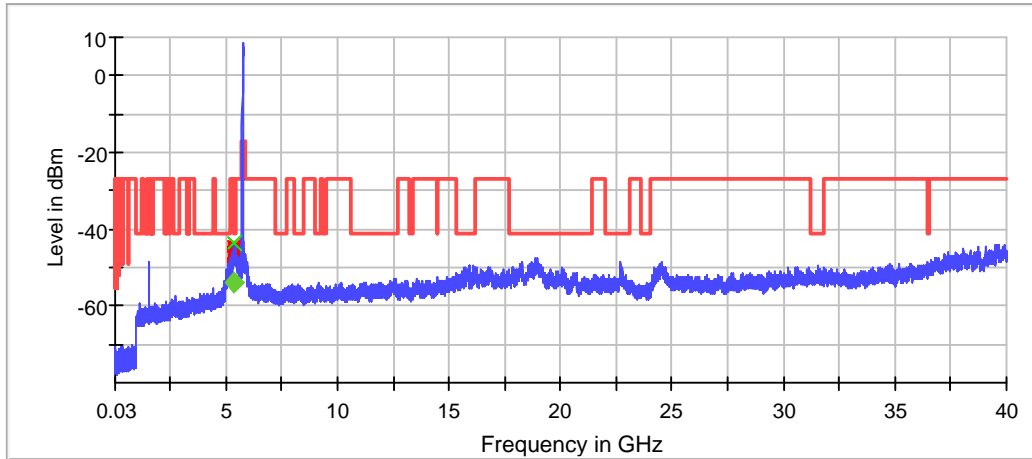

◆ Limit [limit.Result:1] × Threshold [limit.2.Result:1]
◆ Critical [Over Limit.Result:1] ◆ Sum Level [trace.Result:1]

Final Measurement

Setting	Instrument Value	Target Value
Span	ZeroSpan	ZeroSpan
RBW	1.000 MHz	~ 1.000 MHz
VBW	3.000 MHz	~ 3.000 MHz
SweepPoints	10001	~ 10001
Sweeptime	50.000 ms	50.000 ms
Reference Level	-20.000 dBm	-20.000 dBm
Attenuation	0.000 dB	0.000 dB
Detector	RMS	RMS
SweepCount	1	1
Filter	3 dB	3 dB
Trace Mode	Clear Write	Clear Write
Sweeptype	Sweep	AUTO
Preamp	off	off

Power Spectral Density (5785 MHz; 23.0846 MHz)


Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v01r02 and ANSI C63.10

Result

DUT Frequency (MHz)	Frequency (MHz)	PSD (dBm)	Limit Max (dBm)	Result
5785.000000	5790.544830	1.239	30.0	PASS

Ports

Port	Duty Cycle (%)
1	95.295

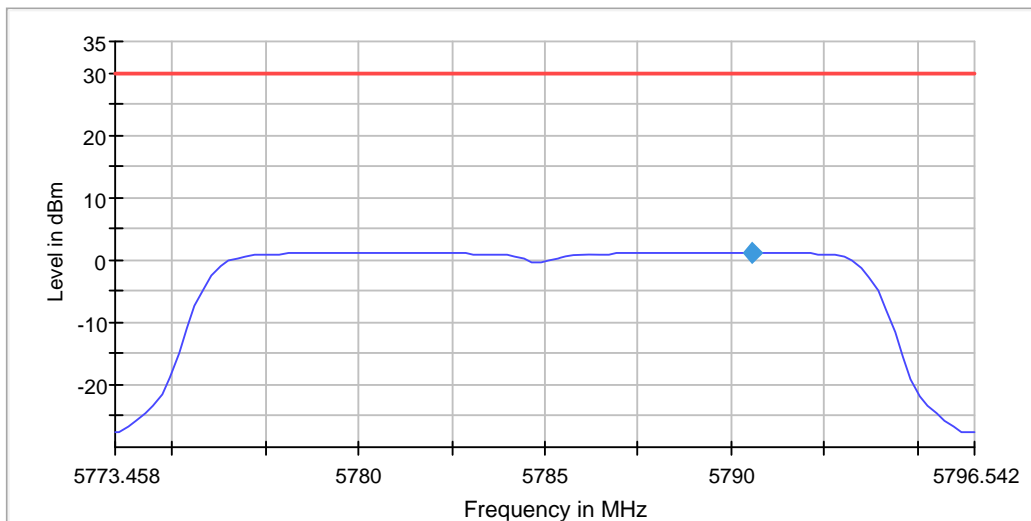

Measurement


Setting	Instrument Value	Target Value
Start Frequency	5.77346 GHz	5.77346 GHz
Stop Frequency	5.79654 GHz	5.79654 GHz
Span	23.085 MHz	23.085 MHz
RBW	1.000 MHz	<= 1.000 MHz
VBW	3.000 MHz	>= 3.000 MHz
SweepPoints	101	~ 46
SweepTime	2.020 s	2.020 s
Reference Level	-20.000 dBm	-20.000 dBm
Attenuation	0.000 dB	AUTO
Detector	RMS	RMS
SweepCount	3	3
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.30	0.30
Run	3 / max. 15	max. 15
Stable	3 / 3	3

Minimum Emission Bandwidth 6 dB (5785 MHz; 20 MHz)

Test according to FCC title 47 part 15 §15.407(a),(e), KDB 789033 D02 General U-NII Test Procedures New Rules v01r02 and ANSI C63.10

6 dB Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)	Max Level (dBm)	Result
5785.000000	17.755611	0.500000	---	5776.022444	5793.778055	1.4	PASS

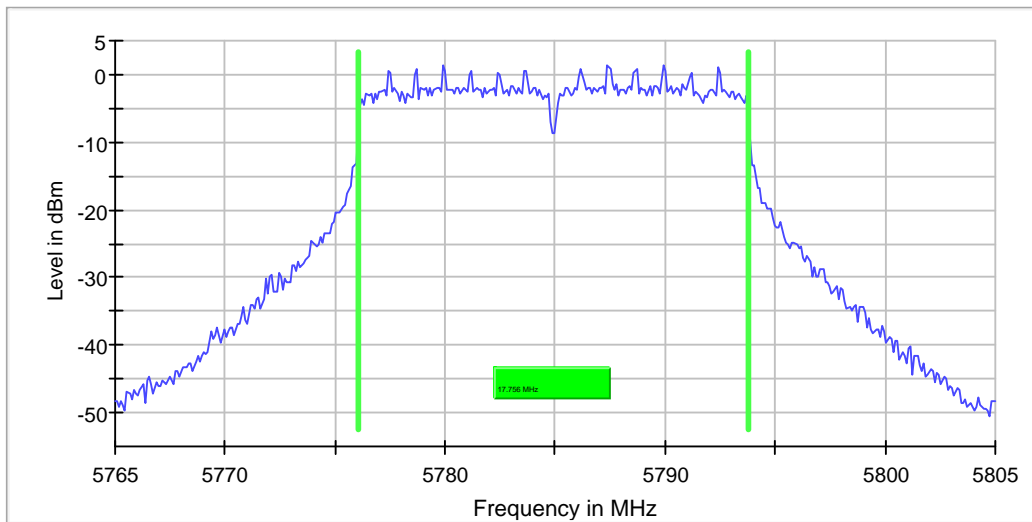

Measurement


Setting	Instrument Value	Target Value
Start Frequency	5.76500 GHz	5.76500 GHz
Stop Frequency	5.80500 GHz	5.80500 GHz
Span	40.000 MHz	40.000 MHz
RBW	100.000 kHz	~ 100.000 kHz
VBW	300.000 kHz	~ 300.000 kHz
SweepPoints	400	~ 400
Sweeptime	56.886 μs	AUTO
Reference Level	-20.000 dBm	-20.000 dBm
Attenuation	0.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	200	200
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
Sweeptype	FFT	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.30	0.30
Run	58 / max. 150	max. 150
Stable	5 / 5	5

Emission Bandwidth 26 dB (5785 MHz; 20 MHz)

Test according to FCC title 47 part 15 §15.407(a),(e), KDB 789033 D02 General U-NII Test Procedures New Rules v01r02 and ANSI C63.10

26 dB Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)	Max Level (dBm)	Result
5785.000000	23.084578	---	---	5773.656716	5796.741294	2.2	PASS

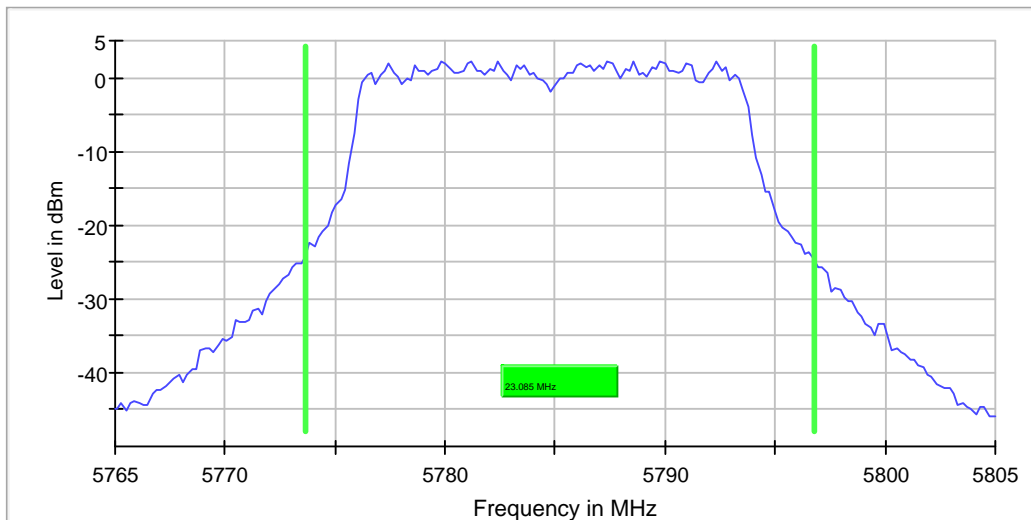

Measurement


Setting	Instrument Value	Target Value
Start Frequency	5.76500 GHz	5.76500 GHz
Stop Frequency	5.80500 GHz	5.80500 GHz
Span	40.000 MHz	40.000 MHz
RBW	200.000 kHz	~ 200.000 kHz
VBW	1.000 MHz	>= 600.000 kHz
SweepPoints	200	~ 200
Sweeptime	28.443 μs	AUTO
Reference Level	-10.000 dBm	-10.000 dBm
Attenuation	10.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	200	200
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
Sweeptype	FFT	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.30	0.30
Run	31 / max. 150	max. 150
Stable	5 / 5	5

Occupied Channel Bandwidth 99% (5785 MHz; 20 MHz)

Test according to FCC title 47 part 15 §15.407(a),(e), KDB 789033 D02 General U-NII Test Procedures New Rules v01r02 and ANSI C63.10

99 % Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)	Result
5785.000000	17.711443	---	---	5776.044776	5793.756219	PASS

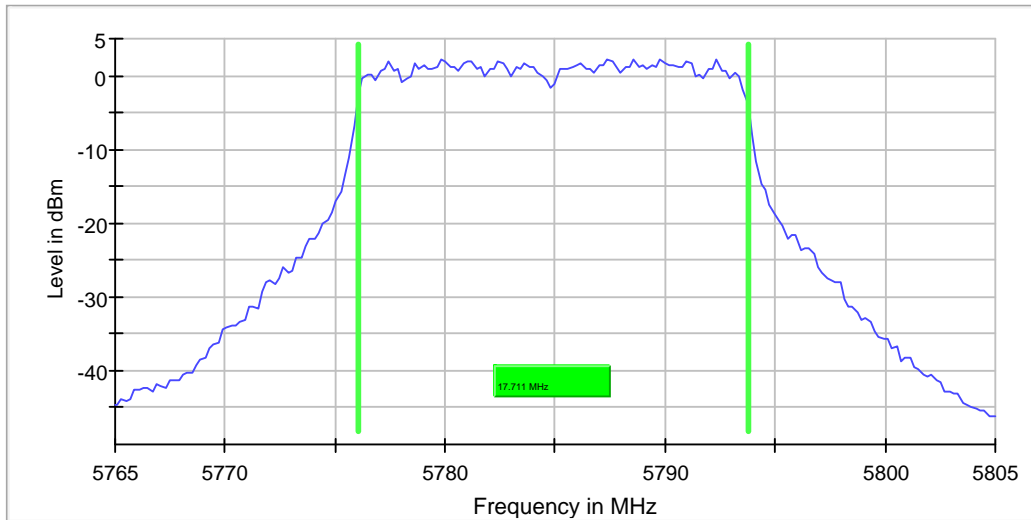

Measurement

Setting	Instrument Value	Target Value
Start Frequency	5.76500 GHz	5.76500 GHz
Stop Frequency	5.80500 GHz	5.80500 GHz
Span	40.000 MHz	40.000 MHz
RBW	200.000 kHz	<= 200.000 kHz
VBW	1.000 MHz	>= 600.000 kHz
SweepPoints	200	~ 200
SweepTime	28.443 μs	AUTO
Reference Level	-10.000 dBm	-10.000 dBm
Attenuation	10.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	200	200
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	FFT	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.30	0.30
Run	47 / max. 150	max. 150
Stable	5 / 5	5

Tx Spurious Emission (5785 MHz; 20 MHz)

Test according to FCC title 47 part 15 §15.407(b), KDB 789033 D02 General U-NII Test Procedures New Rules v01r02 and ANSI C63.10

Result

DUT Frequency (MHz)	Result
5785.000000	PASS

Final measurements


Frequency (MHz)	Level Pre Measurement (dBm)	level (dBm)	Limit (dBm)	Margin (dB)	Result
5399.090909	-43.6	-53.7	-41.2	12.5	PASS
18881.874638	-46.3	-58.7	-41.2	17.5	PASS

Pre Measurements

Frequency (MHz)	Level (dBm)	Margin (dB)	Limit (dBm)
5399.090909	-43.6	2.3	-41.2
5398.099174	-43.6	2.4	-41.2
5381.239669	-44.0	2.8	-41.2
5353.471074	-44.6	3.4	-41.2
5404.049587	-44.6	3.4	-41.2
5361.404959	-44.9	3.6	-41.2
5369.338843	-45.1	3.8	-41.2
5409.008264	-45.1	3.9	-41.2
5352.479339	-45.2	4.0	-41.2
5350.495868	-45.2	4.0	-41.2
5350.000000	-45.2	4.0	-41.2
5370.330579	-45.4	4.2	-41.2
5384.214876	-45.5	4.3	-41.2
5382.231405	-45.5	4.3	-41.2
5362.396694	-45.6	4.4	-41.2

Measurement Settings

Start Frequency (MHz)	Stop Frequency (MHz)	Pre Measurement	Final Measurement
30.000000	1000.000000	1	1
1000.000000	5150.000000	2	2
5150.000000	5250.000000	2	2
5250.000000	5350.000000	2	2
5350.000000	5470.000000	2	2
5470.000000	5725.000000	2	2
5725.000000	5850.000000	2	2
5850.000000	7000.000000	2	2
7000.000000	26000.000000	2	2
26000.000000	40000.000000	2	2

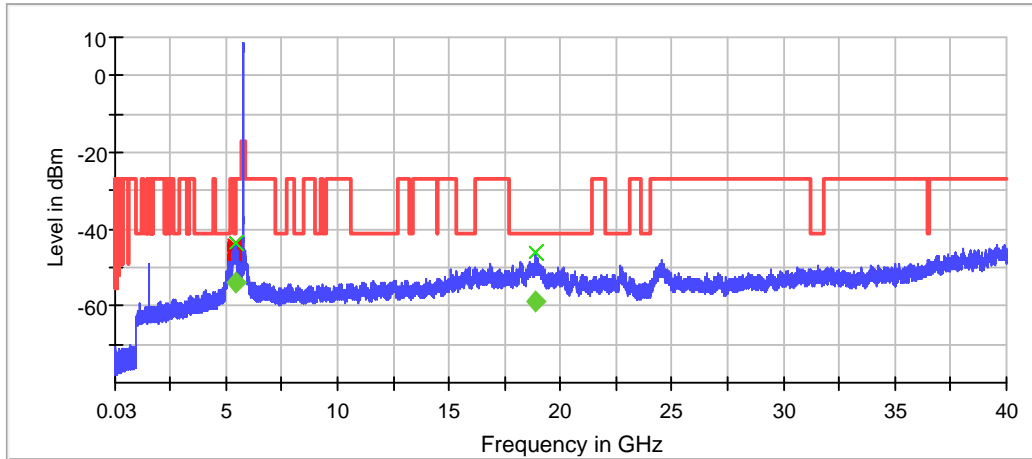

◆ Limit [limit.Result:1] × Threshold [limit 2.Result:1]
◆ Critical [Over Limit.Result:1] ◆ Sum Level [trace.Result:1]

Final Measurement

Setting	Instrument Value	Target Value
Span	ZeroSpan	ZeroSpan
RBW	1.000 MHz	~ 1.000 MHz
VBW	3.000 MHz	~ 3.000 MHz
SweepPoints	10001	~ 10001
Sweeptime	50.000 ms	50.000 ms
Reference Level	-20.000 dBm	-20.000 dBm
Attenuation	0.000 dB	0.000 dB
Detector	RMS	RMS
SweepCount	1	1
Filter	3 dB	3 dB
Trace Mode	Clear Write	Clear Write
SweepType	Sweep	AUTO
Preamp	off	off

Power Spectral Density (5825 MHz; 23.0846 MHz)


Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v01r02 and ANSI C63.10

Result

DUT Frequency (MHz)	Frequency (MHz)	PSD (dBm)	Limit Max (dBm)	Result
5825.000000	5830.544830	1.685	30.0	PASS

Ports

Port	Duty Cycle (%)
1	95.213

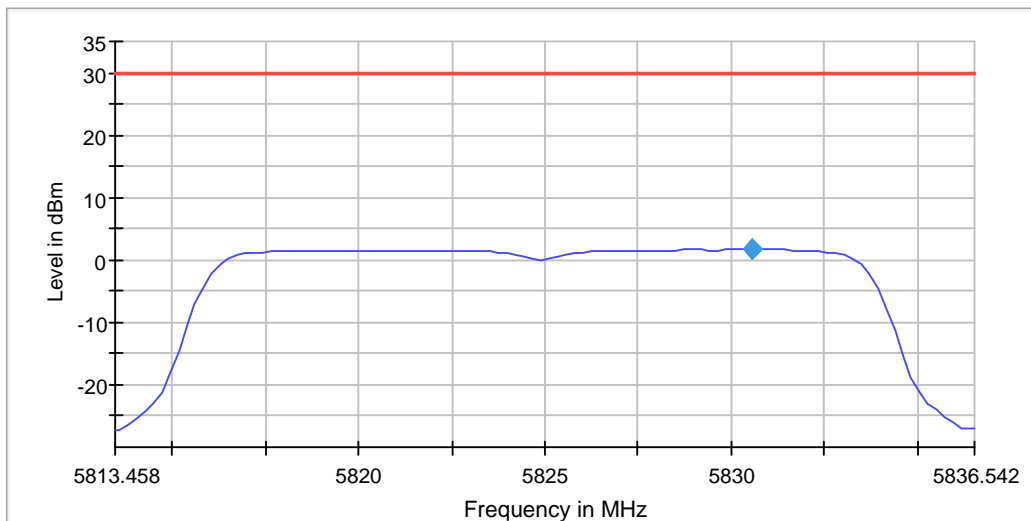

Measurement


Setting	Instrument Value	Target Value
Start Frequency	5.81346 GHz	5.81346 GHz
Stop Frequency	5.83654 GHz	5.83654 GHz
Span	23.085 MHz	23.085 MHz
RBW	1.000 MHz	<= 1.000 MHz
VBW	3.000 MHz	>= 3.000 MHz
SweepPoints	101	~ 46
SweepTime	2.020 s	2.020 s
Reference Level	-20.000 dBm	-20.000 dBm
Attenuation	0.000 dB	AUTO
Detector	RMS	RMS
SweepCount	3	3
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.30	0.30
Run	3 / max. 15	max. 15
Stable	3 / 3	3

Minimum Emission Bandwidth 6 dB (5825 MHz; 20 MHz)

Test according to FCC title 47 part 15 §15.407(a),(e), KDB 789033 D02 General U-NII Test Procedures New Rules v01r02 and ANSI C63.10

6 dB Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)	Max Level (dBm)	Result
5825.000000	17.655860	0.500000	---	5816.122195	5833.778055	2.0	PASS

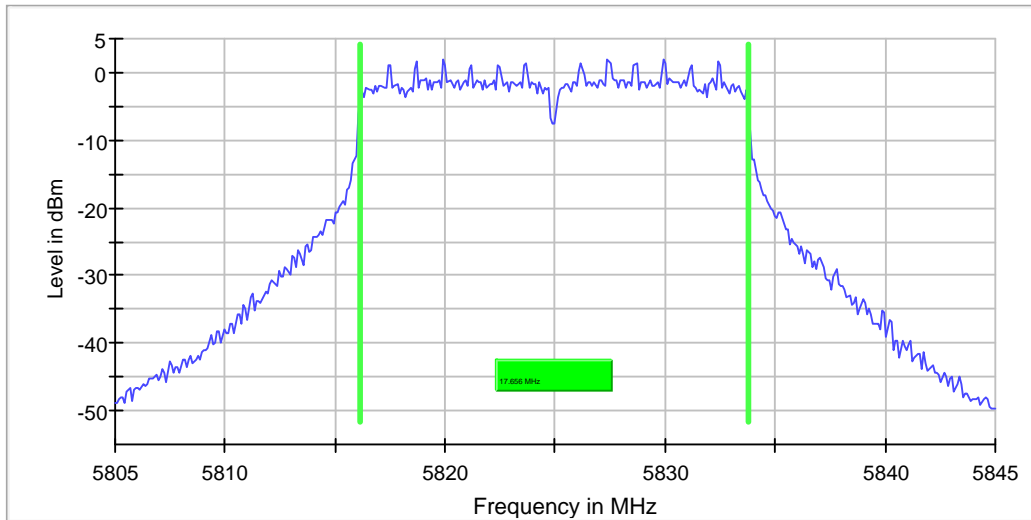

Measurement


Setting	Instrument Value	Target Value
Start Frequency	5.80500 GHz	5.80500 GHz
Stop Frequency	5.84500 GHz	5.84500 GHz
Span	40.000 MHz	40.000 MHz
RBW	100.000 kHz	~ 100.000 kHz
VBW	300.000 kHz	~ 300.000 kHz
SweepPoints	400	~ 400
SweepTime	56.886 μ s	AUTO
Reference Level	-20.000 dBm	-20.000 dBm
Attenuation	0.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	200	200
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	FFT	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.30	0.30
Run	37 / max. 150	max. 150
Stable	5 / 5	5

Emission Bandwidth 26 dB (5825 MHz; 20 MHz)

Test according to FCC title 47 part 15 §15.407(a),(e), KDB 789033 D02 General U-NII Test Procedures New Rules v01r02 and ANSI C63.10

26 dB Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)	Max Level (dBm)	Result
5825.000000	23.084578	---	---	5813.457711	5836.542289	3.0	PASS

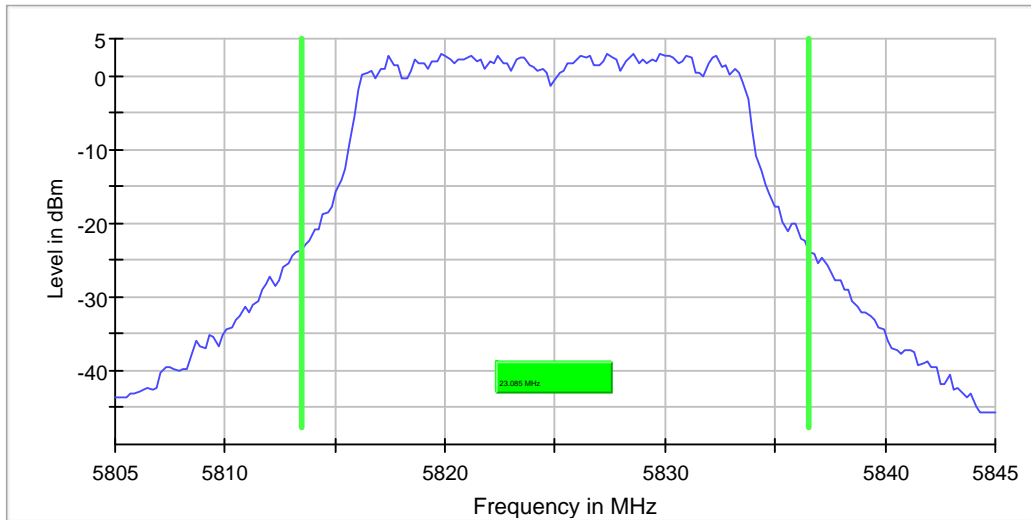

Measurement


Setting	Instrument Value	Target Value
Start Frequency	5.80500 GHz	5.80500 GHz
Stop Frequency	5.84500 GHz	5.84500 GHz
Span	40.000 MHz	40.000 MHz
RBW	200.000 kHz	~ 200.000 kHz
VBW	1.000 MHz	>= 600.000 kHz
SweepPoints	200	~ 200
Sweeptime	28.443 μs	AUTO
Reference Level	-10.000 dBm	-10.000 dBm
Attenuation	10.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	200	200
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
Sweeptype	FFT	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.30	0.30
Run	34 / max. 150	max. 150
Stable	5 / 5	5

Occupied Channel Bandwidth 99% (5825 MHz; 20 MHz)

Test according to FCC title 47 part 15 §15.407(a),(e), KDB 789033 D02 General U-NII Test Procedures New Rules v01r02 and ANSI C63.10

99 % Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)	Result
5825.000000	17.711443	---	---	5816.044776	5833.756219	PASS

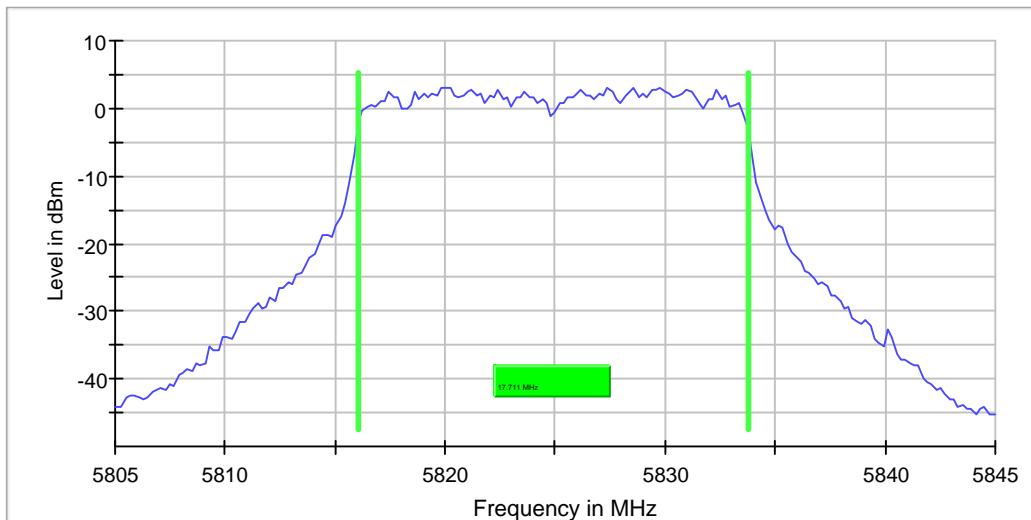

Measurement

Setting	Instrument Value	Target Value
Start Frequency	5.80500 GHz	5.80500 GHz
Stop Frequency	5.84500 GHz	5.84500 GHz
Span	40.000 MHz	40.000 MHz
RBW	200.000 kHz	<= 200.000 kHz
VBW	1.000 MHz	>= 600.000 kHz
SweepPoints	200	~ 200
Sweeptime	28.443 μs	AUTO
Reference Level	-10.000 dBm	-10.000 dBm
Attenuation	10.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	200	200
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
Sweeptype	FFT	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.30	0.30
Run	41 / max. 150	max. 150
Stable	5 / 5	5

Band Edge high (5825 MHz; 20 MHz)

Test according to FCC title 47 part 15 §15.407(b), KDB 789033 D02 General U-NII Test Procedures New Rules v01r02 and ANSI C63.10

Result


DUT Frequency (MHz)	Result
5825.000000	PASS

Inband Peak

Frequency (MHz)	Level (dBm)
5830.328685	1.4

Measurements

Frequency (MHz)	Level (dBm)	Margin (dB)	Limit (dBm)	Result
7303.415402	-63.9	22.7	-41.2	PASS
7301.416142	-64.0	22.7	-41.2	PASS
7298.417253	-64.0	22.8	-41.2	PASS
7300.916327	-64.1	22.9	-41.2	PASS
7307.413921	-64.1	22.9	-41.2	PASS
7297.417623	-64.1	22.9	-41.2	PASS
7427.869308	-64.1	22.9	-41.2	PASS
7296.917808	-64.1	22.9	-41.2	PASS
7297.917438	-64.1	22.9	-41.2	PASS
7308.913365	-64.1	22.9	-41.2	PASS
7300.416512	-64.1	22.9	-41.2	PASS
7298.917068	-64.1	22.9	-41.2	PASS
7302.915587	-64.1	22.9	-41.2	PASS
7309.413180	-64.1	22.9	-41.2	PASS
7299.916698	-64.1	22.9	-41.2	PASS

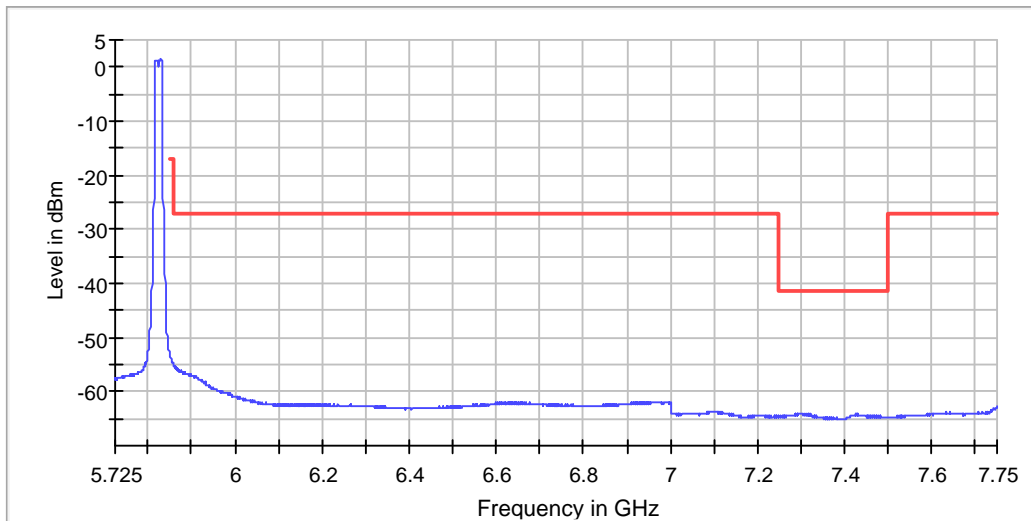

Measurement 1

Setting	Instrument Value	Target Value
RBW	1.000 MHz	<= 1.000 MHz
VBW	3.000 MHz	>= 3.000 MHz
SweepPoints	250	~ 250
SweepTime	250.000 ms	250.000 ms
Reference Level	-20.000 dBm	-20.000 dBm
Attenuation	0.000 dB	AUTO
Detector	RMS	RMS
SweepCount	5	5
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.30	0.30
Run	3 / max. 15	max. 15
Stable	3 / 3	3

Measurement 2

Setting	Instrument Value	Target Value
RBW	1.000 MHz	<= 1.000 MHz
VBW	3.000 MHz	>= 3.000 MHz
SweepPoints	1100	~ 1100
SweepTime	1.100 s	1.100 s
Reference Level	-20.000 dBm	-20.000 dBm
Attenuation	0.000 dB	AUTO
Detector	RMS	RMS
SweepCount	5	5
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.30	0.30
Run	3 / max. 15	max. 15
Stable	3 / 3	3

Tx Spurious Emission (5825 MHz; 20 MHz)

Test according to FCC title 47 part 15 §15.407(b), KDB 789033 D02 General U-NII Test Procedures New Rules v01r02 and ANSI C63.10

Result

DUT Frequency (MHz)	Result
5825.000000	PASS

Final measurements


Frequency (MHz)	Level Pre Measurement (dBm)	level (dBm)	Limit (dBm)	Margin (dB)	Result
5381.239669	-45.2	-55.0	-41.2	13.7	PASS

Pre Measurements

Frequency (MHz)	Level (dBm)	Margin (dB)	Limit (dBm)
5381.239669	-45.2	4.0	-41.2
5404.049587	-45.3	4.0	-41.2
5405.041322	-45.3	4.1	-41.2
5380.247934	-45.4	4.2	-41.2
5353.471074	-45.6	4.3	-41.2
5370.330579	-45.8	4.5	-41.2
5416.942149	-45.8	4.5	-41.2
5350.000000	-45.9	4.6	-41.2
5382.231405	-45.9	4.6	-41.2
5365.371901	-46.0	4.8	-41.2
5413.966942	-46.1	4.9	-41.2
5398.099174	-46.1	4.9	-41.2
5358.429752	-46.2	5.0	-41.2
5399.090909	-46.2	5.0	-41.2
5400.082645	-46.4	5.1	-41.2

Measurement Settings

Start Frequency (MHz)	Stop Frequency (MHz)	Pre Measurement	Final Measurement
30.000000	1000.000000	1	1
1000.000000	5150.000000	2	2
5150.000000	5250.000000	2	2
5250.000000	5350.000000	2	2
5350.000000	5470.000000	2	2
5470.000000	5725.000000	2	2
5725.000000	5850.000000	2	2
5850.000000	7000.000000	2	2
7000.000000	26000.000000	2	2
26000.000000	40000.000000	2	2

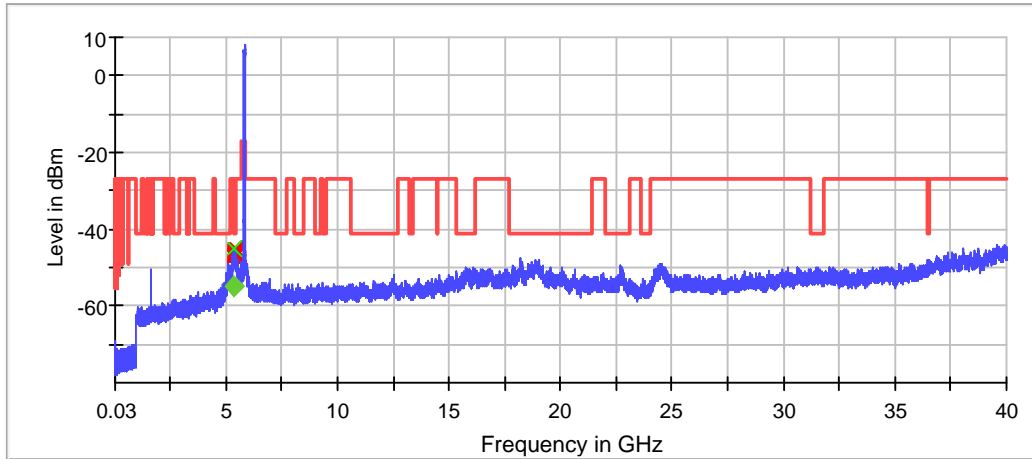

◆ Limit [limit.Result:1] × Threshold [limit 2.Result:1]
◆ Critical [Over Limit.Result:1] ◆ Sum Level [trace.Result:1]

Final Measurement

Setting	Instrument Value	Target Value
Span	ZeroSpan	ZeroSpan
RBW	1.000 MHz	~ 1.000 MHz
VBW	3.000 MHz	~ 3.000 MHz
SweepPoints	10001	~ 10001
Sweeptime	50.000 ms	50.000 ms
Reference Level	-20.000 dBm	-20.000 dBm
Attenuation	0.000 dB	0.000 dB
Detector	RMS	RMS
SweepCount	1	1
Filter	3 dB	3 dB
Trace Mode	Clear Write	Clear Write
SweepType	Sweep	AUTO
Preamp	off	off

UNII-3 ANT0 AC Mode 40MHz Power Spectral Density (5755 MHz; 43.5821 MHz)


Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v01r02 and ANSI C63.10

Result

DUT Frequency (MHz)	Frequency (MHz)	PSD (dBm)	Limit Max (dBm)	Result
5755.000000	5763.331872	-0.887	30.0	PASS

Ports

Port	Duty Cycle (%)
1	93.235

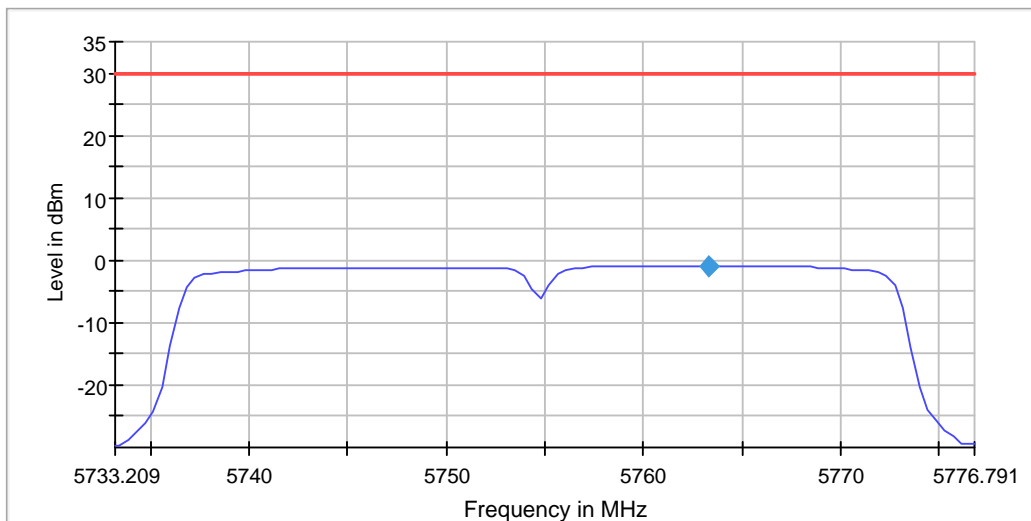

Measurement


Setting	Instrument Value	Target Value
Start Frequency	5.73321 GHz	5.73321 GHz
Stop Frequency	5.77679 GHz	5.77679 GHz
Span	43.582 MHz	43.582 MHz
RBW	1.000 MHz	<= 1.000 MHz
VBW	3.000 MHz	>= 3.000 MHz
SweepPoints	101	~ 87
SweepTime	2.020 s	2.020 s
Reference Level	-20.000 dBm	-20.000 dBm
Attenuation	0.000 dB	AUTO
Detector	RMS	RMS
SweepCount	3	3
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.30	0.30
Run	3 / max. 15	max. 15
Stable	3 / 3	3

Minimum Emission Bandwidth 6 dB (5755 MHz; 40 MHz)

Test according to FCC title 47 part 15 §15.407(a),(e), KDB 789033 D02 General U-NII Test Procedures New Rules v01r02 and ANSI C63.10

6 dB Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)	Max Level (dBm)	Result
5755.000000	36.454432	0.500000	---	5736.722846	5773.177278	-1.3	PASS

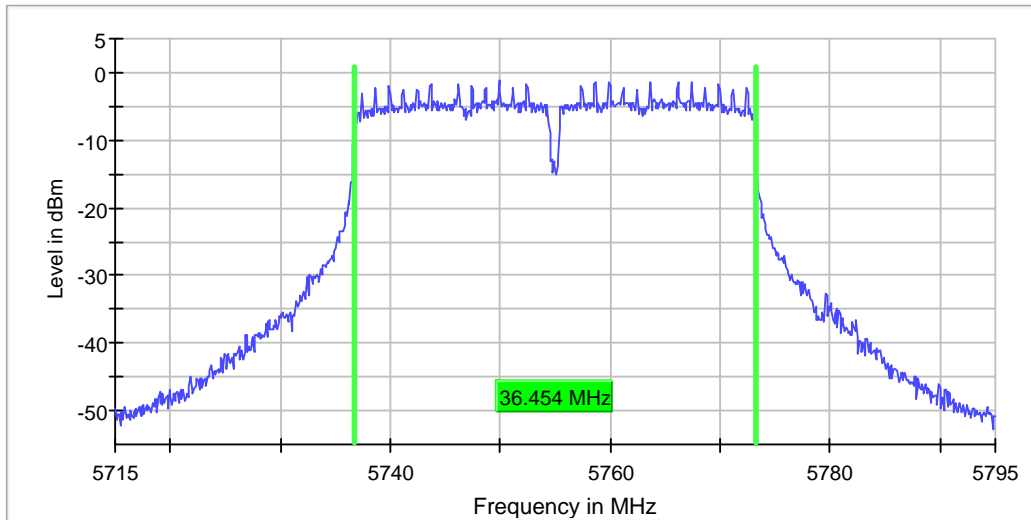

Measurement


Setting	Instrument Value	Target Value
Start Frequency	5.71500 GHz	5.71500 GHz
Stop Frequency	5.79500 GHz	5.79500 GHz
Span	80.000 MHz	80.000 MHz
RBW	100.000 kHz	~ 100.000 kHz
VBW	300.000 kHz	~ 300.000 kHz
SweepPoints	800	~ 800
Sweeptime	94.810 μs	AUTO
Reference Level	-20.000 dBm	-20.000 dBm
Attenuation	0.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	200	200
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
Sweeptype	FFT	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.30	0.30
Run	80 / max. 150	max. 150
Stable	5 / 5	5

Emission Bandwidth 26 dB (5755 MHz; 40 MHz)

Test according to FCC title 47 part 15 §15.407(a),(e), KDB 789033 D02 General U-NII Test Procedures New Rules v01r02 and ANSI C63.10

26 dB Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)	Max Level (dBm)	Result
5755.000000	43.582090	---	---	5733.059701	5776.641791	1.5	PASS

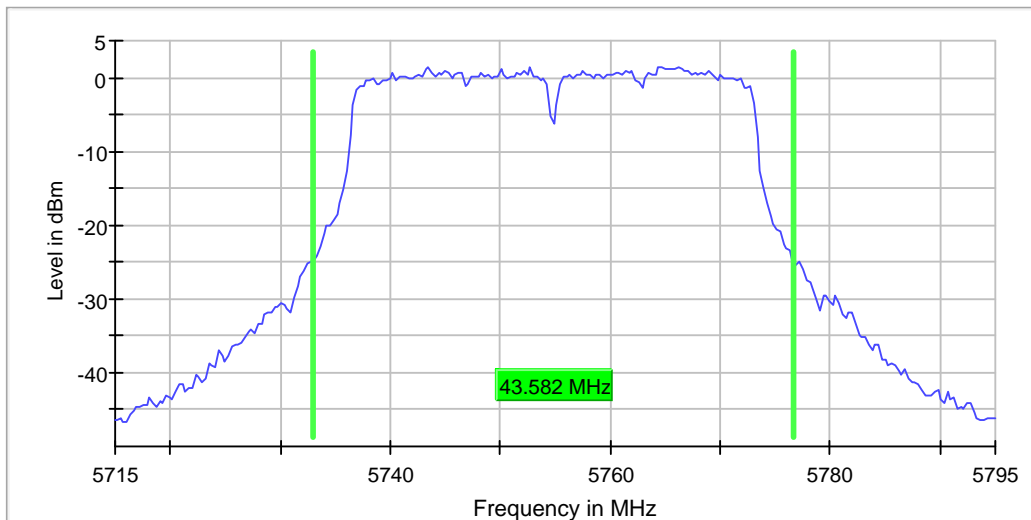

Measurement


Setting	Instrument Value	Target Value
Start Frequency	5.71500 GHz	5.71500 GHz
Stop Frequency	5.79500 GHz	5.79500 GHz
Span	80.000 MHz	80.000 MHz
RBW	300.000 kHz	~ 400.000 kHz
VBW	1.000 MHz	>= 900.000 kHz
SweepPoints	267	~ 267
Sweeptime	31.603 μs	AUTO
Reference Level	-20.000 dBm	-20.000 dBm
Attenuation	0.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	200	200
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
Sweeptype	FFT	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.30	0.30
Run	43 / max. 150	max. 150
Stable	5 / 5	5

Occupied Channel Bandwidth 99% (5755 MHz; 40 MHz)

Test according to FCC title 47 part 15 §15.407(a),(e), KDB 789033 D02 General U-NII Test Procedures New Rules v01r02 and ANSI C63.10

99 % Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)	Result
5755.000000	36.417910	---	---	5736.641791	5773.059701	PASS

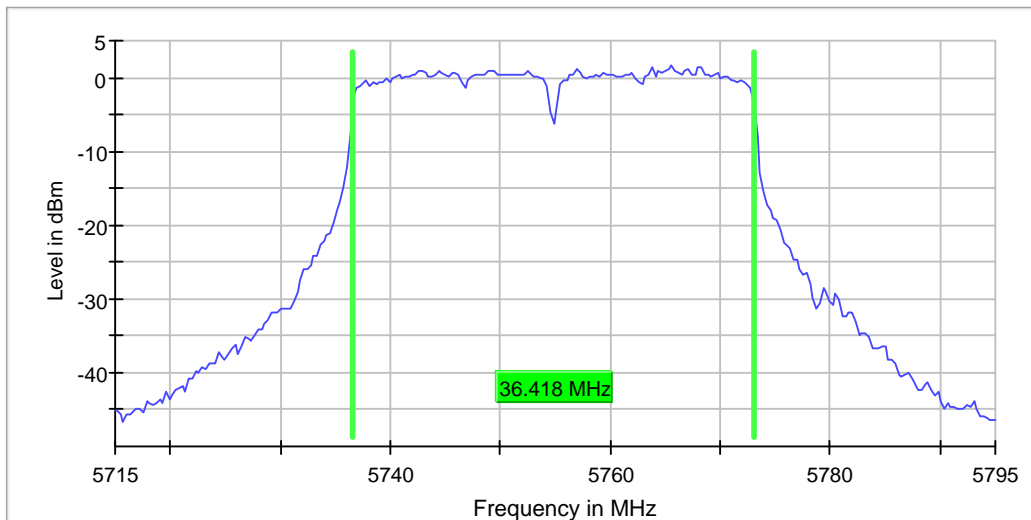

Measurement

Setting	Instrument Value	Target Value
Start Frequency	5.71500 GHz	5.71500 GHz
Stop Frequency	5.79500 GHz	5.79500 GHz
Span	80.000 MHz	80.000 MHz
RBW	300.000 kHz	<= 400.000 kHz
VBW	1.000 MHz	>= 900.000 kHz
SweepPoints	267	~ 267
Sweeptime	31.603 μs	AUTO
Reference Level	-20.000 dBm	-20.000 dBm
Attenuation	0.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	200	200
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
Sweeptype	FFT	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.30	0.30
Run	63 / max. 150	max. 150
Stable	5 / 5	5

Band Edge low (5755 MHz; 40 MHz)

Test according to FCC title 47 part 15 §15.407(b), KDB 789033 D02 General U-NII Test Procedures New Rules v01r02 and ANSI C63.10

Result


DUT Frequency (MHz)	Result
5755.000000	PASS

Inband Peak

Frequency (MHz)	Level (dBm)
5763.595618	-1.9

Measurements

Frequency (MHz)	Level (dBm)	Margin (dB)	Limit (dBm)	Result
5389.197736	-56.2	15.0	-41.2	PASS
5386.201731	-56.2	15.0	-41.2	PASS
5370.223036	-56.2	15.0	-41.2	PASS
5380.709055	-56.2	15.0	-41.2	PASS
5375.715712	-56.3	15.0	-41.2	PASS
5388.199068	-56.3	15.0	-41.2	PASS
5387.699734	-56.3	15.0	-41.2	PASS
5392.193742	-56.3	15.1	-41.2	PASS
5379.710386	-56.3	15.1	-41.2	PASS
5391.694407	-56.3	15.1	-41.2	PASS
5386.701065	-56.3	15.1	-41.2	PASS
5387.200399	-56.3	15.1	-41.2	PASS
5376.215047	-56.3	15.1	-41.2	PASS
5377.213715	-56.3	15.1	-41.2	PASS
5378.212383	-56.3	15.1	-41.2	PASS

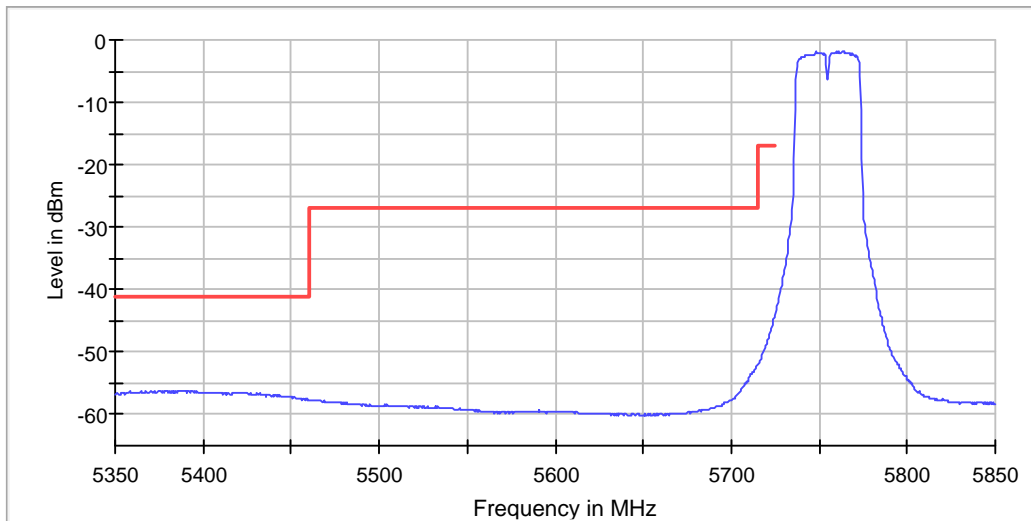

Measurement 1

Setting	Instrument Value	Target Value
RBW	1.000 MHz	<= 1.000 MHz
VBW	3.000 MHz	>= 3.000 MHz
SweepPoints	250	~ 250
SweepTime	250.000 ms	250.000 ms
Reference Level	-20.000 dBm	-20.000 dBm
Attenuation	0.000 dB	AUTO
Detector	RMS	RMS
SweepCount	5	5
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.30	0.30
Run	3 / max. 15	max. 15
Stable	3 / 3	3

Measurement 2

Setting	Instrument Value	Target Value
RBW	1.000 MHz	<= 1.000 MHz
VBW	3.000 MHz	>= 3.000 MHz
SweepPoints	750	~ 750
SweepTime	750.000 ms	750.000 ms
Reference Level	-20.000 dBm	-20.000 dBm
Attenuation	0.000 dB	AUTO
Detector	RMS	RMS
SweepCount	5	5
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.30	0.30
Run	3 / max. 15	max. 15
Stable	3 / 3	3

Tx Spurious Emission (5755 MHz; 40 MHz)

Test according to FCC title 47 part 15 §15.407(b), KDB 789033 D02 General U-NII Test Procedures New Rules v01r02 and ANSI C63.10

Result

DUT Frequency (MHz)	Result
5755.000000	PASS

Final measurements


Frequency (MHz)	Level Pre Measurement (dBm)	level (dBm)	Limit (dBm)	Margin (dB)	Result
5354.462810	-45.9	-54.0	-41.2	12.8	PASS

Pre Measurements

Frequency (MHz)	Level (dBm)	Margin (dB)	Limit (dBm)
5354.462810	-45.9	4.7	-41.2
5353.471074	-46.0	4.7	-41.2
5396.115702	-46.4	5.2	-41.2
5425.867769	-46.7	5.5	-41.2
5419.917355	-46.8	5.6	-41.2
5410.991736	-47.3	6.0	-41.2
5423.884298	-47.3	6.1	-41.2
5371.322314	-47.3	6.1	-41.2
5397.107438	-47.4	6.1	-41.2
5370.330579	-47.5	6.3	-41.2
5382.231405	-47.6	6.3	-41.2
5389.173554	-47.6	6.4	-41.2
18911.873059	-47.6	6.4	-41.2
5384.214876	-47.6	6.4	-41.2
5418.925620	-47.7	6.4	-41.2

Measurement Settings

Start Frequency (MHz)	Stop Frequency (MHz)	Pre Measurement	Final Measurement
30.000000	1000.000000	1	1
1000.000000	5150.000000	2	2
5150.000000	5250.000000	2	2
5250.000000	5350.000000	2	2
5350.000000	5470.000000	2	2
5470.000000	5725.000000	2	2
5725.000000	5850.000000	2	2
5850.000000	7000.000000	2	2
7000.000000	26000.000000	2	2
26000.000000	40000.000000	2	2

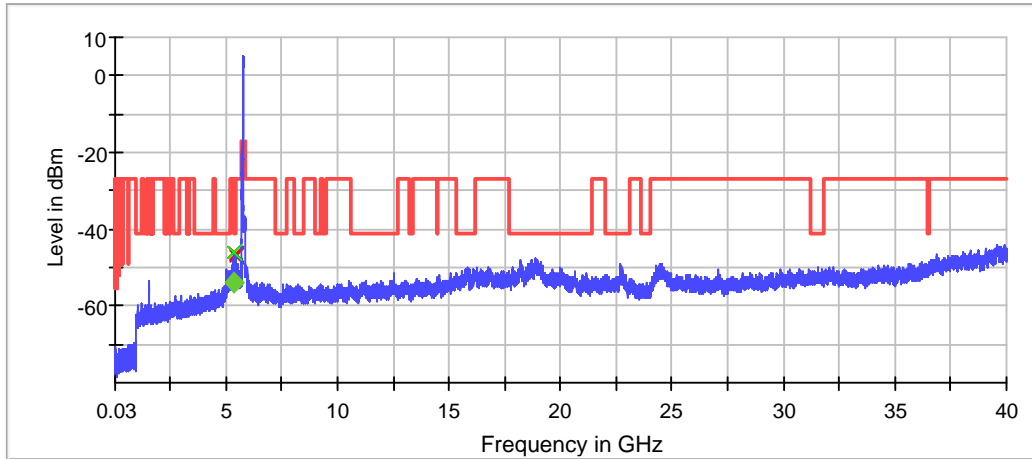

◆ Sum Level [trace.Result:1]
 ✕ Threshold [limit 2.Result:1]
 ◆ Critical [Over Limit.Result:1]

Final Measurement

Setting	Instrument Value	Target Value
Span	ZeroSpan	ZeroSpan
RBW	1.000 MHz	~ 1.000 MHz
VBW	3.000 MHz	~ 3.000 MHz
SweepPoints	10001	~ 10001
SweepTime	50.000 ms	50.000 ms
Reference Level	0.000 dBm	0.000 dBm
Attenuation	10.000 dB	0.000 dB
Detector	RMS	RMS
SweepCount	1	1
Filter	3 dB	3 dB
Trace Mode	Clear Write	Clear Write
SweepType	Sweep	AUTO
Preamp	off	off

Power Spectral Density (5795 MHz; 43.5821 MHz)


Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v01r02 and ANSI C63.10

Result

DUT Frequency (MHz)	Frequency (MHz)	PSD (dBm)	Limit Max (dBm)	Result
5795.000000	5806.322800	-0.886	30.0	PASS

Ports

Port	Duty Cycle (%)
1	93.251

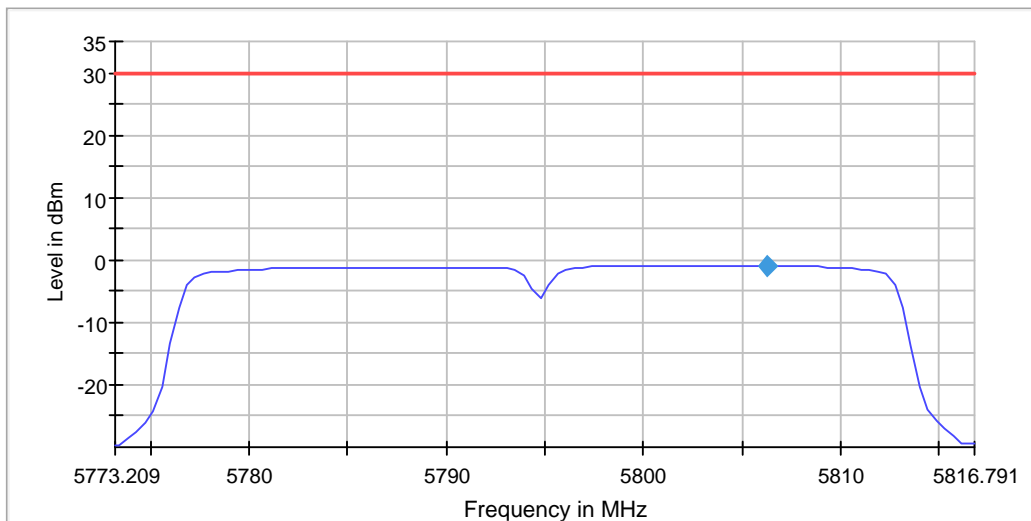

Measurement


Setting	Instrument Value	Target Value
Start Frequency	5.77321 GHz	5.77321 GHz
Stop Frequency	5.81679 GHz	5.81679 GHz
Span	43.582 MHz	43.582 MHz
RBW	1.000 MHz	<= 1.000 MHz
VBW	3.000 MHz	>= 3.000 MHz
SweepPoints	101	~ 87
SweepTime	2.020 s	2.020 s
Reference Level	-20.000 dBm	-20.000 dBm
Attenuation	0.000 dB	AUTO
Detector	RMS	RMS
SweepCount	3	3
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.30	0.30
Run	3 / max. 15	max. 15
Stable	3 / 3	3

Minimum Emission Bandwidth 6 dB (5795 MHz; 40 MHz)

Test according to FCC title 47 part 15 §15.407(a),(e), KDB 789033 D02 General U-NII Test Procedures New Rules v01r02 and ANSI C63.10

6 dB Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)	Max Level (dBm)	Result
5795.000000	36.454432	0.500000	---	5776.722846	5813.177278	-2.6	PASS

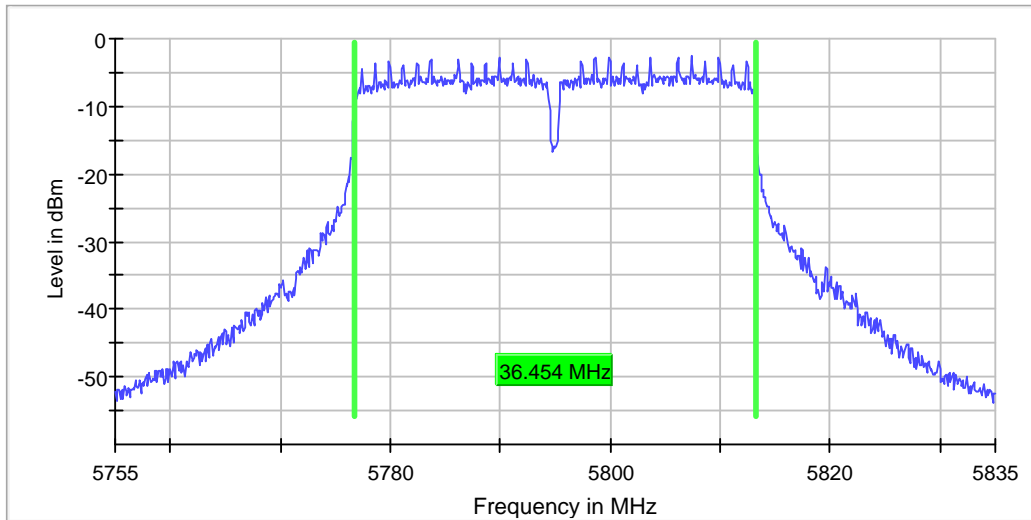

Measurement


Setting	Instrument Value	Target Value
Start Frequency	5.75500 GHz	5.75500 GHz
Stop Frequency	5.83500 GHz	5.83500 GHz
Span	80.000 MHz	80.000 MHz
RBW	100.000 kHz	~ 100.000 kHz
VBW	300.000 kHz	~ 300.000 kHz
SweepPoints	800	~ 800
Sweeptime	94.810 μs	AUTO
Reference Level	-20.000 dBm	-20.000 dBm
Attenuation	0.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	200	200
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
Sweeptype	FFT	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.30	0.30
Run	77 / max. 150	max. 150
Stable	5 / 5	5

Emission Bandwidth 26 dB (5795 MHz; 40 MHz)

Test according to FCC title 47 part 15 §15.407(a),(e), KDB 789033 D02 General U-NII Test Procedures New Rules v01r02 and ANSI C63.10

26 dB Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)	Max Level (dBm)	Result
5795.000000	43.582090	---	---	5773.059701	5816.641791	0.0	PASS

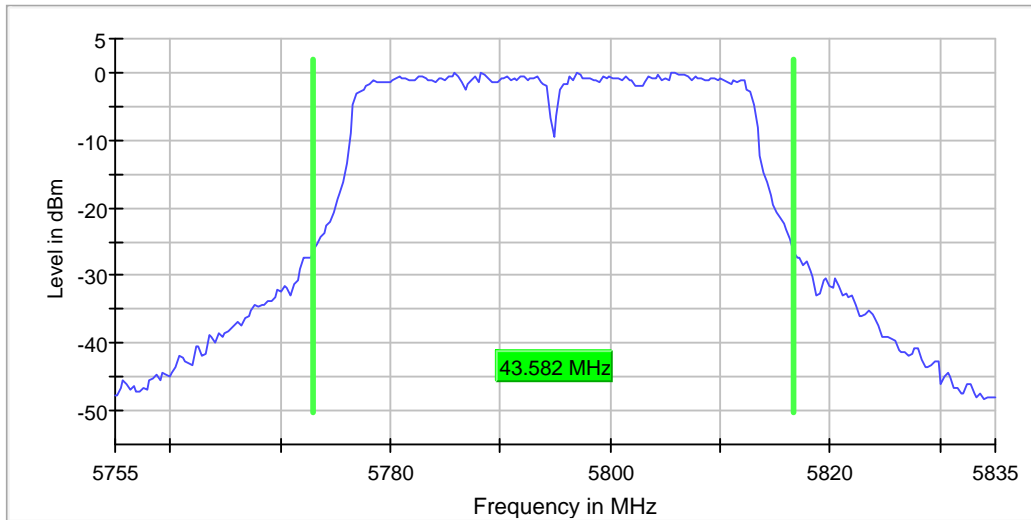

Measurement


Setting	Instrument Value	Target Value
Start Frequency	5.75500 GHz	5.75500 GHz
Stop Frequency	5.83500 GHz	5.83500 GHz
Span	80.000 MHz	80.000 MHz
RBW	300.000 kHz	~ 400.000 kHz
VBW	1.000 MHz	>= 900.000 kHz
SweepPoints	267	~ 267
Sweeptime	31.603 μs	AUTO
Reference Level	-20.000 dBm	-20.000 dBm
Attenuation	0.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	200	200
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
Sweeptype	FFT	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.30	0.30
Run	47 / max. 150	max. 150
Stable	5 / 5	5

Occupied Channel Bandwidth 99% (5795 MHz; 40 MHz)

Test according to FCC title 47 part 15 §15.407(a),(e), KDB 789033 D02 General U-NII Test Procedures New Rules v01r02 and ANSI C63.10

99 % Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)	Result
5795.000000	36.417910	---	---	5776.641791	5813.059701	PASS

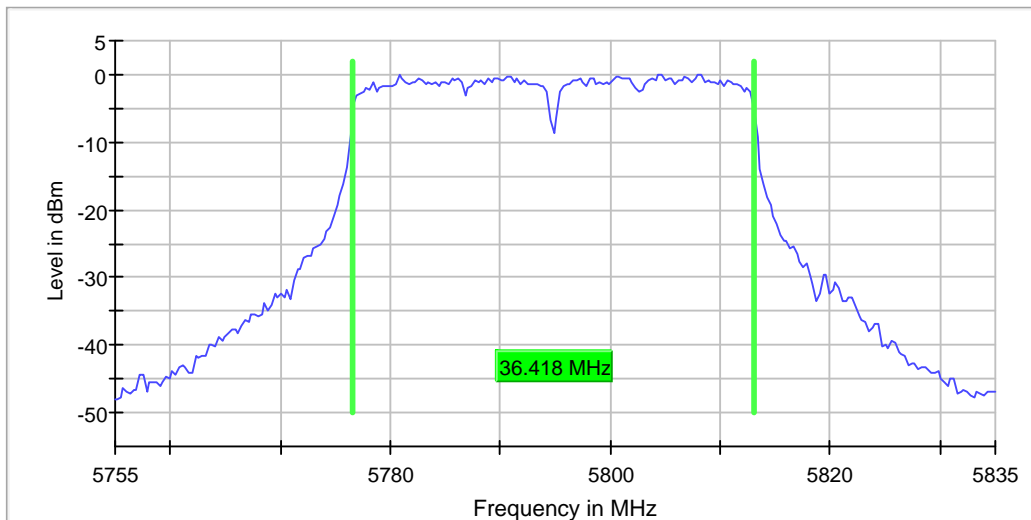

Measurement

Setting	Instrument Value	Target Value
Start Frequency	5.75500 GHz	5.75500 GHz
Stop Frequency	5.83500 GHz	5.83500 GHz
Span	80.000 MHz	80.000 MHz
RBW	300.000 kHz	<= 400.000 kHz
VBW	1.000 MHz	>= 900.000 kHz
SweepPoints	267	~ 267
Sweeptime	31.603 μs	AUTO
Reference Level	-20.000 dBm	-20.000 dBm
Attenuation	0.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	200	200
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
Sweeptype	FFT	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.30	0.30
Run	33 / max. 150	max. 150
Stable	5 / 5	5

Band Edge high (5795 MHz; 40 MHz)

Test according to FCC title 47 part 15 §15.407(b), KDB 789033 D02 General U-NII Test Procedures New Rules v01r02 and ANSI C63.10

Result


DUT Frequency (MHz)	Result
5795.000000	PASS

Inband Peak

Frequency (MHz)	Level (dBm)
5803.436255	-3.4

Measurements

Frequency (MHz)	Level (dBm)	Margin (dB)	Limit (dBm)	Result
7301.915957	-64.0	22.7	-41.2	PASS
7305.414661	-64.0	22.8	-41.2	PASS
7301.416142	-64.1	22.8	-41.2	PASS
7307.413921	-64.1	22.9	-41.2	PASS
7302.415772	-64.1	22.9	-41.2	PASS
7304.415031	-64.1	22.9	-41.2	PASS
7299.916698	-64.1	22.9	-41.2	PASS
7300.916327	-64.1	22.9	-41.2	PASS
7298.917068	-64.2	22.9	-41.2	PASS
7306.414291	-64.2	22.9	-41.2	PASS
7293.419104	-64.2	22.9	-41.2	PASS
7297.417623	-64.2	22.9	-41.2	PASS
7306.914106	-64.2	22.9	-41.2	PASS
7294.918549	-64.2	22.9	-41.2	PASS
7305.914476	-64.2	22.9	-41.2	PASS

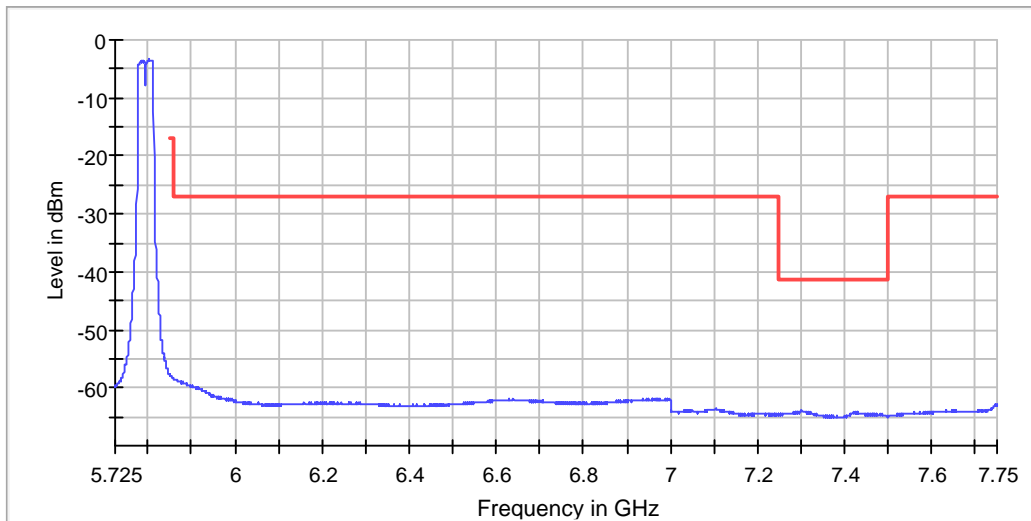

Measurement 1

Setting	Instrument Value	Target Value
RBW	1.000 MHz	<= 1.000 MHz
VBW	3.000 MHz	>= 3.000 MHz
SweepPoints	250	~ 250
SweepTime	250.000 ms	250.000 ms
Reference Level	-20.000 dBm	-20.000 dBm
Attenuation	0.000 dB	AUTO
Detector	RMS	RMS
SweepCount	5	5
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.30	0.30
Run	3 / max. 15	max. 15
Stable	3 / 3	3

Measurement 2

Setting	Instrument Value	Target Value
RBW	1.000 MHz	<= 1.000 MHz
VBW	3.000 MHz	>= 3.000 MHz
SweepPoints	1100	~ 1100
SweepTime	1.100 s	1.100 s
Reference Level	-20.000 dBm	-20.000 dBm
Attenuation	0.000 dB	AUTO
Detector	RMS	RMS
SweepCount	5	5
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.30	0.30
Run	3 / max. 15	max. 15
Stable	3 / 3	3

Tx Spurious Emission (5795 MHz; 40 MHz)

Test according to FCC title 47 part 15 §15.407(b), KDB 789033 D02 General U-NII Test Procedures New Rules v01r02 and ANSI C63.10

Result

DUT Frequency (MHz)	Result
5795.000000	PASS

Final measurements


Frequency (MHz)	Level Pre Measurement (dBm)	level (dBm)	Limit (dBm)	Margin (dB)	Result
---	---	---	---	---	---

Pre Measurements

Frequency (MHz)	Level (dBm)	Margin (dB)	Limit (dBm)
18206.910163	-47.4	6.2	-41.2
5391.157025	-47.5	6.3	-41.2
5408.016529	-47.6	6.3	-41.2
5420.909091	-47.6	6.3	-41.2
5409.008264	-47.7	6.4	-41.2
5419.917355	-47.8	6.6	-41.2
5357.438017	-47.9	6.7	-41.2
5414.958678	-48.0	6.8	-41.2
5390.165289	-48.0	6.8	-41.2
5402.066116	-48.1	6.8	-41.2
18965.870217	-48.1	6.9	-41.2
18226.909110	-48.1	6.9	-41.2
18864.875533	-48.1	6.9	-41.2
18926.872270	-48.1	6.9	-41.2
5377.272727	-48.2	6.9	-41.2

Measurement Settings

Start Frequency (MHz)	Stop Frequency (MHz)	Pre Measurement	Final Measurement
30.000000	1000.000000	1	1
1000.000000	5150.000000	2	2
5150.000000	5250.000000	2	2
5250.000000	5350.000000	2	2
5350.000000	5470.000000	2	2
5470.000000	5725.000000	2	2
5725.000000	5850.000000	2	2
5850.000000	7000.000000	2	2
7000.000000	26000.000000	2	2
26000.000000	40000.000000	2	2

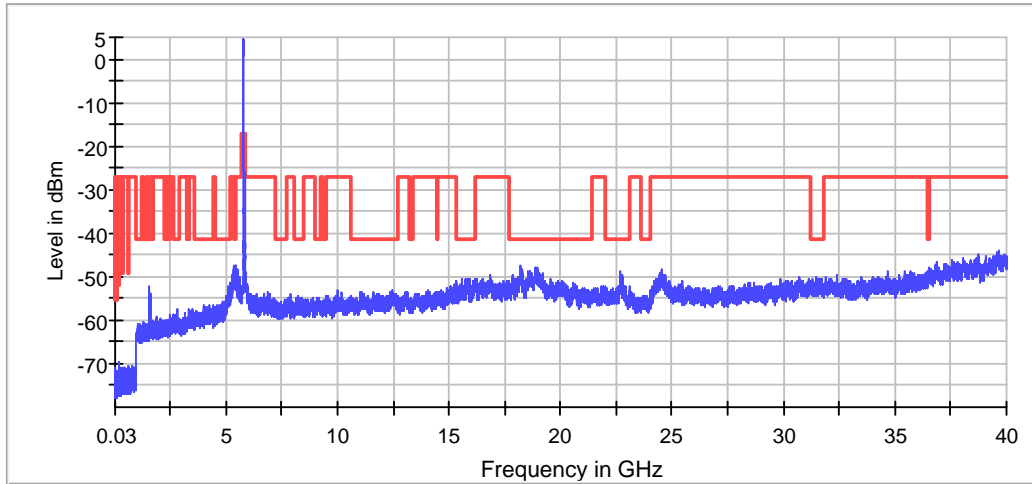

— Limit [limit.Result:1] ✕ Threshold [limit 2.Result:1]

Final Measurement

Setting	Instrument Value	Target Value
Span	ZeroSpan	ZeroSpan
RBW	1.000 MHz	~ 1.000 MHz
VBW	3.000 MHz	~ 3.000 MHz
SweepPoints	10001	~ 10001
SweepTime	50.000 ms	50.000 ms
Reference Level	0.000 dBm	0.000 dBm
Attenuation	10.000 dB	0.000 dB
Detector	RMS	RMS
SweepCount	1	1
Filter	3 dB	3 dB
Trace Mode	Clear Write	Clear Write
SweepType	Sweep	AUTO
Preamp	off	off

UNII-3 ANT0 AC Mode 80MHz Power Spectral Density (5775 MHz; 87.4534 MHz)


Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v01r02 and ANSI C63.10

Result

DUT Frequency (MHz)	Frequency (MHz)	PSD (dBm)	Limit Max (dBm)	Result
5775.000000	5800.590057	-4.048	30.0	PASS

Ports

Port	Duty Cycle (%)
1	86.732

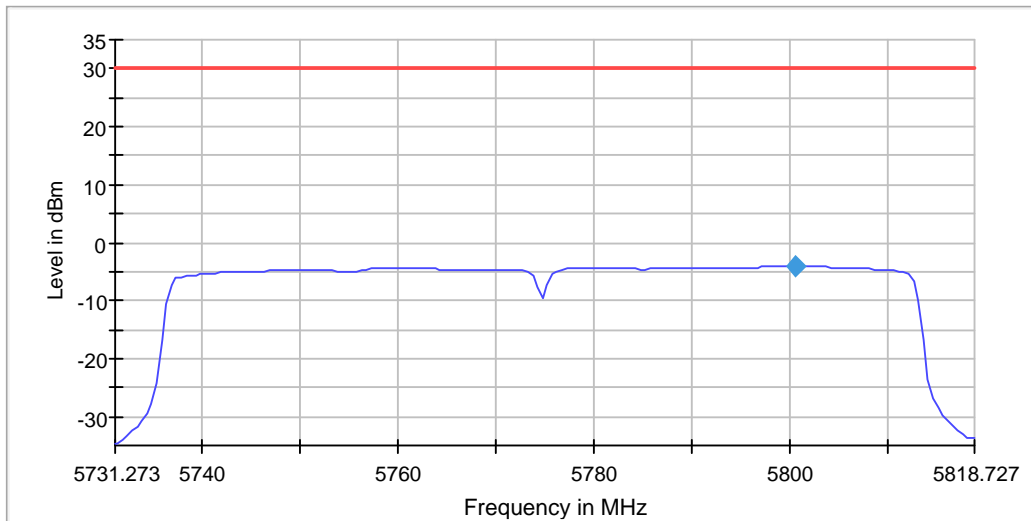

Measurement


Setting	Instrument Value	Target Value
Start Frequency	5.73127 GHz	5.73127 GHz
Stop Frequency	5.81873 GHz	5.81873 GHz
Span	87.453 MHz	87.453 MHz
RBW	1.000 MHz	<= 1.000 MHz
VBW	3.000 MHz	>= 3.000 MHz
SweepPoints	175	~ 175
SweepTime	3.500 s	3.500 s
Reference Level	-30.000 dBm	-30.000 dBm
Attenuation	0.000 dB	AUTO
Detector	RMS	RMS
SweepCount	3	3
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.30	0.30
Run	3 / max. 15	max. 15
Stable	3 / 3	3

Minimum Emission Bandwidth 6 dB (5775 MHz; 80 MHz)

Test according to FCC title 47 part 15 §15.407(a),(e), KDB 789033 D02 General U-NII Test Procedures New Rules v01r02 and ANSI C63.10

6 dB Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)	Max Level (dBm)	Result
5775.000000	76.252342	0.500000	---	5736.923798	5813.176140	-3.4	PASS

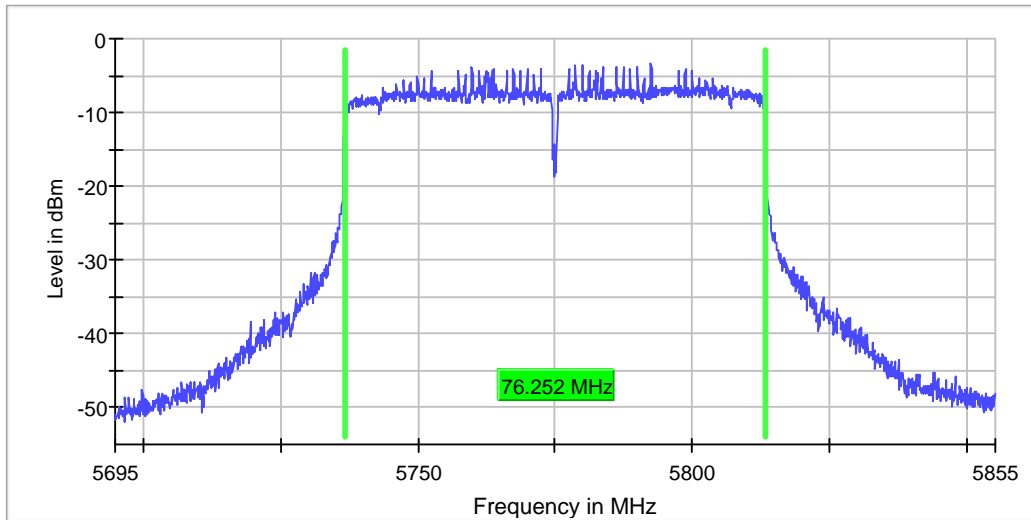

Measurement


Setting	Instrument Value	Target Value
Start Frequency	5.69500 GHz	5.69500 GHz
Stop Frequency	5.85500 GHz	5.85500 GHz
Span	160.000 MHz	160.000 MHz
RBW	100.000 kHz	~ 100.000 kHz
VBW	300.000 kHz	~ 300.000 kHz
SweepPoints	1600	~ 1600
SweepTime	189.620 μs	AUTO
Reference Level	-20.000 dBm	-20.000 dBm
Attenuation	0.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	200	200
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	FFT	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.30	0.30
Run	99 / max. 150	max. 150
Stable	5 / 5	5

Emission Bandwidth 26 dB (5775 MHz; 80 MHz)

Test according to FCC title 47 part 15 §15.407(a),(e), KDB 789033 D02 General U-NII Test Procedures New Rules v01r02 and ANSI C63.10

26 dB Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)	Max Level (dBm)	Result
5775.000000	87.453416	---	---	5731.273292	5818.726708	6.7	PASS

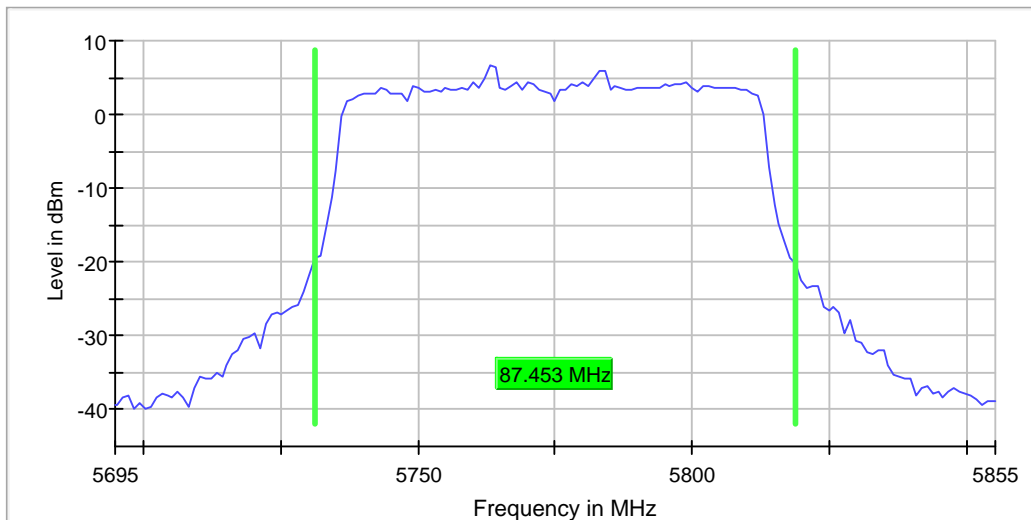

Measurement


Setting	Instrument Value	Target Value
Start Frequency	5.69500 GHz	5.69500 GHz
Stop Frequency	5.85500 GHz	5.85500 GHz
Span	160.000 MHz	160.000 MHz
RBW	1.000 MHz	~ 800.000 kHz
VBW	3.000 MHz	>= 3.000 MHz
SweepPoints	160	~ 160
SweepTime	22.754 μs	AUTO
Reference Level	-10.000 dBm	-10.000 dBm
Attenuation	10.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	200	200
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	FFT	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.30	0.30
Run	28 / max. 150	max. 150
Stable	5 / 5	5

Occupied Channel Bandwidth 99% (5775 MHz; 80 MHz)

Test according to FCC title 47 part 15 §15.407(a),(e), KDB 789033 D02 General U-NII Test Procedures New Rules v01r02 and ANSI C63.10

99 % Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)	Result
5775.000000	76.261682	---	---	5736.619938	5812.881620	PASS

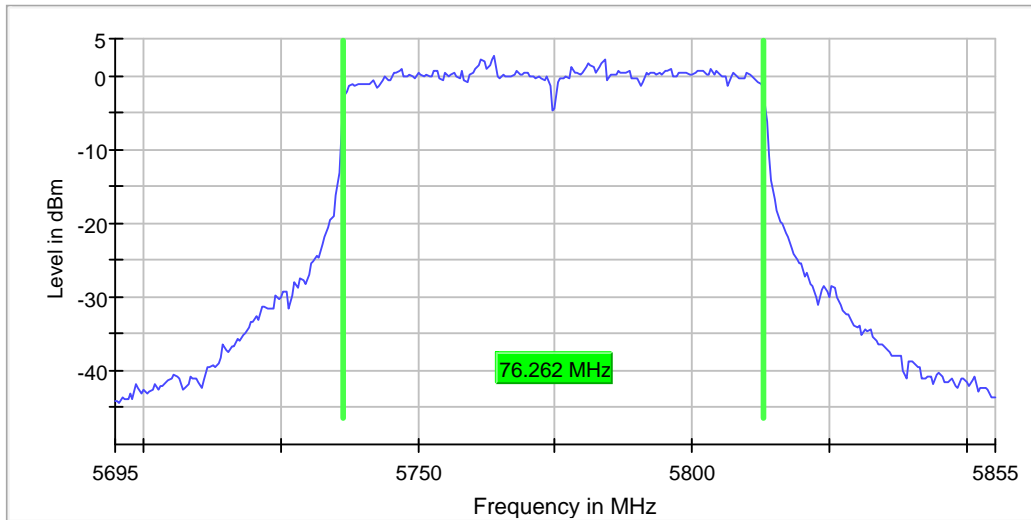

Measurement

Setting	Instrument Value	Target Value
Start Frequency	5.69500 GHz	5.69500 GHz
Stop Frequency	5.85500 GHz	5.85500 GHz
Span	160.000 MHz	160.000 MHz
RBW	500.000 kHz	<= 800.000 kHz
VBW	2.000 MHz	>= 1.500 MHz
SweepPoints	320	~ 320
Sweeptime	37.924 µs	AUTO
Reference Level	-20.000 dBm	-20.000 dBm
Attenuation	0.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	200	200
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
Sweeptype	FFT	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.30	0.30
Run	43 / max. 150	max. 150
Stable	5 / 5	5

Band Edge low (5775 MHz; 80 MHz)

Test according to FCC title 47 part 15 §15.407(b), KDB 789033 D02 General U-NII Test Procedures New Rules v01r02 and ANSI C63.10

Result


DUT Frequency (MHz)	Result
5775.000000	PASS

Inband Peak

Frequency (MHz)	Level (dBm)
5800.448207	-4.8

Measurements

Frequency (MHz)	Level (dBm)	Margin (dB)	Limit (dBm)	Result
5390.196405	-55.5	14.3	-41.2	PASS
5378.212383	-55.5	14.3	-41.2	PASS
5386.701065	-55.6	14.3	-41.2	PASS
5397.686418	-55.6	14.3	-41.2	PASS
5388.698402	-55.6	14.3	-41.2	PASS
5393.691744	-55.6	14.3	-41.2	PASS
5384.703728	-55.6	14.3	-41.2	PASS
5387.699734	-55.6	14.4	-41.2	PASS
5386.201731	-55.6	14.4	-41.2	PASS
5382.706391	-55.6	14.4	-41.2	PASS
5374.217710	-55.6	14.4	-41.2	PASS
5377.713049	-55.6	14.4	-41.2	PASS
5385.702397	-55.6	14.4	-41.2	PASS
5388.199068	-55.6	14.4	-41.2	PASS
5378.711718	-55.6	14.4	-41.2	PASS

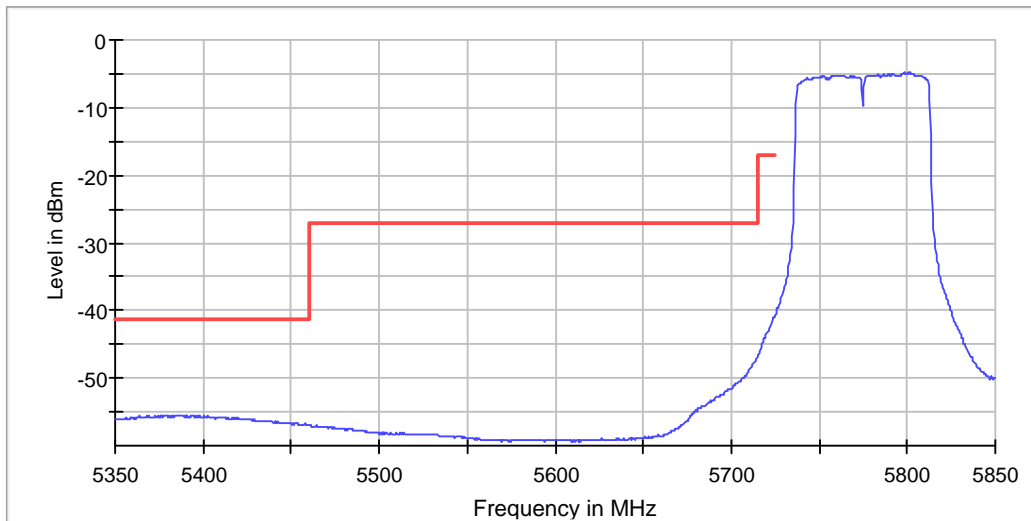

Measurement 1

Setting	Instrument Value	Target Value
RBW	1.000 MHz	<= 1.000 MHz
VBW	3.000 MHz	>= 3.000 MHz
SweepPoints	250	~ 250
SweepTime	250.000 ms	250.000 ms
Reference Level	-20.000 dBm	-20.000 dBm
Attenuation	0.000 dB	AUTO
Detector	RMS	RMS
SweepCount	5	5
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.30	0.30
Run	3 / max. 15	max. 15
Stable	3 / 3	3

Measurement 2

Setting	Instrument Value	Target Value
RBW	1.000 MHz	<= 1.000 MHz
VBW	3.000 MHz	>= 3.000 MHz
SweepPoints	750	~ 750
SweepTime	750.000 ms	750.000 ms
Reference Level	-20.000 dBm	-20.000 dBm
Attenuation	0.000 dB	AUTO
Detector	RMS	RMS
SweepCount	5	5
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.30	0.30
Run	3 / max. 15	max. 15
Stable	3 / 3	3

Band Edge high (5775 MHz; 80 MHz)

Test according to FCC title 47 part 15 §15.407(b), KDB 789033 D02 General U-NII Test Procedures New Rules v01r02 and ANSI C63.10

Result


DUT Frequency (MHz)	Result
5775.000000	PASS

Inband Peak

Frequency (MHz)	Level (dBm)
5801.444223	-4.9

Measurements

Frequency (MHz)	Level (dBm)	Margin (dB)	Limit (dBm)	Result
7303.415402	-64.0	22.8	-41.2	PASS
7296.917808	-64.1	22.8	-41.2	PASS
7300.416512	-64.1	22.9	-41.2	PASS
7299.416883	-64.1	22.9	-41.2	PASS
7305.414661	-64.1	22.9	-41.2	PASS
7294.418734	-64.1	22.9	-41.2	PASS
7295.918178	-64.2	23.0	-41.2	PASS
7305.914476	-64.2	23.0	-41.2	PASS
7301.416142	-64.2	23.0	-41.2	PASS
7294.918549	-64.2	23.0	-41.2	PASS
7292.919289	-64.2	23.0	-41.2	PASS
7284.422436	-64.2	23.0	-41.2	PASS
7302.415772	-64.2	23.0	-41.2	PASS
7300.916327	-64.2	23.0	-41.2	PASS
7298.417253	-64.2	23.0	-41.2	PASS

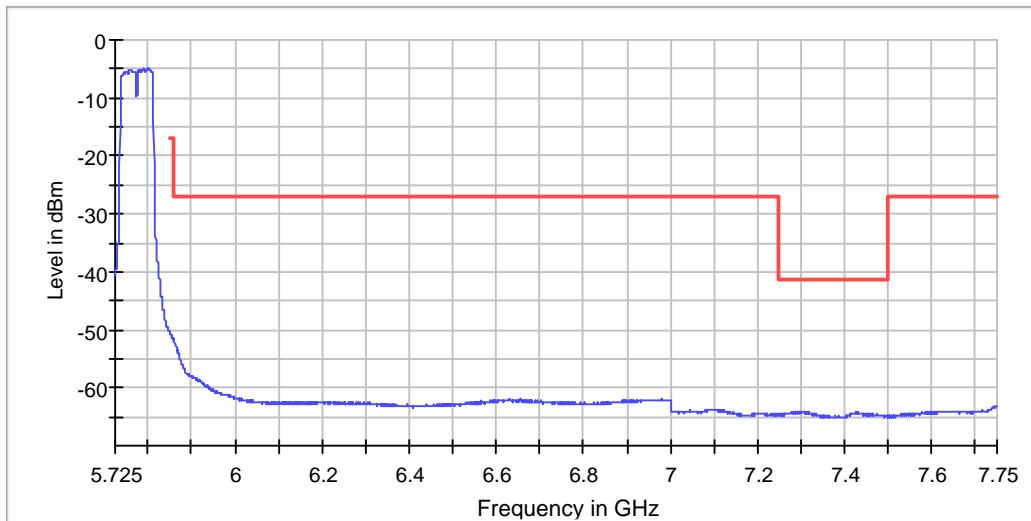

Measurement 1

Setting	Instrument Value	Target Value
RBW	1.000 MHz	<= 1.000 MHz
VBW	3.000 MHz	>= 3.000 MHz
SweepPoints	250	~ 250
SweepTime	250.000 ms	250.000 ms
Reference Level	-20.000 dBm	-20.000 dBm
Attenuation	0.000 dB	AUTO
Detector	RMS	RMS
SweepCount	5	5
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.30	0.30
Run	3 / max. 15	max. 15
Stable	3 / 3	3

Measurement 2

Setting	Instrument Value	Target Value
RBW	1.000 MHz	<= 1.000 MHz
VBW	3.000 MHz	>= 3.000 MHz
SweepPoints	1100	~ 1100
SweepTime	1.100 s	1.100 s
Reference Level	-20.000 dBm	-20.000 dBm
Attenuation	0.000 dB	AUTO
Detector	RMS	RMS
SweepCount	5	5
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.30	0.30
Run	3 / max. 15	max. 15
Stable	3 / 3	3

Tx Spurious Emission (5775 MHz; 80 MHz)

Test according to FCC title 47 part 15 §15.407(b), KDB 789033 D02 General U-NII Test Procedures New Rules v01r02 and ANSI C63.10

Result

DUT Frequency (MHz)	Result
5775.000000	PASS

Final measurements


Frequency (MHz)	Level Pre Measurement (dBm)	level (dBm)	Limit (dBm)	Margin (dB)	Result
5401.074380	-46.4	-56.6	-41.2	15.4	PASS

Pre Measurements

Frequency (MHz)	Level (dBm)	Margin (dB)	Limit (dBm)
5401.074380	-46.4	5.2	-41.2
5423.884298	-46.9	5.7	-41.2
5407.024793	-47.1	5.9	-41.2
18885.874428	-47.3	6.0	-41.2
5420.909091	-47.3	6.1	-41.2
5394.132231	-47.3	6.1	-41.2
5400.082645	-47.5	6.2	-41.2
5361.404959	-47.5	6.2	-41.2
5404.049587	-47.5	6.3	-41.2
5380.247934	-47.6	6.3	-41.2
5419.917355	-47.7	6.5	-41.2
5360.413223	-47.7	6.5	-41.2
5418.925620	-47.7	6.5	-41.2
5457.603306	-47.8	6.6	-41.2
5447.685950	-47.9	6.7	-41.2

Measurement Settings

Start Frequency (MHz)	Stop Frequency (MHz)	Pre Measurement	Final Measurement
30.000000	1000.000000	1	1
1000.000000	5150.000000	2	2
5150.000000	5250.000000	2	2
5250.000000	5350.000000	2	2
5350.000000	5470.000000	2	2
5470.000000	5725.000000	2	2
5725.000000	5850.000000	2	2
5850.000000	7000.000000	2	2
7000.000000	26000.000000	2	2
26000.000000	40000.000000	2	2

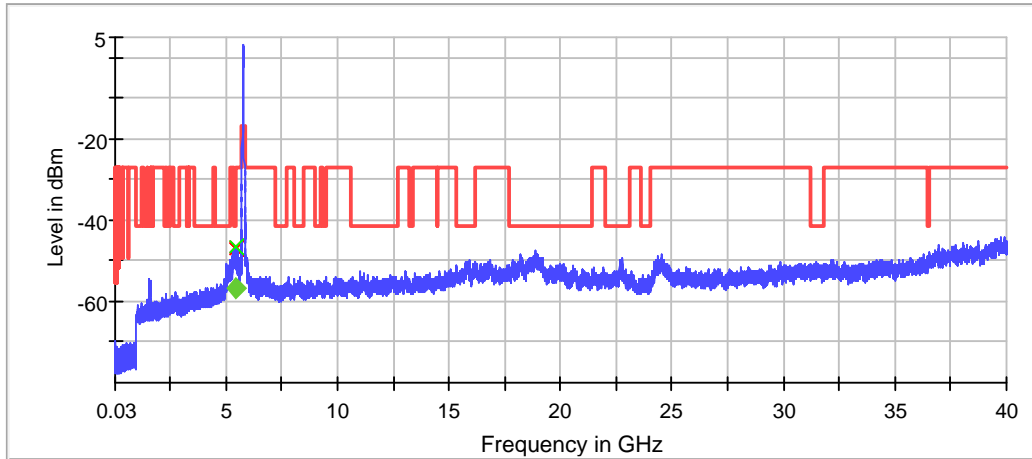

— Limit [limit.Result:1] x Threshold [limit 2.Result:1]
◆ Critical [Over Limit.Result:1] ◆ Sum Level [trace.Result:1]

Final Measurement

Setting	Instrument Value	Target Value
Span	ZeroSpan	ZeroSpan
RBW	1.000 MHz	~ 1.000 MHz
VBW	3.000 MHz	~ 3.000 MHz
SweepPoints	10001	~ 10001
Sweeptime	50.000 ms	50.000 ms
Reference Level	-20.000 dBm	-20.000 dBm
Attenuation	0.000 dB	0.000 dB
Detector	RMS	RMS
SweepCount	1	1
Filter	3 dB	3 dB
Trace Mode	Clear Write	Clear Write
SweepType	Sweep	AUTO
Preamp	off	off

UNII-3 ANT0 NHT20 Mode Power Spectral Density (5745 MHz; 23.2836 MHz)


Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v01r02 and ANSI C63.10

Result

DUT Frequency (MHz)	Frequency (MHz)	PSD (dBm)	Limit Max (dBm)	Result
5745.000000	5750.592629	1.847	30.0	PASS

Ports

Port	Duty Cycle (%)
1	95.181

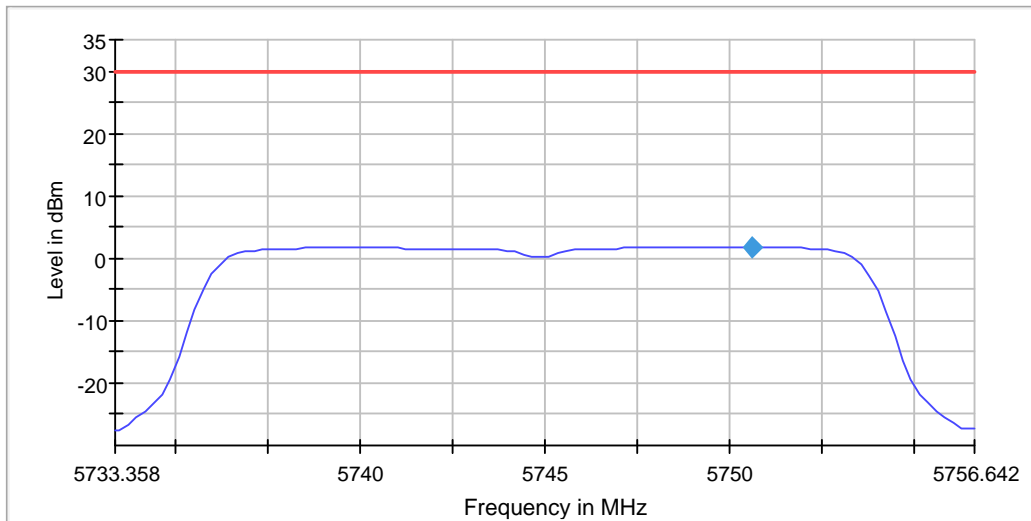

Measurement


Setting	Instrument Value	Target Value
Start Frequency	5.73336 GHz	5.73336 GHz
Stop Frequency	5.75664 GHz	5.75664 GHz
Span	23.284 MHz	23.284 MHz
RBW	1.000 MHz	<= 1.000 MHz
VBW	3.000 MHz	>= 3.000 MHz
SweepPoints	101	~ 47
SweepTime	2.020 s	2.020 s
Reference Level	-20.000 dBm	-20.000 dBm
Attenuation	0.000 dB	AUTO
Detector	RMS	RMS
SweepCount	3	3
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.30	0.30
Run	3 / max. 15	max. 15
Stable	3 / 3	3

Minimum Emission Bandwidth 6 dB (5745 MHz; 20 MHz)

Test according to FCC title 47 part 15 §15.407(a),(e), KDB 789033 D02 General U-NII Test Procedures New Rules v01r02 and ANSI C63.10

6 dB Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)	Max Level (dBm)	Result
5745.000000	17.755611	0.500000	---	5736.022444	5753.778055	1.0	PASS

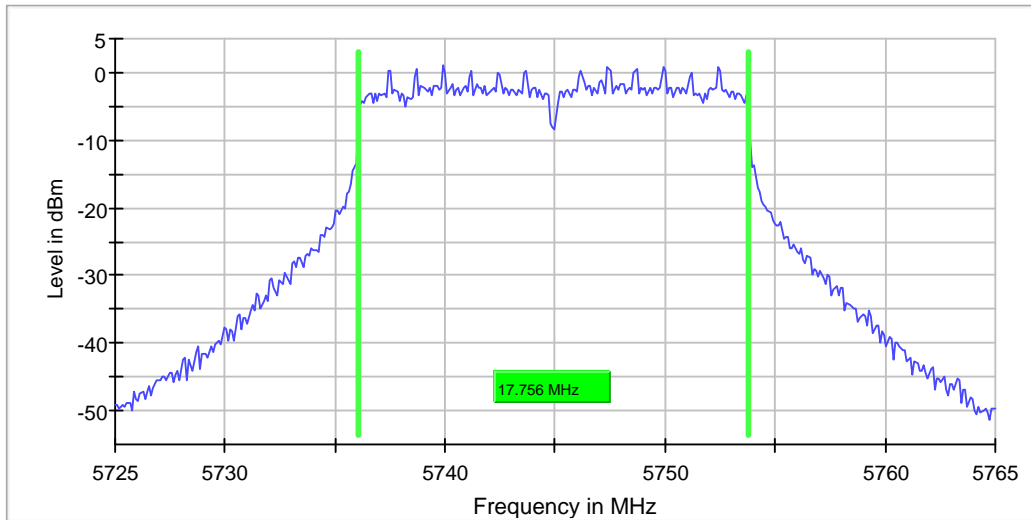

Measurement


Setting	Instrument Value	Target Value
Start Frequency	5.72500 GHz	5.72500 GHz
Stop Frequency	5.76500 GHz	5.76500 GHz
Span	40.000 MHz	40.000 MHz
RBW	100.000 kHz	~ 100.000 kHz
VBW	300.000 kHz	~ 300.000 kHz
SweepPoints	400	~ 400
SweepTime	56.886 μ s	AUTO
Reference Level	-20.000 dBm	-20.000 dBm
Attenuation	0.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	200	200
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	FFT	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.30	0.30
Run	74 / max. 150	max. 150
Stable	5 / 5	5

Emission Bandwidth 26 dB (5745 MHz; 20 MHz)

Test according to FCC title 47 part 15 §15.407(a),(e), KDB 789033 D02 General U-NII Test Procedures New Rules v01r02 and ANSI C63.10

26 dB Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)	Max Level (dBm)	Result
5745.000000	23.283583	---	---	5733.059701	5756.343284	1.9	PASS

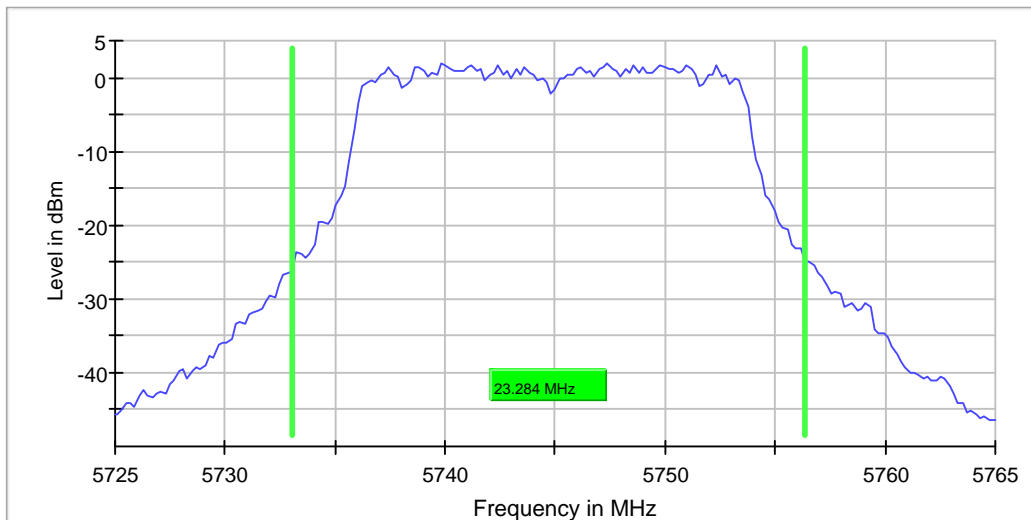

Measurement


Setting	Instrument Value	Target Value
Start Frequency	5.72500 GHz	5.72500 GHz
Stop Frequency	5.76500 GHz	5.76500 GHz
Span	40.000 MHz	40.000 MHz
RBW	200.000 kHz	~ 200.000 kHz
VBW	1.000 MHz	>= 600.000 kHz
SweepPoints	200	~ 200
SweepTime	28.443 μs	AUTO
Reference Level	-10.000 dBm	-10.000 dBm
Attenuation	10.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	200	200
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	FFT	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.30	0.30
Run	52 / max. 150	max. 150
Stable	5 / 5	5

Occupied Channel Bandwidth 99% (5745 MHz; 20 MHz)

Test according to FCC title 47 part 15 §15.407(a),(e), KDB 789033 D02 General U-NII Test Procedures New Rules v01r02 and ANSI C63.10

99 % Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)	Result
5745.000000	17.711443	---	---	5736.044776	5753.756219	PASS

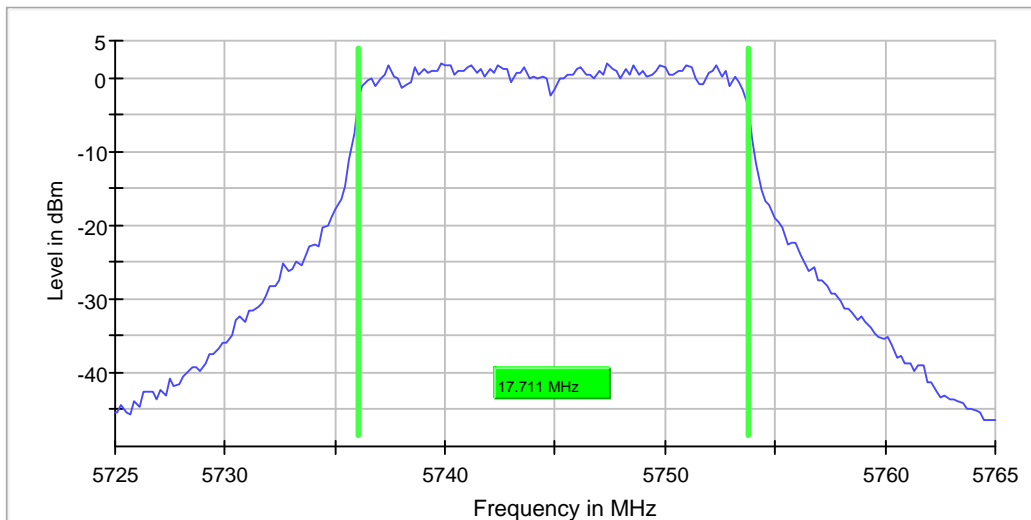

Measurement

Setting	Instrument Value	Target Value
Start Frequency	5.72500 GHz	5.72500 GHz
Stop Frequency	5.76500 GHz	5.76500 GHz
Span	40.000 MHz	40.000 MHz
RBW	200.000 kHz	<= 200.000 kHz
VBW	1.000 MHz	>= 600.000 kHz
SweepPoints	200	~ 200
SweepTime	28.443 μs	AUTO
Reference Level	-10.000 dBm	-10.000 dBm
Attenuation	10.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	200	200
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	FFT	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.30	0.30
Run	38 / max. 150	max. 150
Stable	5 / 5	5

Band Edge low (5745 MHz; 20 MHz)

Test according to FCC title 47 part 15 §15.407(b), KDB 789033 D02 General U-NII Test Procedures New Rules v01r02 and ANSI C63.10

Result


DUT Frequency (MHz)	Result
5745.000000	PASS

Inband Peak

Frequency (MHz)	Level (dBm)
5751.145418	0.4

Measurements

Frequency (MHz)	Level (dBm)	Margin (dB)	Limit (dBm)	Result
5386.701065	-54.2	13.0	-41.2	PASS
5377.713049	-54.3	13.1	-41.2	PASS
5392.693076	-54.3	13.1	-41.2	PASS
5390.695739	-54.3	13.1	-41.2	PASS
5393.192410	-54.3	13.1	-41.2	PASS
5367.726365	-54.3	13.1	-41.2	PASS
5388.199068	-54.3	13.1	-41.2	PASS
5378.212383	-54.3	13.1	-41.2	PASS
5393.691744	-54.3	13.1	-41.2	PASS
5396.188415	-54.3	13.1	-41.2	PASS
5374.217710	-54.3	13.1	-41.2	PASS
5390.196405	-54.3	13.1	-41.2	PASS
5392.193742	-54.3	13.1	-41.2	PASS
5377.213715	-54.3	13.1	-41.2	PASS
5385.203063	-54.3	13.1	-41.2	PASS

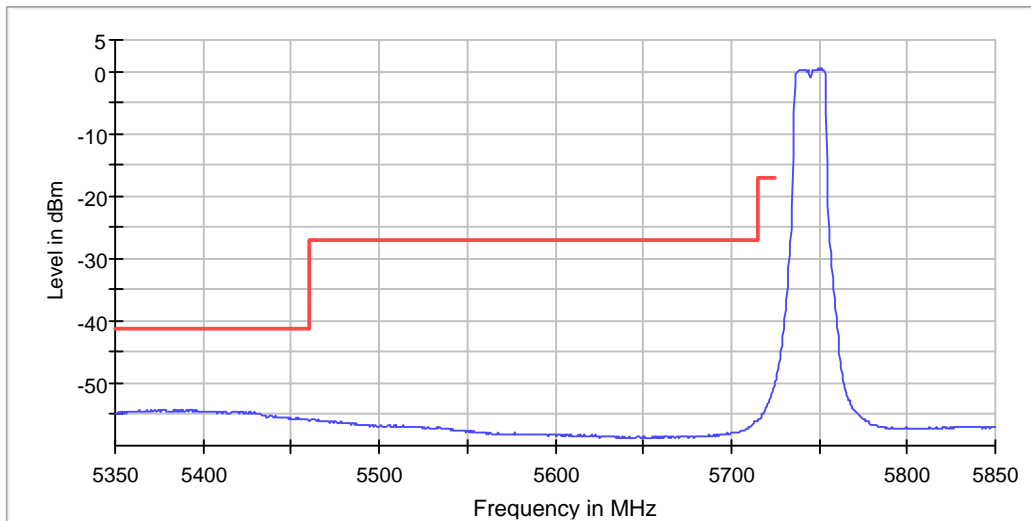

Measurement 1

Setting	Instrument Value	Target Value
RBW	1.000 MHz	<= 1.000 MHz
VBW	3.000 MHz	>= 3.000 MHz
SweepPoints	250	~ 250
SweepTime	250.000 ms	250.000 ms
Reference Level	-20.000 dBm	-20.000 dBm
Attenuation	0.000 dB	AUTO
Detector	RMS	RMS
SweepCount	5	5
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.30	0.30
Run	3 / max. 15	max. 15
Stable	3 / 3	3

Measurement 2

Setting	Instrument Value	Target Value
RBW	1.000 MHz	<= 1.000 MHz
VBW	3.000 MHz	>= 3.000 MHz
SweepPoints	750	~ 750
SweepTime	750.000 ms	750.000 ms
Reference Level	-20.000 dBm	-20.000 dBm
Attenuation	0.000 dB	AUTO
Detector	RMS	RMS
SweepCount	5	5
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.30	0.30
Run	3 / max. 15	max. 15
Stable	3 / 3	3

Tx Spurious Emission (5745 MHz; 20 MHz)

Test according to FCC title 47 part 15 §15.407(b), KDB 789033 D02 General U-NII Test Procedures New Rules v01r02 and ANSI C63.10

Result

DUT Frequency (MHz)	Result
5745.000000	PASS

Final measurements


Frequency (MHz)	Level Pre Measurement (dBm)	level (dBm)	Limit (dBm)	Margin (dB)	Result
5391.157025	-44.0	-54.6	-41.2	13.4	PASS

Pre Measurements

Frequency (MHz)	Level (dBm)	Margin (dB)	Limit (dBm)
5391.157025	-44.0	2.8	-41.2
5392.148760	-44.2	2.9	-41.2
5393.140496	-45.1	3.9	-41.2
5386.198347	-45.3	4.1	-41.2
5390.165289	-45.3	4.1	-41.2
5367.355372	-45.3	4.1	-41.2
5372.314050	-45.6	4.4	-41.2
5374.297521	-45.7	4.5	-41.2
5371.322314	-45.8	4.6	-41.2
5419.917355	-46.0	4.8	-41.2
5420.909091	-46.1	4.8	-41.2
5370.330579	-46.1	4.8	-41.2
5375.289256	-46.1	4.8	-41.2
5416.942149	-46.1	4.8	-41.2
5388.181818	-46.1	4.9	-41.2

Measurement Settings

Start Frequency (MHz)	Stop Frequency (MHz)	Pre Measurement	Final Measurement
30.000000	1000.000000	1	1
1000.000000	5150.000000	2	2
5150.000000	5250.000000	2	2
5250.000000	5350.000000	2	2
5350.000000	5470.000000	2	2
5470.000000	5725.000000	2	2
5725.000000	5850.000000	2	2
5850.000000	7000.000000	2	2
7000.000000	26000.000000	2	2
26000.000000	40000.000000	2	2

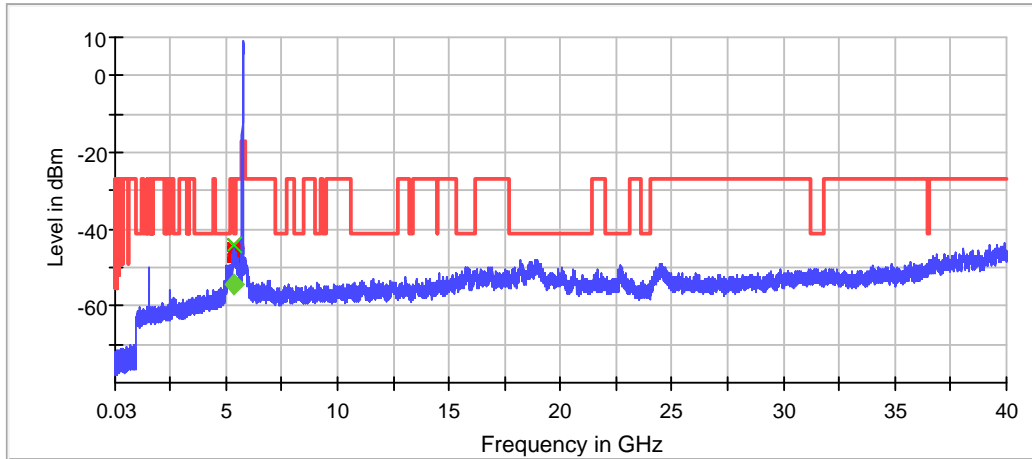

◆ Limit [limit.Result:1] × Threshold [limit 2.Result:1]
◆ Critical [Over Limit.Result:1] ◆ Sum Level [trace.Result:1]

Final Measurement

Setting	Instrument Value	Target Value
Span	ZeroSpan	ZeroSpan
RBW	1.000 MHz	~ 1.000 MHz
VBW	3.000 MHz	~ 3.000 MHz
SweepPoints	10001	~ 10001
Sweeptime	50.000 ms	50.000 ms
Reference Level	-20.000 dBm	-20.000 dBm
Attenuation	0.000 dB	0.000 dB
Detector	RMS	RMS
SweepCount	1	1
Filter	3 dB	3 dB
Trace Mode	Clear Write	Clear Write
SweepType	Sweep	AUTO
Preamp	off	off

Power Spectral Density (5785 MHz; 23.0846 MHz)


Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v01r02 and ANSI C63.10

Result

DUT Frequency (MHz)	Frequency (MHz)	PSD (dBm)	Limit Max (dBm)	Result
5785.000000	5790.092191	1.807	30.0	PASS

Ports

Port	Duty Cycle (%)
1	95.555

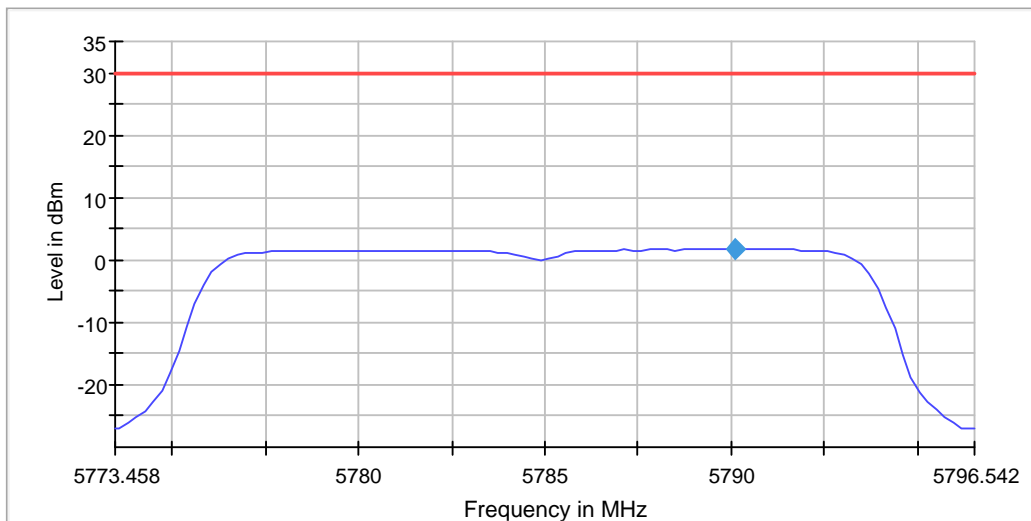

Measurement


Setting	Instrument Value	Target Value
Start Frequency	5.77346 GHz	5.77346 GHz
Stop Frequency	5.79654 GHz	5.79654 GHz
Span	23.085 MHz	23.085 MHz
RBW	1.000 MHz	<= 1.000 MHz
VBW	3.000 MHz	>= 3.000 MHz
SweepPoints	101	~ 46
SweepTime	2.020 s	2.020 s
Reference Level	-20.000 dBm	-20.000 dBm
Attenuation	0.000 dB	AUTO
Detector	RMS	RMS
SweepCount	3	3
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.30	0.30
Run	3 / max. 15	max. 15
Stable	3 / 3	3

Minimum Emission Bandwidth 6 dB (5785 MHz; 20 MHz)

Test according to FCC title 47 part 15 §15.407(a),(e), KDB 789033 D02 General U-NII Test Procedures New Rules v01r02 and ANSI C63.10

6 dB Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)	Max Level (dBm)	Result
5785.000000	17.655860	0.500000	---	5776.122195	5793.778055	1.5	PASS

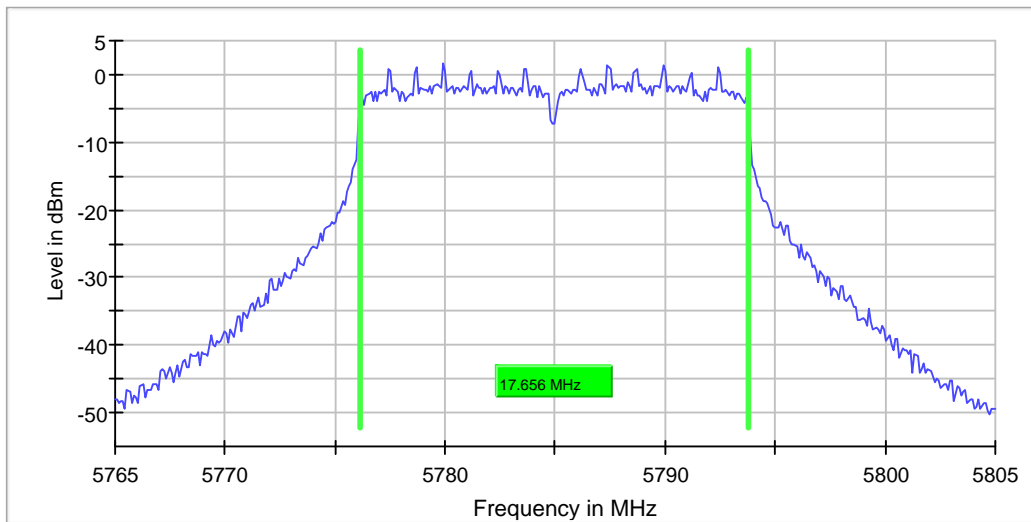

Measurement


Setting	Instrument Value	Target Value
Start Frequency	5.76500 GHz	5.76500 GHz
Stop Frequency	5.80500 GHz	5.80500 GHz
Span	40.000 MHz	40.000 MHz
RBW	100.000 kHz	~ 100.000 kHz
VBW	300.000 kHz	~ 300.000 kHz
SweepPoints	400	~ 400
Sweeptime	56.886 μ s	AUTO
Reference Level	-20.000 dBm	-20.000 dBm
Attenuation	0.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	200	200
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
Sweeptype	FFT	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.30	0.30
Run	61 / max. 150	max. 150
Stable	5 / 5	5

Emission Bandwidth 26 dB (5785 MHz; 20 MHz)

Test according to FCC title 47 part 15 §15.407(a),(e), KDB 789033 D02 General U-NII Test Procedures New Rules v01r02 and ANSI C63.10

26 dB Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)	Max Level (dBm)	Result
5785.000000	23.084578	---	---	5773.457711	5796.542289	2.4	PASS

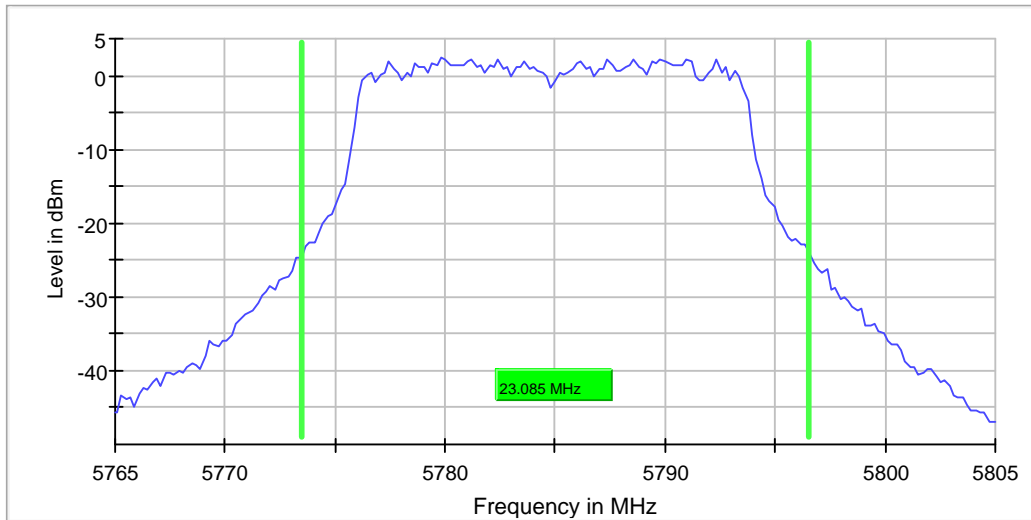

Measurement


Setting	Instrument Value	Target Value
Start Frequency	5.76500 GHz	5.76500 GHz
Stop Frequency	5.80500 GHz	5.80500 GHz
Span	40.000 MHz	40.000 MHz
RBW	200.000 kHz	~ 200.000 kHz
VBW	1.000 MHz	>= 600.000 kHz
SweepPoints	200	~ 200
Sweeptime	28.443 μs	AUTO
Reference Level	-10.000 dBm	-10.000 dBm
Attenuation	10.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	200	200
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
Sweeptype	FFT	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.30	0.30
Run	34 / max. 150	max. 150
Stable	5 / 5	5

Occupied Channel Bandwidth 99% (5785 MHz; 20 MHz)

Test according to FCC title 47 part 15 §15.407(a),(e), KDB 789033 D02 General U-NII Test Procedures New Rules v01r02 and ANSI C63.10

99 % Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)	Result
5785.000000	17.711443	---	---	5776.044776	5793.756219	PASS

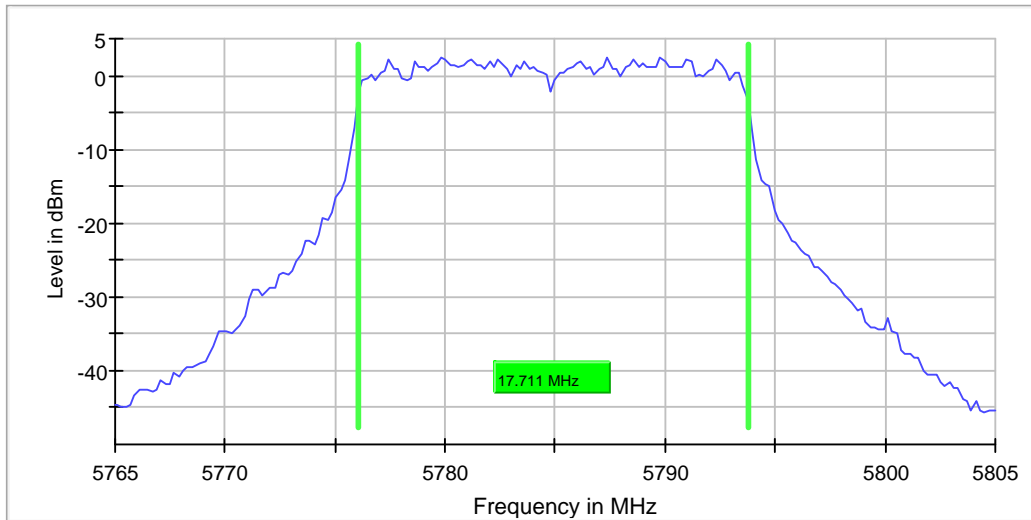

Measurement

Setting	Instrument Value	Target Value
Start Frequency	5.76500 GHz	5.76500 GHz
Stop Frequency	5.80500 GHz	5.80500 GHz
Span	40.000 MHz	40.000 MHz
RBW	200.000 kHz	<= 200.000 kHz
VBW	1.000 MHz	>= 600.000 kHz
SweepPoints	200	~ 200
Sweeptime	28.443 μs	AUTO
Reference Level	-10.000 dBm	-10.000 dBm
Attenuation	10.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	200	200
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
Sweeptype	FFT	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.30	0.30
Run	45 / max. 150	max. 150
Stable	5 / 5	5

Tx Spurious Emission (5785 MHz; 20 MHz)

Test according to FCC title 47 part 15 §15.407(b), KDB 789033 D02 General U-NII Test Procedures New Rules v01r02 and ANSI C63.10

Result

DUT Frequency (MHz)	Result
5785.000000	PASS

Final measurements


Frequency (MHz)	Level Pre Measurement (dBm)	level (dBm)	Limit (dBm)	Margin (dB)	Result
5387.190083	-44.3	-54.3	-41.2	13.1	PASS

Pre Measurements

Frequency (MHz)	Level (dBm)	Margin (dB)	Limit (dBm)
5387.190083	-44.3	3.1	-41.2
5386.198347	-45.1	3.9	-41.2
5389.173554	-45.3	4.1	-41.2
5378.264463	-45.4	4.1	-41.2
5419.917355	-45.5	4.3	-41.2
5431.818182	-45.5	4.3	-41.2
5384.214876	-45.6	4.4	-41.2
5364.380165	-45.6	4.4	-41.2
5379.256198	-45.6	4.4	-41.2
5420.909091	-45.7	4.4	-41.2
5400.082645	-45.9	4.6	-41.2
5430.826446	-46.0	4.7	-41.2
5361.404959	-46.0	4.8	-41.2
5368.347107	-46.0	4.8	-41.2
5411.983471	-46.1	4.9	-41.2

Measurement Settings

Start Frequency (MHz)	Stop Frequency (MHz)	Pre Measurement	Final Measurement
30.000000	1000.000000	1	1
1000.000000	5150.000000	2	2
5150.000000	5250.000000	2	2
5250.000000	5350.000000	2	2
5350.000000	5470.000000	2	2
5470.000000	5725.000000	2	2
5725.000000	5850.000000	2	2
5850.000000	7000.000000	2	2
7000.000000	26000.000000	2	2
26000.000000	40000.000000	2	2

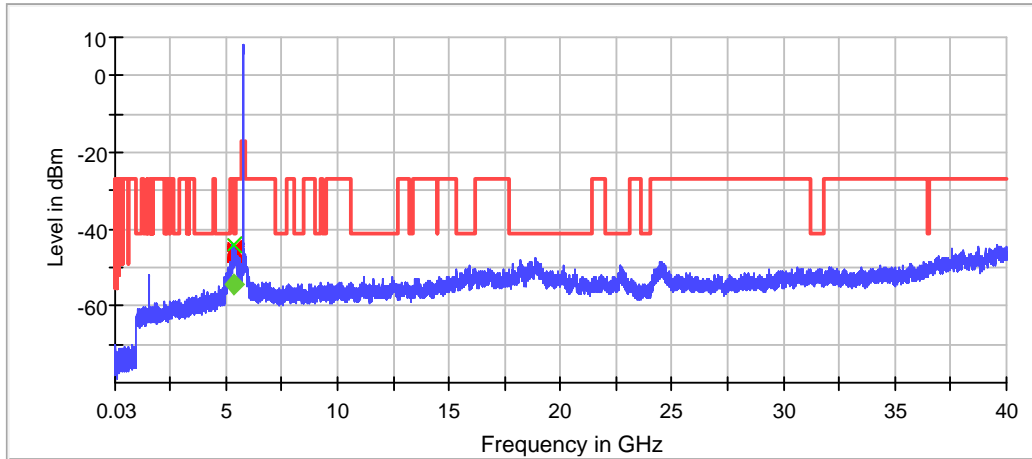

◆ Limit [limit.Result:1] × Threshold [limit 2.Result:1]
◆ Critical [Over Limit.Result:1] ◆ Sum Level [trace.Result:1]

Final Measurement

Setting	Instrument Value	Target Value
Span	ZeroSpan	ZeroSpan
RBW	1.000 MHz	~ 1.000 MHz
VBW	3.000 MHz	~ 3.000 MHz
SweepPoints	10001	~ 10001
Sweeptime	50.000 ms	50.000 ms
Reference Level	-20.000 dBm	-20.000 dBm
Attenuation	0.000 dB	0.000 dB
Detector	RMS	RMS
SweepCount	1	1
Filter	3 dB	3 dB
Trace Mode	Clear Write	Clear Write
SweepType	Sweep	AUTO
Preamp	off	off

Power Spectral Density (5825 MHz; 23.2836 MHz)


Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v01r02 and ANSI C63.10

Result

DUT Frequency (MHz)	Frequency (MHz)	PSD (dBm)	Limit Max (dBm)	Result
5745.000000	5750.592629	1.847	30.0	PASS

Ports

Port	Duty Cycle (%)
1	95.181

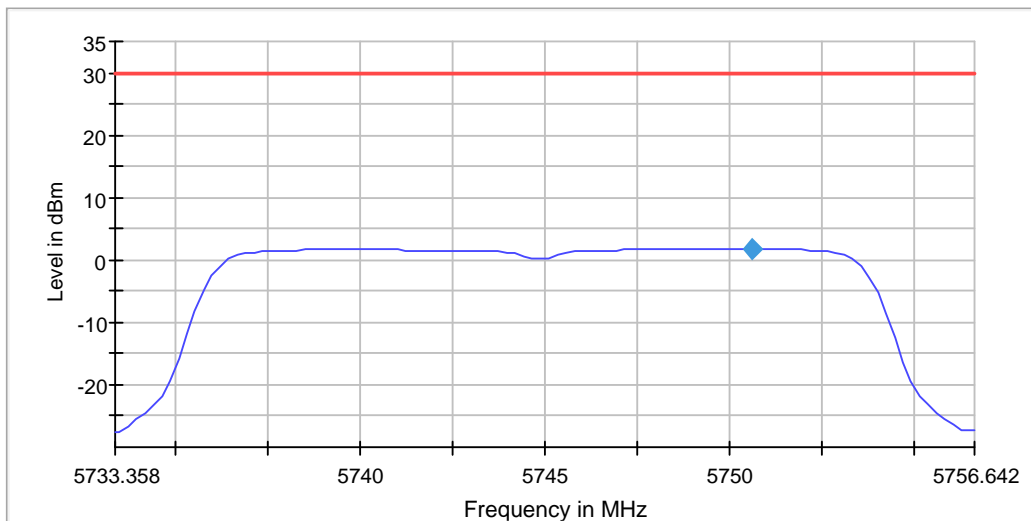

Measurement


Setting	Instrument Value	Target Value
Start Frequency	5.73336 GHz	5.73336 GHz
Stop Frequency	5.75664 GHz	5.75664 GHz
Span	23.284 MHz	23.284 MHz
RBW	1.000 MHz	<= 1.000 MHz
VBW	3.000 MHz	>= 3.000 MHz
SweepPoints	101	~ 47
SweepTime	2.020 s	2.020 s
Reference Level	-20.000 dBm	-20.000 dBm
Attenuation	0.000 dB	AUTO
Detector	RMS	RMS
SweepCount	3	3
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.30	0.30
Run	3 / max. 15	max. 15
Stable	3 / 3	3

Minimum Emission Bandwidth 6 dB (5825 MHz; 20 MHz)

Test according to FCC title 47 part 15 §15.407(a),(e), KDB 789033 D02 General U-NII Test Procedures New Rules v01r02 and ANSI C63.10

6 dB Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)	Max Level (dBm)	Result
5825.000000	17.655860	0.500000	---	5816.122195	5833.778055	1.9	PASS

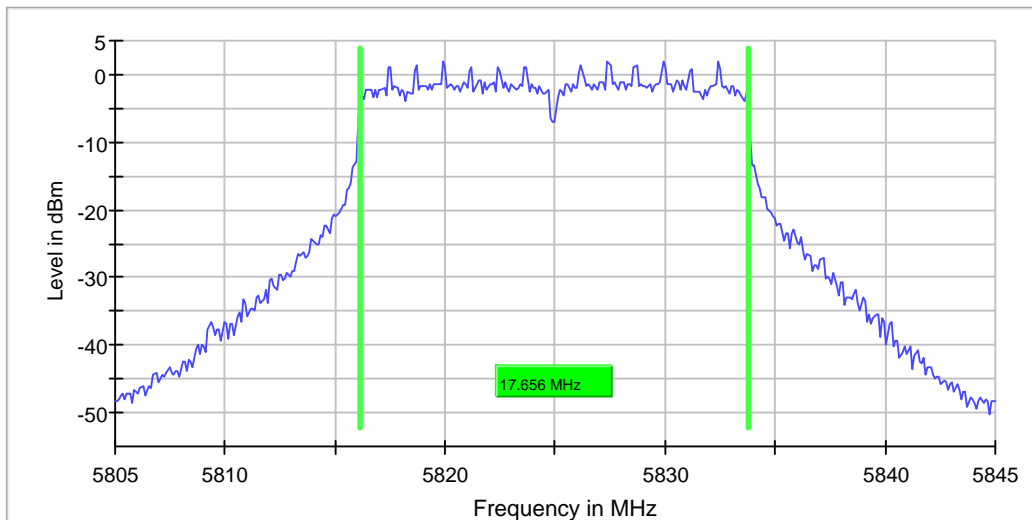

Measurement


Setting	Instrument Value	Target Value
Start Frequency	5.80500 GHz	5.80500 GHz
Stop Frequency	5.84500 GHz	5.84500 GHz
Span	40.000 MHz	40.000 MHz
RBW	100.000 kHz	~ 100.000 kHz
VBW	300.000 kHz	~ 300.000 kHz
SweepPoints	400	~ 400
SweepTime	56.886 μ s	AUTO
Reference Level	-20.000 dBm	-20.000 dBm
Attenuation	0.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	200	200
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	FFT	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.30	0.30
Run	70 / max. 150	max. 150
Stable	5 / 5	5

Emission Bandwidth 26 dB (5825 MHz; 20 MHz)

Test according to FCC title 47 part 15 §15.407(a),(e), KDB 789033 D02 General U-NII Test Procedures New Rules v01r02 and ANSI C63.10

26 dB Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)	Max Level (dBm)	Result
5825.000000	23.283583	---	---	5813.059701	5836.343284	2.8	PASS

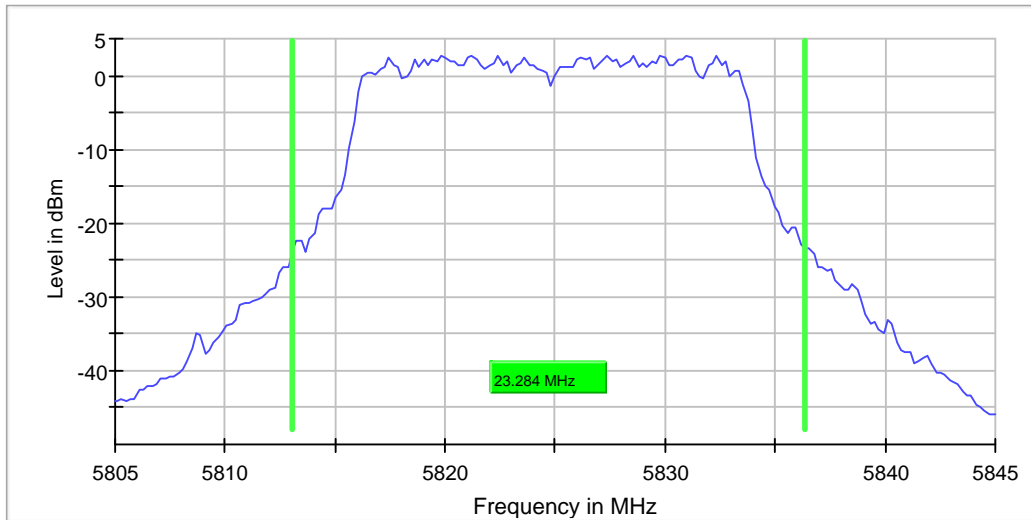

Measurement


Setting	Instrument Value	Target Value
Start Frequency	5.80500 GHz	5.80500 GHz
Stop Frequency	5.84500 GHz	5.84500 GHz
Span	40.000 MHz	40.000 MHz
RBW	200.000 kHz	~ 200.000 kHz
VBW	1.000 MHz	>= 600.000 kHz
SweepPoints	200	~ 200
Sweeptime	28.443 μs	AUTO
Reference Level	-10.000 dBm	-10.000 dBm
Attenuation	10.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	200	200
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
Sweeptype	FFT	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.30	0.30
Run	52 / max. 150	max. 150
Stable	5 / 5	5

Occupied Channel Bandwidth 99% (5825 MHz; 20 MHz)

Test according to FCC title 47 part 15 §15.407(a),(e), KDB 789033 D02 General U-NII Test Procedures New Rules v01r02 and ANSI C63.10

99 % Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)	Result
5825.000000	17.711443	---	---	5816.044776	5833.756219	PASS

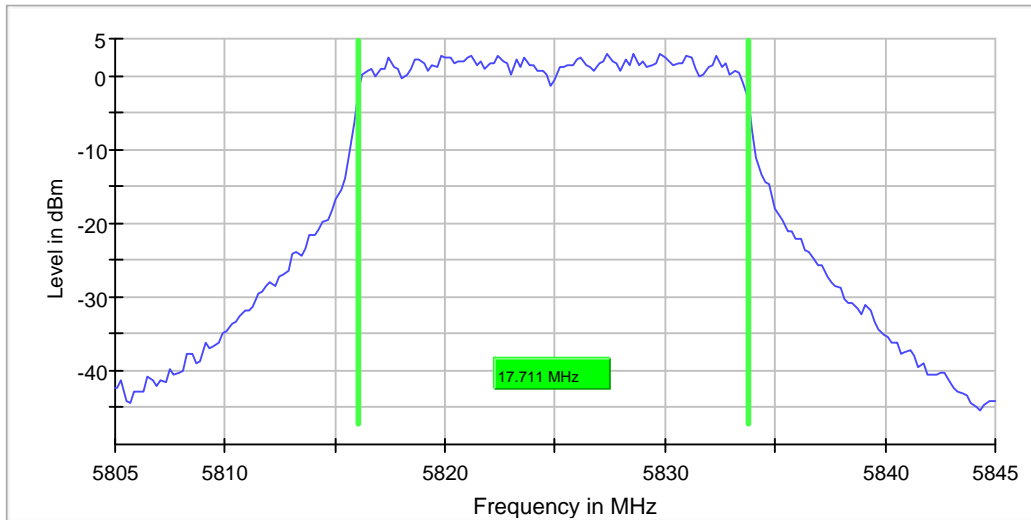

Measurement

Setting	Instrument Value	Target Value
Start Frequency	5.80500 GHz	5.80500 GHz
Stop Frequency	5.84500 GHz	5.84500 GHz
Span	40.000 MHz	40.000 MHz
RBW	200.000 kHz	<= 200.000 kHz
VBW	1.000 MHz	>= 600.000 kHz
SweepPoints	200	~ 200
Sweeptime	28.443 μs	AUTO
Reference Level	-10.000 dBm	-10.000 dBm
Attenuation	10.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	200	200
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
Sweeptype	FFT	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.30	0.30
Run	49 / max. 150	max. 150
Stable	5 / 5	5

Band Edge high (5825 MHz; 20 MHz)

Test according to FCC title 47 part 15 §15.407(b), KDB 789033 D02 General U-NII Test Procedures New Rules v01r02 and ANSI C63.10

Result


DUT Frequency (MHz)	Result
5825.000000	PASS

Inband Peak

Frequency (MHz)	Level (dBm)
5830.826693	1.2

Measurements

Frequency (MHz)	Level (dBm)	Margin (dB)	Limit (dBm)	Result
7303.915217	-64.0	22.8	-41.2	PASS
7302.415772	-64.1	22.9	-41.2	PASS
7301.915957	-64.1	22.9	-41.2	PASS
7302.915587	-64.1	22.9	-41.2	PASS
7300.416512	-64.1	22.9	-41.2	PASS
7305.414661	-64.1	22.9	-41.2	PASS
7298.917068	-64.2	22.9	-41.2	PASS
7300.916327	-64.2	22.9	-41.2	PASS
7299.916698	-64.2	22.9	-41.2	PASS
7293.918919	-64.2	22.9	-41.2	PASS
7306.414291	-64.2	22.9	-41.2	PASS
7310.412810	-64.2	22.9	-41.2	PASS
7295.418364	-64.2	23.0	-41.2	PASS
7301.416142	-64.2	23.0	-41.2	PASS
7305.914476	-64.2	23.0	-41.2	PASS

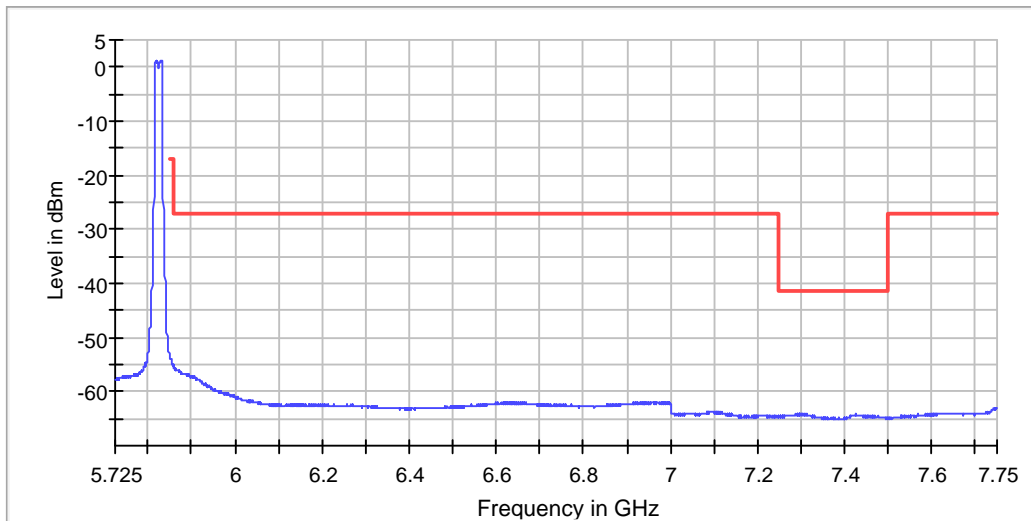

Measurement 1

Setting	Instrument Value	Target Value
RBW	1.000 MHz	<= 1.000 MHz
VBW	3.000 MHz	>= 3.000 MHz
SweepPoints	250	~ 250
SweepTime	250.000 ms	250.000 ms
Reference Level	-20.000 dBm	-20.000 dBm
Attenuation	0.000 dB	AUTO
Detector	RMS	RMS
SweepCount	5	5
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.30	0.30
Run	3 / max. 15	max. 15
Stable	3 / 3	3

Measurement 2

Setting	Instrument Value	Target Value
RBW	1.000 MHz	<= 1.000 MHz
VBW	3.000 MHz	>= 3.000 MHz
SweepPoints	1100	~ 1100
SweepTime	1.100 s	1.100 s
Reference Level	-20.000 dBm	-20.000 dBm
Attenuation	0.000 dB	AUTO
Detector	RMS	RMS
SweepCount	5	5
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.30	0.30
Run	3 / max. 15	max. 15
Stable	3 / 3	3

Tx Spurious Emission (5825 MHz; 20 MHz)

Test according to FCC title 47 part 15 §15.407(b), KDB 789033 D02 General U-NII Test Procedures New Rules v01r02 and ANSI C63.10

Result

DUT Frequency (MHz)	Result
5825.000000	PASS

Final measurements


Frequency (MHz)	Level Pre Measurement (dBm)	level (dBm)	Limit (dBm)	Margin (dB)	Result
5384.214876	-43.8	-54.7	-41.2	13.5	PASS
18916.872796	-46.6	-59.2	-41.2	17.9	PASS

Pre Measurements

Frequency (MHz)	Level (dBm)	Margin (dB)	Limit (dBm)
5384.214876	-43.8	2.6	-41.2
5425.867769	-44.2	3.0	-41.2
5426.859504	-44.5	3.2	-41.2
5393.140496	-44.6	3.3	-41.2
5392.148760	-44.8	3.6	-41.2
5383.223140	-45.0	3.8	-41.2
5377.272727	-45.4	4.2	-41.2
5431.818182	-45.7	4.5	-41.2
5378.264463	-45.8	4.5	-41.2
5355.454545	-46.0	4.8	-41.2
5382.231405	-46.0	4.8	-41.2
5356.446281	-46.2	4.9	-41.2
5398.099174	-46.2	5.0	-41.2
5366.363636	-46.2	5.0	-41.2
5432.809917	-46.3	5.0	-41.2

Measurement Settings

Start Frequency (MHz)	Stop Frequency (MHz)	Pre Measurement	Final Measurement
30.000000	1000.000000	1	1
1000.000000	5150.000000	2	2
5150.000000	5250.000000	2	2
5250.000000	5350.000000	2	2
5350.000000	5470.000000	2	2
5470.000000	5725.000000	2	2
5725.000000	5850.000000	2	2
5850.000000	7000.000000	2	2
7000.000000	26000.000000	2	2
26000.000000	40000.000000	2	2

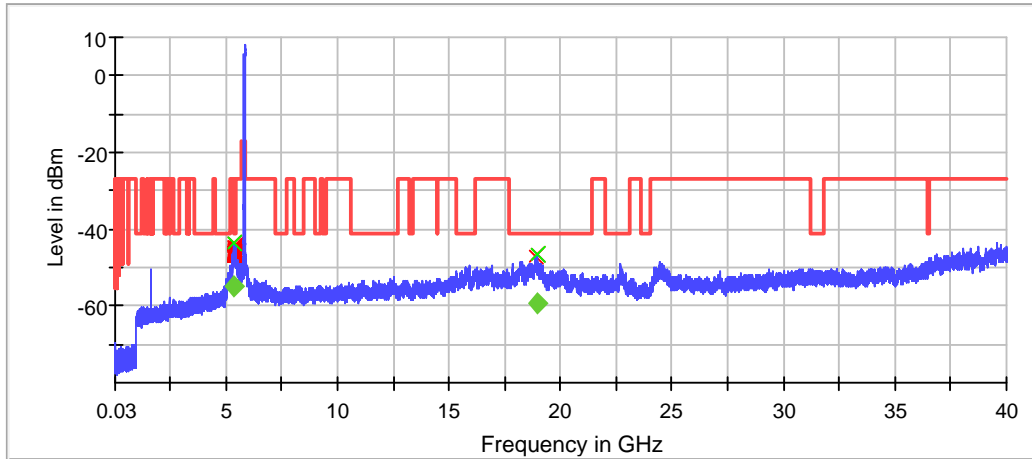

◆ Limit [limit.Result:1] × Threshold [limit.2.Result:1]
◆ Critical [Over Limit.Result:1] ◆ Sum Level [trace.Result:1]

Final Measurement

Setting	Instrument Value	Target Value
Span	ZeroSpan	ZeroSpan
RBW	1.000 MHz	~ 1.000 MHz
VBW	3.000 MHz	~ 3.000 MHz
SweepPoints	10001	~ 10001
Sweeptime	50.000 ms	50.000 ms
Reference Level	-20.000 dBm	-20.000 dBm
Attenuation	0.000 dB	0.000 dB
Detector	RMS	RMS
SweepCount	1	1
Filter	3 dB	3 dB
Trace Mode	Clear Write	Clear Write
SweepType	Sweep	AUTO
Preamp	off	off

UNII-3 ANT0 NHT40 Mode Power Spectral Density (5755 MHz; 44.1791 MHz)


Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v01r02 and ANSI C63.10

Result

DUT Frequency (MHz)	Frequency (MHz)	PSD (dBm)	Limit Max (dBm)	Result
5755.000000	5762.146619	-0.766	30.0	PASS

Ports

Port	Duty Cycle (%)
1	93.220

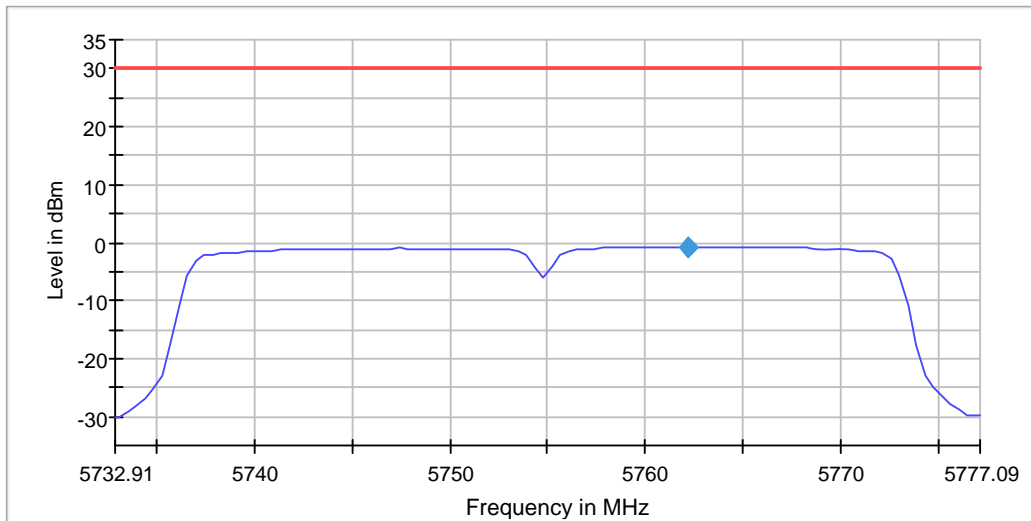

Measurement


Setting	Instrument Value	Target Value
Start Frequency	5.73291 GHz	5.73291 GHz
Stop Frequency	5.77709 GHz	5.77709 GHz
Span	44.179 MHz	44.179 MHz
RBW	1.000 MHz	<= 1.000 MHz
VBW	3.000 MHz	>= 3.000 MHz
SweepPoints	101	~ 88
SweepTime	2.020 s	2.020 s
Reference Level	-20.000 dBm	-20.000 dBm
Attenuation	0.000 dB	AUTO
Detector	RMS	RMS
SweepCount	3	3
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.30	0.30
Run	3 / max. 15	max. 15
Stable	3 / 3	3

Minimum Emission Bandwidth 6 dB (5755 MHz; 40 MHz)

Test according to FCC title 47 part 15 §15.407(a),(e), KDB 789033 D02 General U-NII Test Procedures New Rules v01r02 and ANSI C63.10

6 dB Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)	Max Level (dBm)	Result
5755.000000	36.454432	0.500000	---	5736.722846	5773.177278	-1.4	PASS

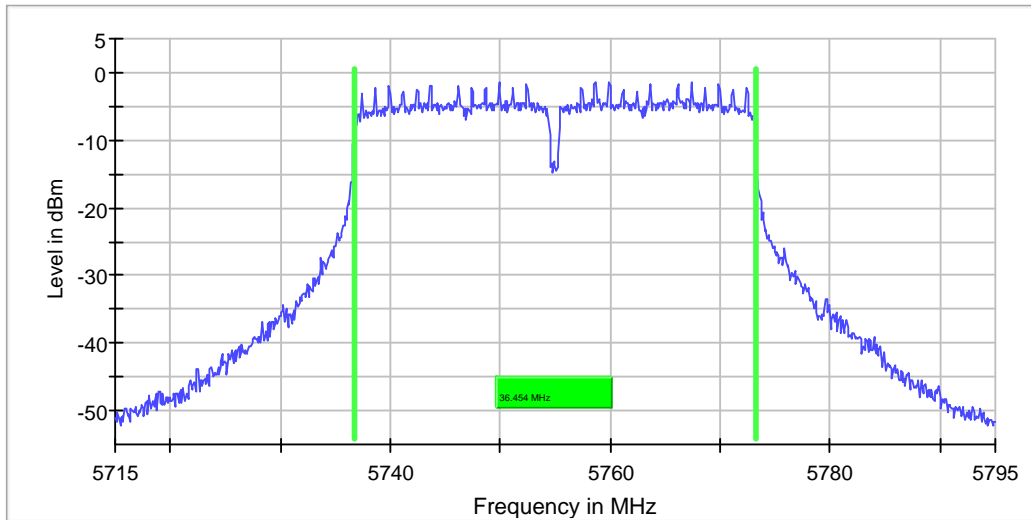

Measurement


Setting	Instrument Value	Target Value
Start Frequency	5.71500 GHz	5.71500 GHz
Stop Frequency	5.79500 GHz	5.79500 GHz
Span	80.000 MHz	80.000 MHz
RBW	100.000 kHz	~ 100.000 kHz
VBW	300.000 kHz	~ 300.000 kHz
SweepPoints	800	~ 800
Sweeptime	94.810 μs	AUTO
Reference Level	-20.000 dBm	-20.000 dBm
Attenuation	0.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	200	200
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
Sweeptype	FFT	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.30	0.30
Run	117 / max. 150	max. 150
Stable	5 / 5	5

Emission Bandwidth 26 dB (5755 MHz; 40 MHz)

Test according to FCC title 47 part 15 §15.407(a),(e), KDB 789033 D02 General U-NII Test Procedures New Rules v01r02 and ANSI C63.10

26 dB Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)	Max Level (dBm)	Result
5755.000000	44.179105	---	---	5732.761194	5776.940299	1.2	PASS

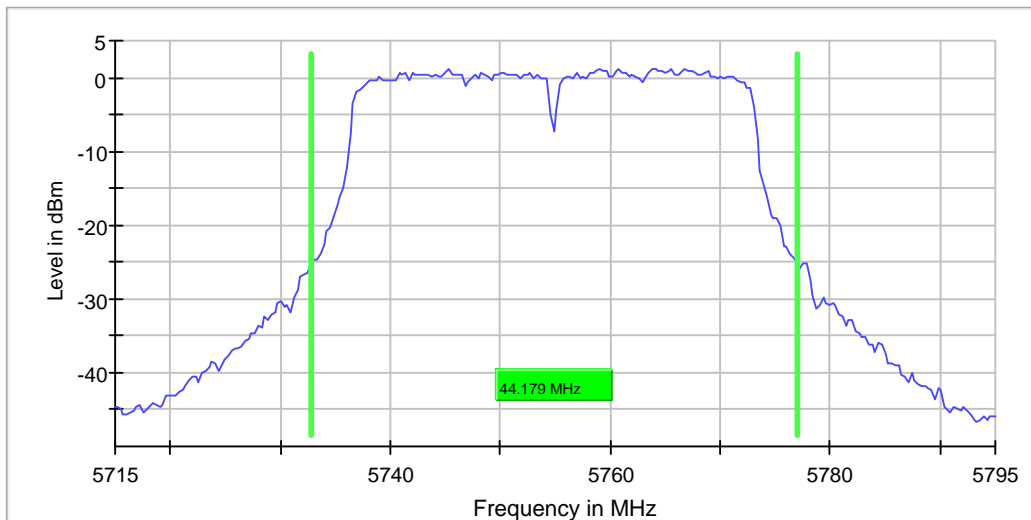

Measurement


Setting	Instrument Value	Target Value
Start Frequency	5.71500 GHz	5.71500 GHz
Stop Frequency	5.79500 GHz	5.79500 GHz
Span	80.000 MHz	80.000 MHz
RBW	300.000 kHz	~ 400.000 kHz
VBW	1.000 MHz	>= 900.000 kHz
SweepPoints	267	~ 267
Sweeptime	31.603 μs	AUTO
Reference Level	-20.000 dBm	-20.000 dBm
Attenuation	0.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	200	200
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
Sweeptype	FFT	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.30	0.30
Run	70 / max. 150	max. 150
Stable	5 / 5	5

Occupied Channel Bandwidth 99% (5755 MHz; 40 MHz)

Test according to FCC title 47 part 15 §15.407(a),(e), KDB 789033 D02 General U-NII Test Procedures New Rules v01r02 and ANSI C63.10

99 % Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)	Result
5755.000000	36.417910	---	---	5736.641791	5773.059701	PASS

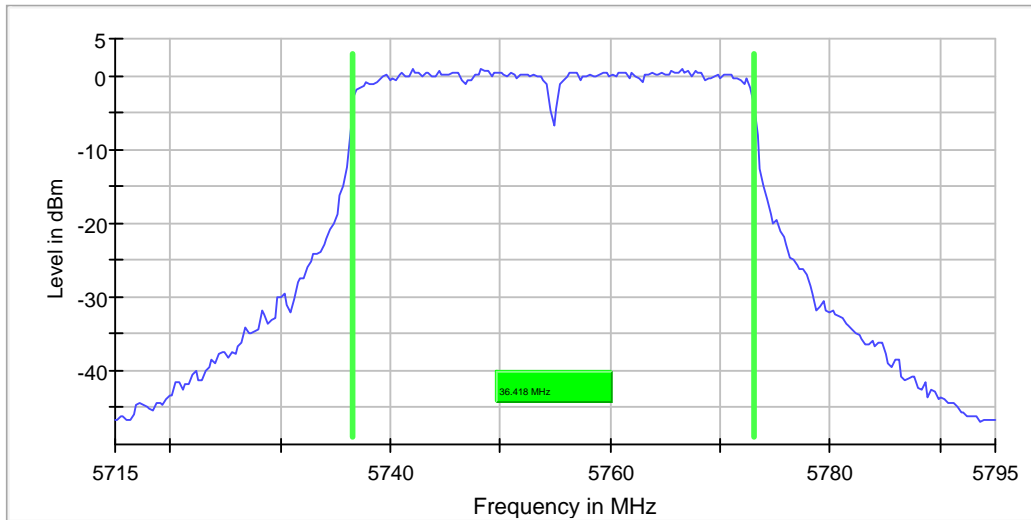

Measurement

Setting	Instrument Value	Target Value
Start Frequency	5.71500 GHz	5.71500 GHz
Stop Frequency	5.79500 GHz	5.79500 GHz
Span	80.000 MHz	80.000 MHz
RBW	300.000 kHz	<= 400.000 kHz
VBW	1.000 MHz	>= 900.000 kHz
SweepPoints	267	~ 267
Sweeptime	31.603 μs	AUTO
Reference Level	-20.000 dBm	-20.000 dBm
Attenuation	0.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	200	200
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
Sweeptype	FFT	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.30	0.30
Run	39 / max. 150	max. 150
Stable	5 / 5	5

Band Edge low (5755 MHz; 40 MHz)

Test according to FCC title 47 part 15 §15.407(b), KDB 789033 D02 General U-NII Test Procedures New Rules v01r02 and ANSI C63.10

Result


DUT Frequency (MHz)	Result
5755.000000	PASS

Inband Peak

Frequency (MHz)	Level (dBm)
5766.085657	-2.2

Measurements

Frequency (MHz)	Level (dBm)	Margin (dB)	Limit (dBm)	Result
5390.695739	-56.1	14.9	-41.2	PASS
5376.215047	-56.2	15.0	-41.2	PASS
5382.706391	-56.2	15.0	-41.2	PASS
5382.207057	-56.2	15.0	-41.2	PASS
5378.212383	-56.2	15.0	-41.2	PASS
5384.204394	-56.3	15.0	-41.2	PASS
5388.698402	-56.3	15.0	-41.2	PASS
5383.205726	-56.3	15.0	-41.2	PASS
5375.715712	-56.3	15.0	-41.2	PASS
5385.203063	-56.3	15.0	-41.2	PASS
5385.702397	-56.3	15.1	-41.2	PASS
5377.213715	-56.3	15.1	-41.2	PASS
5376.714381	-56.3	15.1	-41.2	PASS
5379.710386	-56.3	15.1	-41.2	PASS
5386.201731	-56.3	15.1	-41.2	PASS

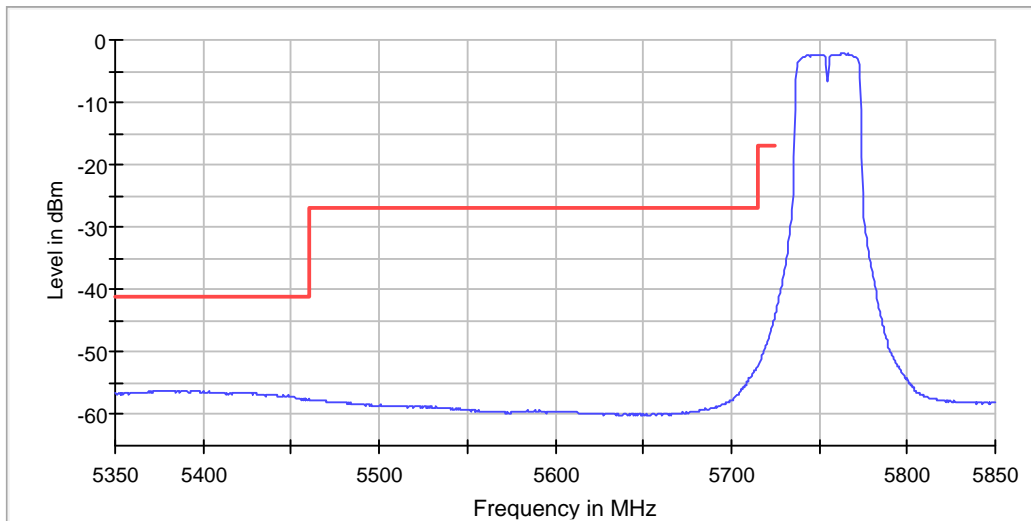

Measurement 1

Setting	Instrument Value	Target Value
RBW	1.000 MHz	<= 1.000 MHz
VBW	3.000 MHz	>= 3.000 MHz
SweepPoints	250	~ 250
SweepTime	250.000 ms	250.000 ms
Reference Level	-20.000 dBm	-20.000 dBm
Attenuation	0.000 dB	AUTO
Detector	RMS	RMS
SweepCount	5	5
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.30	0.30
Run	3 / max. 15	max. 15
Stable	3 / 3	3

Measurement 2

Setting	Instrument Value	Target Value
RBW	1.000 MHz	<= 1.000 MHz
VBW	3.000 MHz	>= 3.000 MHz
SweepPoints	750	~ 750
SweepTime	750.000 ms	750.000 ms
Reference Level	-20.000 dBm	-20.000 dBm
Attenuation	0.000 dB	AUTO
Detector	RMS	RMS
SweepCount	5	5
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.30	0.30
Run	3 / max. 15	max. 15
Stable	3 / 3	3

Tx Spurious Emission (5755 MHz; 40 MHz)

Test according to FCC title 47 part 15 §15.407(b), KDB 789033 D02 General U-NII Test Procedures New Rules v01r02 and ANSI C63.10

Result

DUT Frequency (MHz)	Result
5755.000000	PASS

Final measurements


Frequency (MHz)	Level Pre Measurement (dBm)	level (dBm)	Limit (dBm)	Margin (dB)	Result
5391.157025	-46.0	-53.4	-41.2	12.1	PASS

Pre Measurements

Frequency (MHz)	Level (dBm)	Margin (dB)	Limit (dBm)
5391.157025	-46.0	4.8	-41.2
5380.247934	-46.7	5.4	-41.2
5433.801653	-46.7	5.5	-41.2
5381.239669	-46.8	5.5	-41.2
5350.495868	-46.9	5.7	-41.2
5350.000000	-46.9	5.7	-41.2
5390.165289	-47.0	5.8	-41.2
5413.966942	-47.1	5.8	-41.2
5394.132231	-47.1	5.9	-41.2
5393.140496	-47.2	5.9	-41.2
5430.826446	-47.2	5.9	-41.2
5388.181818	-47.2	6.0	-41.2
5377.272727	-47.2	6.0	-41.2
5382.231405	-47.2	6.0	-41.2
5387.190083	-47.4	6.2	-41.2

Measurement Settings

Start Frequency (MHz)	Stop Frequency (MHz)	Pre Measurement	Final Measurement
30.000000	1000.000000	1	1
1000.000000	5150.000000	2	2
5150.000000	5250.000000	2	2
5250.000000	5350.000000	2	2
5350.000000	5470.000000	2	2
5470.000000	5725.000000	2	2
5725.000000	5850.000000	2	2
5850.000000	7000.000000	2	2
7000.000000	26000.000000	2	2
26000.000000	40000.000000	2	2

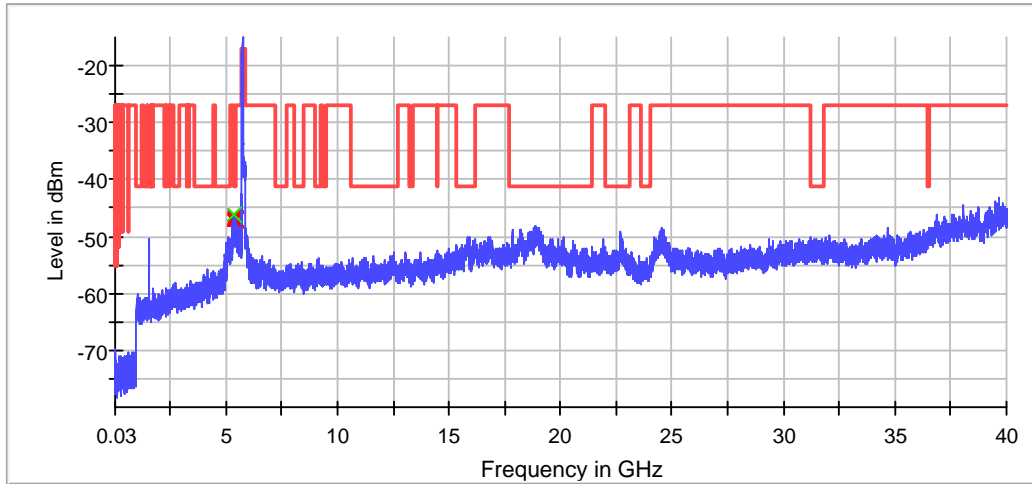

Final Measurement

Setting	Instrument Value	Target Value
Span	ZeroSpan	ZeroSpan
RBW	1.000 MHz	~ 1.000 MHz
VBW	3.000 MHz	~ 3.000 MHz
SweepPoints	10001	~ 10001
SweepTime	50.000 ms	50.000 ms
Reference Level	0.000 dBm	0.000 dBm
Attenuation	10.000 dB	0.000 dB
Detector	RMS	RMS
SweepCount	1	1
Filter	3 dB	3 dB
Trace Mode	Clear Write	Clear Write
SweepType	Sweep	AUTO
Preamp	off	off

Power Spectral Density (5795 MHz; 43.8806 MHz)


Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v01r02 and ANSI C63.10

Result

DUT Frequency (MHz)	Frequency (MHz)	PSD (dBm)	Limit Max (dBm)	Result
5795.000000	5805.970150	-0.835	30.0	PASS

Ports

Port	Duty Cycle (%)
1	93.226

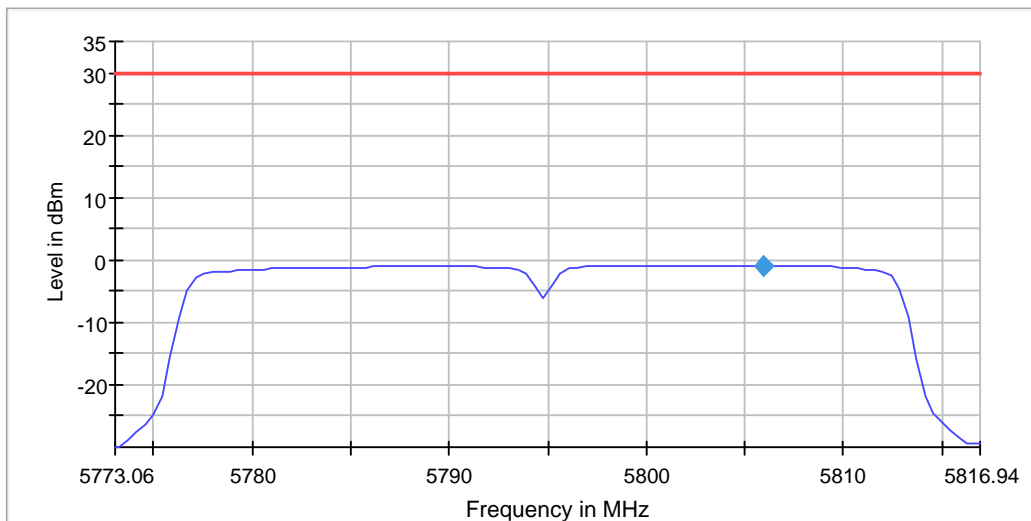

Measurement


Setting	Instrument Value	Target Value
Start Frequency	5.77306 GHz	5.77306 GHz
Stop Frequency	5.81694 GHz	5.81694 GHz
Span	43.881 MHz	43.881 MHz
RBW	1.000 MHz	<= 1.000 MHz
VBW	3.000 MHz	>= 3.000 MHz
SweepPoints	101	~ 88
SweepTime	2.020 s	2.020 s
Reference Level	-20.000 dBm	-20.000 dBm
Attenuation	0.000 dB	AUTO
Detector	RMS	RMS
SweepCount	3	3
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.30	0.30
Run	3 / max. 15	max. 15
Stable	3 / 3	3

Minimum Emission Bandwidth 6 dB (5795 MHz; 40 MHz)

Test according to FCC title 47 part 15 §15.407(a),(e), KDB 789033 D02 General U-NII Test Procedures New Rules v01r02 and ANSI C63.10

6 dB Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)	Max Level (dBm)	Result
5795.000000	36.454432	0.500000	---	5776.722846	5813.177278	-2.1	PASS

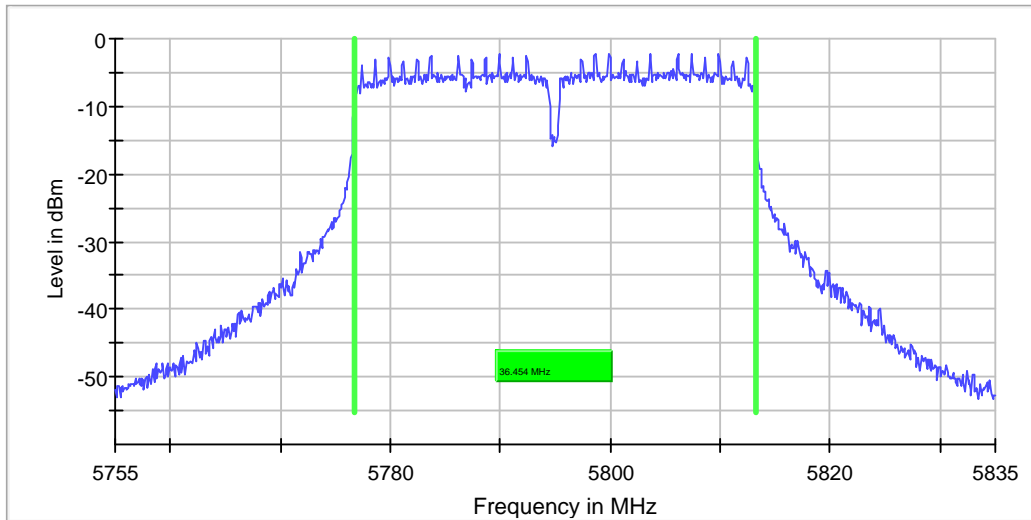

Measurement


Setting	Instrument Value	Target Value
Start Frequency	5.75500 GHz	5.75500 GHz
Stop Frequency	5.83500 GHz	5.83500 GHz
Span	80.000 MHz	80.000 MHz
RBW	100.000 kHz	~ 100.000 kHz
VBW	300.000 kHz	~ 300.000 kHz
SweepPoints	800	~ 800
Sweeptime	94.810 μs	AUTO
Reference Level	-20.000 dBm	-20.000 dBm
Attenuation	0.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	200	200
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
Sweeptype	FFT	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.30	0.30
Run	84 / max. 150	max. 150
Stable	5 / 5	5

Emission Bandwidth 26 dB (5795 MHz; 40 MHz)

Test according to FCC title 47 part 15 §15.407(a),(e), KDB 789033 D02 General U-NII Test Procedures New Rules v01r02 and ANSI C63.10

26 dB Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)	Max Level (dBm)	Result
5795.000000	43.880598	---	---	5773.059701	5816.940299	0.5	PASS

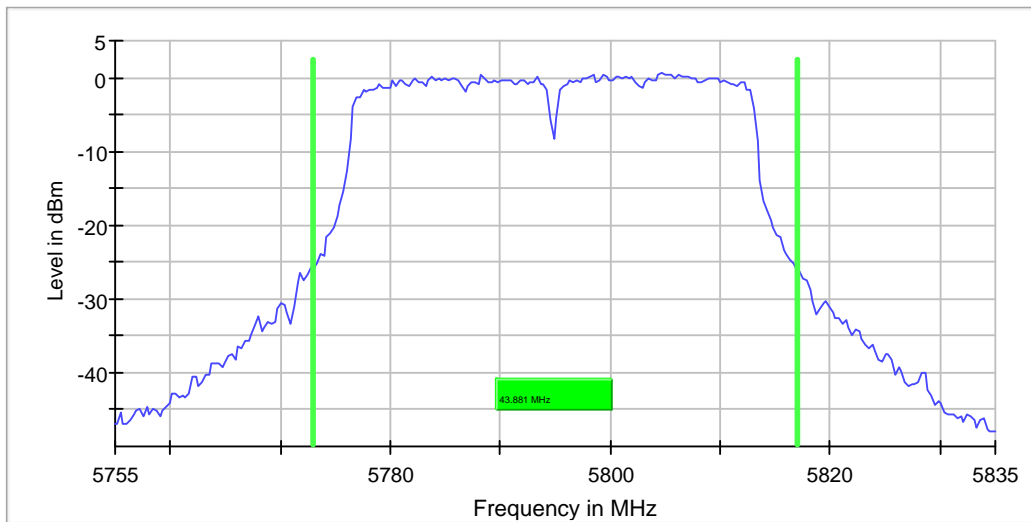

Measurement


Setting	Instrument Value	Target Value
Start Frequency	5.75500 GHz	5.75500 GHz
Stop Frequency	5.83500 GHz	5.83500 GHz
Span	80.000 MHz	80.000 MHz
RBW	300.000 kHz	~ 400.000 kHz
VBW	1.000 MHz	>= 900.000 kHz
SweepPoints	267	~ 267
Sweeptime	31.603 μs	AUTO
Reference Level	-20.000 dBm	-20.000 dBm
Attenuation	0.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	200	200
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
Sweeptype	FFT	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.30	0.30
Run	61 / max. 150	max. 150
Stable	5 / 5	5

Occupied Channel Bandwidth 99% (5795 MHz; 40 MHz)

Test according to FCC title 47 part 15 §15.407(a),(e), KDB 789033 D02 General U-NII Test Procedures New Rules v01r02 and ANSI C63.10

99 % Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)	Result
5795.000000	36.417910	---	---	5776.641791	5813.059701	PASS

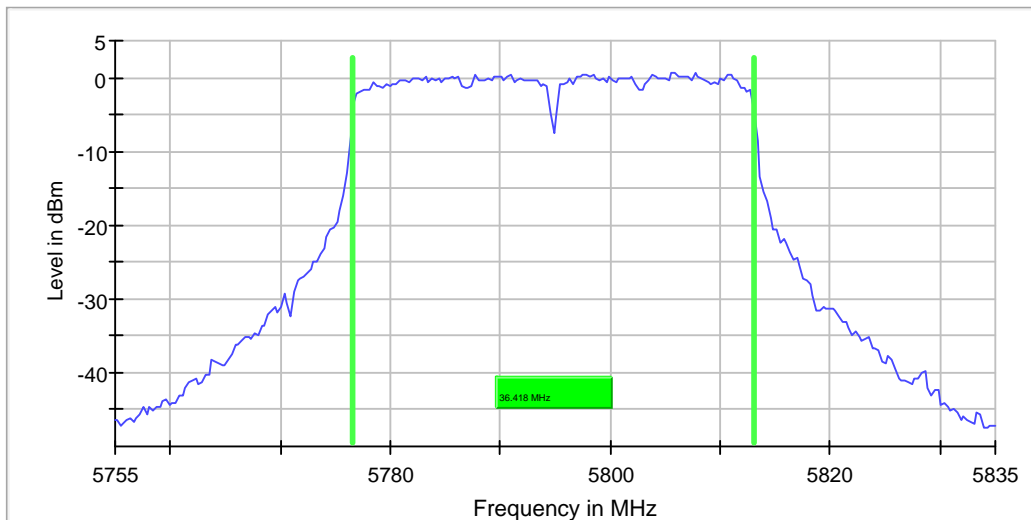

Measurement

Setting	Instrument Value	Target Value
Start Frequency	5.75500 GHz	5.75500 GHz
Stop Frequency	5.83500 GHz	5.83500 GHz
Span	80.000 MHz	80.000 MHz
RBW	300.000 kHz	<= 400.000 kHz
VBW	1.000 MHz	>= 900.000 kHz
SweepPoints	267	~ 267
Sweeptime	31.603 μs	AUTO
Reference Level	-20.000 dBm	-20.000 dBm
Attenuation	0.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	200	200
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
Sweeptype	FFT	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.30	0.30
Run	82 / max. 150	max. 150
Stable	5 / 5	5

Band Edge high (5795 MHz; 40 MHz)

Test according to FCC title 47 part 15 §15.407(b), KDB 789033 D02 General U-NII Test Procedures New Rules v01r02 and ANSI C63.10

Result


DUT Frequency (MHz)	Result
5795.000000	PASS

Inband Peak

Frequency (MHz)	Level (dBm)
5805.926295	-2.9

Measurements

Frequency (MHz)	Level (dBm)	Margin (dB)	Limit (dBm)	Result
7305.414661	-64.0	22.8	-41.2	PASS
7302.415772	-64.1	22.8	-41.2	PASS
7298.417253	-64.1	22.9	-41.2	PASS
7304.914846	-64.1	22.9	-41.2	PASS
7308.913365	-64.1	22.9	-41.2	PASS
7300.416512	-64.1	22.9	-41.2	PASS
7293.918919	-64.1	22.9	-41.2	PASS
7307.413921	-64.1	22.9	-41.2	PASS
7294.918549	-64.1	22.9	-41.2	PASS
7299.416883	-64.1	22.9	-41.2	PASS
7294.418734	-64.1	22.9	-41.2	PASS
7304.415031	-64.1	22.9	-41.2	PASS
7306.914106	-64.2	22.9	-41.2	PASS
7299.916698	-64.2	22.9	-41.2	PASS
7297.417623	-64.2	22.9	-41.2	PASS

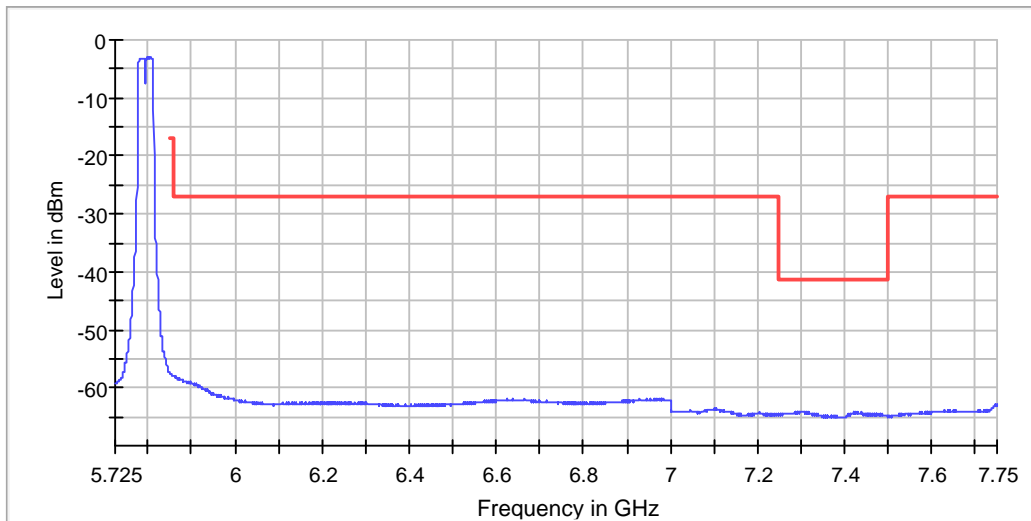

Measurement 1

Setting	Instrument Value	Target Value
RBW	1.000 MHz	<= 1.000 MHz
VBW	3.000 MHz	>= 3.000 MHz
SweepPoints	250	~ 250
SweepTime	250.000 ms	250.000 ms
Reference Level	-20.000 dBm	-20.000 dBm
Attenuation	0.000 dB	AUTO
Detector	RMS	RMS
SweepCount	5	5
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.30	0.30
Run	3 / max. 15	max. 15
Stable	3 / 3	3

Measurement 2

Setting	Instrument Value	Target Value
RBW	1.000 MHz	<= 1.000 MHz
VBW	3.000 MHz	>= 3.000 MHz
SweepPoints	1100	~ 1100
SweepTime	1.100 s	1.100 s
Reference Level	-20.000 dBm	-20.000 dBm
Attenuation	0.000 dB	AUTO
Detector	RMS	RMS
SweepCount	5	5
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.30	0.30
Run	3 / max. 15	max. 15
Stable	3 / 3	3

Tx Spurious Emission (5795 MHz; 40 MHz)

Test according to FCC title 47 part 15 §15.407(b), KDB 789033 D02 General U-NII Test Procedures New Rules v01r02 and ANSI C63.10

Result

DUT Frequency (MHz)	Result
5795.000000	PASS

Final measurements


Frequency (MHz)	Level Pre Measurement (dBm)	level (dBm)	Limit (dBm)	Margin (dB)	Result
5409.008264	-46.4	-57.4	-41.2	16.2	PASS
18897.873796	-46.7	-58.9	-41.2	17.7	PASS

Pre Measurements

Frequency (MHz)	Level (dBm)	Margin (dB)	Limit (dBm)
5409.008264	-46.4	5.2	-41.2
18897.873796	-46.7	5.5	-41.2
5417.933884	-47.1	5.9	-41.2
5410.000000	-47.2	6.0	-41.2
5420.909091	-47.4	6.2	-41.2
5373.305785	-47.4	6.2	-41.2
5416.942149	-47.5	6.3	-41.2
18588.890058	-47.6	6.3	-41.2
5419.917355	-47.8	6.5	-41.2
5387.190083	-47.8	6.6	-41.2
18898.873743	-47.9	6.6	-41.2
5384.214876	-48.0	6.8	-41.2
5359.421488	-48.1	6.8	-41.2
5355.454545	-48.1	6.9	-41.2
5374.297521	-48.2	7.0	-41.2

Measurement Settings

Start Frequency (MHz)	Stop Frequency (MHz)	Pre Measurement	Final Measurement
30.000000	1000.000000	1	1
1000.000000	5150.000000	2	2
5150.000000	5250.000000	2	2
5250.000000	5350.000000	2	2
5350.000000	5470.000000	2	2
5470.000000	5725.000000	2	2
5725.000000	5850.000000	2	2
5850.000000	7000.000000	2	2
7000.000000	26000.000000	2	2
26000.000000	40000.000000	2	2

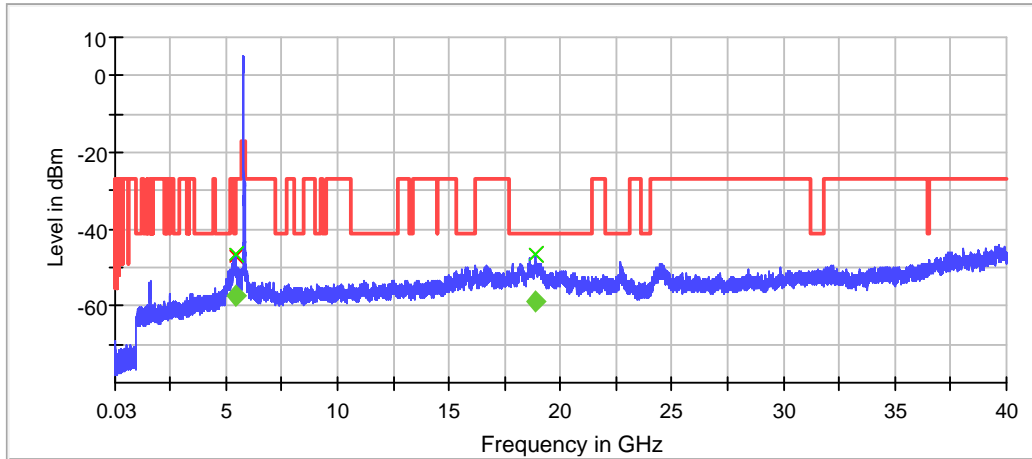

— Limit [limit.Result:1] x Threshold [limit 2.Result:1]
◆ Critical [Over Limit.Result:1] ◆ Sum Level [trace.Result:1]

Final Measurement

Setting	Instrument Value	Target Value
Span	ZeroSpan	ZeroSpan
RBW	1.000 MHz	~ 1.000 MHz
VBW	3.000 MHz	~ 3.000 MHz
SweepPoints	10001	~ 10001
Sweeptime	50.000 ms	50.000 ms
Reference Level	-20.000 dBm	-20.000 dBm
Attenuation	0.000 dB	0.000 dB
Detector	RMS	RMS
SweepCount	1	1
Filter	3 dB	3 dB
Trace Mode	Clear Write	Clear Write
SweepType	Sweep	AUTO
Preamp	off	off

UNII-3 ANT1 A Mode Power Spectral Density (5825 MHz; 22.0896 MHz)


Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v01r02 and ANSI C63.10

Result

DUT Frequency (MHz)	Frequency (MHz)	PSD (dBm)	Limit Max (dBm)	Result
5825.000000	5830.738965	4.868	30.0	PASS

Ports

Port	Duty Cycle (%)
1	95.999

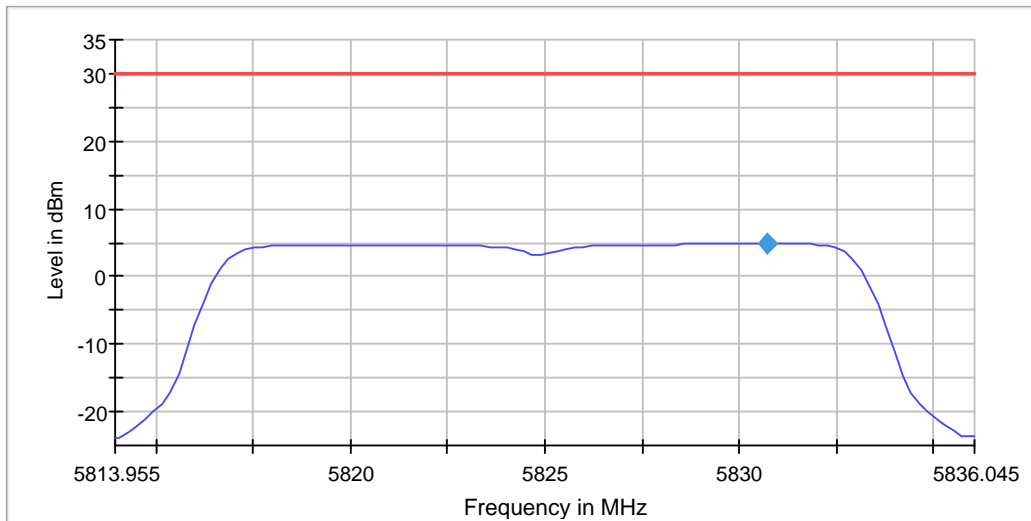

Measurement


Setting	Instrument Value	Target Value
Start Frequency	5.81396 GHz	5.81396 GHz
Stop Frequency	5.83604 GHz	5.83604 GHz
Span	22.090 MHz	22.090 MHz
RBW	1.000 MHz	<= 1.000 MHz
VBW	3.000 MHz	>= 3.000 MHz
SweepPoints	101	~ 44
SweepTime	2.020 s	2.020 s
Reference Level	-20.000 dBm	-20.000 dBm
Attenuation	0.000 dB	AUTO
Detector	RMS	RMS
SweepCount	3	3
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.30	0.30
Run	3 / max. 15	max. 15
Stable	3 / 3	3

Minimum Emission Bandwidth 6 dB (5745 MHz; 20 MHz)

Test according to FCC title 47 part 15 §15.407(a),(e), KDB 789033 D02 General U-NII Test Procedures New Rules v01r02 and ANSI C63.10

6 dB Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)	Max Level (dBm)	Result
5745.000000	16.458853	0.500000	---	5736.720698	5753.179551	5.4	PASS

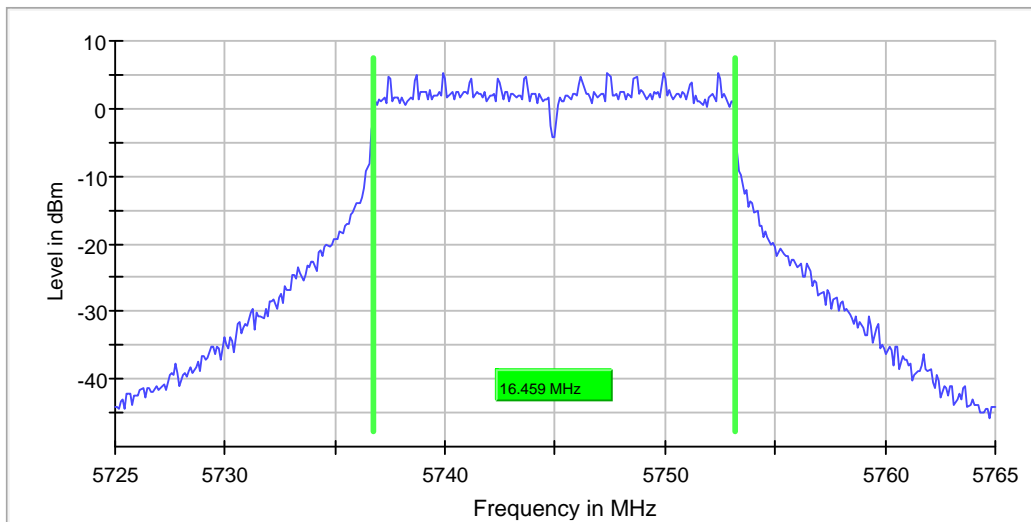

Measurement


Setting	Instrument Value	Target Value
Start Frequency	5.72500 GHz	5.72500 GHz
Stop Frequency	5.76500 GHz	5.76500 GHz
Span	40.000 MHz	40.000 MHz
RBW	100.000 kHz	~ 100.000 kHz
VBW	300.000 kHz	~ 300.000 kHz
SweepPoints	400	~ 400
SweepTime	56.886 μs	AUTO
Reference Level	-10.000 dBm	-10.000 dBm
Attenuation	10.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	200	200
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	FFT	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.30	0.30
Run	45 / max. 150	max. 150
Stable	5 / 5	5

Emission Bandwidth 26 dB (5745 MHz; 20 MHz)

Test according to FCC title 47 part 15 §15.407(a),(e), KDB 789033 D02 General U-NII Test Procedures New Rules v01r02 and ANSI C63.10

26 dB Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)	Max Level (dBm)	Result
5745.000000	22.089553	---	---	5734.054726	5756.144279	6.3	PASS

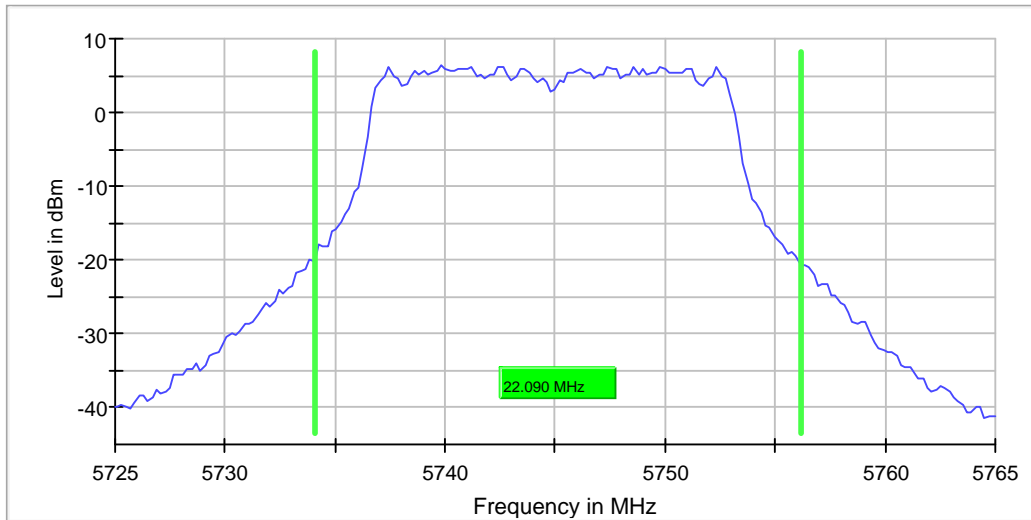

Measurement


Setting	Instrument Value	Target Value
Start Frequency	5.72500 GHz	5.72500 GHz
Stop Frequency	5.76500 GHz	5.76500 GHz
Span	40.000 MHz	40.000 MHz
RBW	200.000 kHz	~ 200.000 kHz
VBW	1.000 MHz	>= 600.000 kHz
SweepPoints	200	~ 200
SweepTime	28.443 μs	AUTO
Reference Level	-10.000 dBm	-10.000 dBm
Attenuation	10.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	200	200
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	FFT	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.30	0.30
Run	37 / max. 150	max. 150
Stable	5 / 5	5

Occupied Channel Bandwidth 99% (5745 MHz; 20 MHz)

Test according to FCC title 47 part 15 §15.407(a),(e), KDB 789033 D02 General U-NII Test Procedures New Rules v01r02 and ANSI C63.10

99 % Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)	Result
5745.000000	16.517413	---	---	5736.641791	5753.159204	PASS

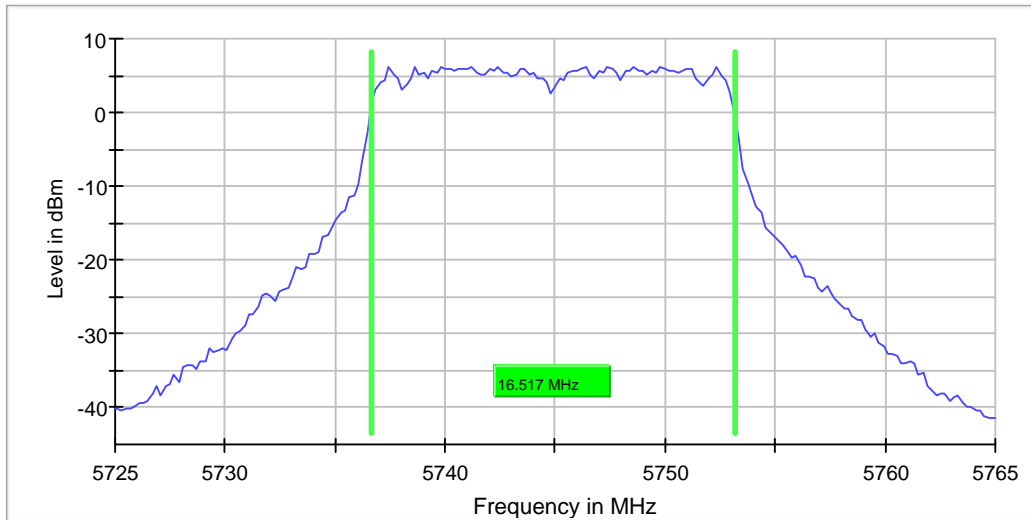

Measurement

Setting	Instrument Value	Target Value
Start Frequency	5.72500 GHz	5.72500 GHz
Stop Frequency	5.76500 GHz	5.76500 GHz
Span	40.000 MHz	40.000 MHz
RBW	200.000 kHz	<= 200.000 kHz
VBW	1.000 MHz	>= 600.000 kHz
SweepPoints	200	~ 200
SweepTime	28.443 μs	AUTO
Reference Level	-10.000 dBm	-10.000 dBm
Attenuation	10.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	200	200
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	FFT	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.30	0.30
Run	56 / max. 150	max. 150
Stable	5 / 5	5

Band Edge low (5745 MHz; 20 MHz)

Test according to FCC title 47 part 15 §15.407(b), KDB 789033 D02 General U-NII Test Procedures New Rules v01r02 and ANSI C63.10

Result


DUT Frequency (MHz)	Result
5745.000000	PASS

Inband Peak

Frequency (MHz)	Level (dBm)
5740.189243	5.1

Measurements

Frequency (MHz)	Level (dBm)	Margin (dB)	Limit (dBm)	Result
5419.657124	-51.0	9.7	-41.2	PASS
5418.159121	-51.0	9.8	-41.2	PASS
5417.659787	-51.0	9.8	-41.2	PASS
5419.157790	-51.1	9.8	-41.2	PASS
5422.153795	-51.1	9.8	-41.2	PASS
5417.160453	-51.1	9.9	-41.2	PASS
5399.184421	-51.1	9.9	-41.2	PASS
5423.152463	-51.2	9.9	-41.2	PASS
5421.654461	-51.2	9.9	-41.2	PASS
5421.155126	-51.2	9.9	-41.2	PASS
5424.151132	-51.2	10.0	-41.2	PASS
5420.655792	-51.2	10.0	-41.2	PASS
5428.145806	-51.2	10.0	-41.2	PASS
5430.143142	-51.2	10.0	-41.2	PASS
5420.156458	-51.2	10.0	-41.2	PASS

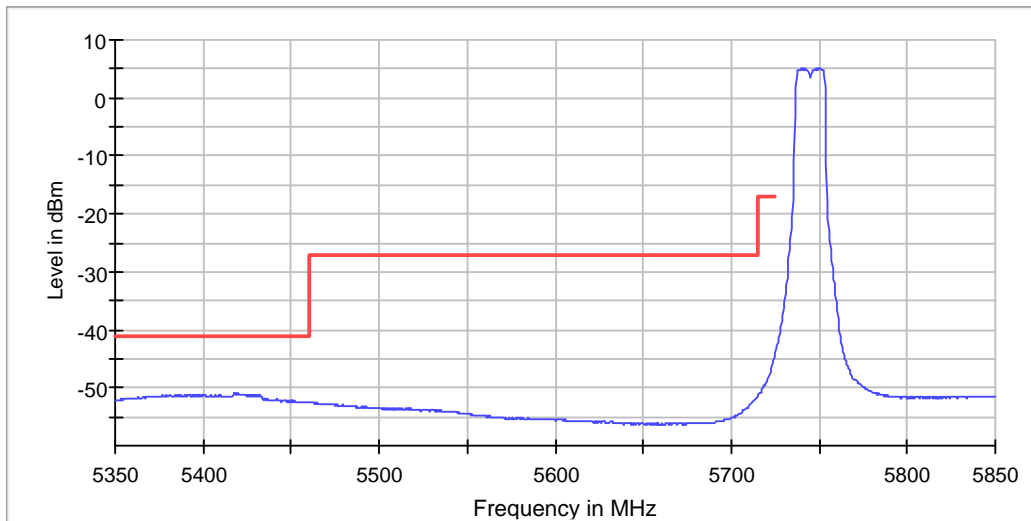

Measurement 1

Setting	Instrument Value	Target Value
RBW	1.000 MHz	<= 1.000 MHz
VBW	3.000 MHz	>= 3.000 MHz
SweepPoints	250	~ 250
SweepTime	250.000 ms	250.000 ms
Reference Level	-10.000 dBm	-10.000 dBm
Attenuation	10.000 dB	AUTO
Detector	RMS	RMS
SweepCount	5	5
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.30	0.30
Run	3 / max. 15	max. 15
Stable	3 / 3	3

Measurement 2

Setting	Instrument Value	Target Value
RBW	1.000 MHz	<= 1.000 MHz
VBW	3.000 MHz	>= 3.000 MHz
SweepPoints	750	~ 750
SweepTime	750.000 ms	750.000 ms
Reference Level	-20.000 dBm	-20.000 dBm
Attenuation	0.000 dB	AUTO
Detector	RMS	RMS
SweepCount	5	5
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.30	0.30
Run	3 / max. 15	max. 15
Stable	3 / 3	3

Tx Spurious Emission (5745 MHz; 20 MHz)

Test according to FCC title 47 part 15 §15.407(b), KDB 789033 D02 General U-NII Test Procedures New Rules v01r02 and ANSI C63.10

Result

DUT Frequency (MHz)	Result
5745.000000	PASS

Final measurements


Frequency (MHz)	Level Pre Measurement (dBm)	level (dBm)	Limit (dBm)	Margin (dB)	Result
1542.369309	-43.8	-54.6	-41.2	13.4	PASS
5102.511443	-46.8	-57.5	-41.2	16.3	PASS
5388.181818	-42.6	-52.5	-41.2	11.3	PASS

Pre Measurements

Frequency (MHz)	Level (dBm)	Margin (dB)	Limit (dBm)
5388.181818	-42.6	1.3	-41.2
5413.966942	-42.7	1.4	-41.2
5412.975207	-42.7	1.5	-41.2
5395.123967	-42.9	1.7	-41.2
5391.157025	-43.1	1.8	-41.2
5369.338843	-43.3	2.1	-41.2
5385.206612	-43.4	2.2	-41.2
5380.247934	-43.5	2.3	-41.2
5379.256198	-43.5	2.3	-41.2
5350.495868	-43.6	2.3	-41.2
5350.000000	-43.6	2.3	-41.2
5384.214876	-43.6	2.4	-41.2
5378.264463	-43.6	2.4	-41.2
5417.933884	-43.7	2.4	-41.2
5392.148760	-43.7	2.5	-41.2

Measurement Settings

Start Frequency (MHz)	Stop Frequency (MHz)	Pre Measurement	Final Measurement
30.000000	1000.000000	1	1
1000.000000	5150.000000	2	2
5150.000000	5250.000000	2	2
5250.000000	5350.000000	2	2
5350.000000	5470.000000	2	2
5470.000000	5725.000000	2	2
5725.000000	5850.000000	2	2
5850.000000	7000.000000	2	2
7000.000000	26000.000000	2	2
26000.000000	40000.000000	2	2

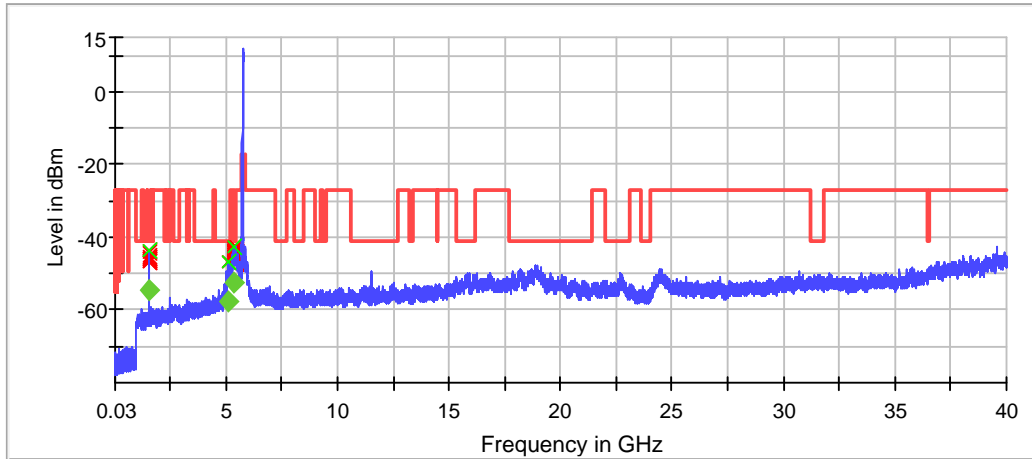

◆ Limit [limit.Result:1] × Threshold [limit.2.Result:1]
◆ Critical [Over Limit.Result:1] ◆ Sum Level [trace.Result:1]

Final Measurement

Setting	Instrument Value	Target Value
Span	ZeroSpan	ZeroSpan
RBW	1.000 MHz	~ 1.000 MHz
VBW	3.000 MHz	~ 3.000 MHz
SweepPoints	10001	~ 10001
Sweeptime	50.000 ms	50.000 ms
Reference Level	-10.000 dBm	-10.000 dBm
Attenuation	0.000 dB	0.000 dB
Detector	RMS	RMS
SweepCount	1	1
Filter	3 dB	3 dB
Trace Mode	Clear Write	Clear Write
SweepType	Sweep	AUTO
Preamp	off	off

Power Spectral Density (5785 MHz; 23.0846 MHz)


Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v01r02 and ANSI C63.10

Result

DUT Frequency (MHz)	Frequency (MHz)	PSD (dBm)	Limit Max (dBm)	Result
5785.000000	5790.997470	4.246	30.0	PASS

Ports

Port	Duty Cycle (%)
1	96.159

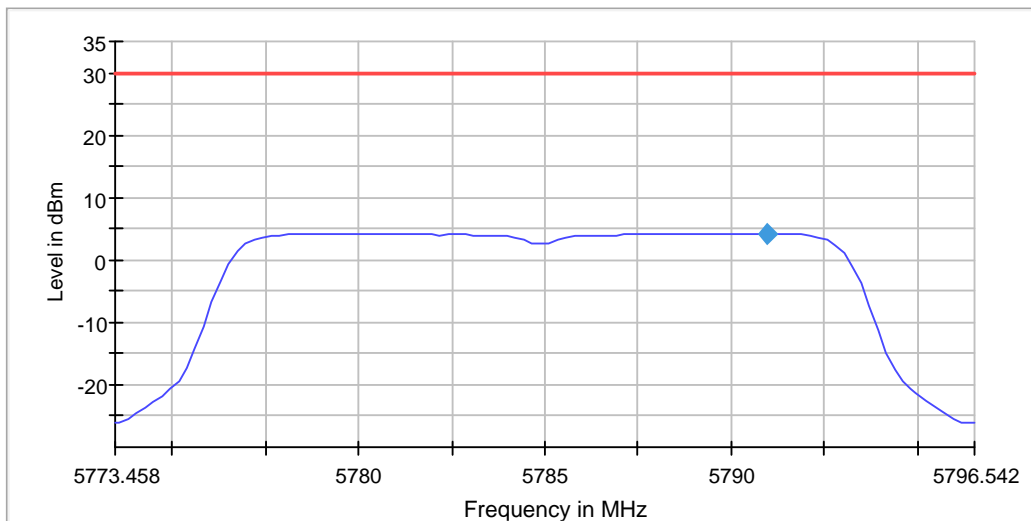

Measurement


Setting	Instrument Value	Target Value
Start Frequency	5.77346 GHz	5.77346 GHz
Stop Frequency	5.79654 GHz	5.79654 GHz
Span	23.085 MHz	23.085 MHz
RBW	1.000 MHz	<= 1.000 MHz
VBW	3.000 MHz	>= 3.000 MHz
SweepPoints	101	~ 46
SweepTime	2.020 s	2.020 s
Reference Level	-20.000 dBm	-20.000 dBm
Attenuation	0.000 dB	AUTO
Detector	RMS	RMS
SweepCount	3	3
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.30	0.30
Run	3 / max. 15	max. 15
Stable	3 / 3	3

Minimum Emission Bandwidth 6 dB (5785 MHz; 20 MHz)

Test according to FCC title 47 part 15 §15.407(a),(e), KDB 789033 D02 General U-NII Test Procedures New Rules v01r02 and ANSI C63.10

6 dB Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)	Max Level (dBm)	Result
5785.000000	16.458853	0.500000	---	5776.720698	5793.179551	5.2	PASS

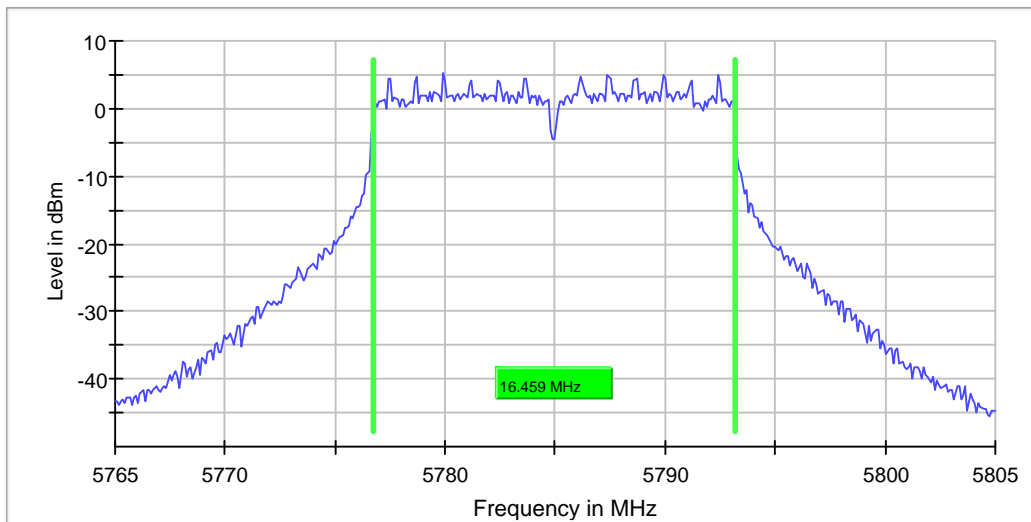

Measurement


Setting	Instrument Value	Target Value
Start Frequency	5.76500 GHz	5.76500 GHz
Stop Frequency	5.80500 GHz	5.80500 GHz
Span	40.000 MHz	40.000 MHz
RBW	100.000 kHz	~ 100.000 kHz
VBW	300.000 kHz	~ 300.000 kHz
SweepPoints	400	~ 400
SweepTime	56.886 μ s	AUTO
Reference Level	-10.000 dBm	-10.000 dBm
Attenuation	10.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	200	200
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	FFT	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.30	0.30
Run	47 / max. 150	max. 150
Stable	5 / 5	5

Emission Bandwidth 26 dB (5785 MHz; 20 MHz)

Test according to FCC title 47 part 15 §15.407(a),(e), KDB 789033 D02 General U-NII Test Procedures New Rules v01r02 and ANSI C63.10

26 dB Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)	Max Level (dBm)	Result
5785.000000	23.084578	---	---	5773.656716	5796.741294	6.0	PASS

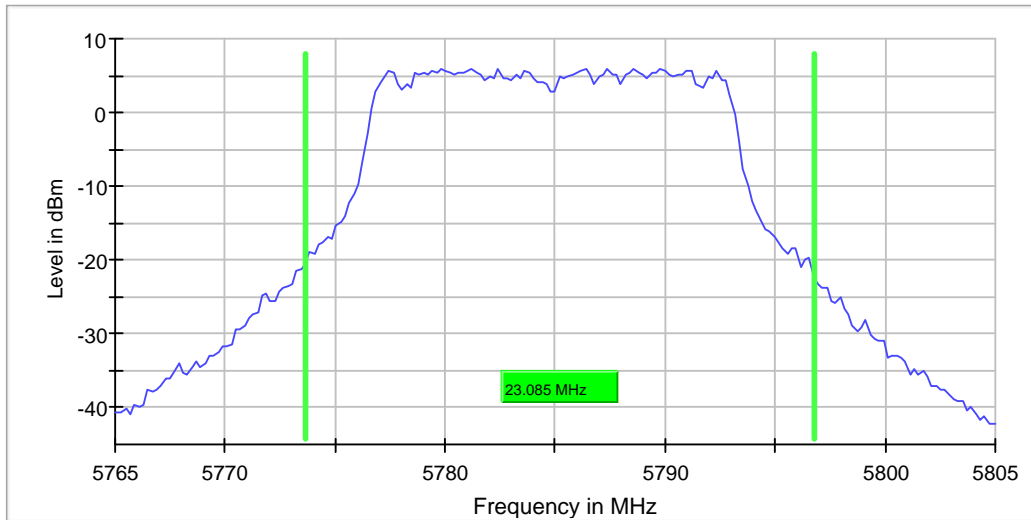

Measurement


Setting	Instrument Value	Target Value
Start Frequency	5.76500 GHz	5.76500 GHz
Stop Frequency	5.80500 GHz	5.80500 GHz
Span	40.000 MHz	40.000 MHz
RBW	200.000 kHz	~ 200.000 kHz
VBW	1.000 MHz	>= 600.000 kHz
SweepPoints	200	~ 200
Sweeptime	28.443 μs	AUTO
Reference Level	-10.000 dBm	-10.000 dBm
Attenuation	10.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	200	200
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
Sweeptype	FFT	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.30	0.30
Run	37 / max. 150	max. 150
Stable	5 / 5	5

Occupied Channel Bandwidth 99% (5785 MHz; 20 MHz)

Test according to FCC title 47 part 15 §15.407(a),(e), KDB 789033 D02 General U-NII Test Procedures New Rules v01r02 and ANSI C63.10

99 % Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)	Result
5785.000000	16.517413	---	---	5776.641791	5793.159204	PASS

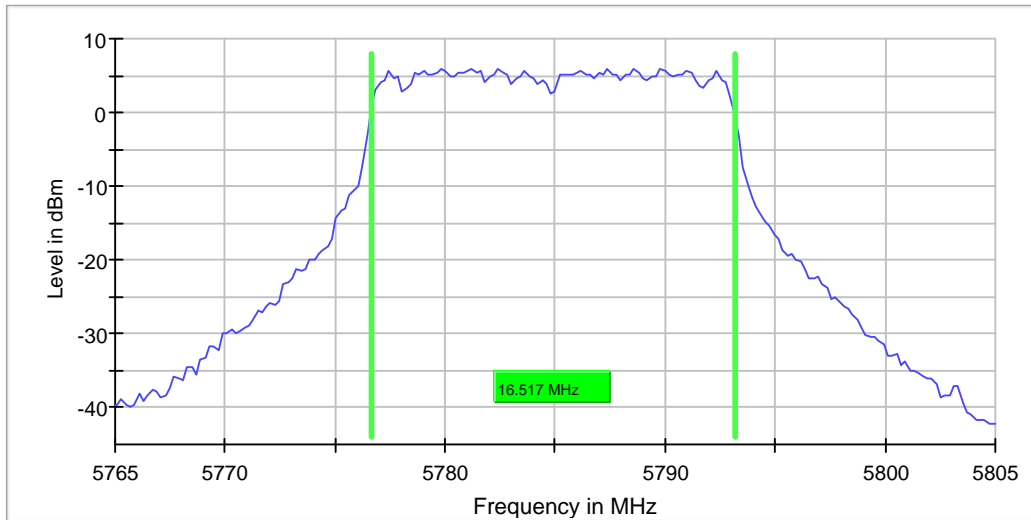

Measurement

Setting	Instrument Value	Target Value
Start Frequency	5.76500 GHz	5.76500 GHz
Stop Frequency	5.80500 GHz	5.80500 GHz
Span	40.000 MHz	40.000 MHz
RBW	200.000 kHz	<= 200.000 kHz
VBW	1.000 MHz	>= 600.000 kHz
SweepPoints	200	~ 200
SweepTime	28.443 μs	AUTO
Reference Level	-10.000 dBm	-10.000 dBm
Attenuation	10.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	200	200
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	FFT	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.30	0.30
Run	37 / max. 150	max. 150
Stable	5 / 5	5

Tx Spurious Emission (5785 MHz; 20 MHz)

Test according to FCC title 47 part 15 §15.407(b), KDB 789033 D02 General U-NII Test Procedures New Rules v01r02 and ANSI C63.10

Result

DUT Frequency (MHz)	Result
5785.000000	PASS

Final measurements


Frequency (MHz)	Level Pre Measurement (dBm)	level (dBm)	Limit (dBm)	Margin (dB)	Result
1579.360395	-43.9	-52.3	-41.2	11.1	PASS
5107.510238	-46.9	-57.7	-41.2	16.5	PASS
5387.190083	-40.2	-51.8	-41.2	10.6	PASS

Pre Measurements

Frequency (MHz)	Level (dBm)	Margin (dB)	Limit (dBm)
5387.190083	-40.2	-1.1	-41.2
5386.198347	-40.4	-0.9	-41.2
5431.818182	-42.0	0.7	-41.2
5399.090909	-42.3	1.1	-41.2
5424.876033	-42.4	1.2	-41.2
5427.851240	-42.8	1.5	-41.2
5388.181818	-42.9	1.6	-41.2
5423.884298	-42.9	1.7	-41.2
5381.239669	-43.1	1.9	-41.2
5394.132231	-43.2	1.9	-41.2
5398.099174	-43.2	2.0	-41.2
5413.966942	-43.2	2.0	-41.2
5430.826446	-43.4	2.2	-41.2
5412.975207	-43.4	2.2	-41.2
5390.165289	-43.5	2.2	-41.2

Measurement Settings

Start Frequency (MHz)	Stop Frequency (MHz)	Pre Measurement	Final Measurement
30.000000	1000.000000	1	1
1000.000000	5150.000000	2	2
5150.000000	5250.000000	2	2
5250.000000	5350.000000	2	2
5350.000000	5470.000000	2	2
5470.000000	5725.000000	2	2
5725.000000	5850.000000	2	2
5850.000000	7000.000000	2	2
7000.000000	26000.000000	2	2
26000.000000	40000.000000	2	2

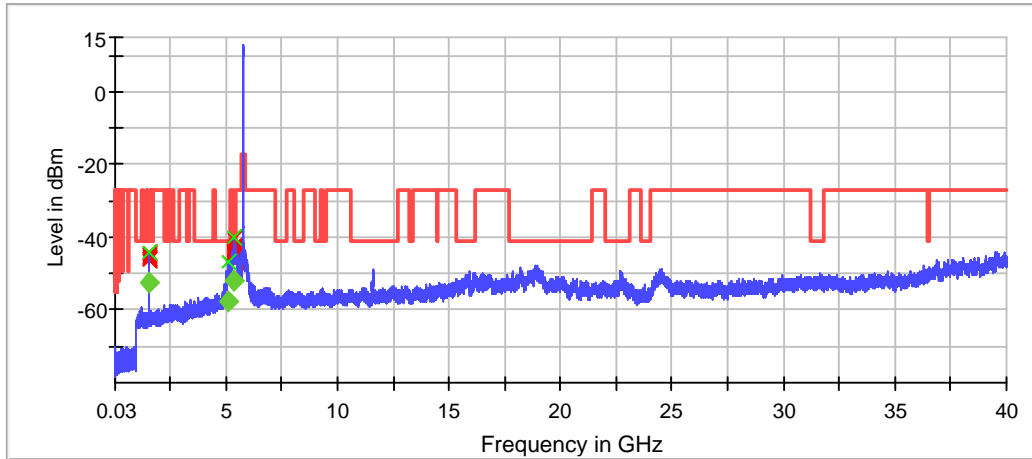

◆ Limit [limit.Result:1] ✕ Threshold [limit.2.Result:1]
◆ Critical [Over Limit.Result:1] ◆ Sum Level [trace.Result:1]

Final Measurement

Setting	Instrument Value	Target Value
Span	ZeroSpan	ZeroSpan
RBW	1.000 MHz	~ 1.000 MHz
VBW	3.000 MHz	~ 3.000 MHz
SweepPoints	10001	~ 10001
Sweeptime	50.000 ms	50.000 ms
Reference Level	-10.000 dBm	-10.000 dBm
Attenuation	0.000 dB	0.000 dB
Detector	RMS	RMS
SweepCount	1	1
Filter	3 dB	3 dB
Trace Mode	Clear Write	Clear Write
SweepType	Sweep	AUTO
Preamp	off	off

Power Spectral Density (5785 MHz; 23.0846 MHz)


Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v01r02 and ANSI C63.10

Result

DUT Frequency (MHz)	Frequency (MHz)	PSD (dBm)	Limit Max (dBm)	Result
5785.000000	5790.997470	4.246	30.0	PASS

Ports

Port	Duty Cycle (%)
1	96.159

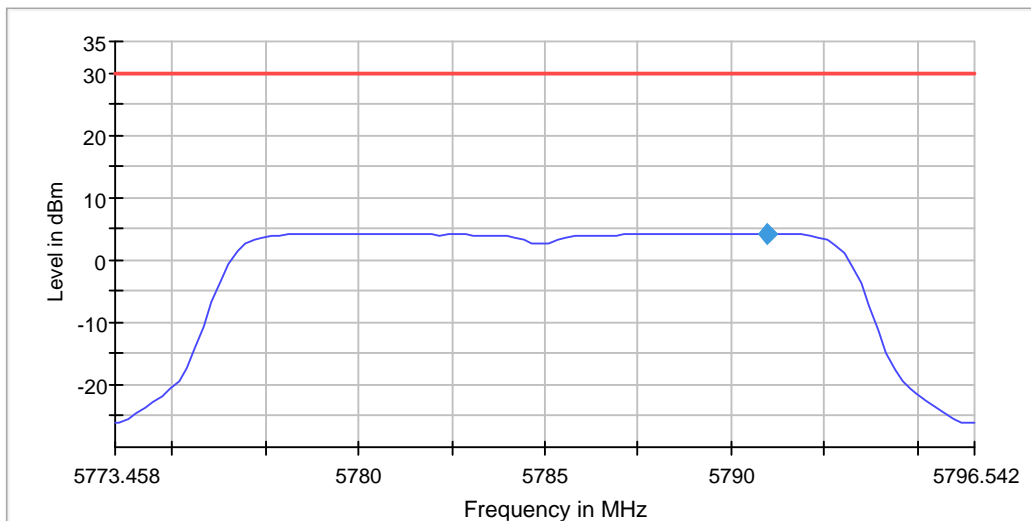

Measurement


Setting	Instrument Value	Target Value
Start Frequency	5.77346 GHz	5.77346 GHz
Stop Frequency	5.79654 GHz	5.79654 GHz
Span	23.085 MHz	23.085 MHz
RBW	1.000 MHz	<= 1.000 MHz
VBW	3.000 MHz	>= 3.000 MHz
SweepPoints	101	~ 46
SweepTime	2.020 s	2.020 s
Reference Level	-20.000 dBm	-20.000 dBm
Attenuation	0.000 dB	AUTO
Detector	RMS	RMS
SweepCount	3	3
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.30	0.30
Run	3 / max. 15	max. 15
Stable	3 / 3	3

Minimum Emission Bandwidth 6 dB (5825 MHz; 20 MHz)

Test according to FCC title 47 part 15 §15.407(a),(e), KDB 789033 D02 General U-NII Test Procedures New Rules v01r02 and ANSI C63.10

6 dB Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)	Max Level (dBm)	Result
5825.000000	16.458853	0.500000	---	5816.720698	5833.179551	5.7	PASS

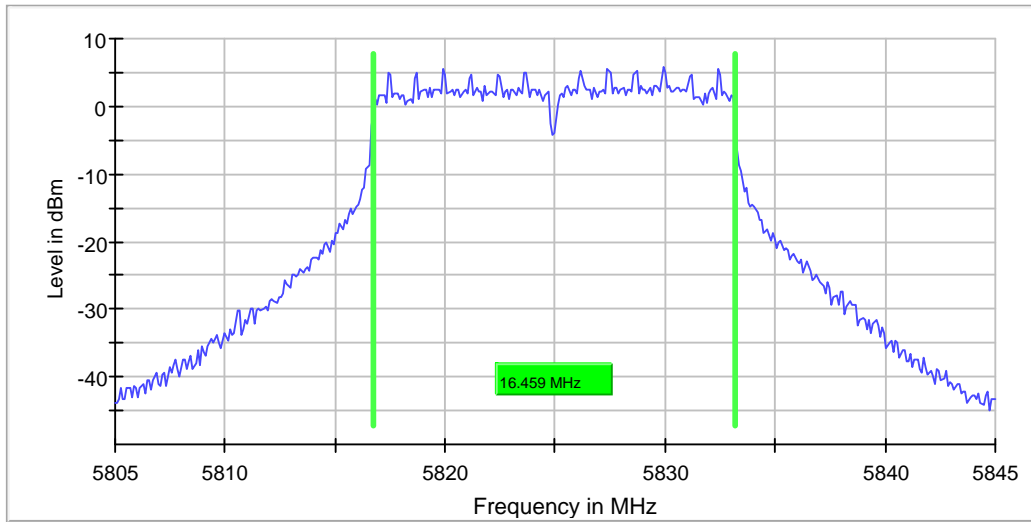

Measurement


Setting	Instrument Value	Target Value
Start Frequency	5.80500 GHz	5.80500 GHz
Stop Frequency	5.84500 GHz	5.84500 GHz
Span	40.000 MHz	40.000 MHz
RBW	100.000 kHz	~ 100.000 kHz
VBW	300.000 kHz	~ 300.000 kHz
SweepPoints	400	~ 400
Sweeptime	56.886 μs	AUTO
Reference Level	-10.000 dBm	-10.000 dBm
Attenuation	10.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	200	200
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	FFT	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.30	0.30
Run	37 / max. 150	max. 150
Stable	5 / 5	5

Emission Bandwidth 26 dB (5825 MHz; 20 MHz)

Test according to FCC title 47 part 15 §15.407(a),(e), KDB 789033 D02 General U-NII Test Procedures New Rules v01r02 and ANSI C63.10

26 dB Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)	Max Level (dBm)	Result
5825.000000	22.089553	---	---	5814.054726	5836.144279	6.6	PASS

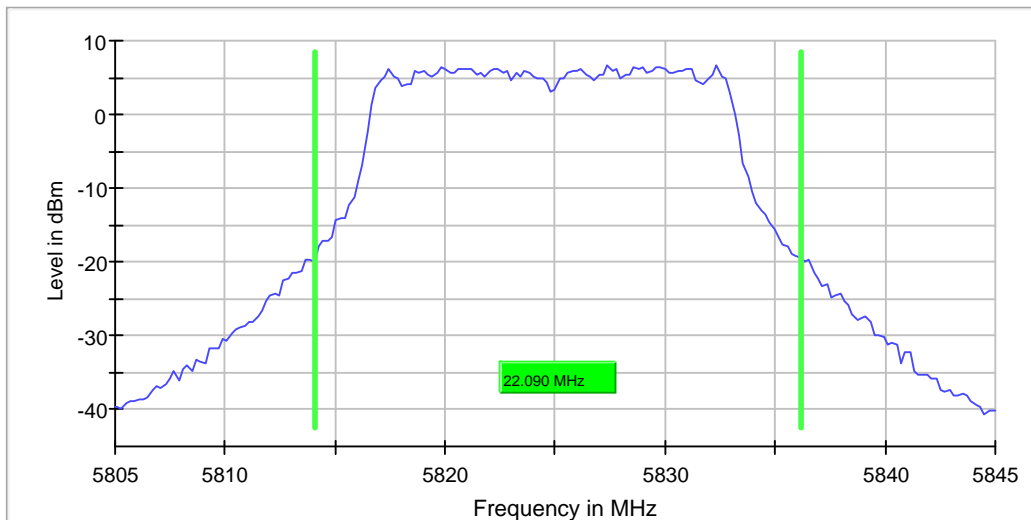

Measurement


Setting	Instrument Value	Target Value
Start Frequency	5.80500 GHz	5.80500 GHz
Stop Frequency	5.84500 GHz	5.84500 GHz
Span	40.000 MHz	40.000 MHz
RBW	200.000 kHz	~ 200.000 kHz
VBW	1.000 MHz	>= 600.000 kHz
SweepPoints	200	~ 200
Sweeptime	28.443 μs	AUTO
Reference Level	-10.000 dBm	-10.000 dBm
Attenuation	10.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	200	200
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
Sweeptype	FFT	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.30	0.30
Run	55 / max. 150	max. 150
Stable	5 / 5	5

Occupied Channel Bandwidth 99% (5825 MHz; 20 MHz)

Test according to FCC title 47 part 15 §15.407(a),(e), KDB 789033 D02 General U-NII Test Procedures New Rules v01r02 and ANSI C63.10

99 % Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)	Result
5825.000000	16.517413	---	---	5816.641791	5833.159204	PASS

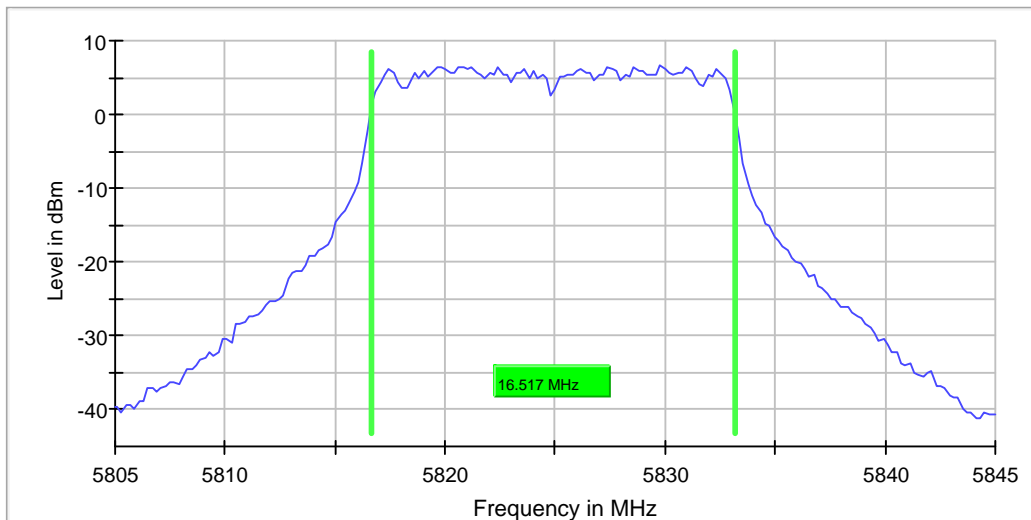

Measurement

Setting	Instrument Value	Target Value
Start Frequency	5.80500 GHz	5.80500 GHz
Stop Frequency	5.84500 GHz	5.84500 GHz
Span	40.000 MHz	40.000 MHz
RBW	200.000 kHz	<= 200.000 kHz
VBW	1.000 MHz	>= 600.000 kHz
SweepPoints	200	~ 200
SweepTime	28.443 μs	AUTO
Reference Level	-10.000 dBm	-10.000 dBm
Attenuation	10.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	200	200
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	FFT	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.30	0.30
Run	32 / max. 150	max. 150
Stable	5 / 5	5

Band Edge high (5825 MHz; 20 MHz)

Test according to FCC title 47 part 15 §15.407(b), KDB 789033 D02 General U-NII Test Procedures New Rules v01r02 and ANSI C63.10

Result


DUT Frequency (MHz)	Result
5825.000000	PASS

Inband Peak

Frequency (MHz)	Level (dBm)
5830.328685	5.4

Measurements

Frequency (MHz)	Level (dBm)	Margin (dB)	Limit (dBm)	Result
7419.872270	-64.1	22.9	-41.2	PASS
7308.413551	-64.1	22.9	-41.2	PASS
7299.916698	-64.1	22.9	-41.2	PASS
7300.416512	-64.1	22.9	-41.2	PASS
7289.920400	-64.1	22.9	-41.2	PASS
7293.419104	-64.2	22.9	-41.2	PASS
7297.417623	-64.2	22.9	-41.2	PASS
7298.417253	-64.2	22.9	-41.2	PASS
7290.420215	-64.2	22.9	-41.2	PASS
7300.916327	-64.2	22.9	-41.2	PASS
7295.418364	-64.2	22.9	-41.2	PASS
7298.917068	-64.2	22.9	-41.2	PASS
7309.413180	-64.2	22.9	-41.2	PASS
7301.915957	-64.2	22.9	-41.2	PASS
7302.415772	-64.2	23.0	-41.2	PASS

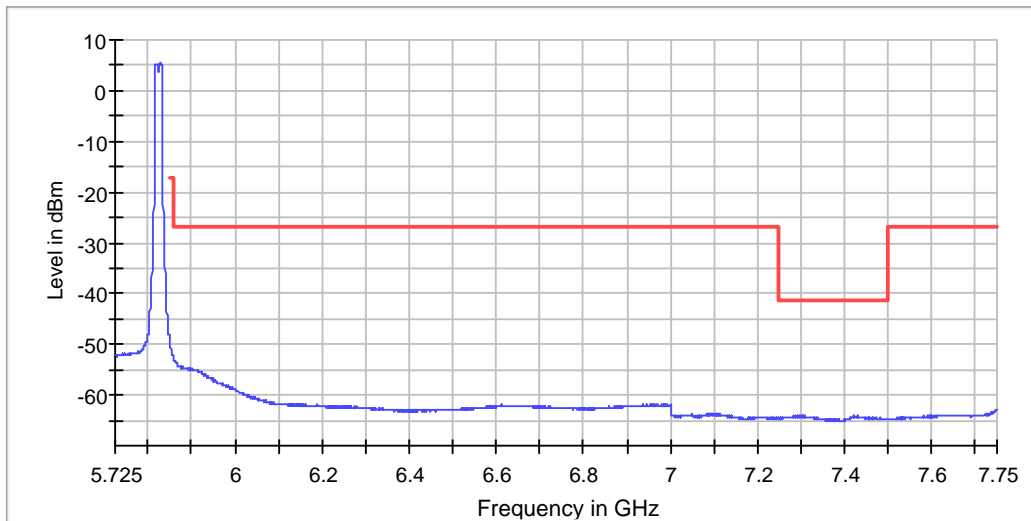

Measurement 1

Setting	Instrument Value	Target Value
RBW	1.000 MHz	<= 1.000 MHz
VBW	3.000 MHz	>= 3.000 MHz
SweepPoints	250	~ 250
SweepTime	250.000 ms	250.000 ms
Reference Level	-10.000 dBm	-10.000 dBm
Attenuation	10.000 dB	AUTO
Detector	RMS	RMS
SweepCount	5	5
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.30	0.30
Run	3 / max. 15	max. 15
Stable	3 / 3	3

Measurement 2

Setting	Instrument Value	Target Value
RBW	1.000 MHz	<= 1.000 MHz
VBW	3.000 MHz	>= 3.000 MHz
SweepPoints	1100	~ 1100
SweepTime	1.100 s	1.100 s
Reference Level	-20.000 dBm	-20.000 dBm
Attenuation	0.000 dB	AUTO
Detector	RMS	RMS
SweepCount	5	5
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.30	0.30
Run	3 / max. 15	max. 15
Stable	3 / 3	3

Tx Spurious Emission (5825 MHz; 20 MHz)

Test according to FCC title 47 part 15 §15.407(b), KDB 789033 D02 General U-NII Test Procedures New Rules v01r02 and ANSI C63.10

Result

DUT Frequency (MHz)	Result
5825.000000	PASS

Final measurements


Frequency (MHz)	Level Pre Measurement (dBm)	level (dBm)	Limit (dBm)	Margin (dB)	Result
1619.350759	-41.2	-52.6	-41.2	11.3	PASS
5373.305785	-41.5	-52.7	-41.2	11.5	PASS

Pre Measurements

Frequency (MHz)	Level (dBm)	Margin (dB)	Limit (dBm)
1619.350759	-41.2	0.0	-41.2
5373.305785	-41.5	0.3	-41.2
1622.350036	-42.3	1.1	-41.2
1623.349795	-42.4	1.1	-41.2
5394.132231	-42.6	1.3	-41.2
5372.314050	-42.8	1.6	-41.2
5377.272727	-42.9	1.6	-41.2
5374.297521	-42.9	1.7	-41.2
5423.884298	-43.0	1.8	-41.2
5424.876033	-43.0	1.8	-41.2
5393.140496	-43.1	1.9	-41.2
5445.702479	-43.2	2.0	-41.2
5382.231405	-43.4	2.2	-41.2
5444.710744	-43.5	2.3	-41.2
5380.247934	-43.6	2.3	-41.2

Measurement Settings

Start Frequency (MHz)	Stop Frequency (MHz)	Pre Measurement	Final Measurement
30.000000	1000.000000	1	1
1000.000000	5150.000000	2	2
5150.000000	5250.000000	2	2
5250.000000	5350.000000	2	2
5350.000000	5470.000000	2	2
5470.000000	5725.000000	2	2
5725.000000	5850.000000	2	2
5850.000000	7000.000000	2	2
7000.000000	26000.000000	2	2
26000.000000	40000.000000	2	2

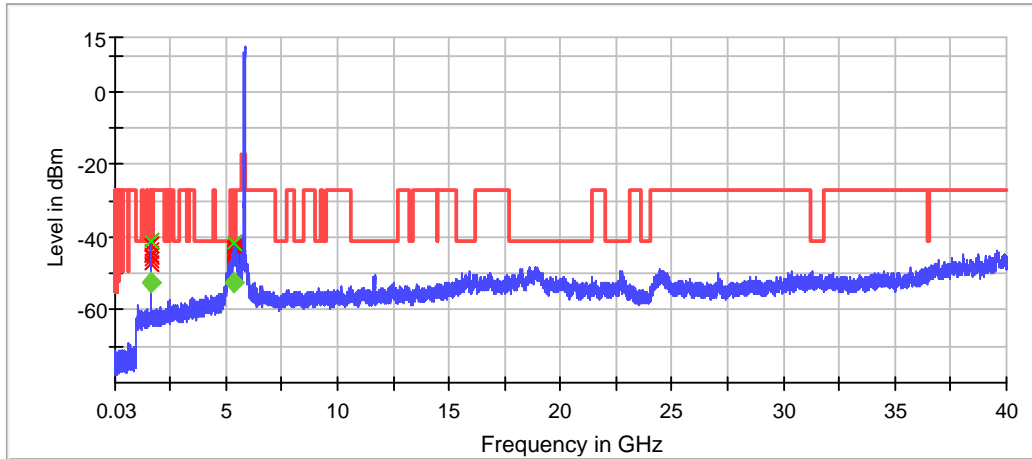

◆ Limit [limit.Result:1] × Threshold [limit.2.Result:1]
◆ Critical [Over Limit.Result:1] ◆ Sum Level [trace.Result:1]

Final Measurement

Setting	Instrument Value	Target Value
Span	ZeroSpan	ZeroSpan
RBW	1.000 MHz	~ 1.000 MHz
VBW	3.000 MHz	~ 3.000 MHz
SweepPoints	10001	~ 10001
Sweeptime	50.000 ms	50.000 ms
Reference Level	-10.000 dBm	-10.000 dBm
Attenuation	0.000 dB	0.000 dB
Detector	RMS	RMS
SweepCount	1	1
Filter	3 dB	3 dB
Trace Mode	Clear Write	Clear Write
Sweeptype	Sweep	AUTO
Preamp	off	off

UNII-3 ANT1 AC Mode 20MHz Power Spectral Density (5745 MHz; 23.0846 MHz)


Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v01r02 and ANSI C63.10

Result

DUT Frequency (MHz)	Frequency (MHz)	PSD (dBm)	Limit Max (dBm)	Result
5745.000000	5750.771150	1.113	30.0	PASS

Ports

Port	Duty Cycle (%)
1	95.210

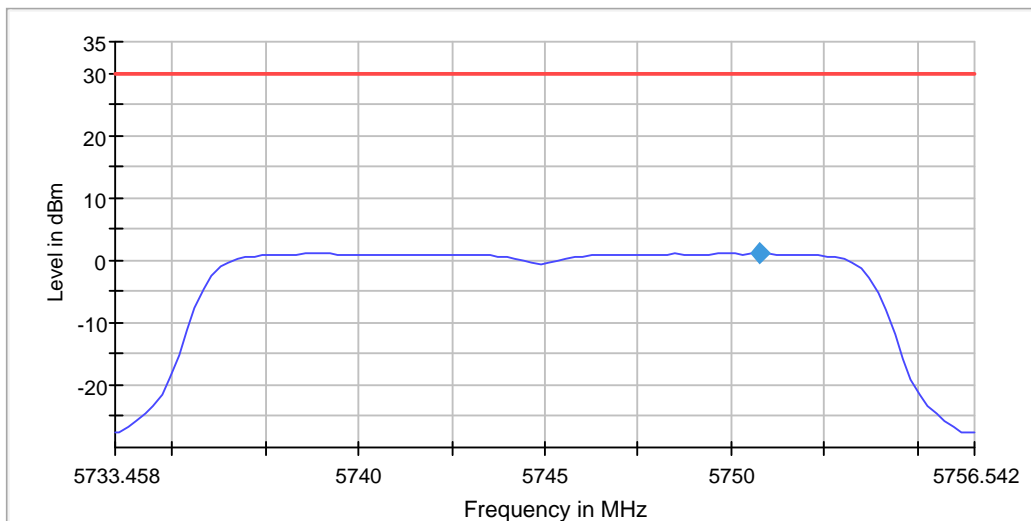

Measurement


Setting	Instrument Value	Target Value
Start Frequency	5.73346 GHz	5.73346 GHz
Stop Frequency	5.75654 GHz	5.75654 GHz
Span	23.085 MHz	23.085 MHz
RBW	1.000 MHz	<= 1.000 MHz
VBW	3.000 MHz	>= 3.000 MHz
SweepPoints	101	~ 46
SweepTime	2.020 s	2.020 s
Reference Level	-20.000 dBm	-20.000 dBm
Attenuation	0.000 dB	AUTO
Detector	RMS	RMS
SweepCount	3	3
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.30	0.30
Run	3 / max. 15	max. 15
Stable	3 / 3	3

Minimum Emission Bandwidth 6 dB (5745 MHz; 20 MHz)

Test according to FCC title 47 part 15 §15.407(a),(e), KDB 789033 D02 General U-NII Test Procedures New Rules v01r02 and ANSI C63.10

6 dB Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)	Max Level (dBm)	Result
5745.000000	17.75611	0.500000	---	5736.022444	5753.778055	2.3	PASS

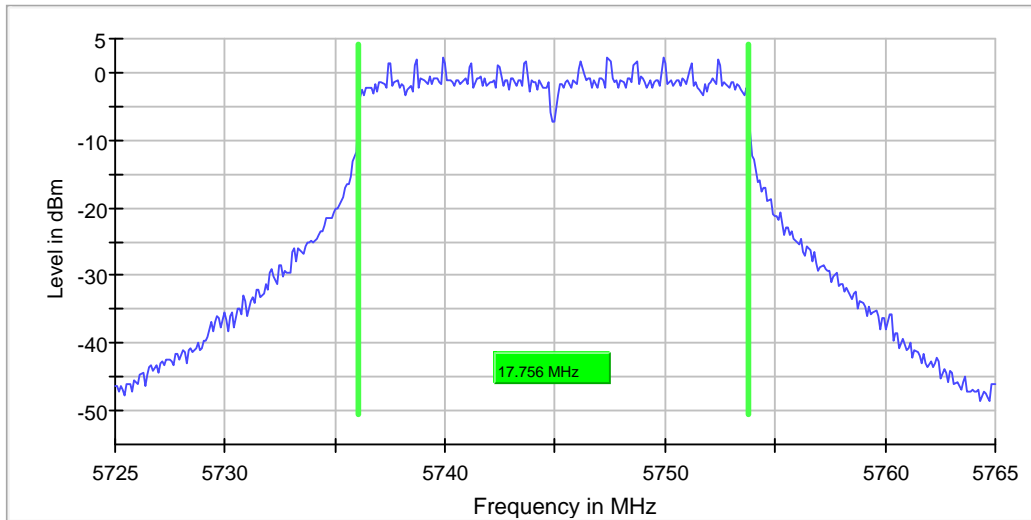

Measurement


Setting	Instrument Value	Target Value
Start Frequency	5.72500 GHz	5.72500 GHz
Stop Frequency	5.76500 GHz	5.76500 GHz
Span	40.000 MHz	40.000 MHz
RBW	100.000 kHz	~ 100.000 kHz
VBW	300.000 kHz	~ 300.000 kHz
SweepPoints	400	~ 400
SweepTime	56.886 μ s	AUTO
Reference Level	-20.000 dBm	-20.000 dBm
Attenuation	0.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	200	200
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	FFT	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.30	0.30
Run	86 / max. 150	max. 150
Stable	5 / 5	5

Emission Bandwidth 26 dB (5745 MHz; 20 MHz)

Test according to FCC title 47 part 15 §15.407(a),(e), KDB 789033 D02 General U-NII Test Procedures New Rules v01r02 and ANSI C63.10

26 dB Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)	Max Level (dBm)	Result
5745.000000	23.084578	---	---	5733.457711	5756.542289	3.1	PASS

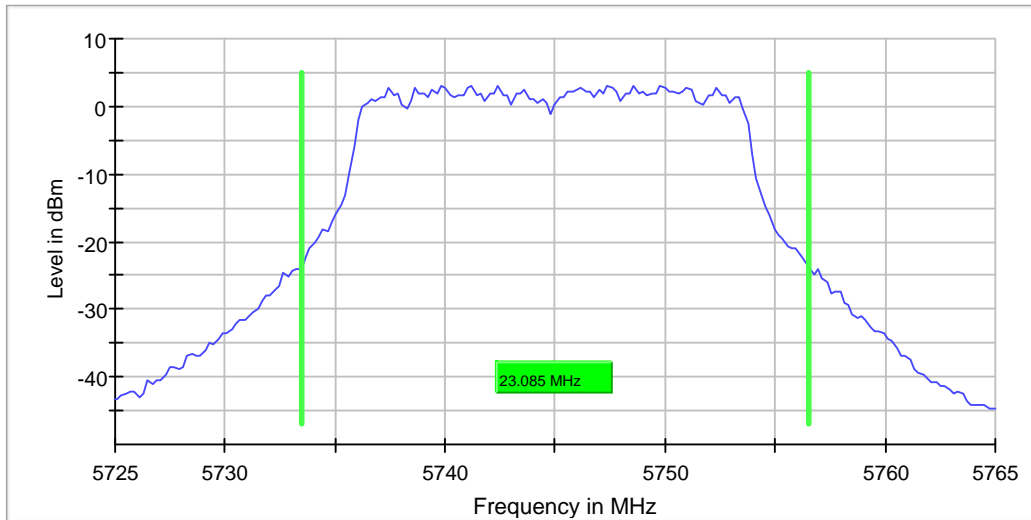

Measurement


Setting	Instrument Value	Target Value
Start Frequency	5.72500 GHz	5.72500 GHz
Stop Frequency	5.76500 GHz	5.76500 GHz
Span	40.000 MHz	40.000 MHz
RBW	200.000 kHz	~ 200.000 kHz
VBW	1.000 MHz	>= 600.000 kHz
SweepPoints	200	~ 200
Sweeptime	28.443 μs	AUTO
Reference Level	-10.000 dBm	-10.000 dBm
Attenuation	10.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	200	200
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
Sweeptype	FFT	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.30	0.30
Run	44 / max. 150	max. 150
Stable	5 / 5	5

Occupied Channel Bandwidth 99% (5745 MHz; 20 MHz)

Test according to FCC title 47 part 15 §15.407(a),(e), KDB 789033 D02 General U-NII Test Procedures New Rules v01r02 and ANSI C63.10

99 % Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)	Result
5745.000000	17.711443	---	---	5736.044776	5753.756219	PASS

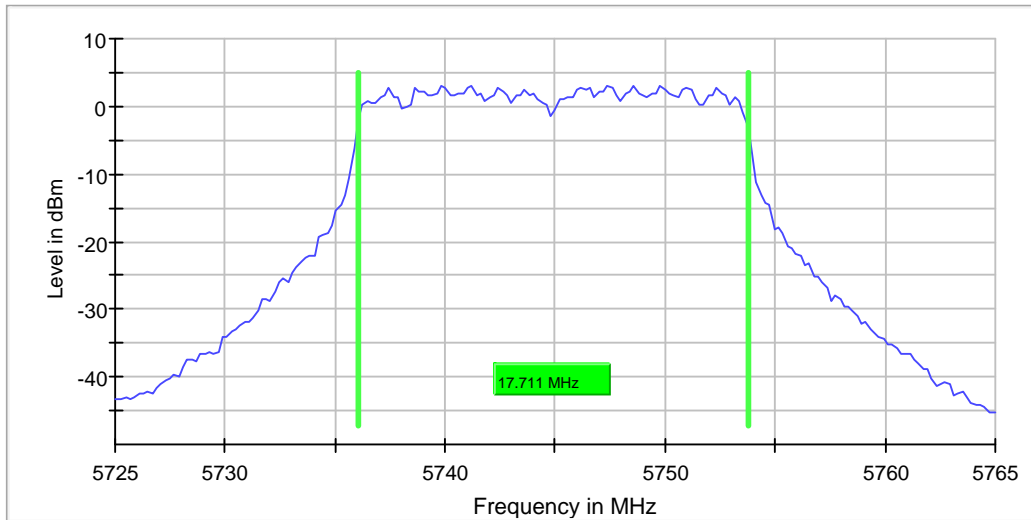

Measurement

Setting	Instrument Value	Target Value
Start Frequency	5.72500 GHz	5.72500 GHz
Stop Frequency	5.76500 GHz	5.76500 GHz
Span	40.000 MHz	40.000 MHz
RBW	200.000 kHz	<= 200.000 kHz
VBW	1.000 MHz	>= 600.000 kHz
SweepPoints	200	~ 200
Sweeptime	28.443 μs	AUTO
Reference Level	-10.000 dBm	-10.000 dBm
Attenuation	10.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	200	200
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
Sweeptype	FFT	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.30	0.30
Run	33 / max. 150	max. 150
Stable	5 / 5	5

Band Edge low (5745 MHz; 20 MHz)

Test according to FCC title 47 part 15 §15.407(b), KDB 789033 D02 General U-NII Test Procedures New Rules v01r02 and ANSI C63.10

Result


DUT Frequency (MHz)	Result
5745.000000	PASS

Inband Peak

Frequency (MHz)	Level (dBm)
5751.145418	1.5

Measurements

Frequency (MHz)	Level (dBm)	Margin (dB)	Limit (dBm)	Result
5389.697071	-49.7	8.4	-41.2	PASS
5385.702397	-49.8	8.6	-41.2	PASS
5421.155126	-50.0	8.8	-41.2	PASS
5379.710386	-50.0	8.8	-41.2	PASS
5418.159121	-50.1	8.9	-41.2	PASS
5390.196405	-50.6	9.3	-41.2	PASS
5445.622503	-50.6	9.4	-41.2	PASS
5379.211052	-50.8	9.6	-41.2	PASS
5446.121838	-51.4	10.1	-41.2	PASS
5418.658455	-51.5	10.2	-41.2	PASS
5417.659787	-51.5	10.3	-41.2	PASS
5421.654461	-51.6	10.4	-41.2	PASS
5386.201731	-51.7	10.4	-41.2	PASS
5385.203063	-51.8	10.6	-41.2	PASS
5420.655792	-52.3	11.0	-41.2	PASS

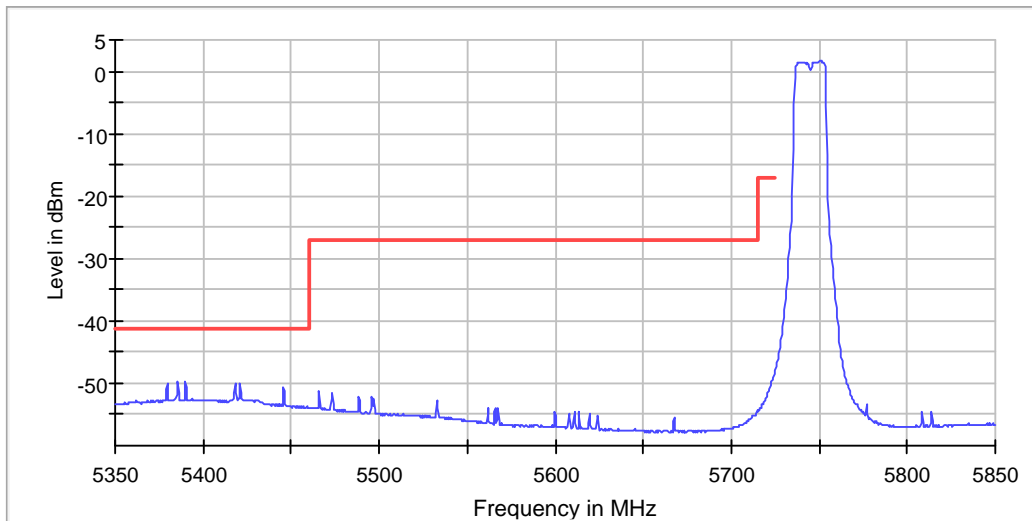

Measurement 1

Setting	Instrument Value	Target Value
RBW	1.000 MHz	<= 1.000 MHz
VBW	3.000 MHz	>= 3.000 MHz
SweepPoints	250	~ 250
SweepTime	250.000 ms	250.000 ms
Reference Level	-20.000 dBm	-20.000 dBm
Attenuation	0.000 dB	AUTO
Detector	RMS	RMS
SweepCount	5	5
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.30	0.30
Run	3 / max. 15	max. 15
Stable	3 / 3	3

Measurement 2

Setting	Instrument Value	Target Value
RBW	1.000 MHz	<= 1.000 MHz
VBW	3.000 MHz	>= 3.000 MHz
SweepPoints	750	~ 750
SweepTime	750.000 ms	750.000 ms
Reference Level	-20.000 dBm	-20.000 dBm
Attenuation	0.000 dB	AUTO
Detector	RMS	RMS
SweepCount	5	5
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.30	0.30
Run	3 / max. 15	max. 15
Stable	3 / 3	3

Tx Spurious Emission (5745 MHz; 20 MHz)

Test according to FCC title 47 part 15 §15.407(b), KDB 789033 D02 General U-NII Test Procedures New Rules v01r02 and ANSI C63.10

Result

DUT Frequency (MHz)	Result
5745.000000	PASS

Final measurements


Frequency (MHz)	Level Pre Measurement (dBm)	level (dBm)	Limit (dBm)	Margin (dB)	Result
5379.256198	-43.4	-54.5	-41.2	13.3	PASS

Pre Measurements

Frequency (MHz)	Level (dBm)	Margin (dB)	Limit (dBm)
5379.256198	-43.4	2.2	-41.2
5430.826446	-44.4	3.2	-41.2
5378.264463	-44.4	3.2	-41.2
5360.413223	-44.7	3.5	-41.2
5445.702479	-45.0	3.8	-41.2
5444.710744	-45.0	3.8	-41.2
5417.933884	-45.2	3.9	-41.2
5418.925620	-45.2	4.0	-41.2
5401.074380	-45.3	4.1	-41.2
5373.305785	-45.4	4.2	-41.2
5377.272727	-45.4	4.2	-41.2
5380.247934	-45.5	4.2	-41.2
5426.859504	-45.5	4.3	-41.2
5425.867769	-45.6	4.4	-41.2
5447.685950	-45.7	4.5	-41.2

Measurement Settings

Start Frequency (MHz)	Stop Frequency (MHz)	Pre Measurement	Final Measurement
30.000000	1000.000000	1	1
1000.000000	5150.000000	2	2
5150.000000	5250.000000	2	2
5250.000000	5350.000000	2	2
5350.000000	5470.000000	2	2
5470.000000	5725.000000	2	2
5725.000000	5850.000000	2	2
5850.000000	7000.000000	2	2
7000.000000	26000.000000	2	2
26000.000000	40000.000000	2	2

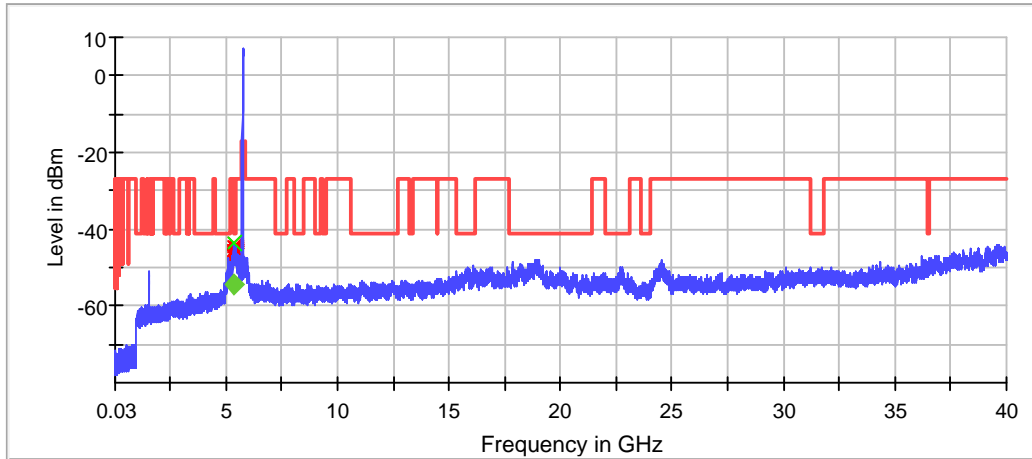

— Limit [limit.Result:1] x Threshold [limit 2.Result:1]
◆ Critical [Over Limit.Result:1] ◆ Sum Level [trace.Result:1]

Final Measurement

Setting	Instrument Value	Target Value
Span	ZeroSpan	ZeroSpan
RBW	1.000 MHz	~ 1.000 MHz
VBW	3.000 MHz	~ 3.000 MHz
SweepPoints	10001	~ 10001
Sweeptime	50.000 ms	50.000 ms
Reference Level	-20.000 dBm	-20.000 dBm
Attenuation	0.000 dB	0.000 dB
Detector	RMS	RMS
SweepCount	1	1
Filter	3 dB	3 dB
Trace Mode	Clear Write	Clear Write
SweepType	Sweep	AUTO
Preamp	off	off

Power Spectral Density (5785 MHz; 22.8856 MHz)


Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v01r02 and ANSI C63.10

Result

DUT Frequency (MHz)	Frequency (MHz)	PSD (dBm)	Limit Max (dBm)	Result
5785.000000	5779.502969	0.671	30.0	PASS

Ports

Port	Duty Cycle (%)
1	95.221

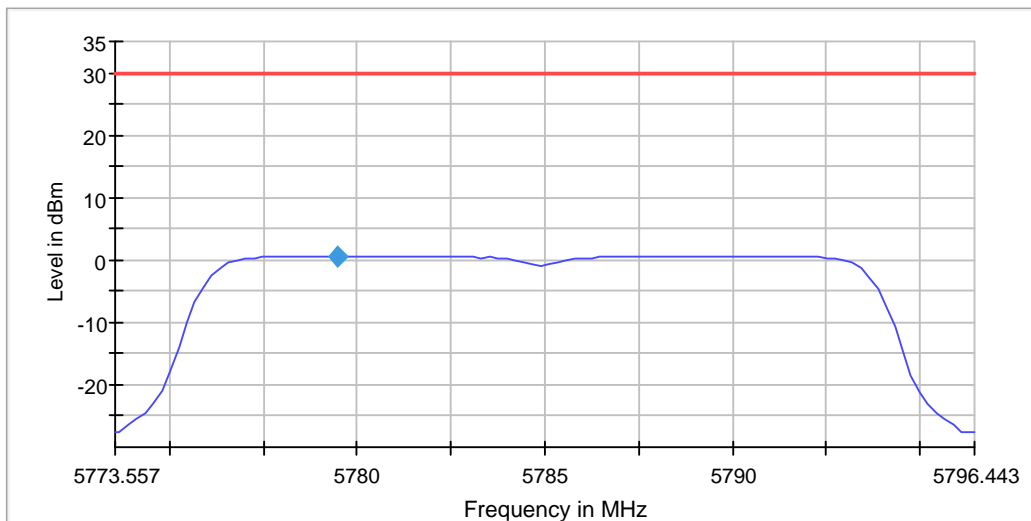

Measurement


Setting	Instrument Value	Target Value
Start Frequency	5.77356 GHz	5.77356 GHz
Stop Frequency	5.79644 GHz	5.79644 GHz
Span	22.886 MHz	22.886 MHz
RBW	1.000 MHz	<= 1.000 MHz
VBW	3.000 MHz	>= 3.000 MHz
SweepPoints	101	~ 46
SweepTime	2.020 s	2.020 s
Reference Level	-20.000 dBm	-20.000 dBm
Attenuation	0.000 dB	AUTO
Detector	RMS	RMS
SweepCount	3	3
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.30	0.30
Run	3 / max. 15	max. 15
Stable	3 / 3	3

Minimum Emission Bandwidth 6 dB (5785 MHz; 20 MHz)

Test according to FCC title 47 part 15 §15.407(a),(e), KDB 789033 D02 General U-NII Test Procedures New Rules v01r02 and ANSI C63.10

6 dB Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)	Max Level (dBm)	Result
5785.000000	17.755611	0.500000	---	5776.022444	5793.778055	1.7	PASS

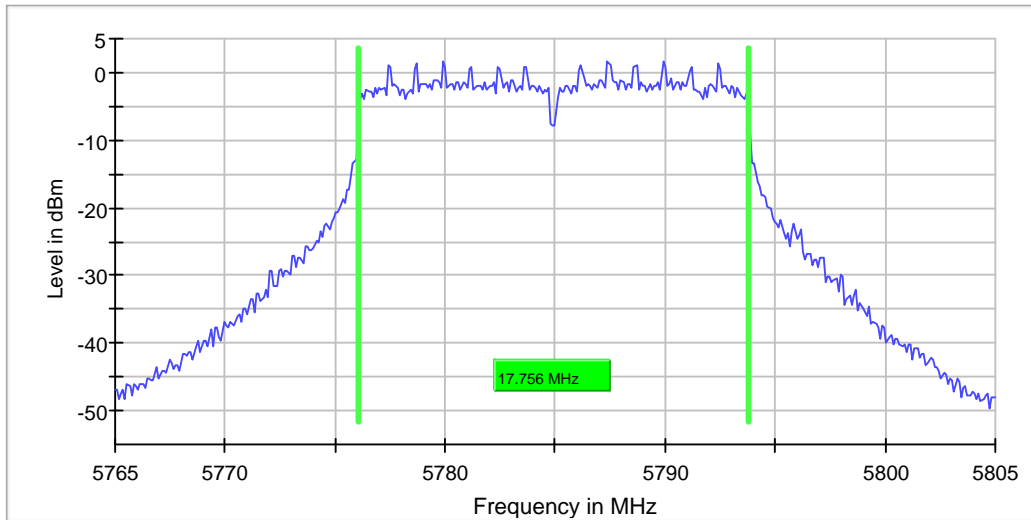

Measurement


Setting	Instrument Value	Target Value
Start Frequency	5.76500 GHz	5.76500 GHz
Stop Frequency	5.80500 GHz	5.80500 GHz
Span	40.000 MHz	40.000 MHz
RBW	100.000 kHz	~ 100.000 kHz
VBW	300.000 kHz	~ 300.000 kHz
SweepPoints	400	~ 400
SweepTime	56.886 μs	AUTO
Reference Level	-20.000 dBm	-20.000 dBm
Attenuation	0.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	200	200
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	FFT	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.30	0.30
Run	46 / max. 150	max. 150
Stable	5 / 5	5

Emission Bandwidth 26 dB (5785 MHz; 20 MHz)

Test according to FCC title 47 part 15 §15.407(a),(e), KDB 789033 D02 General U-NII Test Procedures New Rules v01r02 and ANSI C63.10

26 dB Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)	Max Level (dBm)	Result
5785.000000	22.885573	---	---	5773.457711	5796.343284	2.7	PASS

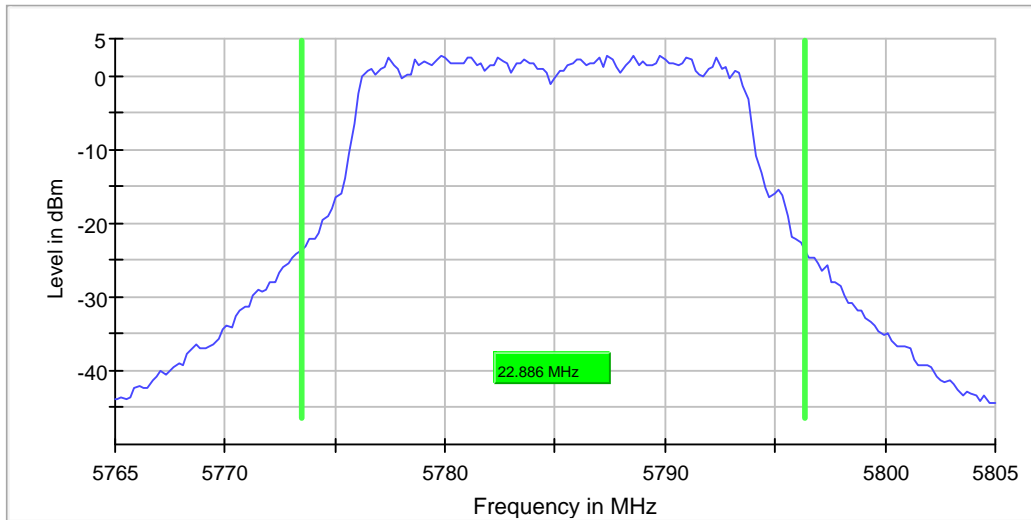

Measurement


Setting	Instrument Value	Target Value
Start Frequency	5.76500 GHz	5.76500 GHz
Stop Frequency	5.80500 GHz	5.80500 GHz
Span	40.000 MHz	40.000 MHz
RBW	200.000 kHz	~ 200.000 kHz
VBW	1.000 MHz	>= 600.000 kHz
SweepPoints	200	~ 200
Sweeptime	28.443 μs	AUTO
Reference Level	-10.000 dBm	-10.000 dBm
Attenuation	10.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	200	200
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
Sweeptype	FFT	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.30	0.30
Run	55 / max. 150	max. 150
Stable	5 / 5	5

Occupied Channel Bandwidth 99% (5785 MHz; 20 MHz)

Test according to FCC title 47 part 15 §15.407(a),(e), KDB 789033 D02 General U-NII Test Procedures New Rules v01r02 and ANSI C63.10

99 % Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)	Result
5785.000000	17.711443	---	---	5776.044776	5793.756219	PASS

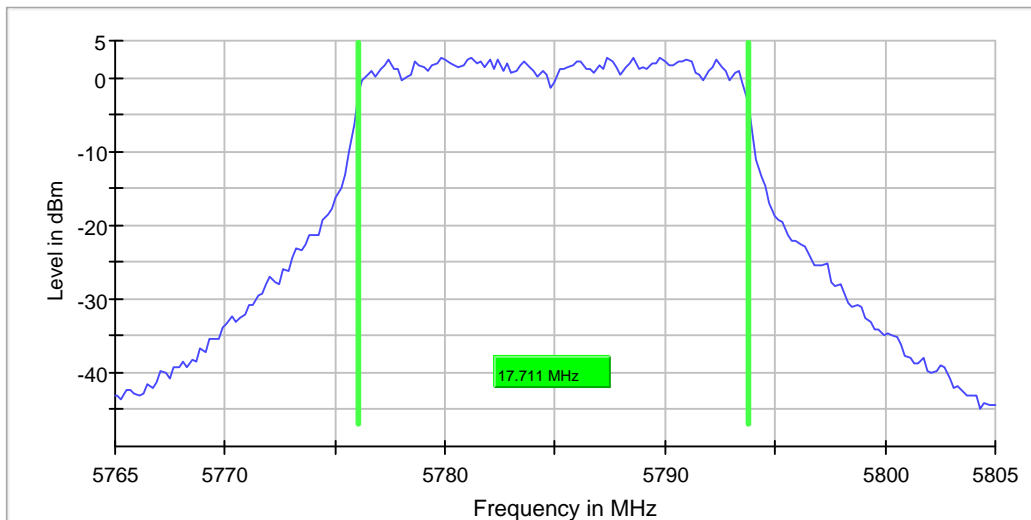

Measurement

Setting	Instrument Value	Target Value
Start Frequency	5.76500 GHz	5.76500 GHz
Stop Frequency	5.80500 GHz	5.80500 GHz
Span	40.000 MHz	40.000 MHz
RBW	200.000 kHz	<= 200.000 kHz
VBW	1.000 MHz	>= 600.000 kHz
SweepPoints	200	~ 200
SweepTime	28.443 μs	AUTO
Reference Level	-10.000 dBm	-10.000 dBm
Attenuation	10.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	200	200
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	FFT	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.30	0.30
Run	49 / max. 150	max. 150
Stable	5 / 5	5

Tx Spurious Emission (5785 MHz; 20 MHz)

Test according to FCC title 47 part 15 §15.407(b), KDB 789033 D02 General U-NII Test Procedures New Rules v01r02 and ANSI C63.10

Result

DUT Frequency (MHz)	Result
5785.000000	PASS

Final measurements


Frequency (MHz)	Level Pre Measurement (dBm)	level (dBm)	Limit (dBm)	Margin (dB)	Result
5388.181818	-44.1	-54.4	-41.2	13.2	PASS

Pre Measurements

Frequency (MHz)	Level (dBm)	Margin (dB)	Limit (dBm)
5388.181818	-44.1	2.8	-41.2
5352.479339	-44.6	3.4	-41.2
5387.190083	-44.6	3.4	-41.2
5404.049587	-44.9	3.7	-41.2
5365.371901	-45.1	3.9	-41.2
5405.041322	-45.3	4.1	-41.2
5392.148760	-45.3	4.1	-41.2
5373.305785	-45.3	4.1	-41.2
5350.000000	-45.3	4.1	-41.2
5398.099174	-45.4	4.2	-41.2
5372.314050	-45.4	4.2	-41.2
5433.801653	-45.5	4.3	-41.2
5393.140496	-45.6	4.3	-41.2
5399.090909	-45.6	4.4	-41.2
5385.206612	-45.7	4.5	-41.2

Measurement Settings

Start Frequency (MHz)	Stop Frequency (MHz)	Pre Measurement	Final Measurement
30.000000	1000.000000	1	1
1000.000000	5150.000000	2	2
5150.000000	5250.000000	2	2
5250.000000	5350.000000	2	2
5350.000000	5470.000000	2	2
5470.000000	5725.000000	2	2
5725.000000	5850.000000	2	2
5850.000000	7000.000000	2	2
7000.000000	26000.000000	2	2
26000.000000	40000.000000	2	2

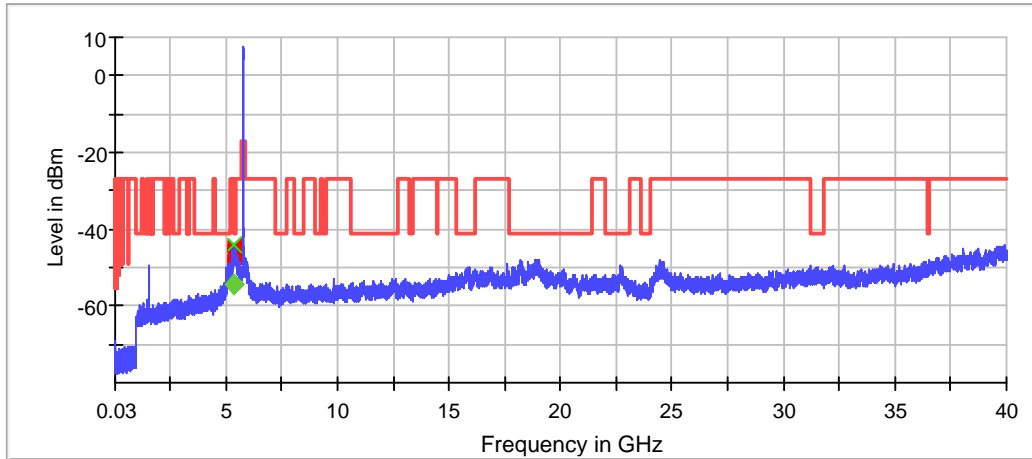

◆ Limit [limit.Result:1] × Threshold [limit.2.Result:1]
◆ Critical [Over Limit.Result:1] ◆ Sum Level [trace.Result:1]

Final Measurement

Setting	Instrument Value	Target Value
Span	ZeroSpan	ZeroSpan
RBW	1.000 MHz	~ 1.000 MHz
VBW	3.000 MHz	~ 3.000 MHz
SweepPoints	10001	~ 10001
Sweeptime	50.000 ms	50.000 ms
Reference Level	-20.000 dBm	-20.000 dBm
Attenuation	0.000 dB	0.000 dB
Detector	RMS	RMS
SweepCount	1	1
Filter	3 dB	3 dB
Trace Mode	Clear Write	Clear Write
SweepType	Sweep	AUTO
Preamp	off	off

Power Spectral Density (5825 MHz; 23.2836 MHz)


Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v01r02 and ANSI C63.10

Result

DUT Frequency (MHz)	Frequency (MHz)	PSD (dBm)	Limit Max (dBm)	Result
5825.000000	5830.592629	1.438	30.0	PASS

Ports

Port	Duty Cycle (%)
1	95.308

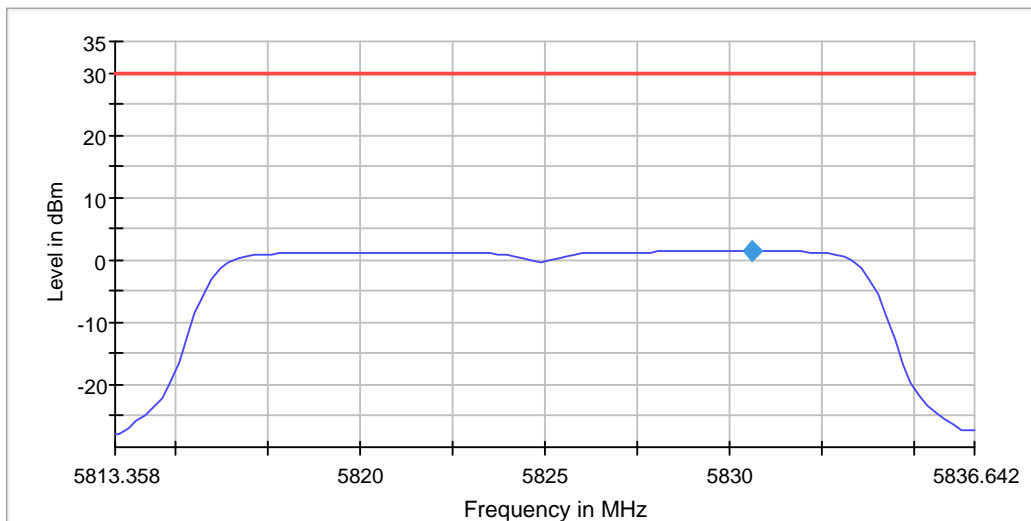

Measurement


Setting	Instrument Value	Target Value
Start Frequency	5.81336 GHz	5.81336 GHz
Stop Frequency	5.83664 GHz	5.83664 GHz
Span	23.284 MHz	23.284 MHz
RBW	1.000 MHz	<= 1.000 MHz
VBW	3.000 MHz	>= 3.000 MHz
SweepPoints	101	~ 47
SweepTime	2.020 s	2.020 s
Reference Level	-20.000 dBm	-20.000 dBm
Attenuation	0.000 dB	AUTO
Detector	RMS	RMS
SweepCount	3	3
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.30	0.30
Run	3 / max. 15	max. 15
Stable	3 / 3	3

Minimum Emission Bandwidth 6 dB (5825 MHz; 20 MHz)

Test according to FCC title 47 part 15 §15.407(a),(e), KDB 789033 D02 General U-NII Test Procedures New Rules v01r02 and ANSI C63.10

6 dB Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)	Max Level (dBm)	Result
5825.000000	17.755611	0.500000	---	5816.022444	5833.778055	2.5	PASS

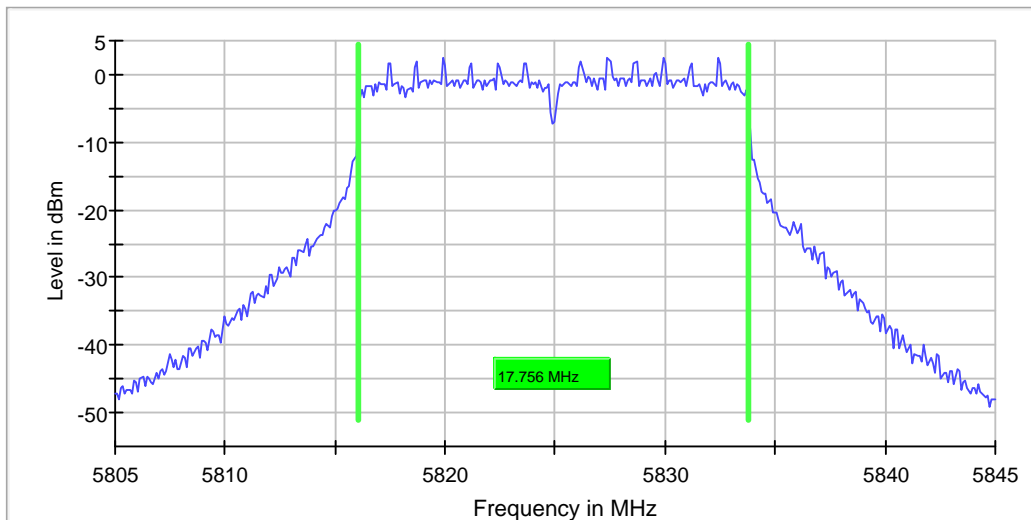

Measurement


Setting	Instrument Value	Target Value
Start Frequency	5.80500 GHz	5.80500 GHz
Stop Frequency	5.84500 GHz	5.84500 GHz
Span	40.000 MHz	40.000 MHz
RBW	100.000 kHz	~ 100.000 kHz
VBW	300.000 kHz	~ 300.000 kHz
SweepPoints	400	~ 400
SweepTime	56.886 μs	AUTO
Reference Level	-20.000 dBm	-20.000 dBm
Attenuation	0.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	200	200
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	FFT	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.30	0.30
Run	44 / max. 150	max. 150
Stable	5 / 5	5

Emission Bandwidth 26 dB (5825 MHz; 20 MHz)

Test according to FCC title 47 part 15 §15.407(a),(e), KDB 789033 D02 General U-NII Test Procedures New Rules v01r02 and ANSI C63.10

26 dB Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)	Max Level (dBm)	Result
5825.000000	23.283582	---	---	5812.860697	5836.144279	3.5	PASS

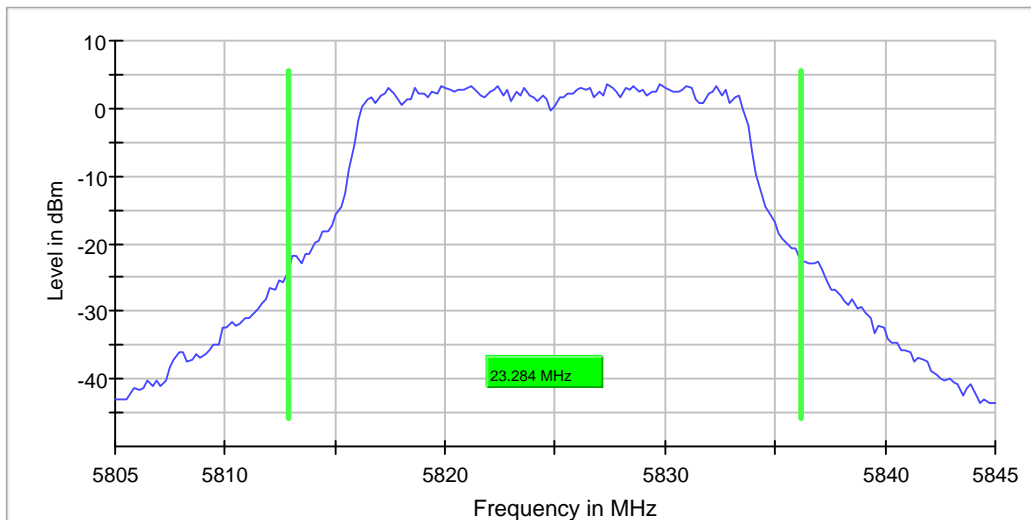

Measurement


Setting	Instrument Value	Target Value
Start Frequency	5.80500 GHz	5.80500 GHz
Stop Frequency	5.84500 GHz	5.84500 GHz
Span	40.000 MHz	40.000 MHz
RBW	200.000 kHz	~ 200.000 kHz
VBW	1.000 MHz	>= 600.000 kHz
SweepPoints	200	~ 200
Sweeptime	28.443 μs	AUTO
Reference Level	-10.000 dBm	-10.000 dBm
Attenuation	10.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	200	200
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
Sweeptype	FFT	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.30	0.30
Run	58 / max. 150	max. 150
Stable	5 / 5	5

Occupied Channel Bandwidth 99% (5825 MHz; 20 MHz)

Test according to FCC title 47 part 15 §15.407(a),(e), KDB 789033 D02 General U-NII Test Procedures New Rules v01r02 and ANSI C63.10

99 % Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)	Result
5825.000000	17.711443	---	---	5816.044776	5833.756219	PASS

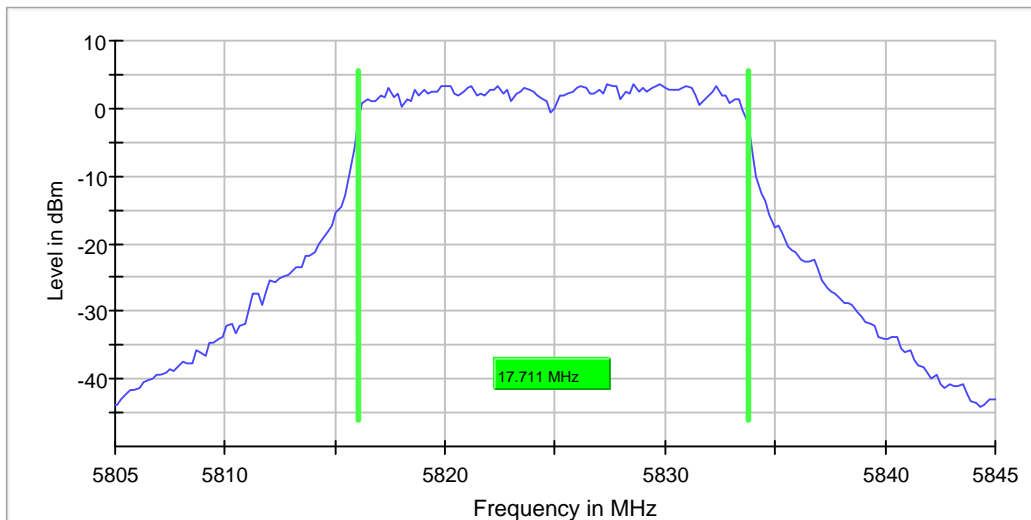

Measurement

Setting	Instrument Value	Target Value
Start Frequency	5.80500 GHz	5.80500 GHz
Stop Frequency	5.84500 GHz	5.84500 GHz
Span	40.000 MHz	40.000 MHz
RBW	200.000 kHz	<= 200.000 kHz
VBW	1.000 MHz	>= 600.000 kHz
SweepPoints	200	~ 200
Sweeptime	28.443 μs	AUTO
Reference Level	-10.000 dBm	-10.000 dBm
Attenuation	10.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	200	200
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
Sweeptype	FFT	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.30	0.30
Run	59 / max. 150	max. 150
Stable	5 / 5	5

Band Edge high (5825 MHz; 20 MHz)

Test according to FCC title 47 part 15 §15.407(b), KDB 789033 D02 General U-NII Test Procedures New Rules v01r02 and ANSI C63.10

Result


DUT Frequency (MHz)	Result
5825.000000	PASS

Inband Peak

Frequency (MHz)	Level (dBm)
5830.826693	1.9

Measurements

Frequency (MHz)	Level (dBm)	Margin (dB)	Limit (dBm)	Result
7294.918549	-64.0	22.8	-41.2	PASS
7306.414291	-64.0	22.8	-41.2	PASS
7297.917438	-64.1	22.8	-41.2	PASS
7309.413180	-64.1	22.8	-41.2	PASS
7287.921140	-64.1	22.9	-41.2	PASS
7300.916327	-64.1	22.9	-41.2	PASS
7296.917808	-64.1	22.9	-41.2	PASS
7296.417993	-64.1	22.9	-41.2	PASS
7299.416883	-64.2	22.9	-41.2	PASS
7302.915587	-64.2	22.9	-41.2	PASS
7303.415402	-64.2	22.9	-41.2	PASS
7295.418364	-64.2	22.9	-41.2	PASS
7301.416142	-64.2	23.0	-41.2	PASS
7293.918919	-64.2	23.0	-41.2	PASS
7304.415031	-64.2	23.0	-41.2	PASS

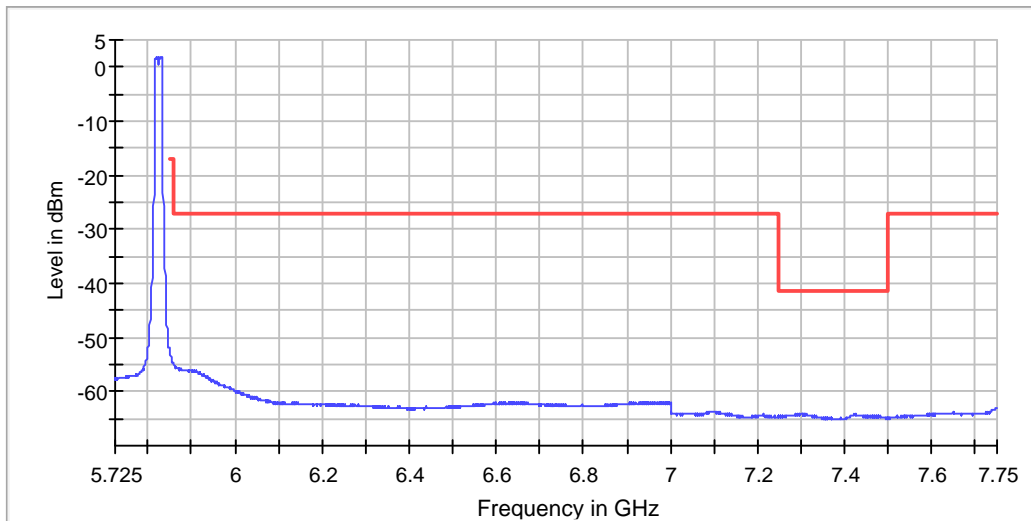

Measurement 1

Setting	Instrument Value	Target Value
RBW	1.000 MHz	<= 1.000 MHz
VBW	3.000 MHz	>= 3.000 MHz
SweepPoints	250	~ 250
SweepTime	250.000 ms	250.000 ms
Reference Level	-20.000 dBm	-20.000 dBm
Attenuation	0.000 dB	AUTO
Detector	RMS	RMS
SweepCount	5	5
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.30	0.30
Run	3 / max. 15	max. 15
Stable	3 / 3	3

Measurement 2

Setting	Instrument Value	Target Value
RBW	1.000 MHz	<= 1.000 MHz
VBW	3.000 MHz	>= 3.000 MHz
SweepPoints	1100	~ 1100
SweepTime	1.100 s	1.100 s
Reference Level	-20.000 dBm	-20.000 dBm
Attenuation	0.000 dB	AUTO
Detector	RMS	RMS
SweepCount	5	5
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.30	0.30
Run	3 / max. 15	max. 15
Stable	3 / 3	3

Tx Spurious Emission (5825 MHz; 20 MHz)

Test according to FCC title 47 part 15 §15.407(b), KDB 789033 D02 General U-NII Test Procedures New Rules v01r02 and ANSI C63.10

Result

DUT Frequency (MHz)	Result
5825.000000	PASS

Final measurements


Frequency (MHz)	Level Pre Measurement (dBm)	level (dBm)	Limit (dBm)	Margin (dB)	Result
1620.350518	-46.8	-57.5	-41.2	16.3	PASS
5350.000000	-43.9	-53.8	-41.2	12.6	PASS

Pre Measurements

Frequency (MHz)	Level (dBm)	Margin (dB)	Limit (dBm)
5350.000000	-43.9	2.7	-41.2
5411.983471	-43.9	2.7	-41.2
5407.024793	-44.0	2.7	-41.2
5410.991736	-44.0	2.8	-41.2
5370.330579	-44.2	2.9	-41.2
5408.016529	-44.2	3.0	-41.2
5369.338843	-44.3	3.0	-41.2
5378.264463	-44.4	3.1	-41.2
5431.818182	-44.5	3.2	-41.2
5390.165289	-44.6	3.4	-41.2
5379.256198	-44.6	3.4	-41.2
5353.471074	-44.7	3.5	-41.2
5375.289256	-44.9	3.6	-41.2
5453.636364	-45.0	3.7	-41.2
5452.644628	-45.0	3.8	-41.2

Measurement Settings

Start Frequency (MHz)	Stop Frequency (MHz)	Pre Measurement	Final Measurement
30.000000	1000.000000	1	1
1000.000000	5150.000000	2	2
5150.000000	5250.000000	2	2
5250.000000	5350.000000	2	2
5350.000000	5470.000000	2	2
5470.000000	5725.000000	2	2
5725.000000	5850.000000	2	2
5850.000000	7000.000000	2	2
7000.000000	26000.000000	2	2
26000.000000	40000.000000	2	2

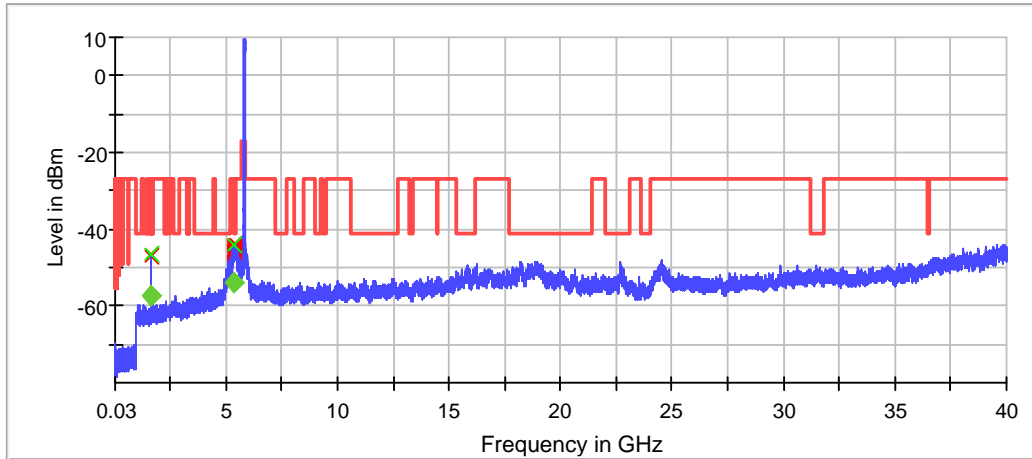

— Limit [limit.Result:1] X Threshold [limit 2.Result:1]
◆ Critical [Over Limit.Result:1] ◆ Sum Level [trace.Result:1]

Final Measurement

Setting	Instrument Value	Target Value
Span	ZeroSpan	ZeroSpan
RBW	1.000 MHz	~ 1.000 MHz
VBW	3.000 MHz	~ 3.000 MHz
SweepPoints	10001	~ 10001
Sweeptime	50.000 ms	50.000 ms
Reference Level	-20.000 dBm	-20.000 dBm
Attenuation	0.000 dB	0.000 dB
Detector	RMS	RMS
SweepCount	1	1
Filter	3 dB	3 dB
Trace Mode	Clear Write	Clear Write
SweepType	Sweep	AUTO
Preamp	off	off

UNII-3 ANT1 AC Mode 40MHz Power Spectral Density (5755 MHz; 43.8806 MHz)


Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v01r02 and ANSI C63.10

Result

DUT Frequency (MHz)	Frequency (MHz)	PSD (dBm)	Limit Max (dBm)	Result
5755.000000	5763.388938	-2.168	30.0	PASS

Ports

Port	Duty Cycle (%)
1	93.262

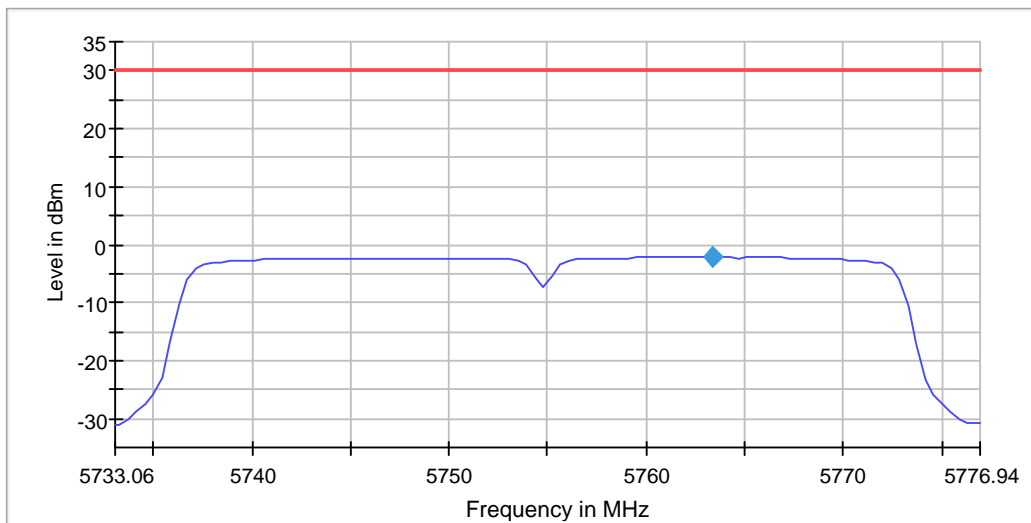

Measurement


Setting	Instrument Value	Target Value
Start Frequency	5.73306 GHz	5.73306 GHz
Stop Frequency	5.77694 GHz	5.77694 GHz
Span	43.881 MHz	43.881 MHz
RBW	1.000 MHz	<= 1.000 MHz
VBW	3.000 MHz	>= 3.000 MHz
SweepPoints	101	~ 88
SweepTime	2.020 s	2.020 s
Reference Level	-20.000 dBm	-20.000 dBm
Attenuation	0.000 dB	AUTO
Detector	RMS	RMS
SweepCount	3	3
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.30	0.30
Run	3 / max. 15	max. 15
Stable	3 / 3	3

Minimum Emission Bandwidth 6 dB (5755 MHz; 40 MHz)

Test according to FCC title 47 part 15 §15.407(a),(e), KDB 789033 D02 General U-NII Test Procedures New Rules v01r02 and ANSI C63.10

6 dB Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)	Max Level (dBm)	Result
5755.000000	36.454432	0.500000	---	5736.722846	5773.177278	-2.2	PASS

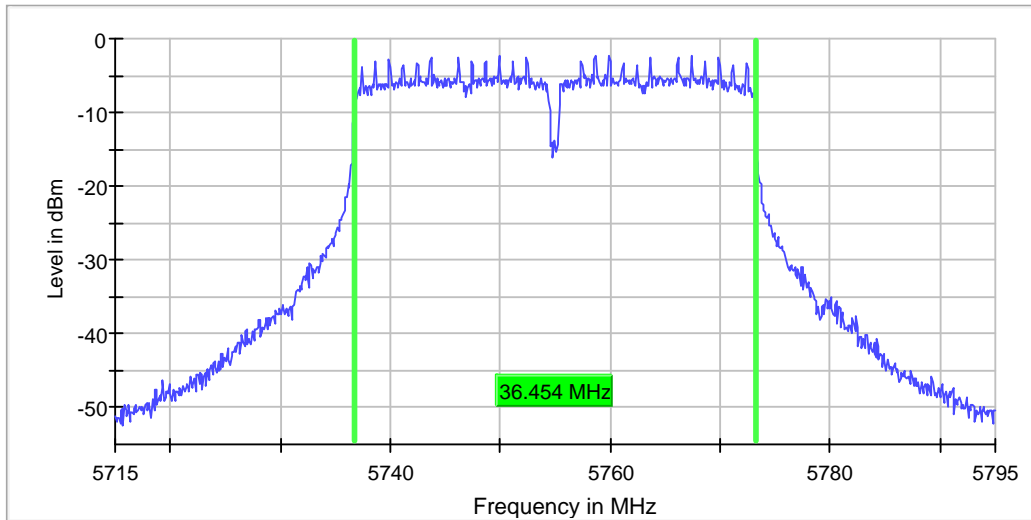

Measurement


Setting	Instrument Value	Target Value
Start Frequency	5.71500 GHz	5.71500 GHz
Stop Frequency	5.79500 GHz	5.79500 GHz
Span	80.000 MHz	80.000 MHz
RBW	100.000 kHz	~ 100.000 kHz
VBW	300.000 kHz	~ 300.000 kHz
SweepPoints	800	~ 800
Sweeptime	94.810 μ s	AUTO
Reference Level	-20.000 dBm	-20.000 dBm
Attenuation	0.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	200	200
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	FFT	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.30	0.30
Run	106 / max. 150	max. 150
Stable	5 / 5	5

Emission Bandwidth 26 dB (5755 MHz; 40 MHz)

Test according to FCC title 47 part 15 §15.407(a),(e), KDB 789033 D02 General U-NII Test Procedures New Rules v01r02 and ANSI C63.10

26 dB Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)	Max Level (dBm)	Result
5755.000000	43.880597	---	---	5732.761194	5776.641791	0.5	PASS

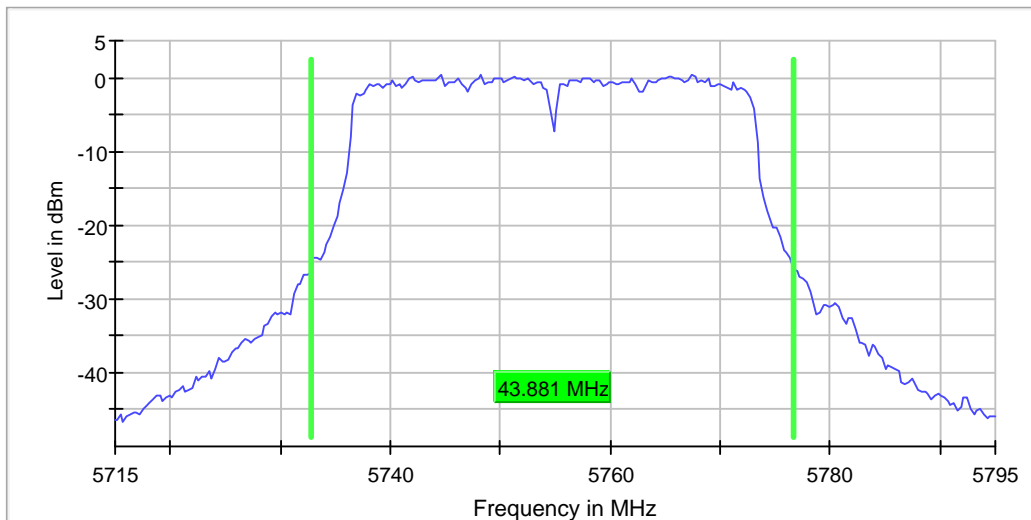

Measurement


Setting	Instrument Value	Target Value
Start Frequency	5.71500 GHz	5.71500 GHz
Stop Frequency	5.79500 GHz	5.79500 GHz
Span	80.000 MHz	80.000 MHz
RBW	300.000 kHz	~ 400.000 kHz
VBW	1.000 MHz	>= 900.000 kHz
SweepPoints	267	~ 267
Sweeptime	31.603 μs	AUTO
Reference Level	-20.000 dBm	-20.000 dBm
Attenuation	0.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	200	200
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
Sweeptype	FFT	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.30	0.30
Run	69 / max. 150	max. 150
Stable	5 / 5	5

Occupied Channel Bandwidth 99% (5755 MHz; 40 MHz)

Test according to FCC title 47 part 15 §15.407(a),(e), KDB 789033 D02 General U-NII Test Procedures New Rules v01r02 and ANSI C63.10

99 % Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)	Result
5755.000000	36.417910	---	---	5736.641791	5773.059701	PASS

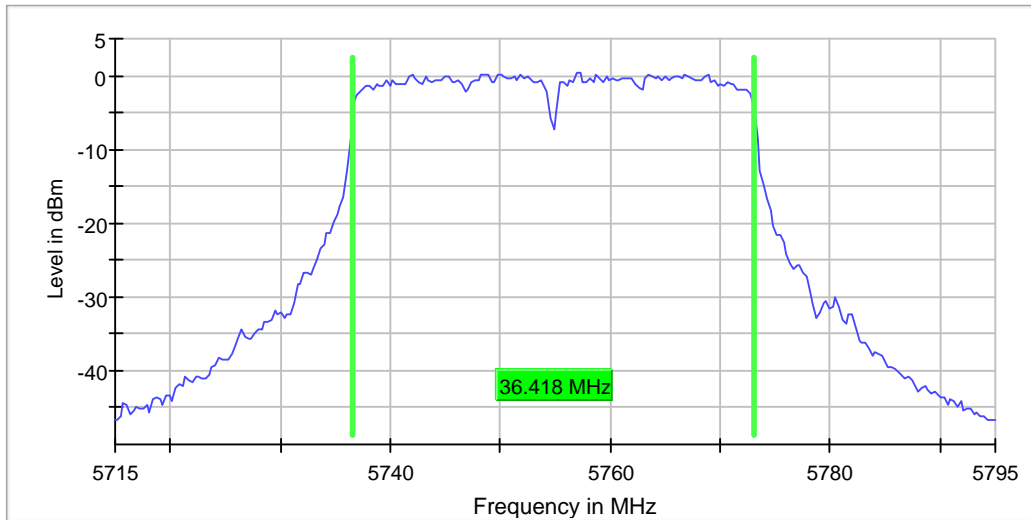

Measurement

Setting	Instrument Value	Target Value
Start Frequency	5.71500 GHz	5.71500 GHz
Stop Frequency	5.79500 GHz	5.79500 GHz
Span	80.000 MHz	80.000 MHz
RBW	300.000 kHz	<= 400.000 kHz
VBW	1.000 MHz	>= 900.000 kHz
SweepPoints	267	~ 267
Sweeptime	31.603 μs	AUTO
Reference Level	-20.000 dBm	-20.000 dBm
Attenuation	0.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	200	200
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
Sweeptype	FFT	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.30	0.30
Run	59 / max. 150	max. 150
Stable	5 / 5	5

Band Edge low (5755 MHz; 40 MHz)

Test according to FCC title 47 part 15 §15.407(b), KDB 789033 D02 General U-NII Test Procedures New Rules v01r02 and ANSI C63.10

Result


DUT Frequency (MHz)	Result
5755.000000	PASS

Inband Peak

Frequency (MHz)	Level (dBm)
5764.093625	-3.2

Measurements

Frequency (MHz)	Level (dBm)	Margin (dB)	Limit (dBm)	Result
5422.153795	-56.6	15.4	-41.2	PASS
5416.661119	-56.6	15.4	-41.2	PASS
5419.157790	-56.7	15.5	-41.2	PASS
5421.654461	-56.7	15.5	-41.2	PASS
5418.658455	-56.7	15.5	-41.2	PASS
5417.659787	-56.7	15.5	-41.2	PASS
5420.655792	-56.7	15.5	-41.2	PASS
5422.653129	-56.7	15.5	-41.2	PASS
5386.701065	-56.7	15.5	-41.2	PASS
5417.160453	-56.7	15.5	-41.2	PASS
5421.155126	-56.7	15.5	-41.2	PASS
5420.156458	-56.8	15.5	-41.2	PASS
5400.682423	-56.8	15.5	-41.2	PASS
5388.698402	-56.8	15.5	-41.2	PASS
5388.199068	-56.8	15.5	-41.2	PASS

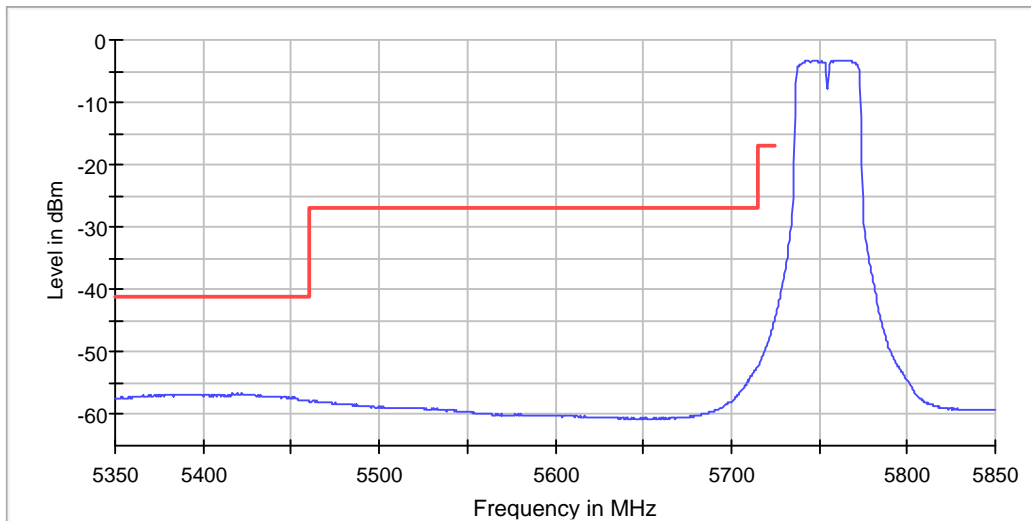

Measurement 1

Setting	Instrument Value	Target Value
RBW	1.000 MHz	<= 1.000 MHz
VBW	3.000 MHz	>= 3.000 MHz
SweepPoints	250	~ 250
SweepTime	250.000 ms	250.000 ms
Reference Level	-20.000 dBm	-20.000 dBm
Attenuation	0.000 dB	AUTO
Detector	RMS	RMS
SweepCount	5	5
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.30	0.30
Run	3 / max. 15	max. 15
Stable	3 / 3	3

Measurement 2

Setting	Instrument Value	Target Value
RBW	1.000 MHz	<= 1.000 MHz
VBW	3.000 MHz	>= 3.000 MHz
SweepPoints	750	~ 750
SweepTime	750.000 ms	750.000 ms
Reference Level	-20.000 dBm	-20.000 dBm
Attenuation	0.000 dB	AUTO
Detector	RMS	RMS
SweepCount	5	5
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.30	0.30
Run	3 / max. 15	max. 15
Stable	3 / 3	3

Tx Spurious Emission (5755 MHz; 40 MHz)

Test according to FCC title 47 part 15 §15.407(b), KDB 789033 D02 General U-NII Test Procedures New Rules v01r02 and ANSI C63.10

Result

DUT Frequency (MHz)	Result
5755.000000	PASS

Final measurements


Frequency (MHz)	Level Pre Measurement (dBm)	level (dBm)	Limit (dBm)	Margin (dB)	Result
5421.900826	-46.0	-56.9	-41.2	15.6	PASS

Pre Measurements

Frequency (MHz)	Level (dBm)	Margin (dB)	Limit (dBm)
5421.900826	-46.0	4.8	-41.2
5369.338843	-46.7	5.5	-41.2
5368.347107	-46.7	5.5	-41.2
5422.892562	-46.8	5.5	-41.2
5456.611570	-47.3	6.1	-41.2
18859.875796	-47.4	6.1	-41.2
5399.090909	-47.4	6.2	-41.2
5398.099174	-47.6	6.3	-41.2
5394.132231	-47.7	6.5	-41.2
19068.864797	-47.7	6.5	-41.2
5374.297521	-47.8	6.5	-41.2
18886.874375	-47.8	6.5	-41.2
18931.872007	-48.0	6.7	-41.2
5416.942149	-48.0	6.7	-41.2
5366.363636	-48.1	6.9	-41.2

Measurement Settings

Start Frequency (MHz)	Stop Frequency (MHz)	Pre Measurement	Final Measurement
30.000000	1000.000000	1	1
1000.000000	5150.000000	2	2
5150.000000	5250.000000	2	2
5250.000000	5350.000000	2	2
5350.000000	5470.000000	2	2
5470.000000	5725.000000	2	2
5725.000000	5850.000000	2	2
5850.000000	7000.000000	2	2
7000.000000	26000.000000	2	2
26000.000000	40000.000000	2	2

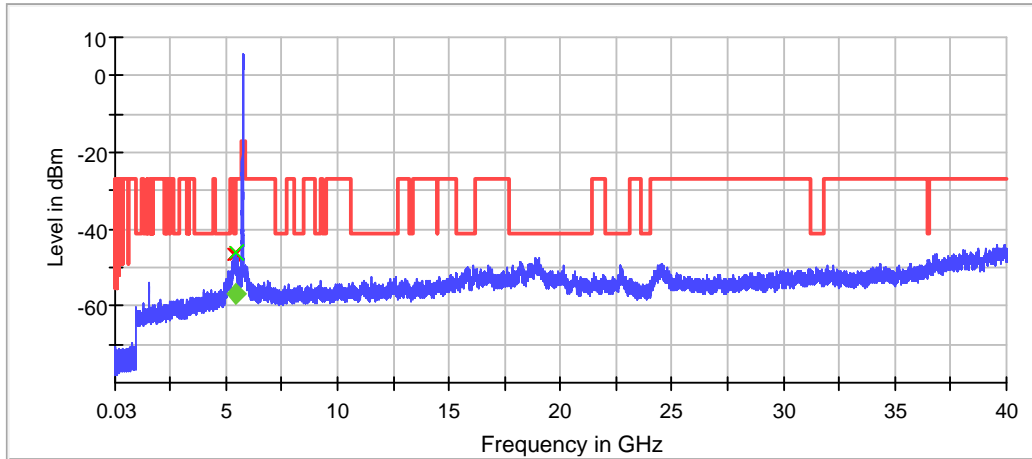

◆ Limit [limit.Result:1] × Threshold [limit 2.Result:1]
◆ Critical [Over Limit.Result:1] ◆ Sum Level [trace.Result:1]

Final Measurement


Setting	Instrument Value	Target Value
Span	ZeroSpan	ZeroSpan
RBW	1.000 MHz	~ 1.000 MHz
VBW	3.000 MHz	~ 3.000 MHz
SweepPoints	10001	~ 10001
Sweeptime	50.000 ms	50.000 ms
Reference Level	-20.000 dBm	-20.000 dBm
Attenuation	0.000 dB	0.000 dB
Detector	RMS	RMS
SweepCount	1	1
Filter	3 dB	3 dB
Trace Mode	Clear Write	Clear Write
SweepType	Sweep	AUTO
Preamp	off	off

RF output power (5795 MHz; 40 MHz)

Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v01r02 and ANSI C63.10

Result

DUT Frequency (MHz)	Gated EIRP (dBm)	Limit Max (dBm)	DutyCycle (%)	Result
5795.000000	13.8	24.0	93.285	PASS

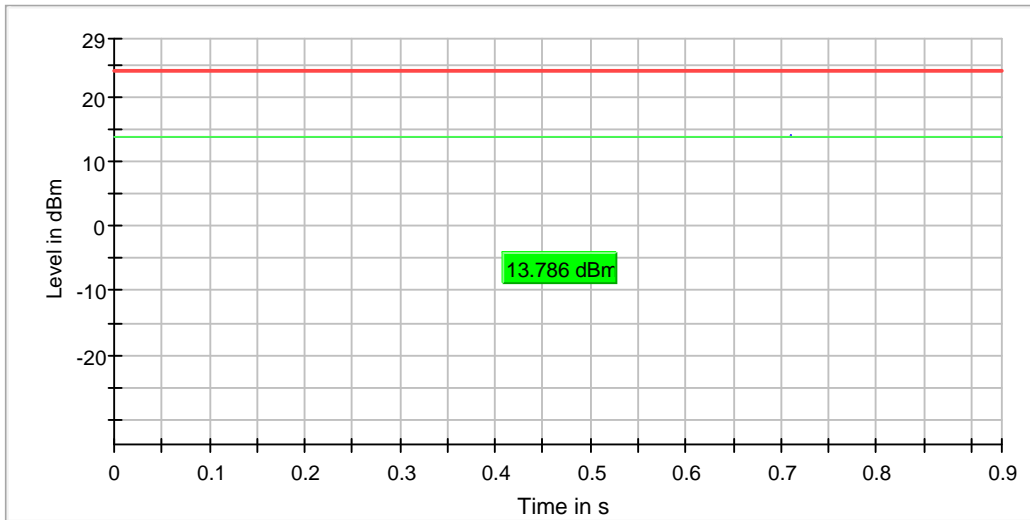

Power Spectral Density (5795 MHz; 43.5821 MHz)


Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v01r02 and ANSI C63.10

Result

DUT Frequency (MHz)	Frequency (MHz)	PSD (dBm)	Limit Max (dBm)	Result
5795.000000	5803.759148	-2.400	30.0	PASS

Ports

Port	Duty Cycle (%)
1	93.289

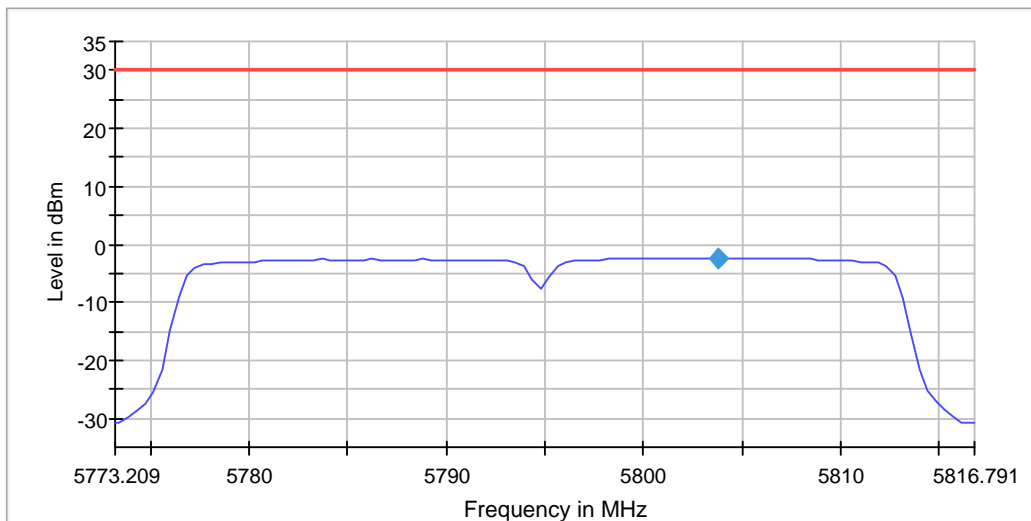

Measurement


Setting	Instrument Value	Target Value
Start Frequency	5.77321 GHz	5.77321 GHz
Stop Frequency	5.81679 GHz	5.81679 GHz
Span	43.582 MHz	43.582 MHz
RBW	1.000 MHz	<= 1.000 MHz
VBW	3.000 MHz	>= 3.000 MHz
SweepPoints	101	~ 87
SweepTime	2.020 s	2.020 s
Reference Level	-20.000 dBm	-20.000 dBm
Attenuation	0.000 dB	AUTO
Detector	RMS	RMS
SweepCount	3	3
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.30	0.30
Run	3 / max. 15	max. 15
Stable	3 / 3	3

Minimum Emission Bandwidth 6 dB (5795 MHz; 40 MHz)

Test according to FCC title 47 part 15 §15.407(a),(e), KDB 789033 D02 General U-NII Test Procedures New Rules v01r02 and ANSI C63.10

6 dB Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)	Max Level (dBm)	Result
5795.000000	36.454432	0.500000	---	5776.722846	5813.177278	-0.6	PASS

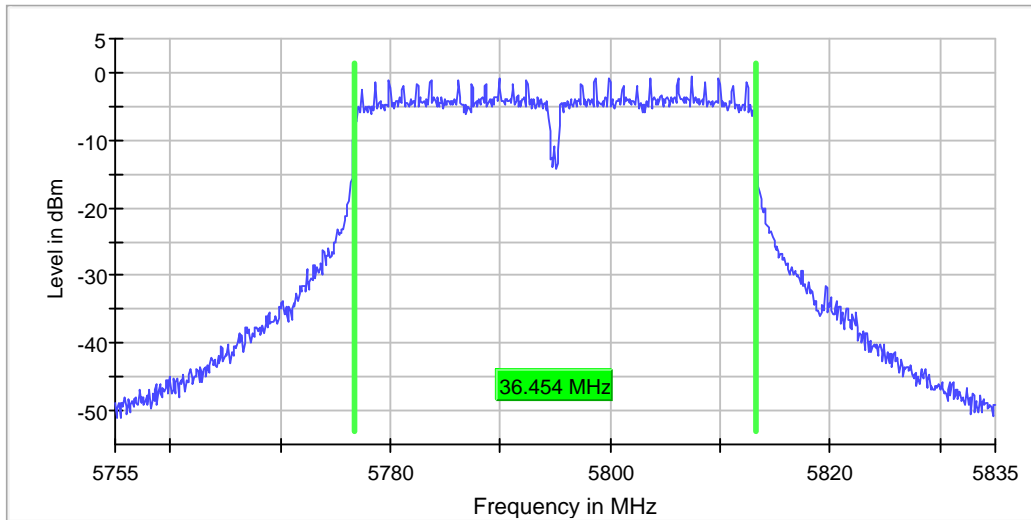

Measurement


Setting	Instrument Value	Target Value
Start Frequency	5.75500 GHz	5.75500 GHz
Stop Frequency	5.83500 GHz	5.83500 GHz
Span	80.000 MHz	80.000 MHz
RBW	100.000 kHz	~ 100.000 kHz
VBW	300.000 kHz	~ 300.000 kHz
SweepPoints	800	~ 800
Sweeptime	94.810 μs	AUTO
Reference Level	-20.000 dBm	-20.000 dBm
Attenuation	0.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	200	200
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
Sweeptype	FFT	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.30	0.30
Run	78 / max. 150	max. 150
Stable	5 / 5	5

Emission Bandwidth 26 dB (5795 MHz; 40 MHz)

Test according to FCC title 47 part 15 §15.407(a),(e), KDB 789033 D02 General U-NII Test Procedures New Rules v01r02 and ANSI C63.10

26 dB Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)	Max Level (dBm)	Result
5795.000000	43.582090	---	---	5773.059701	5816.641791	2.3	PASS

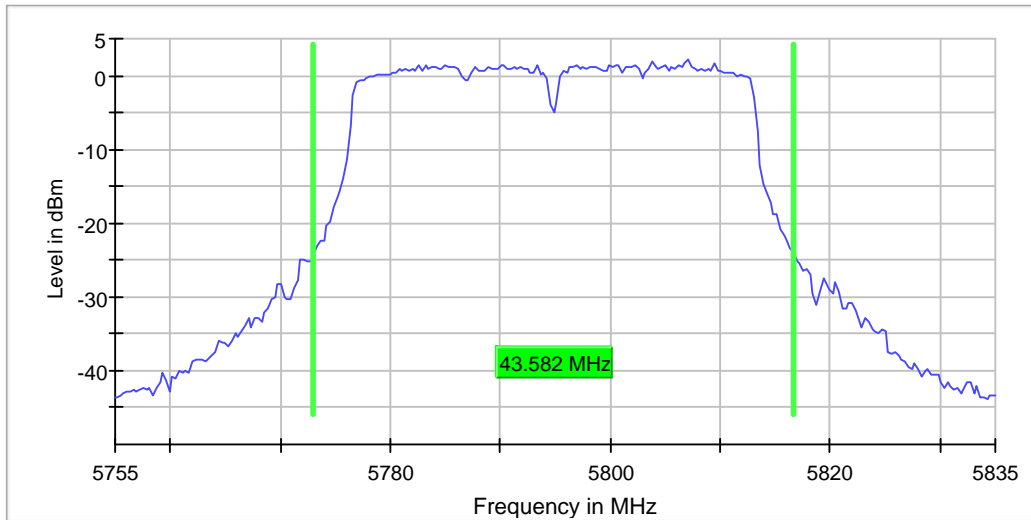

Measurement


Setting	Instrument Value	Target Value
Start Frequency	5.75500 GHz	5.75500 GHz
Stop Frequency	5.83500 GHz	5.83500 GHz
Span	80.000 MHz	80.000 MHz
RBW	300.000 kHz	~ 400.000 kHz
VBW	1.000 MHz	>= 900.000 kHz
SweepPoints	267	~ 267
Sweeptime	31.603 μs	AUTO
Reference Level	-10.000 dBm	-10.000 dBm
Attenuation	10.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	200	200
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
Sweeptype	FFT	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.30	0.30
Run	47 / max. 150	max. 150
Stable	5 / 5	5

Occupied Channel Bandwidth 99% (5795 MHz; 40 MHz)

Test according to FCC title 47 part 15 §15.407(a),(e), KDB 789033 D02 General U-NII Test Procedures New Rules v01r02 and ANSI C63.10

99 % Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)	Result
5795.000000	36.417910	---	---	5776.641791	5813.059701	PASS

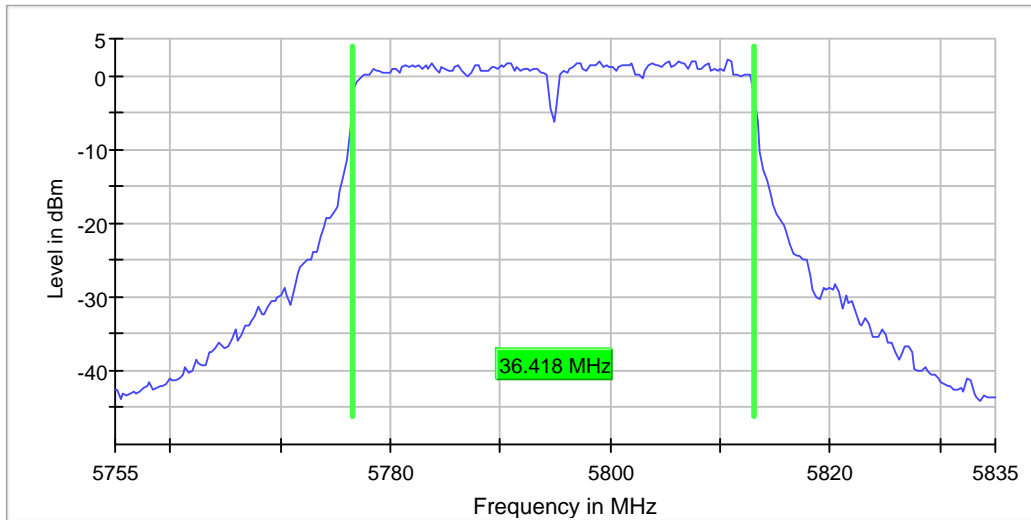

Measurement

Setting	Instrument Value	Target Value
Start Frequency	5.75500 GHz	5.75500 GHz
Stop Frequency	5.83500 GHz	5.83500 GHz
Span	80.000 MHz	80.000 MHz
RBW	300.000 kHz	<= 400.000 kHz
VBW	1.000 MHz	>= 900.000 kHz
SweepPoints	267	~ 267
SweepTime	31.603 μs	AUTO
Reference Level	-10.000 dBm	-10.000 dBm
Attenuation	10.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	200	200
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	FFT	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.30	0.30
Run	60 / max. 150	max. 150
Stable	5 / 5	5

Band Edge high (5795 MHz; 40 MHz)

Test according to FCC title 47 part 15 §15.407(b), KDB 789033 D02 General U-NII Test Procedures New Rules v01r02 and ANSI C63.10

Result


DUT Frequency (MHz)	Result
5795.000000	PASS

Inband Peak

Frequency (MHz)	Level (dBm)
5802.440239	-1.7

Measurements

Frequency (MHz)	Level (dBm)	Margin (dB)	Limit (dBm)	Result
7297.917438	-63.9	22.7	-41.2	PASS
7306.414291	-64.1	22.8	-41.2	PASS
7296.917808	-64.1	22.9	-41.2	PASS
7297.417623	-64.1	22.9	-41.2	PASS
7293.918919	-64.1	22.9	-41.2	PASS
7298.417253	-64.1	22.9	-41.2	PASS
7303.415402	-64.1	22.9	-41.2	PASS
7299.416883	-64.1	22.9	-41.2	PASS
7300.416512	-64.1	22.9	-41.2	PASS
7301.915957	-64.1	22.9	-41.2	PASS
7300.916327	-64.1	22.9	-41.2	PASS
7304.914846	-64.1	22.9	-41.2	PASS
7298.917068	-64.1	22.9	-41.2	PASS
7307.913736	-64.2	22.9	-41.2	PASS
7301.416142	-64.2	22.9	-41.2	PASS

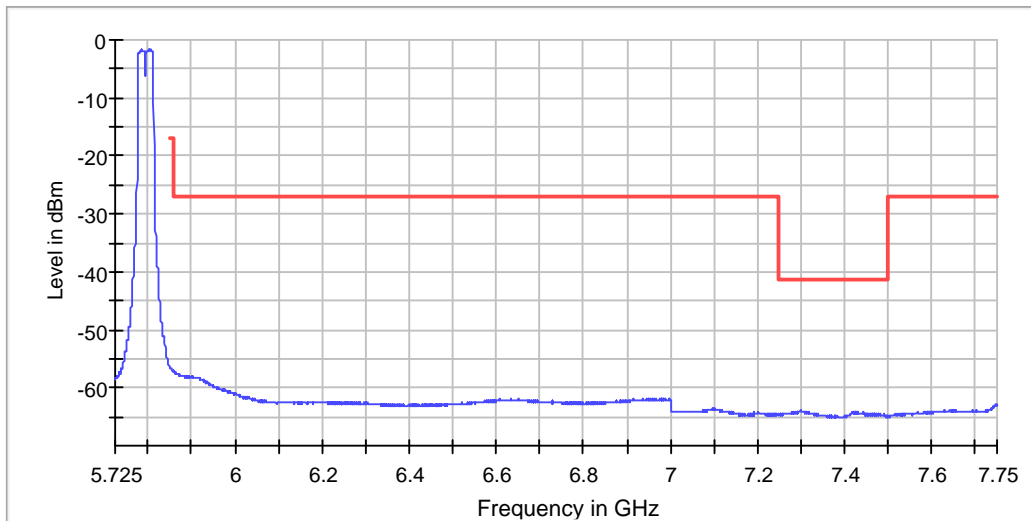

Measurement 1

Setting	Instrument Value	Target Value
RBW	1.000 MHz	<= 1.000 MHz
VBW	3.000 MHz	>= 3.000 MHz
SweepPoints	250	~ 250
SweepTime	250.000 ms	250.000 ms
Reference Level	-20.000 dBm	-20.000 dBm
Attenuation	0.000 dB	AUTO
Detector	RMS	RMS
SweepCount	5	5
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.30	0.30
Run	3 / max. 15	max. 15
Stable	3 / 3	3

Measurement 2

Setting	Instrument Value	Target Value
RBW	1.000 MHz	<= 1.000 MHz
VBW	3.000 MHz	>= 3.000 MHz
SweepPoints	1100	~ 1100
SweepTime	1.100 s	1.100 s
Reference Level	-20.000 dBm	-20.000 dBm
Attenuation	0.000 dB	AUTO
Detector	RMS	RMS
SweepCount	5	5
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.30	0.30
Run	3 / max. 15	max. 15
Stable	3 / 3	3

Tx Spurious Emission (5795 MHz; 40 MHz)

Test according to FCC title 47 part 15 §15.407(b), KDB 789033 D02 General U-NII Test Procedures New Rules v01r02 and ANSI C63.10

Result

DUT Frequency (MHz)	Result
5795.000000	PASS

Final measurements


Frequency (MHz)	Level Pre Measurement (dBm)	level (dBm)	Limit (dBm)	Margin (dB)	Result
5377.272727	-45.3	-56.6	-41.2	15.4	PASS

Pre Measurements

Frequency (MHz)	Level (dBm)	Margin (dB)	Limit (dBm)
5377.272727	-45.3	4.1	-41.2
5395.123967	-46.3	5.1	-41.2
5394.132231	-46.7	5.5	-41.2
5370.330579	-47.2	6.0	-41.2
5362.396694	-47.3	6.0	-41.2
5361.404959	-47.3	6.0	-41.2
5378.264463	-47.4	6.2	-41.2
5410.000000	-47.7	6.4	-41.2
5409.008264	-47.7	6.5	-41.2
5407.024793	-47.7	6.5	-41.2
5406.033058	-47.7	6.5	-41.2
5383.223140	-47.9	6.7	-41.2
5412.975207	-47.9	6.7	-41.2
5428.842975	-47.9	6.7	-41.2
5448.677686	-47.9	6.7	-41.2

Measurement Settings

Start Frequency (MHz)	Stop Frequency (MHz)	Pre Measurement	Final Measurement
30.000000	1000.000000	1	1
1000.000000	5150.000000	2	2
5150.000000	5250.000000	2	2
5250.000000	5350.000000	2	2
5350.000000	5470.000000	2	2
5470.000000	5725.000000	2	2
5725.000000	5850.000000	2	2
5850.000000	7000.000000	2	2
7000.000000	26000.000000	2	2
26000.000000	40000.000000	2	2

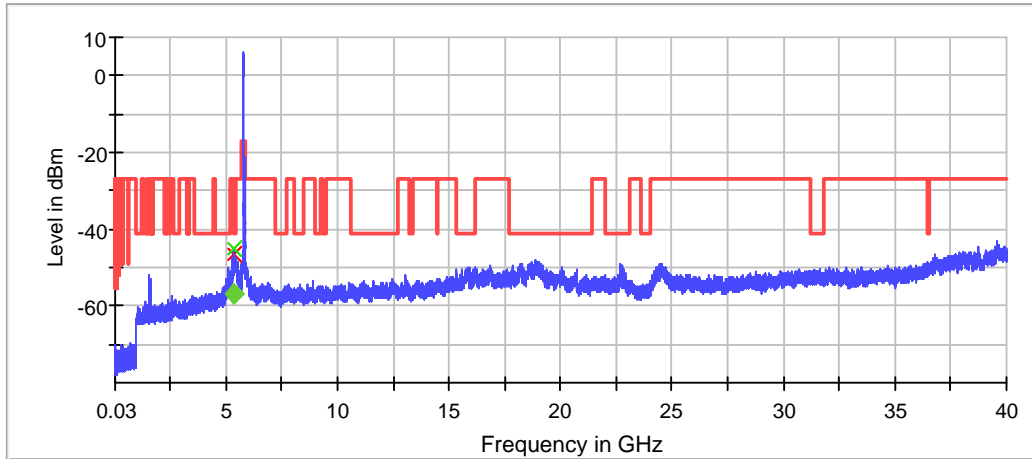

◆ Limit [limit.Result:1] × Threshold [limit 2.Result:1]
◆ Critical [Over Limit.Result:1] ◆ Sum Level [trace.Result:1]

Final Measurement

Setting	Instrument Value	Target Value
Span	ZeroSpan	ZeroSpan
RBW	1.000 MHz	~ 1.000 MHz
VBW	3.000 MHz	~ 3.000 MHz
SweepPoints	10001	~ 10001
Sweeptime	50.000 ms	50.000 ms
Reference Level	-20.000 dBm	-20.000 dBm
Attenuation	0.000 dB	0.000 dB
Detector	RMS	RMS
SweepCount	1	1
Filter	3 dB	3 dB
Trace Mode	Clear Write	Clear Write
SweepType	Sweep	AUTO
Preamp	off	off

UNII-3 ANT1 AC Mode 80MHz Power Spectral Density (5775 MHz; 88.4472 MHz)


Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v01r02 and ANSI C63.10

Result

DUT Frequency (MHz)	Frequency (MHz)	PSD (dBm)	Limit Max (dBm)	Result
5775.000000	5800.093166	-3.625	30.0	PASS

Ports

Port	Duty Cycle (%)
1	86.559

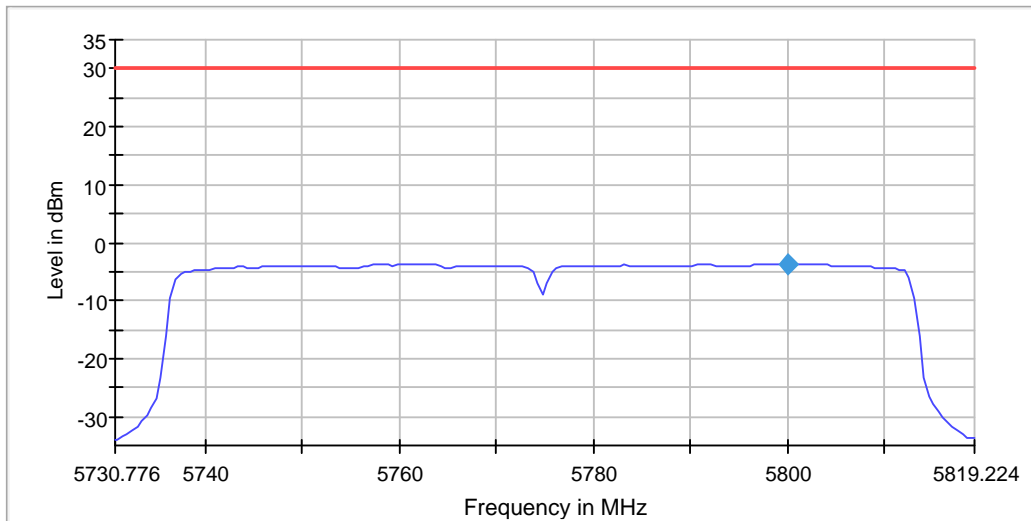

Measurement


Setting	Instrument Value	Target Value
Start Frequency	5.73078 GHz	5.73078 GHz
Stop Frequency	5.81922 GHz	5.81922 GHz
Span	88.447 MHz	88.447 MHz
RBW	1.000 MHz	<= 1.000 MHz
VBW	3.000 MHz	>= 3.000 MHz
SweepPoints	177	~ 177
SweepTime	3.540 s	3.540 s
Reference Level	-30.000 dBm	-30.000 dBm
Attenuation	0.000 dB	AUTO
Detector	RMS	RMS
SweepCount	3	3
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.30	0.30
Run	3 / max. 15	max. 15
Stable	3 / 3	3

Minimum Emission Bandwidth 6 dB (5775 MHz; 80 MHz)

Test according to FCC title 47 part 15 §15.407(a),(e), KDB 789033 D02 General U-NII Test Procedures New Rules v01r02 and ANSI C63.10

6 dB Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)	Max Level (dBm)	Result
5775.000000	76.452217	0.500000	---	5736.723923	5813.176140	-2.7	PASS

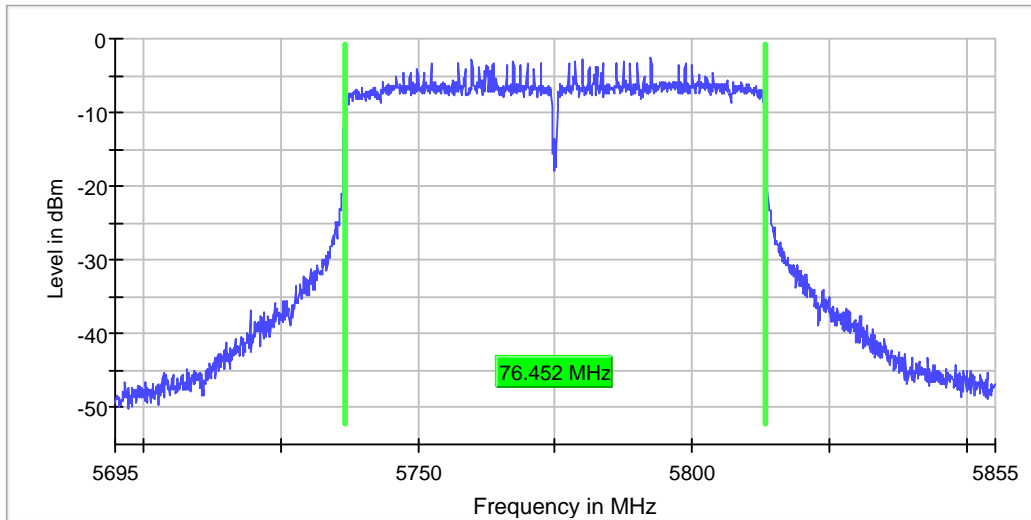

Measurement


Setting	Instrument Value	Target Value
Start Frequency	5.69500 GHz	5.69500 GHz
Stop Frequency	5.85500 GHz	5.85500 GHz
Span	160.000 MHz	160.000 MHz
RBW	100.000 kHz	~ 100.000 kHz
VBW	300.000 kHz	~ 300.000 kHz
SweepPoints	1600	~ 1600
Sweeptime	189.620 µs	AUTO
Reference Level	-20.000 dBm	-20.000 dBm
Attenuation	0.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	200	200
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
Sweeptype	FFT	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.30	0.30
Run	137 / max. 150	max. 150
Stable	5 / 5	5

Emission Bandwidth 26 dB (5775 MHz; 80 MHz)

Test according to FCC title 47 part 15 §15.407(a),(e), KDB 789033 D02 General U-NII Test Procedures New Rules v01r02 and ANSI C63.10

26 dB Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)	Max Level (dBm)	Result
5775.000000	88.447205	---	---	5731.273292	5819.720497	7.6	PASS

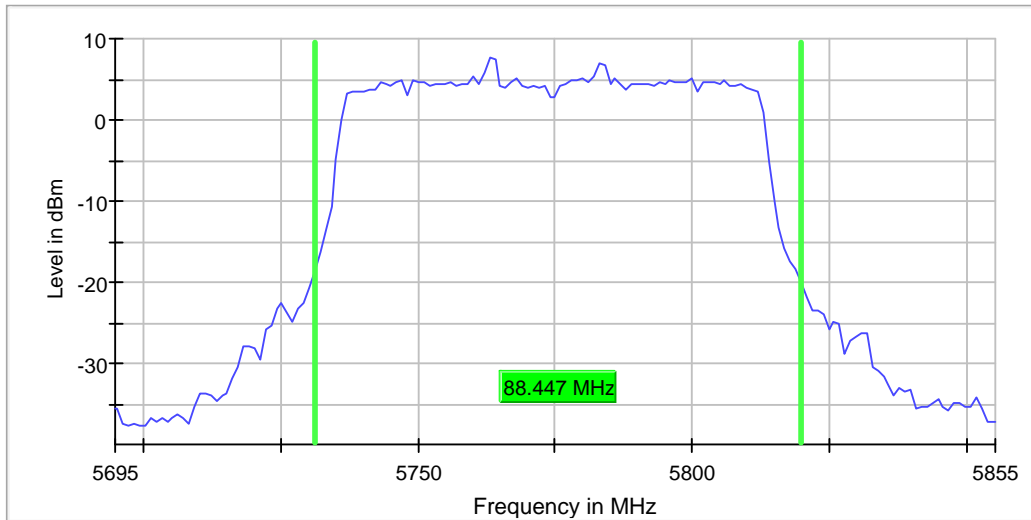

Measurement


Setting	Instrument Value	Target Value
Start Frequency	5.69500 GHz	5.69500 GHz
Stop Frequency	5.85500 GHz	5.85500 GHz
Span	160.000 MHz	160.000 MHz
RBW	1.000 MHz	~ 800.000 kHz
VBW	3.000 MHz	>= 3.000 MHz
SweepPoints	160	~ 160
SweepTime	22.754 μs	AUTO
Reference Level	-10.000 dBm	-10.000 dBm
Attenuation	10.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	200	200
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	FFT	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.30	0.30
Run	54 / max. 150	max. 150
Stable	5 / 5	5

Occupied Channel Bandwidth 99% (5775 MHz; 80 MHz)

Test according to FCC title 47 part 15 §15.407(a),(e), KDB 789033 D02 General U-NII Test Procedures New Rules v01r02 and ANSI C63.10

99 % Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)	Result
5775.000000	76.261682	---	---	5736.619938	5812.881620	PASS

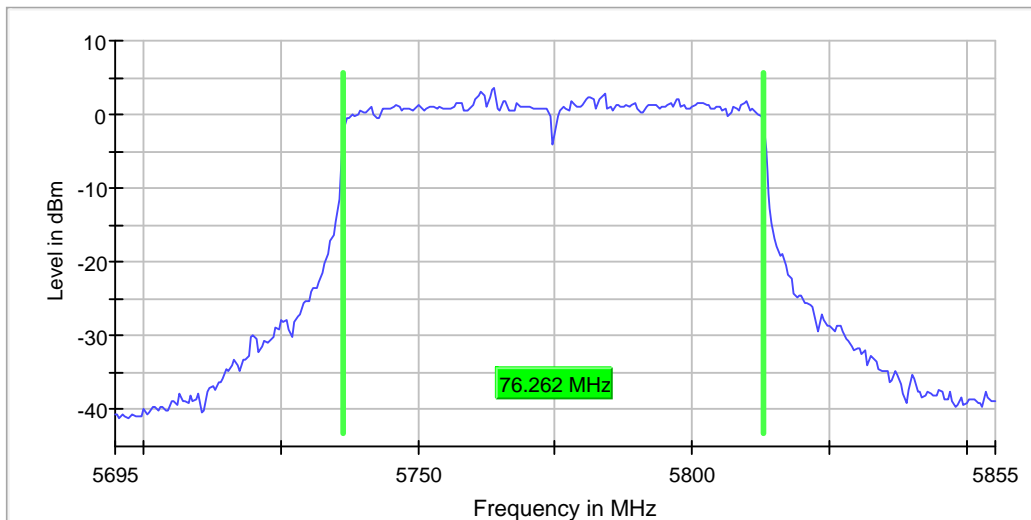

Measurement

Setting	Instrument Value	Target Value
Start Frequency	5.69500 GHz	5.69500 GHz
Stop Frequency	5.85500 GHz	5.85500 GHz
Span	160.000 MHz	160.000 MHz
RBW	500.000 kHz	<= 800.000 kHz
VBW	2.000 MHz	>= 1.500 MHz
SweepPoints	320	~ 320
Sweeptime	37.924 µs	AUTO
Reference Level	-10.000 dBm	-10.000 dBm
Attenuation	10.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	200	200
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
Sweeptype	FFT	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.30	0.30
Run	72 / max. 150	max. 150
Stable	5 / 5	5

Band Edge low (5775 MHz; 80 MHz)

Test according to FCC title 47 part 15 §15.407(b), KDB 789033 D02 General U-NII Test Procedures New Rules v01r02 and ANSI C63.10

Result


DUT Frequency (MHz)	Result
5775.000000	PASS

Inband Peak

Frequency (MHz)	Level (dBm)
5801.444223	-4.1

Measurements

Frequency (MHz)	Level (dBm)	Margin (dB)	Limit (dBm)	Result
5393.192410	-54.5	13.2	-41.2	PASS
5394.191079	-54.6	13.3	-41.2	PASS
5398.685087	-54.6	13.4	-41.2	PASS
5408.671771	-54.6	13.4	-41.2	PASS
5396.687750	-54.6	13.4	-41.2	PASS
5403.678429	-54.6	13.4	-41.2	PASS
5421.155126	-54.6	13.4	-41.2	PASS
5389.697071	-54.6	13.4	-41.2	PASS
5397.187084	-54.6	13.4	-41.2	PASS
5390.695739	-54.6	13.4	-41.2	PASS
5398.185752	-54.6	13.4	-41.2	PASS
5418.159121	-54.6	13.4	-41.2	PASS
5406.674434	-54.7	13.4	-41.2	PASS
5386.701065	-54.7	13.4	-41.2	PASS
5405.176431	-54.7	13.4	-41.2	PASS

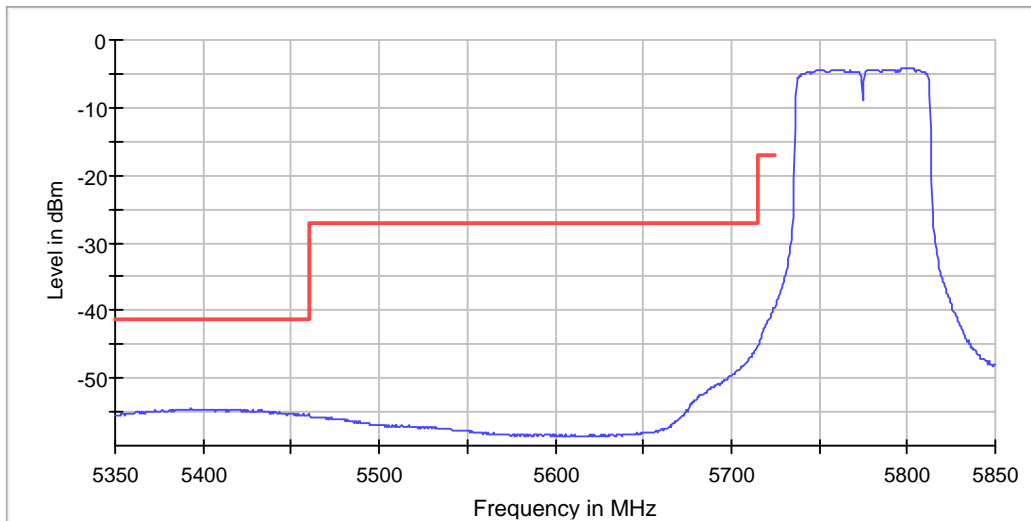

Measurement 1

Setting	Instrument Value	Target Value
RBW	1.000 MHz	<= 1.000 MHz
VBW	3.000 MHz	>= 3.000 MHz
SweepPoints	250	~ 250
SweepTime	250.000 ms	250.000 ms
Reference Level	-20.000 dBm	-20.000 dBm
Attenuation	0.000 dB	AUTO
Detector	RMS	RMS
SweepCount	5	5
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.30	0.30
Run	3 / max. 15	max. 15
Stable	3 / 3	3

Measurement 2

Setting	Instrument Value	Target Value
RBW	1.000 MHz	<= 1.000 MHz
VBW	3.000 MHz	>= 3.000 MHz
SweepPoints	750	~ 750
SweepTime	750.000 ms	750.000 ms
Reference Level	-20.000 dBm	-20.000 dBm
Attenuation	0.000 dB	AUTO
Detector	RMS	RMS
SweepCount	5	5
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.30	0.30
Run	3 / max. 15	max. 15
Stable	3 / 3	3

Band Edge high (5775 MHz; 80 MHz)

Test according to FCC title 47 part 15 §15.407(b), KDB 789033 D02 General U-NII Test Procedures New Rules v01r02 and ANSI C63.10

Result


DUT Frequency (MHz)	Result
5775.000000	PASS

Inband Peak

Frequency (MHz)	Level (dBm)
5800.448207	-4.1

Measurements

Frequency (MHz)	Level (dBm)	Margin (dB)	Limit (dBm)	Result
7307.413921	-64.1	22.9	-41.2	PASS
7300.916327	-64.1	22.9	-41.2	PASS
7303.915217	-64.1	22.9	-41.2	PASS
7296.917808	-64.1	22.9	-41.2	PASS
7301.416142	-64.1	22.9	-41.2	PASS
7295.918178	-64.2	22.9	-41.2	PASS
7297.417623	-64.2	22.9	-41.2	PASS
7302.415772	-64.2	22.9	-41.2	PASS
7299.416883	-64.2	23.0	-41.2	PASS
7296.417993	-64.2	23.0	-41.2	PASS
7305.414661	-64.2	23.0	-41.2	PASS
7424.870418	-64.2	23.0	-41.2	PASS
7297.917438	-64.2	23.0	-41.2	PASS
7308.413551	-64.2	23.0	-41.2	PASS
7295.418364	-64.2	23.0	-41.2	PASS

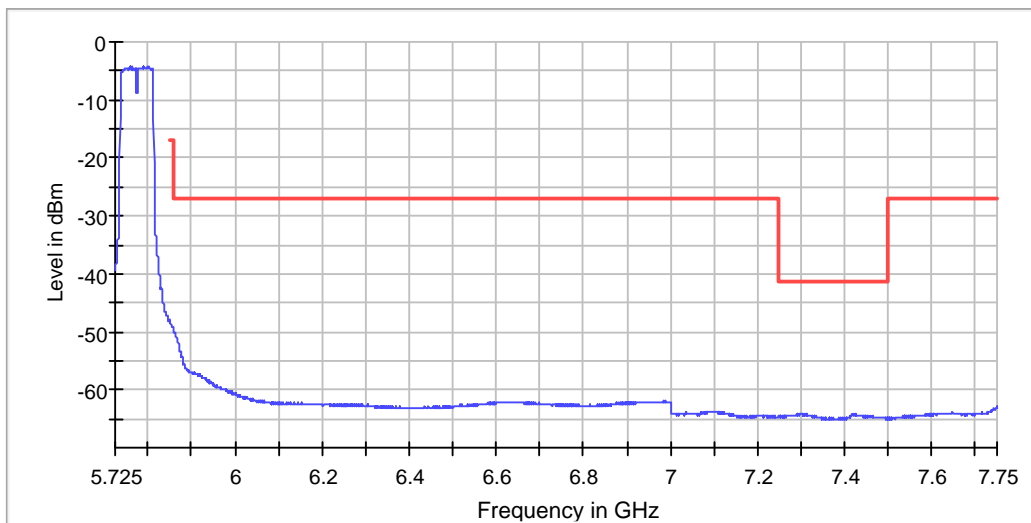

Measurement 1

Setting	Instrument Value	Target Value
RBW	1.000 MHz	<= 1.000 MHz
VBW	3.000 MHz	>= 3.000 MHz
SweepPoints	250	~ 250
SweepTime	250.000 ms	250.000 ms
Reference Level	-20.000 dBm	-20.000 dBm
Attenuation	0.000 dB	AUTO
Detector	RMS	RMS
SweepCount	5	5
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.30	0.30
Run	3 / max. 15	max. 15
Stable	3 / 3	3

Measurement 2

Setting	Instrument Value	Target Value
RBW	1.000 MHz	<= 1.000 MHz
VBW	3.000 MHz	>= 3.000 MHz
SweepPoints	1100	~ 1100
SweepTime	1.100 s	1.100 s
Reference Level	-20.000 dBm	-20.000 dBm
Attenuation	0.000 dB	AUTO
Detector	RMS	RMS
SweepCount	5	5
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.30	0.30
Run	3 / max. 15	max. 15
Stable	3 / 3	3

Tx Spurious Emission (5775 MHz; 80 MHz)

Test according to FCC title 47 part 15 §15.407(b), KDB 789033 D02 General U-NII Test Procedures New Rules v01r02 and ANSI C63.10

Result

DUT Frequency (MHz)	Result
5775.000000	PASS

Final measurements


Frequency (MHz)	Level Pre Measurement (dBm)	level (dBm)	Limit (dBm)	Margin (dB)	Result
5410.991736	-45.0	-56.0	-41.2	14.7	PASS

Pre Measurements

Frequency (MHz)	Level (dBm)	Margin (dB)	Limit (dBm)
5410.991736	-45.0	3.8	-41.2
5402.066116	-45.9	4.6	-41.2
5417.933884	-45.9	4.6	-41.2
5374.297521	-46.0	4.8	-41.2
5375.289256	-46.0	4.8	-41.2
5459.586777	-46.3	5.1	-41.2
5350.000000	-46.3	5.1	-41.2
5393.140496	-46.4	5.2	-41.2
5378.264463	-46.5	5.3	-41.2
5377.272727	-46.9	5.7	-41.2
5392.148760	-46.9	5.7	-41.2
5394.132231	-47.0	5.8	-41.2
5386.198347	-47.0	5.8	-41.2
5387.190083	-47.1	5.8	-41.2
5372.314050	-47.1	5.9	-41.2

Measurement Settings

Start Frequency (MHz)	Stop Frequency (MHz)	Pre Measurement	Final Measurement
30.000000	1000.000000	1	1
1000.000000	5150.000000	2	2
5150.000000	5250.000000	2	2
5250.000000	5350.000000	2	2
5350.000000	5470.000000	2	2
5470.000000	5725.000000	2	2
5725.000000	5850.000000	2	2
5850.000000	7000.000000	2	2
7000.000000	26000.000000	2	2
26000.000000	40000.000000	2	2

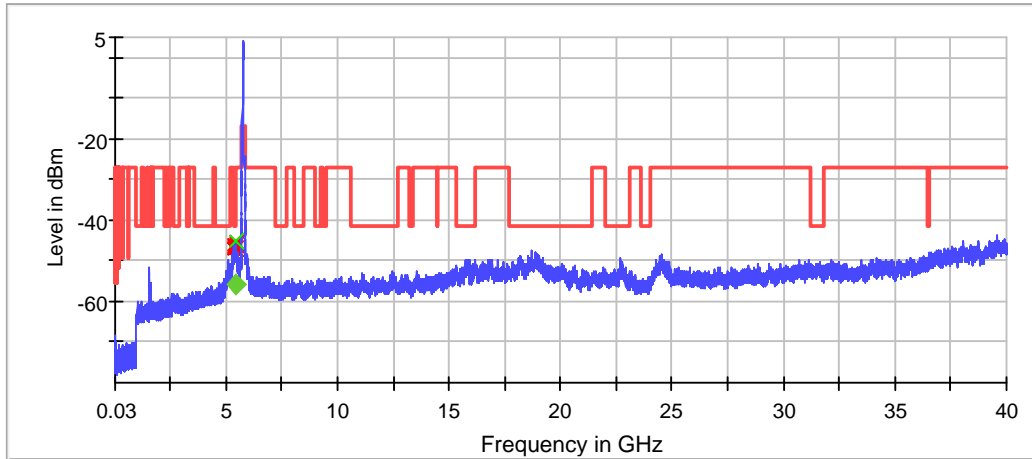

◆ Limit [limit.Result:1] × Threshold [limit 2.Result:1]
◆ Critical [Over Limit.Result:1] ◆ Sum Level [trace.Result:1]

Final Measurement

Setting	Instrument Value	Target Value
Span	ZeroSpan	ZeroSpan
RBW	1.000 MHz	~ 1.000 MHz
VBW	3.000 MHz	~ 3.000 MHz
SweepPoints	10001	~ 10001
Sweeptime	50.000 ms	50.000 ms
Reference Level	-20.000 dBm	-20.000 dBm
Attenuation	0.000 dB	0.000 dB
Detector	RMS	RMS
SweepCount	1	1
Filter	3 dB	3 dB
Trace Mode	Clear Write	Clear Write
SweepType	Sweep	AUTO
Preamp	off	off

UNII-3 ANT1 NHT20 Mode Power Spectral Density (5745 MHz; 23.4826 MHz)


Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v01r02 and ANSI C63.10

Result

DUT Frequency (MHz)	Frequency (MHz)	PSD (dBm)	Limit Max (dBm)	Result
5745.000000	5750.870650	0.863	30.0	PASS

Ports

Port	Duty Cycle (%)
1	95.276

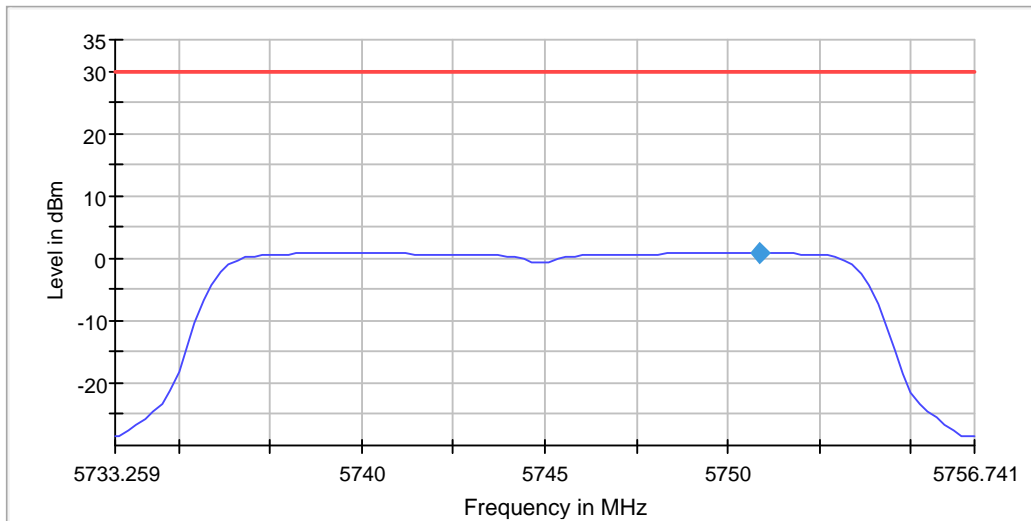

Measurement


Setting	Instrument Value	Target Value
Start Frequency	5.73326 GHz	5.73326 GHz
Stop Frequency	5.75674 GHz	5.75674 GHz
Span	23.483 MHz	23.483 MHz
RBW	1.000 MHz	<= 1.000 MHz
VBW	3.000 MHz	>= 3.000 MHz
SweepPoints	101	~ 47
SweepTime	2.020 s	2.020 s
Reference Level	-20.000 dBm	-20.000 dBm
Attenuation	0.000 dB	AUTO
Detector	RMS	RMS
SweepCount	3	3
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.30	0.30
Run	3 / max. 15	max. 15
Stable	3 / 3	3

Minimum Emission Bandwidth 6 dB (5745 MHz; 20 MHz)

Test according to FCC title 47 part 15 §15.407(a),(e), KDB 789033 D02 General U-NII Test Procedures New Rules v01r02 and ANSI C63.10

6 dB Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)	Max Level (dBm)	Result
5745.000000	17.75611	0.500000	---	5736.022444	5753.778055	2.5	PASS

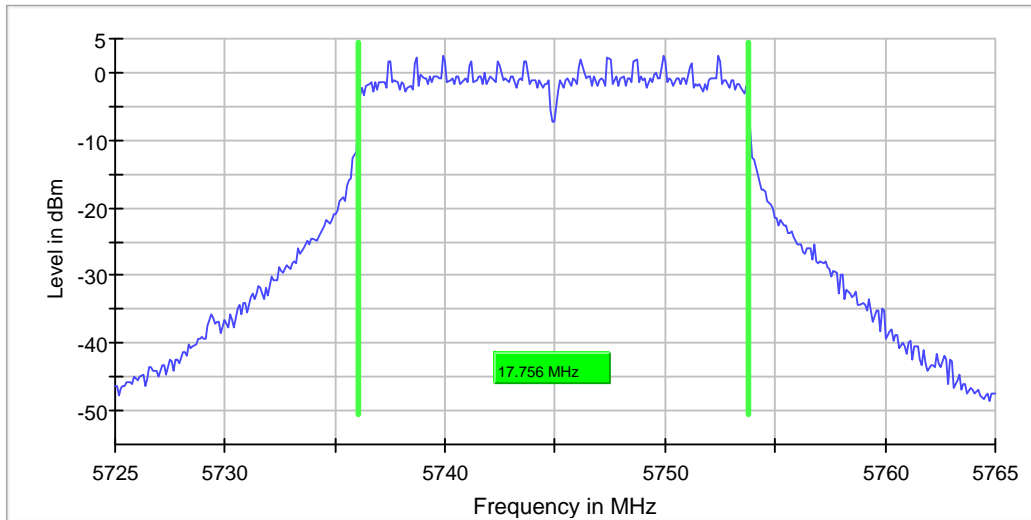

Measurement


Setting	Instrument Value	Target Value
Start Frequency	5.72500 GHz	5.72500 GHz
Stop Frequency	5.76500 GHz	5.76500 GHz
Span	40.000 MHz	40.000 MHz
RBW	100.000 kHz	~ 100.000 kHz
VBW	300.000 kHz	~ 300.000 kHz
SweepPoints	400	~ 400
SweepTime	56.886 μs	AUTO
Reference Level	-20.000 dBm	-20.000 dBm
Attenuation	0.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	200	200
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	FFT	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.30	0.30
Run	51 / max. 150	max. 150
Stable	5 / 5	5

Emission Bandwidth 26 dB (5745 MHz; 20 MHz)

Test according to FCC title 47 part 15 §15.407(a),(e), KDB 789033 D02 General U-NII Test Procedures New Rules v01r02 and ANSI C63.10

26 dB Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)	Max Level (dBm)	Result
5745.000000	23.482588	---	---	5733.059701	5756.542289	3.4	PASS

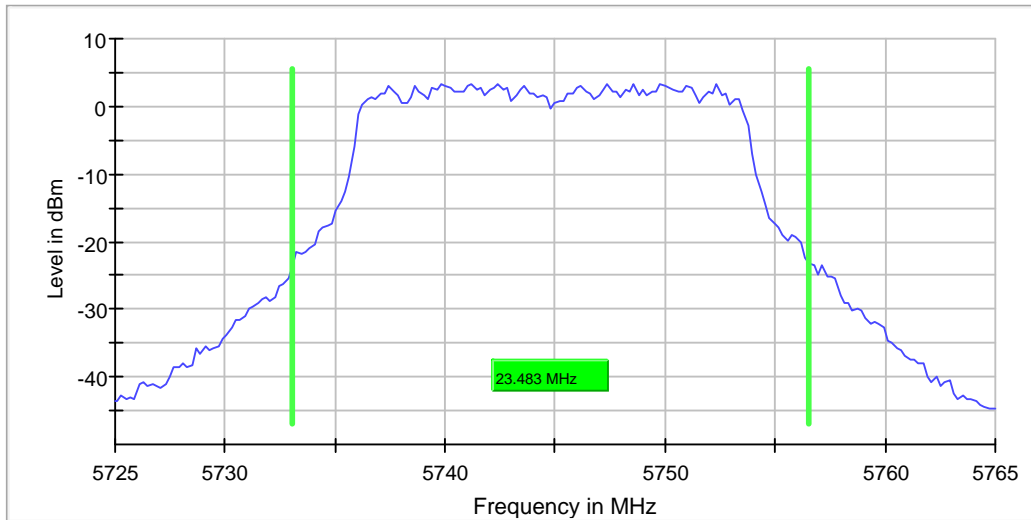

Measurement


Setting	Instrument Value	Target Value
Start Frequency	5.72500 GHz	5.72500 GHz
Stop Frequency	5.76500 GHz	5.76500 GHz
Span	40.000 MHz	40.000 MHz
RBW	200.000 kHz	~ 200.000 kHz
VBW	1.000 MHz	>= 600.000 kHz
SweepPoints	200	~ 200
Sweeptime	28.443 μs	AUTO
Reference Level	-10.000 dBm	-10.000 dBm
Attenuation	10.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	200	200
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
Sweeptype	FFT	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.30	0.30
Run	37 / max. 150	max. 150
Stable	5 / 5	5

Occupied Channel Bandwidth 99% (5745 MHz; 20 MHz)

Test according to FCC title 47 part 15 §15.407(a),(e), KDB 789033 D02 General U-NII Test Procedures New Rules v01r02 and ANSI C63.10

99 % Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)	Result
5745.000000	17.711443	---	---	5736.044776	5753.756219	PASS

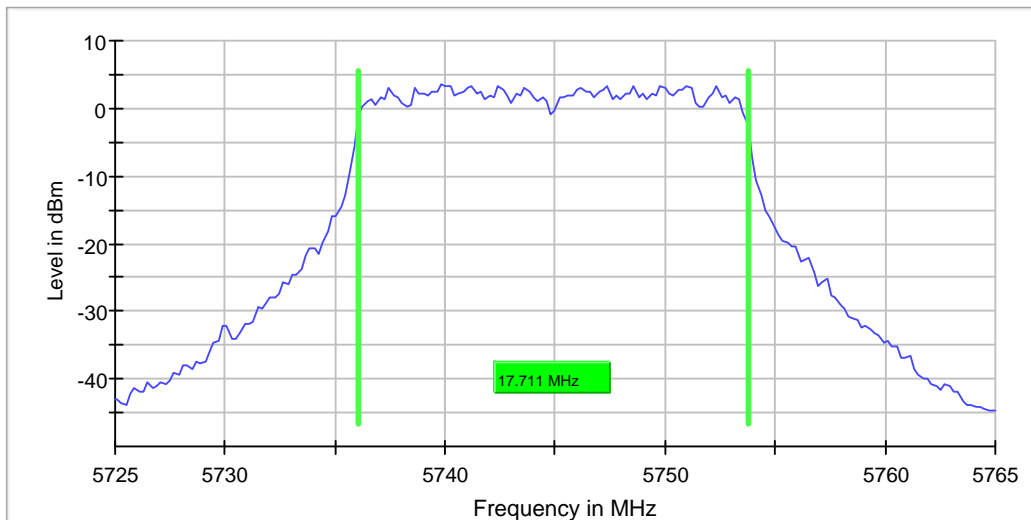

Measurement

Setting	Instrument Value	Target Value
Start Frequency	5.72500 GHz	5.72500 GHz
Stop Frequency	5.76500 GHz	5.76500 GHz
Span	40.000 MHz	40.000 MHz
RBW	200.000 kHz	<= 200.000 kHz
VBW	1.000 MHz	>= 600.000 kHz
SweepPoints	200	~ 200
Sweeptime	28.443 μs	AUTO
Reference Level	-10.000 dBm	-10.000 dBm
Attenuation	10.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	200	200
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
Sweeptype	FFT	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.30	0.30
Run	27 / max. 150	max. 150
Stable	5 / 5	5

Band Edge low (5745 MHz; 20 MHz)

Test according to FCC title 47 part 15 §15.407(b), KDB 789033 D02 General U-NII Test Procedures New Rules v01r02 and ANSI C63.10

Result


DUT Frequency (MHz)	Result
5745.000000	PASS

Inband Peak

Frequency (MHz)	Level (dBm)
5750.647410	1.9

Measurements

Frequency (MHz)	Level (dBm)	Margin (dB)	Limit (dBm)	Result
5448.618509	-50.5	9.2	-41.2	PASS
5449.117843	-51.6	10.4	-41.2	PASS
5419.157790	-52.3	11.1	-41.2	PASS
5420.655792	-52.3	11.1	-41.2	PASS
5416.661119	-52.3	11.1	-41.2	PASS
5394.191079	-52.3	11.1	-41.2	PASS
5417.659787	-52.4	11.1	-41.2	PASS
5417.160453	-52.4	11.1	-41.2	PASS
5426.148469	-52.4	11.1	-41.2	PASS
5421.155126	-52.4	11.1	-41.2	PASS
5388.199068	-52.4	11.1	-41.2	PASS
5400.183089	-52.4	11.1	-41.2	PASS
5422.153795	-52.4	11.1	-41.2	PASS
5424.151132	-52.4	11.1	-41.2	PASS
5419.657124	-52.4	11.2	-41.2	PASS

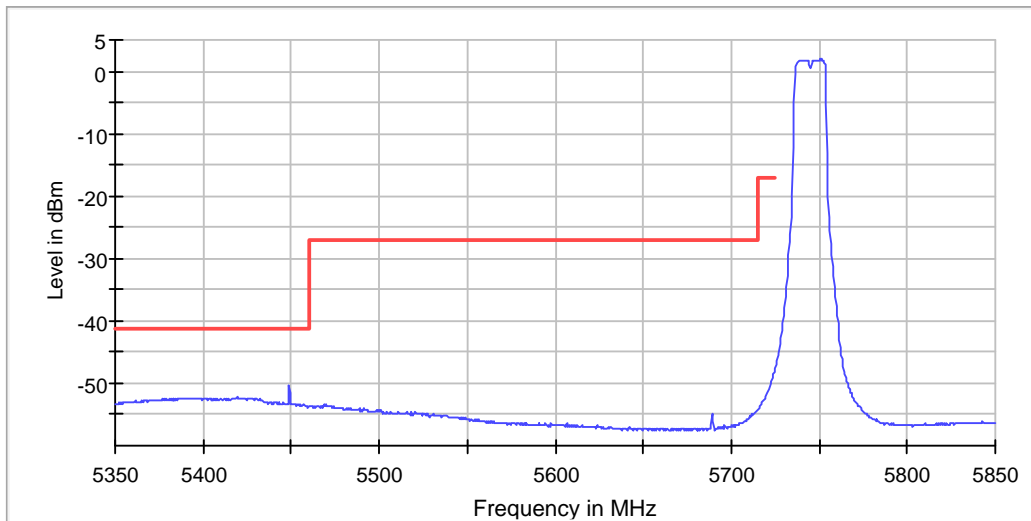

Measurement 1

Setting	Instrument Value	Target Value
RBW	1.000 MHz	<= 1.000 MHz
VBW	3.000 MHz	>= 3.000 MHz
SweepPoints	250	~ 250
SweepTime	250.000 ms	250.000 ms
Reference Level	-20.000 dBm	-20.000 dBm
Attenuation	0.000 dB	AUTO
Detector	RMS	RMS
SweepCount	5	5
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.30	0.30
Run	3 / max. 15	max. 15
Stable	3 / 3	3

Measurement 2

Setting	Instrument Value	Target Value
RBW	1.000 MHz	<= 1.000 MHz
VBW	3.000 MHz	>= 3.000 MHz
SweepPoints	750	~ 750
SweepTime	750.000 ms	750.000 ms
Reference Level	-20.000 dBm	-20.000 dBm
Attenuation	0.000 dB	AUTO
Detector	RMS	RMS
SweepCount	5	5
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.30	0.30
Run	3 / max. 15	max. 15
Stable	3 / 3	3

Tx Spurious Emission (5745 MHz; 20 MHz)

Test according to FCC title 47 part 15 §15.407(b), KDB 789033 D02 General U-NII Test Procedures New Rules v01r02 and ANSI C63.10

Result

DUT Frequency (MHz)	Result
5745.000000	PASS

Final measurements


Frequency (MHz)	Level Pre Measurement (dBm)	level (dBm)	Limit (dBm)	Margin (dB)	Result
5377.272727	-42.9	-53.2	-41.2	11.9	PASS

Pre Measurements

Frequency (MHz)	Level (dBm)	Margin (dB)	Limit (dBm)
5377.272727	-42.9	1.6	-41.2
5372.314050	-43.0	1.8	-41.2
5374.297521	-43.6	2.4	-41.2
5391.157025	-43.6	2.4	-41.2
5375.289256	-43.7	2.5	-41.2
5419.917355	-43.8	2.5	-41.2
5373.305785	-43.8	2.6	-41.2
5429.834711	-43.8	2.6	-41.2
5371.322314	-43.8	2.6	-41.2
5399.090909	-44.0	2.7	-41.2
5392.148760	-44.0	2.8	-41.2
5378.264463	-44.1	2.9	-41.2
5418.925620	-44.2	2.9	-41.2
5414.958678	-44.2	3.0	-41.2
5381.239669	-44.2	3.0	-41.2

Measurement Settings

Start Frequency (MHz)	Stop Frequency (MHz)	Pre Measurement	Final Measurement
30.000000	1000.000000	1	1
1000.000000	5150.000000	2	2
5150.000000	5250.000000	2	2
5250.000000	5350.000000	2	2
5350.000000	5470.000000	2	2
5470.000000	5725.000000	2	2
5725.000000	5850.000000	2	2
5850.000000	7000.000000	2	2
7000.000000	26000.000000	2	2
26000.000000	40000.000000	2	2

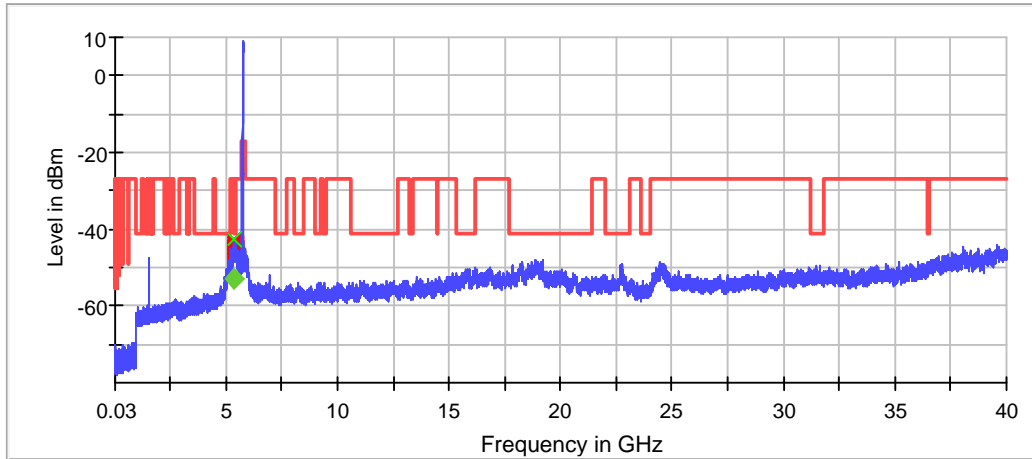

◆ Limit [limit.Result:1] × Threshold [limit.2.Result:1]
◆ Critical [Over Limit.Result:1] ◆ Sum Level [trace.Result:1]

Final Measurement

Setting	Instrument Value	Target Value
Span	ZeroSpan	ZeroSpan
RBW	1.000 MHz	~ 1.000 MHz
VBW	3.000 MHz	~ 3.000 MHz
SweepPoints	10001	~ 10001
Sweeptime	50.000 ms	50.000 ms
Reference Level	-20.000 dBm	-20.000 dBm
Attenuation	0.000 dB	0.000 dB
Detector	RMS	RMS
SweepCount	1	1
Filter	3 dB	3 dB
Trace Mode	Clear Write	Clear Write
SweepType	Sweep	AUTO
Preamp	off	off

Power Spectral Density (5785 MHz; 23.6816 MHz)


Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v01r02 and ANSI C63.10

Result

DUT Frequency (MHz)	Frequency (MHz)	PSD (dBm)	Limit Max (dBm)	Result
5785.000000	5790.920400	0.572	30.0	PASS

Ports

Port	Duty Cycle (%)
1	95.272

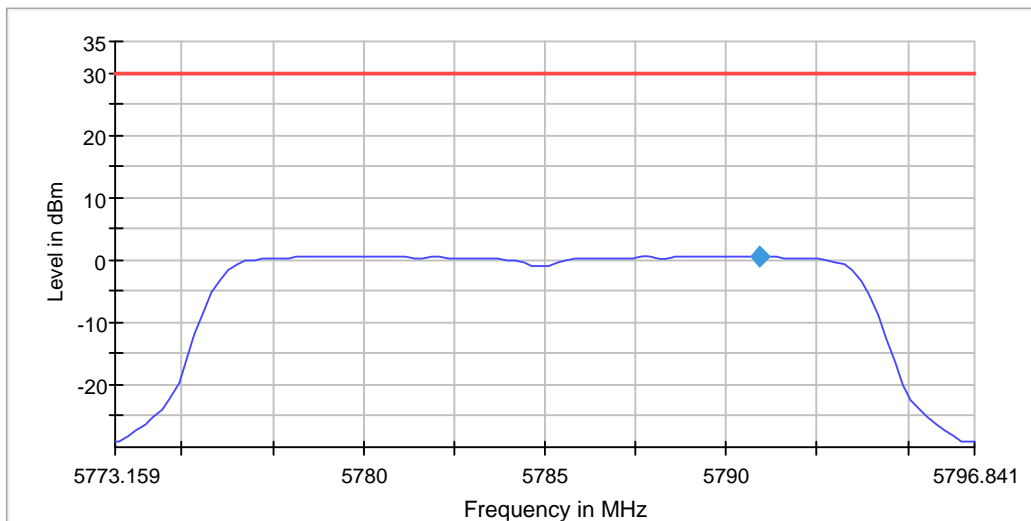

Measurement


Setting	Instrument Value	Target Value
Start Frequency	5.77316 GHz	5.77316 GHz
Stop Frequency	5.79684 GHz	5.79684 GHz
Span	23.682 MHz	23.682 MHz
RBW	1.000 MHz	<= 1.000 MHz
VBW	3.000 MHz	>= 3.000 MHz
SweepPoints	101	~ 47
Sweeptime	2.020 s	2.020 s
Reference Level	-20.000 dBm	-20.000 dBm
Attenuation	0.000 dB	AUTO
Detector	RMS	RMS
SweepCount	3	3
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.30	0.30
Run	3 / max. 15	max. 15
Stable	3 / 3	3

Minimum Emission Bandwidth 6 dB (5785 MHz; 20 MHz)

Test according to FCC title 47 part 15 §15.407(a),(e), KDB 789033 D02 General U-NII Test Procedures New Rules v01r02 and ANSI C63.10

6 dB Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)	Max Level (dBm)	Result
5785.000000	17.755611	0.500000	---	5776.022444	5793.778055	2.5	PASS

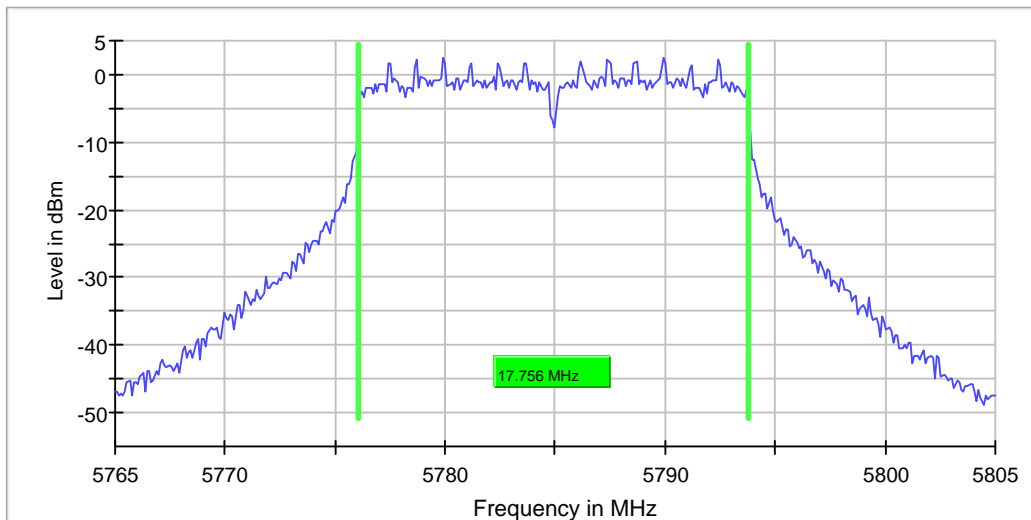

Measurement


Setting	Instrument Value	Target Value
Start Frequency	5.76500 GHz	5.76500 GHz
Stop Frequency	5.80500 GHz	5.80500 GHz
Span	40.000 MHz	40.000 MHz
RBW	100.000 kHz	~ 100.000 kHz
VBW	300.000 kHz	~ 300.000 kHz
SweepPoints	400	~ 400
SweepTime	56.886 μ s	AUTO
Reference Level	-20.000 dBm	-20.000 dBm
Attenuation	0.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	200	200
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	FFT	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.30	0.30
Run	27 / max. 150	max. 150
Stable	5 / 5	5

Emission Bandwidth 26 dB (5785 MHz; 20 MHz)

Test according to FCC title 47 part 15 §15.407(a),(e), KDB 789033 D02 General U-NII Test Procedures New Rules v01r02 and ANSI C63.10

26 dB Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)	Max Level (dBm)	Result
5785.000000	23.681593	---	---	5773.059701	5796.741294	3.4	PASS

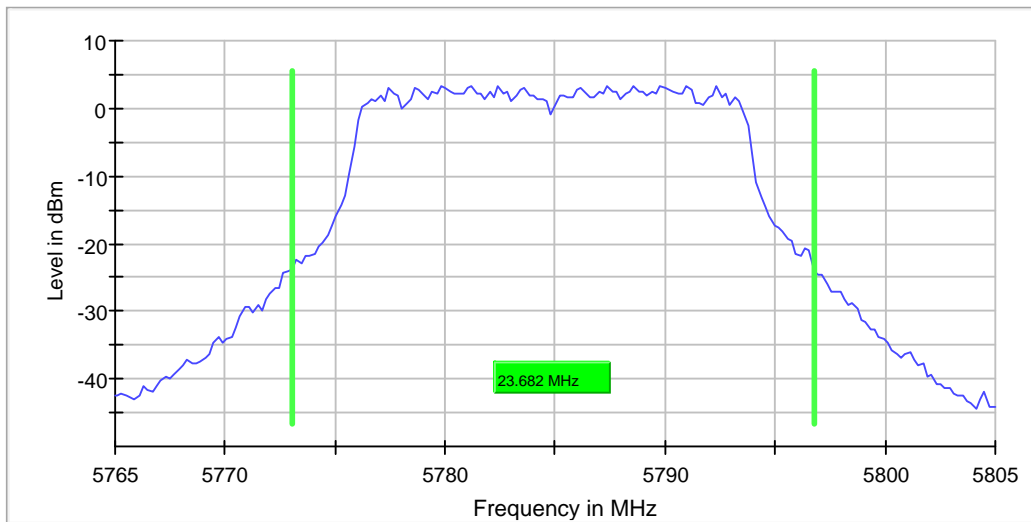

Measurement


Setting	Instrument Value	Target Value
Start Frequency	5.76500 GHz	5.76500 GHz
Stop Frequency	5.80500 GHz	5.80500 GHz
Span	40.000 MHz	40.000 MHz
RBW	200.000 kHz	~ 200.000 kHz
VBW	1.000 MHz	>= 600.000 kHz
SweepPoints	200	~ 200
Sweeptime	28.443 μs	AUTO
Reference Level	-10.000 dBm	-10.000 dBm
Attenuation	10.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	200	200
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
Sweeptype	FFT	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.30	0.30
Run	37 / max. 150	max. 150
Stable	5 / 5	5

Occupied Channel Bandwidth 99% (5785 MHz; 20 MHz)

Test according to FCC title 47 part 15 §15.407(a),(e), KDB 789033 D02 General U-NII Test Procedures New Rules v01r02 and ANSI C63.10

99 % Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)	Result
5785.000000	17.711443	---	---	5776.044776	5793.756219	PASS

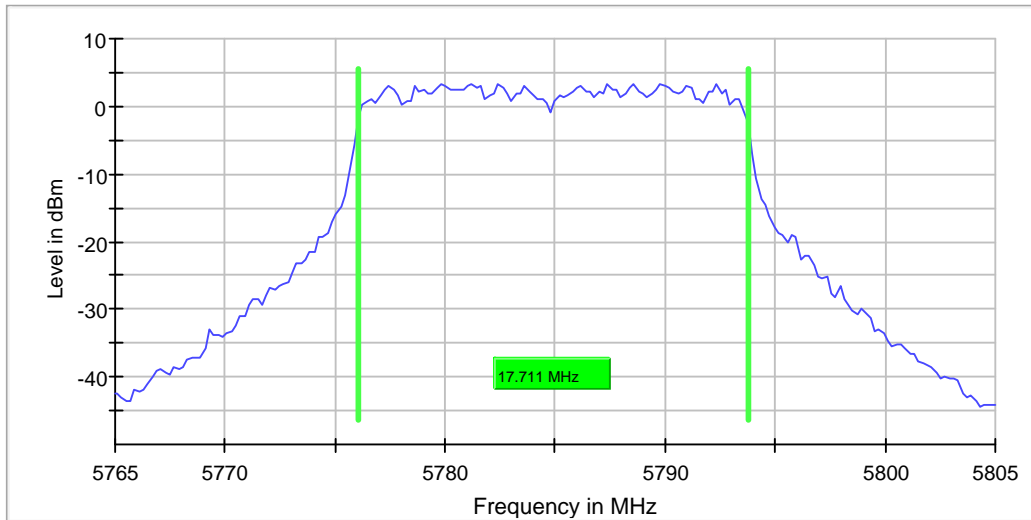

Measurement

Setting	Instrument Value	Target Value
Start Frequency	5.76500 GHz	5.76500 GHz
Stop Frequency	5.80500 GHz	5.80500 GHz
Span	40.000 MHz	40.000 MHz
RBW	200.000 kHz	<= 200.000 kHz
VBW	1.000 MHz	>= 600.000 kHz
SweepPoints	200	~ 200
SweepTime	28.443 μs	AUTO
Reference Level	-10.000 dBm	-10.000 dBm
Attenuation	10.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	200	200
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	FFT	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.30	0.30
Run	38 / max. 150	max. 150
Stable	5 / 5	5

Tx Spurious Emission (5785 MHz; 20 MHz)

Test according to FCC title 47 part 15 §15.407(b), KDB 789033 D02 General U-NII Test Procedures New Rules v01r02 and ANSI C63.10

Result

DUT Frequency (MHz)	Result
5785.000000	PASS

Final measurements


Frequency (MHz)	Level Pre Measurement (dBm)	level (dBm)	Limit (dBm)	Margin (dB)	Result
5406.033058	-43.6	-53.0	-41.2	11.8	PASS

Pre Measurements

Frequency (MHz)	Level (dBm)	Margin (dB)	Limit (dBm)
5406.033058	-43.6	2.3	-41.2
5457.603306	-43.6	2.3	-41.2
5396.115702	-43.7	2.5	-41.2
5395.123967	-43.7	2.5	-41.2
5435.785124	-43.9	2.7	-41.2
5408.016529	-43.9	2.7	-41.2
5381.239669	-44.0	2.7	-41.2
5424.876033	-44.2	3.0	-41.2
5360.413223	-44.2	3.0	-41.2
5387.190083	-44.2	3.0	-41.2
5425.867769	-44.2	3.0	-41.2
5394.132231	-44.3	3.0	-41.2
5447.685950	-44.3	3.1	-41.2
5404.049587	-44.3	3.1	-41.2
5448.677686	-44.3	3.1	-41.2

Measurement Settings

Start Frequency (MHz)	Stop Frequency (MHz)	Pre Measurement	Final Measurement
30.000000	1000.000000	1	1
1000.000000	5150.000000	2	2
5150.000000	5250.000000	2	2
5250.000000	5350.000000	2	2
5350.000000	5470.000000	2	2
5470.000000	5725.000000	2	2
5725.000000	5850.000000	2	2
5850.000000	7000.000000	2	2
7000.000000	26000.000000	2	2
26000.000000	40000.000000	2	2

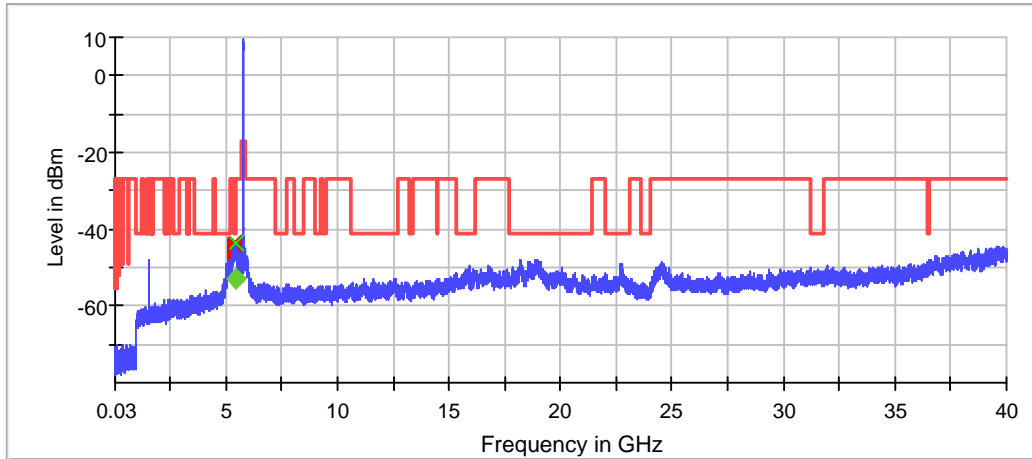

◆ Limit [limit.Result:1] × Threshold [limit.2.Result:1]
◆ Critical [Over Limit.Result:1] ◆ Sum Level [trace.Result:1]

Final Measurement

Setting	Instrument Value	Target Value
Span	ZeroSpan	ZeroSpan
RBW	1.000 MHz	~ 1.000 MHz
VBW	3.000 MHz	~ 3.000 MHz
SweepPoints	10001	~ 10001
Sweeptime	50.000 ms	50.000 ms
Reference Level	-20.000 dBm	-20.000 dBm
Attenuation	0.000 dB	0.000 dB
Detector	RMS	RMS
SweepCount	1	1
Filter	3 dB	3 dB
Trace Mode	Clear Write	Clear Write
Sweeptype	Sweep	AUTO
Preamp	off	off

Power Spectral Density (5825 MHz; 22.6866 MHz)


Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v01r02 and ANSI C63.10

Result

DUT Frequency (MHz)	Frequency (MHz)	PSD (dBm)	Limit Max (dBm)	Result
5825.000000	5830.004397	1.327	30.0	PASS

Ports

Port	Duty Cycle (%)
1	95.091

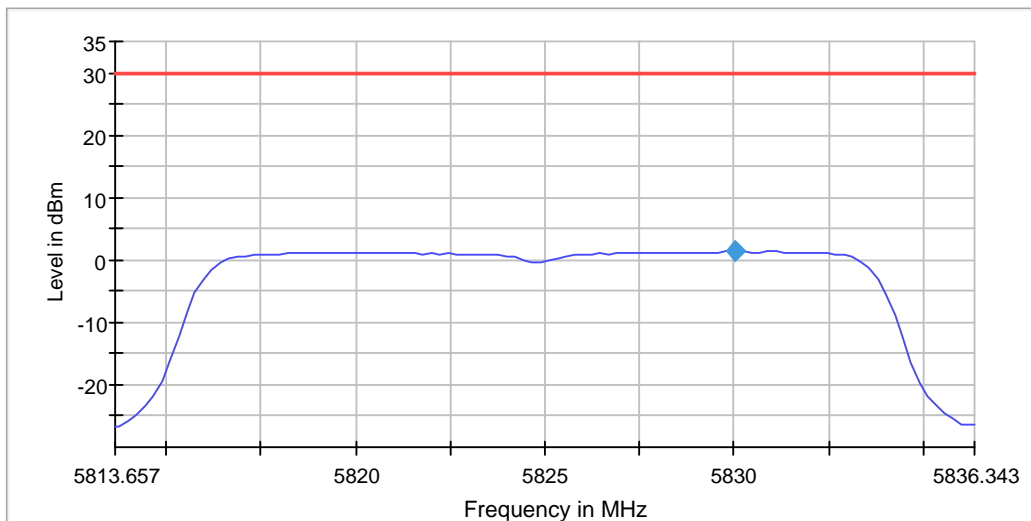

Measurement


Setting	Instrument Value	Target Value
Start Frequency	5.81366 GHz	5.81366 GHz
Stop Frequency	5.83634 GHz	5.83634 GHz
Span	22.687 MHz	22.687 MHz
RBW	1.000 MHz	<= 1.000 MHz
VBW	3.000 MHz	>= 3.000 MHz
SweepPoints	101	~ 45
SweepTime	2.020 s	2.020 s
Reference Level	-20.000 dBm	-20.000 dBm
Attenuation	0.000 dB	AUTO
Detector	RMS	RMS
SweepCount	3	3
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.30	0.30
Run	3 / max. 15	max. 15
Stable	3 / 3	3

Minimum Emission Bandwidth 6 dB (5825 MHz; 20 MHz)

Test according to FCC title 47 part 15 §15.407(a),(e), KDB 789033 D02 General U-NII Test Procedures New Rules v01r02 and ANSI C63.10

6 dB Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)	Max Level (dBm)	Result
5825.000000	17.655860	0.500000	---	5816.122195	5833.778055	2.8	PASS

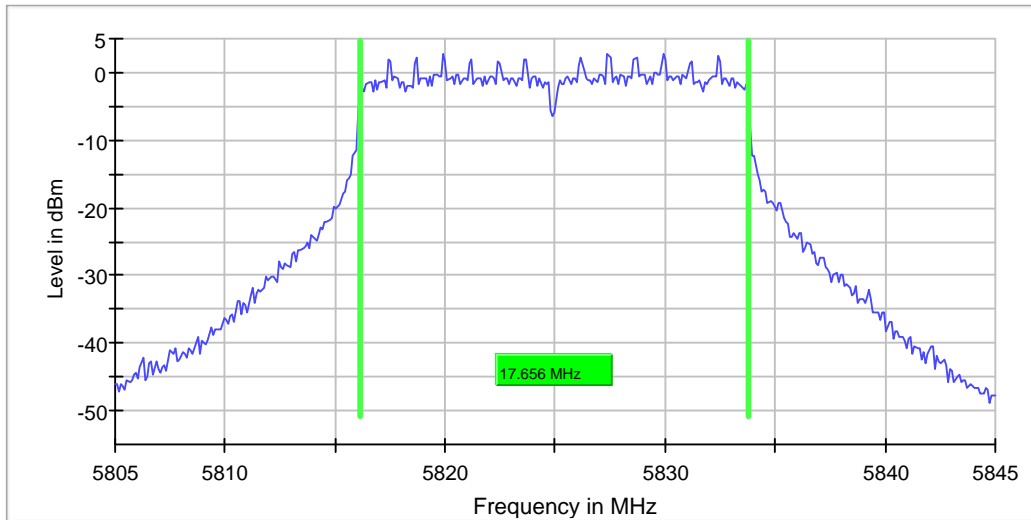

Measurement


Setting	Instrument Value	Target Value
Start Frequency	5.80500 GHz	5.80500 GHz
Stop Frequency	5.84500 GHz	5.84500 GHz
Span	40.000 MHz	40.000 MHz
RBW	100.000 kHz	~ 100.000 kHz
VBW	300.000 kHz	~ 300.000 kHz
SweepPoints	400	~ 400
SweepTime	56.886 μ s	AUTO
Reference Level	-20.000 dBm	-20.000 dBm
Attenuation	0.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	200	200
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	FFT	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.30	0.30
Run	54 / max. 150	max. 150
Stable	5 / 5	5

Emission Bandwidth 26 dB (5825 MHz; 20 MHz)

Test according to FCC title 47 part 15 §15.407(a),(e), KDB 789033 D02 General U-NII Test Procedures New Rules v01r02 and ANSI C63.10

26 dB Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)	Max Level (dBm)	Result
5825.000000	22.686568	---	---	5813.656716	5836.343284	3.7	PASS

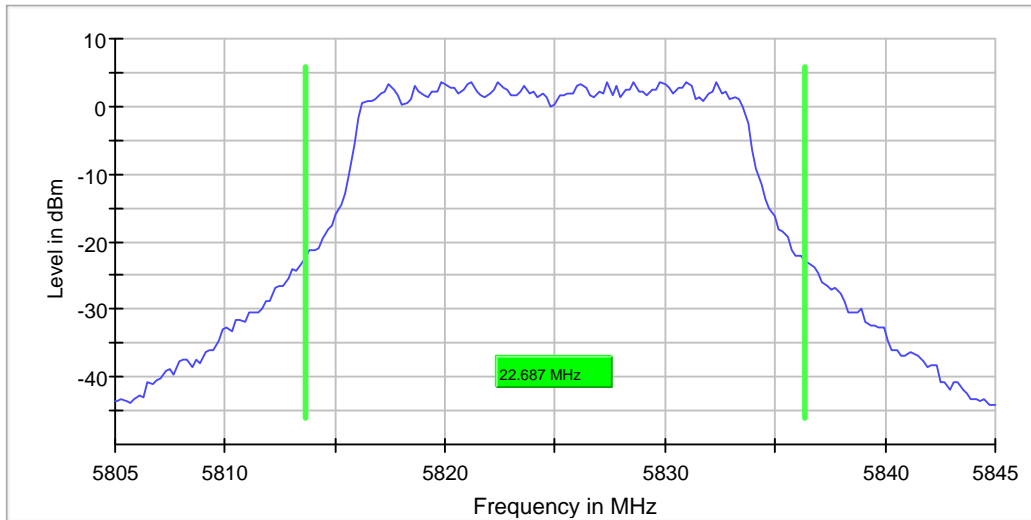

Measurement


Setting	Instrument Value	Target Value
Start Frequency	5.80500 GHz	5.80500 GHz
Stop Frequency	5.84500 GHz	5.84500 GHz
Span	40.000 MHz	40.000 MHz
RBW	200.000 kHz	~ 200.000 kHz
VBW	1.000 MHz	>= 600.000 kHz
SweepPoints	200	~ 200
Sweeptime	28.443 μs	AUTO
Reference Level	-10.000 dBm	-10.000 dBm
Attenuation	10.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	200	200
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
Sweeptype	FFT	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.30	0.30
Run	23 / max. 150	max. 150
Stable	5 / 5	5

Occupied Channel Bandwidth 99% (5825 MHz; 20 MHz)

Test according to FCC title 47 part 15 §15.407(a),(e), KDB 789033 D02 General U-NII Test Procedures New Rules v01r02 and ANSI C63.10

99 % Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)	Result
5825.000000	17.711443	---	---	5816.044776	5833.756219	PASS

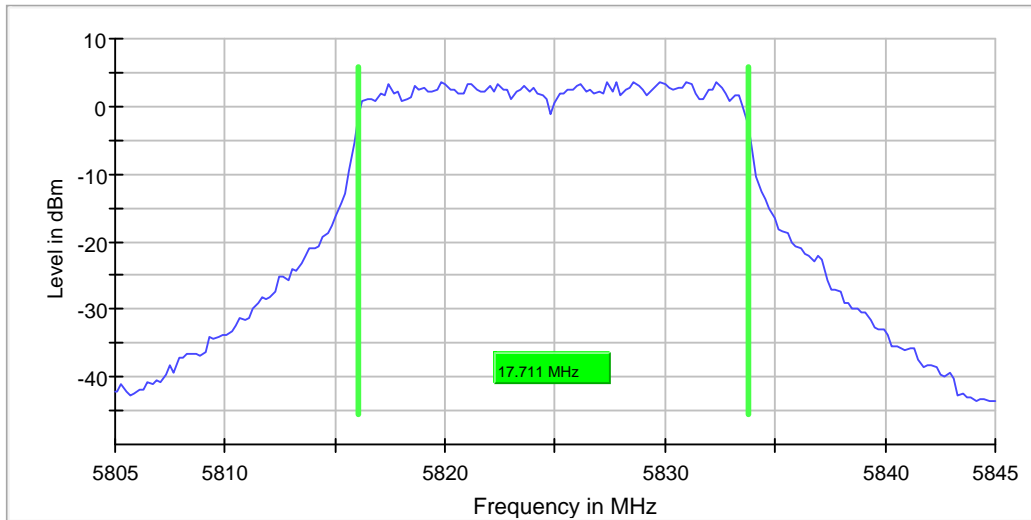

Measurement

Setting	Instrument Value	Target Value
Start Frequency	5.80500 GHz	5.80500 GHz
Stop Frequency	5.84500 GHz	5.84500 GHz
Span	40.000 MHz	40.000 MHz
RBW	200.000 kHz	<= 200.000 kHz
VBW	1.000 MHz	>= 600.000 kHz
SweepPoints	200	~ 200
Sweeptime	28.443 μs	AUTO
Reference Level	-10.000 dBm	-10.000 dBm
Attenuation	10.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	200	200
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
Sweeptype	FFT	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.30	0.30
Run	45 / max. 150	max. 150
Stable	5 / 5	5

Band Edge high (5825 MHz; 20 MHz)

Test according to FCC title 47 part 15 §15.407(b), KDB 789033 D02 General U-NII Test Procedures New Rules v01r02 and ANSI C63.10

Result


DUT Frequency (MHz)	Result
5825.000000	PASS

Inband Peak

Frequency (MHz)	Level (dBm)
5830.826693	2.1

Measurements

Frequency (MHz)	Level (dBm)	Margin (dB)	Limit (dBm)	Result
7300.416512	-64.1	22.8	-41.2	PASS
7301.416142	-64.1	22.9	-41.2	PASS
7302.415772	-64.1	22.9	-41.2	PASS
7295.418364	-64.1	22.9	-41.2	PASS
7297.417623	-64.1	22.9	-41.2	PASS
7307.413921	-64.1	22.9	-41.2	PASS
7286.421696	-64.1	22.9	-41.2	PASS
7296.917808	-64.1	22.9	-41.2	PASS
7301.915957	-64.1	22.9	-41.2	PASS
7299.916698	-64.1	22.9	-41.2	PASS
7294.918549	-64.1	22.9	-41.2	PASS
7298.917068	-64.2	22.9	-41.2	PASS
7304.415031	-64.2	22.9	-41.2	PASS
7427.369493	-64.2	22.9	-41.2	PASS
7306.914106	-64.2	22.9	-41.2	PASS

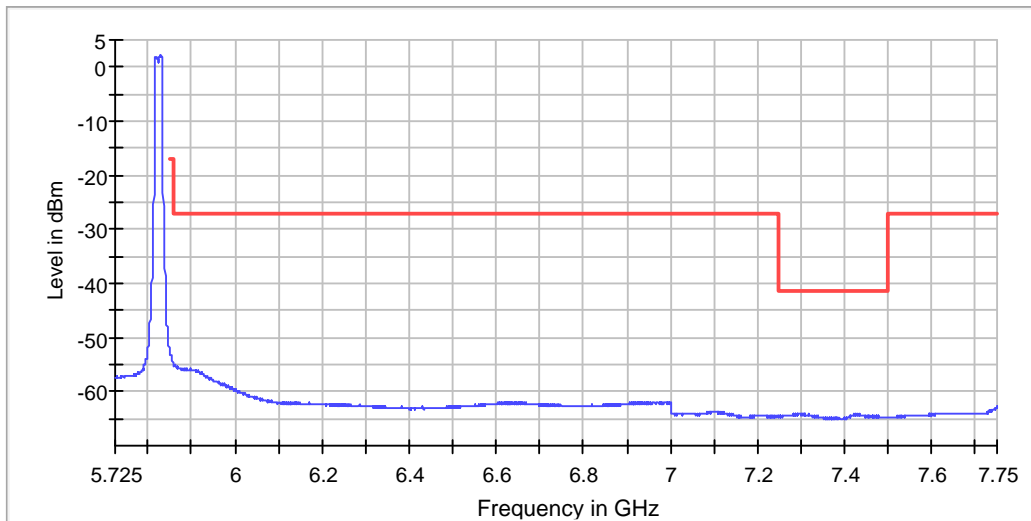

Measurement 1

Setting	Instrument Value	Target Value
RBW	1.000 MHz	<= 1.000 MHz
VBW	3.000 MHz	>= 3.000 MHz
SweepPoints	250	~ 250
SweepTime	250.000 ms	250.000 ms
Reference Level	-20.000 dBm	-20.000 dBm
Attenuation	0.000 dB	AUTO
Detector	RMS	RMS
SweepCount	5	5
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.30	0.30
Run	3 / max. 15	max. 15
Stable	3 / 3	3

Measurement 2

Setting	Instrument Value	Target Value
RBW	1.000 MHz	<= 1.000 MHz
VBW	3.000 MHz	>= 3.000 MHz
SweepPoints	1100	~ 1100
SweepTime	1.100 s	1.100 s
Reference Level	-20.000 dBm	-20.000 dBm
Attenuation	0.000 dB	AUTO
Detector	RMS	RMS
SweepCount	5	5
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.30	0.30
Run	3 / max. 15	max. 15
Stable	3 / 3	3

Tx Spurious Emission (5825 MHz; 20 MHz)

Test according to FCC title 47 part 15 §15.407(b), KDB 789033 D02 General U-NII Test Procedures New Rules v01r02 and ANSI C63.10

Result

DUT Frequency (MHz)	Result
5825.000000	PASS

Final measurements


Frequency (MHz)	Level Pre Measurement (dBm)	level (dBm)	Limit (dBm)	Margin (dB)	Result
1622.350036	-46.2	-57.7	-41.2	16.4	PASS
5431.818182	-42.7	-53.3	-41.2	12.1	PASS

Pre Measurements

Frequency (MHz)	Level (dBm)	Margin (dB)	Limit (dBm)
5431.818182	-42.7	1.5	-41.2
5432.809917	-43.1	1.8	-41.2
5407.024793	-43.2	2.0	-41.2
5379.256198	-43.4	2.1	-41.2
5406.033058	-43.4	2.2	-41.2
5350.495868	-43.7	2.5	-41.2
5350.000000	-43.7	2.5	-41.2
5371.322314	-43.7	2.5	-41.2
5411.983471	-43.9	2.6	-41.2
5380.247934	-44.0	2.8	-41.2
5391.157025	-44.0	2.8	-41.2
5404.049587	-44.0	2.8	-41.2
5405.041322	-44.1	2.9	-41.2
5410.991736	-44.1	2.9	-41.2
5438.760331	-44.2	3.0	-41.2

Measurement Settings

Start Frequency (MHz)	Stop Frequency (MHz)	Pre Measurement	Final Measurement
30.000000	1000.000000	1	1
1000.000000	5150.000000	2	2
5150.000000	5250.000000	2	2
5250.000000	5350.000000	2	2
5350.000000	5470.000000	2	2
5470.000000	5725.000000	2	2
5725.000000	5850.000000	2	2
5850.000000	7000.000000	2	2
7000.000000	26000.000000	2	2
26000.000000	40000.000000	2	2

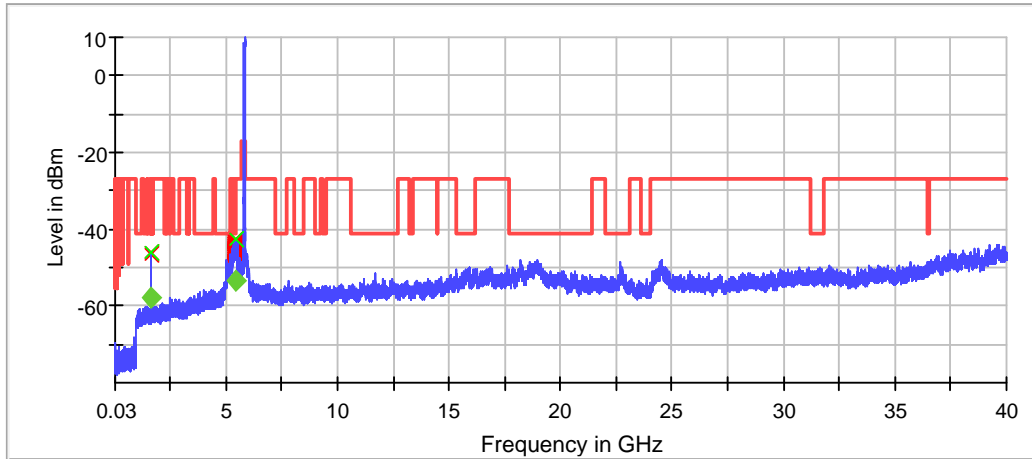

— Limit [limit.Result:1] x Threshold [limit.2.Result:1]
◆ Critical [Over Limit.Result:1] ◆ Sum Level [trace.Result:1]

Final Measurement

Setting	Instrument Value	Target Value
Span	ZeroSpan	ZeroSpan
RBW	1.000 MHz	~ 1.000 MHz
VBW	3.000 MHz	~ 3.000 MHz
SweepPoints	10001	~ 10001
Sweeptime	50.000 ms	50.000 ms
Reference Level	-20.000 dBm	-20.000 dBm
Attenuation	0.000 dB	0.000 dB
Detector	RMS	RMS
SweepCount	1	1
Filter	3 dB	3 dB
Trace Mode	Clear Write	Clear Write
Sweeptype	Sweep	AUTO
Preamp	off	off

UNII-3 ANT1 NHT40 Mode Power Spectral Density (5755 MHz; 43.8806 MHz)


Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v01r02 and ANSI C63.10

Result

DUT Frequency (MHz)	Frequency (MHz)	PSD (dBm)	Limit Max (dBm)	Result
5755.000000	5762.958736	-2.717	30.0	PASS

Ports

Port	Duty Cycle (%)
1	93.235

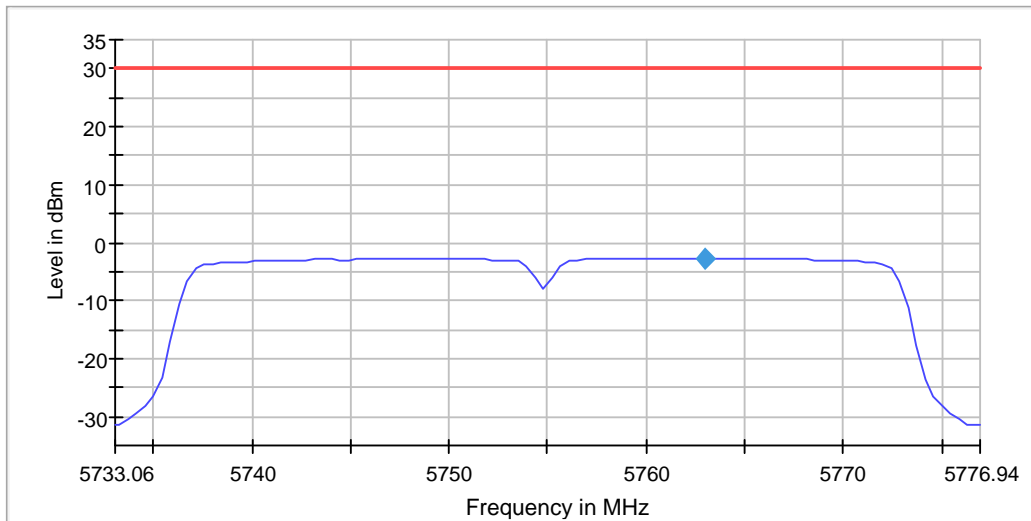

Measurement


Setting	Instrument Value	Target Value
Start Frequency	5.73306 GHz	5.73306 GHz
Stop Frequency	5.77694 GHz	5.77694 GHz
Span	43.881 MHz	43.881 MHz
RBW	1.000 MHz	<= 1.000 MHz
VBW	3.000 MHz	>= 3.000 MHz
SweepPoints	101	~ 88
SweepTime	2.020 s	2.020 s
Reference Level	-20.000 dBm	-20.000 dBm
Attenuation	0.000 dB	AUTO
Detector	RMS	RMS
SweepCount	3	3
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.30	0.30
Run	3 / max. 15	max. 15
Stable	3 / 3	3

Minimum Emission Bandwidth 6 dB (5755 MHz; 40 MHz)

Test according to FCC title 47 part 15 §15.407(a),(e), KDB 789033 D02 General U-NII Test Procedures New Rules v01r02 and ANSI C63.10

6 dB Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)	Max Level (dBm)	Result
5755.000000	36.454432	0.500000	---	5736.722846	5773.177278	-2.1	PASS

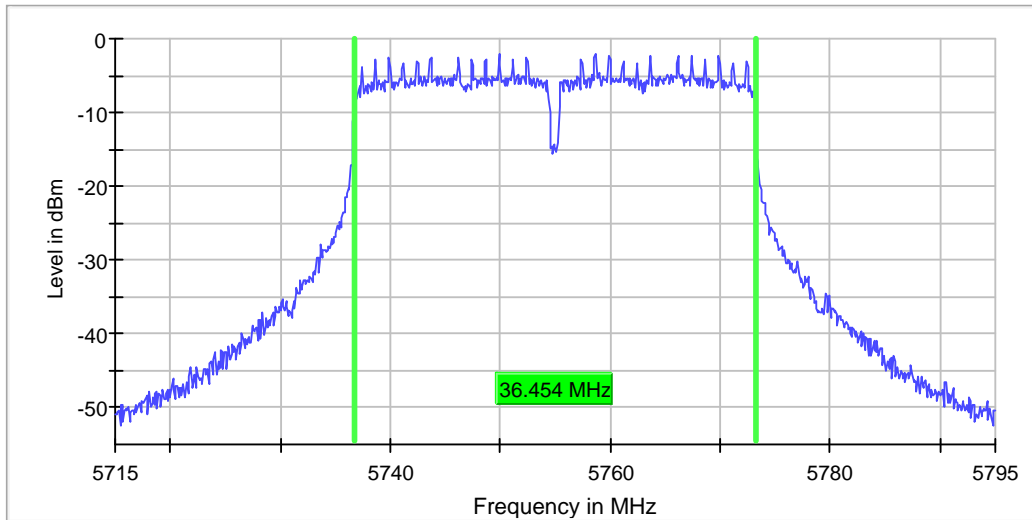

Measurement


Setting	Instrument Value	Target Value
Start Frequency	5.71500 GHz	5.71500 GHz
Stop Frequency	5.79500 GHz	5.79500 GHz
Span	80.000 MHz	80.000 MHz
RBW	100.000 kHz	~ 100.000 kHz
VBW	300.000 kHz	~ 300.000 kHz
SweepPoints	800	~ 800
Sweeptime	94.810 μs	AUTO
Reference Level	-20.000 dBm	-20.000 dBm
Attenuation	0.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	200	200
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
Sweeptype	FFT	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.30	0.30
Run	71 / max. 150	max. 150
Stable	5 / 5	5

Emission Bandwidth 26 dB (5755 MHz; 40 MHz)

Test according to FCC title 47 part 15 §15.407(a),(e), KDB 789033 D02 General U-NII Test Procedures New Rules v01r02 and ANSI C63.10

26 dB Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)	Max Level (dBm)	Result
5755.000000	43.880598	---	---	5733.059701	5776.940299	0.4	PASS

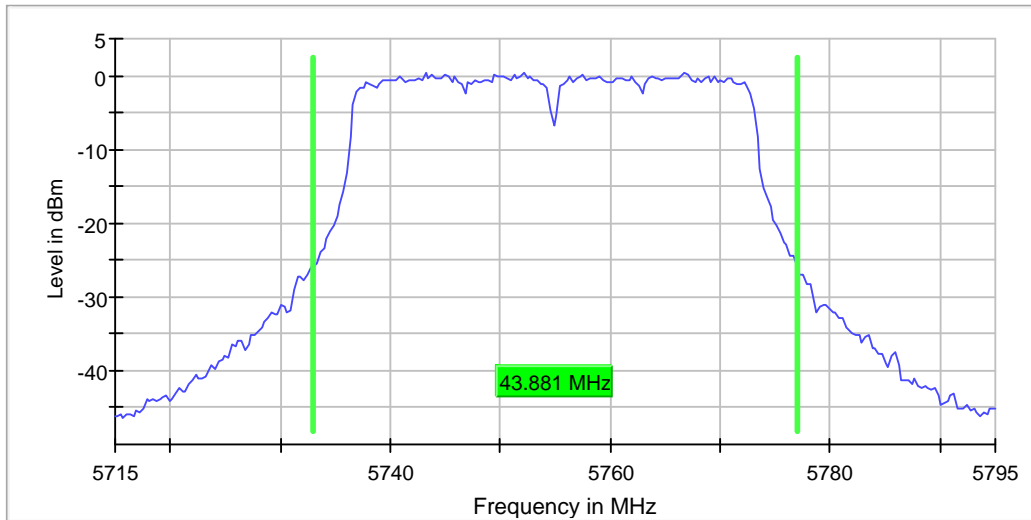

Measurement


Setting	Instrument Value	Target Value
Start Frequency	5.71500 GHz	5.71500 GHz
Stop Frequency	5.79500 GHz	5.79500 GHz
Span	80.000 MHz	80.000 MHz
RBW	300.000 kHz	~ 400.000 kHz
VBW	1.000 MHz	>= 900.000 kHz
SweepPoints	267	~ 267
Sweeptime	31.603 μs	AUTO
Reference Level	-20.000 dBm	-20.000 dBm
Attenuation	0.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	200	200
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
Sweeptype	FFT	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.30	0.30
Run	42 / max. 150	max. 150
Stable	5 / 5	5

Occupied Channel Bandwidth 99% (5755 MHz; 40 MHz)

Test according to FCC title 47 part 15 §15.407(a),(e), KDB 789033 D02 General U-NII Test Procedures New Rules v01r02 and ANSI C63.10

99 % Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)	Result
5755.000000	36.417910	---	---	5736.641791	5773.059701	PASS

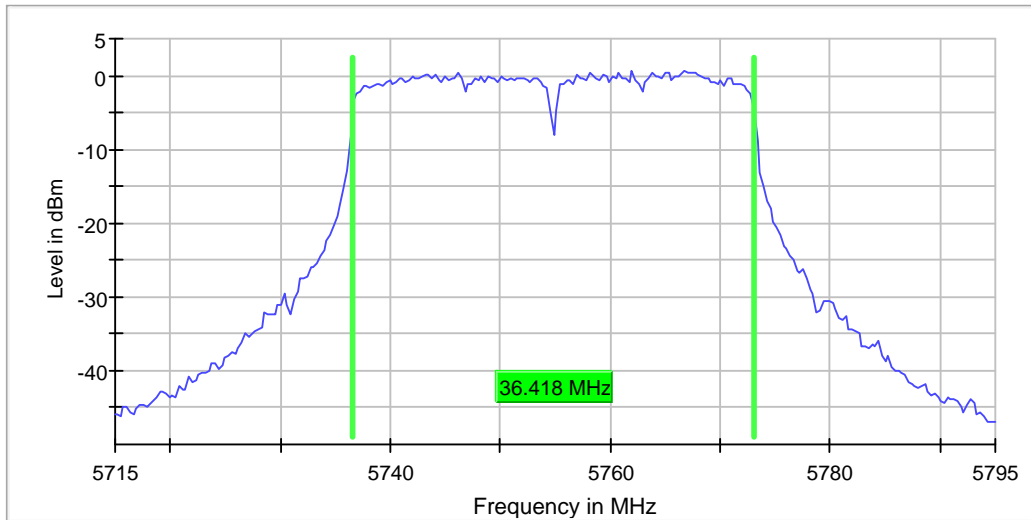

Measurement

Setting	Instrument Value	Target Value
Start Frequency	5.71500 GHz	5.71500 GHz
Stop Frequency	5.79500 GHz	5.79500 GHz
Span	80.000 MHz	80.000 MHz
RBW	300.000 kHz	<= 400.000 kHz
VBW	1.000 MHz	>= 900.000 kHz
SweepPoints	267	~ 267
Sweeptime	31.603 μs	AUTO
Reference Level	-20.000 dBm	-20.000 dBm
Attenuation	0.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	200	200
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
Sweeptype	FFT	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.30	0.30
Run	63 / max. 150	max. 150
Stable	5 / 5	5

Band Edge low (5755 MHz; 40 MHz)

Test according to FCC title 47 part 15 §15.407(b), KDB 789033 D02 General U-NII Test Procedures New Rules v01r02 and ANSI C63.10

Result


DUT Frequency (MHz)	Result
5755.000000	PASS

Inband Peak

Frequency (MHz)	Level (dBm)
5763.097610	-3.0

Measurements

Frequency (MHz)	Level (dBm)	Margin (dB)	Limit (dBm)	Result
5417.659787	-56.5	15.2	-41.2	PASS
5419.157790	-56.5	15.3	-41.2	PASS
5418.658455	-56.5	15.3	-41.2	PASS
5395.689081	-56.5	15.3	-41.2	PASS
5389.697071	-56.6	15.3	-41.2	PASS
5420.156458	-56.6	15.4	-41.2	PASS
5386.201731	-56.6	15.4	-41.2	PASS
5393.691744	-56.6	15.4	-41.2	PASS
5419.657124	-56.6	15.4	-41.2	PASS
5385.203063	-56.6	15.4	-41.2	PASS
5397.187084	-56.6	15.4	-41.2	PASS
5382.706391	-56.6	15.4	-41.2	PASS
5387.200399	-56.6	15.4	-41.2	PASS
5424.151132	-56.6	15.4	-41.2	PASS
5392.693076	-56.6	15.4	-41.2	PASS

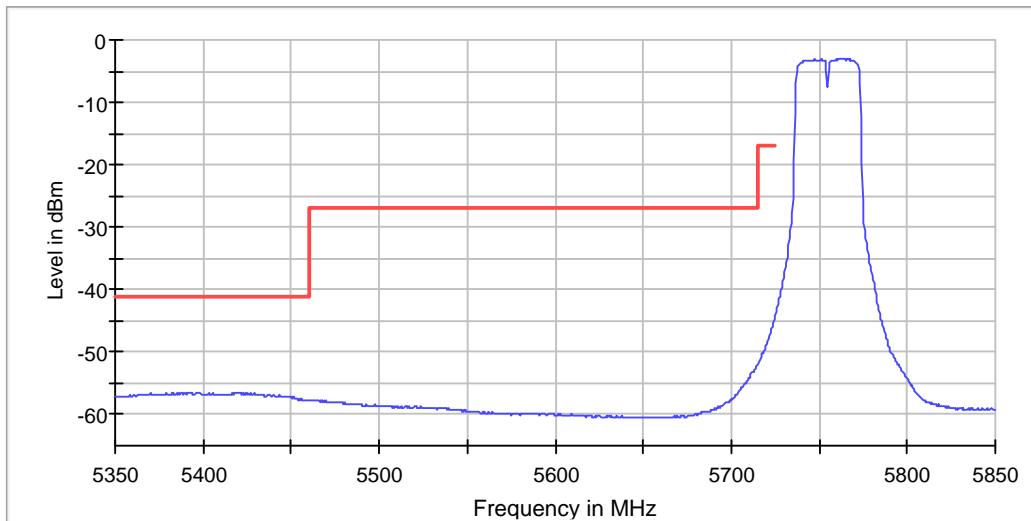

Measurement 1

Setting	Instrument Value	Target Value
RBW	1.000 MHz	<= 1.000 MHz
VBW	3.000 MHz	>= 3.000 MHz
SweepPoints	250	~ 250
SweepTime	250.000 ms	250.000 ms
Reference Level	-20.000 dBm	-20.000 dBm
Attenuation	0.000 dB	AUTO
Detector	RMS	RMS
SweepCount	5	5
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.30	0.30
Run	3 / max. 15	max. 15
Stable	3 / 3	3

Measurement 2

Setting	Instrument Value	Target Value
RBW	1.000 MHz	<= 1.000 MHz
VBW	3.000 MHz	>= 3.000 MHz
SweepPoints	750	~ 750
SweepTime	750.000 ms	750.000 ms
Reference Level	-20.000 dBm	-20.000 dBm
Attenuation	0.000 dB	AUTO
Detector	RMS	RMS
SweepCount	5	5
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.30	0.30
Run	3 / max. 15	max. 15
Stable	3 / 3	3

Tx Spurious Emission (5755 MHz; 40 MHz)

Test according to FCC title 47 part 15 §15.407(b), KDB 789033 D02 General U-NII Test Procedures New Rules v01r02 and ANSI C63.10

Result

DUT Frequency (MHz)	Result
5755.000000	PASS

Final measurements


Frequency (MHz)	Level Pre Measurement (dBm)	level (dBm)	Limit (dBm)	Margin (dB)	Result
5419.917355	-47.1	-57.0	-41.2	15.8	PASS
18953.870849	-47.1	-59.5	-41.2	18.3	PASS

Pre Measurements

Frequency (MHz)	Level (dBm)	Margin (dB)	Limit (dBm)
5419.917355	-47.1	5.9	-41.2
18953.870849	-47.1	5.9	-41.2
18873.875059	-47.6	6.4	-41.2
5350.000000	-47.7	6.4	-41.2
5397.107438	-47.7	6.5	-41.2
5418.925620	-47.8	6.6	-41.2
18169.912110	-47.9	6.7	-41.2
5400.082645	-48.0	6.8	-41.2
5425.867769	-48.0	6.8	-41.2
5456.611570	-48.0	6.8	-41.2
5392.148760	-48.1	6.9	-41.2
5399.090909	-48.1	6.9	-41.2
5426.859504	-48.1	6.9	-41.2
18868.875322	-48.3	7.1	-41.2
36467.752303	-48.3	7.1	-41.2

Measurement Settings

Start Frequency (MHz)	Stop Frequency (MHz)	Pre Measurement	Final Measurement
30.000000	1000.000000	1	1
1000.000000	5150.000000	2	2
5150.000000	5250.000000	2	2
5250.000000	5350.000000	2	2
5350.000000	5470.000000	2	2
5470.000000	5725.000000	2	2
5725.000000	5850.000000	2	2
5850.000000	7000.000000	2	2
7000.000000	26000.000000	2	2
26000.000000	40000.000000	2	2

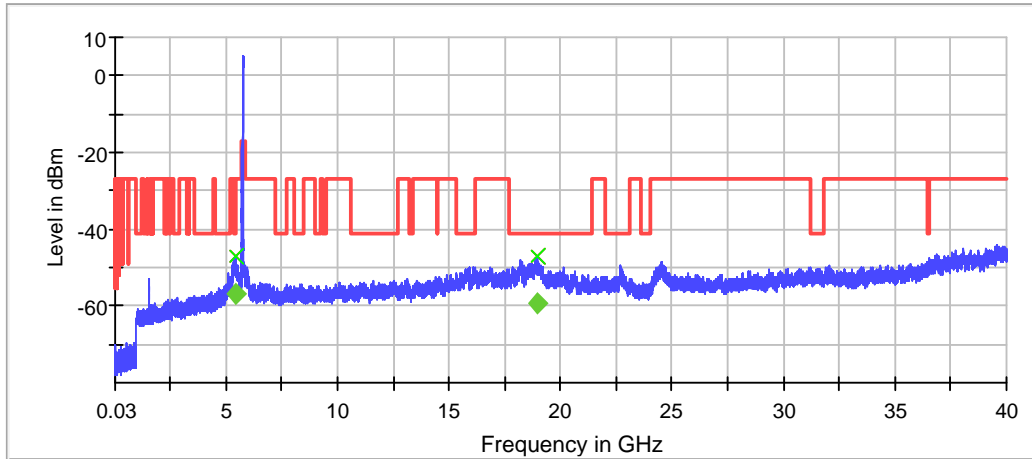

Final Measurement

Setting	Instrument Value	Target Value
Span	ZeroSpan	ZeroSpan
RBW	1.000 MHz	~ 1.000 MHz
VBW	3.000 MHz	~ 3.000 MHz
SweepPoints	10001	~ 10001
Sweeptime	50.000 ms	50.000 ms
Reference Level	-20.000 dBm	-20.000 dBm
Attenuation	0.000 dB	0.000 dB
Detector	RMS	RMS
SweepCount	1	1
Filter	3 dB	3 dB
Trace Mode	Clear Write	Clear Write
SweepType	Sweep	AUTO
Preamp	off	off

Power Spectral Density (5795 MHz; 43.5821 MHz)


Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v01r02 and ANSI C63.10

Result

DUT Frequency (MHz)	Frequency (MHz)	PSD (dBm)	Limit Max (dBm)	Result
5795.000000	5806.750076	-2.747	30.0	PASS

Ports

Port	Duty Cycle (%)
1	93.230

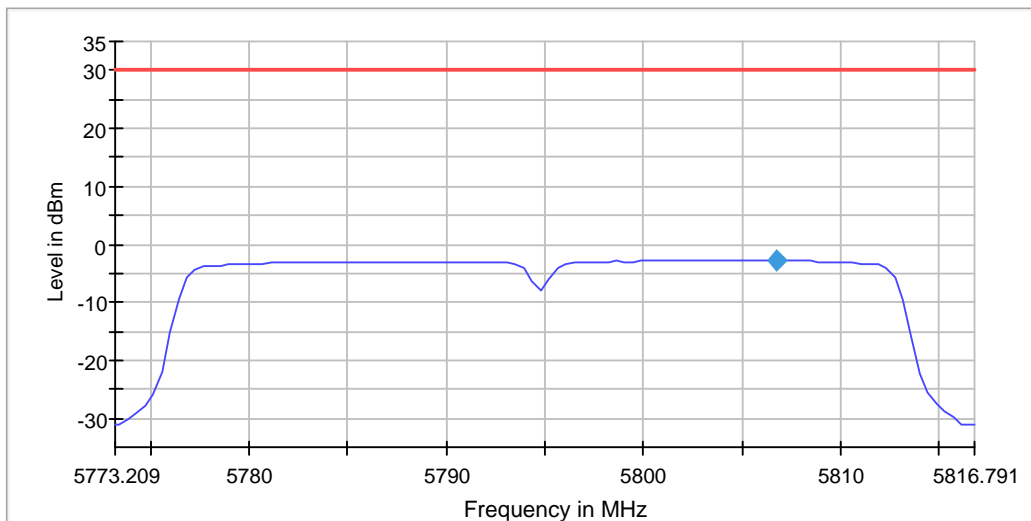

Measurement


Setting	Instrument Value	Target Value
Start Frequency	5.77321 GHz	5.77321 GHz
Stop Frequency	5.81679 GHz	5.81679 GHz
Span	43.582 MHz	43.582 MHz
RBW	1.000 MHz	<= 1.000 MHz
VBW	3.000 MHz	>= 3.000 MHz
SweepPoints	101	~ 87
SweepTime	2.020 s	2.020 s
Reference Level	-20.000 dBm	-20.000 dBm
Attenuation	0.000 dB	AUTO
Detector	RMS	RMS
SweepCount	3	3
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.30	0.30
Run	3 / max. 15	max. 15
Stable	3 / 3	3

Minimum Emission Bandwidth 6 dB (5795 MHz; 40 MHz)

Test according to FCC title 47 part 15 §15.407(a),(e), KDB 789033 D02 General U-NII Test Procedures New Rules v01r02 and ANSI C63.10

6 dB Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)	Max Level (dBm)	Result
5795.000000	36.454432	0.500000	---	5776.722846	5813.177278	-1.1	PASS

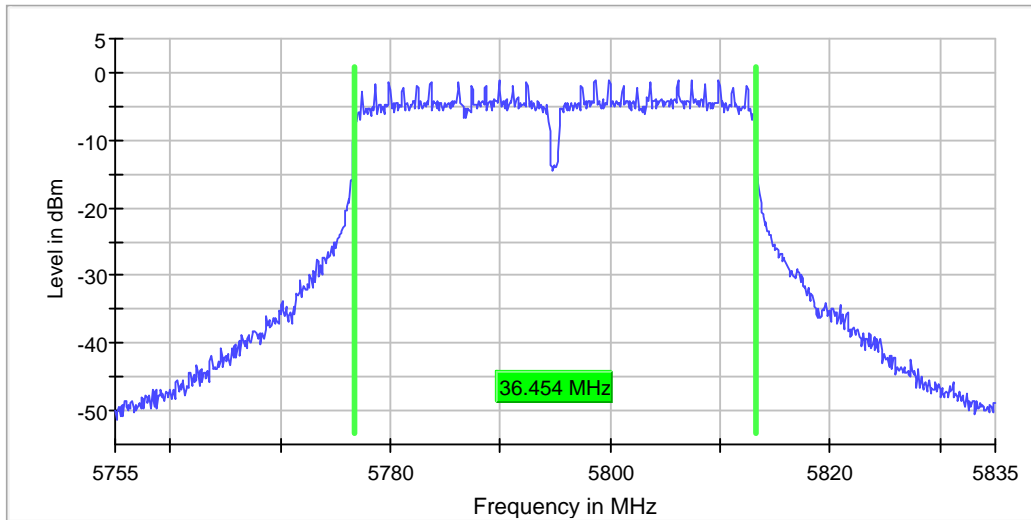

Measurement


Setting	Instrument Value	Target Value
Start Frequency	5.75500 GHz	5.75500 GHz
Stop Frequency	5.83500 GHz	5.83500 GHz
Span	80.000 MHz	80.000 MHz
RBW	100.000 kHz	~ 100.000 kHz
VBW	300.000 kHz	~ 300.000 kHz
SweepPoints	800	~ 800
Sweeptime	94.810 μs	AUTO
Reference Level	-20.000 dBm	-20.000 dBm
Attenuation	0.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	200	200
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
Sweeptype	FFT	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.30	0.30
Run	72 / max. 150	max. 150
Stable	5 / 5	5

Emission Bandwidth 26 dB (5795 MHz; 40 MHz)

Test according to FCC title 47 part 15 §15.407(a),(e), KDB 789033 D02 General U-NII Test Procedures New Rules v01r02 and ANSI C63.10

26 dB Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)	Max Level (dBm)	Result
5795.000000	43.582090	---	---	5773.059701	5816.641791	1.6	PASS

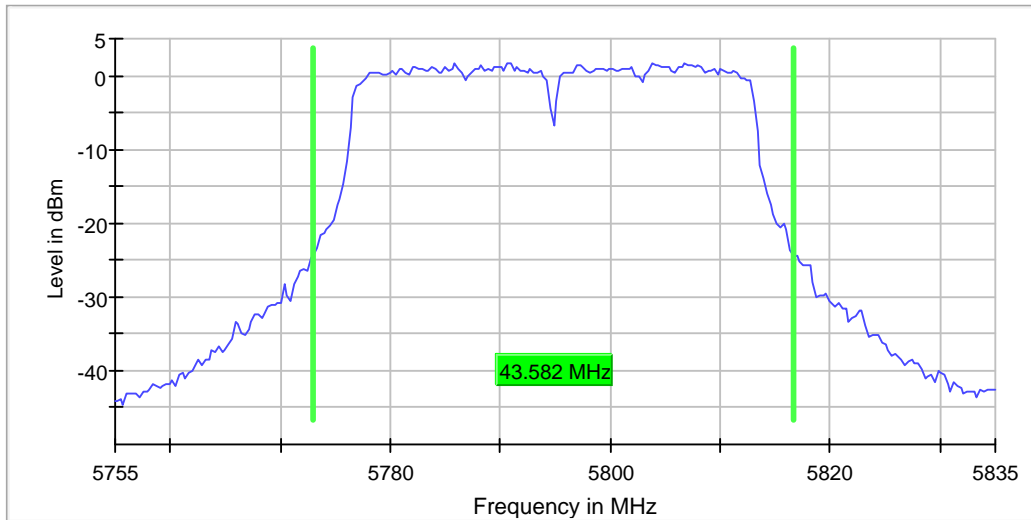

Measurement


Setting	Instrument Value	Target Value
Start Frequency	5.75500 GHz	5.75500 GHz
Stop Frequency	5.83500 GHz	5.83500 GHz
Span	80.000 MHz	80.000 MHz
RBW	300.000 kHz	~ 400.000 kHz
VBW	1.000 MHz	>= 900.000 kHz
SweepPoints	267	~ 267
Sweeptime	31.603 μs	AUTO
Reference Level	-10.000 dBm	-10.000 dBm
Attenuation	10.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	200	200
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
Sweeptype	FFT	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.30	0.30
Run	81 / max. 150	max. 150
Stable	5 / 5	5

Occupied Channel Bandwidth 99% (5795 MHz; 40 MHz)

Test according to FCC title 47 part 15 §15.407(a),(e), KDB 789033 D02 General U-NII Test Procedures New Rules v01r02 and ANSI C63.10

99 % Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)	Result
5795.000000	36.417910	---	---	5776.641791	5813.059701	PASS

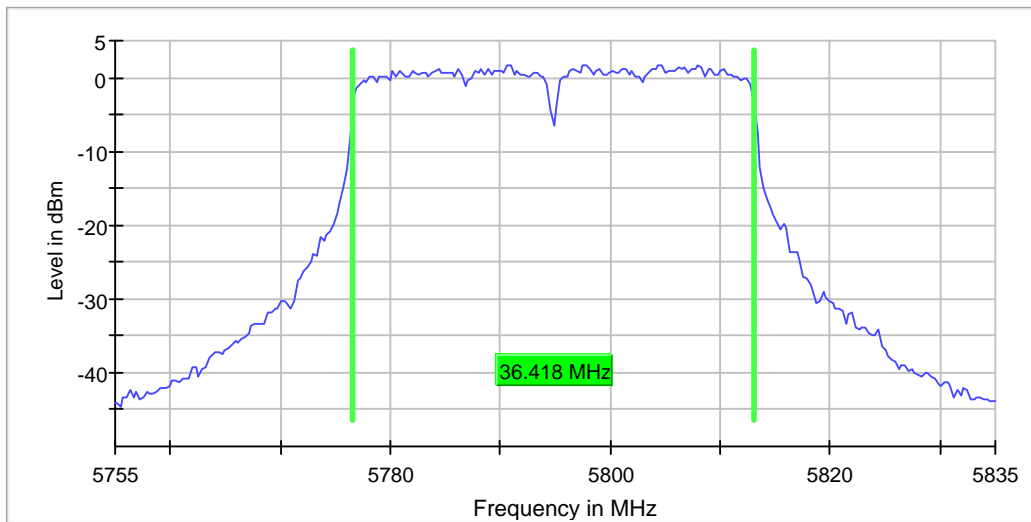

Measurement

Setting	Instrument Value	Target Value
Start Frequency	5.75500 GHz	5.75500 GHz
Stop Frequency	5.83500 GHz	5.83500 GHz
Span	80.000 MHz	80.000 MHz
RBW	300.000 kHz	<= 400.000 kHz
VBW	1.000 MHz	>= 900.000 kHz
SweepPoints	267	~ 267
SweepTime	31.603 μs	AUTO
Reference Level	-10.000 dBm	-10.000 dBm
Attenuation	10.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	200	200
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	FFT	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.30	0.30
Run	56 / max. 150	max. 150
Stable	5 / 5	5

Band Edge high (5795 MHz; 40 MHz)

Test according to FCC title 47 part 15 §15.407(b), KDB 789033 D02 General U-NII Test Procedures New Rules v01r02 and ANSI C63.10

Result


DUT Frequency (MHz)	Result
5795.000000	PASS

Inband Peak

Frequency (MHz)	Level (dBm)
5805.926295	-2.0

Measurements

Frequency (MHz)	Level (dBm)	Margin (dB)	Limit (dBm)	Result
7299.916698	-64.0	22.8	-41.2	PASS
7309.912995	-64.1	22.9	-41.2	PASS
7298.417253	-64.1	22.9	-41.2	PASS
7302.415772	-64.1	22.9	-41.2	PASS
7310.412810	-64.1	22.9	-41.2	PASS
7286.421696	-64.1	22.9	-41.2	PASS
7297.917438	-64.1	22.9	-41.2	PASS
7308.913365	-64.1	22.9	-41.2	PASS
7306.414291	-64.2	22.9	-41.2	PASS
7296.417993	-64.2	22.9	-41.2	PASS
7305.914476	-64.2	22.9	-41.2	PASS
7298.917068	-64.2	22.9	-41.2	PASS
7302.915587	-64.2	22.9	-41.2	PASS
7297.417623	-64.2	22.9	-41.2	PASS
7300.916327	-64.2	22.9	-41.2	PASS

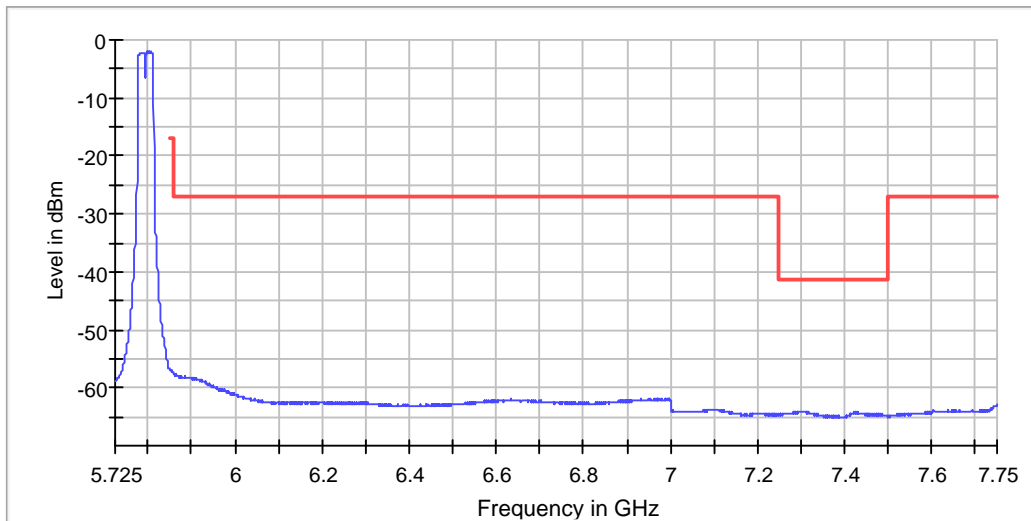

Measurement 1

Setting	Instrument Value	Target Value
RBW	1.000 MHz	<= 1.000 MHz
VBW	3.000 MHz	>= 3.000 MHz
SweepPoints	250	~ 250
SweepTime	250.000 ms	250.000 ms
Reference Level	-20.000 dBm	-20.000 dBm
Attenuation	0.000 dB	AUTO
Detector	RMS	RMS
SweepCount	5	5
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.30	0.30
Run	3 / max. 15	max. 15
Stable	3 / 3	3

Measurement 2

Setting	Instrument Value	Target Value
RBW	1.000 MHz	<= 1.000 MHz
VBW	3.000 MHz	>= 3.000 MHz
SweepPoints	1100	~ 1100
SweepTime	1.100 s	1.100 s
Reference Level	-20.000 dBm	-20.000 dBm
Attenuation	0.000 dB	AUTO
Detector	RMS	RMS
SweepCount	5	5
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.30	0.30
Run	3 / max. 15	max. 15
Stable	3 / 3	3

Tx Spurious Emission (5795 MHz; 40 MHz)

Test according to FCC title 47 part 15 §15.407(b), KDB 789033 D02 General U-NII Test Procedures New Rules v01r02 and ANSI C63.10

Result

DUT Frequency (MHz)	Result
5795.000000	PASS

Final measurements


Frequency (MHz)	Level Pre Measurement (dBm)	level (dBm)	Limit (dBm)	Margin (dB)	Result
5444.710744	-47.2	-57.4	-41.2	16.2	PASS
18228.909005	-46.9	-59.2	-41.2	18.0	PASS

Pre Measurements

Frequency (MHz)	Level (dBm)	Margin (dB)	Limit (dBm)
18228.909005	-46.9	5.7	-41.2
5444.710744	-47.2	6.0	-41.2
5422.892562	-47.2	6.0	-41.2
18912.873007	-47.3	6.1	-41.2
18667.885901	-47.3	6.1	-41.2
5421.900826	-47.4	6.2	-41.2
5456.611570	-47.5	6.3	-41.2
5432.809917	-47.7	6.4	-41.2
5457.603306	-47.7	6.4	-41.2
5431.818182	-47.7	6.5	-41.2
5416.942149	-47.7	6.5	-41.2
5445.702479	-47.8	6.6	-41.2
5377.272727	-47.8	6.6	-41.2
5404.049587	-48.0	6.7	-41.2
5423.884298	-48.0	6.8	-41.2

Measurement Settings

Start Frequency (MHz)	Stop Frequency (MHz)	Pre Measurement	Final Measurement
30.000000	1000.000000	1	1
1000.000000	5150.000000	2	2
5150.000000	5250.000000	2	2
5250.000000	5350.000000	2	2
5350.000000	5470.000000	2	2
5470.000000	5725.000000	2	2
5725.000000	5850.000000	2	2
5850.000000	7000.000000	2	2
7000.000000	26000.000000	2	2
26000.000000	40000.000000	2	2

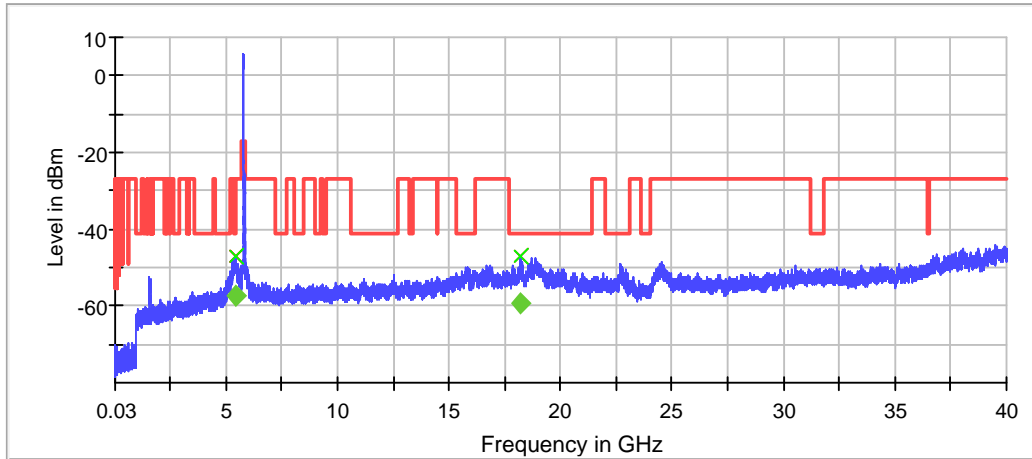

— Limit [limit.Result:1] x Threshold [limit 2.Result:1]
◆ Critical [Over Limit.Result:1] ◆ Sum Level [trace.Result:1]

Final Measurement

Setting	Instrument Value	Target Value
Span	ZeroSpan	ZeroSpan
RBW	1.000 MHz	~ 1.000 MHz
VBW	3.000 MHz	~ 3.000 MHz
SweepPoints	10001	~ 10001
Sweeptime	50.000 ms	50.000 ms
Reference Level	-20.000 dBm	-20.000 dBm
Attenuation	0.000 dB	0.000 dB
Detector	RMS	RMS
SweepCount	1	1
Filter	3 dB	3 dB
Trace Mode	Clear Write	Clear Write
SweepType	Sweep	AUTO
Preamp	off	off

UNII-3 ANT2 A Mode Power Spectral Density (5745 MHz; 22.2886 MHz)


Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v01r02 and ANSI C63.10

Result

DUT Frequency (MHz)	Frequency (MHz)	PSD (dBm)	Limit Max (dBm)	Result
5745.000000	5738.772303	3.832	30.0	PASS

Ports

Port	Duty Cycle (%)
1	96.093

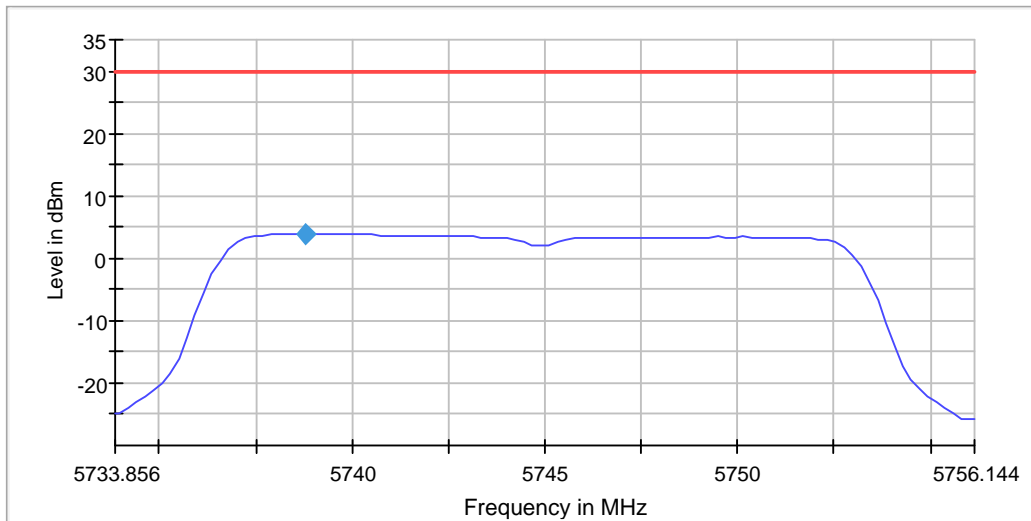

Measurement


Setting	Instrument Value	Target Value
Start Frequency	5.73386 GHz	5.73386 GHz
Stop Frequency	5.75614 GHz	5.75614 GHz
Span	22.289 MHz	22.289 MHz
RBW	1.000 MHz	<= 1.000 MHz
VBW	3.000 MHz	>= 3.000 MHz
SweepPoints	101	~ 45
SweepTime	2.020 s	2.020 s
Reference Level	-20.000 dBm	-20.000 dBm
Attenuation	0.000 dB	AUTO
Detector	RMS	RMS
SweepCount	3	3
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.30	0.30
Run	3 / max. 15	max. 15
Stable	3 / 3	3

Minimum Emission Bandwidth 6 dB (5745 MHz; 20 MHz)

Test according to FCC title 47 part 15 §15.407(a),(e), KDB 789033 D02 General U-NII Test Procedures New Rules v01r02 and ANSI C63.10

6 dB Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)	Max Level (dBm)	Result
5745.000000	16.458853	0.500000	---	5736.720698	5753.179551	2.8	PASS

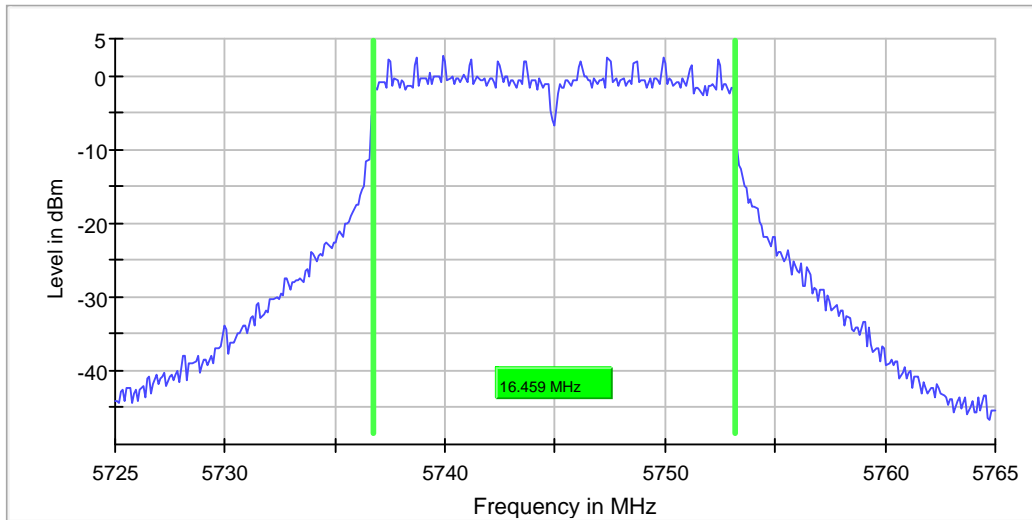

Measurement


Setting	Instrument Value	Target Value
Start Frequency	5.72500 GHz	5.72500 GHz
Stop Frequency	5.76500 GHz	5.76500 GHz
Span	40.000 MHz	40.000 MHz
RBW	100.000 kHz	~ 100.000 kHz
VBW	300.000 kHz	~ 300.000 kHz
SweepPoints	400	~ 400
Sweeptime	56.886 µs	AUTO
Reference Level	-20.000 dBm	-20.000 dBm
Attenuation	0.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	200	200
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
Sweeptype	FFT	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.30	0.30
Run	39 / max. 150	max. 150
Stable	5 / 5	5

Emission Bandwidth 26 dB (5745 MHz; 20 MHz)

Test according to FCC title 47 part 15 §15.407(a),(e), KDB 789033 D02 General U-NII Test Procedures New Rules v01r02 and ANSI C63.10

26 dB Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)	Max Level (dBm)	Result
5745.000000	22.288558	---	---	5733.457711	5755.746269	3.8	PASS

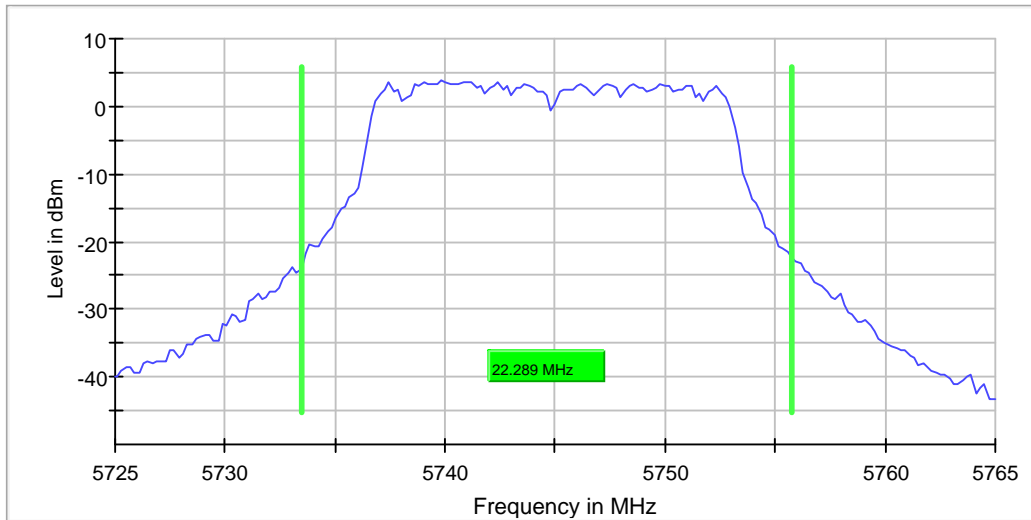

Measurement


Setting	Instrument Value	Target Value
Start Frequency	5.72500 GHz	5.72500 GHz
Stop Frequency	5.76500 GHz	5.76500 GHz
Span	40.000 MHz	40.000 MHz
RBW	200.000 kHz	~ 200.000 kHz
VBW	1.000 MHz	>= 600.000 kHz
SweepPoints	200	~ 200
SweepTime	28.443 μs	AUTO
Reference Level	-10.000 dBm	-10.000 dBm
Attenuation	10.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	200	200
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	FFT	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.30	0.30
Run	61 / max. 150	max. 150
Stable	5 / 5	5

Occupied Channel Bandwidth 99% (5745 MHz; 20 MHz)

Test according to FCC title 47 part 15 §15.407(a),(e), KDB 789033 D02 General U-NII Test Procedures New Rules v01r02 and ANSI C63.10

99 % Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)	Result
5745.000000	16.517413	---	---	5736.641791	5753.159204	PASS

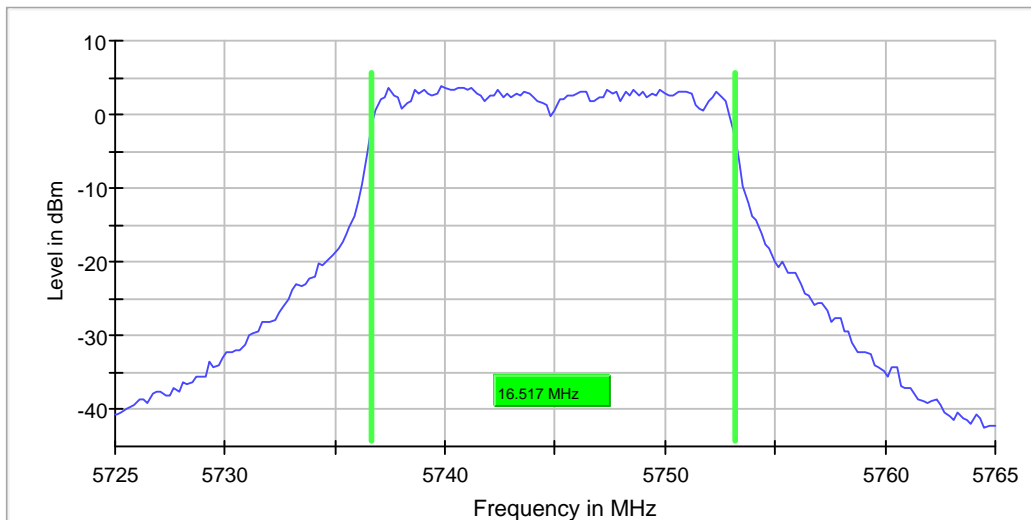

Measurement

Setting	Instrument Value	Target Value
Start Frequency	5.72500 GHz	5.72500 GHz
Stop Frequency	5.76500 GHz	5.76500 GHz
Span	40.000 MHz	40.000 MHz
RBW	200.000 kHz	<= 200.000 kHz
VBW	1.000 MHz	>= 600.000 kHz
SweepPoints	200	~ 200
SweepTime	28.443 μs	AUTO
Reference Level	-10.000 dBm	-10.000 dBm
Attenuation	10.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	200	200
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	FFT	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.30	0.30
Run	44 / max. 150	max. 150
Stable	5 / 5	5

Band Edge low (5745 MHz; 20 MHz)

Test according to FCC title 47 part 15 §15.407(b), KDB 789033 D02 General U-NII Test Procedures New Rules v01r02 and ANSI C63.10

Result


DUT Frequency (MHz)	Result
5745.000000	PASS

Inband Peak

Frequency (MHz)	Level (dBm)
5739.193227	2.5

Measurements

Frequency (MHz)	Level (dBm)	Margin (dB)	Limit (dBm)	Result
5356.241678	-57.7	16.5	-41.2	PASS
5350.249667	-57.7	16.5	-41.2	PASS
5350.000000	-57.7	16.5	-41.2	PASS
5351.747670	-57.8	16.6	-41.2	PASS
5360.236352	-57.8	16.6	-41.2	PASS
5351.248336	-57.8	16.6	-41.2	PASS
5355.243009	-57.8	16.6	-41.2	PASS
5353.745007	-57.8	16.6	-41.2	PASS
5360.735686	-57.8	16.6	-41.2	PASS
5354.244341	-57.8	16.6	-41.2	PASS
5357.739680	-57.8	16.6	-41.2	PASS
5352.247004	-57.8	16.6	-41.2	PASS
5355.742344	-57.9	16.6	-41.2	PASS
5350.749001	-57.9	16.6	-41.2	PASS
5357.240346	-57.9	16.6	-41.2	PASS

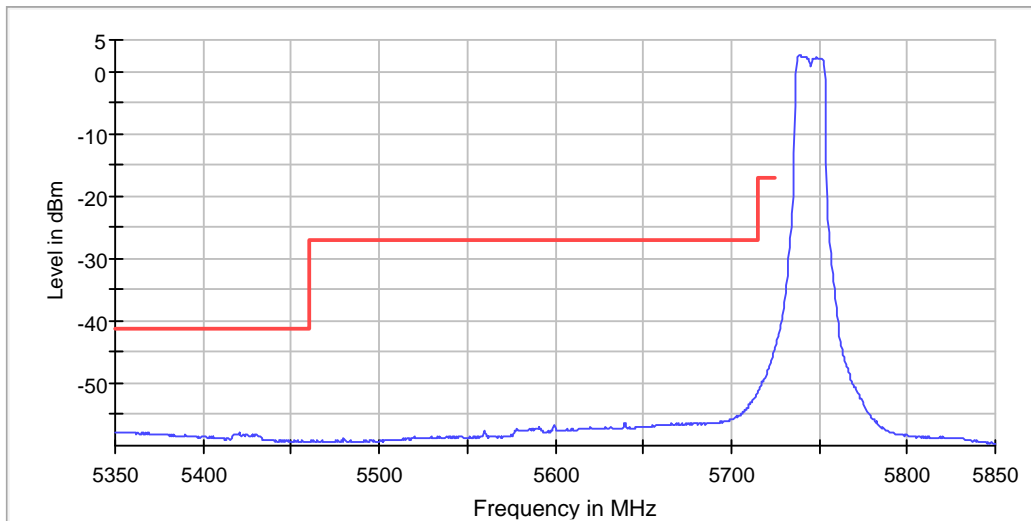

Measurement 1

Setting	Instrument Value	Target Value
RBW	1.000 MHz	<= 1.000 MHz
VBW	3.000 MHz	>= 3.000 MHz
SweepPoints	250	~ 250
SweepTime	250.000 ms	250.000 ms
Reference Level	-20.000 dBm	-20.000 dBm
Attenuation	0.000 dB	AUTO
Detector	RMS	RMS
SweepCount	5	5
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.30	0.30
Run	3 / max. 15	max. 15
Stable	3 / 3	3

Measurement 2

Setting	Instrument Value	Target Value
RBW	1.000 MHz	<= 1.000 MHz
VBW	3.000 MHz	>= 3.000 MHz
SweepPoints	750	~ 750
SweepTime	750.000 ms	750.000 ms
Reference Level	-20.000 dBm	-20.000 dBm
Attenuation	0.000 dB	AUTO
Detector	RMS	RMS
SweepCount	5	5
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.30	0.30
Run	3 / max. 15	max. 15
Stable	3 / 3	3

Tx Spurious Emission (5745 MHz; 20 MHz)

Test according to FCC title 47 part 15 §15.407(b), KDB 789033 D02 General U-NII Test Procedures New Rules v01r02 and ANSI C63.10

Result

DUT Frequency (MHz)	Result
5745.000000	PASS

Final measurements


Frequency (MHz)	Level Pre Measurement (dBm)	level (dBm)	Limit (dBm)	Margin (dB)	Result
1542.369309	-42.9	-54.8	-41.2	13.6	PASS

Pre Measurements

Frequency (MHz)	Level (dBm)	Margin (dB)	Limit (dBm)
1542.369309	-42.9	1.7	-41.2
1541.369550	-43.1	1.9	-41.2
1540.369790	-44.0	2.7	-41.2
1536.370754	-44.5	3.2	-41.2
1535.370995	-44.7	3.5	-41.2
1539.370031	-45.1	3.9	-41.2
1543.369068	-45.2	4.0	-41.2
1544.368827	-45.6	4.4	-41.2
1538.370272	-46.2	5.0	-41.2
1533.371477	-46.7	5.4	-41.2
1537.370513	-47.0	5.8	-41.2
5350.000000	-47.4	6.2	-41.2
1545.368586	-47.5	6.2	-41.2
18928.872165	-47.6	6.3	-41.2
5413.966942	-47.6	6.4	-41.2

Measurement Settings

Start Frequency (MHz)	Stop Frequency (MHz)	Pre Measurement	Final Measurement
30.000000	1000.000000	1	1
1000.000000	5150.000000	2	2
5150.000000	5250.000000	2	2
5250.000000	5350.000000	2	2
5350.000000	5470.000000	2	2
5470.000000	5725.000000	2	2
5725.000000	5850.000000	2	2
5850.000000	7000.000000	2	2
7000.000000	26000.000000	2	2
26000.000000	40000.000000	2	2

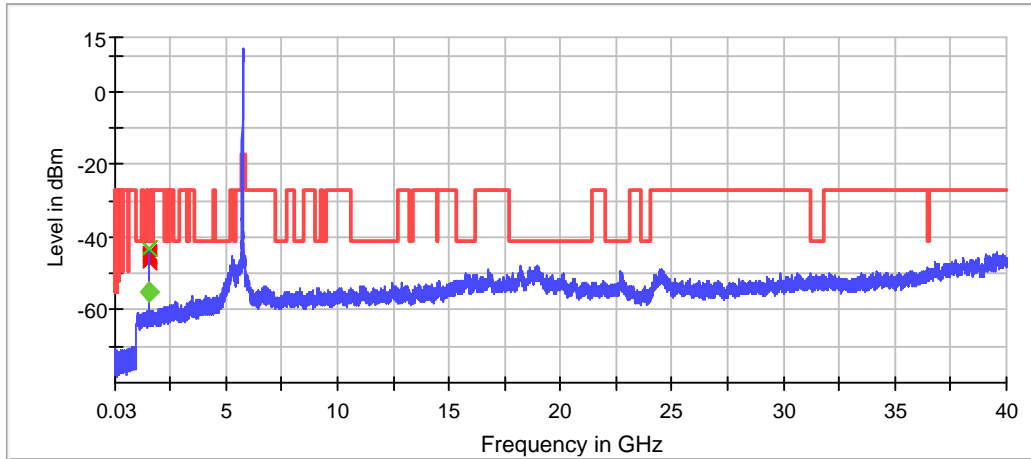

— Limit [limit.Result:1] × Threshold [limit.2.Result:1]
◆ Critical [Over Limit.Result:1] ◆ Sum Level [trace.Result:1]

Final Measurement

Setting	Instrument Value	Target Value
Span	ZeroSpan	ZeroSpan
RBW	1.000 MHz	~ 1.000 MHz
VBW	3.000 MHz	~ 3.000 MHz
SweepPoints	10001	~ 10001
Sweeptime	50.000 ms	50.000 ms
Reference Level	-20.000 dBm	-20.000 dBm
Attenuation	0.000 dB	0.000 dB
Detector	RMS	RMS
SweepCount	1	1
Filter	3 dB	3 dB
Trace Mode	Clear Write	Clear Write
SweepType	Sweep	AUTO
Preamp	off	off

Power Spectral Density (5785 MHz; 22.6866 MHz)


Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v01r02 and ANSI C63.10

Result

DUT Frequency (MHz)	Frequency (MHz)	PSD (dBm)	Limit Max (dBm)	Result
5785.000000	5778.438650	3.452	30.0	PASS

Ports

Port	Duty Cycle (%)
1	95.901

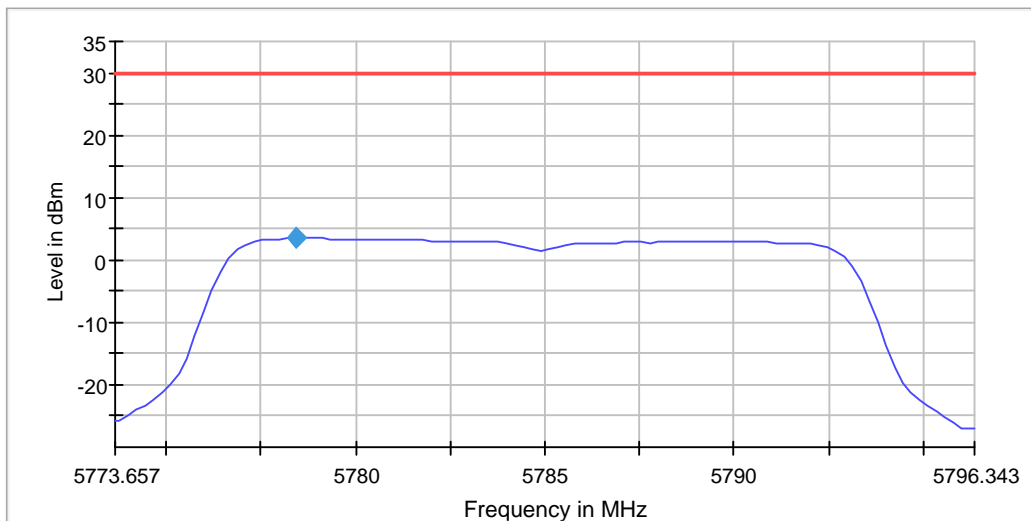

Measurement


Setting	Instrument Value	Target Value
Start Frequency	5.77366 GHz	5.77366 GHz
Stop Frequency	5.79634 GHz	5.79634 GHz
Span	22.687 MHz	22.687 MHz
RBW	1.000 MHz	<= 1.000 MHz
VBW	3.000 MHz	>= 3.000 MHz
SweepPoints	101	~ 45
SweepTime	2.020 s	2.020 s
Reference Level	-20.000 dBm	-20.000 dBm
Attenuation	0.000 dB	AUTO
Detector	RMS	RMS
SweepCount	3	3
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.30	0.30
Run	3 / max. 15	max. 15
Stable	3 / 3	3

Minimum Emission Bandwidth 6 dB (5785 MHz; 20 MHz)

Test according to FCC title 47 part 15 §15.407(a),(e), KDB 789033 D02 General U-NII Test Procedures New Rules v01r02 and ANSI C63.10

6 dB Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)	Max Level (dBm)	Result
5785.000000	16.458853	0.500000	---	5776.720698	5793.179551	4.4	PASS

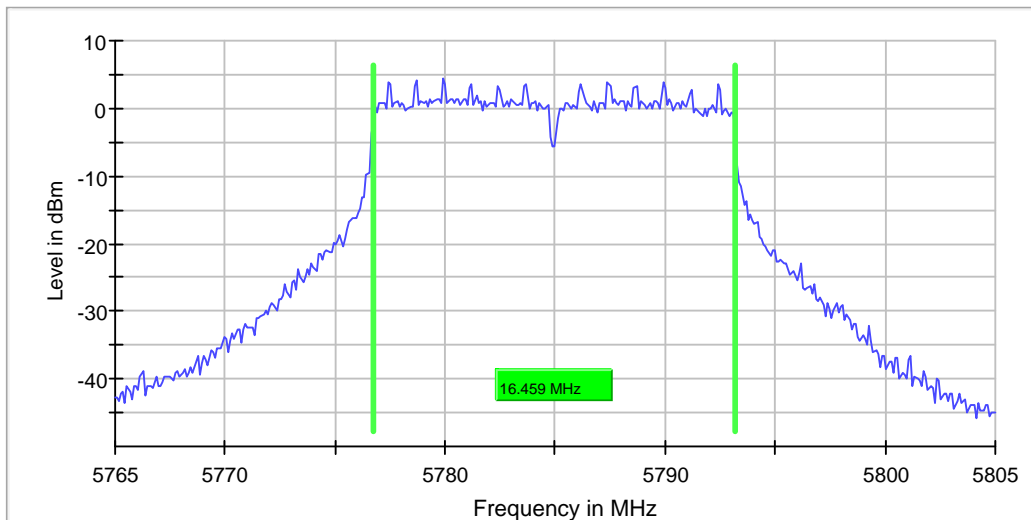

Measurement


Setting	Instrument Value	Target Value
Start Frequency	5.76500 GHz	5.76500 GHz
Stop Frequency	5.80500 GHz	5.80500 GHz
Span	40.000 MHz	40.000 MHz
RBW	100.000 kHz	~ 100.000 kHz
VBW	300.000 kHz	~ 300.000 kHz
SweepPoints	400	~ 400
Sweeptime	56.886 μ s	AUTO
Reference Level	-10.000 dBm	-10.000 dBm
Attenuation	10.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	200	200
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
Sweeptype	FFT	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.30	0.30
Run	40 / max. 150	max. 150
Stable	5 / 5	5

Emission Bandwidth 26 dB (5785 MHz; 20 MHz)

Test according to FCC title 47 part 15 §15.407(a),(e), KDB 789033 D02 General U-NII Test Procedures New Rules v01r02 and ANSI C63.10

26 dB Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)	Max Level (dBm)	Result
5785.000000	22.686568	---	---	5773.457711	5796.144279	5.3	PASS

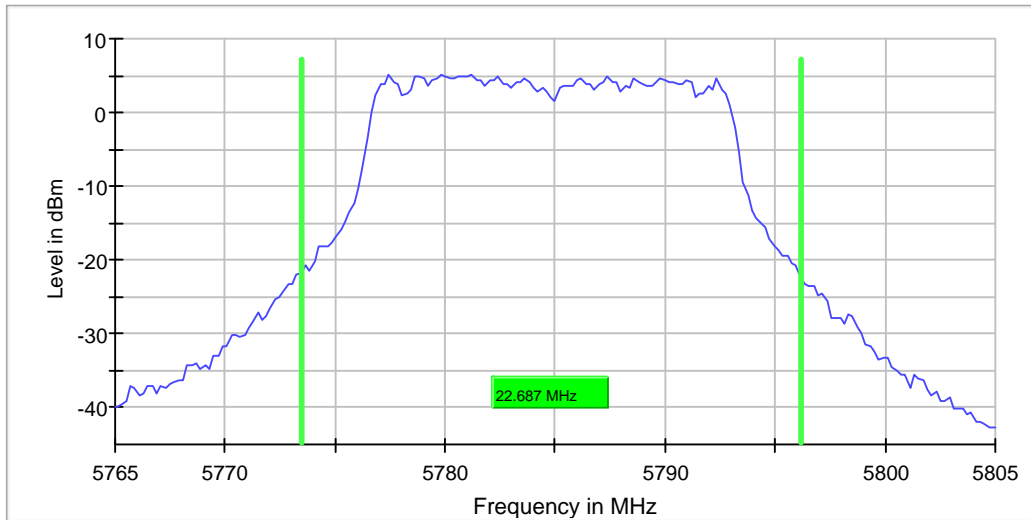

Measurement


Setting	Instrument Value	Target Value
Start Frequency	5.76500 GHz	5.76500 GHz
Stop Frequency	5.80500 GHz	5.80500 GHz
Span	40.000 MHz	40.000 MHz
RBW	200.000 kHz	~ 200.000 kHz
VBW	1.000 MHz	>= 600.000 kHz
SweepPoints	200	~ 200
Sweeptime	28.443 μs	AUTO
Reference Level	-10.000 dBm	-10.000 dBm
Attenuation	10.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	200	200
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
Sweeptype	FFT	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.30	0.30
Run	29 / max. 150	max. 150
Stable	5 / 5	5

Occupied Channel Bandwidth 99% (5785 MHz; 20 MHz)

Test according to FCC title 47 part 15 §15.407(a),(e), KDB 789033 D02 General U-NII Test Procedures New Rules v01r02 and ANSI C63.10

99 % Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)	Result
5785.000000	16.716418	---	---	5776.442786	5793.159204	PASS

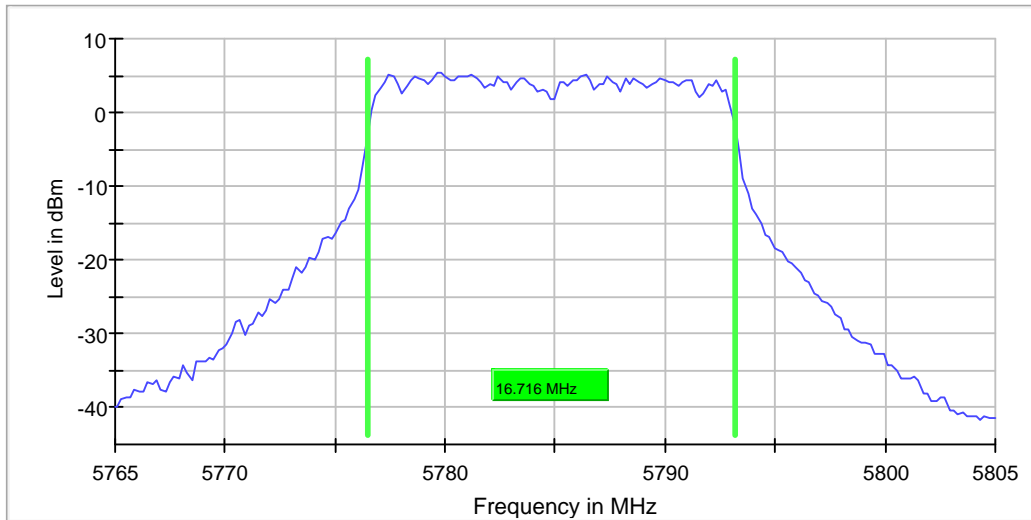

Measurement

Setting	Instrument Value	Target Value
Start Frequency	5.76500 GHz	5.76500 GHz
Stop Frequency	5.80500 GHz	5.80500 GHz
Span	40.000 MHz	40.000 MHz
RBW	200.000 kHz	<= 200.000 kHz
VBW	1.000 MHz	>= 600.000 kHz
SweepPoints	200	~ 200
Sweeptime	28.443 μs	AUTO
Reference Level	-10.000 dBm	-10.000 dBm
Attenuation	10.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	200	200
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
Sweeptype	FFT	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.30	0.30
Run	48 / max. 150	max. 150
Stable	5 / 5	5

Tx Spurious Emission (5785 MHz; 20 MHz)

Test according to FCC title 47 part 15 §15.407(b), KDB 789033 D02 General U-NII Test Procedures New Rules v01r02 and ANSI C63.10

Result

DUT Frequency (MHz)	Result
5785.000000	PASS

Final measurements


Frequency (MHz)	Level Pre Measurement (dBm)	level (dBm)	Limit (dBm)	Margin (dB)	Result
1581.359913	-44.3	-54.7	-41.2	13.4	PASS
5139.502530	-46.9	-56.3	-41.2	15.1	PASS
5405.041322	-45.4	-55.5	-41.2	14.3	PASS

Pre Measurements

Frequency (MHz)	Level (dBm)	Margin (dB)	Limit (dBm)
1581.359913	-44.3	3.1	-41.2
1580.360154	-44.8	3.6	-41.2
1582.359672	-45.0	3.8	-41.2
1583.359431	-45.0	3.8	-41.2
1577.360877	-45.2	3.9	-41.2
5405.041322	-45.4	4.2	-41.2
5351.487603	-45.4	4.2	-41.2
5357.438017	-45.8	4.6	-41.2
1578.360636	-45.8	4.6	-41.2
5375.289256	-45.9	4.6	-41.2
5353.471074	-45.9	4.7	-41.2
5380.247934	-46.0	4.8	-41.2
5379.256198	-46.0	4.8	-41.2
5374.297521	-46.1	4.8	-41.2
5356.446281	-46.1	4.9	-41.2

Measurement Settings

Start Frequency (MHz)	Stop Frequency (MHz)	Pre Measurement	Final Measurement
30.000000	1000.000000	1	1
1000.000000	5150.000000	2	2
5150.000000	5250.000000	2	2
5250.000000	5350.000000	2	2
5350.000000	5470.000000	2	2
5470.000000	5725.000000	2	2
5725.000000	5850.000000	2	2
5850.000000	7000.000000	2	2
7000.000000	26000.000000	2	2
26000.000000	40000.000000	2	2

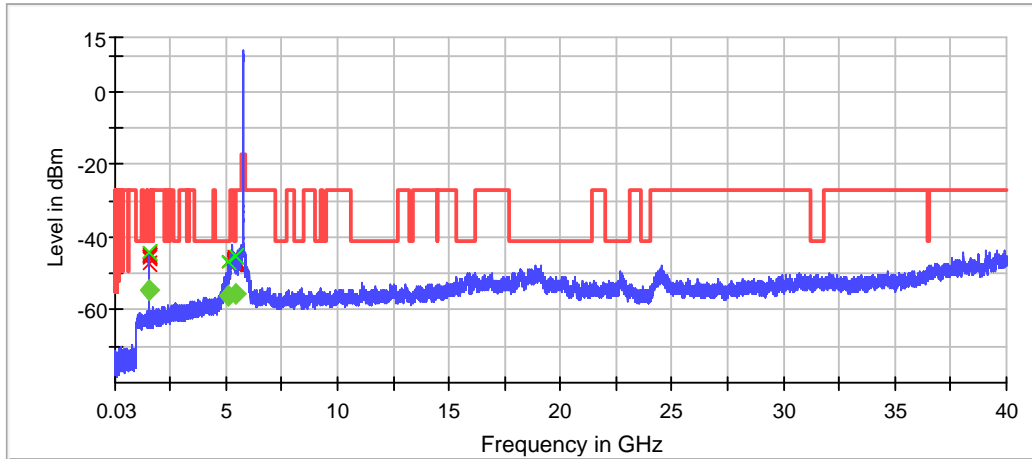

◆ Limit [limit.Result:1] × Threshold [limit 2.Result:1]
◆ Critical [Over Limit.Result:1] ◆ Sum Level [trace.Result:1]

Final Measurement

Setting	Instrument Value	Target Value
Span	ZeroSpan	ZeroSpan
RBW	1.000 MHz	~ 1.000 MHz
VBW	3.000 MHz	~ 3.000 MHz
SweepPoints	10001	~ 10001
Sweeptime	50.000 ms	50.000 ms
Reference Level	-10.000 dBm	-10.000 dBm
Attenuation	0.000 dB	0.000 dB
Detector	RMS	RMS
SweepCount	1	1
Filter	3 dB	3 dB
Trace Mode	Clear Write	Clear Write
SweepType	Sweep	AUTO
Preamp	off	off

Power Spectral Density (5825 MHz; 23.2836 MHz)


Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v01r02 and ANSI C63.10

Result

DUT Frequency (MHz)	Frequency (MHz)	PSD (dBm)	Limit Max (dBm)	Result
5825.000000	5818.722559	3.701	30.0	PASS

Ports

Port	Duty Cycle (%)
1	95.976

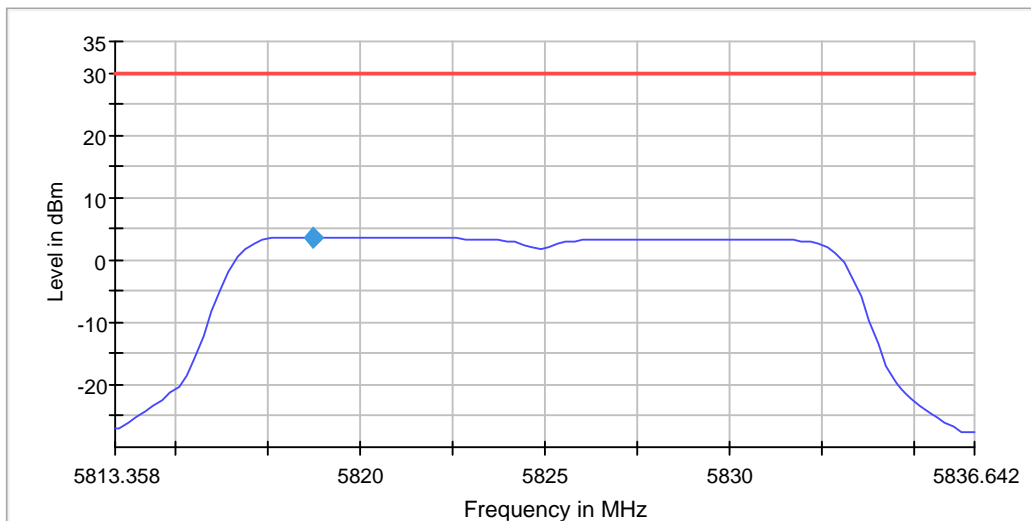

Measurement


Setting	Instrument Value	Target Value
Start Frequency	5.81336 GHz	5.81336 GHz
Stop Frequency	5.83664 GHz	5.83664 GHz
Span	23.284 MHz	23.284 MHz
RBW	1.000 MHz	<= 1.000 MHz
VBW	3.000 MHz	>= 3.000 MHz
SweepPoints	101	~ 47
SweepTime	2.020 s	2.020 s
Reference Level	-20.000 dBm	-20.000 dBm
Attenuation	0.000 dB	AUTO
Detector	RMS	RMS
SweepCount	3	3
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.30	0.30
Run	3 / max. 15	max. 15
Stable	3 / 3	3

Minimum Emission Bandwidth 6 dB (5825 MHz; 20 MHz)

Test according to FCC title 47 part 15 §15.407(a),(e), KDB 789033 D02 General U-NII Test Procedures New Rules v01r02 and ANSI C63.10

6 dB Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)	Max Level (dBm)	Result
5825.000000	16.458853	0.500000	---	5816.720698	5833.179551	5.1	PASS

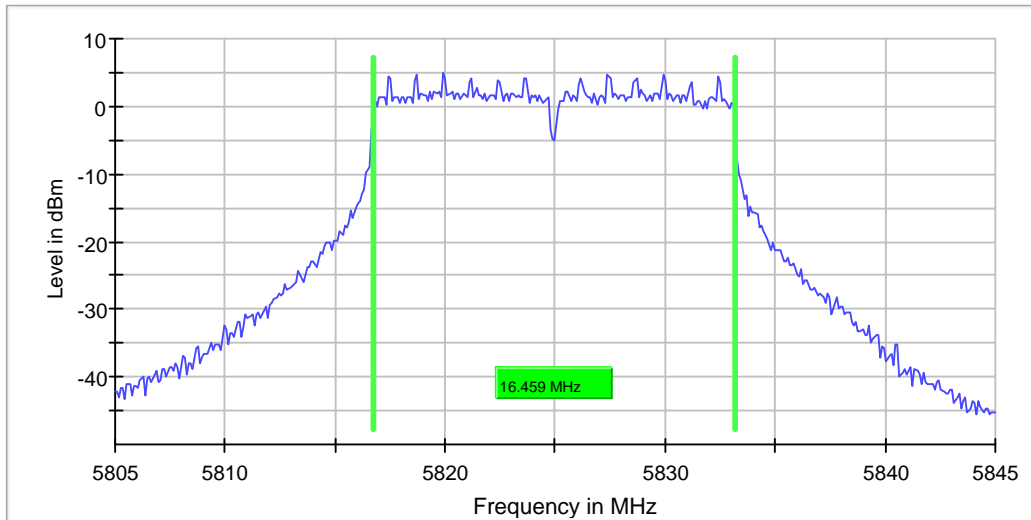

Measurement


Setting	Instrument Value	Target Value
Start Frequency	5.80500 GHz	5.80500 GHz
Stop Frequency	5.84500 GHz	5.84500 GHz
Span	40.000 MHz	40.000 MHz
RBW	100.000 kHz	~ 100.000 kHz
VBW	300.000 kHz	~ 300.000 kHz
SweepPoints	400	~ 400
Sweeptime	56.886 μ s	AUTO
Reference Level	-10.000 dBm	-10.000 dBm
Attenuation	10.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	200	200
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
Sweeptype	FFT	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.30	0.30
Run	55 / max. 150	max. 150
Stable	5 / 5	5

Emission Bandwidth 26 dB (5825 MHz; 20 MHz)

Test according to FCC title 47 part 15 §15.407(a),(e), KDB 789033 D02 General U-NII Test Procedures New Rules v01r02 and ANSI C63.10

26 dB Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)	Max Level (dBm)	Result
5825.000000	23.283582	---	---	5812.860697	5836.144279	6.0	PASS

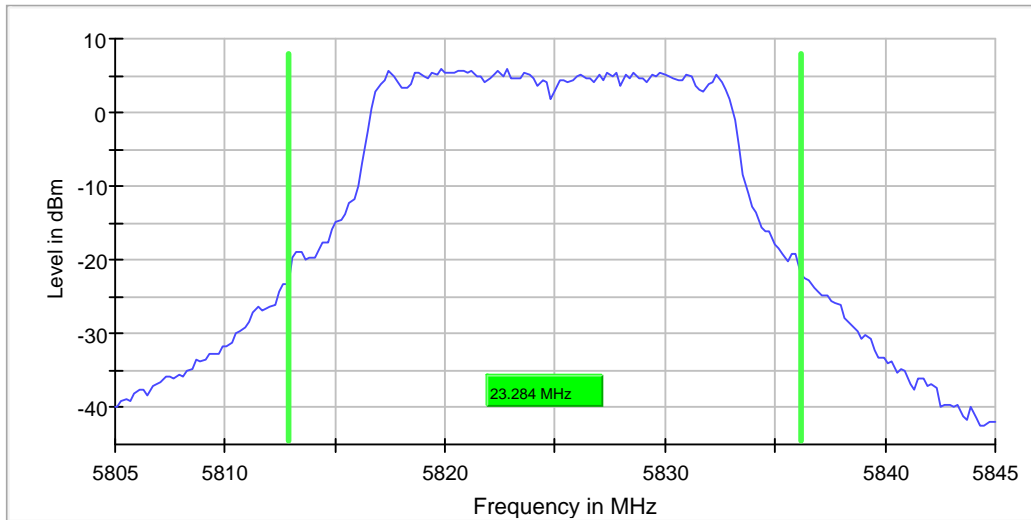

Measurement


Setting	Instrument Value	Target Value
Start Frequency	5.80500 GHz	5.80500 GHz
Stop Frequency	5.84500 GHz	5.84500 GHz
Span	40.000 MHz	40.000 MHz
RBW	200.000 kHz	~ 200.000 kHz
VBW	1.000 MHz	>= 600.000 kHz
SweepPoints	200	~ 200
Sweeptime	28.443 μs	AUTO
Reference Level	-10.000 dBm	-10.000 dBm
Attenuation	10.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	200	200
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
Sweeptype	FFT	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.30	0.30
Run	45 / max. 150	max. 150
Stable	5 / 5	5

Occupied Channel Bandwidth 99% (5825 MHz; 20 MHz)

Test according to FCC title 47 part 15 §15.407(a),(e), KDB 789033 D02 General U-NII Test Procedures New Rules v01r02 and ANSI C63.10

99 % Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)	Result
5825.000000	16.716418	---	---	5816.442786	5833.159204	PASS

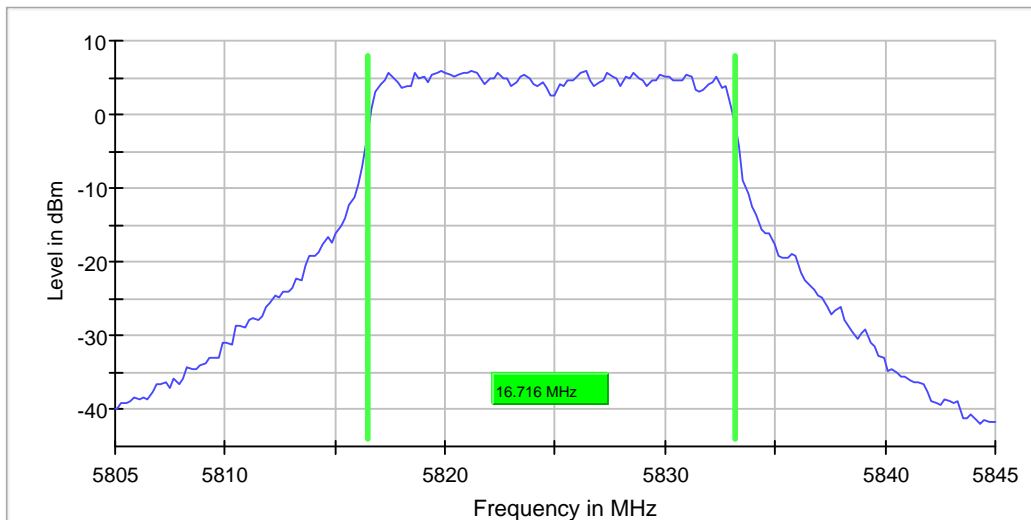

Measurement

Setting	Instrument Value	Target Value
Start Frequency	5.80500 GHz	5.80500 GHz
Stop Frequency	5.84500 GHz	5.84500 GHz
Span	40.000 MHz	40.000 MHz
RBW	200.000 kHz	<= 200.000 kHz
VBW	1.000 MHz	>= 600.000 kHz
SweepPoints	200	~ 200
Sweeptime	28.443 μs	AUTO
Reference Level	-10.000 dBm	-10.000 dBm
Attenuation	10.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	200	200
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
Sweeptype	FFT	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.30	0.30
Run	45 / max. 150	max. 150
Stable	5 / 5	5

Band Edge high (5825 MHz; 20 MHz)

Test according to FCC title 47 part 15 §15.407(b), KDB 789033 D02 General U-NII Test Procedures New Rules v01r02 and ANSI C63.10

Result


DUT Frequency (MHz)	Result
5825.000000	PASS

Inband Peak

Frequency (MHz)	Level (dBm)
5818.874502	4.8

Measurements

Frequency (MHz)	Level (dBm)	Margin (dB)	Limit (dBm)	Result
7301.915957	-64.0	22.7	-41.2	PASS
7293.419104	-64.0	22.8	-41.2	PASS
7300.416512	-64.1	22.8	-41.2	PASS
7298.417253	-64.1	22.8	-41.2	PASS
7299.416883	-64.1	22.9	-41.2	PASS
7304.415031	-64.1	22.9	-41.2	PASS
7296.417993	-64.1	22.9	-41.2	PASS
7302.415772	-64.1	22.9	-41.2	PASS
7296.917808	-64.1	22.9	-41.2	PASS
7297.417623	-64.2	22.9	-41.2	PASS
7300.916327	-64.2	22.9	-41.2	PASS
7298.917068	-64.2	22.9	-41.2	PASS
7317.410218	-64.2	22.9	-41.2	PASS
7302.915587	-64.2	22.9	-41.2	PASS
7311.912255	-64.2	23.0	-41.2	PASS

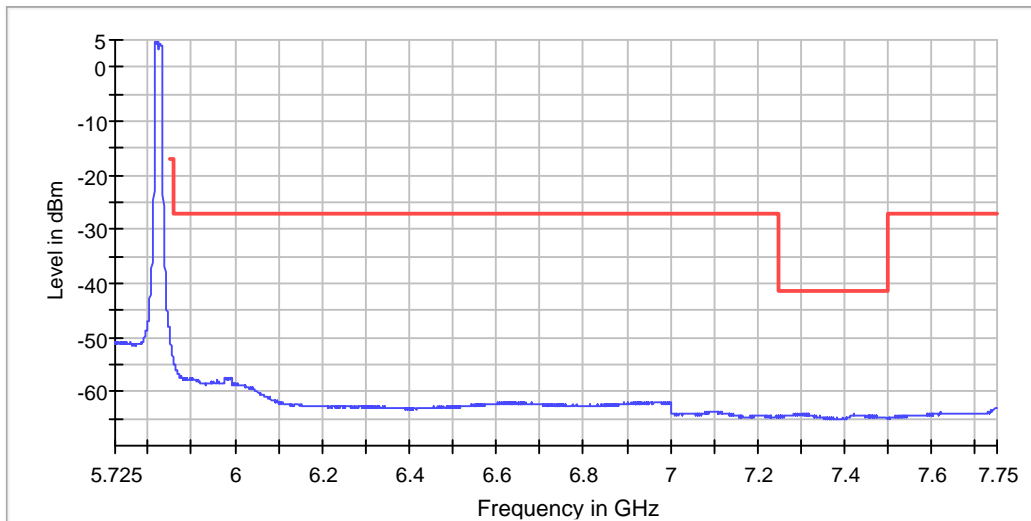

Measurement 1

Setting	Instrument Value	Target Value
RBW	1.000 MHz	<= 1.000 MHz
VBW	3.000 MHz	>= 3.000 MHz
SweepPoints	250	~ 250
SweepTime	250.000 ms	250.000 ms
Reference Level	-10.000 dBm	-10.000 dBm
Attenuation	10.000 dB	AUTO
Detector	RMS	RMS
SweepCount	5	5
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.30	0.30
Run	3 / max. 15	max. 15
Stable	3 / 3	3

Measurement 2

Setting	Instrument Value	Target Value
RBW	1.000 MHz	<= 1.000 MHz
VBW	3.000 MHz	>= 3.000 MHz
SweepPoints	1100	~ 1100
SweepTime	1.100 s	1.100 s
Reference Level	-20.000 dBm	-20.000 dBm
Attenuation	0.000 dB	AUTO
Detector	RMS	RMS
SweepCount	5	5
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.30	0.30
Run	3 / max. 15	max. 15
Stable	3 / 3	3

Tx Spurious Emission (5825 MHz; 20 MHz)

Test according to FCC title 47 part 15 §15.407(b), KDB 789033 D02 General U-NII Test Procedures New Rules v01r02 and ANSI C63.10

Result

DUT Frequency (MHz)	Result
5825.000000	PASS

Final measurements


Frequency (MHz)	Level Pre Measurement (dBm)	level (dBm)	Limit (dBm)	Margin (dB)	Result
1620.350518	-44.4	-53.7	-41.2	12.5	PASS
5392.148760	-46.1	-57.1	-41.2	15.8	PASS

Pre Measurements

Frequency (MHz)	Level (dBm)	Margin (dB)	Limit (dBm)
1620.350518	-44.4	3.2	-41.2
1619.350759	-45.1	3.9	-41.2
1621.350277	-45.3	4.1	-41.2
1622.350036	-45.7	4.5	-41.2
1616.351482	-45.9	4.7	-41.2
5392.148760	-46.1	4.8	-41.2
1618.351000	-46.1	4.9	-41.2
1617.351241	-46.1	4.9	-41.2
5350.000000	-46.6	5.3	-41.2
5353.471074	-46.8	5.5	-41.2
1623.349795	-46.8	5.6	-41.2
5354.462810	-46.8	5.6	-41.2
1615.351722	-47.0	5.7	-41.2
5445.702479	-47.1	5.9	-41.2
1625.349313	-47.1	5.9	-41.2

Measurement Settings

Start Frequency (MHz)	Stop Frequency (MHz)	Pre Measurement	Final Measurement
30.000000	1000.000000	1	1
1000.000000	5150.000000	2	2
5150.000000	5250.000000	2	2
5250.000000	5350.000000	2	2
5350.000000	5470.000000	2	2
5470.000000	5725.000000	2	2
5725.000000	5850.000000	2	2
5850.000000	7000.000000	2	2
7000.000000	26000.000000	2	2
26000.000000	40000.000000	2	2

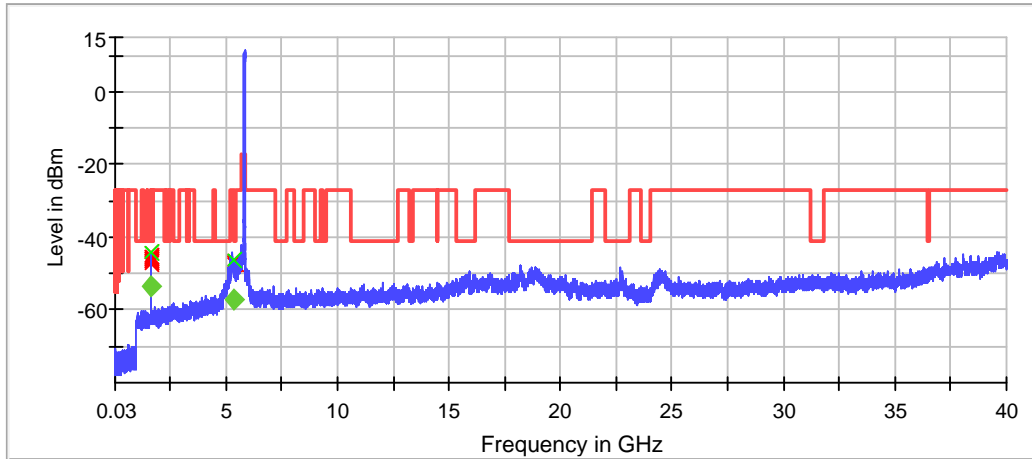

— Limit [limit.Result:1] × Threshold [limit 2.Result:1]
◆ Critical [Over Limit.Result:1] ◆ Sum Level [trace.Result:1]

Final Measurement

Setting	Instrument Value	Target Value
Span	ZeroSpan	ZeroSpan
RBW	1.000 MHz	~ 1.000 MHz
VBW	3.000 MHz	~ 3.000 MHz
SweepPoints	10001	~ 10001
Sweeptime	50.000 ms	50.000 ms
Reference Level	-10.000 dBm	-10.000 dBm
Attenuation	0.000 dB	0.000 dB
Detector	RMS	RMS
SweepCount	1	1
Filter	3 dB	3 dB
Trace Mode	Clear Write	Clear Write
SweepType	Sweep	AUTO
Preamp	off	off

UNII-3 ANT2 AC Mode 20MHz Power Spectral Density (5745 MHz; 22.4876 MHz)


Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v01r02 and ANSI C63.10

Result

DUT Frequency (MHz)	Frequency (MHz)	PSD (dBm)	Limit Max (dBm)	Result
5745.000000	5738.716700	0.470	30.0	PASS

Ports

Port	Duty Cycle (%)
1	95.219

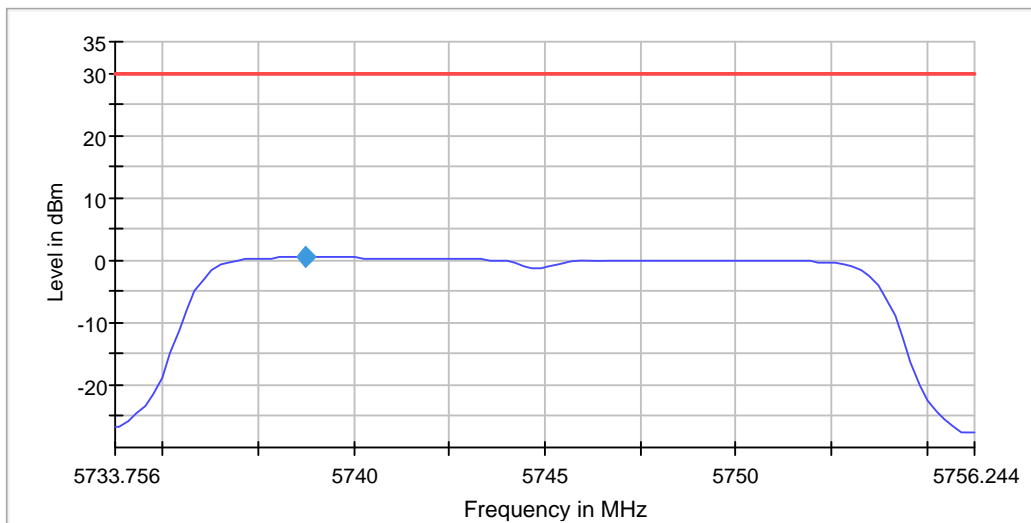

Measurement


Setting	Instrument Value	Target Value
Start Frequency	5.73376 GHz	5.73376 GHz
Stop Frequency	5.75624 GHz	5.75624 GHz
Span	22.488 MHz	22.488 MHz
RBW	1.000 MHz	<= 1.000 MHz
VBW	3.000 MHz	>= 3.000 MHz
SweepPoints	101	~ 45
SweepTime	2.020 s	2.020 s
Reference Level	-20.000 dBm	-20.000 dBm
Attenuation	0.000 dB	AUTO
Detector	RMS	RMS
SweepCount	3	3
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.30	0.30
Run	3 / max. 15	max. 15
Stable	3 / 3	3

Minimum Emission Bandwidth 6 dB (5745 MHz; 20 MHz)

Test according to FCC title 47 part 15 §15.407(a),(e), KDB 789033 D02 General U-NII Test Procedures New Rules v01r02 and ANSI C63.10

6 dB Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)	Max Level (dBm)	Result
5745.000000	17.755611	0.500000	---	5736.022444	5753.778055	2.1	PASS

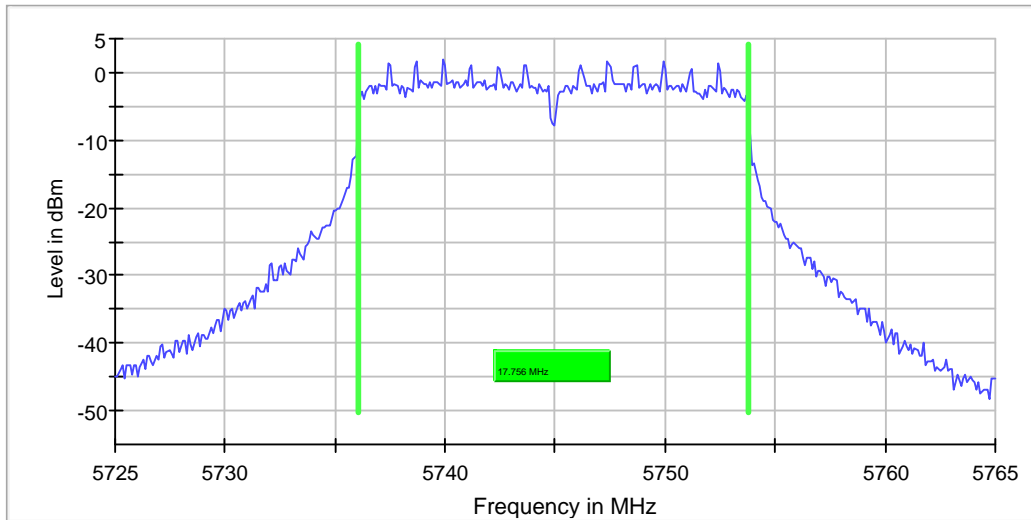

Measurement


Setting	Instrument Value	Target Value
Start Frequency	5.72500 GHz	5.72500 GHz
Stop Frequency	5.76500 GHz	5.76500 GHz
Span	40.000 MHz	40.000 MHz
RBW	100.000 kHz	~ 100.000 kHz
VBW	300.000 kHz	~ 300.000 kHz
SweepPoints	400	~ 400
SweepTime	56.886 μs	AUTO
Reference Level	-20.000 dBm	-20.000 dBm
Attenuation	0.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	200	200
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	FFT	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.30	0.30
Run	44 / max. 150	max. 150
Stable	5 / 5	5

Emission Bandwidth 26 dB (5745 MHz; 20 MHz)

Test according to FCC title 47 part 15 §15.407(a),(e), KDB 789033 D02 General U-NII Test Procedures New Rules v01r02 and ANSI C63.10

26 dB Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)	Max Level (dBm)	Result
5745.000000	22.487563	---	---	5733.656716	5756.144279	3.1	PASS

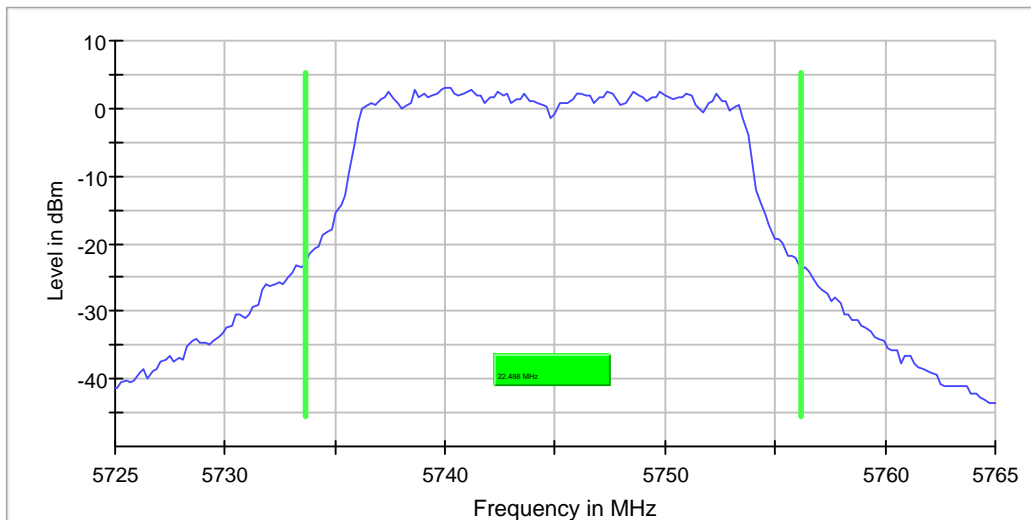

Measurement


Setting	Instrument Value	Target Value
Start Frequency	5.72500 GHz	5.72500 GHz
Stop Frequency	5.76500 GHz	5.76500 GHz
Span	40.000 MHz	40.000 MHz
RBW	200.000 kHz	~ 200.000 kHz
VBW	1.000 MHz	>= 600.000 kHz
SweepPoints	200	~ 200
Sweeptime	28.443 μs	AUTO
Reference Level	-10.000 dBm	-10.000 dBm
Attenuation	10.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	200	200
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
Sweeptype	FFT	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.30	0.30
Run	61 / max. 150	max. 150
Stable	5 / 5	5

Occupied Channel Bandwidth 99% (5745 MHz; 20 MHz)

Test according to FCC title 47 part 15 §15.407(a),(e), KDB 789033 D02 General U-NII Test Procedures New Rules v01r02 and ANSI C63.10

99 % Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)	Result
5745.000000	17.711443	---	---	5736.044776	5753.756219	PASS

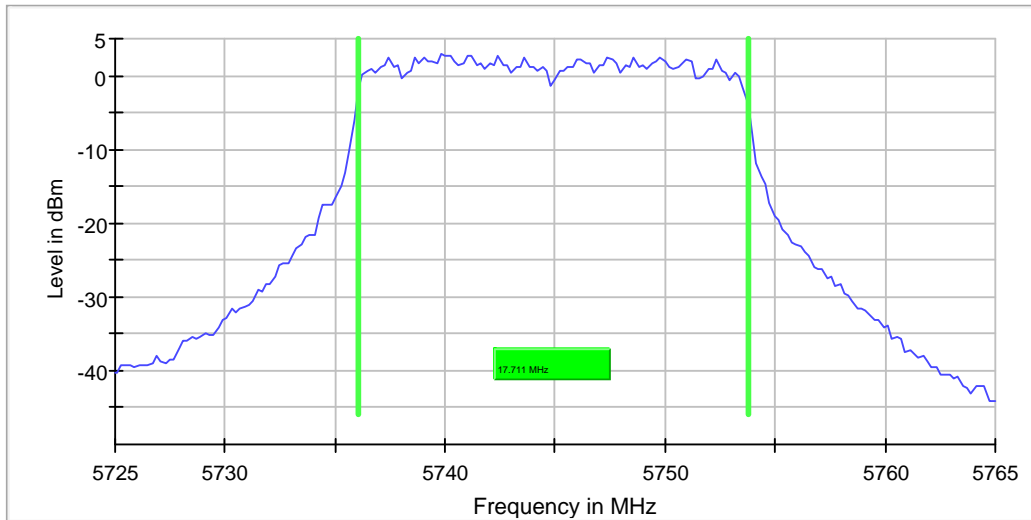

Measurement

Setting	Instrument Value	Target Value
Start Frequency	5.72500 GHz	5.72500 GHz
Stop Frequency	5.76500 GHz	5.76500 GHz
Span	40.000 MHz	40.000 MHz
RBW	200.000 kHz	<= 200.000 kHz
VBW	1.000 MHz	>= 600.000 kHz
SweepPoints	200	~ 200
SweepTime	28.443 μs	AUTO
Reference Level	-10.000 dBm	-10.000 dBm
Attenuation	10.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	200	200
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	FFT	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.30	0.30
Run	49 / max. 150	max. 150
Stable	5 / 5	5

Band Edge low (5745 MHz; 20 MHz)

Test according to FCC title 47 part 15 §15.407(b), KDB 789033 D02 General U-NII Test Procedures New Rules v01r02 and ANSI C63.10

Result


DUT Frequency (MHz)	Result
5745.000000	PASS

Inband Peak

Frequency (MHz)	Level (dBm)
5738.695219	1.3

Measurements

Frequency (MHz)	Level (dBm)	Margin (dB)	Limit (dBm)	Result
5355.742344	-58.5	17.2	-41.2	PASS
5350.749001	-58.5	17.3	-41.2	PASS
5351.248336	-58.5	17.3	-41.2	PASS
5352.247004	-58.5	17.3	-41.2	PASS
5357.240346	-58.5	17.3	-41.2	PASS
5356.241678	-58.5	17.3	-41.2	PASS
5353.745007	-58.5	17.3	-41.2	PASS
5354.244341	-58.5	17.3	-41.2	PASS
5351.747670	-58.5	17.3	-41.2	PASS
5354.743675	-58.6	17.4	-41.2	PASS
5362.733023	-58.6	17.4	-41.2	PASS
5353.245672	-58.6	17.4	-41.2	PASS
5350.249667	-58.6	17.4	-41.2	PASS
5350.000000	-58.6	17.4	-41.2	PASS
5357.739680	-58.6	17.4	-41.2	PASS

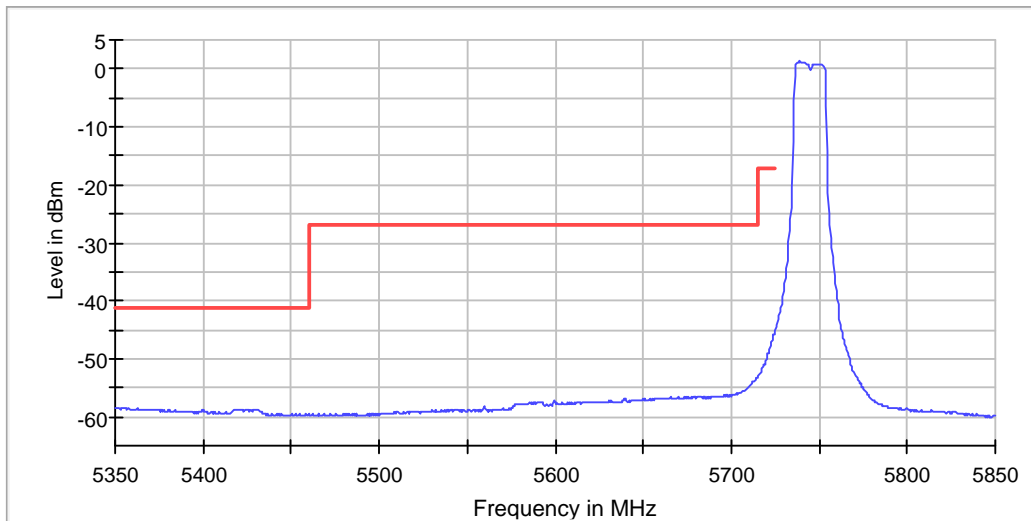

Measurement 1

Setting	Instrument Value	Target Value
RBW	1.000 MHz	<= 1.000 MHz
VBW	3.000 MHz	>= 3.000 MHz
SweepPoints	250	~ 250
SweepTime	250.000 ms	250.000 ms
Reference Level	-20.000 dBm	-20.000 dBm
Attenuation	0.000 dB	AUTO
Detector	RMS	RMS
SweepCount	5	5
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.30	0.30
Run	3 / max. 15	max. 15
Stable	3 / 3	3

Measurement 2

Setting	Instrument Value	Target Value
RBW	1.000 MHz	<= 1.000 MHz
VBW	3.000 MHz	>= 3.000 MHz
SweepPoints	750	~ 750
SweepTime	750.000 ms	750.000 ms
Reference Level	-20.000 dBm	-20.000 dBm
Attenuation	0.000 dB	AUTO
Detector	RMS	RMS
SweepCount	5	5
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.30	0.30
Run	3 / max. 15	max. 15
Stable	3 / 3	3

Tx Spurious Emission (5745 MHz; 20 MHz)

Test according to FCC title 47 part 15 §15.407(b), KDB 789033 D02 General U-NII Test Procedures New Rules v01r02 and ANSI C63.10

Result

DUT Frequency (MHz)	Result
5745.000000	PASS

Final measurements


Frequency (MHz)	Level Pre Measurement (dBm)	level (dBm)	Limit (dBm)	Margin (dB)	Result
18913.872954	-45.9	-59.1	-41.2	17.9	PASS

Pre Measurements

Frequency (MHz)	Level (dBm)	Margin (dB)	Limit (dBm)
18913.872954	-45.9	4.7	-41.2
19012.867744	-47.5	6.2	-41.2
18882.874586	-47.7	6.5	-41.2
18231.908847	-47.9	6.6	-41.2
19023.867165	-48.1	6.8	-41.2
18866.875428	-48.3	7.1	-41.2
19038.866375	-48.3	7.1	-41.2
18890.874165	-48.5	7.3	-41.2
18853.876112	-48.5	7.3	-41.2
18679.885269	-48.5	7.3	-41.2
18933.871901	-48.5	7.3	-41.2
19015.867586	-48.5	7.3	-41.2
18221.909373	-48.6	7.4	-41.2
18856.875954	-48.6	7.4	-41.2
18668.885848	-48.6	7.4	-41.2

Measurement Settings

Start Frequency (MHz)	Stop Frequency (MHz)	Pre Measurement	Final Measurement
30.000000	1000.000000	1	1
1000.000000	5150.000000	2	2
5150.000000	5250.000000	2	2
5250.000000	5350.000000	2	2
5350.000000	5470.000000	2	2
5470.000000	5725.000000	2	2
5725.000000	5850.000000	2	2
5850.000000	7000.000000	2	2
7000.000000	26000.000000	2	2
26000.000000	40000.000000	2	2

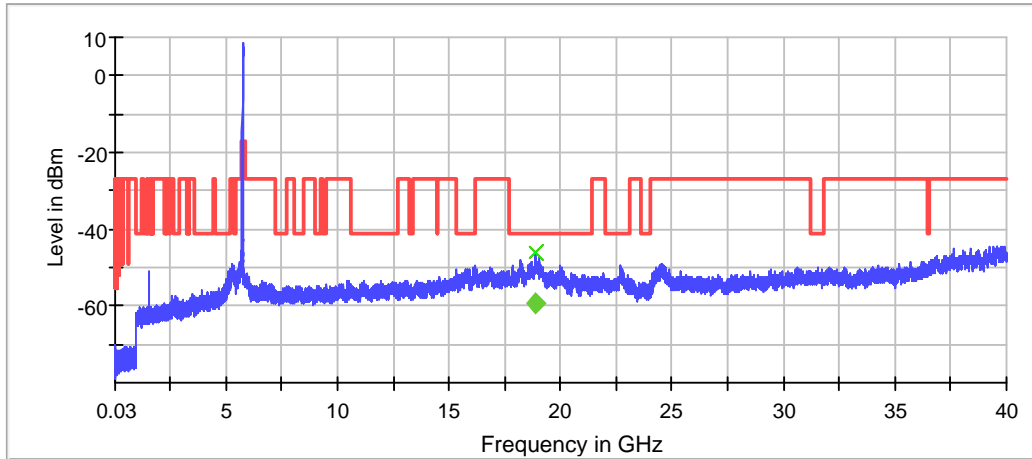

— Limit [limit.Result:1] x Threshold [limit 2.Result:1]
◆ Critical [Over Limit.Result:1] ◆ Sum Level [trace.Result:1]

Final Measurement

Setting	Instrument Value	Target Value
Span	ZeroSpan	ZeroSpan
RBW	1.000 MHz	~ 1.000 MHz
VBW	3.000 MHz	~ 3.000 MHz
SweepPoints	10001	~ 10001
Sweeptime	50.000 ms	50.000 ms
Reference Level	-20.000 dBm	-20.000 dBm
Attenuation	0.000 dB	0.000 dB
Detector	RMS	RMS
SweepCount	1	1
Filter	3 dB	3 dB
Trace Mode	Clear Write	Clear Write
SweepType	Sweep	AUTO
Preamp	off	off

Power Spectral Density (5785 MHz; 22.8856 MHz)


Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v01r02 and ANSI C63.10

Result

DUT Frequency (MHz)	Frequency (MHz)	PSD (dBm)	Limit Max (dBm)	Result
5785.000000	5779.278600	0.315	30.0	PASS

Ports

Port	Duty Cycle (%)
1	95.213

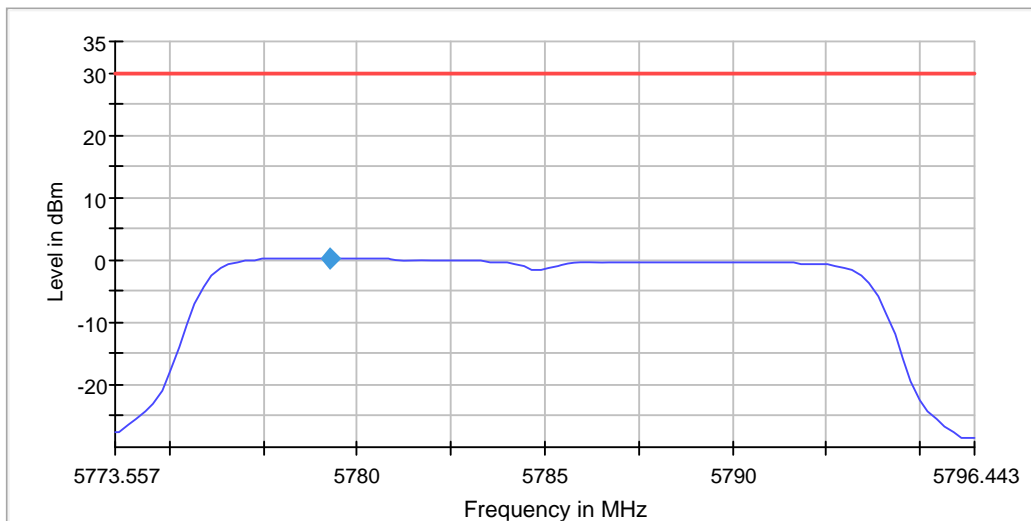

Measurement


Setting	Instrument Value	Target Value
Start Frequency	5.77356 GHz	5.77356 GHz
Stop Frequency	5.79644 GHz	5.79644 GHz
Span	22.886 MHz	22.886 MHz
RBW	1.000 MHz	<= 1.000 MHz
VBW	3.000 MHz	>= 3.000 MHz
SweepPoints	101	~ 46
SweepTime	2.020 s	2.020 s
Reference Level	-20.000 dBm	-20.000 dBm
Attenuation	0.000 dB	AUTO
Detector	RMS	RMS
SweepCount	3	3
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.30	0.30
Run	3 / max. 15	max. 15
Stable	3 / 3	3

Minimum Emission Bandwidth 6 dB (5785 MHz; 20 MHz)

Test according to FCC title 47 part 15 §15.407(a),(e), KDB 789033 D02 General U-NII Test Procedures New Rules v01r02 and ANSI C63.10

6 dB Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)	Max Level (dBm)	Result
5785.000000	17.755611	0.500000	---	5776.022444	5793.778055	1.9	PASS

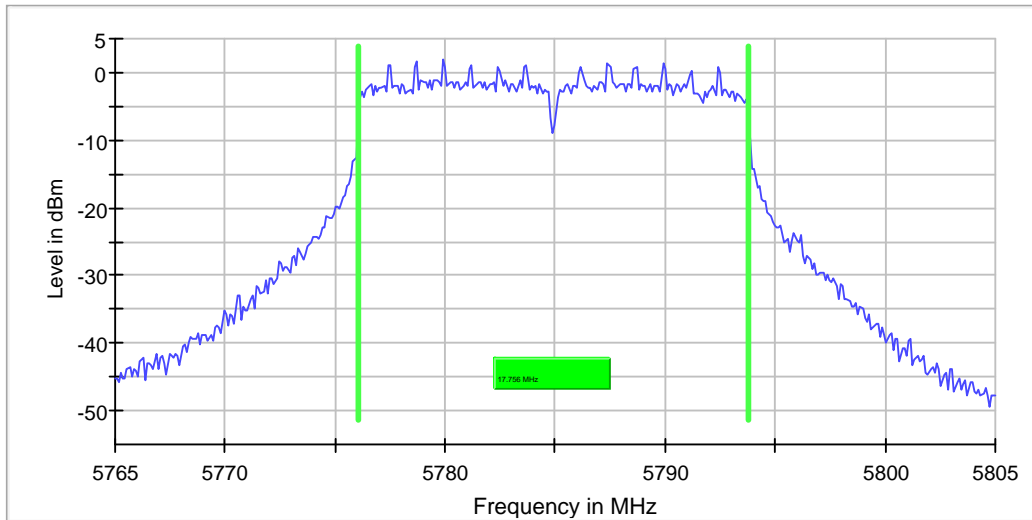

Measurement


Setting	Instrument Value	Target Value
Start Frequency	5.76500 GHz	5.76500 GHz
Stop Frequency	5.80500 GHz	5.80500 GHz
Span	40.000 MHz	40.000 MHz
RBW	100.000 kHz	~ 100.000 kHz
VBW	300.000 kHz	~ 300.000 kHz
SweepPoints	400	~ 400
SweepTime	56.886 μs	AUTO
Reference Level	-20.000 dBm	-20.000 dBm
Attenuation	0.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	200	200
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	FFT	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.30	0.30
Run	63 / max. 150	max. 150
Stable	5 / 5	5

Emission Bandwidth 26 dB (5785 MHz; 20 MHz)

Test according to FCC title 47 part 15 §15.407(a),(e), KDB 789033 D02 General U-NII Test Procedures New Rules v01r02 and ANSI C63.10

26 dB Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)	Max Level (dBm)	Result
5785.000000	22.885573	---	---	5773.457711	5796.343284	2.8	PASS

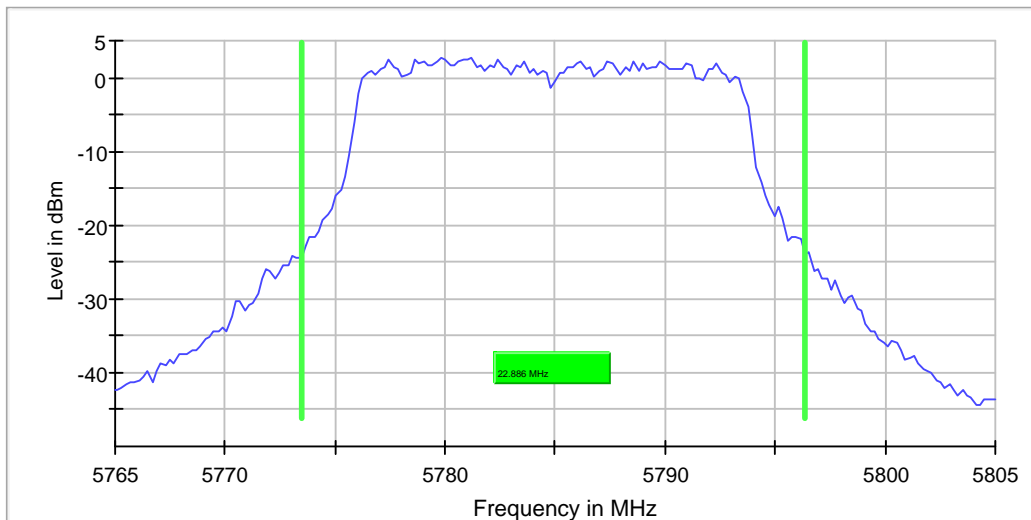

Measurement


Setting	Instrument Value	Target Value
Start Frequency	5.76500 GHz	5.76500 GHz
Stop Frequency	5.80500 GHz	5.80500 GHz
Span	40.000 MHz	40.000 MHz
RBW	200.000 kHz	~ 200.000 kHz
VBW	1.000 MHz	>= 600.000 kHz
SweepPoints	200	~ 200
Sweeptime	28.443 μs	AUTO
Reference Level	-10.000 dBm	-10.000 dBm
Attenuation	10.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	200	200
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
Sweeptype	FFT	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.30	0.30
Run	55 / max. 150	max. 150
Stable	5 / 5	5

Occupied Channel Bandwidth 99% (5785 MHz; 20 MHz)

Test according to FCC title 47 part 15 §15.407(a),(e), KDB 789033 D02 General U-NII Test Procedures New Rules v01r02 and ANSI C63.10

99 % Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)	Result
5785.000000	17.910448	---	---	5775.845771	5793.756219	PASS

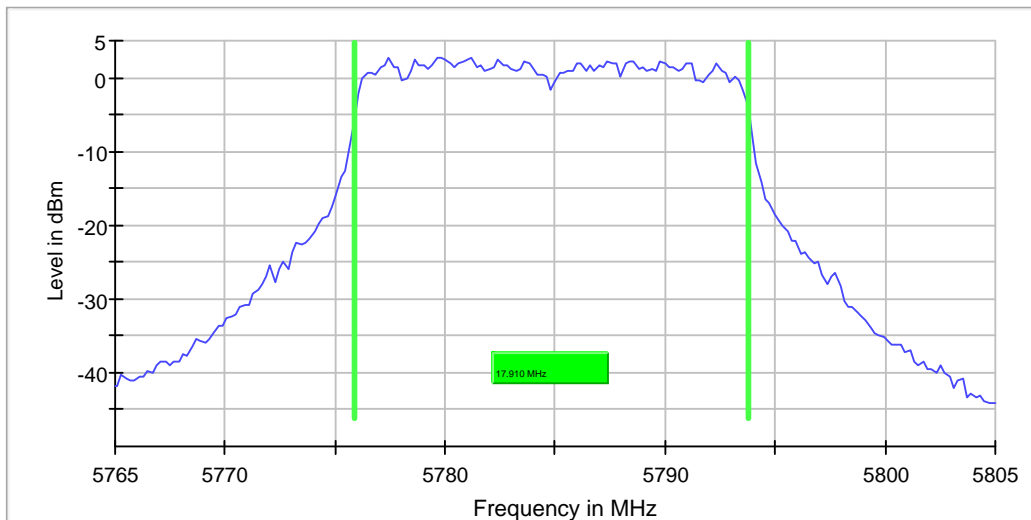

Measurement

Setting	Instrument Value	Target Value
Start Frequency	5.76500 GHz	5.76500 GHz
Stop Frequency	5.80500 GHz	5.80500 GHz
Span	40.000 MHz	40.000 MHz
RBW	200.000 kHz	<= 200.000 kHz
VBW	1.000 MHz	>= 600.000 kHz
SweepPoints	200	~ 200
Sweeptime	28.443 μs	AUTO
Reference Level	-10.000 dBm	-10.000 dBm
Attenuation	10.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	200	200
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
Sweeptype	FFT	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.30	0.30
Run	62 / max. 150	max. 150
Stable	5 / 5	5

Tx Spurious Emission (5785 MHz; 20 MHz)

Test according to FCC title 47 part 15 §15.407(b), KDB 789033 D02 General U-NII Test Procedures New Rules v01r02 and ANSI C63.10

Result

DUT Frequency (MHz)	Result
5785.000000	PASS

Final measurements


Frequency (MHz)	Level Pre Measurement (dBm)	level (dBm)	Limit (dBm)	Margin (dB)	Result
5355.454545	-46.3	-58.7	-41.2	17.4	PASS

Pre Measurements

Frequency (MHz)	Level (dBm)	Margin (dB)	Limit (dBm)
5355.454545	-46.3	5.1	-41.2
5354.462810	-46.5	5.3	-41.2
18869.875270	-47.4	6.2	-41.2
5352.479339	-47.5	6.3	-41.2
5351.487603	-47.7	6.5	-41.2
5444.710744	-48.0	6.8	-41.2
5459.586777	-48.0	6.8	-41.2
5361.404959	-48.1	6.8	-41.2
5443.719008	-48.1	6.9	-41.2
5458.595041	-48.1	6.9	-41.2
5364.380165	-48.2	7.0	-41.2
5365.371901	-48.3	7.1	-41.2
18868.875322	-48.3	7.1	-41.2
18186.911215	-48.4	7.1	-41.2
18882.874586	-48.4	7.2	-41.2

Measurement Settings

Start Frequency (MHz)	Stop Frequency (MHz)	Pre Measurement	Final Measurement
30.000000	1000.000000	1	1
1000.000000	5150.000000	2	2
5150.000000	5250.000000	2	2
5250.000000	5350.000000	2	2
5350.000000	5470.000000	2	2
5470.000000	5725.000000	2	2
5725.000000	5850.000000	2	2
5850.000000	7000.000000	2	2
7000.000000	26000.000000	2	2
26000.000000	40000.000000	2	2

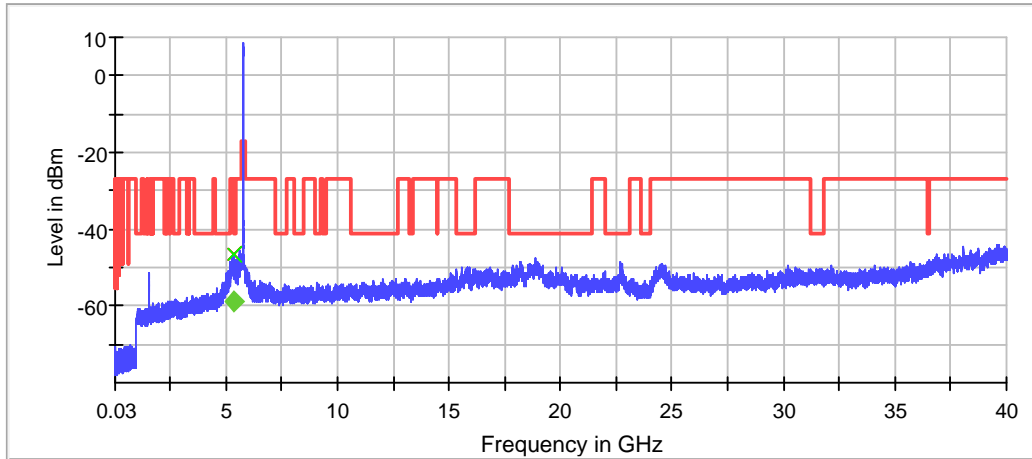

Final Measurement

Setting	Instrument Value	Target Value
Span	ZeroSpan	ZeroSpan
RBW	1.000 MHz	~ 1.000 MHz
VBW	3.000 MHz	~ 3.000 MHz
SweepPoints	10001	~ 10001
Sweeptime	50.000 ms	50.000 ms
Reference Level	-20.000 dBm	-20.000 dBm
Attenuation	0.000 dB	0.000 dB
Detector	RMS	RMS
SweepCount	1	1
Filter	3 dB	3 dB
Trace Mode	Clear Write	Clear Write
SweepType	Sweep	AUTO
Preamp	off	off

Power Spectral Density (5825 MHz; 23.2836 MHz)


Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v01r02 and ANSI C63.10

Result

DUT Frequency (MHz)	Frequency (MHz)	PSD (dBm)	Limit Max (dBm)	Result
5825.000000	5818.494288	0.429	30.0	PASS

Ports

Port	Duty Cycle (%)
1	95.215

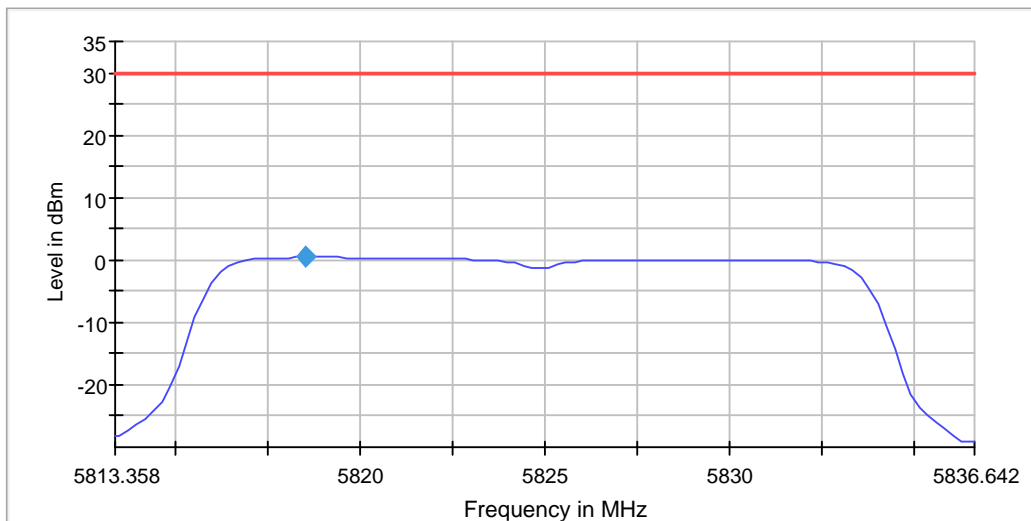

Measurement


Setting	Instrument Value	Target Value
Start Frequency	5.81336 GHz	5.81336 GHz
Stop Frequency	5.83664 GHz	5.83664 GHz
Span	23.284 MHz	23.284 MHz
RBW	1.000 MHz	<= 1.000 MHz
VBW	3.000 MHz	>= 3.000 MHz
SweepPoints	101	~ 47
SweepTime	2.020 s	2.020 s
Reference Level	-20.000 dBm	-20.000 dBm
Attenuation	0.000 dB	AUTO
Detector	RMS	RMS
SweepCount	3	3
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.30	0.30
Run	3 / max. 15	max. 15
Stable	3 / 3	3

Minimum Emission Bandwidth 6 dB (5825 MHz; 20 MHz)

Test according to FCC title 47 part 15 §15.407(a),(e), KDB 789033 D02 General U-NII Test Procedures New Rules v01r02 and ANSI C63.10

6 dB Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)	Max Level (dBm)	Result
5825.000000	17.755611	0.500000	---	5816.022444	5833.778055	1.4	PASS

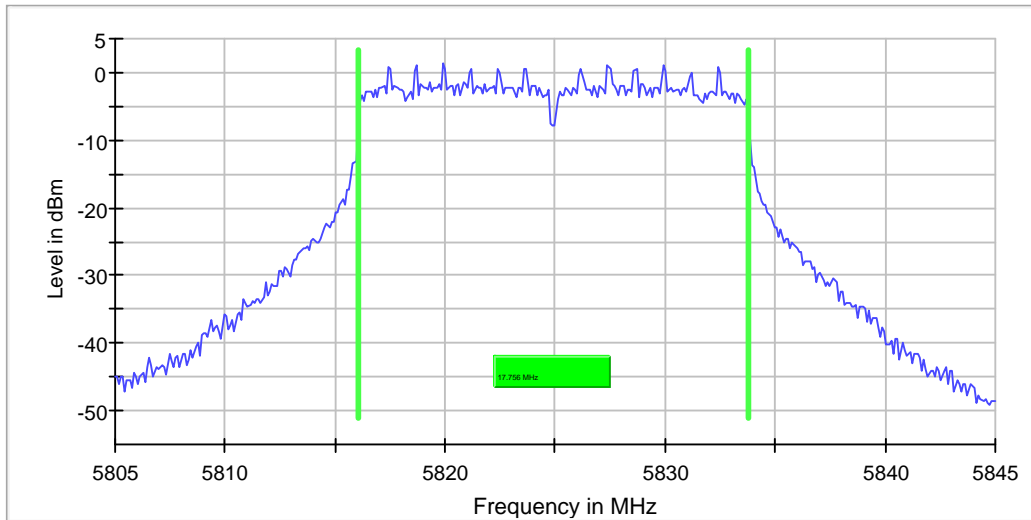

Measurement


Setting	Instrument Value	Target Value
Start Frequency	5.80500 GHz	5.80500 GHz
Stop Frequency	5.84500 GHz	5.84500 GHz
Span	40.000 MHz	40.000 MHz
RBW	100.000 kHz	~ 100.000 kHz
VBW	300.000 kHz	~ 300.000 kHz
SweepPoints	400	~ 400
Sweeptime	56.886 μ s	AUTO
Reference Level	-20.000 dBm	-20.000 dBm
Attenuation	0.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	200	200
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
Sweeptype	FFT	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.30	0.30
Run	46 / max. 150	max. 150
Stable	5 / 5	5

Emission Bandwidth 26 dB (5825 MHz; 20 MHz)

Test according to FCC title 47 part 15 §15.407(a),(e), KDB 789033 D02 General U-NII Test Procedures New Rules v01r02 and ANSI C63.10

26 dB Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)	Max Level (dBm)	Result
5825.000000	23.283583	---	---	5813.059701	5836.343284	2.3	PASS

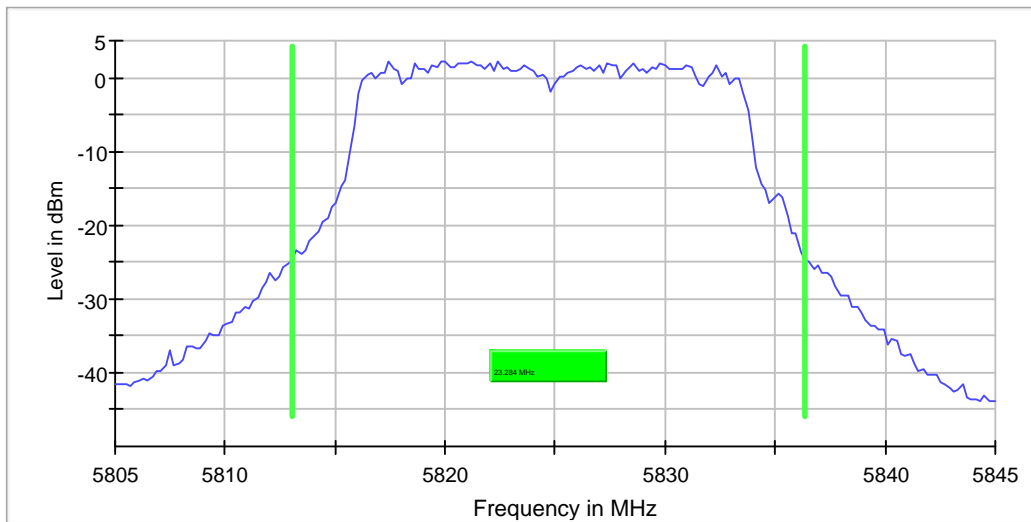

Measurement


Setting	Instrument Value	Target Value
Start Frequency	5.80500 GHz	5.80500 GHz
Stop Frequency	5.84500 GHz	5.84500 GHz
Span	40.000 MHz	40.000 MHz
RBW	200.000 kHz	~ 200.000 kHz
VBW	1.000 MHz	>= 600.000 kHz
SweepPoints	200	~ 200
SweepTime	28.443 μs	AUTO
Reference Level	-10.000 dBm	-10.000 dBm
Attenuation	10.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	200	200
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	FFT	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.30	0.30
Run	77 / max. 150	max. 150
Stable	5 / 5	5

Occupied Channel Bandwidth 99% (5825 MHz; 20 MHz)

Test according to FCC title 47 part 15 §15.407(a),(e), KDB 789033 D02 General U-NII Test Procedures New Rules v01r02 and ANSI C63.10

99 % Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)	Result
5825.000000	17.711443	---	---	5816.044776	5833.756219	PASS

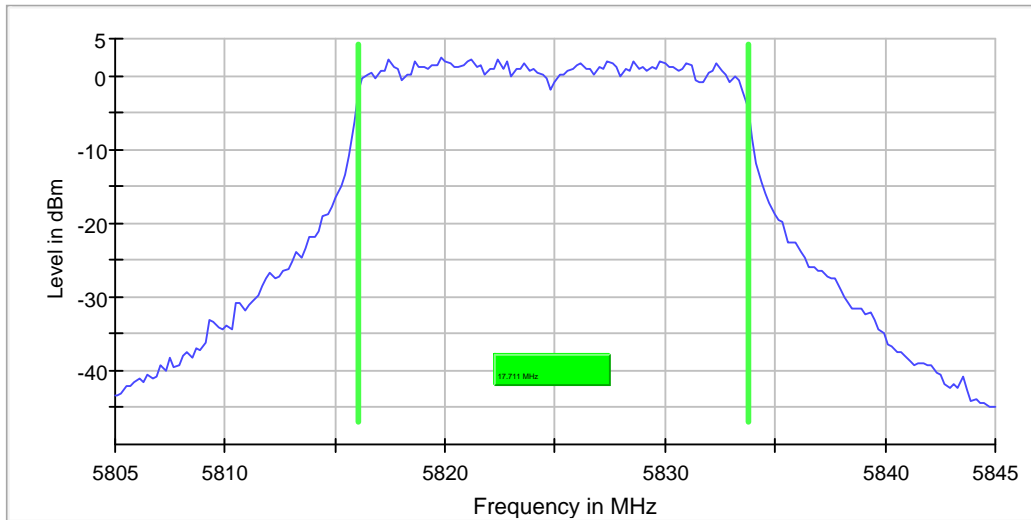

Measurement

Setting	Instrument Value	Target Value
Start Frequency	5.80500 GHz	5.80500 GHz
Stop Frequency	5.84500 GHz	5.84500 GHz
Span	40.000 MHz	40.000 MHz
RBW	200.000 kHz	<= 200.000 kHz
VBW	1.000 MHz	>= 600.000 kHz
SweepPoints	200	~ 200
SweepTime	28.443 μs	AUTO
Reference Level	-10.000 dBm	-10.000 dBm
Attenuation	10.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	200	200
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	FFT	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.30	0.30
Run	44 / max. 150	max. 150
Stable	5 / 5	5

Band Edge high (5825 MHz; 20 MHz)

Test according to FCC title 47 part 15 §15.407(b), KDB 789033 D02 General U-NII Test Procedures New Rules v01r02 and ANSI C63.10

Result


DUT Frequency (MHz)	Result
5825.000000	PASS

Inband Peak

Frequency (MHz)	Level (dBm)
5818.874502	0.8

Measurements

Frequency (MHz)	Level (dBm)	Margin (dB)	Limit (dBm)	Result
7296.917808	-64.0	22.8	-41.2	PASS
7295.918178	-64.1	22.8	-41.2	PASS
7303.915217	-64.1	22.9	-41.2	PASS
7297.417623	-64.1	22.9	-41.2	PASS
7300.916327	-64.1	22.9	-41.2	PASS
7298.917068	-64.1	22.9	-41.2	PASS
7295.418364	-64.2	22.9	-41.2	PASS
7299.916698	-64.2	22.9	-41.2	PASS
7419.372455	-64.2	22.9	-41.2	PASS
7292.919289	-64.2	22.9	-41.2	PASS
7297.917438	-64.2	22.9	-41.2	PASS
7313.411699	-64.2	23.0	-41.2	PASS
7301.915957	-64.2	23.0	-41.2	PASS
7308.413551	-64.2	23.0	-41.2	PASS
7294.918549	-64.2	23.0	-41.2	PASS

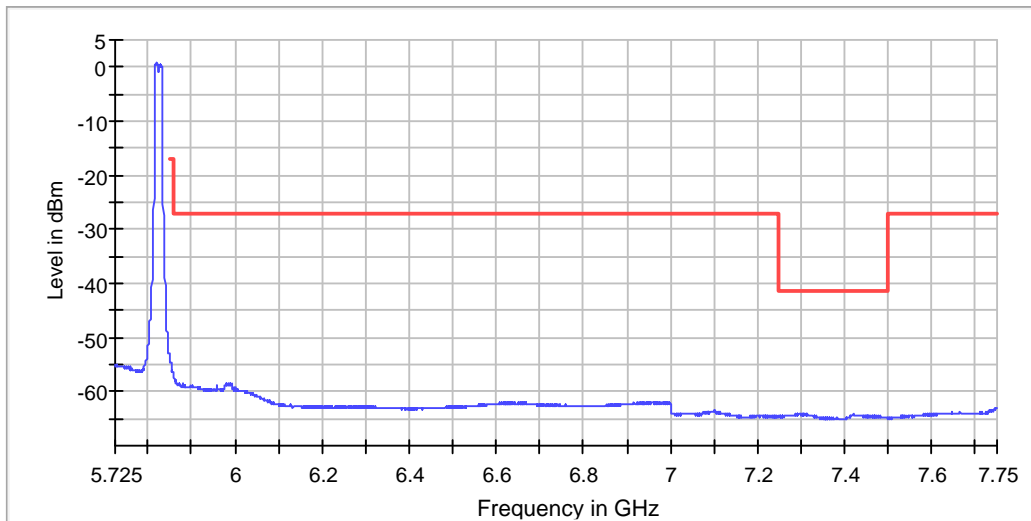

Measurement 1

Setting	Instrument Value	Target Value
RBW	1.000 MHz	<= 1.000 MHz
VBW	3.000 MHz	>= 3.000 MHz
SweepPoints	250	~ 250
SweepTime	250.000 ms	250.000 ms
Reference Level	-20.000 dBm	-20.000 dBm
Attenuation	0.000 dB	AUTO
Detector	RMS	RMS
SweepCount	5	5
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.30	0.30
Run	3 / max. 15	max. 15
Stable	3 / 3	3

Measurement 2

Setting	Instrument Value	Target Value
RBW	1.000 MHz	<= 1.000 MHz
VBW	3.000 MHz	>= 3.000 MHz
SweepPoints	1100	~ 1100
SweepTime	1.100 s	1.100 s
Reference Level	-20.000 dBm	-20.000 dBm
Attenuation	0.000 dB	AUTO
Detector	RMS	RMS
SweepCount	5	5
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.30	0.30
Run	3 / max. 15	max. 15
Stable	3 / 3	3

Tx Spurious Emission (5825 MHz; 20 MHz)

Test according to FCC title 47 part 15 §15.407(b), KDB 789033 D02 General U-NII Test Procedures New Rules v01r02 and ANSI C63.10

Result

DUT Frequency (MHz)	Result
5825.000000	PASS

Final measurements


Frequency (MHz)	Level Pre Measurement (dBm)	level (dBm)	Limit (dBm)	Margin (dB)	Result
---	---	---	---	---	---

Pre Measurements

Frequency (MHz)	Level (dBm)	Margin (dB)	Limit (dBm)
18873.875059	-48.1	6.9	-41.2
18229.908952	-48.3	7.0	-41.2
18914.872901	-48.3	7.0	-41.2
18916.872796	-48.4	7.1	-41.2
18884.874480	-48.4	7.2	-41.2
18951.870954	-48.5	7.2	-41.2
18197.910636	-48.5	7.3	-41.2
5360.413223	-48.6	7.3	-41.2
5410.991736	-48.6	7.4	-41.2
18217.909584	-48.6	7.4	-41.2
5386.198347	-48.7	7.4	-41.2
18262.907215	-48.7	7.4	-41.2
18878.874796	-48.7	7.5	-41.2
5411.983471	-48.7	7.5	-41.2
18850.876270	-48.7	7.5	-41.2

Measurement Settings

Start Frequency (MHz)	Stop Frequency (MHz)	Pre Measurement	Final Measurement
30.000000	1000.000000	1	1
1000.000000	5150.000000	2	2
5150.000000	5250.000000	2	2
5250.000000	5350.000000	2	2
5350.000000	5470.000000	2	2
5470.000000	5725.000000	2	2
5725.000000	5850.000000	2	2
5850.000000	7000.000000	2	2
7000.000000	26000.000000	2	2
26000.000000	40000.000000	2	2

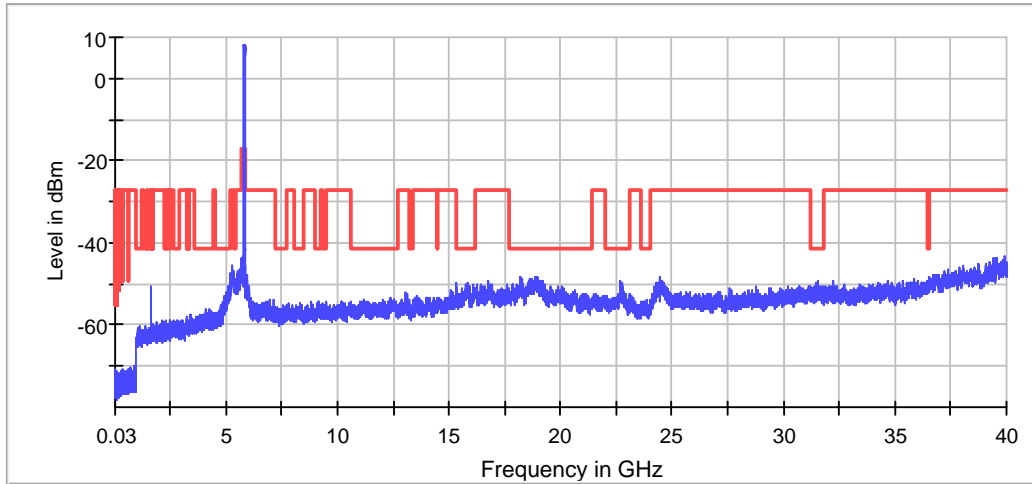

— Limit [limit.Result:1] × Threshold [limit 2.Result:1]

Final Measurement

Setting	Instrument Value	Target Value
Span	ZeroSpan	ZeroSpan
RBW	1.000 MHz	~ 1.000 MHz
VBW	3.000 MHz	~ 3.000 MHz
SweepPoints	10001	~ 10001
SweepTime	50.000 ms	50.000 ms
Reference Level	-20.000 dBm	-20.000 dBm
Attenuation	0.000 dB	0.000 dB
Detector	RMS	RMS
SweepCount	1	1
Filter	3 dB	3 dB
Trace Mode	Clear Write	Clear Write
SweepType	Sweep	AUTO
Preamp	off	off

UNII-3 ANT2 AC Mode 40MHz Power Spectral Density (5755 MHz; 44.7761 MHz)


Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v01r02 and ANSI C63.10

Result

DUT Frequency (MHz)	Frequency (MHz)	PSD (dBm)	Limit Max (dBm)	Result
5755.000000	5743.366994	-2.656	30.0	PASS

Ports

Port	Duty Cycle (%)
1	93.282

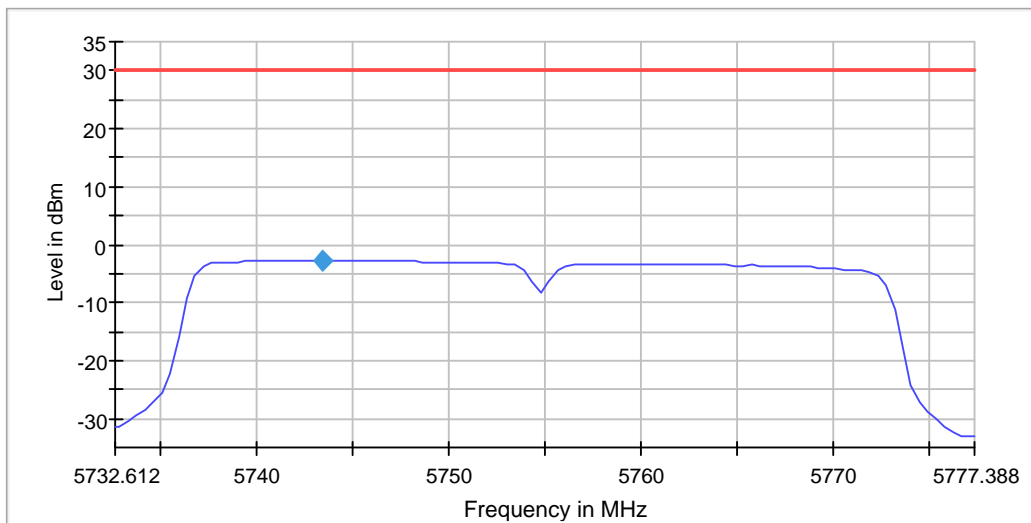

Measurement


Setting	Instrument Value	Target Value
Start Frequency	5.73261 GHz	5.73261 GHz
Stop Frequency	5.77739 GHz	5.77739 GHz
Span	44.776 MHz	44.776 MHz
RBW	1.000 MHz	<= 1.000 MHz
VBW	3.000 MHz	>= 3.000 MHz
SweepPoints	101	~ 90
SweepTime	2.020 s	2.020 s
Reference Level	-20.000 dBm	-20.000 dBm
Attenuation	0.000 dB	AUTO
Detector	RMS	RMS
SweepCount	3	3
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.30	0.30
Run	3 / max. 15	max. 15
Stable	3 / 3	3

Minimum Emission Bandwidth 6 dB (5755 MHz; 40 MHz)

Test according to FCC title 47 part 15 §15.407(a),(e), KDB 789033 D02 General U-NII Test Procedures New Rules v01r02 and ANSI C63.10

6 dB Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)	Max Level (dBm)	Result
5755.000000	36.354557	0.500000	---	5736.722846	5773.077403	-3.0	PASS

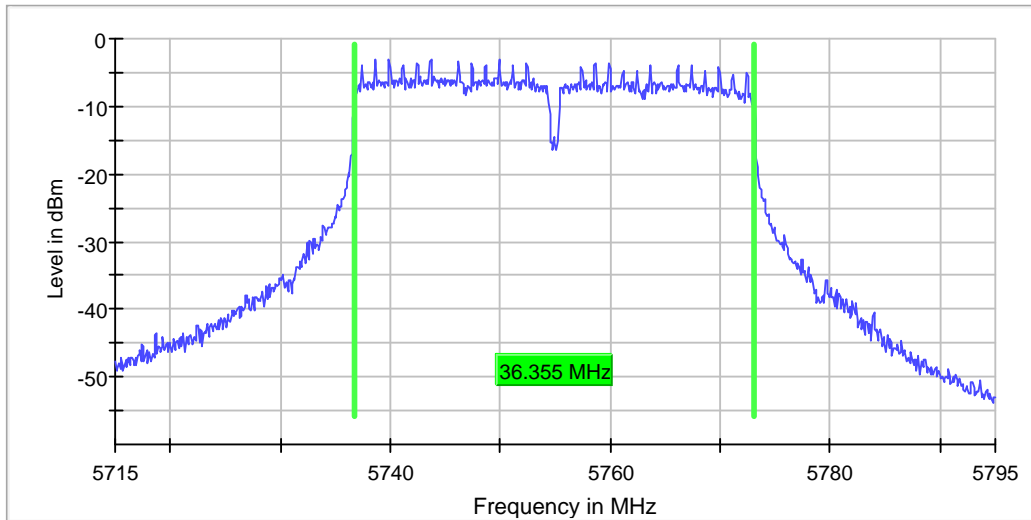

Measurement


Setting	Instrument Value	Target Value
Start Frequency	5.71500 GHz	5.71500 GHz
Stop Frequency	5.79500 GHz	5.79500 GHz
Span	80.000 MHz	80.000 MHz
RBW	100.000 kHz	~ 100.000 kHz
VBW	300.000 kHz	~ 300.000 kHz
SweepPoints	800	~ 800
Sweeptime	94.810 μs	AUTO
Reference Level	-20.000 dBm	-20.000 dBm
Attenuation	0.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	200	200
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
Sweeptype	FFT	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.30	0.30
Run	104 / max. 150	max. 150
Stable	5 / 5	5

Emission Bandwidth 26 dB (5755 MHz; 40 MHz)

Test according to FCC title 47 part 15 §15.407(a),(e), KDB 789033 D02 General U-NII Test Procedures New Rules v01r02 and ANSI C63.10

26 dB Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)	Max Level (dBm)	Result
5755.000000	44.776119	---	---	5731.865672	5776.641791	-0.5	PASS

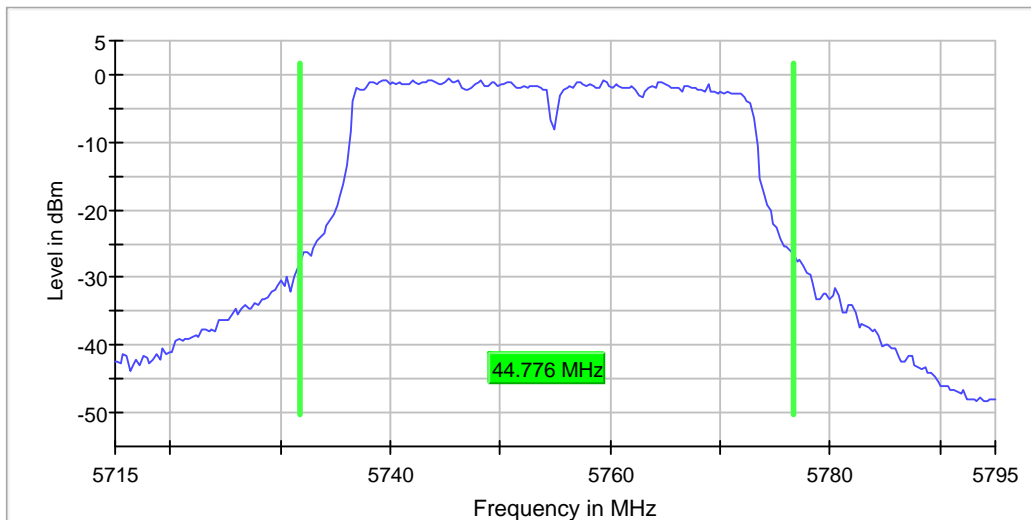

Measurement


Setting	Instrument Value	Target Value
Start Frequency	5.71500 GHz	5.71500 GHz
Stop Frequency	5.79500 GHz	5.79500 GHz
Span	80.000 MHz	80.000 MHz
RBW	300.000 kHz	~ 400.000 kHz
VBW	1.000 MHz	>= 900.000 kHz
SweepPoints	267	~ 267
Sweeptime	31.603 μs	AUTO
Reference Level	-20.000 dBm	-20.000 dBm
Attenuation	0.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	200	200
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
Sweeptype	FFT	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.30	0.30
Run	48 / max. 150	max. 150
Stable	5 / 5	5

Occupied Channel Bandwidth 99% (5755 MHz; 40 MHz)

Test according to FCC title 47 part 15 §15.407(a),(e), KDB 789033 D02 General U-NII Test Procedures New Rules v01r02 and ANSI C63.10

99 % Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)	Result
5755.000000	36.417910	---	---	5736.641791	5773.059701	PASS

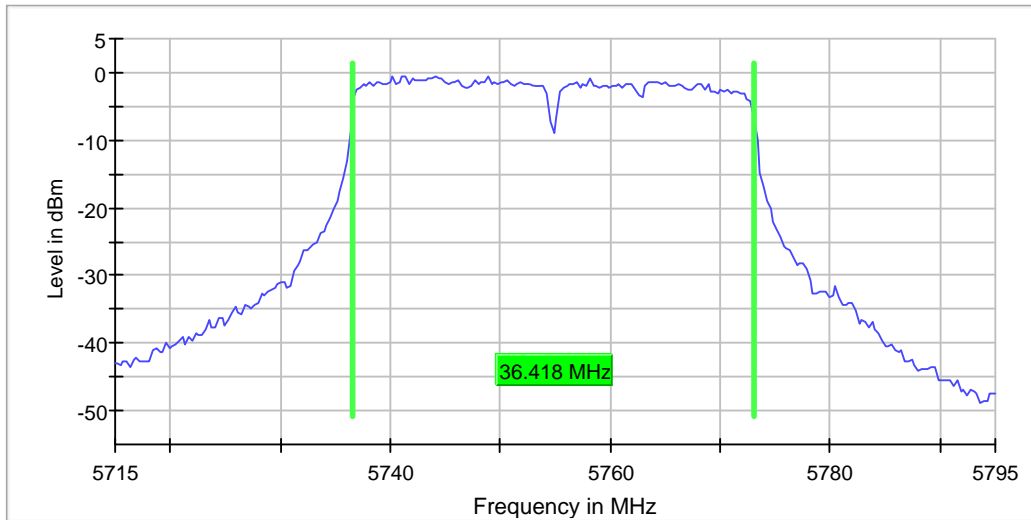

Measurement

Setting	Instrument Value	Target Value
Start Frequency	5.71500 GHz	5.71500 GHz
Stop Frequency	5.79500 GHz	5.79500 GHz
Span	80.000 MHz	80.000 MHz
RBW	300.000 kHz	<= 400.000 kHz
VBW	1.000 MHz	>= 900.000 kHz
SweepPoints	267	~ 267
Sweeptime	31.603 μs	AUTO
Reference Level	-20.000 dBm	-20.000 dBm
Attenuation	0.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	200	200
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
Sweeptype	FFT	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.30	0.30
Run	51 / max. 150	max. 150
Stable	5 / 5	5

Band Edge low (5755 MHz; 40 MHz)

Test according to FCC title 47 part 15 §15.407(b), KDB 789033 D02 General U-NII Test Procedures New Rules v01r02 and ANSI C63.10

Result


DUT Frequency (MHz)	Result
5755.000000	PASS

Inband Peak

Frequency (MHz)	Level (dBm)
5742.181275	-3.8

Measurements

Frequency (MHz)	Level (dBm)	Margin (dB)	Limit (dBm)	Result
5352.247004	-59.9	18.6	-41.2	PASS
5362.233688	-59.9	18.7	-41.2	PASS
5354.743675	-60.0	18.7	-41.2	PASS
5351.747670	-60.0	18.7	-41.2	PASS
5354.244341	-60.0	18.7	-41.2	PASS
5355.243009	-60.0	18.8	-41.2	PASS
5356.741012	-60.0	18.8	-41.2	PASS
5366.228362	-60.0	18.8	-41.2	PASS
5350.249667	-60.0	18.8	-41.2	PASS
5350.000000	-60.0	18.8	-41.2	PASS
5351.248336	-60.0	18.8	-41.2	PASS
5359.237683	-60.0	18.8	-41.2	PASS
5370.722370	-60.0	18.8	-41.2	PASS
5355.742344	-60.0	18.8	-41.2	PASS
5353.245672	-60.1	18.8	-41.2	PASS

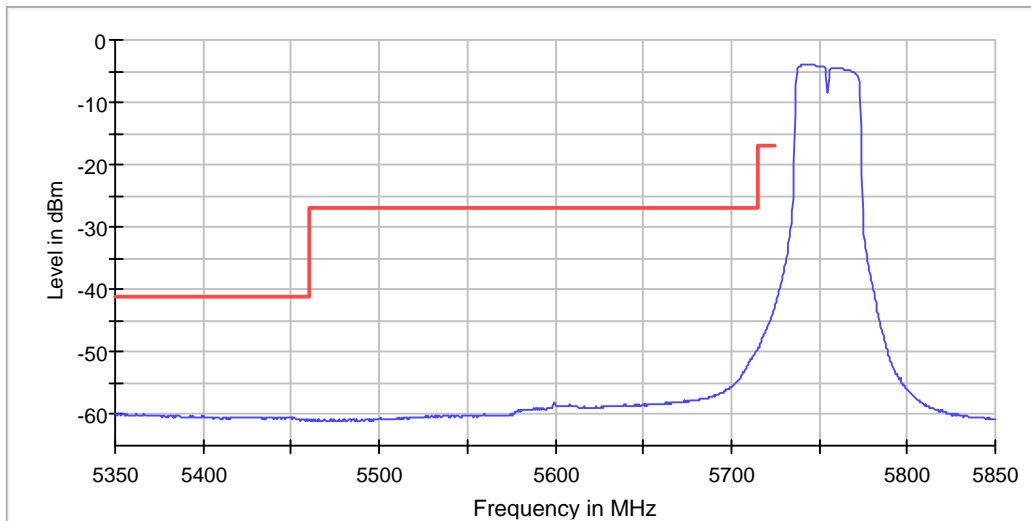

Measurement 1

Setting	Instrument Value	Target Value
RBW	1.000 MHz	<= 1.000 MHz
VBW	3.000 MHz	>= 3.000 MHz
SweepPoints	250	~ 250
SweepTime	250.000 ms	250.000 ms
Reference Level	-20.000 dBm	-20.000 dBm
Attenuation	0.000 dB	AUTO
Detector	RMS	RMS
SweepCount	5	5
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.30	0.30
Run	3 / max. 15	max. 15
Stable	3 / 3	3

Measurement 2

Setting	Instrument Value	Target Value
RBW	1.000 MHz	<= 1.000 MHz
VBW	3.000 MHz	>= 3.000 MHz
SweepPoints	750	~ 750
SweepTime	750.000 ms	750.000 ms
Reference Level	-20.000 dBm	-20.000 dBm
Attenuation	0.000 dB	AUTO
Detector	RMS	RMS
SweepCount	5	5
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.30	0.30
Run	3 / max. 15	max. 15
Stable	3 / 3	3

Tx Spurious Emission (5755 MHz; 40 MHz)

Test according to FCC title 47 part 15 §15.407(b), KDB 789033 D02 General U-NII Test Procedures New Rules v01r02 and ANSI C63.10

Result

DUT Frequency (MHz)	Result
5755.000000	PASS

Final measurements


Frequency (MHz)	Level Pre Measurement (dBm)	level (dBm)	Limit (dBm)	Margin (dB)	Result
---	---	---	---	---	---

Pre Measurements

Frequency (MHz)	Level (dBm)	Margin (dB)	Limit (dBm)
18888.874270	-48.2	6.9	-41.2
18530.893111	-48.2	7.0	-41.2
18874.875007	-48.2	7.0	-41.2
18842.876691	-48.3	7.0	-41.2
18882.874586	-48.3	7.1	-41.2
18930.872059	-48.4	7.1	-41.2
18964.870270	-48.5	7.3	-41.2
18912.873007	-48.5	7.3	-41.2
18727.882743	-48.5	7.3	-41.2
18238.908479	-48.6	7.3	-41.2
19080.864165	-48.7	7.5	-41.2
18234.908689	-48.7	7.5	-41.2
19003.868217	-48.7	7.5	-41.2
18872.875112	-48.7	7.5	-41.2
18873.875059	-48.8	7.5	-41.2

Measurement Settings

Start Frequency (MHz)	Stop Frequency (MHz)	Pre Measurement	Final Measurement
30.000000	1000.000000	1	1
1000.000000	5150.000000	2	2
5150.000000	5250.000000	2	2
5250.000000	5350.000000	2	2
5350.000000	5470.000000	2	2
5470.000000	5725.000000	2	2
5725.000000	5850.000000	2	2
5850.000000	7000.000000	2	2
7000.000000	26000.000000	2	2
26000.000000	40000.000000	2	2

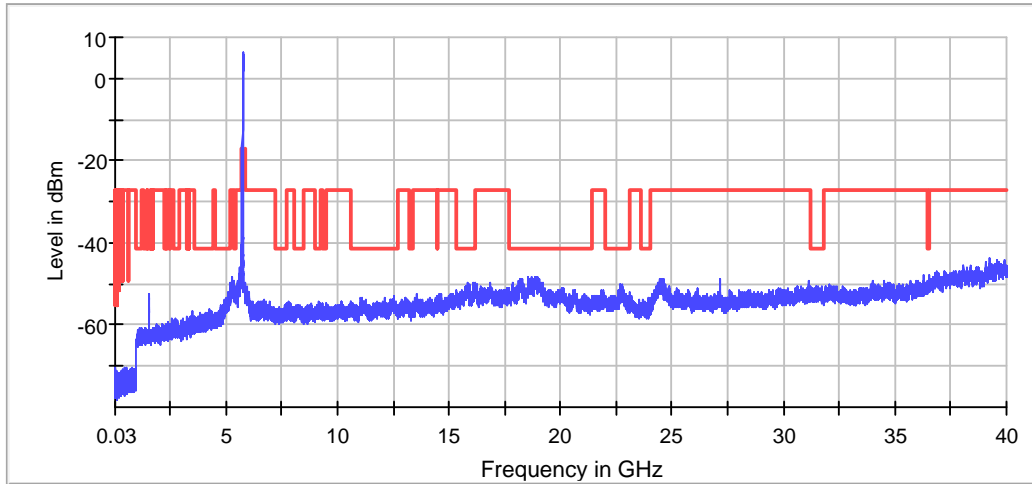

— Limit [limit.Result:1] × Threshold [limit 2.Result:1]

Final Measurement

Setting	Instrument Value	Target Value
Span	ZeroSpan	ZeroSpan
RBW	1.000 MHz	~ 1.000 MHz
VBW	3.000 MHz	~ 3.000 MHz
SweepPoints	10001	~ 10001
SweepTime	50.000 ms	50.000 ms
Reference Level	-20.000 dBm	-20.000 dBm
Attenuation	0.000 dB	0.000 dB
Detector	RMS	RMS
SweepCount	1	1
Filter	3 dB	3 dB
Trace Mode	Clear Write	Clear Write
SweepType	Sweep	AUTO
Preamp	off	off

Power Spectral Density (5795 MHz; 42.9851 MHz)


Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v01r02 and ANSI C63.10

Result

DUT Frequency (MHz)	Frequency (MHz)	PSD (dBm)	Limit Max (dBm)	Result
5795.000000	5782.568035	-2.690	30.0	PASS

Ports

Port	Duty Cycle (%)
1	93.285

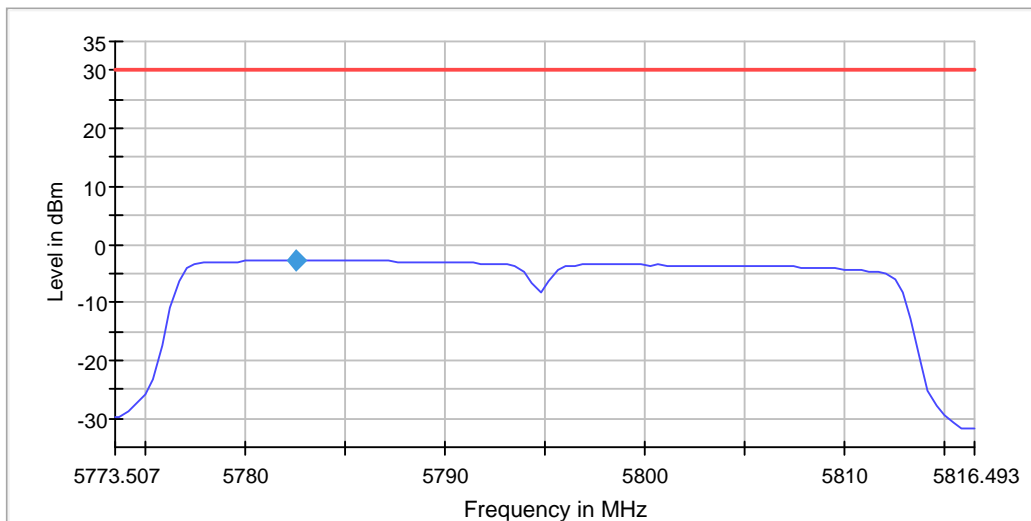

Measurement


Setting	Instrument Value	Target Value
Start Frequency	5.77351 GHz	5.77351 GHz
Stop Frequency	5.81649 GHz	5.81649 GHz
Span	42.985 MHz	42.985 MHz
RBW	1.000 MHz	<= 1.000 MHz
VBW	3.000 MHz	>= 3.000 MHz
SweepPoints	101	~ 86
SweepTime	2.020 s	2.020 s
Reference Level	-20.000 dBm	-20.000 dBm
Attenuation	0.000 dB	AUTO
Detector	RMS	RMS
SweepCount	3	3
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.30	0.30
Run	3 / max. 15	max. 15
Stable	3 / 3	3

Minimum Emission Bandwidth 6 dB (5795 MHz; 40 MHz)

Test according to FCC title 47 part 15 §15.407(a),(e), KDB 789033 D02 General U-NII Test Procedures New Rules v01r02 and ANSI C63.10

6 dB Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)	Max Level (dBm)	Result
5795.000000	36.154807	0.500000	---	5776.722846	5812.877653	-1.6	PASS

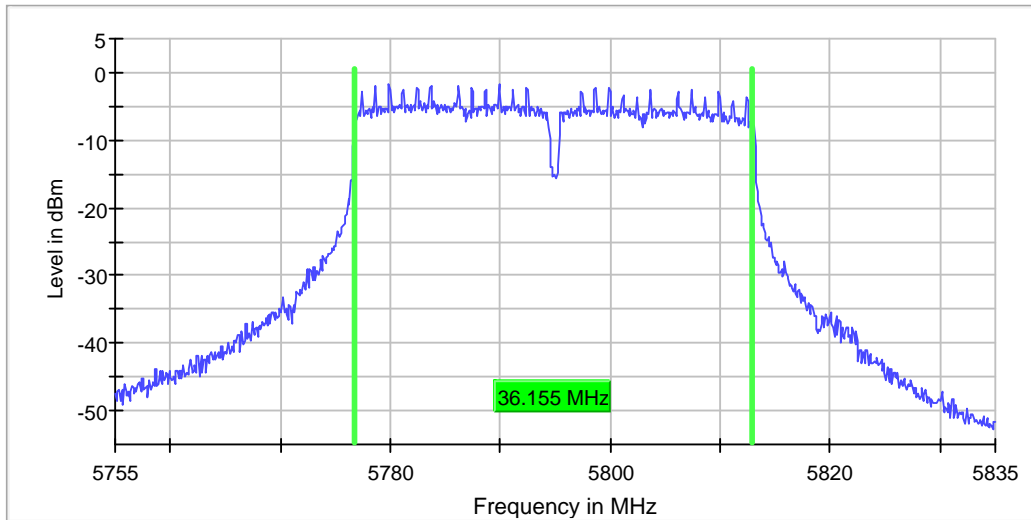

Measurement


Setting	Instrument Value	Target Value
Start Frequency	5.75500 GHz	5.75500 GHz
Stop Frequency	5.83500 GHz	5.83500 GHz
Span	80.000 MHz	80.000 MHz
RBW	100.000 kHz	~ 100.000 kHz
VBW	300.000 kHz	~ 300.000 kHz
SweepPoints	800	~ 800
SweepTime	94.810 μs	AUTO
Reference Level	-20.000 dBm	-20.000 dBm
Attenuation	0.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	200	200
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	FFT	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.30	0.30
Run	78 / max. 150	max. 150
Stable	5 / 5	5

Emission Bandwidth 26 dB (5795 MHz; 40 MHz)

Test according to FCC title 47 part 15 §15.407(a),(e), KDB 789033 D02 General U-NII Test Procedures New Rules v01r02 and ANSI C63.10

26 dB Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)	Max Level (dBm)	Result
5795.000000	42.985075	---	---	5772.761194	5815.746269	1.3	PASS

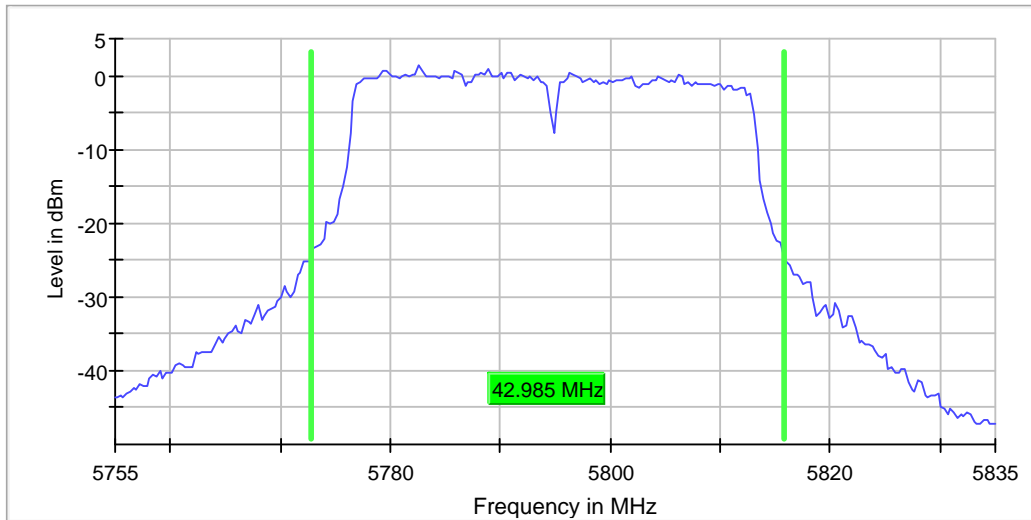

Measurement


Setting	Instrument Value	Target Value
Start Frequency	5.75500 GHz	5.75500 GHz
Stop Frequency	5.83500 GHz	5.83500 GHz
Span	80.000 MHz	80.000 MHz
RBW	300.000 kHz	~ 400.000 kHz
VBW	1.000 MHz	>= 900.000 kHz
SweepPoints	267	~ 267
Sweeptime	31.603 μs	AUTO
Reference Level	-20.000 dBm	-20.000 dBm
Attenuation	0.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	200	200
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
Sweeptype	FFT	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.30	0.30
Run	47 / max. 150	max. 150
Stable	5 / 5	5

Occupied Channel Bandwidth 99% (5795 MHz; 40 MHz)

Test according to FCC title 47 part 15 §15.407(a),(e), KDB 789033 D02 General U-NII Test Procedures New Rules v01r02 and ANSI C63.10

99 % Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)	Result
5795.000000	36.417910	---	---	5776.641791	5813.059701	PASS

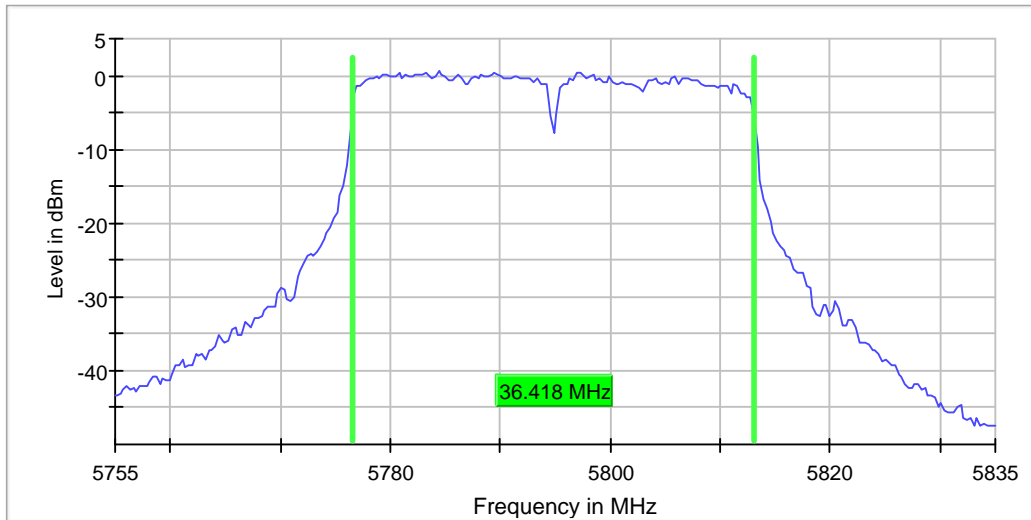

Measurement

Setting	Instrument Value	Target Value
Start Frequency	5.75500 GHz	5.75500 GHz
Stop Frequency	5.83500 GHz	5.83500 GHz
Span	80.000 MHz	80.000 MHz
RBW	300.000 kHz	<= 400.000 kHz
VBW	1.000 MHz	>= 900.000 kHz
SweepPoints	267	~ 267
SweepTime	31.603 μs	AUTO
Reference Level	-20.000 dBm	-20.000 dBm
Attenuation	0.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	200	200
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	FFT	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.30	0.30
Run	47 / max. 150	max. 150
Stable	5 / 5	5

Band Edge high (5795 MHz; 40 MHz)

Test according to FCC title 47 part 15 §15.407(b), KDB 789033 D02 General U-NII Test Procedures New Rules v01r02 and ANSI C63.10

Result


DUT Frequency (MHz)	Result
5795.000000	PASS

Inband Peak

Frequency (MHz)	Level (dBm)
5782.021912	-2.6

Measurements

Frequency (MHz)	Level (dBm)	Margin (dB)	Limit (dBm)	Result
7297.917438	-64.0	22.8	-41.2	PASS
7298.917068	-64.1	22.8	-41.2	PASS
7303.415402	-64.1	22.8	-41.2	PASS
7292.419474	-64.1	22.9	-41.2	PASS
7302.415772	-64.1	22.9	-41.2	PASS
7300.916327	-64.1	22.9	-41.2	PASS
7310.412810	-64.1	22.9	-41.2	PASS
7306.914106	-64.2	22.9	-41.2	PASS
7302.915587	-64.2	22.9	-41.2	PASS
7299.416883	-64.2	23.0	-41.2	PASS
7296.417993	-64.2	23.0	-41.2	PASS
7304.914846	-64.2	23.0	-41.2	PASS
7306.414291	-64.2	23.0	-41.2	PASS
7291.419845	-64.2	23.0	-41.2	PASS
7292.919289	-64.2	23.0	-41.2	PASS

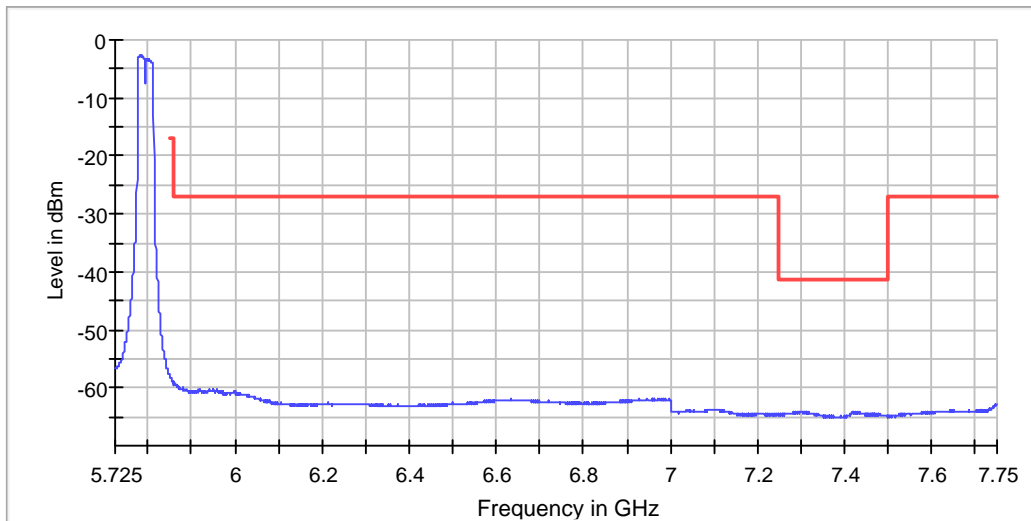

Measurement 1

Setting	Instrument Value	Target Value
RBW	1.000 MHz	<= 1.000 MHz
VBW	3.000 MHz	>= 3.000 MHz
SweepPoints	250	~ 250
SweepTime	250.000 ms	250.000 ms
Reference Level	-20.000 dBm	-20.000 dBm
Attenuation	0.000 dB	AUTO
Detector	RMS	RMS
SweepCount	5	5
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.30	0.30
Run	3 / max. 15	max. 15
Stable	3 / 3	3

Measurement 2

Setting	Instrument Value	Target Value
RBW	1.000 MHz	<= 1.000 MHz
VBW	3.000 MHz	>= 3.000 MHz
SweepPoints	1100	~ 1100
SweepTime	1.100 s	1.100 s
Reference Level	-20.000 dBm	-20.000 dBm
Attenuation	0.000 dB	AUTO
Detector	RMS	RMS
SweepCount	5	5
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.30	0.30
Run	3 / max. 15	max. 15
Stable	3 / 3	3

Tx Spurious Emission (5795 MHz; 40 MHz)

Test according to FCC title 47 part 15 §15.407(b), KDB 789033 D02 General U-NII Test Procedures New Rules v01r02 and ANSI C63.10

Result

DUT Frequency (MHz)	Result
5795.000000	PASS

Final measurements


Frequency (MHz)	Level Pre Measurement (dBm)	level (dBm)	Limit (dBm)	Margin (dB)	Result
---	---	---	---	---	---

Pre Measurements

Frequency (MHz)	Level (dBm)	Margin (dB)	Limit (dBm)
18210.909952	-47.5	6.3	-41.2
18885.874428	-47.8	6.6	-41.2
18230.908900	-48.0	6.8	-41.2
18896.873849	-48.1	6.9	-41.2
18676.885427	-48.3	7.0	-41.2
18214.909742	-48.6	7.4	-41.2
18931.872007	-48.7	7.5	-41.2
19336.850692	-48.8	7.5	-41.2
18969.870007	-48.8	7.5	-41.2
19020.867323	-48.8	7.6	-41.2
18872.875112	-48.8	7.6	-41.2
22704.673438	-48.8	7.6	-41.2
18914.872901	-48.8	7.6	-41.2
18976.869638	-48.9	7.6	-41.2
36458.752946	-48.9	7.7	-41.2

Measurement Settings

Start Frequency (MHz)	Stop Frequency (MHz)	Pre Measurement	Final Measurement
30.000000	1000.000000	1	1
1000.000000	5150.000000	2	2
5150.000000	5250.000000	2	2
5250.000000	5350.000000	2	2
5350.000000	5470.000000	2	2
5470.000000	5725.000000	2	2
5725.000000	5850.000000	2	2
5850.000000	7000.000000	2	2
7000.000000	26000.000000	2	2
26000.000000	40000.000000	2	2

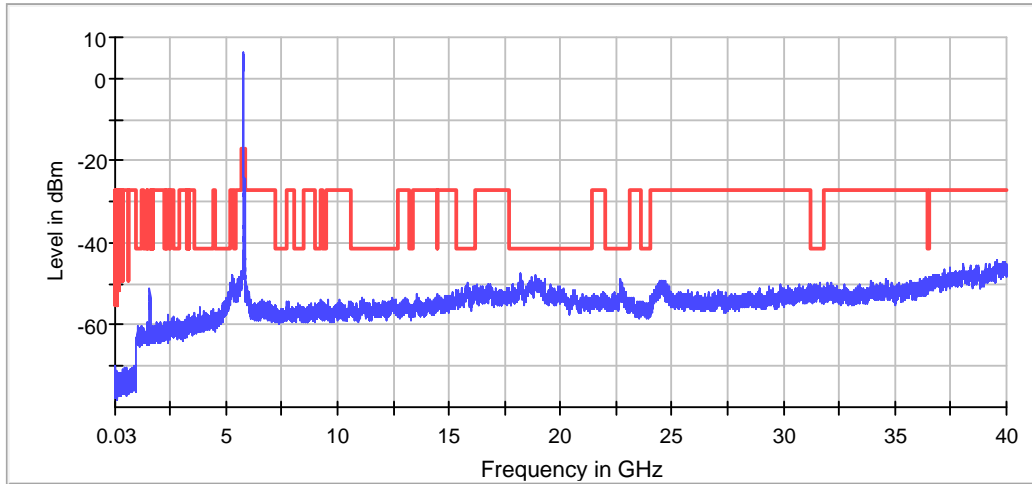

— Limit [limit.Result:1] × Threshold [limit 2.Result:1]

Final Measurement

Setting	Instrument Value	Target Value
Span	ZeroSpan	ZeroSpan
RBW	1.000 MHz	~ 1.000 MHz
VBW	3.000 MHz	~ 3.000 MHz
SweepPoints	10001	~ 10001
SweepTime	50.000 ms	50.000 ms
Reference Level	-20.000 dBm	-20.000 dBm
Attenuation	0.000 dB	0.000 dB
Detector	RMS	RMS
SweepCount	1	1
Filter	3 dB	3 dB
Trace Mode	Clear Write	Clear Write
SweepType	Sweep	AUTO
Preamp	off	off

UNII-3 ANT2 AC Mode 80MHz Power Spectral Density (5775 MHz; 88.4472 MHz)


Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v01r02 and ANSI C63.10

Result

DUT Frequency (MHz)	Frequency (MHz)	PSD (dBm)	Limit Max (dBm)	Result
5775.000000	5743.447207	-3.820	30.0	PASS

Ports

Port	Duty Cycle (%)
1	86.718

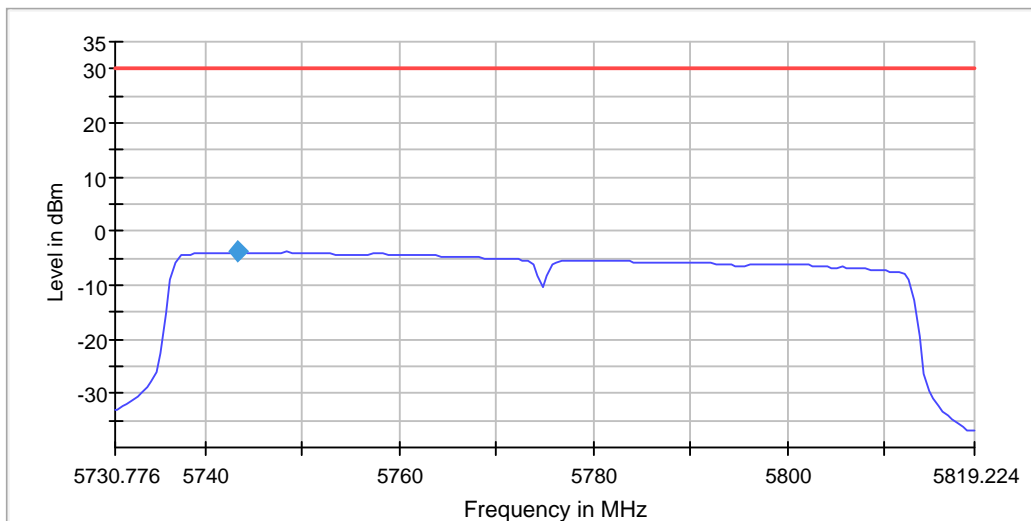

Measurement


Setting	Instrument Value	Target Value
Start Frequency	5.73078 GHz	5.73078 GHz
Stop Frequency	5.81922 GHz	5.81922 GHz
Span	88.447 MHz	88.447 MHz
RBW	1.000 MHz	<= 1.000 MHz
VBW	3.000 MHz	>= 3.000 MHz
SweepPoints	177	~ 177
SweepTime	3.540 s	3.540 s
Reference Level	-30.000 dBm	-30.000 dBm
Attenuation	0.000 dB	AUTO
Detector	RMS	RMS
SweepCount	3	3
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.30	0.30
Run	3 / max. 15	max. 15
Stable	3 / 3	3

Minimum Emission Bandwidth 6 dB (5775 MHz; 80 MHz)

Test according to FCC title 47 part 15 §15.407(a),(e), KDB 789033 D02 General U-NII Test Procedures New Rules v01r02 and ANSI C63.10

6 dB Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)	Max Level (dBm)	Result
5775.000000	73.254216	0.500000	---	5736.723923	5809.978139	-3.5	PASS

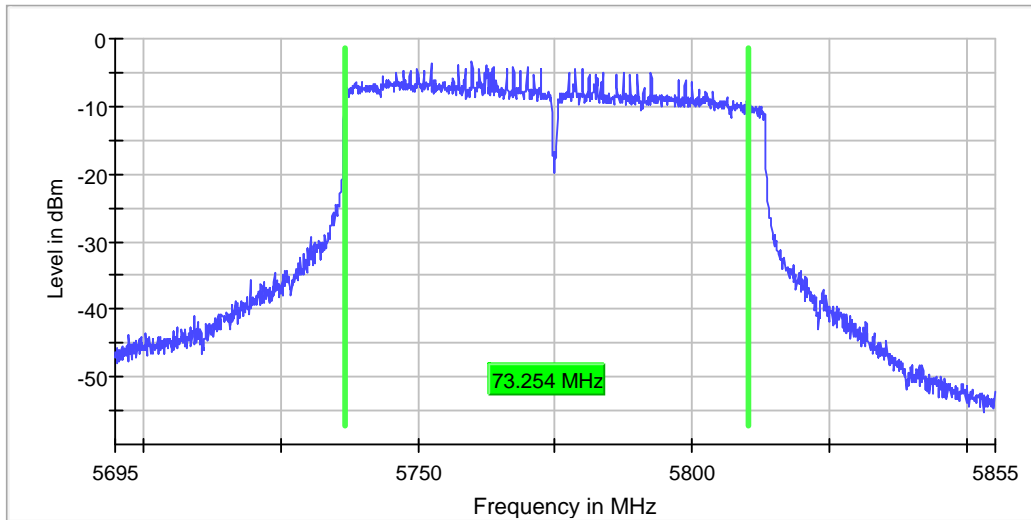

Measurement


Setting	Instrument Value	Target Value
Start Frequency	5.69500 GHz	5.69500 GHz
Stop Frequency	5.85500 GHz	5.85500 GHz
Span	160.000 MHz	160.000 MHz
RBW	100.000 kHz	~ 100.000 kHz
VBW	300.000 kHz	~ 300.000 kHz
SweepPoints	1600	~ 1600
Sweeptime	189.620 µs	AUTO
Reference Level	-20.000 dBm	-20.000 dBm
Attenuation	0.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	200	200
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
Sweeptype	FFT	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.30	0.30
Run	65 / max. 150	max. 150
Stable	5 / 5	5

Emission Bandwidth 26 dB (5775 MHz; 80 MHz)

Test according to FCC title 47 part 15 §15.407(a),(e), KDB 789033 D02 General U-NII Test Procedures New Rules v01r02 and ANSI C63.10

26 dB Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)	Max Level (dBm)	Result
5775.000000	88.447205	---	---	5728.291925	5816.739130	6.8	PASS

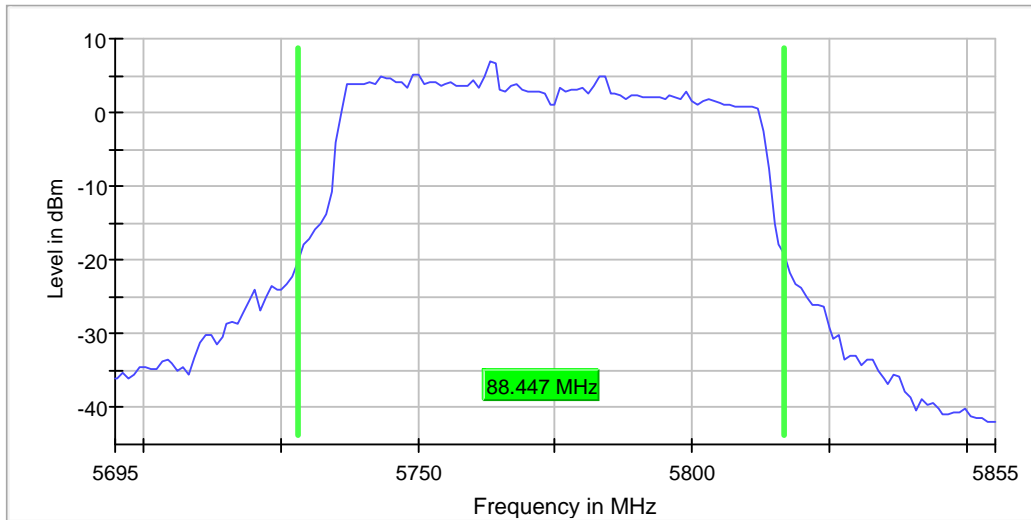

Measurement


Setting	Instrument Value	Target Value
Start Frequency	5.69500 GHz	5.69500 GHz
Stop Frequency	5.85500 GHz	5.85500 GHz
Span	160.000 MHz	160.000 MHz
RBW	1.000 MHz	~ 800.000 kHz
VBW	3.000 MHz	>= 3.000 MHz
SweepPoints	160	~ 160
SweepTime	22.754 µs	AUTO
Reference Level	-10.000 dBm	-10.000 dBm
Attenuation	10.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	200	200
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	FFT	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.30	0.30
Run	39 / max. 150	max. 150
Stable	5 / 5	5

Occupied Channel Bandwidth 99% (5775 MHz; 80 MHz)

Test according to FCC title 47 part 15 §15.407(a),(e), KDB 789033 D02 General U-NII Test Procedures New Rules v01r02 and ANSI C63.10

99 % Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)	Result
5775.000000	75.763240	---	---	5736.619938	5812.383178	PASS

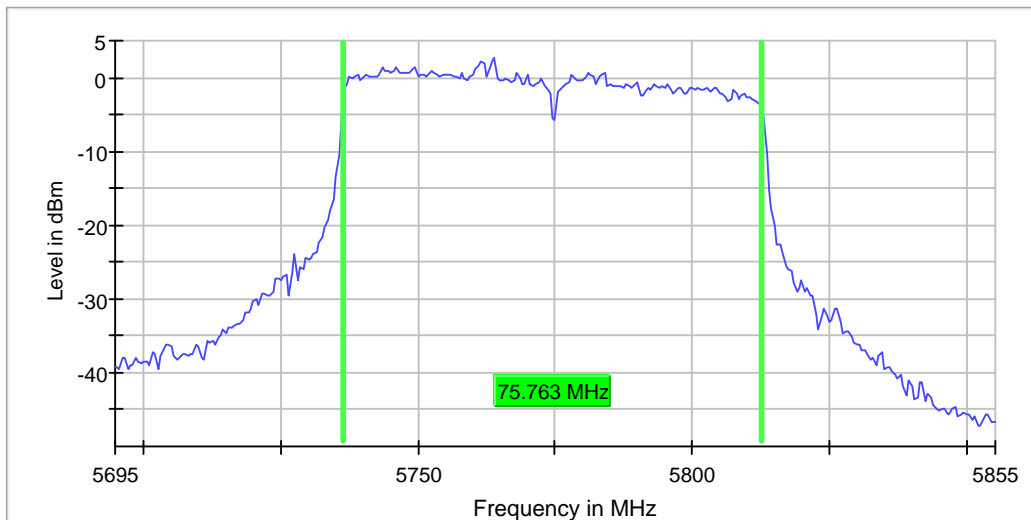

Measurement

Setting	Instrument Value	Target Value
Start Frequency	5.69500 GHz	5.69500 GHz
Stop Frequency	5.85500 GHz	5.85500 GHz
Span	160.000 MHz	160.000 MHz
RBW	500.000 kHz	<= 800.000 kHz
VBW	2.000 MHz	>= 1.500 MHz
SweepPoints	320	~ 320
Sweeptime	37.924 µs	AUTO
Reference Level	-20.000 dBm	-20.000 dBm
Attenuation	0.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	200	200
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
Sweeptype	FFT	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.30	0.30
Run	51 / max. 150	max. 150
Stable	5 / 5	5

Band Edge low (5775 MHz; 80 MHz)

Test according to FCC title 47 part 15 §15.407(b), KDB 789033 D02 General U-NII Test Procedures New Rules v01r02 and ANSI C63.10

Result


DUT Frequency (MHz)	Result
5775.000000	PASS

Inband Peak

Frequency (MHz)	Level (dBm)
5748.655378	-4.7

Measurements

Frequency (MHz)	Level (dBm)	Margin (dB)	Limit (dBm)	Result
5714.763648	-43.4	16.4	-27.0	PASS
5714.264314	-43.7	16.7	-27.0	PASS
5713.764980	-43.7	16.7	-27.0	PASS
5712.766312	-44.1	17.1	-27.0	PASS
5712.266977	-44.2	17.2	-27.0	PASS
5713.265646	-44.2	17.2	-27.0	PASS
5351.747670	-58.5	17.3	-41.2	PASS
5350.749001	-58.6	17.3	-41.2	PASS
5351.248336	-58.6	17.3	-41.2	PASS
5711.767643	-44.4	17.4	-27.0	PASS
5350.249667	-58.6	17.4	-41.2	PASS
5350.000000	-58.6	17.4	-41.2	PASS
5354.244341	-58.6	17.4	-41.2	PASS
5355.742344	-58.6	17.4	-41.2	PASS
5352.247004	-58.6	17.4	-41.2	PASS

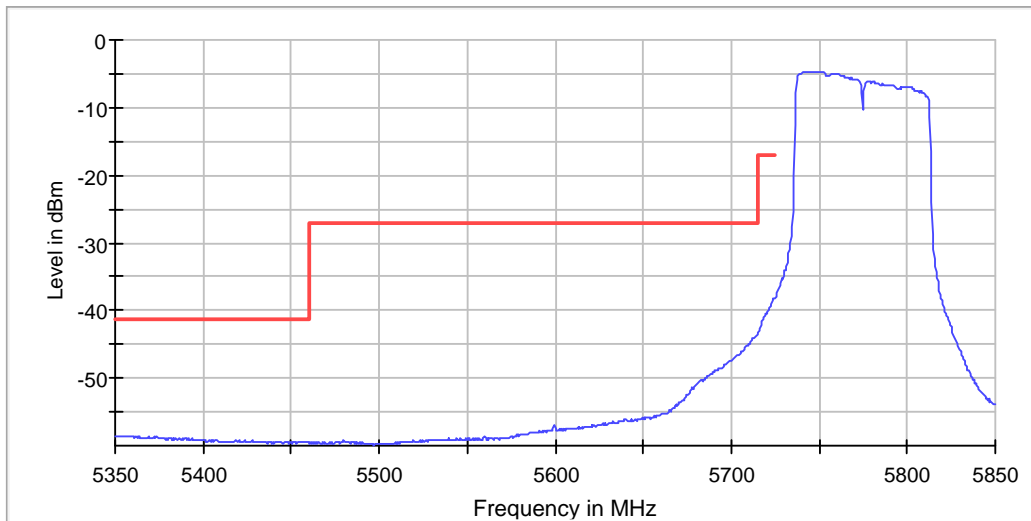

Measurement 1

Setting	Instrument Value	Target Value
RBW	1.000 MHz	<= 1.000 MHz
VBW	3.000 MHz	>= 3.000 MHz
SweepPoints	250	~ 250
SweepTime	250.000 ms	250.000 ms
Reference Level	-20.000 dBm	-20.000 dBm
Attenuation	0.000 dB	AUTO
Detector	RMS	RMS
SweepCount	5	5
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.30	0.30
Run	3 / max. 15	max. 15
Stable	3 / 3	3

Measurement 2

Setting	Instrument Value	Target Value
RBW	1.000 MHz	<= 1.000 MHz
VBW	3.000 MHz	>= 3.000 MHz
SweepPoints	750	~ 750
SweepTime	750.000 ms	750.000 ms
Reference Level	-20.000 dBm	-20.000 dBm
Attenuation	0.000 dB	AUTO
Detector	RMS	RMS
SweepCount	5	5
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.30	0.30
Run	3 / max. 15	max. 15
Stable	3 / 3	3

Band Edge high (5775 MHz; 80 MHz)

Test according to FCC title 47 part 15 §15.407(b), KDB 789033 D02 General U-NII Test Procedures New Rules v01r02 and ANSI C63.10

Result


DUT Frequency (MHz)	Result
5775.000000	PASS

Inband Peak

Frequency (MHz)	Level (dBm)
5743.177291	-4.6

Measurements

Frequency (MHz)	Level (dBm)	Margin (dB)	Limit (dBm)	Result
7304.415031	-64.1	22.9	-41.2	PASS
7296.417993	-64.1	22.9	-41.2	PASS
7288.920770	-64.2	22.9	-41.2	PASS
7299.416883	-64.2	22.9	-41.2	PASS
7301.416142	-64.2	22.9	-41.2	PASS
7300.416512	-64.2	23.0	-41.2	PASS
7295.918178	-64.2	23.0	-41.2	PASS
7300.916327	-64.2	23.0	-41.2	PASS
7294.918549	-64.2	23.0	-41.2	PASS
7298.917068	-64.2	23.0	-41.2	PASS
7310.412810	-64.2	23.0	-41.2	PASS
7302.415772	-64.2	23.0	-41.2	PASS
7292.919289	-64.2	23.0	-41.2	PASS
7291.419845	-64.2	23.0	-41.2	PASS
7418.872640	-64.2	23.0	-41.2	PASS

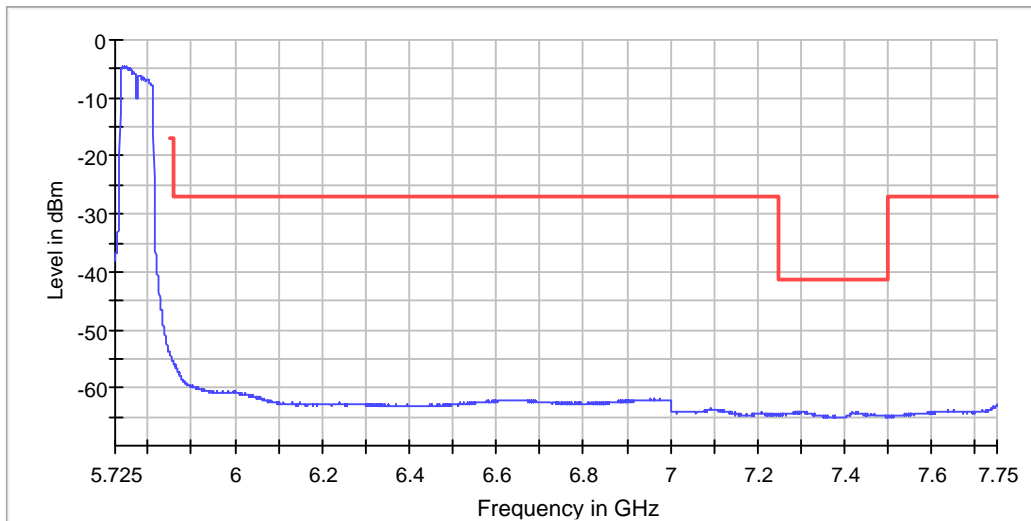

Measurement 1

Setting	Instrument Value	Target Value
RBW	1.000 MHz	<= 1.000 MHz
VBW	3.000 MHz	>= 3.000 MHz
SweepPoints	250	~ 250
SweepTime	250.000 ms	250.000 ms
Reference Level	-20.000 dBm	-20.000 dBm
Attenuation	0.000 dB	AUTO
Detector	RMS	RMS
SweepCount	5	5
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.30	0.30
Run	3 / max. 15	max. 15
Stable	3 / 3	3

Measurement 2

Setting	Instrument Value	Target Value
RBW	1.000 MHz	<= 1.000 MHz
VBW	3.000 MHz	>= 3.000 MHz
SweepPoints	1100	~ 1100
SweepTime	1.100 s	1.100 s
Reference Level	-20.000 dBm	-20.000 dBm
Attenuation	0.000 dB	AUTO
Detector	RMS	RMS
SweepCount	5	5
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.30	0.30
Run	3 / max. 15	max. 15
Stable	3 / 3	3

Tx Spurious Emission (5775 MHz; 80 MHz)

Test according to FCC title 47 part 15 §15.407(b), KDB 789033 D02 General U-NII Test Procedures New Rules v01r02 and ANSI C63.10

Result

DUT Frequency (MHz)	Result
5775.000000	PASS

Final measurements


Frequency (MHz)	Level Pre Measurement (dBm)	level (dBm)	Limit (dBm)	Margin (dB)	Result
18871.875164	-46.2	-58.8	-41.2	17.6	PASS

Pre Measurements

Frequency (MHz)	Level (dBm)	Margin (dB)	Limit (dBm)
18871.875164	-46.2	5.0	-41.2
36494.750375	-47.9	6.7	-41.2
18875.874954	-48.2	7.0	-41.2
18750.881533	-48.2	7.0	-41.2
18942.871428	-48.4	7.2	-41.2
18830.877322	-48.5	7.2	-41.2
18881.874638	-48.5	7.2	-41.2
18897.873796	-48.6	7.4	-41.2
18928.872165	-48.7	7.5	-41.2
17864.928162	-48.7	7.5	-41.2
18870.875217	-48.8	7.5	-41.2
18848.876375	-48.8	7.5	-41.2
5713.544922	-34.6	7.6	-27.0
18920.872586	-48.9	7.7	-41.2
18667.885901	-48.9	7.7	-41.2

Measurement Settings

Start Frequency (MHz)	Stop Frequency (MHz)	Pre Measurement	Final Measurement
30.000000	1000.000000	1	1
1000.000000	5150.000000	2	2
5150.000000	5250.000000	2	2
5250.000000	5350.000000	2	2
5350.000000	5470.000000	2	2
5470.000000	5725.000000	2	2
5725.000000	5850.000000	2	2
5850.000000	7000.000000	2	2
7000.000000	26000.000000	2	2
26000.000000	40000.000000	2	2

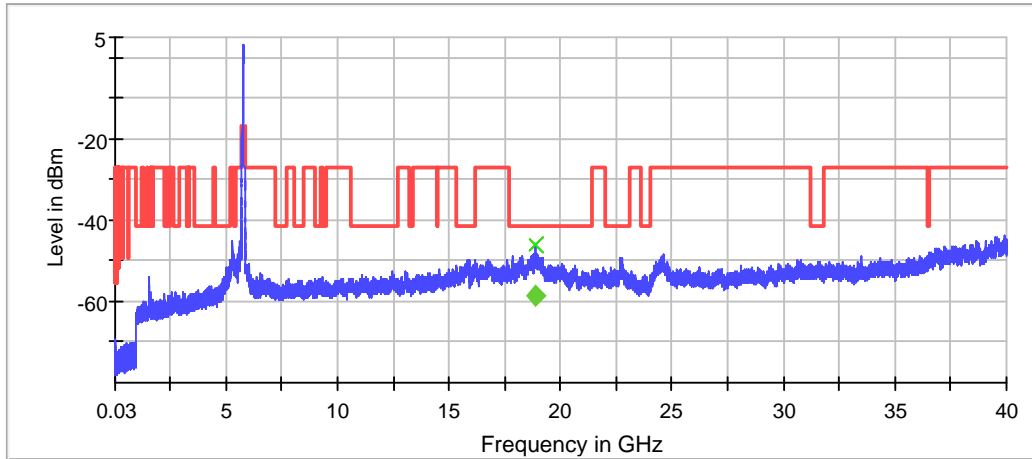

— Limit [limit.Result:1] x Threshold [limit 2.Result:1]
◆ Critical [Over Limit.Result:1] ◆ Sum Level [trace.Result:1]

Final Measurement

Setting	Instrument Value	Target Value
Span	ZeroSpan	ZeroSpan
RBW	1.000 MHz	~ 1.000 MHz
VBW	3.000 MHz	~ 3.000 MHz
SweepPoints	10001	~ 10001
Sweeptime	50.000 ms	50.000 ms
Reference Level	-20.000 dBm	-20.000 dBm
Attenuation	0.000 dB	0.000 dB
Detector	RMS	RMS
SweepCount	1	1
Filter	3 dB	3 dB
Trace Mode	Clear Write	Clear Write
SweepType	Sweep	AUTO
Preamp	off	off

UNII-3 ANT2 NHT20 Mode Power Spectral Density (5745 MHz; 22.4876 MHz)


Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v01r02 and ANSI C63.10

Result

DUT Frequency (MHz)	Frequency (MHz)	PSD (dBm)	Limit Max (dBm)	Result
5745.000000	5738.937167	0.386	30.0	PASS

Ports

Port	Duty Cycle (%)
1	95.475

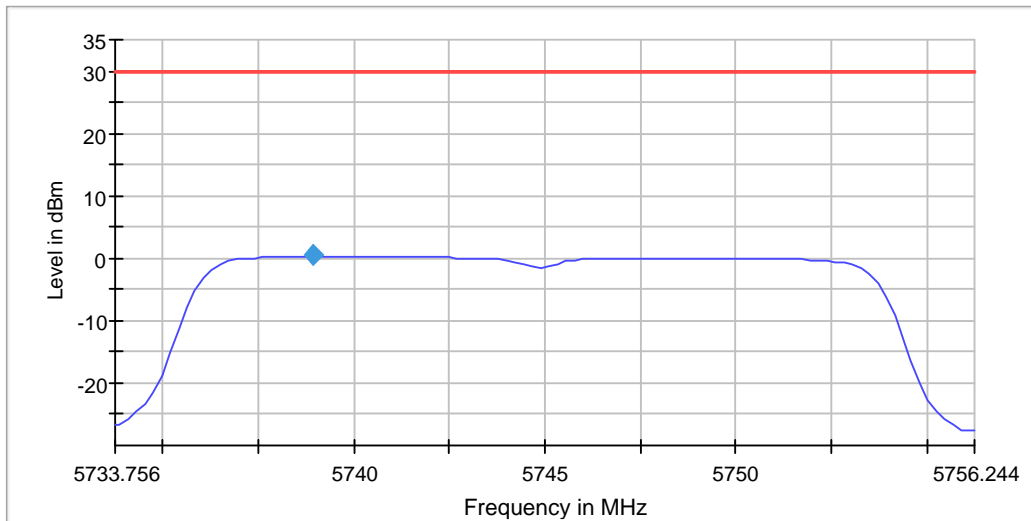

Measurement


Setting	Instrument Value	Target Value
Start Frequency	5.73376 GHz	5.73376 GHz
Stop Frequency	5.75624 GHz	5.75624 GHz
Span	22.488 MHz	22.488 MHz
RBW	1.000 MHz	<= 1.000 MHz
VBW	3.000 MHz	>= 3.000 MHz
SweepPoints	101	~ 45
SweepTime	2.020 s	2.020 s
Reference Level	-20.000 dBm	-20.000 dBm
Attenuation	0.000 dB	AUTO
Detector	RMS	RMS
SweepCount	3	3
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.30	0.30
Run	3 / max. 15	max. 15
Stable	3 / 3	3

Minimum Emission Bandwidth 6 dB (5745 MHz; 20 MHz)

Test according to FCC title 47 part 15 §15.407(a),(e), KDB 789033 D02 General U-NII Test Procedures New Rules v01r02 and ANSI C63.10

6 dB Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)	Max Level (dBm)	Result
5745.000000	17.75611	0.500000	---	5736.022444	5753.778055	1.8	PASS

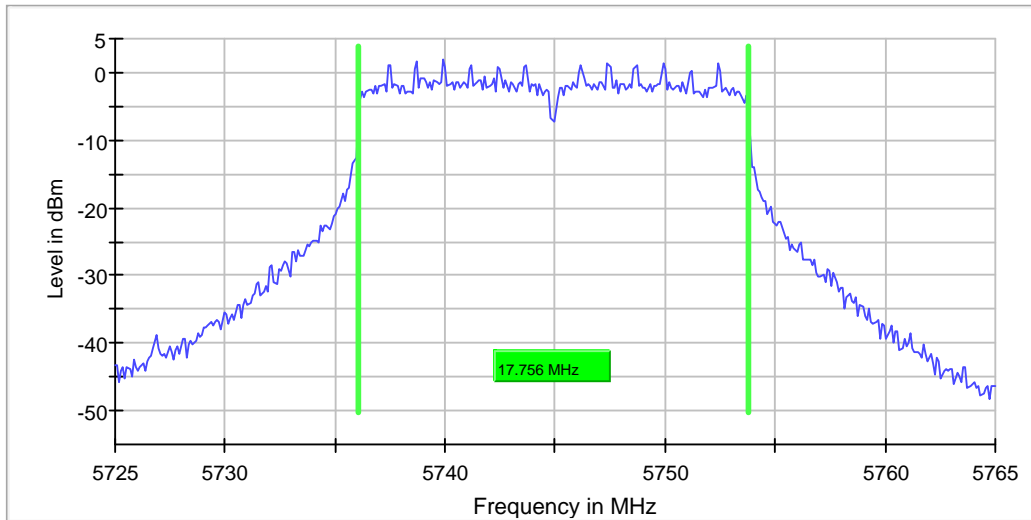

Measurement


Setting	Instrument Value	Target Value
Start Frequency	5.72500 GHz	5.72500 GHz
Stop Frequency	5.76500 GHz	5.76500 GHz
Span	40.000 MHz	40.000 MHz
RBW	100.000 kHz	~ 100.000 kHz
VBW	300.000 kHz	~ 300.000 kHz
SweepPoints	400	~ 400
SweepTime	56.886 μs	AUTO
Reference Level	-20.000 dBm	-20.000 dBm
Attenuation	0.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	200	200
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	FFT	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.30	0.30
Run	44 / max. 150	max. 150
Stable	5 / 5	5

Emission Bandwidth 26 dB (5745 MHz; 20 MHz)

Test according to FCC title 47 part 15 §15.407(a),(e), KDB 789033 D02 General U-NII Test Procedures New Rules v01r02 and ANSI C63.10

26 dB Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)	Max Level (dBm)	Result
5745.000000	22.487563	---	---	5733.656716	5756.144279	2.8	PASS

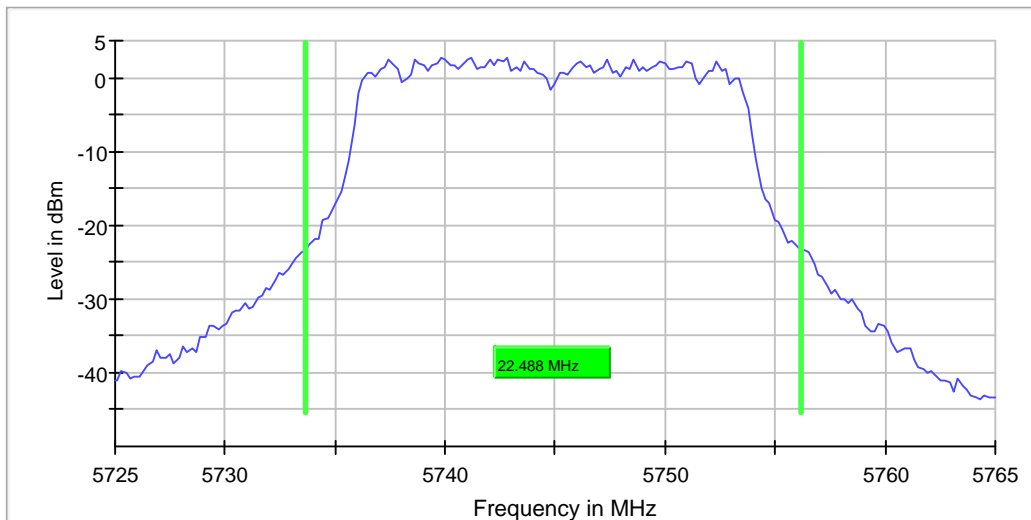

Measurement


Setting	Instrument Value	Target Value
Start Frequency	5.72500 GHz	5.72500 GHz
Stop Frequency	5.76500 GHz	5.76500 GHz
Span	40.000 MHz	40.000 MHz
RBW	200.000 kHz	~ 200.000 kHz
VBW	1.000 MHz	>= 600.000 kHz
SweepPoints	200	~ 200
SweepTime	28.443 μs	AUTO
Reference Level	-10.000 dBm	-10.000 dBm
Attenuation	10.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	200	200
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	FFT	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.30	0.30
Run	26 / max. 150	max. 150
Stable	5 / 5	5

Occupied Channel Bandwidth 99% (5745 MHz; 20 MHz)

Test according to FCC title 47 part 15 §15.407(a),(e), KDB 789033 D02 General U-NII Test Procedures New Rules v01r02 and ANSI C63.10

99 % Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)	Result
5745.000000	17.711443	---	---	5736.044776	5753.756219	PASS

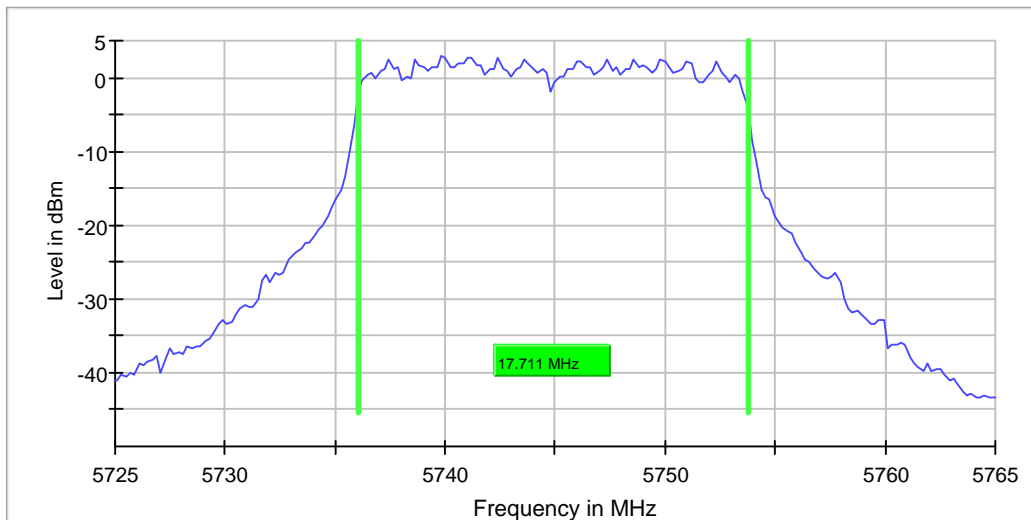

Measurement

Setting	Instrument Value	Target Value
Start Frequency	5.72500 GHz	5.72500 GHz
Stop Frequency	5.76500 GHz	5.76500 GHz
Span	40.000 MHz	40.000 MHz
RBW	200.000 kHz	<= 200.000 kHz
VBW	1.000 MHz	>= 600.000 kHz
SweepPoints	200	~ 200
SweepTime	28.443 μs	AUTO
Reference Level	-10.000 dBm	-10.000 dBm
Attenuation	10.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	200	200
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	FFT	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.30	0.30
Run	27 / max. 150	max. 150
Stable	5 / 5	5

Band Edge low (5745 MHz; 20 MHz)

Test according to FCC title 47 part 15 §15.407(b), KDB 789033 D02 General U-NII Test Procedures New Rules v01r02 and ANSI C63.10

Result


DUT Frequency (MHz)	Result
5745.000000	PASS

Inband Peak

Frequency (MHz)	Level (dBm)
5739.193227	1.2

Measurements

Frequency (MHz)	Level (dBm)	Margin (dB)	Limit (dBm)	Result
5351.248336	-58.6	17.4	-41.2	PASS
5350.249667	-58.6	17.4	-41.2	PASS
5350.000000	-58.6	17.4	-41.2	PASS
5354.743675	-58.7	17.5	-41.2	PASS
5353.745007	-58.7	17.5	-41.2	PASS
5351.747670	-58.7	17.5	-41.2	PASS
5352.247004	-58.8	17.5	-41.2	PASS
5353.245672	-58.8	17.5	-41.2	PASS
5360.236352	-58.8	17.6	-41.2	PASS
5363.731691	-58.8	17.6	-41.2	PASS
5357.240346	-58.8	17.6	-41.2	PASS
5359.737017	-58.8	17.6	-41.2	PASS
5358.738349	-58.8	17.6	-41.2	PASS
5352.746338	-58.8	17.6	-41.2	PASS
5356.241678	-58.8	17.6	-41.2	PASS

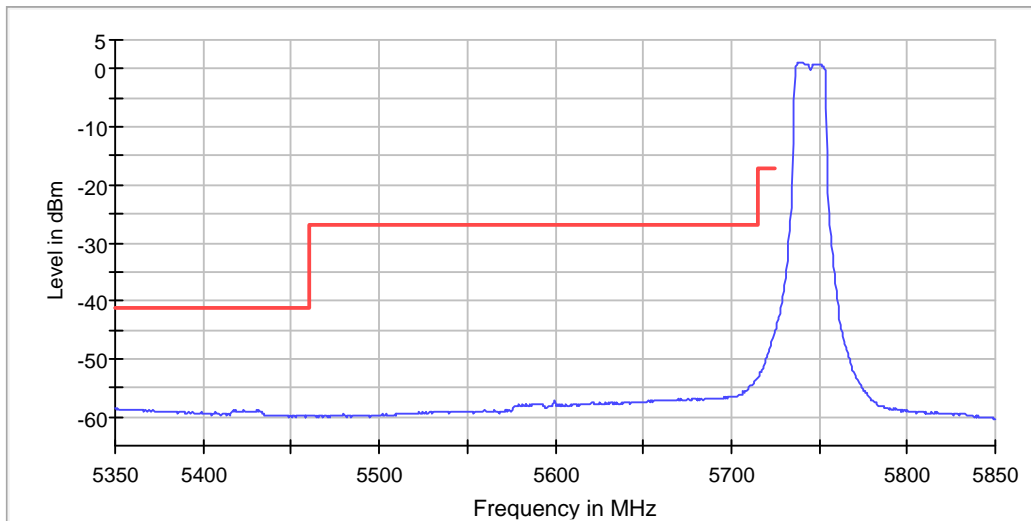

Measurement 1

Setting	Instrument Value	Target Value
RBW	1.000 MHz	<= 1.000 MHz
VBW	3.000 MHz	>= 3.000 MHz
SweepPoints	250	~ 250
SweepTime	250.000 ms	250.000 ms
Reference Level	-20.000 dBm	-20.000 dBm
Attenuation	0.000 dB	AUTO
Detector	RMS	RMS
SweepCount	5	5
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.30	0.30
Run	3 / max. 15	max. 15
Stable	3 / 3	3

Measurement 2

Setting	Instrument Value	Target Value
RBW	1.000 MHz	<= 1.000 MHz
VBW	3.000 MHz	>= 3.000 MHz
SweepPoints	750	~ 750
SweepTime	750.000 ms	750.000 ms
Reference Level	-20.000 dBm	-20.000 dBm
Attenuation	0.000 dB	AUTO
Detector	RMS	RMS
SweepCount	5	5
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.30	0.30
Run	3 / max. 15	max. 15
Stable	3 / 3	3

Tx Spurious Emission (5745 MHz; 20 MHz)

Test according to FCC title 47 part 15 §15.407(b), KDB 789033 D02 General U-NII Test Procedures New Rules v01r02 and ANSI C63.10

Result

DUT Frequency (MHz)	Result
5745.000000	PASS

Final measurements


Frequency (MHz)	Level Pre Measurement (dBm)	level (dBm)	Limit (dBm)	Margin (dB)	Result
---	---	---	---	---	---

Pre Measurements

Frequency (MHz)	Level (dBm)	Margin (dB)	Limit (dBm)
18866.875428	-47.8	6.6	-41.2
18902.873533	-47.9	6.6	-41.2
18883.874533	-47.9	6.7	-41.2
18894.873954	-48.0	6.7	-41.2
18873.875059	-48.2	6.9	-41.2
18224.909215	-48.3	7.1	-41.2
18896.873849	-48.3	7.1	-41.2
22709.673175	-48.4	7.1	-41.2
18254.907636	-48.4	7.2	-41.2
18942.871428	-48.4	7.2	-41.2
18855.876007	-48.5	7.3	-41.2
18184.911320	-48.5	7.3	-41.2
18223.909268	-48.5	7.3	-41.2
18900.873638	-48.6	7.3	-41.2
18888.874270	-48.6	7.4	-41.2

Measurement Settings

Start Frequency (MHz)	Stop Frequency (MHz)	Pre Measurement	Final Measurement
30.000000	1000.000000	1	1
1000.000000	5150.000000	2	2
5150.000000	5250.000000	2	2
5250.000000	5350.000000	2	2
5350.000000	5470.000000	2	2
5470.000000	5725.000000	2	2
5725.000000	5850.000000	2	2
5850.000000	7000.000000	2	2
7000.000000	26000.000000	2	2
26000.000000	40000.000000	2	2

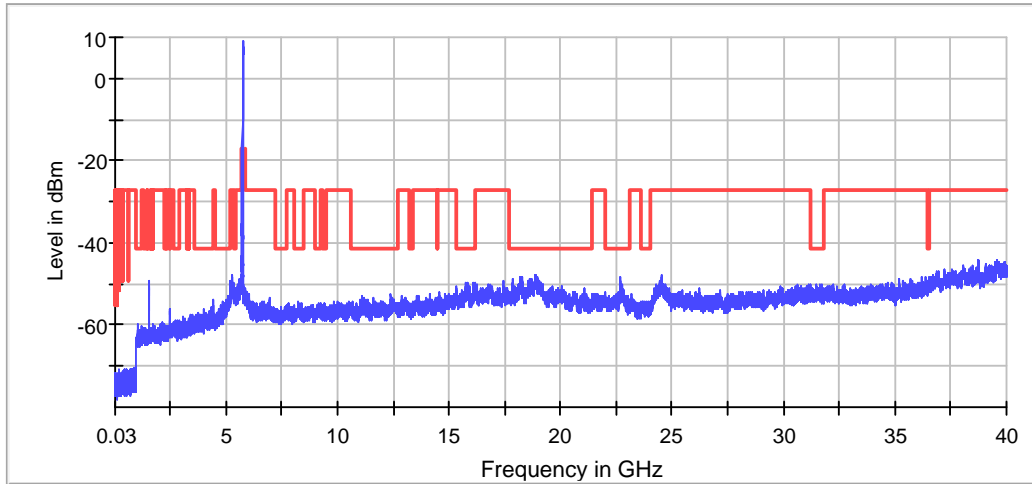

Final Measurement

Setting	Instrument Value	Target Value
Span	ZeroSpan	ZeroSpan
RBW	1.000 MHz	~ 1.000 MHz
VBW	3.000 MHz	~ 3.000 MHz
SweepPoints	10001	~ 10001
SweepTime	50.000 ms	50.000 ms
Reference Level	-20.000 dBm	-20.000 dBm
Attenuation	0.000 dB	0.000 dB
Detector	RMS	RMS
SweepCount	1	1
Filter	3 dB	3 dB
Trace Mode	Clear Write	Clear Write
SweepType	Sweep	AUTO
Preamp	off	off

Power Spectral Density (5785 MHz; 23.6816 MHz)


Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v01r02 and ANSI C63.10

Result

DUT Frequency (MHz)	Frequency (MHz)	PSD (dBm)	Limit Max (dBm)	Result
5785.000000	5778.847427	0.207	30.0	PASS

Ports

Port	Duty Cycle (%)
1	95.562

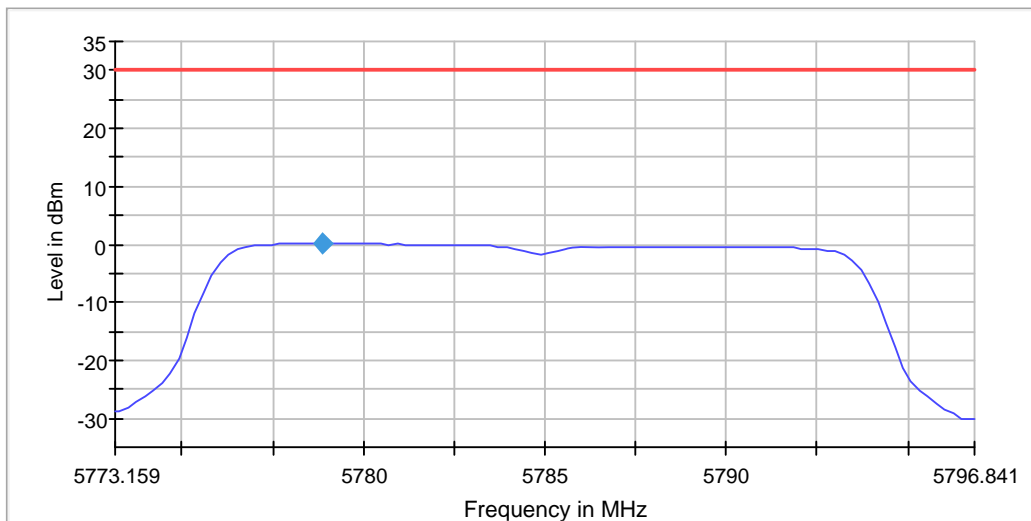

Measurement


Setting	Instrument Value	Target Value
Start Frequency	5.77316 GHz	5.77316 GHz
Stop Frequency	5.79684 GHz	5.79684 GHz
Span	23.682 MHz	23.682 MHz
RBW	1.000 MHz	<= 1.000 MHz
VBW	3.000 MHz	>= 3.000 MHz
SweepPoints	101	~ 47
Sweeptime	2.020 s	2.020 s
Reference Level	-20.000 dBm	-20.000 dBm
Attenuation	0.000 dB	AUTO
Detector	RMS	RMS
SweepCount	3	3
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.30	0.30
Run	3 / max. 15	max. 15
Stable	3 / 3	3

Minimum Emission Bandwidth 6 dB (5785 MHz; 20 MHz)

Test according to FCC title 47 part 15 §15.407(a),(e), KDB 789033 D02 General U-NII Test Procedures New Rules v01r02 and ANSI C63.10

6 dB Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)	Max Level (dBm)	Result
5785.000000	17.755611	0.500000	---	5776.022444	5793.778055	1.6	PASS

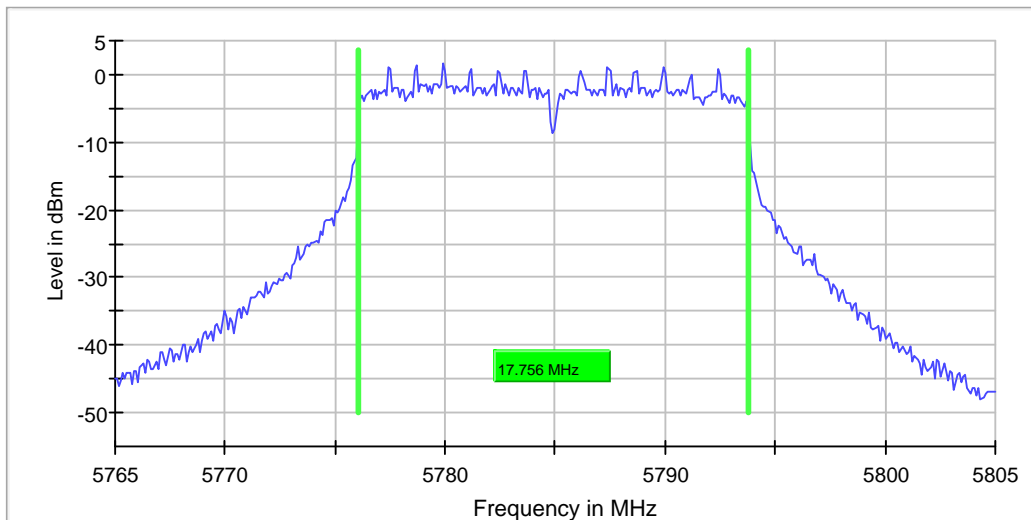

Measurement


Setting	Instrument Value	Target Value
Start Frequency	5.76500 GHz	5.76500 GHz
Stop Frequency	5.80500 GHz	5.80500 GHz
Span	40.000 MHz	40.000 MHz
RBW	100.000 kHz	~ 100.000 kHz
VBW	300.000 kHz	~ 300.000 kHz
SweepPoints	400	~ 400
Sweeptime	56.886 μ s	AUTO
Reference Level	-20.000 dBm	-20.000 dBm
Attenuation	0.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	200	200
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
Sweeptype	FFT	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.30	0.30
Run	40 / max. 150	max. 150
Stable	5 / 5	5

Emission Bandwidth 26 dB (5785 MHz; 20 MHz)

Test according to FCC title 47 part 15 §15.407(a),(e), KDB 789033 D02 General U-NII Test Procedures New Rules v01r02 and ANSI C63.10

26 dB Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)	Max Level (dBm)	Result
5785.000000	23.681593	---	---	5773.059701	5796.741294	2.6	PASS

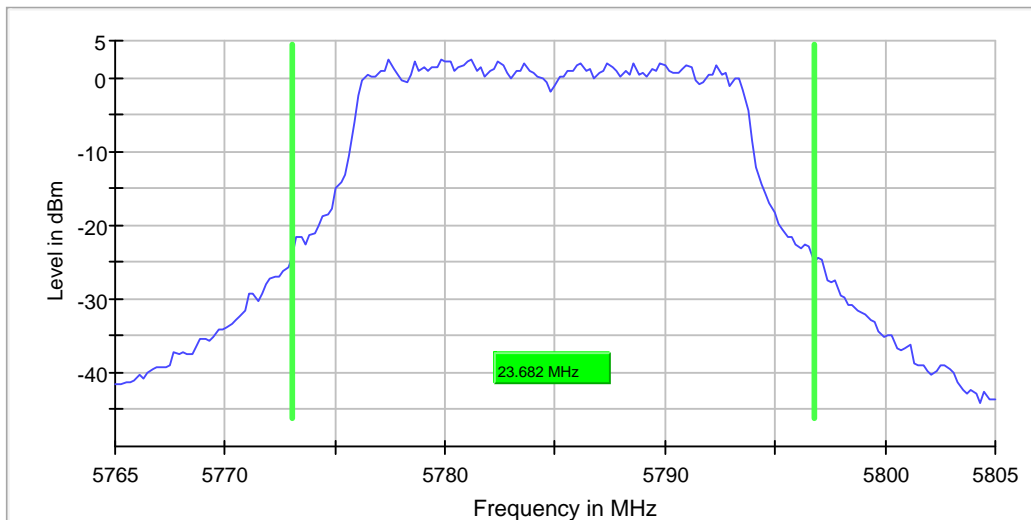

Measurement


Setting	Instrument Value	Target Value
Start Frequency	5.76500 GHz	5.76500 GHz
Stop Frequency	5.80500 GHz	5.80500 GHz
Span	40.000 MHz	40.000 MHz
RBW	200.000 kHz	~ 200.000 kHz
VBW	1.000 MHz	>= 600.000 kHz
SweepPoints	200	~ 200
SweepTime	28.443 μs	AUTO
Reference Level	-10.000 dBm	-10.000 dBm
Attenuation	10.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	200	200
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	FFT	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.30	0.30
Run	39 / max. 150	max. 150
Stable	5 / 5	5

Occupied Channel Bandwidth 99% (5785 MHz; 20 MHz)

Test according to FCC title 47 part 15 §15.407(a),(e), KDB 789033 D02 General U-NII Test Procedures New Rules v01r02 and ANSI C63.10

99 % Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)	Result
5785.000000	17.711443	---	---	5776.044776	5793.756219	PASS

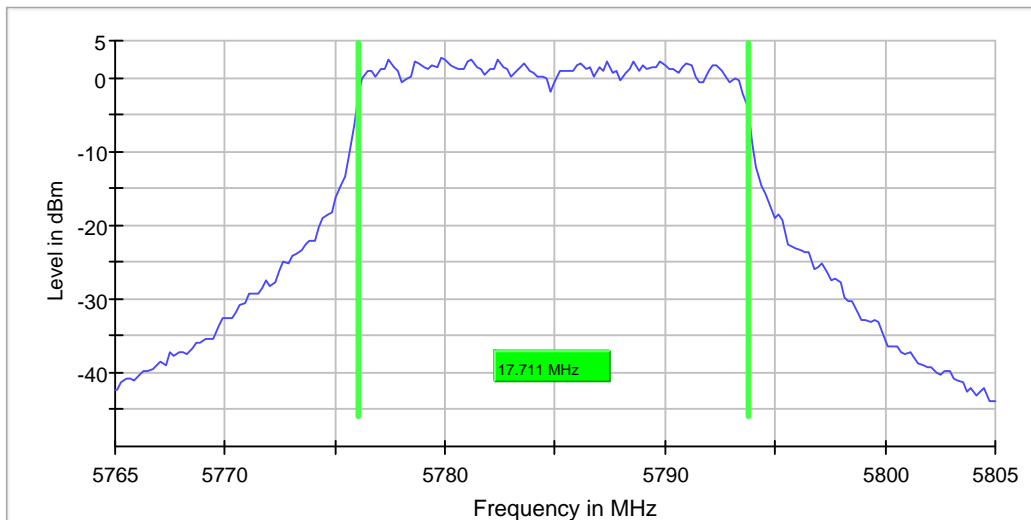

Measurement

Setting	Instrument Value	Target Value
Start Frequency	5.76500 GHz	5.76500 GHz
Stop Frequency	5.80500 GHz	5.80500 GHz
Span	40.000 MHz	40.000 MHz
RBW	200.000 kHz	<= 200.000 kHz
VBW	1.000 MHz	>= 600.000 kHz
SweepPoints	200	~ 200
SweepTime	28.443 μs	AUTO
Reference Level	-10.000 dBm	-10.000 dBm
Attenuation	10.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	200	200
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	FFT	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.30	0.30
Run	61 / max. 150	max. 150
Stable	5 / 5	5

Tx Spurious Emission (5785 MHz; 20 MHz)

Test according to FCC title 47 part 15 §15.407(b), KDB 789033 D02 General U-NII Test Procedures New Rules v01r02 and ANSI C63.10

Result

DUT Frequency (MHz)	Result
5785.000000	PASS

Final measurements


Frequency (MHz)	Level Pre Measurement (dBm)	level (dBm)	Limit (dBm)	Margin (dB)	Result
5395.123967	-47.2	-57.9	-41.2	16.6	PASS

Pre Measurements

Frequency (MHz)	Level (dBm)	Margin (dB)	Limit (dBm)
5395.123967	-47.2	6.0	-41.2
18851.876217	-47.5	6.2	-41.2
18883.874533	-47.6	6.4	-41.2
5352.479339	-47.8	6.6	-41.2
5358.429752	-47.8	6.6	-41.2
5384.214876	-47.8	6.6	-41.2
18201.910426	-47.9	6.6	-41.2
5357.438017	-47.9	6.7	-41.2
18889.874217	-48.0	6.8	-41.2
5394.132231	-48.0	6.8	-41.2
5351.487603	-48.1	6.9	-41.2
18894.873954	-48.2	7.0	-41.2
18858.875849	-48.2	7.0	-41.2
18956.870691	-48.2	7.0	-41.2
18955.870744	-48.2	7.0	-41.2

Measurement Settings

Start Frequency (MHz)	Stop Frequency (MHz)	Pre Measurement	Final Measurement
30.000000	1000.000000	1	1
1000.000000	5150.000000	2	2
5150.000000	5250.000000	2	2
5250.000000	5350.000000	2	2
5350.000000	5470.000000	2	2
5470.000000	5725.000000	2	2
5725.000000	5850.000000	2	2
5850.000000	7000.000000	2	2
7000.000000	26000.000000	2	2
26000.000000	40000.000000	2	2

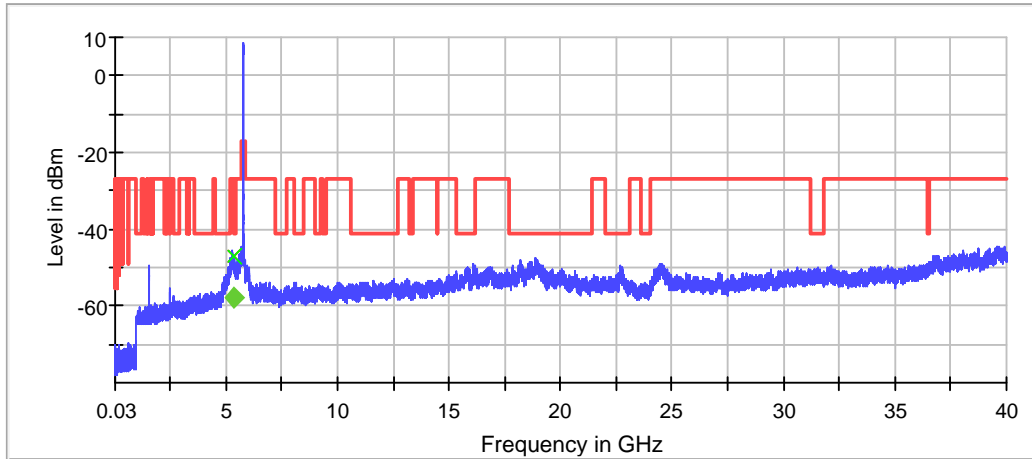

◆ Limit [limit.Result:1] × Threshold [limit 2.Result:1]
◆ Critical [Over Limit.Result:1] ◆ Sum Level [trace.Result:1]

Final Measurement

Setting	Instrument Value	Target Value
Span	ZeroSpan	ZeroSpan
RBW	1.000 MHz	~ 1.000 MHz
VBW	3.000 MHz	~ 3.000 MHz
SweepPoints	10001	~ 10001
Sweeptime	50.000 ms	50.000 ms
Reference Level	-20.000 dBm	-20.000 dBm
Attenuation	0.000 dB	0.000 dB
Detector	RMS	RMS
SweepCount	1	1
Filter	3 dB	3 dB
Trace Mode	Clear Write	Clear Write
SweepType	Sweep	AUTO
Preamp	off	off

Power Spectral Density (5825 MHz; 23.2836 MHz)


Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v01r02 and ANSI C63.10

Result

DUT Frequency (MHz)	Frequency (MHz)	PSD (dBm)	Limit Max (dBm)	Result
5825.000000	5818.722559	0.283	30.0	PASS

Ports

Port	Duty Cycle (%)
1	95.173

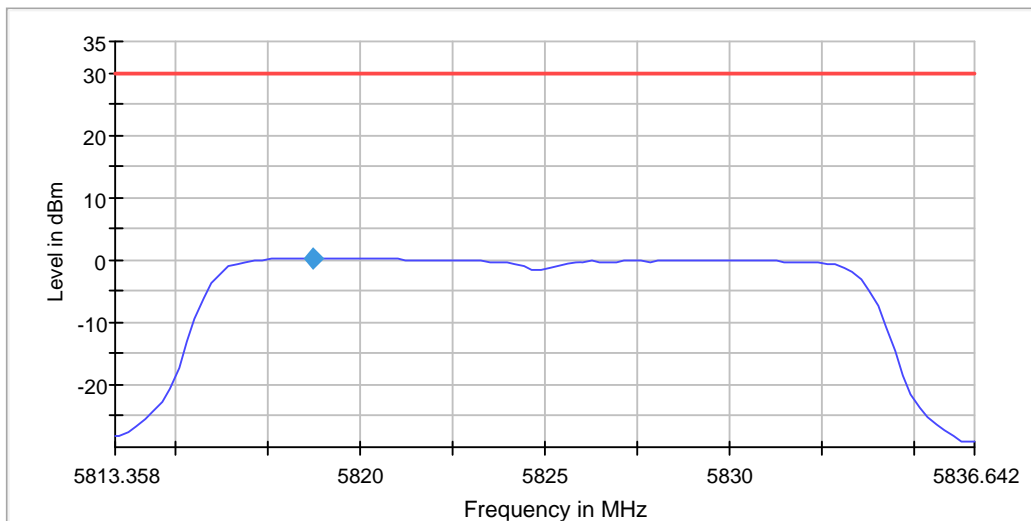

Measurement


Setting	Instrument Value	Target Value
Start Frequency	5.81336 GHz	5.81336 GHz
Stop Frequency	5.83664 GHz	5.83664 GHz
Span	23.284 MHz	23.284 MHz
RBW	1.000 MHz	<= 1.000 MHz
VBW	3.000 MHz	>= 3.000 MHz
SweepPoints	101	~ 47
SweepTime	2.020 s	2.020 s
Reference Level	-20.000 dBm	-20.000 dBm
Attenuation	0.000 dB	AUTO
Detector	RMS	RMS
SweepCount	3	3
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.30	0.30
Run	3 / max. 15	max. 15
Stable	3 / 3	3

Minimum Emission Bandwidth 6 dB (5825 MHz; 20 MHz)

Test according to FCC title 47 part 15 §15.407(a),(e), KDB 789033 D02 General U-NII Test Procedures New Rules v01r02 and ANSI C63.10

6 dB Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)	Max Level (dBm)	Result
5825.000000	17.755611	0.500000	---	5816.022444	5833.778055	2.0	PASS

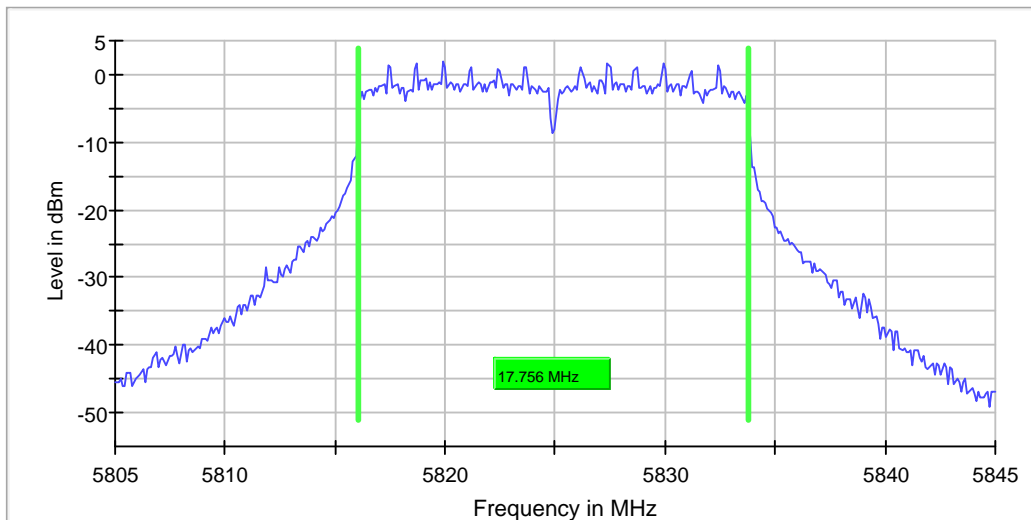

Measurement


Setting	Instrument Value	Target Value
Start Frequency	5.80500 GHz	5.80500 GHz
Stop Frequency	5.84500 GHz	5.84500 GHz
Span	40.000 MHz	40.000 MHz
RBW	100.000 kHz	~ 100.000 kHz
VBW	300.000 kHz	~ 300.000 kHz
SweepPoints	400	~ 400
SweepTime	56.886 μs	AUTO
Reference Level	-20.000 dBm	-20.000 dBm
Attenuation	0.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	200	200
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	FFT	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.30	0.30
Run	71 / max. 150	max. 150
Stable	5 / 5	5

Emission Bandwidth 26 dB (5825 MHz; 20 MHz)

Test according to FCC title 47 part 15 §15.407(a),(e), KDB 789033 D02 General U-NII Test Procedures New Rules v01r02 and ANSI C63.10

26 dB Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)	Max Level (dBm)	Result
5825.000000	23.283583	---	---	5813.059701	5836.343284	2.8	PASS

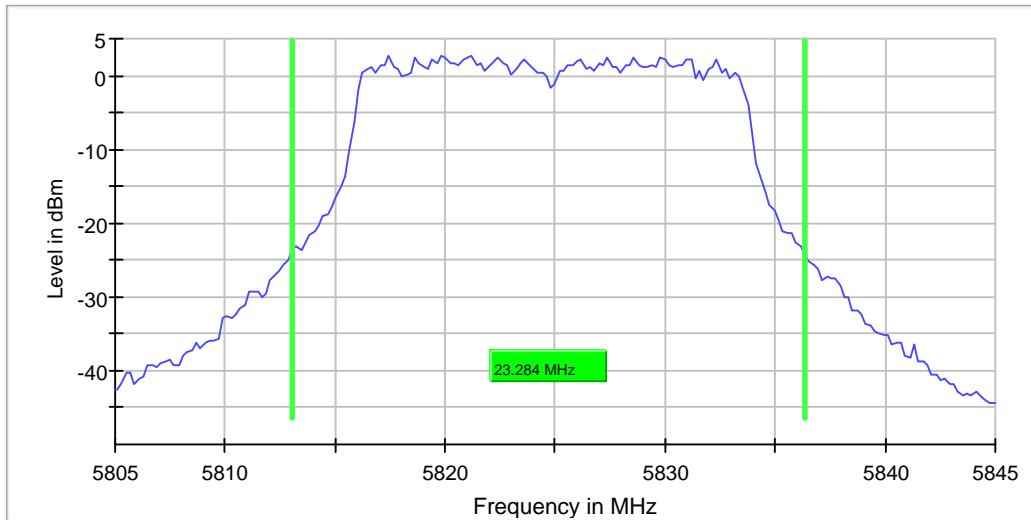

Measurement


Setting	Instrument Value	Target Value
Start Frequency	5.80500 GHz	5.80500 GHz
Stop Frequency	5.84500 GHz	5.84500 GHz
Span	40.000 MHz	40.000 MHz
RBW	200.000 kHz	~ 200.000 kHz
VBW	1.000 MHz	>= 600.000 kHz
SweepPoints	200	~ 200
Sweeptime	28.443 μs	AUTO
Reference Level	-10.000 dBm	-10.000 dBm
Attenuation	10.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	200	200
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
Sweeptype	FFT	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.30	0.30
Run	32 / max. 150	max. 150
Stable	5 / 5	5

Occupied Channel Bandwidth 99% (5825 MHz; 20 MHz)

Test according to FCC title 47 part 15 §15.407(a),(e), KDB 789033 D02 General U-NII Test Procedures New Rules v01r02 and ANSI C63.10

99 % Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)	Result
5825.000000	17.910448	---	---	5815.845771	5833.756219	PASS

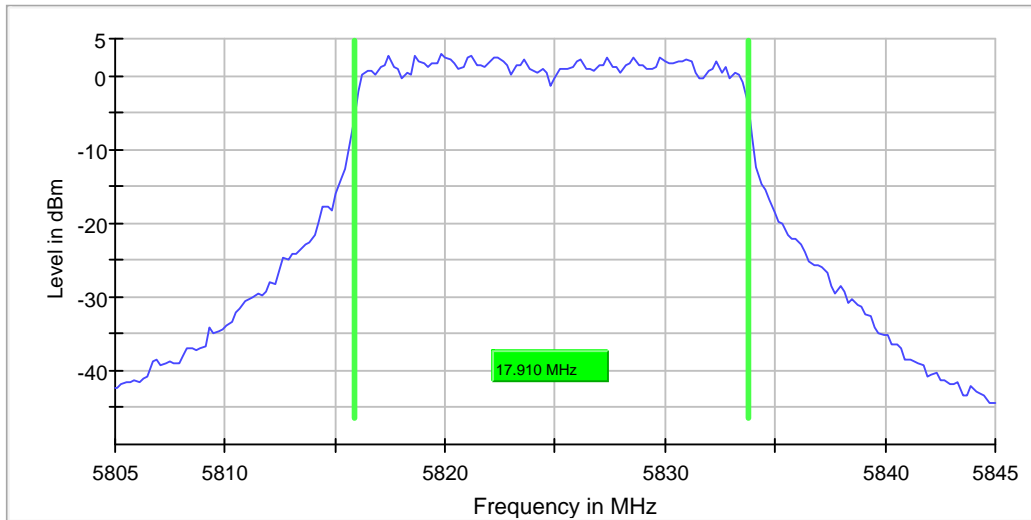

Measurement

Setting	Instrument Value	Target Value
Start Frequency	5.80500 GHz	5.80500 GHz
Stop Frequency	5.84500 GHz	5.84500 GHz
Span	40.000 MHz	40.000 MHz
RBW	200.000 kHz	<= 200.000 kHz
VBW	1.000 MHz	>= 600.000 kHz
SweepPoints	200	~ 200
SweepTime	28.443 μs	AUTO
Reference Level	-10.000 dBm	-10.000 dBm
Attenuation	10.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	200	200
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	FFT	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.30	0.30
Run	37 / max. 150	max. 150
Stable	5 / 5	5

Band Edge high (5825 MHz; 20 MHz)

Test according to FCC title 47 part 15 §15.407(b), KDB 789033 D02 General U-NII Test Procedures New Rules v01r02 and ANSI C63.10

Result


DUT Frequency (MHz)	Result
5825.000000	PASS

Inband Peak

Frequency (MHz)	Level (dBm)
5817.878486	1.3

Measurements

Frequency (MHz)	Level (dBm)	Margin (dB)	Limit (dBm)	Result
7304.914846	-63.9	22.7	-41.2	PASS
7306.914106	-63.9	22.7	-41.2	PASS
7296.417993	-64.0	22.8	-41.2	PASS
7303.415402	-64.0	22.8	-41.2	PASS
7306.414291	-64.0	22.8	-41.2	PASS
7425.870048	-64.1	22.8	-41.2	PASS
7302.915587	-64.1	22.8	-41.2	PASS
7295.918178	-64.1	22.8	-41.2	PASS
7299.416883	-64.1	22.8	-41.2	PASS
7301.416142	-64.1	22.8	-41.2	PASS
7428.868937	-64.1	22.8	-41.2	PASS
7296.917808	-64.1	22.8	-41.2	PASS
7308.913365	-64.1	22.8	-41.2	PASS
7300.416512	-64.1	22.9	-41.2	PASS
7290.920030	-64.1	22.9	-41.2	PASS

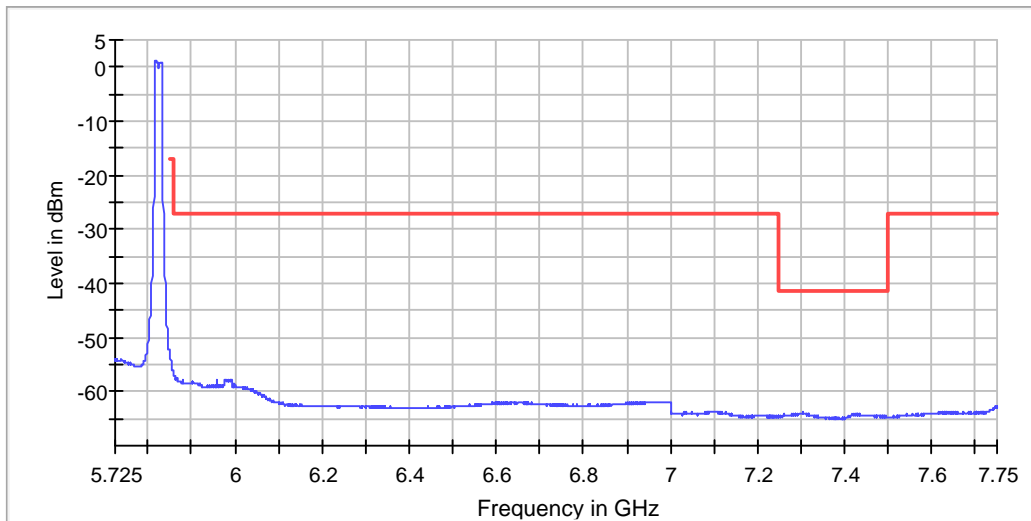

Measurement 1

Setting	Instrument Value	Target Value
RBW	1.000 MHz	<= 1.000 MHz
VBW	3.000 MHz	>= 3.000 MHz
SweepPoints	250	~ 250
SweepTime	250.000 ms	250.000 ms
Reference Level	-20.000 dBm	-20.000 dBm
Attenuation	0.000 dB	AUTO
Detector	RMS	RMS
SweepCount	5	5
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.30	0.30
Run	3 / max. 15	max. 15
Stable	3 / 3	3

Measurement 2

Setting	Instrument Value	Target Value
RBW	1.000 MHz	<= 1.000 MHz
VBW	3.000 MHz	>= 3.000 MHz
SweepPoints	1100	~ 1100
SweepTime	1.100 s	1.100 s
Reference Level	-20.000 dBm	-20.000 dBm
Attenuation	0.000 dB	AUTO
Detector	RMS	RMS
SweepCount	5	5
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.30	0.30
Run	3 / max. 15	max. 15
Stable	3 / 3	3

Tx Spurious Emission (5825 MHz; 20 MHz)

Test according to FCC title 47 part 15 §15.407(b), KDB 789033 D02 General U-NII Test Procedures New Rules v01r02 and ANSI C63.10

Result

DUT Frequency (MHz)	Result
5825.000000	PASS

Final measurements


Frequency (MHz)	Level Pre Measurement (dBm)	level (dBm)	Limit (dBm)	Margin (dB)	Result
18917.872744	-47.0	-59.1	-41.2	17.9	PASS

Pre Measurements

Frequency (MHz)	Level (dBm)	Margin (dB)	Limit (dBm)
18917.872744	-47.0	5.7	-41.2
5350.000000	-47.3	6.1	-41.2
18240.908373	-47.4	6.2	-41.2
5351.487603	-47.6	6.4	-41.2
18853.876112	-48.0	6.7	-41.2
18902.873533	-48.0	6.8	-41.2
18891.874112	-48.2	6.9	-41.2
5361.404959	-48.2	6.9	-41.2
18712.883532	-48.2	7.0	-41.2
5362.396694	-48.2	7.0	-41.2
5439.752066	-48.3	7.0	-41.2
18839.876849	-48.3	7.1	-41.2
36432.754803	-48.4	7.2	-41.2
18912.873007	-48.4	7.2	-41.2
18890.874165	-48.5	7.2	-41.2

Measurement Settings

Start Frequency (MHz)	Stop Frequency (MHz)	Pre Measurement	Final Measurement
30.000000	1000.000000	1	1
1000.000000	5150.000000	2	2
5150.000000	5250.000000	2	2
5250.000000	5350.000000	2	2
5350.000000	5470.000000	2	2
5470.000000	5725.000000	2	2
5725.000000	5850.000000	2	2
5850.000000	7000.000000	2	2
7000.000000	26000.000000	2	2
26000.000000	40000.000000	2	2

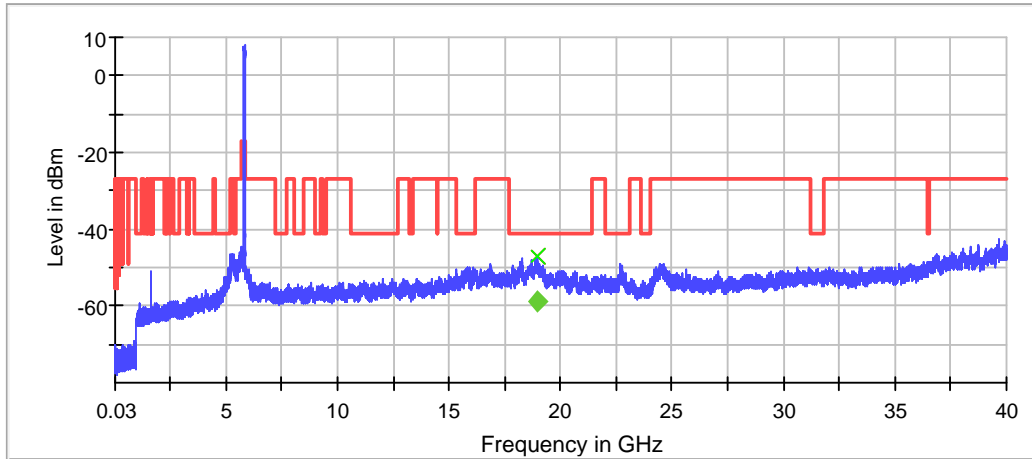

— Limit [limit.Result:1] x Threshold [limit 2.Result:1]
◆ Critical [Over Limit.Result:1] ◆ Sum Level [trace.Result:1]

Final Measurement

Setting	Instrument Value	Target Value
Span	ZeroSpan	ZeroSpan
RBW	1.000 MHz	~ 1.000 MHz
VBW	3.000 MHz	~ 3.000 MHz
SweepPoints	10001	~ 10001
Sweeptime	50.000 ms	50.000 ms
Reference Level	-20.000 dBm	-20.000 dBm
Attenuation	0.000 dB	0.000 dB
Detector	RMS	RMS
SweepCount	1	1
Filter	3 dB	3 dB
Trace Mode	Clear Write	Clear Write
SweepType	Sweep	AUTO
Preamp	off	off

UNII-3 ANT2 NHT40 Mode Power Spectral Density (5755 MHz; 43.8806 MHz)


Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v01r02 and ANSI C63.10

Result

DUT Frequency (MHz)	Frequency (MHz)	PSD (dBm)	Limit Max (dBm)	Result
5755.000000	5742.309042	-2.573	30.0	PASS

Ports

Port	Duty Cycle (%)
1	93.234

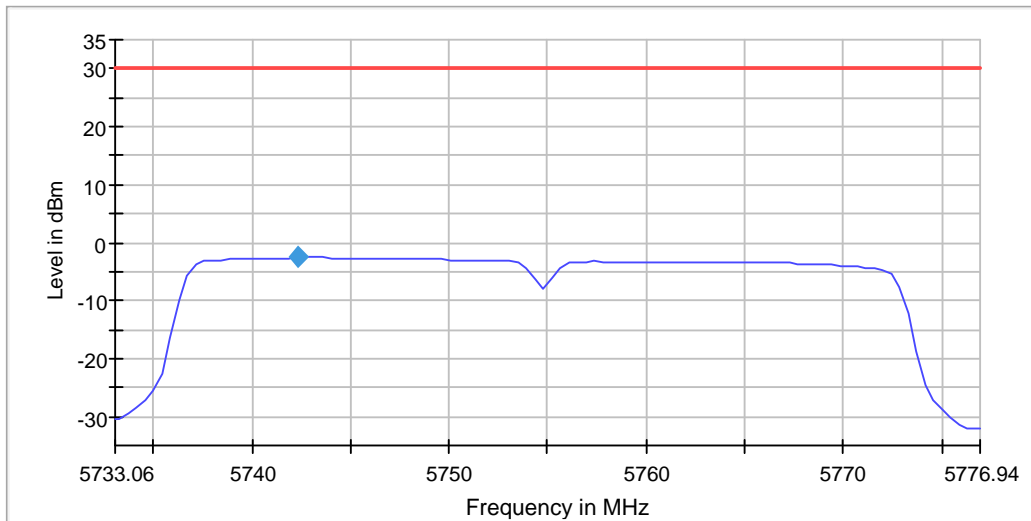

Measurement


Setting	Instrument Value	Target Value
Start Frequency	5.73306 GHz	5.73306 GHz
Stop Frequency	5.77694 GHz	5.77694 GHz
Span	43.881 MHz	43.881 MHz
RBW	1.000 MHz	<= 1.000 MHz
VBW	3.000 MHz	>= 3.000 MHz
SweepPoints	101	~ 88
SweepTime	2.020 s	2.020 s
Reference Level	-20.000 dBm	-20.000 dBm
Attenuation	0.000 dB	AUTO
Detector	RMS	RMS
SweepCount	3	3
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.30	0.30
Run	3 / max. 15	max. 15
Stable	3 / 3	3

Minimum Emission Bandwidth 6 dB (5755 MHz; 40 MHz)

Test according to FCC title 47 part 15 §15.407(a),(e), KDB 789033 D02 General U-NII Test Procedures New Rules v01r02 and ANSI C63.10

6 dB Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)	Max Level (dBm)	Result
5755.000000	36.154807	0.500000	---	5736.722846	5772.877653	-1.1	PASS

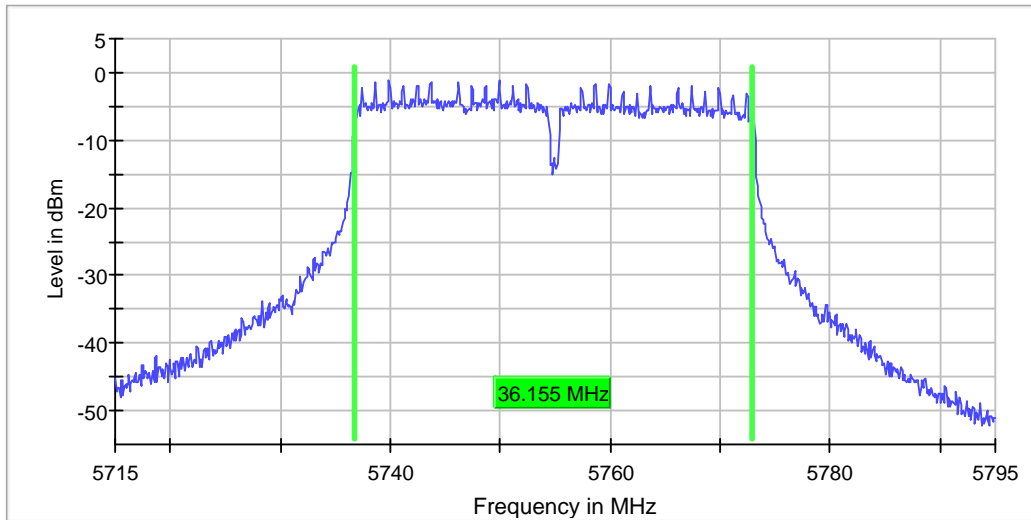

Measurement


Setting	Instrument Value	Target Value
Start Frequency	5.71500 GHz	5.71500 GHz
Stop Frequency	5.79500 GHz	5.79500 GHz
Span	80.000 MHz	80.000 MHz
RBW	100.000 kHz	~ 100.000 kHz
VBW	300.000 kHz	~ 300.000 kHz
SweepPoints	800	~ 800
Sweeptime	94.810 μs	AUTO
Reference Level	-20.000 dBm	-20.000 dBm
Attenuation	0.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	200	200
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
Sweeptype	FFT	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.30	0.30
Run	74 / max. 150	max. 150
Stable	5 / 5	5

Emission Bandwidth 26 dB (5755 MHz; 40 MHz)

Test according to FCC title 47 part 15 §15.407(a),(e), KDB 789033 D02 General U-NII Test Procedures New Rules v01r02 and ANSI C63.10

26 dB Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)	Max Level (dBm)	Result
5755.000000	43.880597	---	---	5732.462687	5776.343284	1.7	PASS

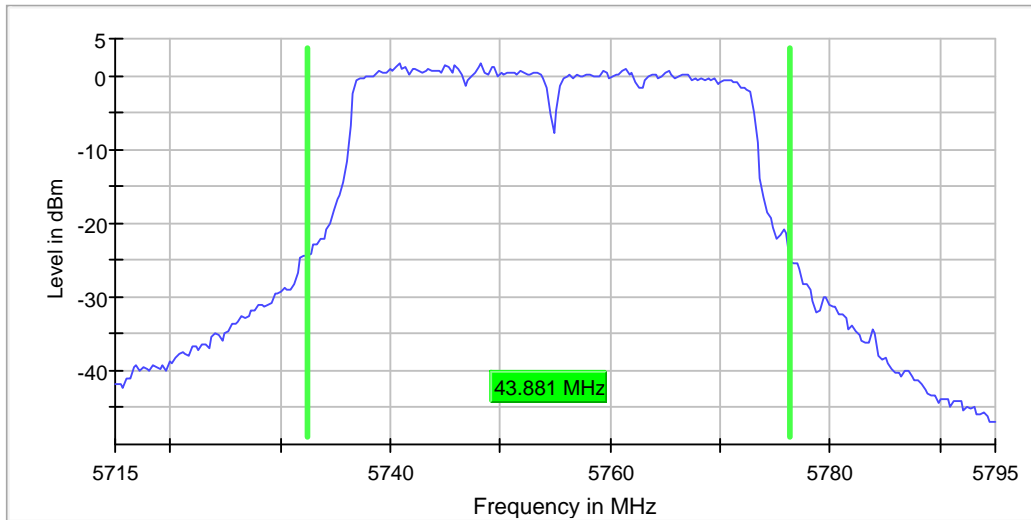

Measurement


Setting	Instrument Value	Target Value
Start Frequency	5.71500 GHz	5.71500 GHz
Stop Frequency	5.79500 GHz	5.79500 GHz
Span	80.000 MHz	80.000 MHz
RBW	300.000 kHz	~ 400.000 kHz
VBW	1.000 MHz	>= 900.000 kHz
SweepPoints	267	~ 267
Sweeptime	31.603 μs	AUTO
Reference Level	-20.000 dBm	-20.000 dBm
Attenuation	0.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	200	200
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
Sweeptype	FFT	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.30	0.30
Run	56 / max. 150	max. 150
Stable	5 / 5	5

Occupied Channel Bandwidth 99% (5755 MHz; 40 MHz)

Test according to FCC title 47 part 15 §15.407(a),(e), KDB 789033 D02 General U-NII Test Procedures New Rules v01r02 and ANSI C63.10

99 % Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)	Result
5755.000000	36.417910	---	---	5736.641791	5773.059701	PASS

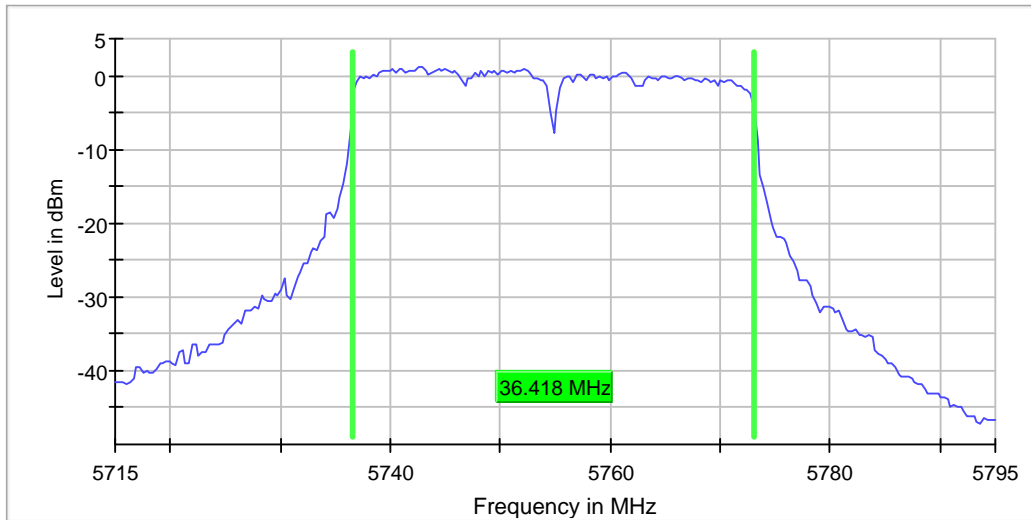

Measurement

Setting	Instrument Value	Target Value
Start Frequency	5.71500 GHz	5.71500 GHz
Stop Frequency	5.79500 GHz	5.79500 GHz
Span	80.000 MHz	80.000 MHz
RBW	300.000 kHz	<= 400.000 kHz
VBW	1.000 MHz	>= 900.000 kHz
SweepPoints	267	~ 267
Sweeptime	31.603 μs	AUTO
Reference Level	-20.000 dBm	-20.000 dBm
Attenuation	0.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	200	200
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
Sweeptype	FFT	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.30	0.30
Run	38 / max. 150	max. 150
Stable	5 / 5	5

Band Edge low (5755 MHz; 40 MHz)

Test according to FCC title 47 part 15 §15.407(b), KDB 789033 D02 General U-NII Test Procedures New Rules v01r02 and ANSI C63.10

Result


DUT Frequency (MHz)	Result
5755.000000	PASS

Inband Peak

Frequency (MHz)	Level (dBm)
5742.679283	-2.0

Measurements

Frequency (MHz)	Level (dBm)	Margin (dB)	Limit (dBm)	Result
5357.240346	-58.8	17.5	-41.2	PASS
5351.248336	-58.8	17.6	-41.2	PASS
5353.245672	-58.8	17.6	-41.2	PASS
5352.746338	-58.8	17.6	-41.2	PASS
5350.749001	-58.8	17.6	-41.2	PASS
5359.737017	-58.9	17.6	-41.2	PASS
5354.743675	-58.9	17.6	-41.2	PASS
5353.745007	-58.9	17.7	-41.2	PASS
5358.738349	-58.9	17.7	-41.2	PASS
5355.243009	-58.9	17.7	-41.2	PASS
5358.239015	-58.9	17.7	-41.2	PASS
5351.747670	-58.9	17.7	-41.2	PASS
5357.739680	-58.9	17.7	-41.2	PASS
5354.244341	-58.9	17.7	-41.2	PASS
5360.236352	-58.9	17.7	-41.2	PASS

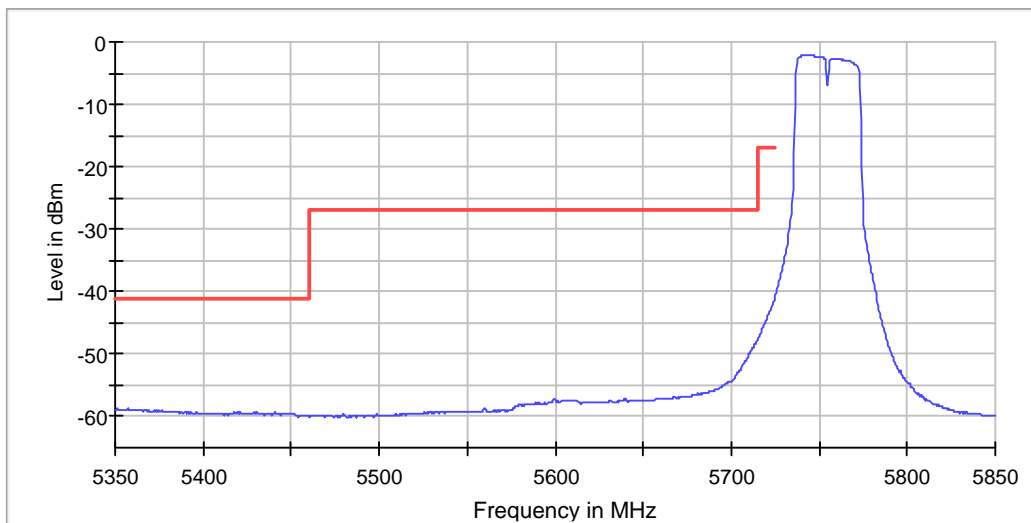

Measurement 1

Setting	Instrument Value	Target Value
RBW	1.000 MHz	<= 1.000 MHz
VBW	3.000 MHz	>= 3.000 MHz
SweepPoints	250	~ 250
SweepTime	250.000 ms	250.000 ms
Reference Level	-20.000 dBm	-20.000 dBm
Attenuation	0.000 dB	AUTO
Detector	RMS	RMS
SweepCount	5	5
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.30	0.30
Run	3 / max. 15	max. 15
Stable	3 / 3	3

Measurement 2

Setting	Instrument Value	Target Value
RBW	1.000 MHz	<= 1.000 MHz
VBW	3.000 MHz	>= 3.000 MHz
SweepPoints	750	~ 750
SweepTime	750.000 ms	750.000 ms
Reference Level	-20.000 dBm	-20.000 dBm
Attenuation	0.000 dB	AUTO
Detector	RMS	RMS
SweepCount	5	5
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.30	0.30
Run	3 / max. 15	max. 15
Stable	3 / 3	3

Tx Spurious Emission (5755 MHz; 40 MHz)

Test according to FCC title 47 part 15 §15.407(b), KDB 789033 D02 General U-NII Test Procedures New Rules v01r02 and ANSI C63.10

Result

DUT Frequency (MHz)	Result
5755.000000	PASS

Final measurements


Frequency (MHz)	Level Pre Measurement (dBm)	level (dBm)	Limit (dBm)	Margin (dB)	Result
18165.912320	-47.2	-60.4	-41.2	19.1	PASS

Pre Measurements

Frequency (MHz)	Level (dBm)	Margin (dB)	Limit (dBm)
18165.912320	-47.2	6.0	-41.2
18192.910899	-47.8	6.5	-41.2
18934.871849	-47.9	6.7	-41.2
18863.875585	-48.2	7.0	-41.2
18203.910321	-48.3	7.1	-41.2
18853.876112	-48.4	7.1	-41.2
18888.874270	-48.4	7.2	-41.2
18209.910005	-48.5	7.2	-41.2
18882.874586	-48.6	7.3	-41.2
18172.911952	-48.7	7.4	-41.2
18905.873375	-48.7	7.5	-41.2
18906.873322	-48.7	7.5	-41.2
18896.873849	-48.8	7.6	-41.2
18966.870165	-48.9	7.6	-41.2
18842.876691	-48.9	7.7	-41.2

Measurement Settings

Start Frequency (MHz)	Stop Frequency (MHz)	Pre Measurement	Final Measurement
30.000000	1000.000000	1	1
1000.000000	5150.000000	2	2
5150.000000	5250.000000	2	2
5250.000000	5350.000000	2	2
5350.000000	5470.000000	2	2
5470.000000	5725.000000	2	2
5725.000000	5850.000000	2	2
5850.000000	7000.000000	2	2
7000.000000	26000.000000	2	2
26000.000000	40000.000000	2	2

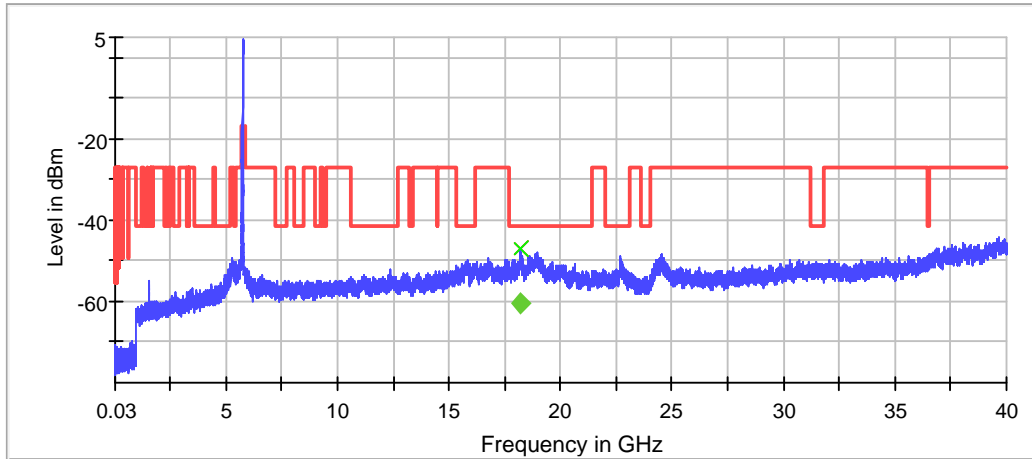

— Limit [limit.Result:1] x Threshold [limit 2.Result:1]
◆ Critical [Over Limit.Result:1] ◆ Sum Level [trace.Result:1]

Final Measurement

Setting	Instrument Value	Target Value
Span	ZeroSpan	ZeroSpan
RBW	1.000 MHz	~ 1.000 MHz
VBW	3.000 MHz	~ 3.000 MHz
SweepPoints	10001	~ 10001
Sweeptime	50.000 ms	50.000 ms
Reference Level	-20.000 dBm	-20.000 dBm
Attenuation	0.000 dB	0.000 dB
Detector	RMS	RMS
SweepCount	1	1
Filter	3 dB	3 dB
Trace Mode	Clear Write	Clear Write
SweepType	Sweep	AUTO
Preamp	off	off

Power Spectral Density (5795 MHz; 44.1791 MHz)


Test according to FCC title 47 part 15 §15.407(a), KDB 789033 D02 General U-NII Test Procedures New Rules v01r02 and ANSI C63.10

Result

DUT Frequency (MHz)	Frequency (MHz)	PSD (dBm)	Limit Max (dBm)	Result
5795.000000	5782.655840	-2.683	30.0	PASS

Ports

Port	Duty Cycle (%)
1	93.241

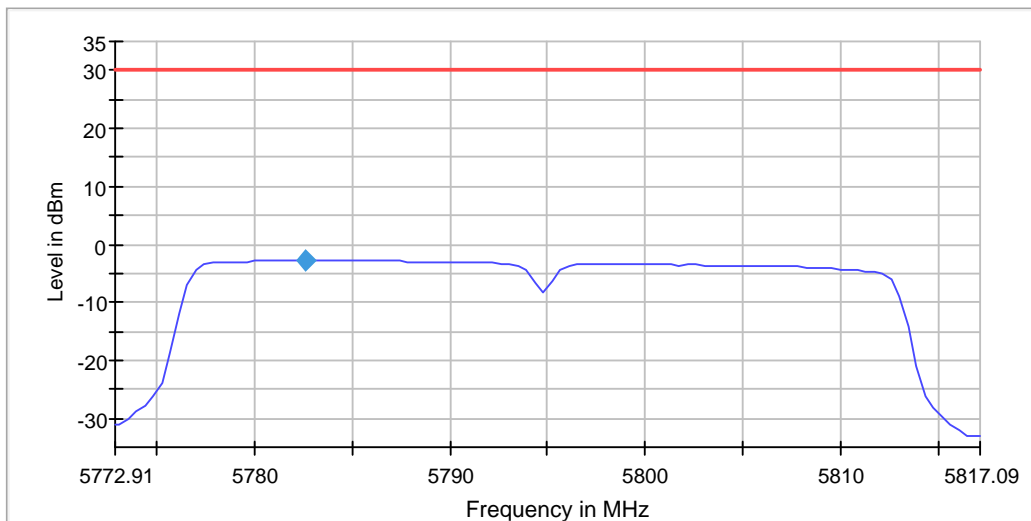

Measurement


Setting	Instrument Value	Target Value
Start Frequency	5.77291 GHz	5.77291 GHz
Stop Frequency	5.81709 GHz	5.81709 GHz
Span	44.179 MHz	44.179 MHz
RBW	1.000 MHz	<= 1.000 MHz
VBW	3.000 MHz	>= 3.000 MHz
SweepPoints	101	~ 88
SweepTime	2.020 s	2.020 s
Reference Level	-20.000 dBm	-20.000 dBm
Attenuation	0.000 dB	AUTO
Detector	RMS	RMS
SweepCount	3	3
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.30	0.30
Run	3 / max. 15	max. 15
Stable	3 / 3	3

Minimum Emission Bandwidth 6 dB (5795 MHz; 40 MHz)

Test according to FCC title 47 part 15 §15.407(a),(e), KDB 789033 D02 General U-NII Test Procedures New Rules v01r02 and ANSI C63.10

6 dB Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)	Max Level (dBm)	Result
5795.000000	36.454432	0.500000	---	5776.722846	5813.177278	-1.4	PASS

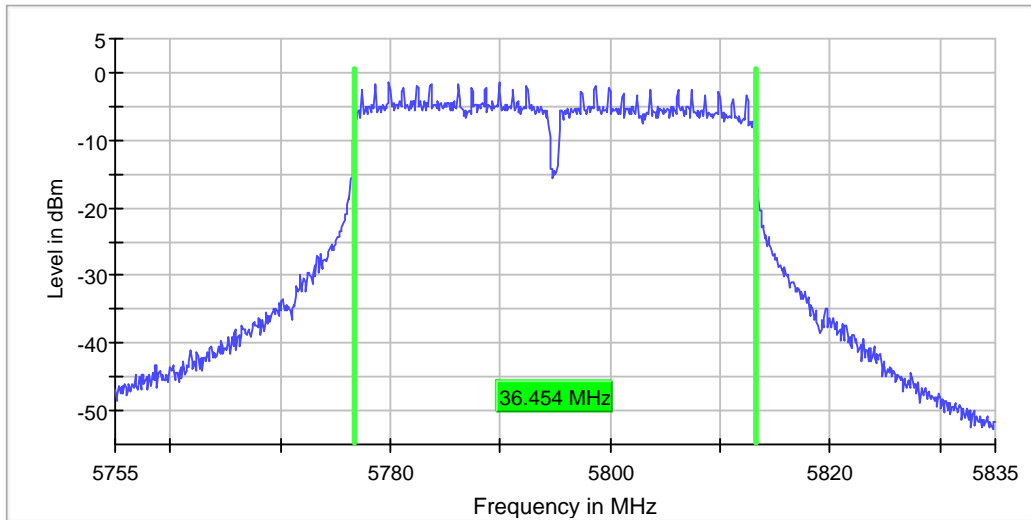

Measurement


Setting	Instrument Value	Target Value
Start Frequency	5.75500 GHz	5.75500 GHz
Stop Frequency	5.83500 GHz	5.83500 GHz
Span	80.000 MHz	80.000 MHz
RBW	100.000 kHz	~ 100.000 kHz
VBW	300.000 kHz	~ 300.000 kHz
SweepPoints	800	~ 800
SweepTime	94.810 μs	AUTO
Reference Level	-20.000 dBm	-20.000 dBm
Attenuation	0.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	200	200
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	FFT	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.30	0.30
Run	92 / max. 150	max. 150
Stable	5 / 5	5

Emission Bandwidth 26 dB (5795 MHz; 40 MHz)

Test according to FCC title 47 part 15 §15.407(a),(e), KDB 789033 D02 General U-NII Test Procedures New Rules v01r02 and ANSI C63.10

26 dB Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)	Max Level (dBm)	Result
5795.000000	44.179105	---	---	5772.164179	5816.343284	1.1	PASS

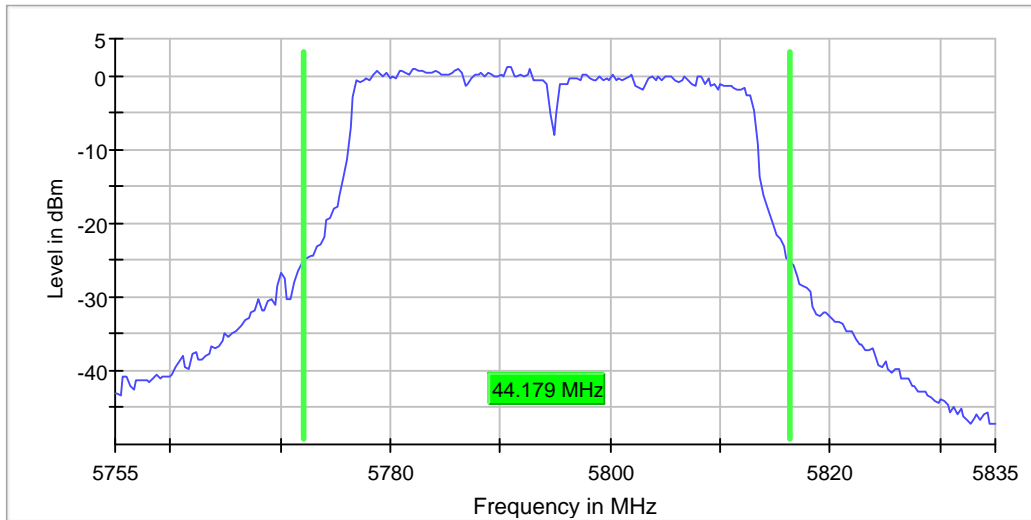

Measurement


Setting	Instrument Value	Target Value
Start Frequency	5.75500 GHz	5.75500 GHz
Stop Frequency	5.83500 GHz	5.83500 GHz
Span	80.000 MHz	80.000 MHz
RBW	300.000 kHz	~ 400.000 kHz
VBW	1.000 MHz	>= 900.000 kHz
SweepPoints	267	~ 267
Sweeptime	31.603 μs	AUTO
Reference Level	-20.000 dBm	-20.000 dBm
Attenuation	0.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	200	200
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
Sweeptype	FFT	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.30	0.30
Run	47 / max. 150	max. 150
Stable	5 / 5	5

Occupied Channel Bandwidth 99% (5795 MHz; 40 MHz)

Test according to FCC title 47 part 15 §15.407(a),(e), KDB 789033 D02 General U-NII Test Procedures New Rules v01r02 and ANSI C63.10

99 % Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)	Result
5795.000000	36.119403	---	---	5776.641791	5812.761194	PASS

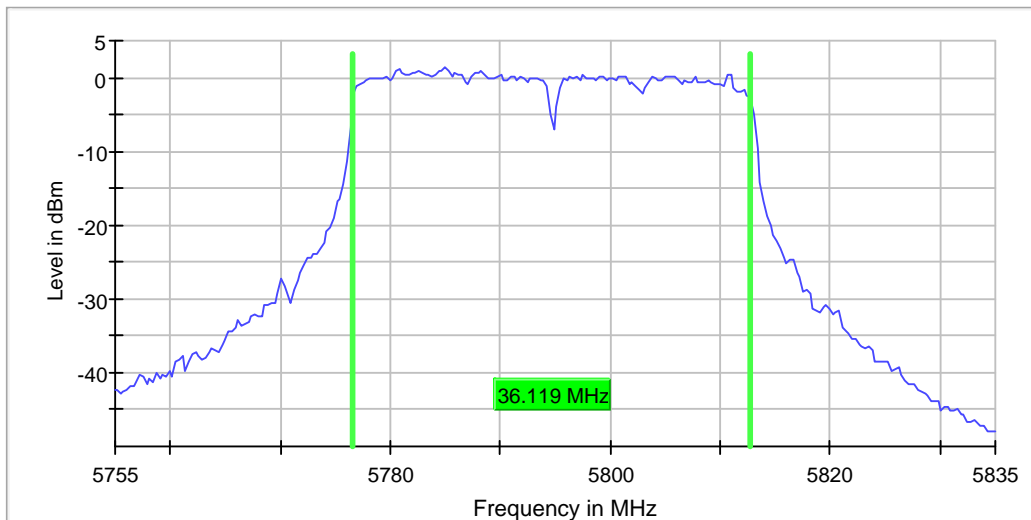

Measurement

Setting	Instrument Value	Target Value
Start Frequency	5.75500 GHz	5.75500 GHz
Stop Frequency	5.83500 GHz	5.83500 GHz
Span	80.000 MHz	80.000 MHz
RBW	300.000 kHz	<= 400.000 kHz
VBW	1.000 MHz	>= 900.000 kHz
SweepPoints	267	~ 267
Sweeptime	31.603 μs	AUTO
Reference Level	-20.000 dBm	-20.000 dBm
Attenuation	0.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	200	200
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
Sweeptype	FFT	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.30	0.30
Run	56 / max. 150	max. 150
Stable	5 / 5	5

Band Edge high (5795 MHz; 40 MHz)

Test according to FCC title 47 part 15 §15.407(b), KDB 789033 D02 General U-NII Test Procedures New Rules v01r02 and ANSI C63.10

Result


DUT Frequency (MHz)	Result
5795.000000	PASS

Inband Peak

Frequency (MHz)	Level (dBm)
5782.519920	-2.3

Measurements

Frequency (MHz)	Level (dBm)	Margin (dB)	Limit (dBm)	Result
7299.416883	-64.0	22.8	-41.2	PASS
7304.914846	-64.0	22.8	-41.2	PASS
7294.418734	-64.1	22.8	-41.2	PASS
7295.918178	-64.1	22.8	-41.2	PASS
7299.916698	-64.1	22.9	-41.2	PASS
7297.917438	-64.1	22.9	-41.2	PASS
7300.416512	-64.1	22.9	-41.2	PASS
7303.415402	-64.1	22.9	-41.2	PASS
7289.420585	-64.1	22.9	-41.2	PASS
7305.914476	-64.1	22.9	-41.2	PASS
7303.915217	-64.1	22.9	-41.2	PASS
7300.916327	-64.2	22.9	-41.2	PASS
7301.915957	-64.2	22.9	-41.2	PASS
7292.919289	-64.2	22.9	-41.2	PASS
7298.417253	-64.2	22.9	-41.2	PASS

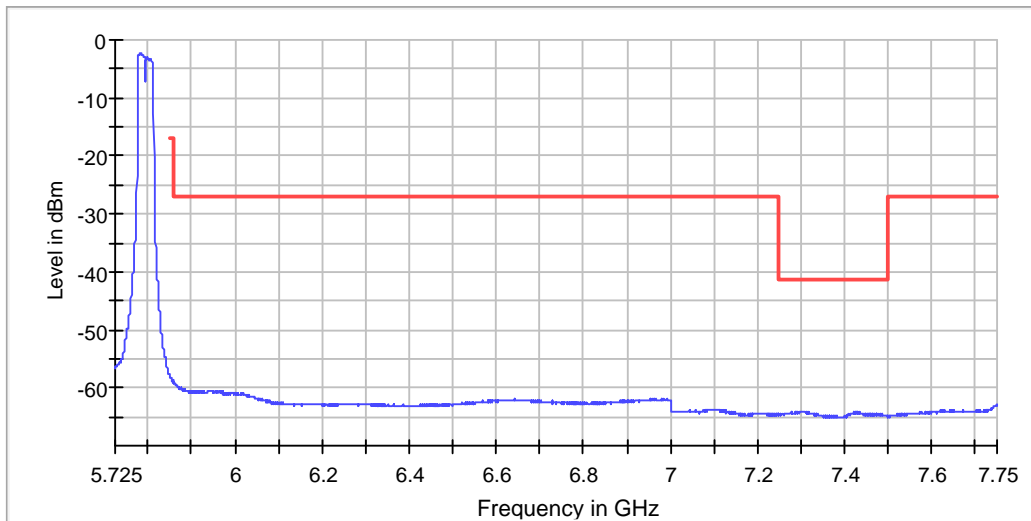

Measurement 1

Setting	Instrument Value	Target Value
RBW	1.000 MHz	<= 1.000 MHz
VBW	3.000 MHz	>= 3.000 MHz
SweepPoints	250	~ 250
SweepTime	250.000 ms	250.000 ms
Reference Level	-20.000 dBm	-20.000 dBm
Attenuation	0.000 dB	AUTO
Detector	RMS	RMS
SweepCount	5	5
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.30	0.30
Run	3 / max. 15	max. 15
Stable	3 / 3	3

Measurement 2

Setting	Instrument Value	Target Value
RBW	1.000 MHz	<= 1.000 MHz
VBW	3.000 MHz	>= 3.000 MHz
SweepPoints	1100	~ 1100
SweepTime	1.100 s	1.100 s
Reference Level	-20.000 dBm	-20.000 dBm
Attenuation	0.000 dB	AUTO
Detector	RMS	RMS
SweepCount	5	5
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.30	0.30
Run	3 / max. 15	max. 15
Stable	3 / 3	3

Tx Spurious Emission (5795 MHz; 40 MHz)

Test according to FCC title 47 part 15 §15.407(b), KDB 789033 D02 General U-NII Test Procedures New Rules v01r02 and ANSI C63.10

Result

DUT Frequency (MHz)	Result
5795.000000	PASS

Final measurements


Frequency (MHz)	Level Pre Measurement (dBm)	level (dBm)	Limit (dBm)	Margin (dB)	Result
---	---	---	---	---	---

Pre Measurements

Frequency (MHz)	Level (dBm)	Margin (dB)	Limit (dBm)
18868.875322	-47.5	6.3	-41.2
18867.875375	-47.9	6.6	-41.2
18902.873533	-47.9	6.6	-41.2
18854.876059	-48.0	6.8	-41.2
18223.909268	-48.1	6.8	-41.2
18206.910163	-48.3	7.1	-41.2
36477.751589	-48.5	7.3	-41.2
18224.909215	-48.6	7.4	-41.2
18859.875796	-48.6	7.4	-41.2
18931.872007	-48.7	7.4	-41.2
18879.874743	-48.7	7.5	-41.2
18904.873428	-48.8	7.5	-41.2
18974.869744	-48.8	7.6	-41.2
18966.870165	-48.8	7.6	-41.2
18916.872796	-48.8	7.6	-41.2

Measurement Settings

Start Frequency (MHz)	Stop Frequency (MHz)	Pre Measurement	Final Measurement
30.000000	1000.000000	1	1
1000.000000	5150.000000	2	2
5150.000000	5250.000000	2	2
5250.000000	5350.000000	2	2
5350.000000	5470.000000	2	2
5470.000000	5725.000000	2	2
5725.000000	5850.000000	2	2
5850.000000	7000.000000	2	2
7000.000000	26000.000000	2	2
26000.000000	40000.000000	2	2

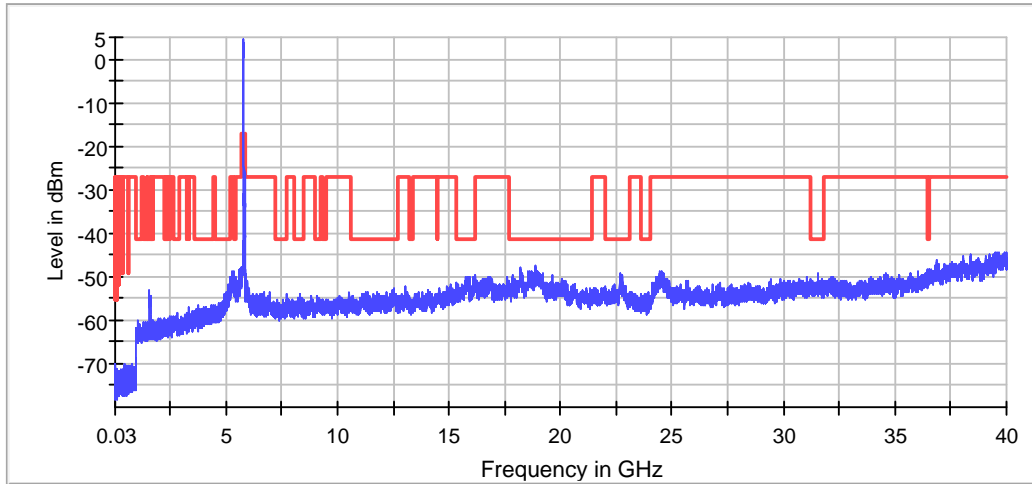

— Limit [limit.Result:1] × Threshold [limit 2.Result:1]

Final Measurement

Setting	Instrument Value	Target Value
Span	ZeroSpan	ZeroSpan
RBW	1.000 MHz	~ 1.000 MHz
VBW	3.000 MHz	~ 3.000 MHz
SweepPoints	10001	~ 10001
SweepTime	50.000 ms	50.000 ms
Reference Level	-20.000 dBm	-20.000 dBm
Attenuation	0.000 dB	0.000 dB
Detector	RMS	RMS
SweepCount	1	1
Filter	3 dB	3 dB
Trace Mode	Clear Write	Clear Write
SweepType	Sweep	AUTO
Preamp	off	off