Go to www.vtechphones.com to register your product for enhanced warranty support and the latest VTech product news.

VM320 VM320-2 Video Monitor



vtech

×

© 2018 VTech Communications, Inc. Bili rights reserved. 03/19. VM320-2_QSG_V1. Document order number: Specifications are subject to change without notice.

Quick start guide



WHAT'S IN THE BOX


VM320





VM320-2






1



- The rechargeable battery is pre-installed in your parent unit.
- Use only the power adapters supplied with this product.
- Make sure the baby monitor is not connected to an electric outlet that is controlled by a switch.
- · Connect the power adapters in a vertical or floor mount position only. The adapters' prongs are not designed to hold the weight of baby monitor, so do not connect them to any ceiling, under-the-table, or cabinet outlets. Otherwise, the adapters may not properly connect to the outlets.
- Make sure the parent unit, the baby unit and the power adapter cords are out of reach of children.

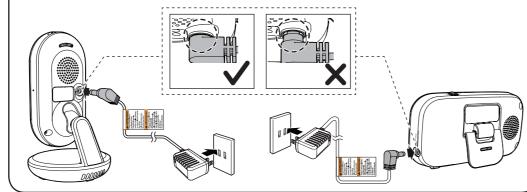

Power on or off the baby monitor

Slide the **ON/OFF** switch to power on or off your baby unit.

(2)


(3

- Q
- on or off your parent unit.

Slide the **U ON/OFF** switch to power


POSITIONING THE BABY MONITOR





CAUTION

- The default volume of your parent unit is level 3, and the maximum volume is level 5. If you experience high-pitched screeching noise from your baby monitor while positioning:
- Make sure your baby unit and parent unit are more than 1 meter (3 feet) apart, OR
- Turn down the volume of your parent unit.




■NOTE


• To avoid interference from other electronic devices, place your baby monitor at least 3 feet (1 meter) away from devices such as wireless routers, microwaves, cell phones and computers.

$(\mathbf{4})$ Status check

Once you power on both your baby unit and parent unit, your parent unit displays image from the baby unit, and the connection status displays on the LCD screen.




The **POWER** LED light of baby unit turns on.



بةٍ، Basic operation - Parent unit

Adjust speaker volume

Press VOL▲ / VOL▼ to adjust your parent unit speaker volume. Even if you have set the parent unit volume to the maximum, you may not hear sound from the baby unit. It depends on the sensitivity setting.



Set screen off timer

- 1. Press SELECT to enter the main menu when the parent unit is idle.
- 2. Press \blacktriangleleft or \blacktriangleright to choose B, then press $\underbrace{MENU}_{SELECT}$ or \blacktriangle to open the submenu.
- 3. Press \blacktriangle or \triangledown to choose the desired time period to automatically turn off screen (Dff / 🔚 - 5 min./ 🔛 - 30 min. / 🔛 - 60min.), then

press MENU to confirm your selection.

NOTE


• Press any keys on the parent unit to turn on the screen again.

Use the menu

Zoom

G 🙆

While in the menu:

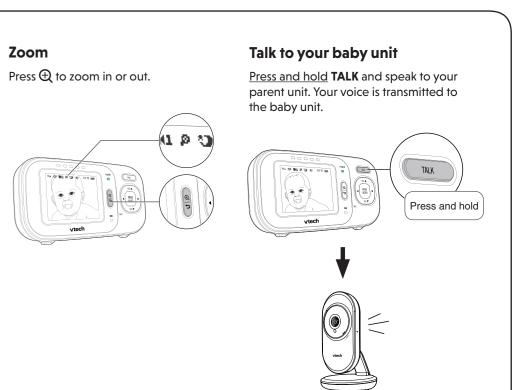

Press MENU to enter the menu, choose a menu item, or save a setting. You can use the parent unit for advanced settings or operations, such as to adjust the baby unit sound sensitivity or the temperature range for alerts.

• Press ◀ or ▶ to scroll among the menu options.

Press ^{MENU}/_{SELECT} or ▲ to enter the desired submenu.

• Press ▲ or ▼ to select an item.

 Press MENU SELECT to confirm your selection.

• Press 🕁 to exit the menu or submenu.

