

# TEST REPORT

**Application No.:** HKEM2112001275AT  
**Applicant:** VTech Telecommunications Ltd.  
**Address of Applicant:** 23/F., Tai Ping Industrial Centre, Block 1, 57 Ting Kok Road, Tai Po, Hong Kong

**Equipment Under Test (EUT):**  
**EUT Name:** Video baby monitor  
**Model No.:** RM7754HD PU, RM7754-2HD PU, RM7754-aHD PU, RM7854HD PU, RM7854-2HD PU, RM7854-aHD PU, VM816HD PU, VM816-1bHD PU, VM816-abHD PU, RM7764HD PU, RM7764-2HD PU, RM7764-aHD PU, RM7864HD PU, RM7864-2HD PU, RM7864-aHD PU, VM907HD PU, VM907-1bHD PU, VM907-abHD PU

**Additional Model:** Please refer to section 2 of this report which indicates which item was actually tested and which were electrically identical.

**FCC ID:** EW780-1925-01A  
**IC:** 1135B-80192501A  
**HVIN:** 35-201615PUBC  
**Standard(s) :** CFR 47 FCC Part 15, Subpart C, 2019  
 RSS-247 Issue 2: May 2017  
 RSS-Gen: Issue 5 Amdt 2019

**Date of Receipt:** 2021-12-20  
**Date of Test:** 2021-12-21 to 2021-12-30  
**Date of Issue:** 2021-08-31 (for original report HKEM210700078302)  
 2021-12-31 (for new report HKEM211200127501)

<b>Test Result:</b>	Pass*
---------------------	-------

\* In the configuration tested, the EUT complied with the standards specified above.





**Law Man Kit**  
EMC Manager

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request and accessible at <http://www.sgs.com/en/Terms-and-conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-conditions.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. The document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

<b>Revision Record</b>				
<b>Version</b>	<b>Chapter</b>	<b>Date</b>	<b>Modifier</b>	<b>Remark</b>
01		2021-08-31		Original
01		2021-12-31		C2PC change

<b>Authorized for issue by:</b>			
			
		<hr/> <b>Panny Leung /Project Engineer</b>	Date: 2021-12-31
			
		<hr/> <b>Law Man Kit</b> <b>/Reviewer</b>	Date: 2021-12-31

## 2 Test Summary

Radio Spectrum Matter Part				
Item	Standard	Method	Requirement	Result
Conducted Disturbance at AC Power Line(150kHz-30MHz)	47 CFR Part 15, Subpart C 15.207	ANSI C63.10: 2013 Section 6.2	47 CFR FCC Part 15, Subpart C 15.207	Pass
Conducted Peak Output Power	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 11.9.2.3	47 CFR Part 15, Subpart C 15.247(b)(3)	Pass
Radiated Emissions which fall in the restricted bands	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 6.10.5	47 CFR Part 15, Subpart C 15.209 & 15.247(d)	Pass
Radiated Spurious Emissions	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 6.4,6.5,6.6	47 CFR Part 15, Subpart C 15.209 & 15.247(d)	Pass
Conducted Emissions at AC Power Line (150kHz-30MHz)	RSS-Gen Issue 5: Amdt 2019	ANSI C63.10 (2013) Section 6.2	RSS-Gen Section 8.8	Pass
Conducted Peak Output Power	RSS-247 Issue 2, February 2017	ANSI C63.10 (2013) Section 11.9.1	RSS-247 Section 5.4(d)	Pass
Spurious Emissions	RSS-247 Issue 2, February 2017	ANSI C63.10 (2013) Section 11.11	RSS-247 Section 5.5	Pass
Radiated Emissions which fall in the restricted bands	RSS-Gen Issue 5: Amdt 2019	ANSI C63.10 (2013) Section 6.4&6.5&6.6	RSS-247 Section Section 3.3 & RSS-Gen Section 8.10	Pass

### Declaration of EUT Family Grouping:

Item no.: RM7754HD PU, RM7754-2HD PU, RM7754-aHD PU, RM7854HD PU, RM7854-2HD PU, RM7854-aHD PU, VM816HD PU, VM816-1bHD PU, VM816-abHD PU, RM7764HD PU, RM7764-2HD PU, RM7764-aHD PU, RM7864HD PU, RM7864-2HD PU, RM7864-aHD PU, VM907HD PU, VM907-1bHD PU, VM907-abHD PU

a=any alphanumeric character or blank is presenting number of baby unit.

b= any alphanumeric character or blank is presenting color option

According to the confirmation from the applicant, the above models are identical in all electrical aspects in relating to the circuit design, PCB layout, electrical components used, internal wiring and functions. The differences are only the model/item No, color and decorations.

Therefore, only the model RM7754HD PU was tested in this report.



**Note:** According to the cover letter for C2PC (Class II permissive changes) from the applicant, the change are as below based on previous test reports HKEM210700078302 issued on 2021-08-31.

1. Change the battery from 2700mA to 5000mA
2. Adaptor change from 1A DC jack/type C to 2A DC jack adaptor
3. PCB layout change from USB socket to DC jack

According to the changes above, Conducted Peak Output Power; Conducted Emissions at AC Power Line and Radiated Emission were re-tested in this report, all other test result were referred to previous report HKEM210700078302 issued on 2021-08-31.

### 3 Contents

	Page
<b>1 COVER PAGE .....</b>	<b>1</b>
<b>2 TEST SUMMARY .....</b>	<b>3</b>
<b>3 CONTENTS .....</b>	<b>5</b>
<b>4 GENERAL INFORMATION .....</b>	<b>6</b>
4.1 DETAILS OF E.U.T. ....	6
4.2 DESCRIPTION OF SUPPORT UNITS .....	7
4.3 MEASUREMENT UNCERTAINTY .....	7
4.4 TEST LOCATION .....	8
4.5 TEST FACILITY .....	8
4.6 DEVIATION FROM STANDARDS .....	8
4.7 ABNORMALITIES FROM STANDARD CONDITIONS .....	8
<b>5 EQUIPMENT LIST .....</b>	<b>9</b>
<b>6 RADIO SPECTRUM TECHNICAL REQUIREMENT .....</b>	<b>11</b>
6.1 ANTENNA REQUIREMENT .....	11
6.1.1 <i>Test Requirement:</i> .....	11
6.1.2 <i>Conclusion:</i> .....	11
<b>7 RADIO SPECTRUM MATTER TEST RESULTS .....</b>	<b>12</b>
7.1 CONDUCTED EMISSIONS AT AC POWER LINE (150kHz-30MHz) .....	12
7.1.1 <i>E.U.T. Operation</i> .....	12
7.1.2 <i>Test Setup Diagram</i> .....	12
7.1.3 <i>Measurement Procedure and Data</i> .....	13
7.2 CONDUCTED PEAK OUTPUT POWER .....	16
7.2.1 <i>E.U.T. Operation</i> .....	16
7.2.2 <i>Test Setup Diagram</i> .....	16
7.2.3 <i>Measurement Procedure and Data</i> .....	16
7.3 RADIATED EMISSIONS WHICH FALL IN THE RESTRICTED BANDS .....	17
7.3.1 <i>E.U.T. Operation</i> .....	17
7.3.2 <i>Test Setup Diagram</i> .....	18
7.3.3 <i>Measurement Procedure and Data</i> .....	18
7.4 RADIATED SPURIOUS EMISSIONS .....	20
7.4.1 <i>E.U.T. Operation</i> .....	21
7.4.2 <i>Test Setup Diagram</i> .....	21
7.4.3 <i>Measurement Procedure and Data</i> .....	22
<b>8 PHOTOGRAPHS .....</b>	<b>28</b>
<b>APPENDIX .....</b>	<b>29</b>
8.1 RF OUTPUT POWER .....	29

## 4 General Information

### 4.1 Details of E.U.T.

Power supply:	Model: VT07EUS05200 Input: AC 100-240V, 50/60Hz, 0.5A Output: DC 5.0V, 2.0A  OR  Battery Model: GSP806090-5Ah-3.7V-1S1P Rated capacity: 5000mAh, 18.5Wh Voltage: 3.7VDC
Test voltage:	AC 120 V
Cable:	Power Cable: 185cm unshielded 2 wires DC cable
Antenna Gain:	2 dBi
Antenna Type:	Integral Antenna
Channel Spacing:	5MHz
Modulation Type:	802.11b: DSSS (CCK, DQPSK, DBPSK) 802.11g/n: OFDM (64QAM, 16QAM, QPSK, BPSK)
Data rate:	802.11b: 1Mbps, 2Mbps, 5.5Mbps, 11 Mbps 802.11g: 6Mbps, 9Mbps, 12Mbps, 18Mbps, 24Mbps, 36Mbps, 48Mbps, 54 802.11n: 6.5Mbps, 13Mbps, 19.5Mbps, 26Mbps, 39Mbps, 52Mbps, 58.5Mbps, 65Mbps
Number of Channels:	802.11b/g/n(HT20):11
Operation Frequency:	802.11b/g/n(HT20): 2412MHz to 2462MHz
Tested Channels:	2412MHz, 2442MHz, 2462MHz
Version code:	T31N
Series number:	A1
Hardware Version:	V002
Software Version:	V0.2.0.1
	Remark: Power level setting was not adjustable and fixed default through SW Version.

#### Frequency List

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
<b>1</b>	<b>2412</b>	5	2432	9	2452
2	2417	<b>6</b>	<b>2437</b>	10	2457
3	2422	7	2442	<b>11</b>	<b>2462</b>
4	2427	8	2447		

Remark: 1. Testing Channels are highlighted in **bold**.

## 4.2 Description of Support Units

The EUT has been tested with corresponding accessories as below:

Supplied by client

Description	Manufacturer	Model No.	SN/Certificate NO
Test Software	MicroRidge System	Version 3.0.0.108	N/A

Supplied by SGS:

Description	Manufacturer	Model No.	SN/Certificate NO
NoteBook (EMC4)	Dell	P75F	N/A

## 4.3 Measurement Uncertainty

RF

No.	Item	Measurement Uncertainty
1	Radio Frequency	$\pm 7.25 \times 10^{-8}$
2	Duty cycle	$\pm 0.37\%$
3	Occupied Bandwidth	$\pm 3\%$
4	RF conducted power (30MHz-40GHz)	1.5dB
5	RF power density	1.5dB
6	Conducted Spurious emissions	1.5dB
7	RF Radiated power & Radiated Spurious emission test	4.9dB (30MHz-1GHz)
		4.6dB (1GHz-6GHz)
		4.7dB (6GHz-18GHz)
		5.6dB (18GHz-40GHz)
8	Temperature test	$\pm 1^\circ\text{C}$
9	Humidity test	$\pm 3\%$
10	Supply voltages	$\pm 1.5\%$
11	Time	$\pm 3\%$

Remark:

The  $U_{\text{lab}}$  (lab Uncertainty) is less than  $U_{\text{CISPR}}$  (CISPR Uncertainty), so the test results

- compliance is deemed to occur if no measured disturbance level exceeds the disturbance limit;
- non-compliance is deemed to occur if any measured disturbance level exceeds the disturbance limit.

According to decision rule based on Clause 4.2 of CISPR 16-4-2, the EUT complied with the standards specified above.

#### 4.4 Test Location

All tests were performed at:

SGS Hong Kong Limited  
Unit 2 and 3, G/F, Block A, Po Lung Centre,  
11 Wang Chiu Road, Kowloon Bay, Kowloon, Hong Kong  
Tel: +852 2305 2570 Fax: +852 2756 4480

No tests were sub-contracted.

#### 4.5 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

- **HOKLAS (Lab Code: 009)**

SGS HONG KONG Limited has been accepted by HKAS Executive, on the recommendation of the Accreditation Advisory Board, as a HOKLAS Accredited Laboratory, this laboratory meets the requirements of ISO/IEC 17025:2017 and it has been accredited for performing specific tests as listed in the scope of accreditation within the test category of Electrical and Electronic Products.

- **IAS Accreditation (Lab Code: TL-187)**

SGS HONG KONG Limited has met the requirements of AC89, IAS Accreditation Criteria for Testing Laboratories, and has demonstrated compliance with ISO/IEC Standard 17025:2017, General requirements for the competence of testing and calibration laboratories. This organization is accredited to provide the services specified in the scope of accreditation maintained on the IAS website ([www.iasonline.org](http://www.iasonline.org)).

The report must not be used by the client to claim product certification, approval, or endorsement by IAS, NIST, or any agency of the Federal Government.

- **FCC Recognized Accredited Test Firm (CAB Registration No.: 514599)**

SGS HONG KONG Limited has been accredited and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Designation Number: HK0015, Test Firm Registration Number: 514599.

- **Industry Canada (Site Registration No.: 26103; CAB Identifier No.: HK0015)**

SGS HONG KONG Limited has been recognized by Department of Innovation, Science and Economic Development (ISED) Canada as a wireless testing laboratory. The acceptance letter from the ISED is maintained in our files. CAB Identifier No: HK0015, Site Registration Number: 26103.

#### 4.6 Deviation from Standards

None

#### 4.7 Abnormalities from Standard Conditions

None

---



## 5 Equipment List

<b>Conducted Peak Output Power</b>					
<b>Equipment</b>	<b>Manufacturer</b>	<b>Model No</b>	<b>Inventory No</b>	<b>Cal Date</b>	<b>Cal Due Date</b>
SMBV100A VECTOR SIGNAL GENERATOR	Rohde & Schwarz	SMBV100A	E234	2021/08/16	2022/08/15
FSV40 SIGNAL ANALYZER 40GHz	Rohde & Schwarz	FSV40	E235	2021/08/16	2022/08/15
Wireless Conn. Tester (CMW)	Rohde & Schwarz	CMW270	E240	2021/08/16	2022/08/15
OSP	Rohde & Schwarz	OSP-B157W8	E242	2021/08/16	2022/08/15
Cable	Rohde & Schwarz	J12J103539-00-2	E239	2021/07/15	2022/07/14
WMS32 Test Software	R&S	Version 10	N/A	--	--

<b>Conducted Emissions at Mains Terminals (150kHz-30MHz)</b>					
<b>Equipment</b>	<b>Manufacturer</b>	<b>Model No</b>	<b>Inventory No</b>	<b>Cal Date</b>	<b>Cal Due Date</b>
EMI Test Receiver 9kHz to 3.6GHz	Rohde & Schwarz	ESR3 / 102326	E231	2021/08/17	2022/08/16
Artificial Mains Network (LISN)	Schwarzbeck	NSLK 8127 / 8127312	TE10	2021/04/13	2022/04/12
Impulse Limiter	Rohde & Schwarz	ESH-3-Z2 / 357881052	E028	2021/07/15	2022/07/14
EMC32 Test Software	R&S	Version 10	N/A	--	--

<b>Radiated Spurious Emissions (30MHz-1GHz)</b>					
<b>Equipment</b>	<b>Manufacturer</b>	<b>Model No</b>	<b>Inventory No</b>	<b>Cal Date</b>	<b>Cal Due Date</b>
3m Semi-Anechoic Chamber	ChamPro	N/A	E229	2021/08/09	2022/08/08
Coaxial Cable	SGS	N/A	E167	2021/07/15	2022/07/14
EMI Test Receiver 9kHz to 7GHz	Rohde & Schwarz	ESR7 / 102298	E314	2021/05/18	2022/05/17
TRILOG Super Broadb. Test Antenna, (25) 30-1000MHz	Schwarzbeck	9168-1110	E311	2020/02/13	2022/02/12
Boresight Mast Controller	ChamPro	AM-BS-4500-E	E237	--	--
Turntable with Controller	ChamPro	EM1000	E238	--	--
EMC32 Test Software	R&S	Version 10	N/A	--	--

<b>Radiated Spurious Emissions (above 1GHz)</b>					
<b>Equipment</b>	<b>Manufacturer</b>	<b>Model No</b>	<b>Inventory No</b>	<b>Cal Date</b>	<b>Cal Due Date</b>
3m Semi-Anechoic Chamber	ChamPro	N/A	E229	2021/08/09	2022/08/08

Coaxial Cable	SGS	N/A	E167	2021/07/15	2022/07/14
EMI Test Receiver 9kHz to 7GHz	Rohde & Schwarz	ESR7 / 102298	E314	2021/05/18	2022/05/17
TRILOG Super Broadb. Test Antenna, (25) 30-1000 MHz	Schwarzbeck	9168-1110	E311	2020/02/13	2022/02/12
Signal and Spectrum Analyzer 2Hz - 26.5GHz	Rohde & Schwarz	FSW26	E296	2021/08/16	2022/08/15
Spectrum Analyzer 9kHz - 30GHz	Rohde & Schwarz	FSP30	E204	2020/03/11	2022/03/10
Horn Antenna 1 - 18GHz	Schwarzbeck	BBHA9120D	E211	2020/01/29	2022/01/28
Horn Antenna 15 - 40GHz	Schwarzbeck	BBHA9170	E212	2020/01/29	2022/01/28
Preamplifier 33dB, 1 - 18GHz	Schwarzbeck	BBV9718	E214	2019/04/24	2022/04/23
Preamplifier 33dB, 18 - 26.5GHz	Schwarzbeck	BBV9719	E215	2020/09/21	2022/09/20
Broadband Coaxial Preamplifier typ. 30 dB, 18-40 GHz	Schwarzbeck	BBV 9721	E266	2020/08/31	2022/08/30
Highpass Filter 3.5-26.5GHz	Wainwright	WHNX3.5/26.5 G-6SS	E205	2019/04/24	2022/04/23
Band Reject Filter 2.4-2.5GHz	Wainwright	WRCJV 2400/2500- 2100	E206	2019/04/24	2022/04/23
RF cable SMA to SMA 10000mm	HUBER+SUHNER	SF104- 26.5/2*11SMA 45	E207	2021/09/17	2022/09/16
Boresight Mast Controller	ChamPro	AM-BS-4500-E	E237	N/A	N/A
Turntable with Controller	ChamPro	EM1000	E238	N/A	N/A

<b>General used equipment</b>					
<b>Equipment</b>	<b>Manufacturer</b>	<b>Model No</b>	<b>Inventory No</b>	<b>Cal Date</b>	<b>Cal Due Date</b>
Digital temperature & humidity data logger	SATO	SK-L200TH II	E232	2021/08/16	2022/08/15
Electronic Digital Thermometer with Hygrometer	nil	2074/2075	E159	2021/08/16	2022/08/15
Barometer with digital thermometer	SATO	7612-00	E218	2021/03/29	2022/03/28
Conditional Chamber	Zhong Zhi Testing Instruments	CZ-E-608D	E216	2021/08/17	2022/08/16

## 6 Radio Spectrum Technical Requirement

### 6.1 Antenna Requirement

#### 6.1.1 Test Requirement:

FCC Part 15 Subpart C Section 15.247 & 15.203  
 RSS-Gen Section 8.3

#### 6.1.2 Conclusion

Standard Requirement:

Testing shall be performed using the highest gain antenna of each combination of licence-exempt transmitter and antenna type, with the transmitter output power set at the maximum level. When a measurement at the antenna connector is used to determine RF output power, the effective gain of the device's antenna shall be stated, based on a measurement or on data from the antenna manufacturer.

EUT Antenna:

The antenna is integrated on the main PCB and no consideration of replacement. The best case gain of the antenna is 2 dBi.\

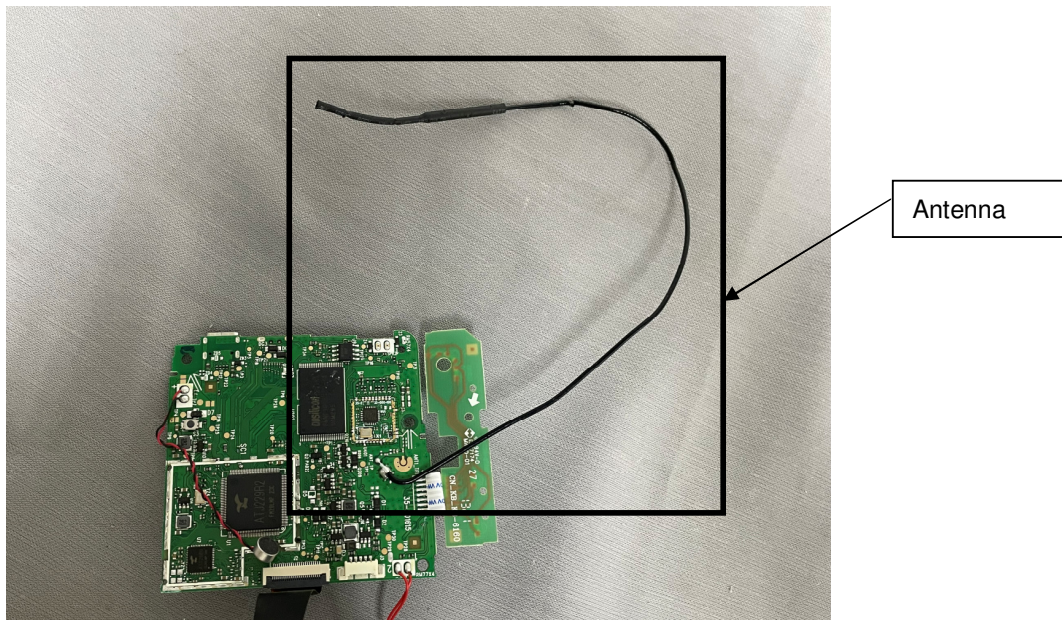


Photo of antenna refer to Appendix – Internal photo.

## 7 Radio Spectrum Matter Test Results

### 7.1 Conducted Emissions at AC Power Line (150kHz-30MHz)

Test Requirement 47 CFR Part 15, Subpart C 15.207, RSS-Gen Section 8.8  
 Test Method: ANSI C63.10 (2013) Section 6.2  
 Limit:

Frequency of emission(MHz)	Conducted limit(dBμV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

\*Decreases with the logarithm of the frequency.

#### 7.1.1 E.U.T. Operation


Operating Environment:

Temperature: 22.5 °C Humidity: 51.2 % RH :

Test mode a :TX mode\_Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 1Mbps is the worst case of IEEE 802.11b; data rate @ 6Mbps is the worst case of IEEE 802.11g; data rate @ 6.5Mbps is the worst case of IEEE 802.11n(HT20)..11g; data rate @ 6.5Mbps is the worst case of IEEE 802.11n(HT20).

Only the data of worst case is recorded in the report.

#### 7.1.2 Test Setup Diagram

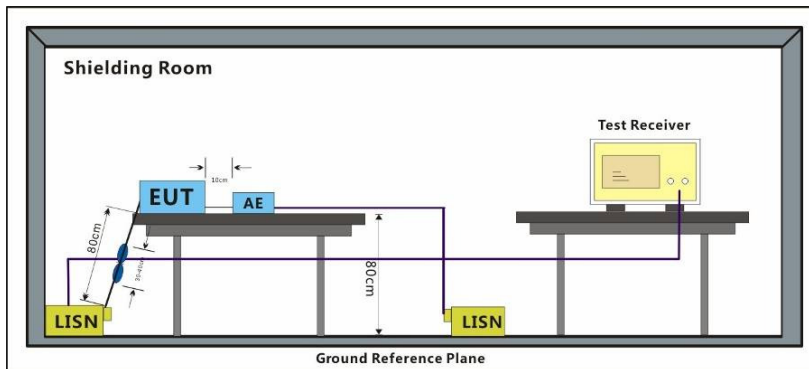

### 7.1.3 Measurement Procedure and Data


- 1) The mains terminal disturbance voltage test was conducted in a shielded room.
- 2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a 50ohm/50 $\mu$ H + 5ohm linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded.
- 3) The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane,
- 4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0.4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0.8 m from the LISN 2.
- 5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10 on conducted measurement.

Remark: LISN=Read Level+ Cable Loss+ LISN Factor

---

Mode: a;  
 Line: Live Line


Full Spectrum

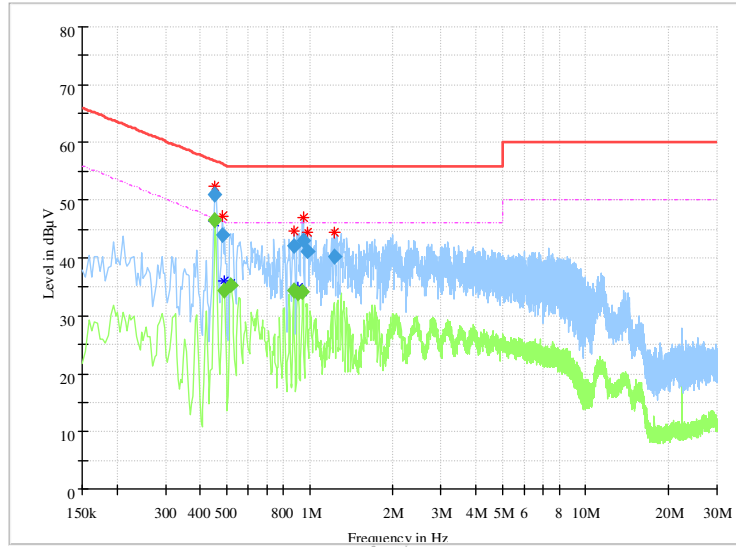

Frequency (MHz)	QuasiPeak (dBµV)	Average (dBµV)	Limit (dBµV)	Margin (dB)	Corr. (dB)	Result
0.454000	---	46.65	46.80	0.15	10.8	Pass
0.454000	50.98	---	56.80	5.82	10.8	Pass
0.482000	44.08	---	56.31	12.23	10.8	Pass
0.490000	---	34.39	46.17	11.78	10.8	Pass
0.518000	---	35.23	46.00	10.77	10.7	Pass
0.874000	42.18	---	56.00	13.82	10.4	Pass
0.874000	---	34.27	46.00	11.73	10.4	Pass
0.910000	---	33.81	46.00	12.19	10.4	Pass
0.938000	---	34.21	46.00	11.79	10.4	Pass
0.946000	43.02	---	56.00	12.98	10.4	Pass
0.978000	41.11	---	56.00	14.89	10.4	Pass
1.226000	40.30	---	56.00	15.70	10.3	Pass

Mode: a;  
Line: Neutral Line

Full Spectrum

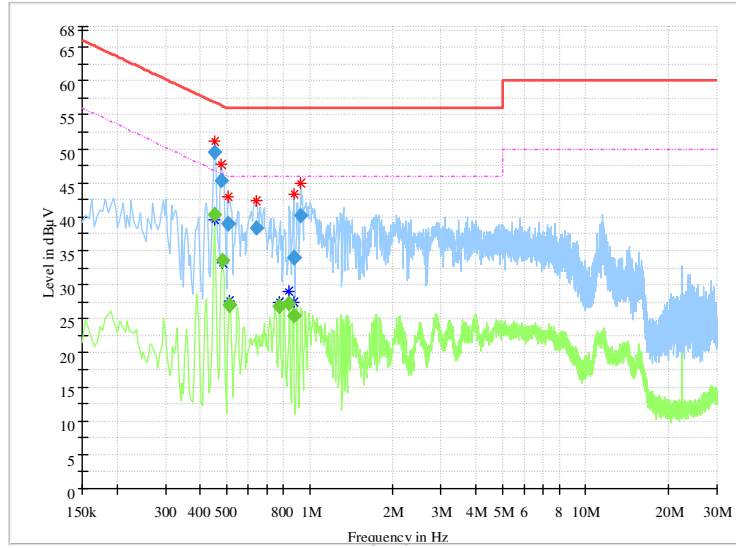

Frequency (MHz)	QuasiPeak (dBµV)	Average (dBµV)	Limit (dBµV)	Margin (dB)	Corr. (dB)	Result
0.450000	---	40.32	46.88	6.56	10.8	Pass
0.454000	49.44	---	56.80	7.36	10.8	Pass
0.478000	45.30	---	56.37	11.07	10.8	Pass
0.482000	---	33.61	46.31	12.70	10.8	Pass
0.506000	38.96	---	56.00	17.04	10.7	Pass
0.514000	---	27.11	46.00	18.89	10.7	Pass
0.642000	38.37	---	56.00	17.63	10.6	Pass
0.778000	---	26.88	46.00	19.13	10.5	Pass
0.842000	---	27.15	46.00	18.85	10.5	Pass
0.874000	---	25.53	46.00	20.47	10.4	Pass
0.878000	34.10	---	56.00	21.90	10.4	Pass
0.930000	40.09	---	56.00	15.91	10.4	Pass

## 7.2 Conducted Peak Output Power

Test Requirement 47 CFR Part 15, Subpart C 15.247:2019(b)(1) & 15.247(b)(3), RSS-247 Section 5.4(b)

Test Method: ANSI C63.10 (2013) Section 7.8.5


### 7.2.1 E.U.T. Operation

Operating Environment:

Temperature: 22.5 °C Humidity: 51.2 % RH :

Test mode a:TX mode\_Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 1Mbps is the worst case of IEEE 802.11b; data rate @ 6Mbps is the worst case of IEEE 802.11g; data rate @ 6.5Mbps is the worst case of IEEE 802.11n(HT20).

### 7.2.2 Test Setup Diagram

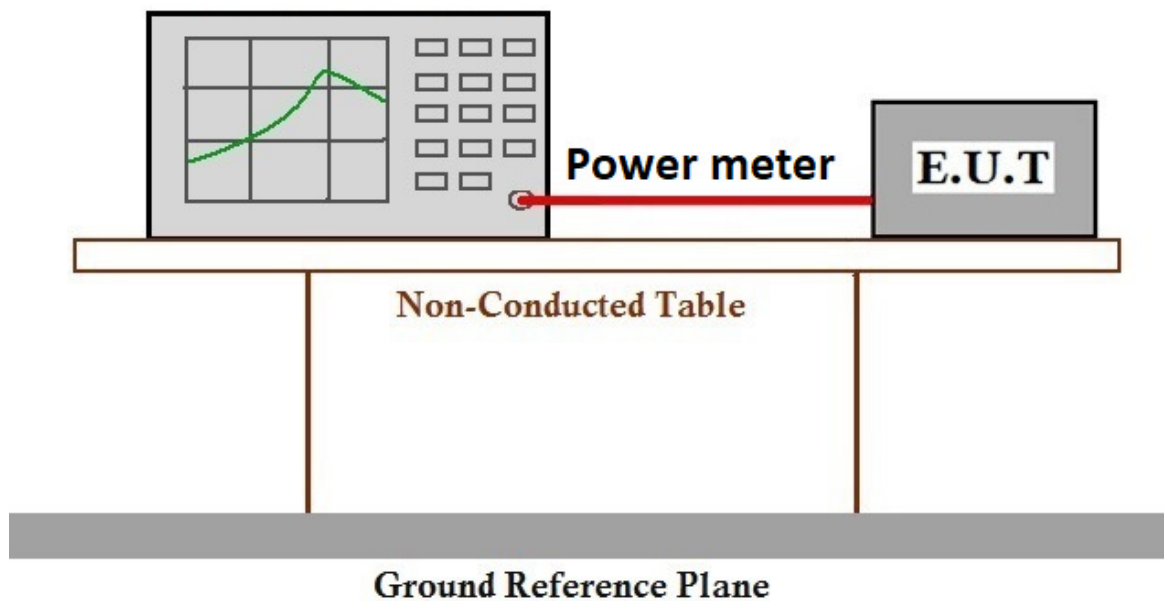

### 7.2.3 Measurement Procedure and Data

The detailed test data see section 9: Appendix



### 7.3 Radiated Emissions which fall in the restricted bands

Test Requirement 47 CFR Part 15, Subpart C 15.209 & 15.247(d), Section 3.3 & RSS-Gen Section 8.9  
Test Method: ANSI C63.10 (2013) Section 6.10.5  
Limit:

**Table 5 – General field strength limits at frequencies above 30 MHz**

Frequency (MHz)	Field strength ( $\mu$ V/m at 3 m)
30 - 88	100
88 - 216	150
216 - 960	200
Above 960	500

**Table 6 – General field strength limits at frequencies below 30 MHz**

Frequency	Magnetic field strength (H-Field) ( $\mu$ A/m)	Measurement distance (m)
9 - 490 kHz 1	6.37/F (F in kHz)	300
490 - 1705 kHz	63.7/F (F in kHz)	30
1.705 - 30 MHz	0.08	30

**Note 1:** The emission limits for the ranges 9-90 kHz and 110-490 kHz are based on measurements employing a linear average detector.

#### 7.3.1 E.U.T. Operation


Operating Environment:

Temperature: 23.1 °C Humidity: 51.4 % RH :

Test mode a:TX mode\_Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 1Mbps is the worst case of IEEE 802.11b; data rate @ 6Mbps is the worst case of IEEE 802.11g; data rate @ 6.5Mbps is the worst case of IEEE 802.11n(HT20).

Only the data of worst case is recorded in the report.

### 7.3.2 Test Setup Diagram

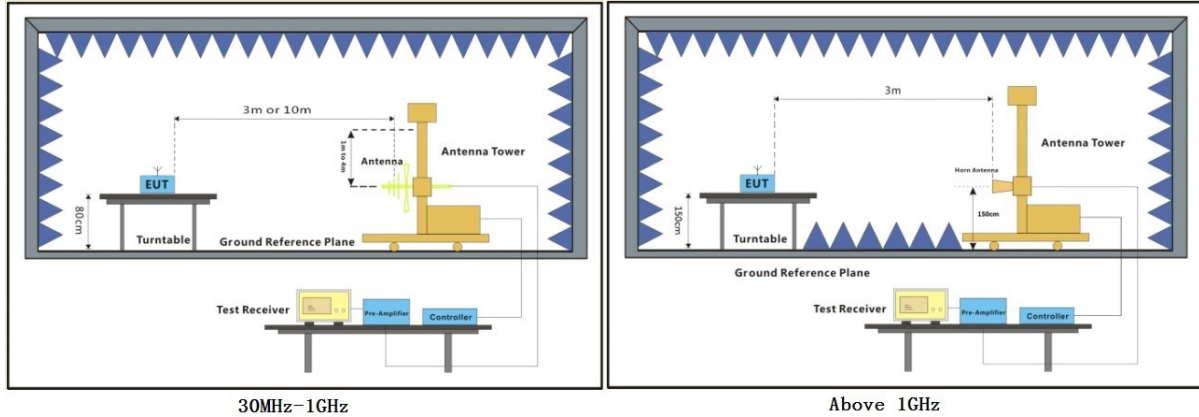

### 7.3.3 Measurement Procedure and Data

- a. For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 or 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- c. The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- d. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- e. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- f. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- g. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
- h. Test the EUT in the lowest channel, the middle channel, the Highest channel.
- i. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
- j. Repeat above procedures until all frequencies measured was complete.

Remark 1: Level= Read Level+ Cable Loss+ Antenna Factor- Preamp Factor

Remark 2: For frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. For the emissions whose peak level is lower than the average limit, only the peak measurement is shown in the report.



Worse test result as shown below:

Mode: 802.11b

Frequency (MHz)	Antenna Polarization	Emission Level (dB $\mu$ V/m)		Limit (dB $\mu$ V/m)		Remark
		Peak	Average	Peak	Average	
2390.000	V	58.3	47.0	74.0	54.0	Pass
2483.500	V	52.2	43.3	74.0	54.0	Pass

Mode: 802.11g

Frequency (MHz)	Antenna Polarization	Emission Level (dB $\mu$ V/m)		Limit (dB $\mu$ V/m)		Remark
		Peak	Average	Peak	Average	
2390.000	V	62.7	50.5	74.0	54.0	Pass
2483.500	V	55.9	49.2	74.0	54.0	Pass

Mode: 802.11n20

Frequency (MHz)	Antenna Polarization	Emission Level (dB $\mu$ V/m)		Limit (dB $\mu$ V/m)		Remark
		Peak	Average	Peak	Average	
2390.000	V	61.5	50.1	74.0	54.0	Pass
2483.500	V	56.9	46.3	74.0	54.0	Pass

## 7.4 Radiated Spurious Emissions

Test Requirement Section 3.3 & RSS-Gen Section 8.9  
 Test Method: ANSI C63.10 (2013) Section 6.4&6.5&6.6  
 Limit:

**Table 5 – General field strength limits at frequencies above 30 MHz**

Frequency (MHz)	Field strength ( $\mu$ V/m at 3 m)
30 - 88	100
88 - 216	150
216 - 960	200
Above 960	500

**Table 6 – General field strength limits at frequencies below 30 MHz**

Frequency	Magnetic field strength (H-Field) ( $\mu$ A/m)	Measurement distance (m)
9 - 490 kHz 1	6.37/F (F in kHz)	300
490 - 1705 kHz	63.7/F (F in kHz)	30
1.705 - 30 MHz	0.08	30

**Note 1:** The emission limits for the ranges 9-90 kHz and 110-490 kHz are based on measurements employing a linear average detector.

### 7.4.1 E.U.T. Operation


Operating Environment:

Temperature: 22.3 °C Humidity: 52.3 % RH :

Test mode a:TX mode\_ Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 1Mbps is the worst case of IEEE 802.11b; data rate @ 6Mbps is the worst case of IEEE 802.11g; data rate @ 6.5Mbps is the worst case of IEEE 802.11n(HT20).


Only the data of worst case is recorded in the report.

### 7.4.2 Test Setup Diagram

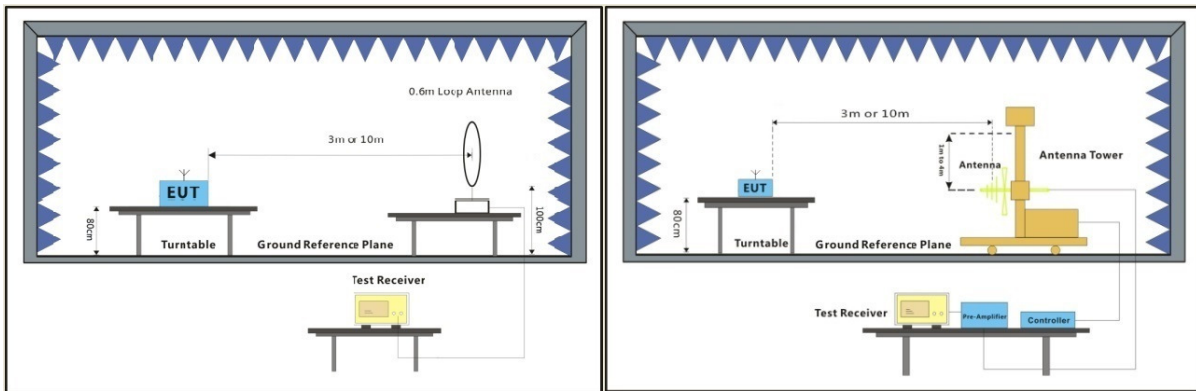

Below 30MHz

30MHz-1GHz

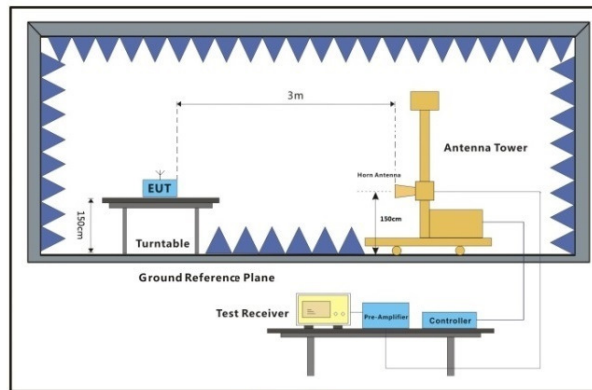

Above 1GHz

### 7.4.3 Measurement Procedure and Data


- a. For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 or 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- c. The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- d. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- e. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- f. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- g. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
- h. Test the EUT in the lowest channel, the middle channel, the Highest channel.
- i. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
- j. Repeat above procedures until all frequencies measured was complete.

Remark:

- 1) For emission below 1GHz, through pre-scan found the worst case is the lowest channel. Only the worst case is recorded in the report.
  - 2) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:  
Final Test Level = Receiver Reading + Antenna Factor + Cable Factor – Preamplifier Factor
  - 3) Scan from 9kHz to 40GHz, the disturbance above 18GHz and below 30MHz was very low. The points marked on above plots are the highest emissions could be found when testing, so only above points had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.
  - 4) For frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. For the emissions whose peak level is lower than the average limit, only the peak measurement is shown in the report.
-


**Radiated emission below 1GHz**

Horizontal (worse plots was shown as below)

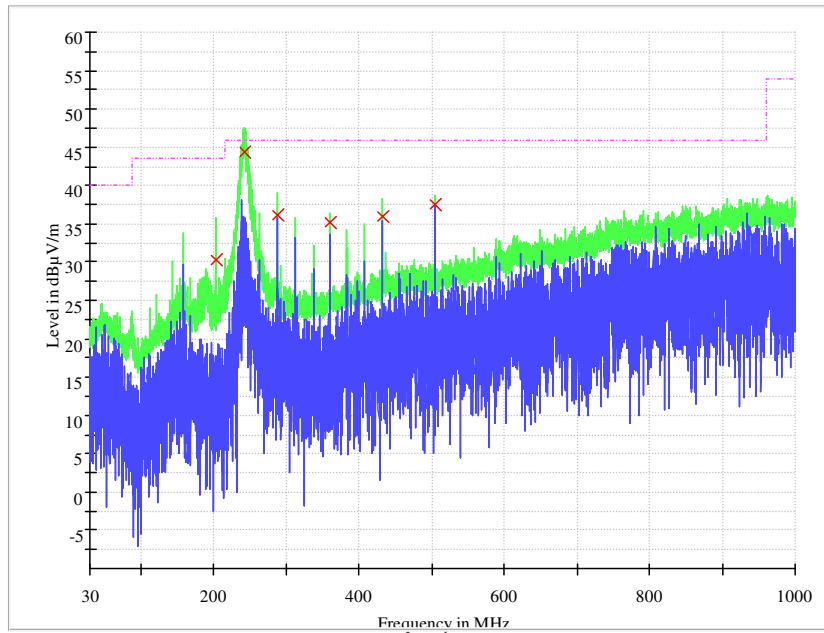

Frequency (MHz)	QuasiPeak (dBµV/m)	Pol.	Corr. (dB/m)	Margin (dB)	Limit (dBµV/m)	Result
202.450000	30.2	H	10.7	13.3	43.5	Pass
242.355357	44.4	H	12.6	1.6	46.0	Pass
287.971429	36.1	H	14.6	9.9	46.0	Pass
359.982143	35.1	H	16.4	10.9	46.0	Pass
431.992857	36.0	H	18.3	10.0	46.0	Pass
504.003571	37.6	H	19.6	8.4	46.0	Pass

Vertical (worse plots was shown as below)

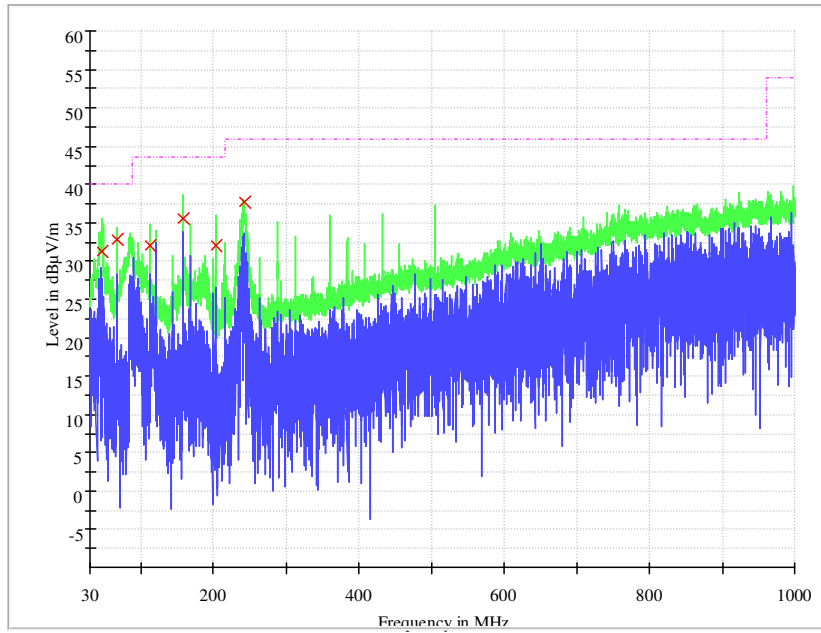

Frequency (MHz)	QuasiPeak (dBµV/m)	Pol.	Corr. (dB/m)	Margin (dB)	Limit (dBµV/m)	Result
46.101786	31.2	V	14.1	8.8	40.0	Pass
67.482143	32.8	V	12.8	7.2	40.0	Pass
112.471429	32.0	V	11.3	11.5	43.5	Pass
157.460714	35.5	V	14.4	8.0	43.5	Pass
202.450000	32.1	V	10.7	11.4	43.5	Pass
241.658929	37.7	V	12.6	8.3	46.0	Pass



**Above 1GHz**

Channel:Low

Frequency (MHz)	Antenna Polarization	Emission Level (dBµV/m)		Limit (dBµV/m)		Remark
		Peak	Average	Peak	Average	
1661.500	V	47.7	/	74.0	54.0	Pass
1990.000	V	45.0	/	74.0	54.0	Pass
4901.500	H	47.4	/	74.0	54.0	Pass
5976.000	V	59.2	36.6	74.0	54.0	Pass
7471.000	H	56.6	44.1	74.0	54.0	Pass
11053.000	H	61.2	48.7	74.0	54.0	Pass

Channel:Middle

Frequency (MHz)	Antenna Polarization	Emission Level (dBµV/m)		Limit (dBµV/m)		Remark
		Peak	Average	Peak	Average	
1662.624	H	44.9	/	74.0	54.0	Pass
3985.748	V	45.5	/	74.0	54.0	Pass
4377.500	H	46.2	/	74.0	54.0	Pass
7508.000	V	56.3	44.3	74.0	54.0	Pass
7416.500	H	56.3	43.9	74.0	54.0	Pass
11026.000	V	61.5	48.9	74.0	54.0	Pass

Channel: High

Frequency (MHz)	Antenna Polarization	Emission Level (dBµV/m)		Limit (dBµV/m)		Remark
		Peak	Average	Peak	Average	
1333.000	V	48.2	/	74.0	54.0	Pass
1996.375	H	43.3	/	74.0	54.0	Pass
5127.000	V	49.0	/	74.0	54.0	Pass
8084.000	H	57.9	45.6	74.0	54.0	Pass
8147.500	V	57.3	44.9	74.0	54.0	Pass
11031.000	H	61.1	48.9	74.0	54.0	Pass

802.11g

**Above 1GHz**

Channel:Low

Frequency (MHz)	Antenna Polarization	Emission Level (dB $\mu$ V/m)		Limit (dB $\mu$ V/m)		Remark
		Peak	Average	Peak	Average	
1761.248	H	43.7	/	74.0	54.0	Pass
1793.500	V	46.2	/	74.0	54.0	Pass
4732.500	H	47.6	/	74.0	54.0	Pass
5974.500	V	50.6	/	74.0	54.0	Pass
8093.500	V	58.1	45.7	74.0	54.0	Pass
8103.000	H	57.8	45.7	74.0	54.0	Pass

Channel:Middle

Frequency (MHz)	Antenna Polarization	Emission Level (dB $\mu$ V/m)		Limit (dB $\mu$ V/m)		Remark
		Peak	Average	Peak	Average	
1999.375	H	44.8	/	74.0	54.0	Pass
3947.500	H	45.6	/	74.0	54.0	Pass
4878.000	V	47.5	/	74.0	54.0	Pass
5086.000	H	48.4	/	74.0	54.0	Pass
8097.500	H	57.5	45.7	74.0	54.0	Pass
8120.000	V	58.2	45.7	74.0	54.0	Pass

Channel: High

Frequency (MHz)	Antenna Polarization	Emission Level (dB $\mu$ V/m)		Limit (dB $\mu$ V/m)		Remark
		Peak	Average	Peak	Average	
1997.875	V	47.1	/	74.0	54.0	Pass
3996.250	H	49.6	/	74.0	54.0	Pass
5143.000	H	49.2	/	74.0	54.0	Pass
7535.500	H	56.6	44.0	74.0	54.0	Pass
7973.000	V	57.2	44.7	74.0	54.0	Pass
11609.000	V	61.0	48.5	74.0	54.0	Pass

802.11n20

**Above 1GHz**

Channel:Low

Frequency (MHz)	Antenna Polarization	Emission Level (dBµV/m)		Limit (dBµV/m)		Remark
		Peak	Average	Peak	Average	
1994.124	H	47.7	/	74.0	54.0	Pass
3146.124	H	49.8	/	74.0	54.0	Pass
5257.000	V	47.9	/	74.0	54.0	Pass
7985.500	V	56.9	44.6	74.0	54.0	Pass
8083.000	H	57.9	45.6	74.0	54.0	Pass
11030.000	H	60.9	48.9	74.0	54.0	Pass

Channel:Middle

Frequency (MHz)	Antenna Polarization	Emission Level (dBµV/m)		Limit (dBµV/m)		Remark
		Peak	Average	Peak	Average	
1667.500	H	46.5	28.4	74.0	54.0	Pass
1763.500	H	42.7	26.2	74.0	54.0	Pass
5135.000	V	49.0	36.7	74.0	54.0	Pass
8112.500	H	58.1	45.7	74.0	54.0	Pass
8112.500	V	58.2	45.8	74.0	54.0	Pass
11489.000	H	61.3	48.9	74.0	54.0	Pass

Channel: High

Frequency (MHz)	Antenna Polarization	Emission Level (dBµV/m)		Limit (dBµV/m)		Remark
		Peak	Average	Peak	Average	
1805.500	H	43.1	/	74.0	54.0	Pass
1998.248	H	45.3	/	74.0	54.0	Pass
5110.500	V	48.8	/	74.0	54.0	Pass
5141.500	H	49.5	/	74.0	54.0	Pass
7862.500	V	57.9	45.0	74.0	54.0	Pass
7990.500	H	56.9	44.7	74.0	54.0	Pass



## 8 Photographs

Remark: Photos refer to Appendix: External Photo, Internal Phot, and Setup Photo

## Appendix

### 8.1 RF output power


Operation Mode	DUT Frequency (MHz)	Limit Max (dBm)	Gated Level (dBm)	Result
802.11b	2412.000000	30.0	14.1	PASS
802.11b	2442.000000	30.0	14.2	PASS
802.11b	2462.000000	30.0	14.4	PASS
802.11g	2412.000000	30.0	14.2	PASS
802.11g	2442.000000	30.0	14.5	PASS
802.11g	2462.000000	30.0	14.3	PASS
802.11n20	2412.000000	30.0	13.9	PASS
802.11n20	2442.000000	30.0	12.7	PASS
802.11n20	2462.000000	30.0	12.7	PASS

Remark: Antenna gain: 2 dBi

Remark: Cable loss 0.8dB was considered and set in system configuration.  
 (only worst case shown)


802.11b:

Trace Zoom

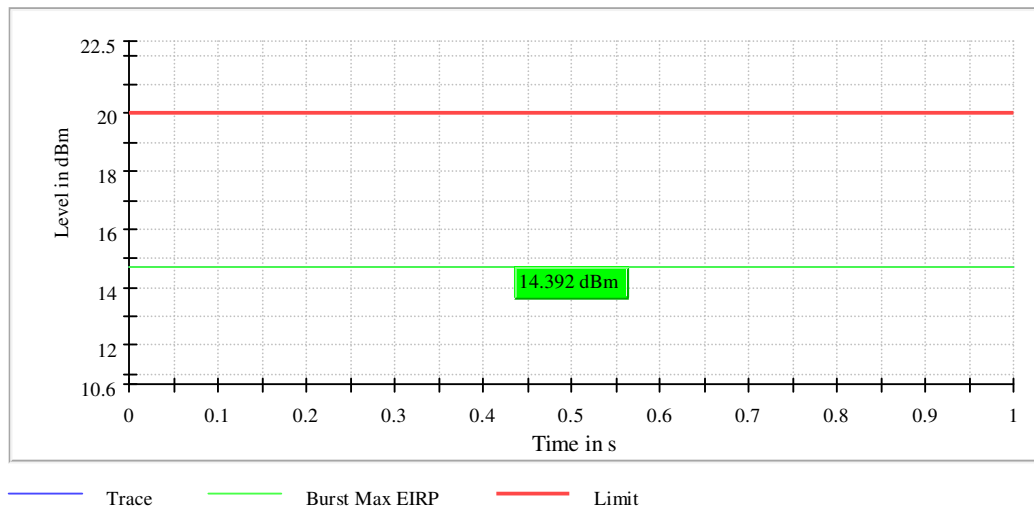

802.11g:


Trace Zoom

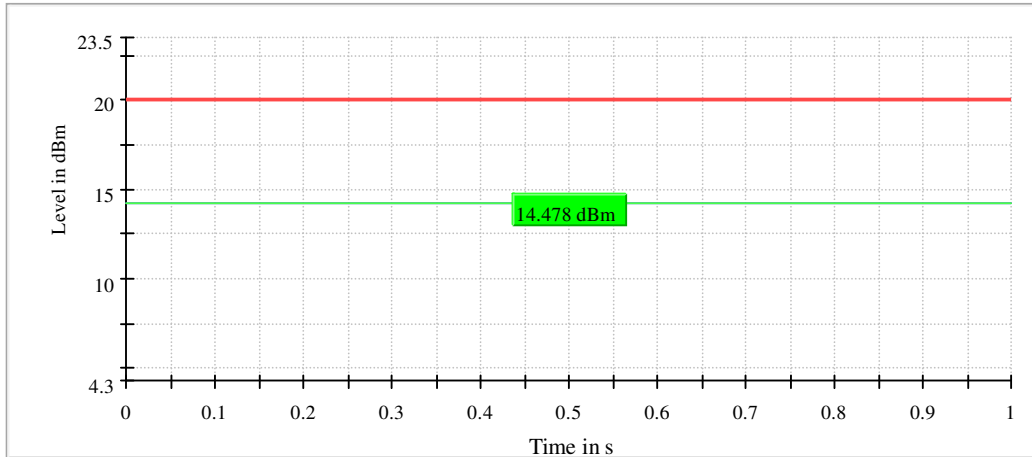

— Trace — Burst Max EIRP — Limit

802.11n20:

Trace Zoom

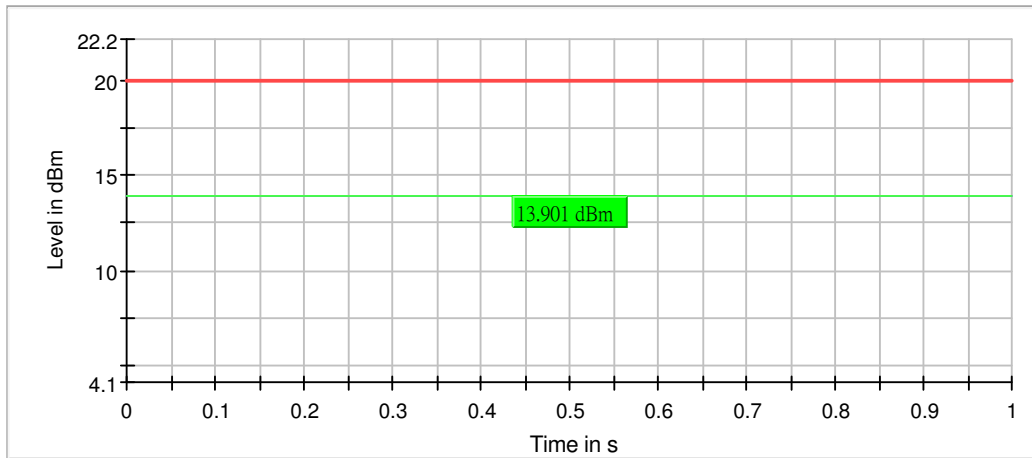

— Trace — Burst Max EIRP — Limit

- End of the Report -