| KTL Test Report:                  | 0R03330.1   |
|-----------------------------------|---|
| Applicant:                        | VTECH Engineering Canada<br>200-7671 Alderbridge Way<br>Richmond, BC<br>V6X 1Z9 |
| Equipment Under Test:<br>(E.U.T.) | VTECH 2431 Cordless Telephone   |
| FCC ID:                           | EW780-5001-00   |
| In Accordance With:               | FCC Part 15, Subpart C<br>Frequency Hopping Transmitters<br>2400 - 2483.5 MHz   |
| Tested By:                        | KTL Ottawa Inc.<br>3325 River Road, R.R. 5<br>Ottawa, Ontario K1V 1H2           |
| Authorized By:                    | G. Westwell, Technologist   |
| Date:                             |   |
| Total Number of Pages:            | 15  |

## **KTL Ottawa**

### FCC PART 15, SUBPART C FREQUENCY HOPPING TRANSMITTERS PROJECT NO.: 0R03330.1

EQUIPMENT: VTECH 2431 Cordless Telephone

FCC ID: EW780-5001-00

# **Table of Contents**

| Section 1. | Summary of Test Results         | 3 |
|------------|---------------------------------|---|
| Section 2. | General Equipment Specification | 7 |
| Section 3. | Spurious Emissions (Radiated)   | 8 |
| Section 4. | Test Equipment List             | 3 |
| Annex A    | Block Diagrams                  | 1 |

FCC ID: EW780-5001-00

## Section 1. Summary of Test Results

#### General

All measurements are traceable to national standards.

These tests were conducted on a sample of the equipment for the purpose of demonstrating compliance with Part 15, Subpart C, Paragraph 15.247 for Frequency Hopping Spread Spectrum devices. Radiated tests were conducted is accordance with ANSI C63.4-1992. Radiated emissions are made on an open area test site. A description of the test facility is on file with the FCC.

|          | New Submission             | Production Unit     |
|----------|----------------------------|---------------------|
| $\times$ | Class II Permissive Change | Pre-Production Unit |
| E T S    | Equipment Code             | Family Listing      |

THIS TEST REPORT RELATES ONLY TO THE ITEM(S) TESTED.

THE FOLLOWING DEVIATIONS FROM, ADDITIONS TO, OR EXCLUSIONS FROM THE TEST SPECIFICATIONS HAVE BEEN MADE.

See "Summary of Test Data".



**NVLAP LAB CODE: 100351-0** 

| TESTED BY: | DATE: |
|------------|-------|
|            | <br>  |

Russell Grant, Wireless Group Manager

KTL Ottawa Inc. authorizes the above named company to reproduce this report provided it is reproduced in its entirety and for use by the company's employees only.

Any use which a third party makes of this report, or any reliance on or decisions to be made based on it, are the responsibility of such third parties. KTL Ottawa Inc. accepts no responsibility for damages, if any, suffered by any third party as a result of decisions made or actions based on this report. This report applies only to the items tested.

FCC ID: EW780-5001-00

### **Summary Of Test Data**

| Name Of Test                           | Para. No.        | Result         |
|--|------------------|----------------|
| Powerline Conducted Emissions          | 15.207(a)        | Not Applicable |
| Channel Separation                     | 15.247(a)(1)     | Not Applicable |
| Pseudorandom Hopping Algorithm         | 15.247(a)(1)     | Not Applicable |
| Time of Occupancy                      | 15.247(a)(1)(ii) | Not Applicable |
| 20 dB Occupied Bandwidth               | 15.247(a)(1)     | Not Applicable |
| Peak Power Output                      | 15.247(b)        | Not Applicable |
| Spurious Emissions (Antenna Conducted) | 15.247(c)        | Not Applicable |
| Spurious Emissions (Radiated)          | 15.247(c)        | Complies       |

### **Footnotes For N/A's:**

This equipment has been previously approved for use in the United States/Canada (See attached certificate). The manufacturer has made the following changes to the RF circuit:

Delta List for Step-5 to Step-6 Radio

| <u>Item</u>          | Step-6 (New)                | Step-5 (Old)                   |
|----------------------|-----------------------------|--------------------------------|
| (1) Base Antenna     | Single Inverted-F           | Dual Inverted-F<br>(Diversity) |
| (2) Front End Filter | Microstrip Printed Bandpass | Ceramic Bandpass               |
| (3) VCO              | Internal to RFIC            | External to RFIC               |
| (4) IF               | 864 kHz                     | 110.592 MHz                    |

Therefore it was necessary to retest the equipment for spurious emissions.

FCC PART 15, SUBPART C FREQUENCY HOPPING TRANSMITTERS PROJECT NO.: 0R03330.1

EQUIPMENT: VTECH 2431 Cordless Telephone

FCC ID: EW780-5001-00

FEDERAL COMMUNICATIONS COMMISSION WASHINGTON, D.C. 20554

**GRANT OF EQUIPMENT** AUTHORIZATION Certification

VTech Communications Ltd 23/F Tai Ping Ind Center Block 1

57 Ting Kok Rd Tai Po NT, Hong Kong

Date of Grant: 02/09/2000

Application Dated: 11/10/1999

Attention: Bruce Bernard

**NOT TRANSFERABLE** 

EQUIPMENT AUTHORIZATION is hereby issued to the named GRANTEE, and is VALID ONLY for the equipment identified hereon for use under the Commission's Rules and Regulations listed below.

FCC IDENTIFIER EW780-5001-00 Name of Grantee VTech Communications Ltd

Equipment Class: Part 15 Cordless Telephone

System

Notes: 2.4 GHZ CORDLESS

TELEPHONE

Frequency Output Frequency **Emission Grant Notes FCC Rule Parts** Range (MHZ) Watts **Tolerance Designator** 68 15 2401.056 - 2481.408 843KF1D 0.066 2401.056 - 2481.408 843KF1D 0.128

This grant does not pertain to Registration requirements under Part 68. 68:

Mail To: Joseph Poon, Regulatory Compliance Engineer VTech Engineering Canada Ltd 200-7671 Alderbridge Way Richmond, V6X 1Z9 **CANADA** 

EA95930

FCC ID: EW780-5001-00

Industry Canada

Industrie Canada

1241 Clyde Avenue Ottawa, Ontario K2C 1Y3 Tel. No. (613) 952-3200 Fax. No. (613) 952-1088

January 18, 2000

Our File: 46327-1135 Submission No.31034

Vtech Engineering Canada Ltd. 200-7671 Alderbridge Way Richmond, BC V6X 1Z9, Canada

Attention: Mr. Joseph Poon

Dear Mr. Poon;

This is in reply to the application for certification submitted on your behalf by Ktl Ottawa Inc. for the model listed below.

I have reviewed the documents provided and the equipment has been certified as requested. Our field offices have been notified of the approval and certification certificates are attached for:

| Model | Certificate No. | Certification No. | Labels |
|-------|-----------------|-------------------|--------|
| 2431  | 11397           | 11351021814A      |        |
|       | 22923           | 1135 10489A       | 150    |

The assigned certification number and the name of your firm must be shown on each equipment model. This certification identification information may be shown on the equipment model identification plate or on a separate label that shall be indelible and tamper proof. The certification number shall be prefixed with the word "CANADA" or "CAN" if space is very restricted.

To expedite future requests for changes in existing certifications, family approvals, or multiple listings, please refer to the certification certificate number shown in the upper right hand corner of the certificate.

A web site has been established to allow clients to view the status of applications for certifications, reassessments, and label orders in progress, and to view or download various documents associated with the certification process. The address is:

http://spectrum.ic.gc.ca/~cert

Sincerely.

Gabriel H. Clavel, C.E.T.
Telecom Engineering Specialist
Telecom Certification Section

GHC/

Att: certificates as above, 150 labels cc. Mrs. Joanne Backes, Ktl Ottawa Inc.

Canad'ä

FCC ID: EW780-5001-00

## Section 2. General Equipment Specification

Manufacturer: VTECH Engineering Canada

**Model No.:** 2431

**Serial No.:** Base Station = 360000374031713

Handset = PA14F

**Date Received In Laboratory:** November 24, 2000

**KTL Identification No.:** Base Station = Item 1

Handset = Item 2

**Frequency Range:** 2401.056 – 2481.408 MHz

**Tunable Bands:** 1

**Number of Channels:** 94

**Channel Spacing:** 0.864 MHz

**Emissions Designator:** 843KF1D

FCC PART 15, SUBPART C FREQUENCY HOPPING TRANSMITTERS PROJECT NO.: 0R03330.1

EQUIPMENT: VTECH 2431 Cordless Telephone

FCC ID: EW780-5001-00

# Section 3. Spurious Emissions (Radiated)

Para. No.: 15.247 (c)

**Test Performed By:** Russell Grant **Date of Test:** December 7, 2000

**Test Results:** Complies. The worst case emission level is 52.8 dBµV/m @ 3m at

4962.816 MHz. This is 1.2 dB below the specification limit.

**Measurement Data:** See attached table.

FCC ID: EW780-5001-00

### **Test Data - Radiated Emissions**

| Test Dist      | ance      | R             | ange:                      | Recei                    | ver:                    | RBW(kHz):              |                               | Dete              | ctor:          |
|----------------|-----------|---------------|----------------------------|--------------------------|-------------------------|------------------------|-------------------------------|-------------------|----------------|
| (meters)       | ):3       | A             | Гower                      | ESV                      | / <b>P</b>              | 10                     | 000                           | Peak              |                |
| Freq.<br>(MHz) | Ant.<br>* | Pol.<br>(V/H) | RCVD<br>Signal<br>(dBµV/m) | Ant.<br>Factor<br>(dB)** | Amp.<br>Gain<br>(dB)*** | Dist.<br>Corr.<br>(dB) | Field<br>Strength<br>(dBµV/m) | Limit<br>(dBµV/m) | Margin<br>(dB) |
|                |           |               |                            | H                        | landset                 |                        |                               |                   |                |
| 2401.056       | Hrn2      | V             | 84.5                       | 36.7                     |                         |                        | 121.2                         | 131.0             | 9.8            |
| 2401.056       | Hrn2      | Н             | 81.0                       | 36.7                     |                         |                        | 117.7                         | 131.0             | 13.3           |
| 4802.112       | Hrn2      | V             | 77.0                       | 44.6                     | -55.6                   | -20.0                  | 46.0                          | 54.0              | 8.0            |
| 4802.112       | Hrn2      | Н             | 77.7                       | 44.6                     | -55.6                   | -20.0                  | 46.7                          | 54.0              | 7.3            |
| 7203.168       | Hrn2      | V             | 64.5                       | 51.8                     | -55.8                   |                        | 60.5                          | 101.2             | 40.7           |
| 7203.168       | Hrn2      | Н             | 62.8                       | 51.8                     | -55.8                   |                        | 58.8                          | 101.2             | 42.4           |
| 2441.664       | Hrn2      | V             | 87.7                       | 36.2                     |                         |                        | 123.9                         | 131.0             | 7.1            |
| 2441.664       | Hrn2      | Н             | 82.3                       | 36.2                     |                         |                        | 118.5                         | 131.0             | 12.5           |
| 4883.328       | Hrn2      | V             | 75.7                       | 43.9                     | -55.4                   | -20.0                  | 44.2                          | 54.0              | 9.8            |
| 4883.328       | Hrn2      | Н             | 79.5                       | 43.9                     | -55.4                   | -20.0                  | 48.0                          | 54.0              | 6.0            |
| 7324.992       | Hrn2      | V             | 65.8                       | 50.9                     | -55.7                   | -20.0                  | 41.0                          | 54.0              | 13.0           |
| 7324.992       | Hrn2      | Н             | 63.2                       | 50.9                     | -55.7                   | -20.0                  | 38.4                          | 54.0              | 15.6           |
| 2481.408       | Hrn2      | V             | 90.8                       | 36.4                     |                         |                        | 127.2                         | 131.0             | 3.8            |
| 2481.408       | Hrn2      | Н             | 82.3                       | 36.4                     |                         |                        | 118.7                         | 131.0             | 12.3           |
| 4962.816       | Hrn2      | V             | 76.5                       | 44.2                     | -55.2                   | -20.0                  | 45.5                          | 54.0              | 8.5            |
| 4962.816       | Hrn2      | Н             | 74.8                       | 44.2                     | -55.2                   | -20.0                  | 43.8                          | 54.0              | 10.2           |
| 7444.224       | Hrn2      | V             | 68.8                       | 51.2                     | -55.7                   | -20.0                  | 44.3                          | 54.0              | 9.7            |
| 7444.224       | Hrn2      | Н             | 69.0                       | 51.2                     | -55.7                   | -20.0                  | 44.5                          | 54.0              | 9.5            |
|                |           |               |                            | Bas                      | e Station               |                        |                               |                   |                |
| 2401.056       | Hrn2      | V             | 82.2                       | 36.0                     |                         |                        | 118.2                         | 131.0             | 12.8           |
| 2401.056       | Hrn2      | Н             | 78.8                       | 36.0                     |                         |                        | 114.8                         | 131.0             | 16.2           |
| 4802.112       | Hrn2      | V             | 78.2                       | 43.6                     | -55.6                   | -20.0                  | 46.2                          | 54.0              | 7.8            |
| 4802.112       | Hrn2      | Н             | 83.0                       | 43.6                     | -55.6                   | -20.0                  | 51.0                          | 54.0              | 3.0            |
| 7203.168       | Hrn2      | V             | 75.0                       | 50.7                     | -55.8                   |                        | 69.9                          | 98.2              | 28.3           |
| 7203.168       | Hrn2      | Н             | 78.7                       | 50.7                     | -55.8                   |                        | 73.6                          | 98.2              | 24.6           |
| 2441.664       | Hrn2      | V             | 83.5                       | 36.2                     |                         |                        | 119.7                         | 131.0             | 11.3           |
| 2441.664       | Hrn2      | Н             | 80.3                       | 36.2                     |                         |                        | 116.5                         | 131.0             | 14.5           |
| 4883.328       | Hrn2      | V             | 77.3                       | 43.9                     | -55.4                   | -20.0                  | 45.8                          | 54.0              | 8.2            |
| 4883.328       | Hrn2      | Н             | 83.7                       | 43.9                     | -55.4                   | -20.0                  | 52.2                          | 54.0              | 1.8            |

#### Notes:

 $B/C = \quad Biconical, \ B/L = Biconilog, \ L/P = Log-Periodic, \ H = Horn, \ D/P = Dipole$ 

\* Re-measured using dipole antenna.

\*\* Includes cable loss when amplifier is not used.

\*\*\* Includes cable loss.

() Denotes failing emission level.

N.D. = Not Detected

FCC ID: EW780-5001-00

### **Test Data - Radiated Emissions, continued**

| Test Dist      |      |               | ange:<br>Fower             | Recei<br>ESV             |                         | RBW(kHz):<br>1000      |                               | Detector:<br>Peak |                |
|----------------|------|---------------|----------------------------|--------------------------|-------------------------|------------------------|-------------------------------|-------------------|----------------|
| Freq.<br>(MHz) | Ant. | Pol.<br>(V/H) | RCVD<br>Signal<br>(dBµV/m) | Ant.<br>Factor<br>(dB)** | Amp.<br>Gain<br>(dB)*** | Dist.<br>Corr.<br>(dB) | Field<br>Strength<br>(dBµV/m) | Limit<br>(dBµV/m) | Margin<br>(dB) |
|                |      |               |                            | Bas                      | se Station              |                        |                               |                   |                |
| 7324.992       | Hrn2 | V             | 72.8                       | 50.9                     | -55.7                   | -20.0                  | 48.0                          | 54.0              | 6.0            |
| 7324.992       | Hrn2 | Н             | 75.0                       | 50.9                     | -55.7                   | -20.0                  | 50.2                          | 54.0              | 3.8            |
| 2481.408       | Hrn2 | V             | 83.0                       | 36.4                     |                         |                        | 119.4                         | 131.0             | 11.6           |
| 2481.408       | Hrn2 | Н             | 78.7                       | 36.4                     |                         |                        | 115.1                         | 131.0             | 15.9           |
| 4962.816       | Hrn2 | V             | 76.3                       | 44.2                     | -55.2                   | -20.0                  | 45.3                          | 54.0              | 8.7            |
| 4962.816       | Hrn2 | Н             | 83.8                       | 44.2                     | -55.2                   | -20.0                  | 52.8                          | 54.0              | 1.2            |
| 7444.224       | Hrn2 | V             | 72.5                       | 51.2                     | -55.7                   | -20.0                  | 48.0                          | 54.0              | 6.0            |
| 7444.224       | Hrn2 | Н             | 74.5                       | 51.2                     | -55.7                   | -20.0                  | 50.0                          | 54.0              | 4.0            |

#### **Notes:**

B/C =Biconical, B/L = Biconilog, L/P = Log-Periodic, H = Horn, D/P = Dipole


Re-measured using dipole antenna. Includes cable loss when amplifier is not used. \*\*

Includes cable loss.

Denotes failing emission level. ()

N.D. = Not Detected

FCC ID: EW780-5001-00

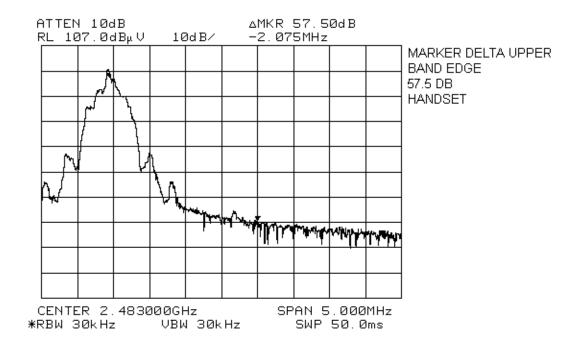


#### 2483.5 MHz

Peak = 127.2 - 57.5 =  $69.7 \, dB\mu V/m$ 

Average = 69.7 - 20 =  $49.7 \, dB\mu V/m$ 

FCC ID: EW780-5001-00

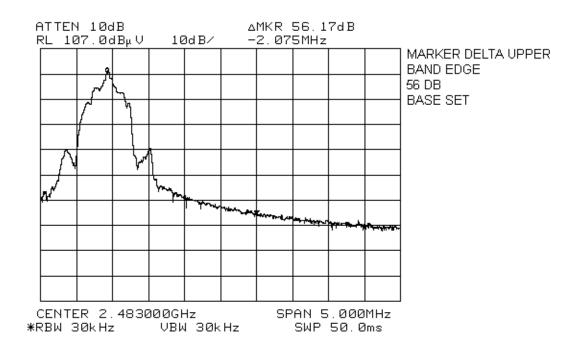

### 2483.5 MHz

Peak = 
$$119.4 - 56.2$$
 =  $63.2 \, dB \mu V/m$ 

Average = 
$$63.2 - 20$$
 =  $43.2 \, dB \mu V/m$ 

FCC ID: EW780-5001-00

# Section 4. Test Equipment List

| CAL<br>CYCLE | EQUIPMENT         | MANUFACTURER    | MODEL   | SERIAL   | LAST CAL.  | NEXT CAL.  |
|--------------|-------------------|-----------------|---------|----------|------------|------------|
| 1 Year       | Spectrum Analyzer | Hewlett Packard | 8565E   | FA000981 | June 16/00 | June 16/01 |
| 1 Year       | Horn Antenna      | EMCO #2         | 3115    | 4336     | Nov. 11/99 | Nov. 11/00 |
| 1 Year       | RF AMP            | JCA             | 2-4 GHz | FA001496 | May 31/00  | May 31/01  |
| 1 Year       | RF AMP            | JCA             | 1-2 GHz | FA001498 | May 31/00  | May 31/01  |
| 1 Year       | RF AMP            | JCA             | 4-8 GHz | FA001497 | May 31/00  | May 31/01  |

NA: Not Applicable NCR: No Cal Required COU: CAL On Use **KTL Ottawa** 

FCC PART 15, SUBPART C FREQUENCY HOPPING TRANSMITTERS PROJECT NO.: 0R03330.1

ANNEX A

EQUIPMENT: VTECH 2431 Cordless Telephone

FCC ID: EW780-5001-00

## Annex A

# **Block Diagrams**

ANNEX A

EQUIPMENT: VTECH 2431 Cordless Telephone

FCC ID: EW780-5001-00

### **Test Site For Radiated Emissions**

