



Nemko

Test Report: 3W06736


Applicant: VTECH Engineering Canada Ltd.
Suite 200 – 7671 Alderbridge Way
Richmond, B.C., Canada
V6X 1Z9

**Equipment Under Test:
(EUT)** VTECH 2651 And VTECH 2656, FHSS
Cordless Phones With Speaker Phone And Answering
Machine

FCC ID: EW780-5269-00

In Accordance With: **FCC Part 15, Subpart C**
Frequency Hopping Transmitters
2400 - 2483.5 MHz

Tested By: Nemko Canada Inc.
303 River Road, R.R. 5
Ottawa, Ontario K1V 1H2

Authorized By: 
Glen Westwell, Wireless Technologist

Date: 31 January 2003

Total Number of Pages: 49

Table Of Contents

| | |
|--|-----------|
| Section 1. Summary Of Test Results | 3 |
| Section 2. General Equipment Specification..... | 5 |
| Section 3. Powerline Conducted Emissions | 6 |
| Section 4. Channel Separation | 12 |
| Section 4. Occupied Bandwidth..... | 14 |
| Section 5. Peak Power Output | 21 |
| Section 6. Spurious Emissions (Radiated) | 27 |
| Section 7. Block Diagrams..... | 48 |
| Section 8. Test Equipment List..... | 49 |

EQUIPMENT:VTECH 2651 and VTECH 2656

Section 1. Summary Of Test Results

General

All measurements are traceable to national standards.

These tests were conducted on a sample of the equipment for the purpose of demonstrating compliance with Part 15, Subpart C, Paragraph 15.247 for Frequency Hopping Spread Spectrum devices. Radiated tests were conducted in accordance with ANSI C63.4-1992. Radiated emissions are made on an open area test site. A description of the test facility is on file with the FCC.

THIS TEST REPORT RELATES ONLY TO THE ITEM(S) TESTED.

THE FOLLOWING DEVIATIONS FROM, ADDITIONS TO, OR EXCLUSIONS FROM THE TEST SPECIFICATIONS HAVE BEEN MADE. The RF Circuitry in the VTECH 2651 and VTECH 2656 are identical, therefore only the VTECH 2651 was tested for radiated emissions associated with the fundamental frequency of transmission.
See " Summary of Test Data".



TESTED BY: _____
Kevin Carr, EMC Technologist

DATE: 31 January 2003

Nemko Canada Inc. authorizes the above named company to reproduce this report provided it is reproduced in its entirety and for use by the company's employees only.

Any use which a third party makes of this report, or any reliance on or decisions to be made based on it, are the responsibility of such third parties. Nemko Canada Inc. accepts no responsibility for damages, if any, suffered by any third party as a result of decisions made or actions based on this report.

This report applies only to the items tested.

EQUIPMENT:VTECH 2651 and VTECH 2656

Summary Of Test Data

| Name Of Test | Para. No. | Result |
|--|------------------|---------------|
| Powerline Conducted Emissions | 15.207 (a) | Complied |
| Occupied Bandwidth | 15.247 (a)(2) | Complied |
| Peak Power Output | 15.247 (b) | Complied |
| Spurious Emissions (Antenna Conducted) | 15.247 (c) | N/A |
| Spurious Emissions (Radiated) | 15.247 (c) | Complied |
| Transmitter Power Density | 15.247 (d) | Complied |

Footnotes For N/A's: No Access Port

Test Conditions:

Indoor Temperature: 20°C
 Humidity: 20%

Outdoor

Ottawa: Temperature: -10°C
 Humidity: 30%

Almonte: Temperature: 7°C
 Humidity: 65%

EQUIPMENT: VTECH 2651 and VTECH 2656

Section 2. General Equipment Specification

Manufacturer: VTech Engineering Canada Ltd.
Xia Ling Bei Management Zone,
Liaobu, Dongguan, guangdong,
China 523411

Model/Serial No.:
Base M/N: 2651, S/N:PA 12/12 109
Base M/N: 2656, S/N: PA 12/02 111
Handset S/N: 12/02 111

Date Received In Laboratory: 9 Jan. 2003

Nemko Identification No.: 1, 2, 3

Frequency Range: 2401.056-2482.272MHz

Tunable Bands: 1

Number of Channels: 17

Min. Channel Spacing: 858kHz

Emissions Designator: 813k0F1D

User Frequency Adjustment: None

Measured Output Power:
Base 0.057 Watts, 17.6 dBm
Handset 0.0865 Watts, 19.3dBm

Rated Output Power:
Base +19.5dBm +/- 1 dB
Handset +19.5dBm +/- 1 dB

EQUIPMENT: VTECH 2651 and VTECH 2656

Section 3. Powerline Conducted Emissions

Para. No.: 15.207(a)

| | |
|--------------------------------------|-----------------------------------|
| Test Performed By: Kevin Carr | Date of Test: 20 Jan. 2003 |
|--------------------------------------|-----------------------------------|

Test Results: Complied

Measurement Data: See attached graph.

EQUIPMENT: VTECH 2651 and VTECH 2656

Conducted Disturbance at Mains Port Test Data:

| Test Date: 20 Jan. 2003 | | | | | |
|--|-----------------|------------|----------------------------|--------------|-----------|
| Engineer's Name: Kevin Carr | | | | | |
| Temperature (C°): 20 | | | Humidity %: 20 | | |
| Tested as per (Table Top/Floor Standing): Table Top | | | | | |
| Spectrum plots for each frequency band can be found at the back of this section. Any Emissions that were above or within 5 dB of the average limits were remeasured with a receiver and recorded. . *All plots were generated with a peak detector. | | | | | |
| Port under test: AC Mains | | | Test Voltage: 120VAC, 60Hz | | |
| Receiver Results (if applicable) : | | | | | |
| Conductor | Frequency (MHz) | Detector | Level dB(µV) | Limit dB(µV) | Margin dB |
| VTECH 2651 | | | | | |
| Phase | 0.45 | Quasi-Peak | 34.0 | 48.0 | 12.0 |
| Neut. | 0.45 | Quasi-Peak | 33.7 | 48.0 | 14.3 |
| VTECH 2656 | | | | | |
| Phase | 0.54 | Quasi-Peak | 34.0 | 48.0 | 14.0 |
| Neut. | 0.54 | Quasi-Peak | 33.1 | 48.0 | 14.9 |
| Notes: | | | | | |

Conducted Disturbance at Mains Port Results:

| | | |
|---|--|--|
| Final Test Result (Please Check One): | <input checked="" type="checkbox"/> Pass | <input type="checkbox"/> Fail |
| Were their deviations from the standard test procedure? | <input type="checkbox"/> Yes | <input checked="" type="checkbox"/> No |
| If yes, document: | | |
| Has rented equipment been used? | <input type="checkbox"/> Yes | <input checked="" type="checkbox"/> No |
| If yes, document: | | |
| Exercise Program: The mode used to exercise the various system components in a manner similar to typical use. | S/W Ver. Not supplied by client | |


EQUIPMENT: VTECH 2651 and VTECH 2656

**Conducted Disturbance at Mains Detailed Setup Photos:
VTECH 2651**

Front




Side

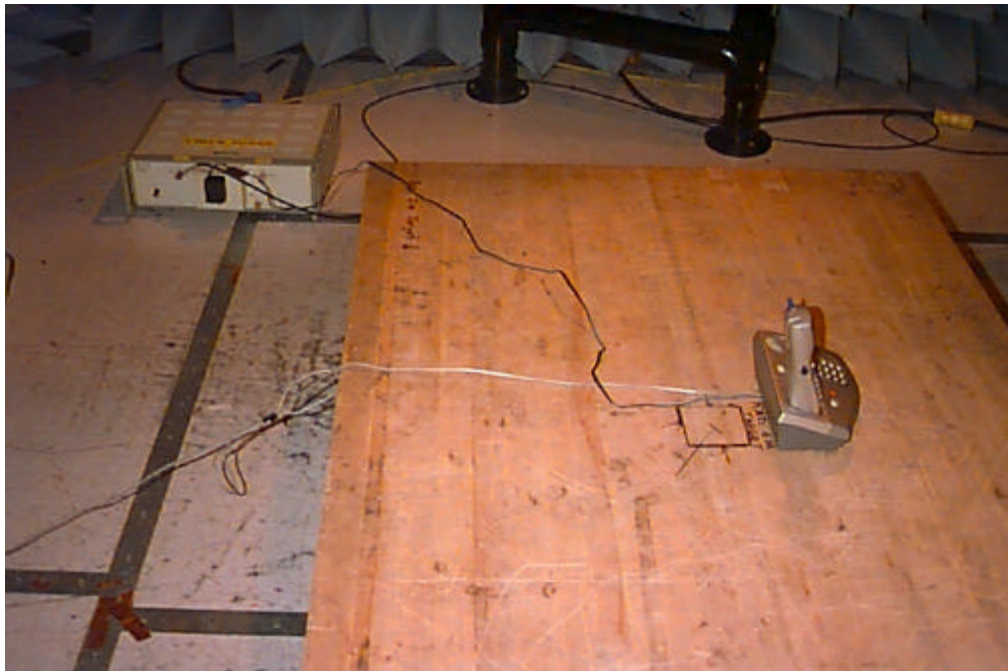

EQUIPMENT: VTECH 2651 and VTECH 2656

VTECH 2656

Front


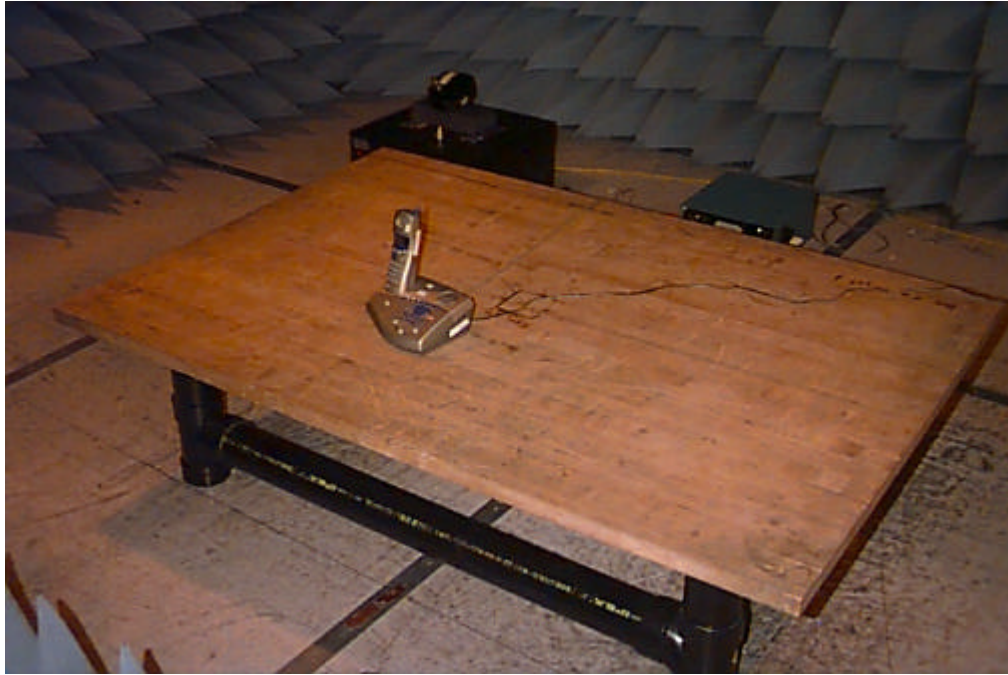


Side





EQUIPMENT: VTECH 2651 and VTECH 2656

**Conducted Disturbance at Mains Plots:
 VTECH 2651**

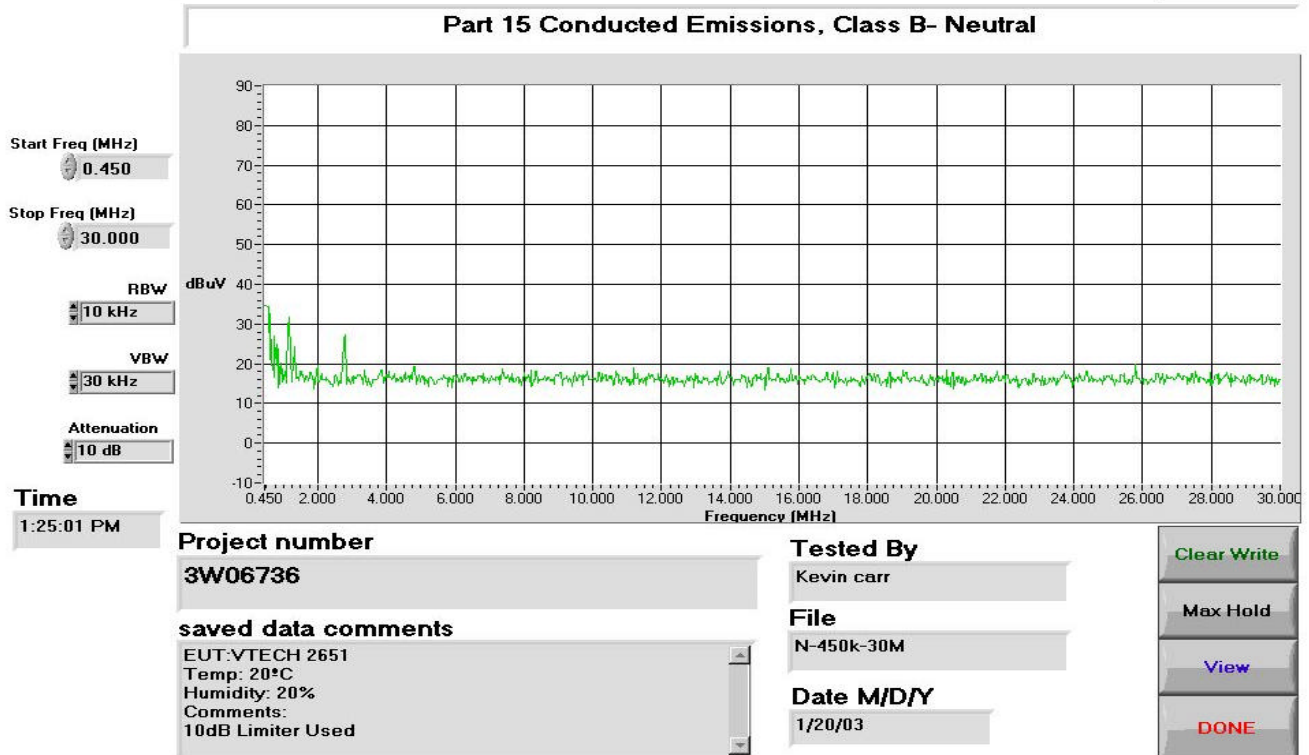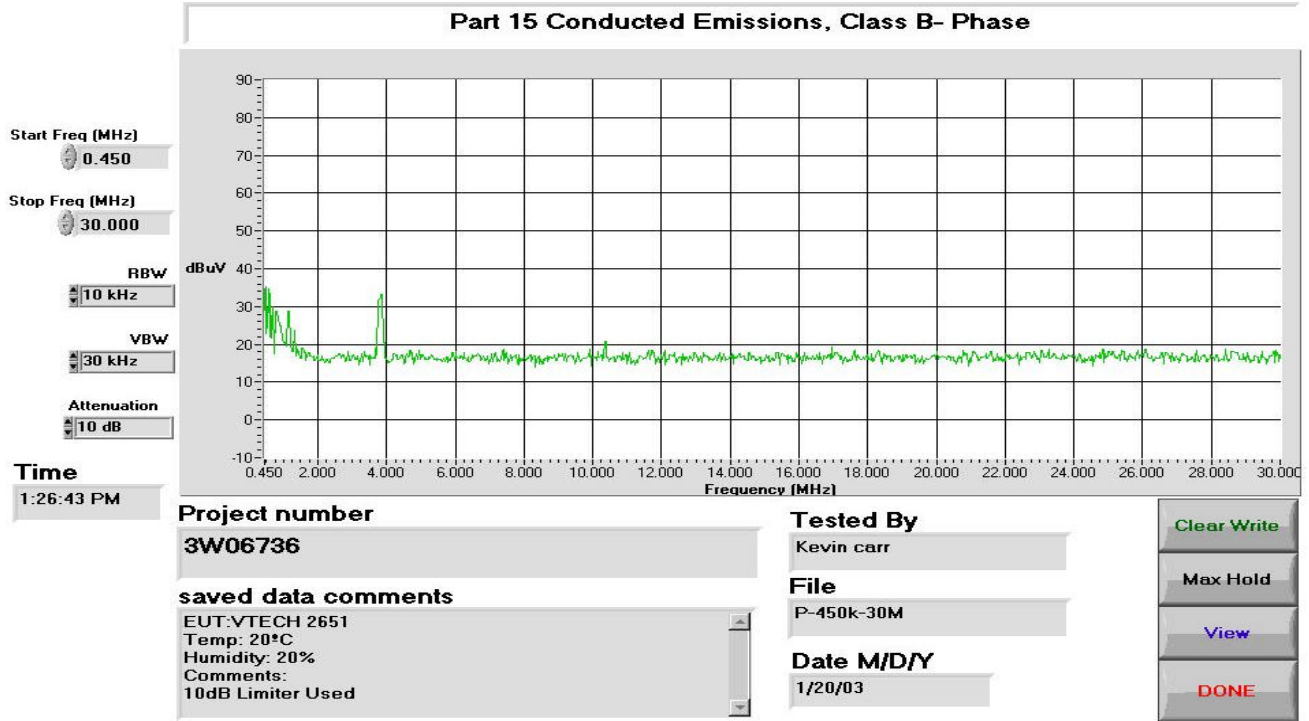

EQUIPMENT: VTECH 2651 and VTECH 2656

VTECH 2656

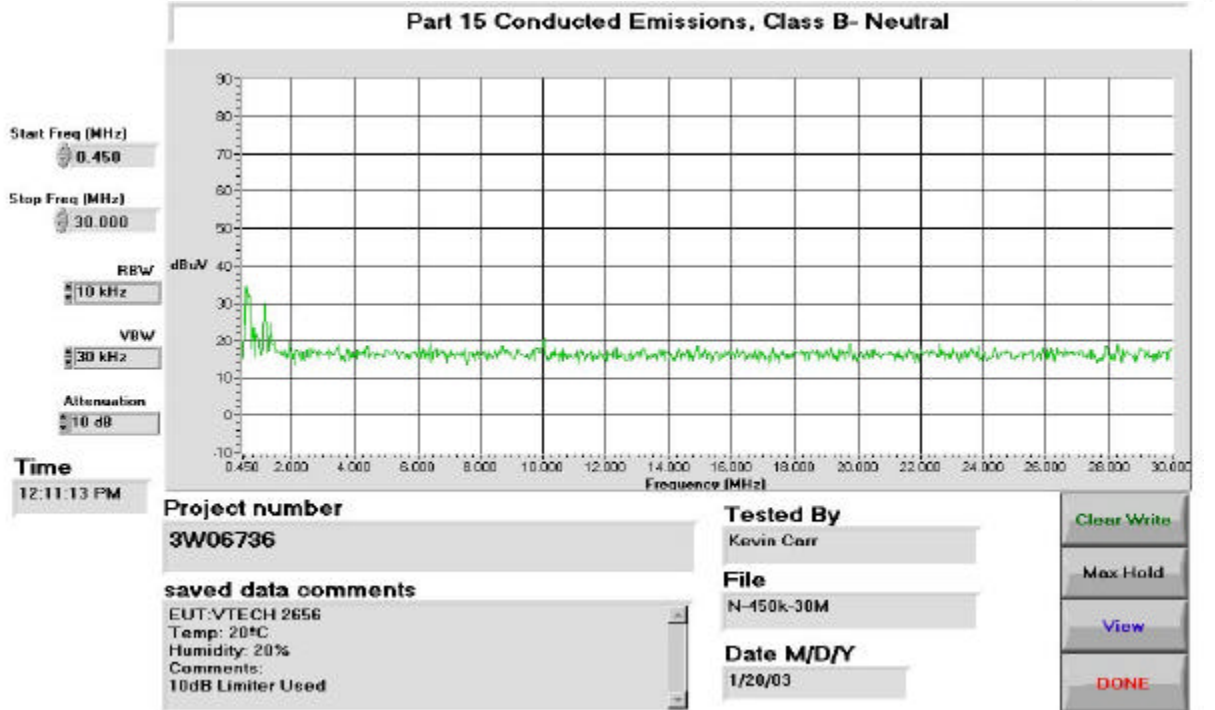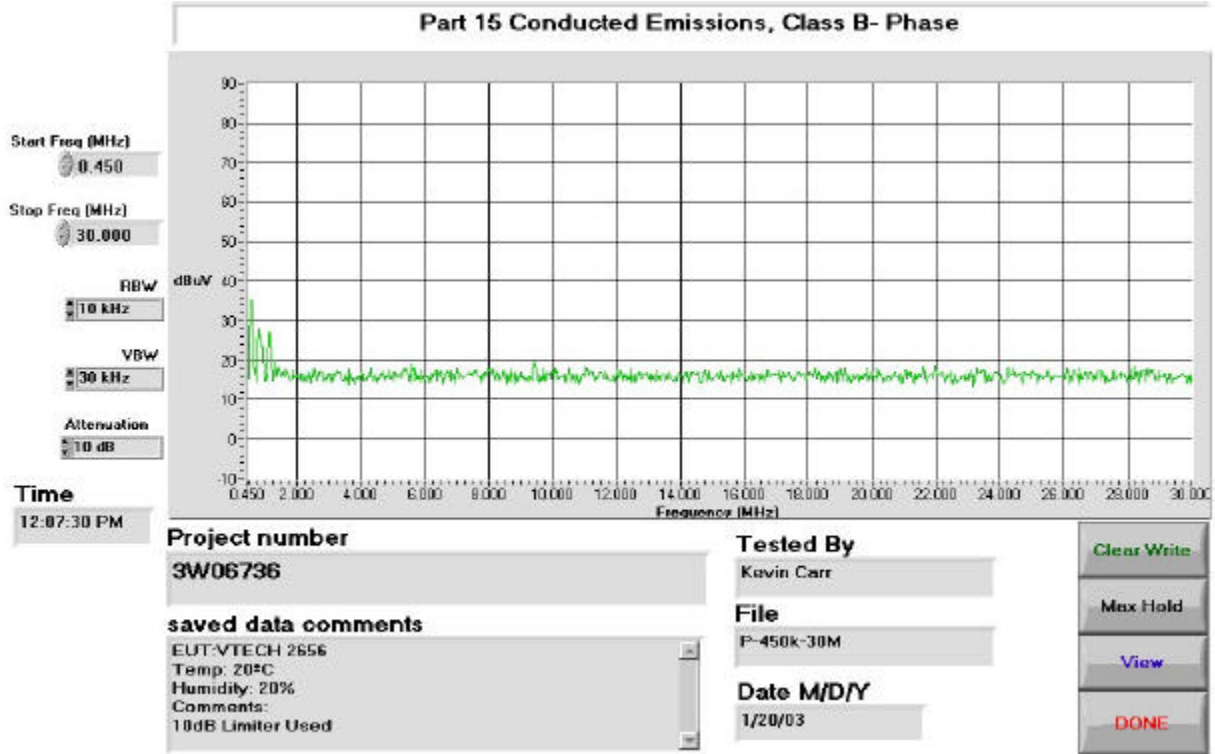

EQUIPMENT: VTECH 2651 and VTECH 2656

Section 4. Channel Separation

Para. No.: 15.247(a)(1)

| | |
|-------------------------------------|-----------------------------------|
| Test Performed By:Kevin Carr | Date of Test: 28 Jan. 2003 |
|-------------------------------------|-----------------------------------|



Test Results: Complied

Measurement Data:

| | | |
|---------------------|------------|--------|
| Channel Separation: | VTECH 2651 | |
| | Base: | 858kHz |
| | Handset: | 875kHz |

EQUIPMENT: VTECH 2651 and VTECH 2656

VTECH 2651

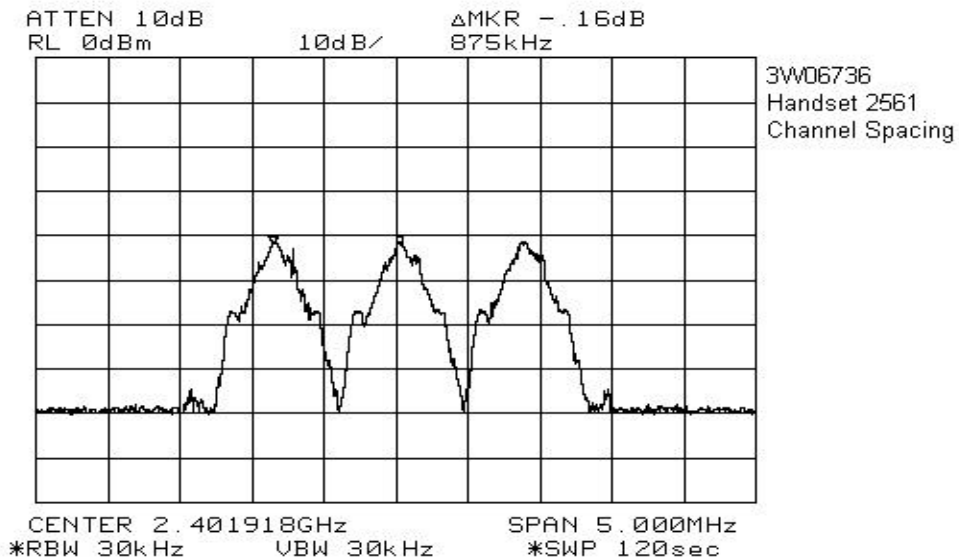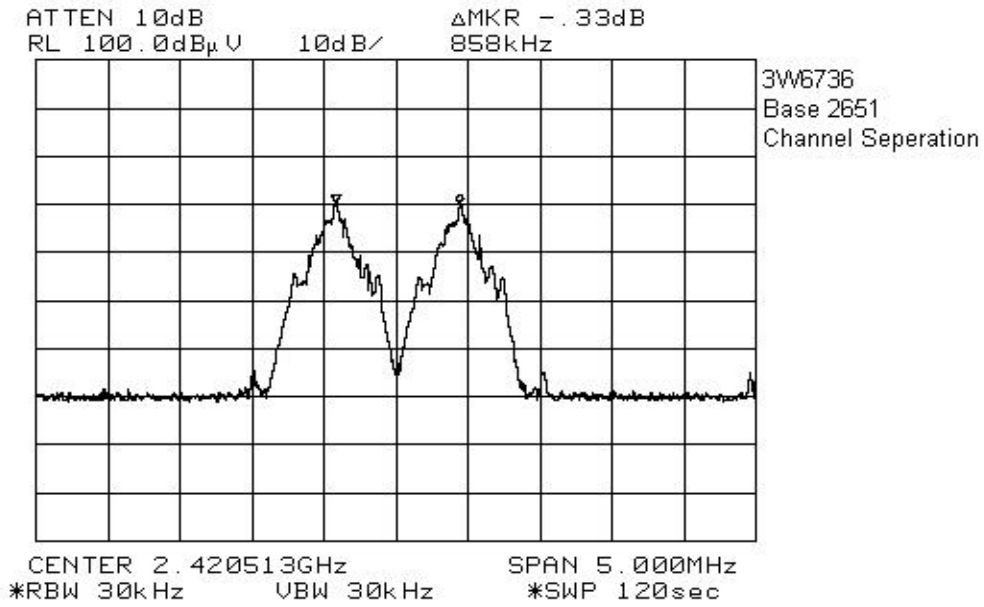

EQUIPMENT: VTECH 2651 and VTECH 2656

Section 4. Occupied Bandwidth

Para. No.: 15.247(a)(2)

| | |
|--------------------------------------|----------------------------------|
| Test Performed By: Kevin Carr | Date of Test: 29 Jan 2003 |
|--------------------------------------|----------------------------------|

Test Results: Complied.

Worst Case 20 dB Bandwidth

Base: 933kHz

Handset: 773kHz



Worst Case 99% Occupied Bandwidth

Base: 813kHz



Handset: 653kHz

Measurement Data: See attached graph.



EQUIPMENT: VTECH 2651 and VTECH 2656

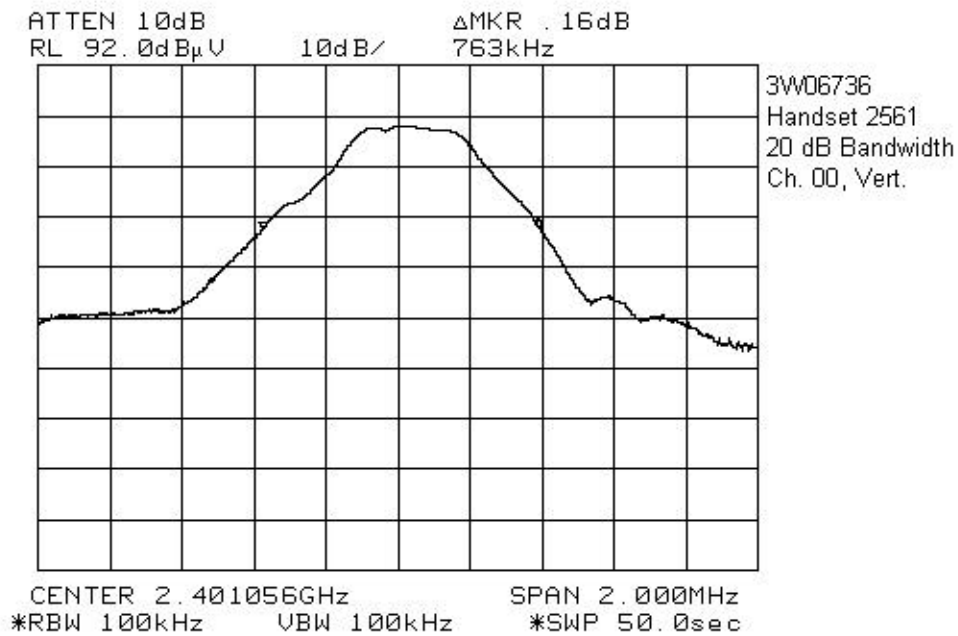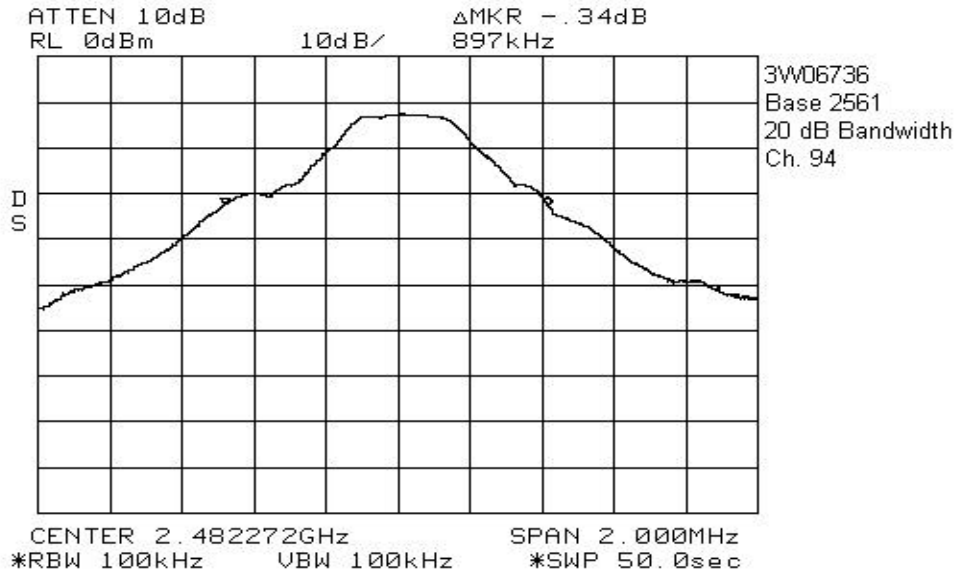



EQUIPMENT: VTECH 2651 and VTECH 2656

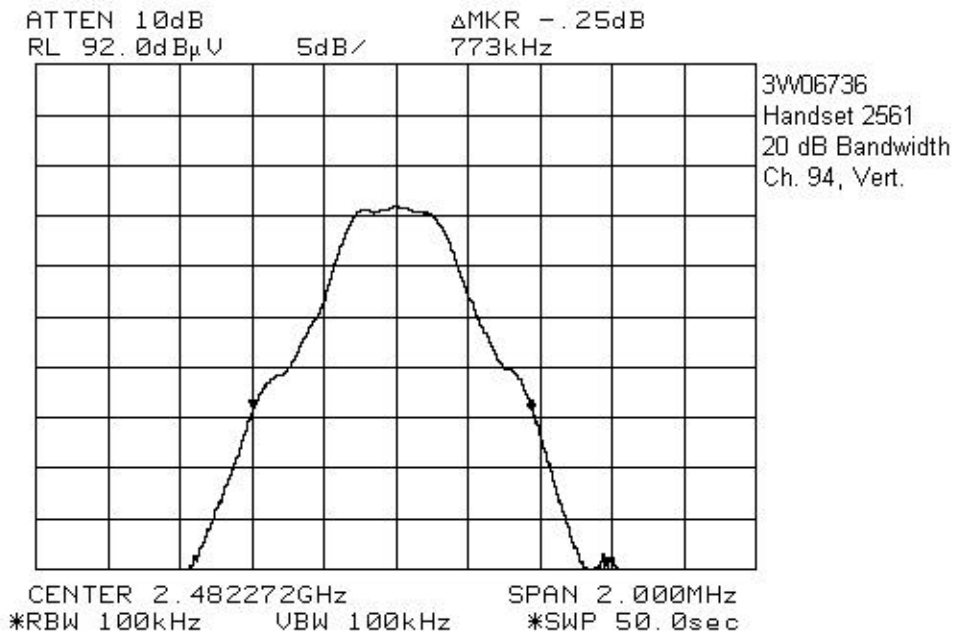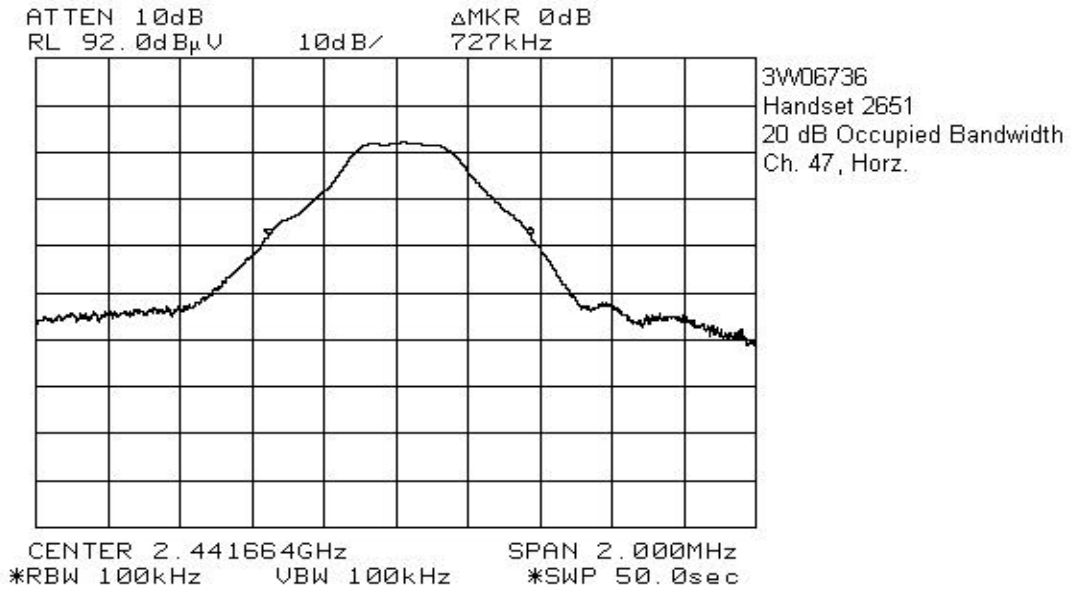

EQUIPMENT: VTECH 2651 and VTECH 2656

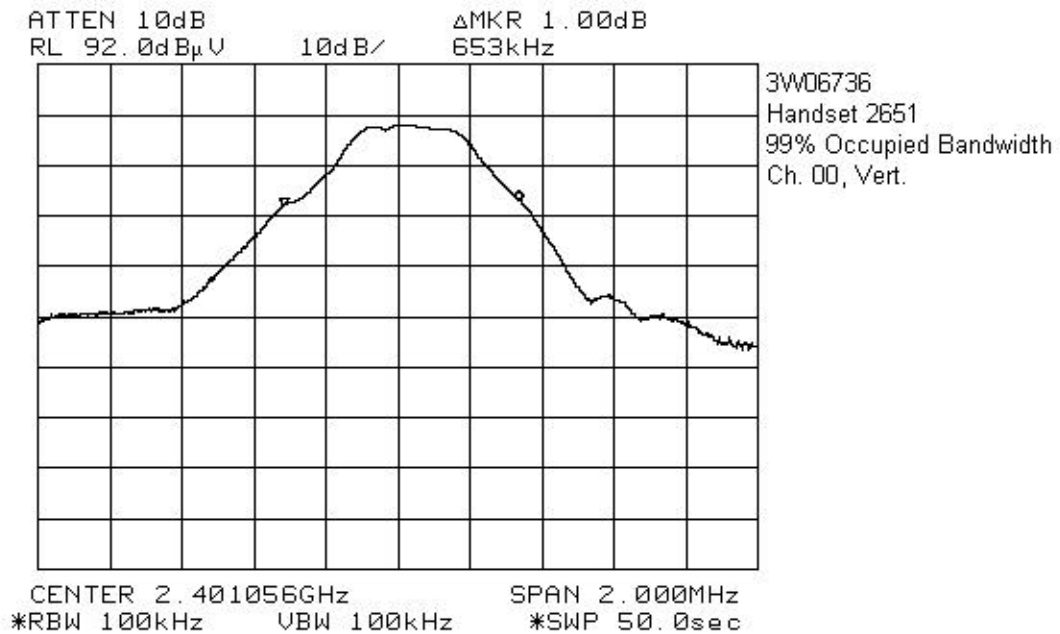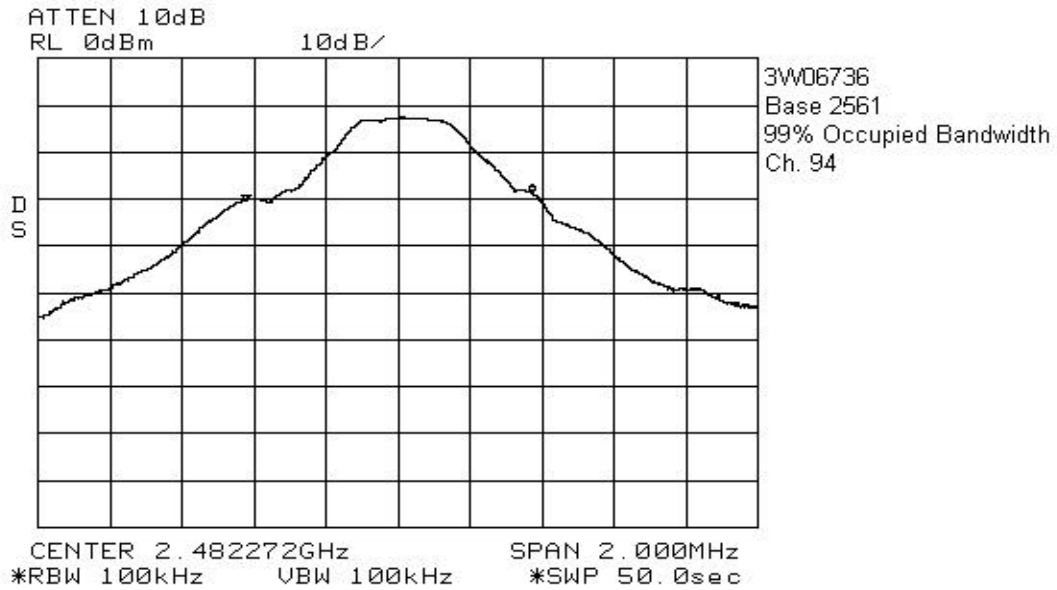

EQUIPMENT: VTECH 2651 and VTECH 2656

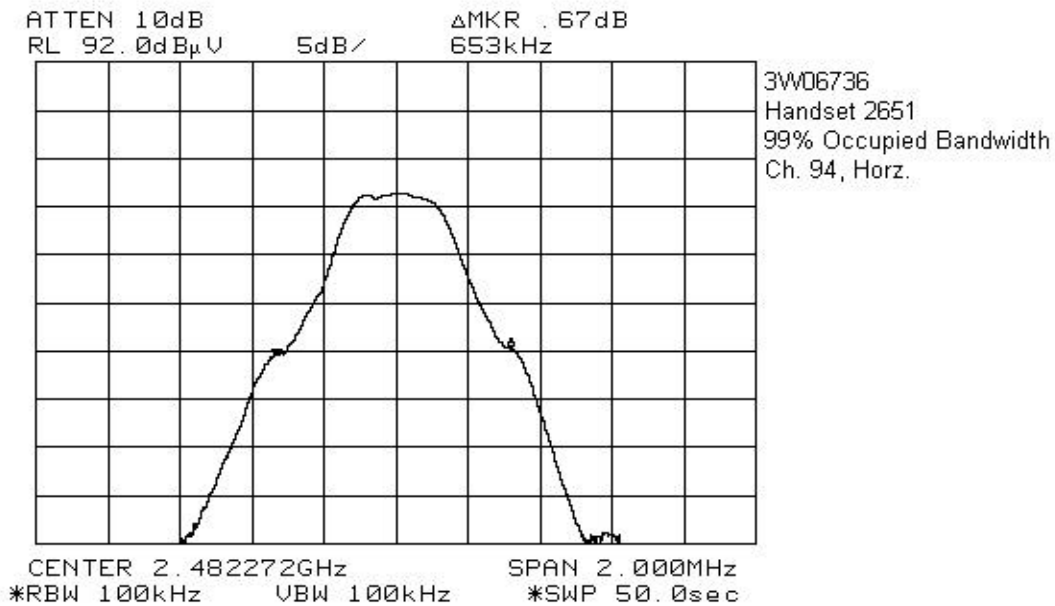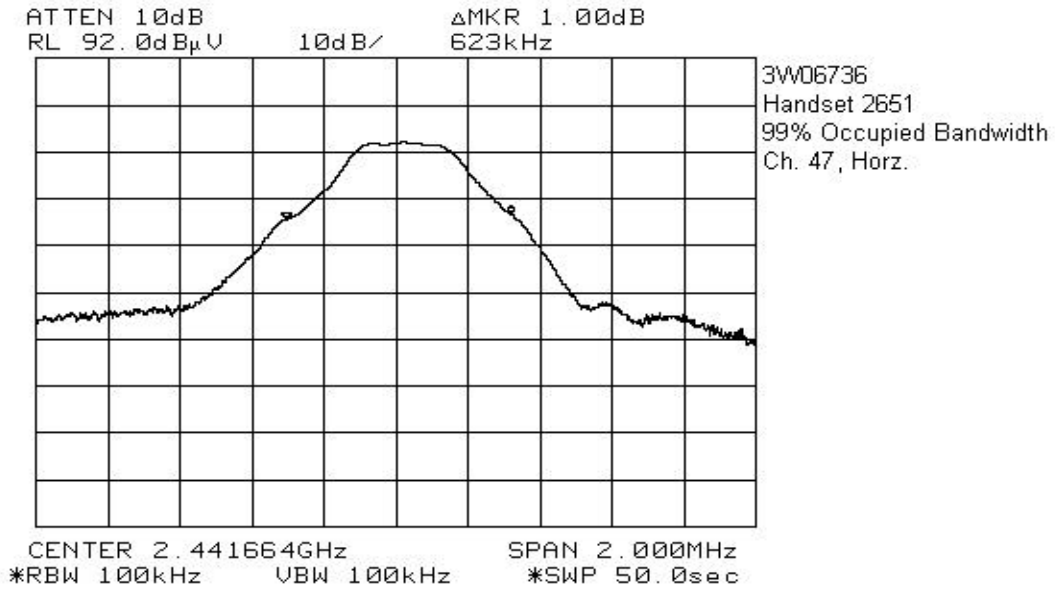

EQUIPMENT: VTECH 2651 and VTECH 2656

Section 5. Peak Power Output

Para. No.: 15.247(b)

| | |
|--------------------------------------|-----------------------------------|
| Test Performed By: Kevin Carr | Date of Test: 28 Jan. 2003 |
|--------------------------------------|-----------------------------------|

Test Results: Complied

The maximum peak power output of the transmitter is 0.0865 watts. The base station RF Power did not vary with +/- 10% AC rail variations.

Measurement Data: Detachable antenna? Yes No

If yes, state the type of non-standard connector used at the antenna port:

Handset

Directional Gain of Antenna: 0 dBi or 1.0 Numeric
Peak Power Output: 0.0865 watts, 19.3 dBm
Field Strength: 114.6 dBµV/m @ 3m or 0.537V/m @ 3m.

Base Station

Directional Gain of Antenna: -1.0 dBi or 0.794 Numeric
Peak Power Output: 0.057 watts, 17.6 dBm
Field Strength: 111.8 dBµV/m @ 3m or 0.389 V/m @ 3m.

See Attached radiated measurements.

EQUIPMENT: VTECH 2651 and VTECH 2656

Radiated Disturbance Test Data: VTECH 2651 Base Station Fundamentals

| Test Date: 22 Jan 2003 | | | | | | |
|--|--------|---|--------------------|------------------------|-----------------|-------------------------|
| Engineer's Name: Kevin Carr | | | | | | |
| Temperature (C°): -10 | | | | Humidity %: 30 | | |
| Tested as per (Table Top/Floor Standing): Table Top | | | | | | |
| Test Distance (meters): 3 | | | | Range: Ottawa, Range 1 | | |
| Emissions within 20 dB of the limit have been recorded. Pre-scan data can be found at the back of this section | | | | | | |
| Freq. (MHz) | Ant. | Pol. V/H | RCVD Signal (dBµV) | Ant. Factor (dB) | Cable Loss (dB) | Field Strength (dBµV/m) |
| Ch. 00 | | | | | | |
| 2401.060 | Horn 1 | V | 77.9 | 29.2 | 4.7 | 111.8 |
| 2401.070 | Horn 1 | H | 76.5 | 29.2 | 4.7 | 110.4 |
| Ch. 47 | | | | | | |
| 2441.63 | Horn 1 | V | 76.4 | 29.2 | 5.2 | 110.8 |
| 2441.63 | Horn 1 | H | 75.2 | 29.2 | 5.2 | 109.6 |
| Ch. 94 | | | | | | |
| 2482.27 | Horn 1 | V | 71.0 | 29.2 | 5.6 | 105.8 |
| 2482.27 | Horn 1 | H | 73.7 | 29.2 | 5.6 | 108.5 |
| Handset | | | | | | |
| Ch 47 | | | | | | |
| 2442 | Horn 1 | V | 80.2 | 29.2 | 5.2 | 114.6 |
| 2442 | Horn 1 | H | 77.3 | 29.2 | 5.2 | 111.7 |
| Note 1: Antenna Legend: BC = Biconical, BL = Bilog, LP = Log-Periodic, Horn = Horn, ED = EMCO Dipole | | | | | | |
| Note 2: Detector Legend: Q-Peak = 120 kHz RBW, Average = 1.0 MHz RBW | | | | | | |
| Notes: | | The RF Circuitry in the VTECH 2651 and VTECH 2656 are identical, therefore only the VTECH 2651 was tested | | | | |

EQUIPMENT: VTECH 2651 and VTECH 2656

Radiated Disturbance Test Data: VTECH 2651 Handset Fundamentals

| Test Date: 28 Jan 2003 | | | | | |
|--|--------|---|----------------------|-------------------------------|-------------------------|
| Engineer's Name: Kevin Carr | | | | | |
| Temperature (C°): 7 | | | Humidity %: 65 | | |
| Tested as per (Table Top/Floor Standing): Table Top | | | | | |
| Test Distance (meters): 3 | | | Range:Almonte, Range | | |
| Emissions within 20 dB of the limit have been recorded. Pre-scan data can be found at the back of this section | | | | | |
| Freq. (MHz) | Ant. | Pol. V/H | RCVD Signal (dBµV) | Ant. Factor + Cable Loss (dB) | Field Strength (dBµV/m) |
| Ch. 00 | | | | | |
| 2400.97 | Horn 3 | V | 80.2 | 37.7 | 117.9 |
| 2441.75 | Horn 3 | H | 74.0 | 38.0 | 112.0 |
| Ch. 94 | | | | | |
| 2482.26 | Horn 3 | V | 78.2 | 38.1 | 116.3 |
| 2482.27 | Horn 3 | H | 78.4 | 38.1 | 116.5 |
| Note 1: Antenna Legend: BC = Biconical, BL = Bilog, LP = Log-Periodic, Horn = Horn, ED = EMCO Dipole | | | | | |
| Note 2: Detector Legend: Q-Peak = 120 kHz RBW, Average = 1.0 MHz RBW | | | | | |
| Notes: | | The RF Circuitry in the VTECH 2651 and VTECH 2656 are identical, therefore only the VTECH 2651 was tested | | | |

EQUIPMENT: VTECH 2651 and VTECH 2656

