




Appendix B

Peak Output Power




Marker 1 [T1] RBW 1 MHz RF Att 50 dB
Ref Lvl 18.62 dBm VBW 1 MHz
30 dBm 2.40184285 GHz SWT 5 ms Unit dBm

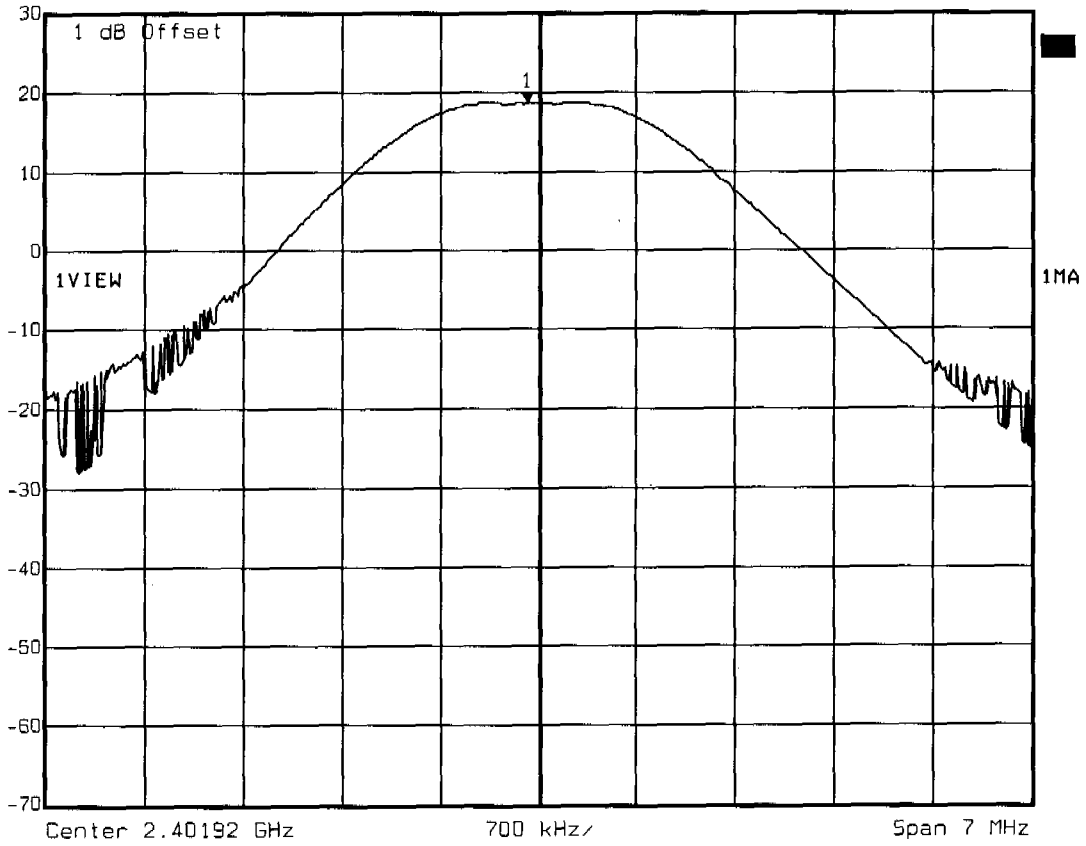

Title: Peak Output Power conducted Ch.: 0
Comment A: USB7100 Base
Date: 16.FEB.2005 14:55:59




Ref Lvl	30 dBm	Marker 1 [T1]	18.63 dBm	RBW	1 MHz	RF Att	50 dB
			2.44162893 GHz	VBW	1 MHz	Unit	dBm
				SWT	5 ms		

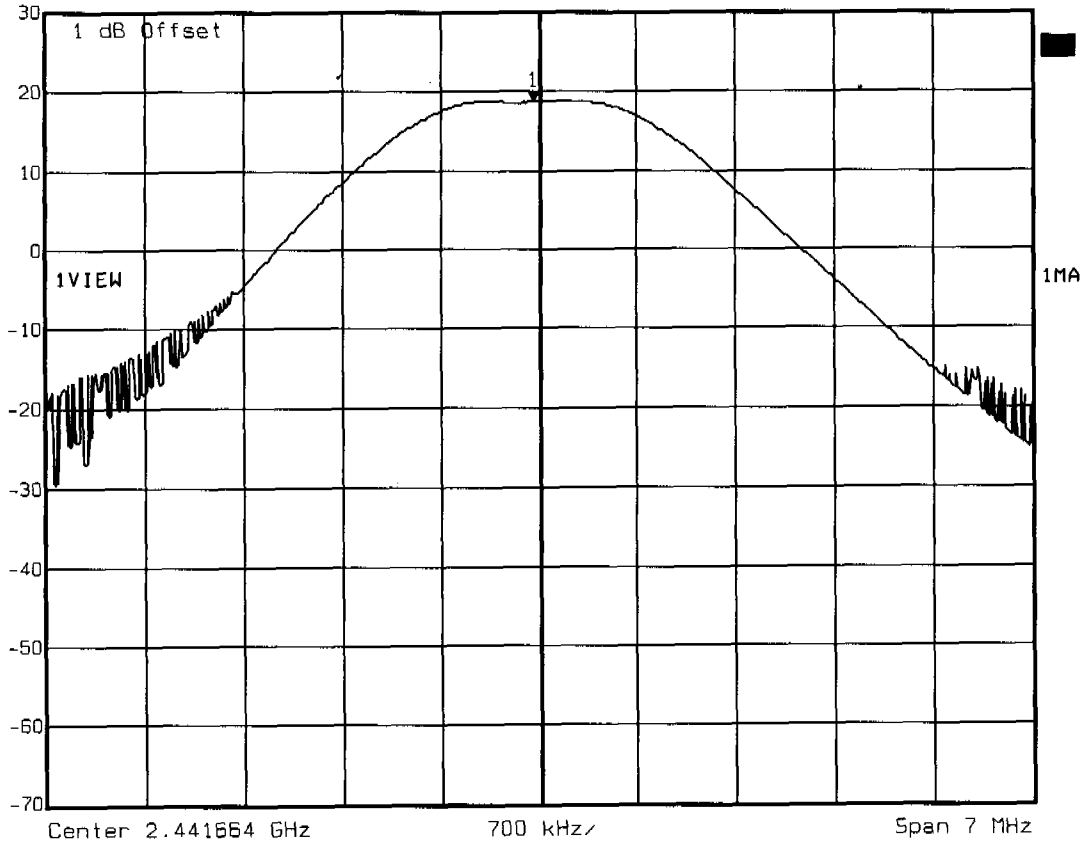

Title: Peak Output Power conducted Ch.: 23
Comment A: USB7100 Base
Date: 16.FEB.2005 14:57:33



Marker 1 [T1] RBW 1 MHz RF Att 50 dB
Ref Lvl 18.46 dBm VBW 1 MHz
30 dBm 2.48103626 GHz SWT 5 ms Unit dBm

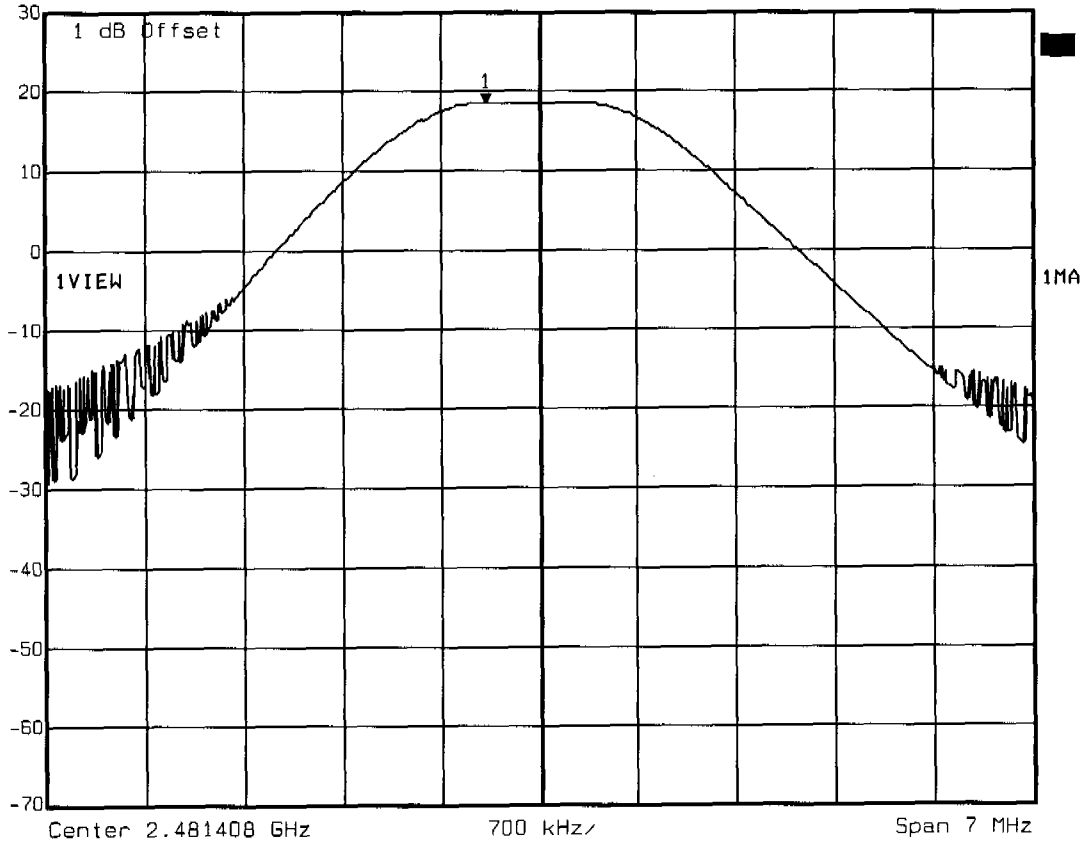


Title: Peak Output Power conducted Ch.: 46
Comment A: USB7100 Base
Date: 16.FEB.2005 14:59:14

Carrier power (dBm)

FCC RULES PART 15, SUBPART C


Approval Holder: VTech Telecommunications Limited
EUT: 2.4 GHz Cordless VoIP Phone / Base / Antenna 1 / Ch.: 0
Model: USB7100 (HS+BS)
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 7.0 V DC (120 V AC/DC adaptor)
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq: 2.402GHz, Pmax: 20.79dBm, RBW: 5MHz

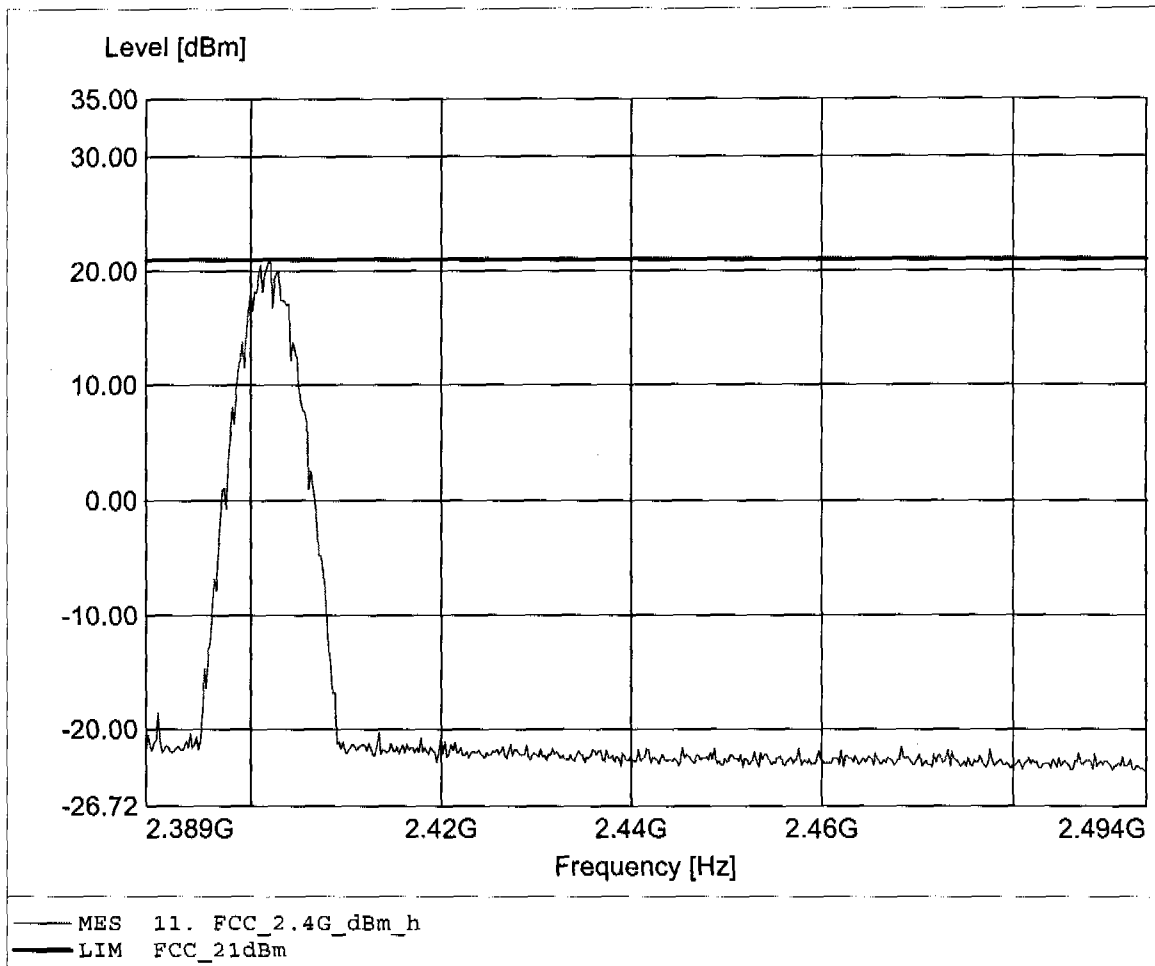

Carrier power (dBm)

FCC RULES PART 15, SUBPART C


Approval Holder: VTech Telecommunications Limited
EUT: 2.4 GHz Cordless VoIP Phone / Base / Antenna 1 / Ch.: 0
Model: USB7100 (HS+BS)
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 7.0 V DC (120 V AC/DC adaptor)
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq: 2.402GHz, Pmax: 16.60dBm, RBW: 5MHz

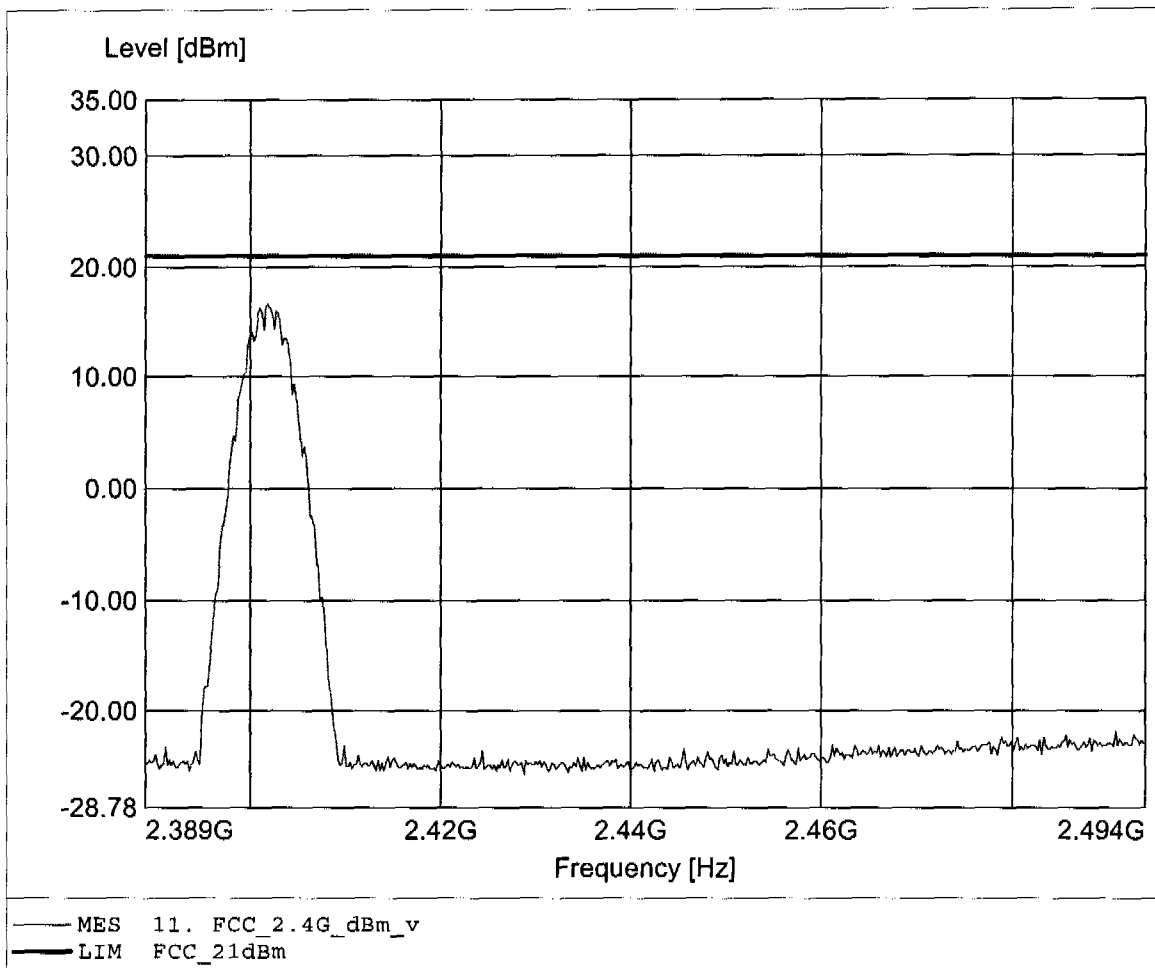

Carrier power (dBm)

FCC RULES PART 15, SUBPART C


Approval Holder: VTech Telecommunications Limited
EUT: 2.4 GHz Cordless VoIP Phone / Base / Antenna 1 / Ch.: 0
Model: USB7100 (HS+BS)
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 7.0 V DC (120 V-15% AC/DC adaptor)
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq: 2.402GHz, Pmax: 20.99dBm, RBW: 5MHz

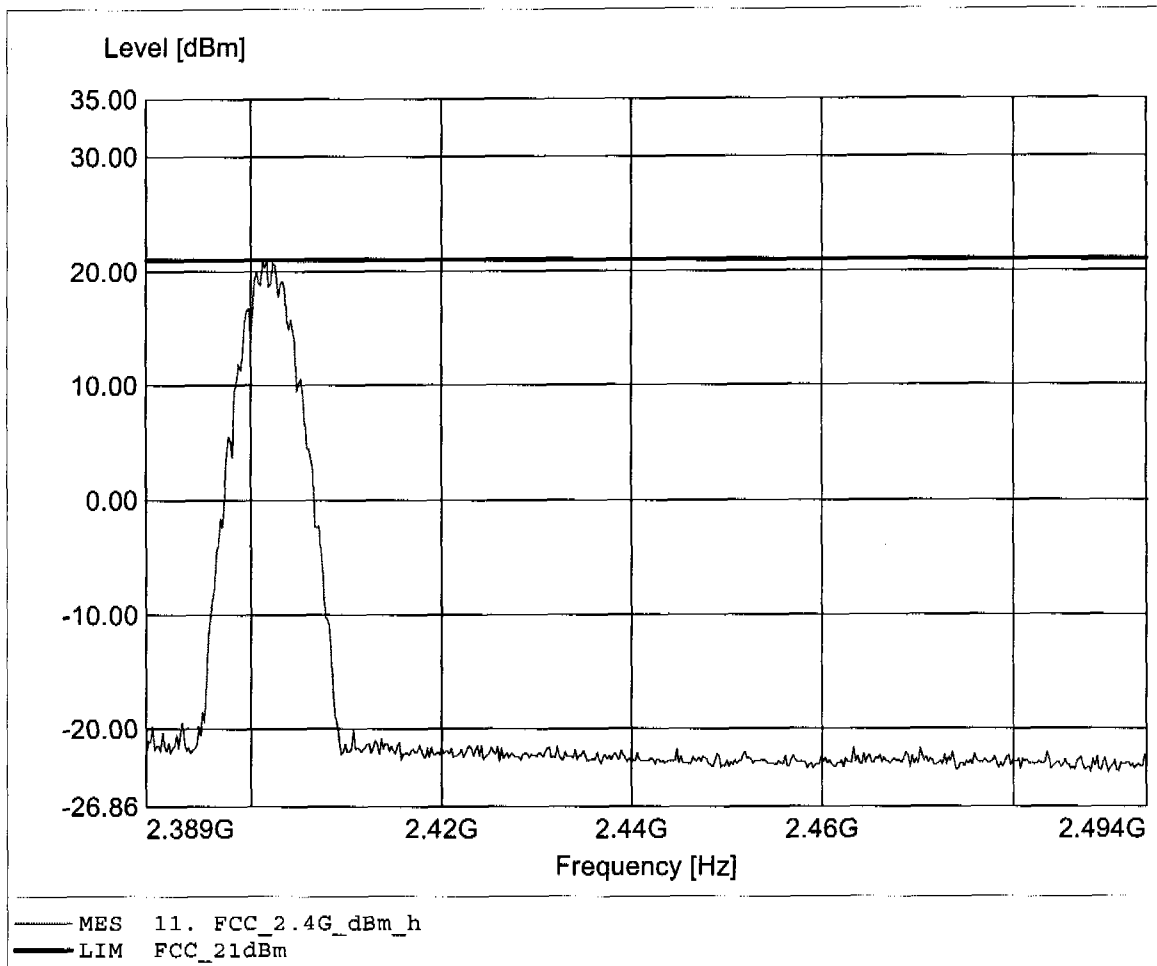

Carrier power (dBm)

FCC RULES PART 15, SUBPART C


Approval Holder: VTech Telecommunications Limited
EUT: 2.4 GHz Cordless VoIP Phone / Base / Antenna 1 / Ch.: 0
Model: USB7100 (HS+BS)
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 7.0 V DC (120 V-15% AC/DC adaptor)
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq: 2.401GHz, Pmax: 16.42dBm, RBW: 5MHz

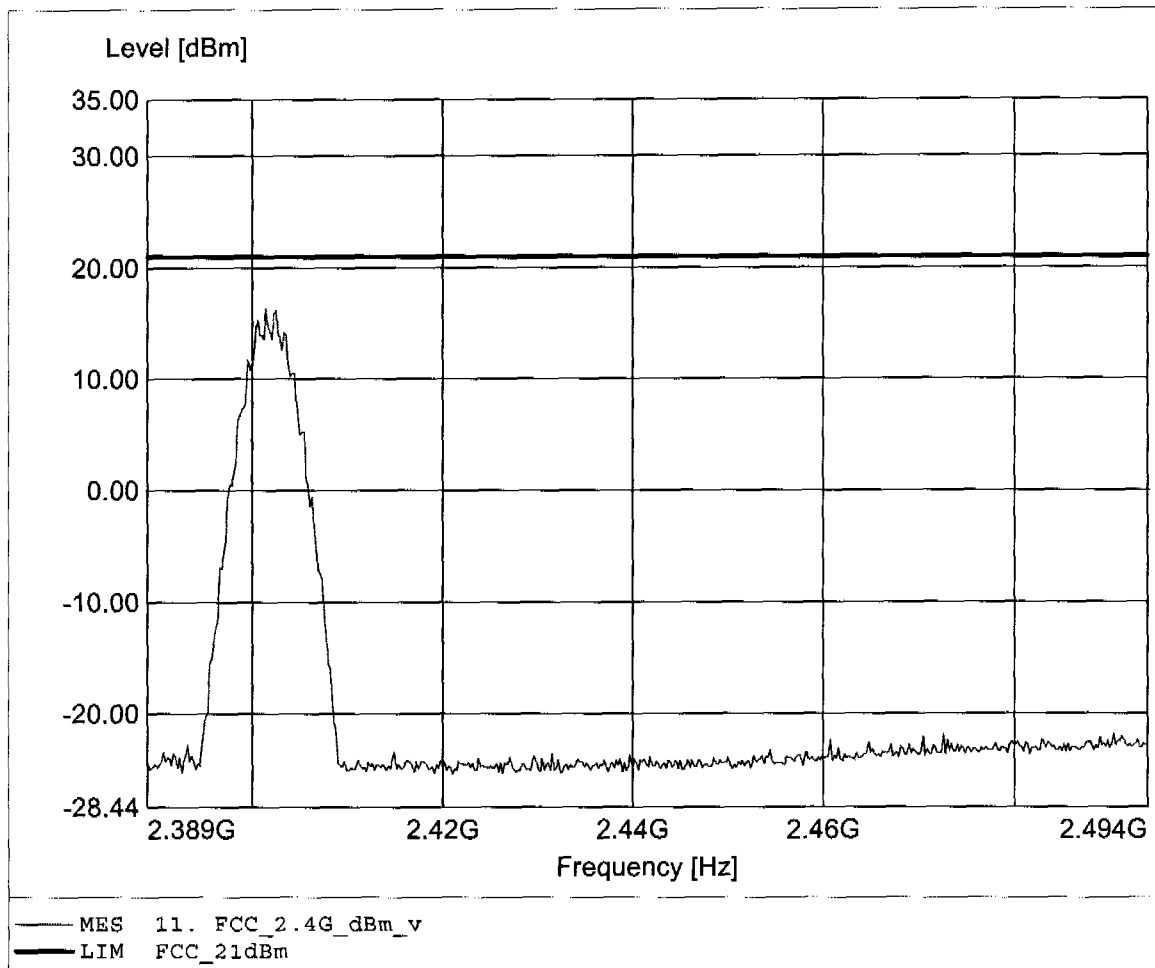

Carrier power (dBm)

FCC RULES PART 15, SUBPART C


Approval Holder: VTech Telecommunications Limited
EUT: 2.4 GHz Cordless VoIP Phone / Base / Antenna 1 / Ch.: 0
Model: USB7100 (HS+BS)
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 7.0 V DC (120 V+15% AC/DC adaptor)
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq: 2.401GHz, Pmax: 20.90dBm, RBW: 5MHz

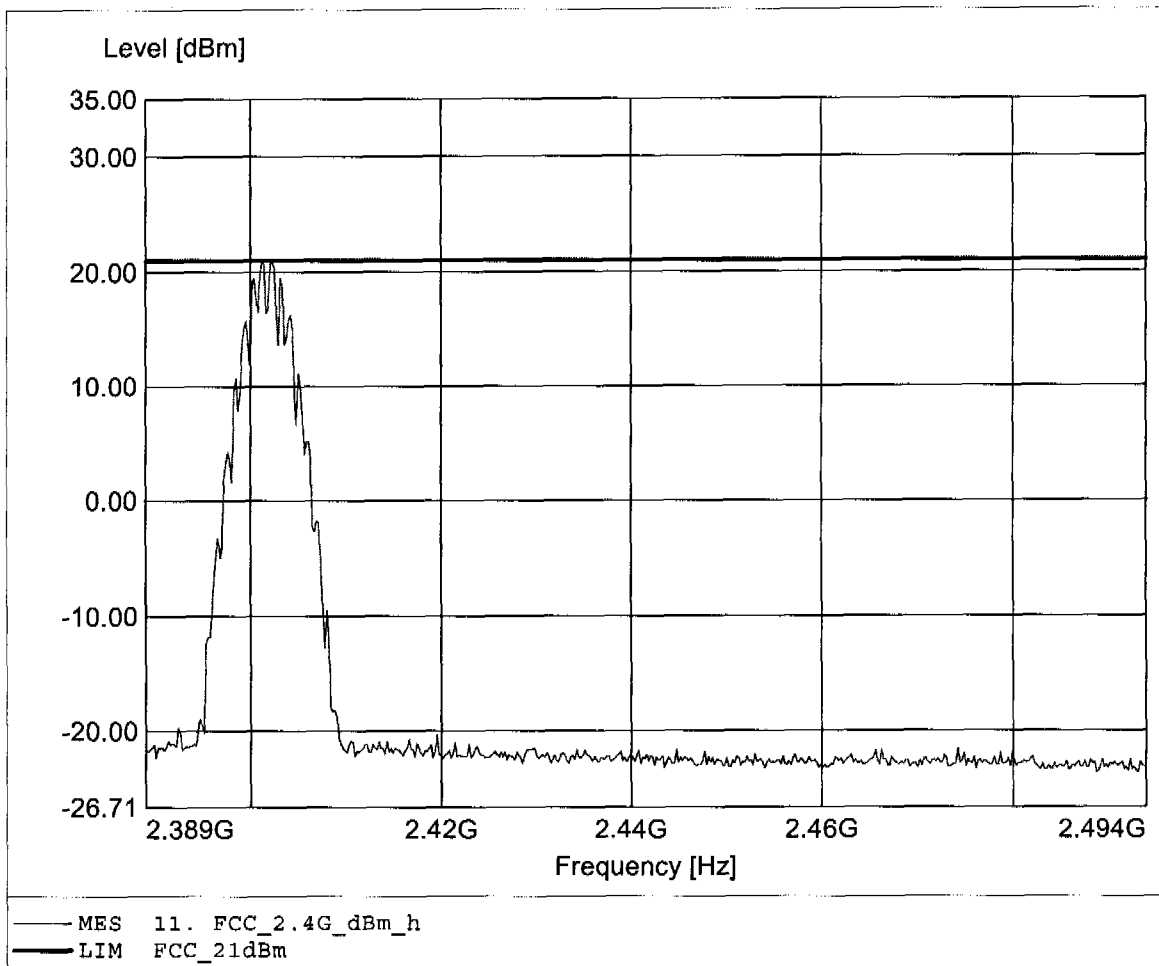

Carrier power (dBm)

FCC RULES PART 15, SUBPART C


Approval Holder: VTech Telecommunications Limited
EUT: 2.4 GHz Cordless VoIP Phone / Base / Antenna 1 / Ch.: 0
Model: USB7100 (HS+BS)
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 7.0 V DC (120 V+15% AC/DC adaptor)
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq: 2.402GHz, Pmax: 16.55dBm, RBW: 5MHz

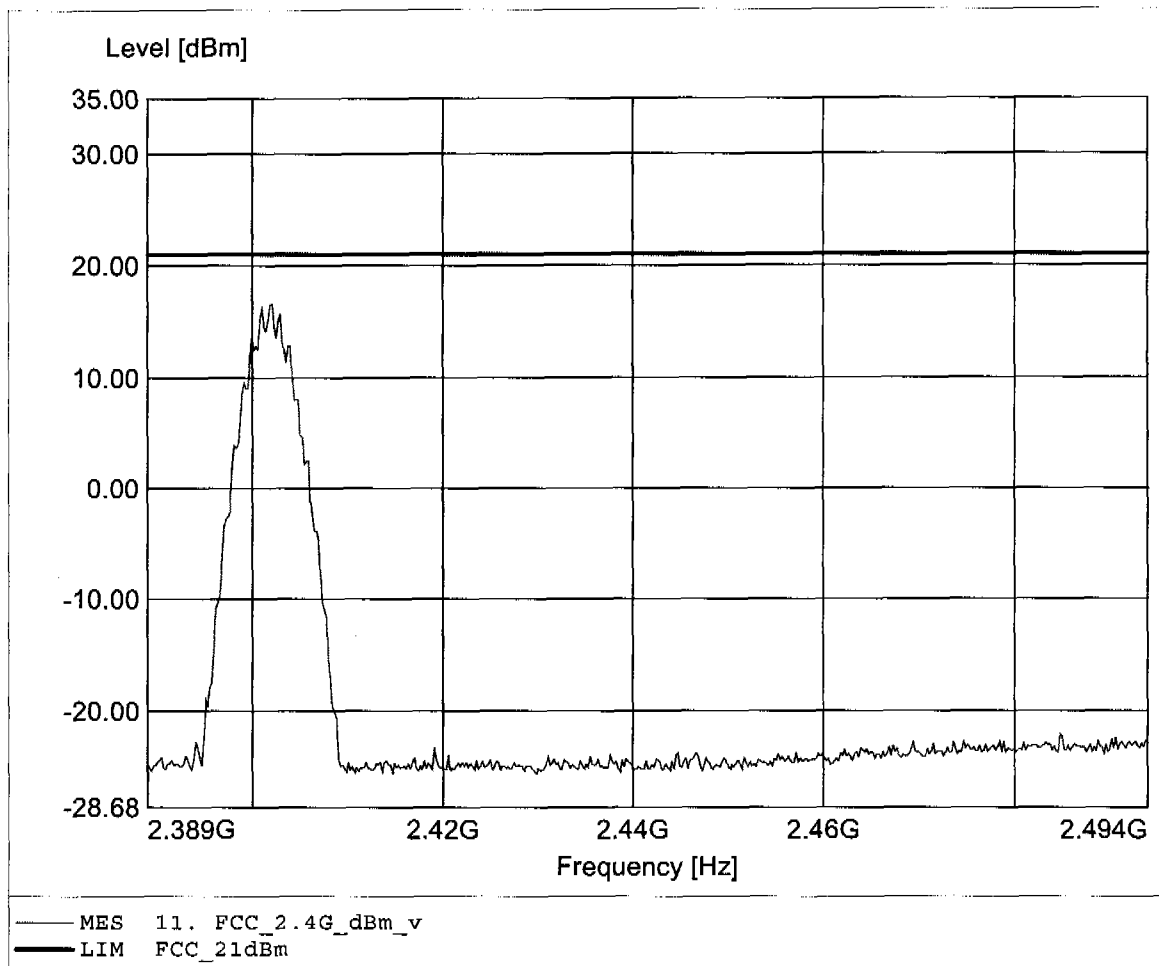

Carrier power (dBm)

FCC RULES PART 15, SUBPART C


Approval Holder: VTech Telecommunications Limited
EUT: 2.4 GHz Cordless VoIP Phone / Base / Antenna 1 / Ch.: 23
Model: USB7100 (HS+BS)
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 7.0 V DC (120 V AC/DC adaptor)
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq: 2.441GHz, Pmax: 18.73dBm, RBW: 5MHz

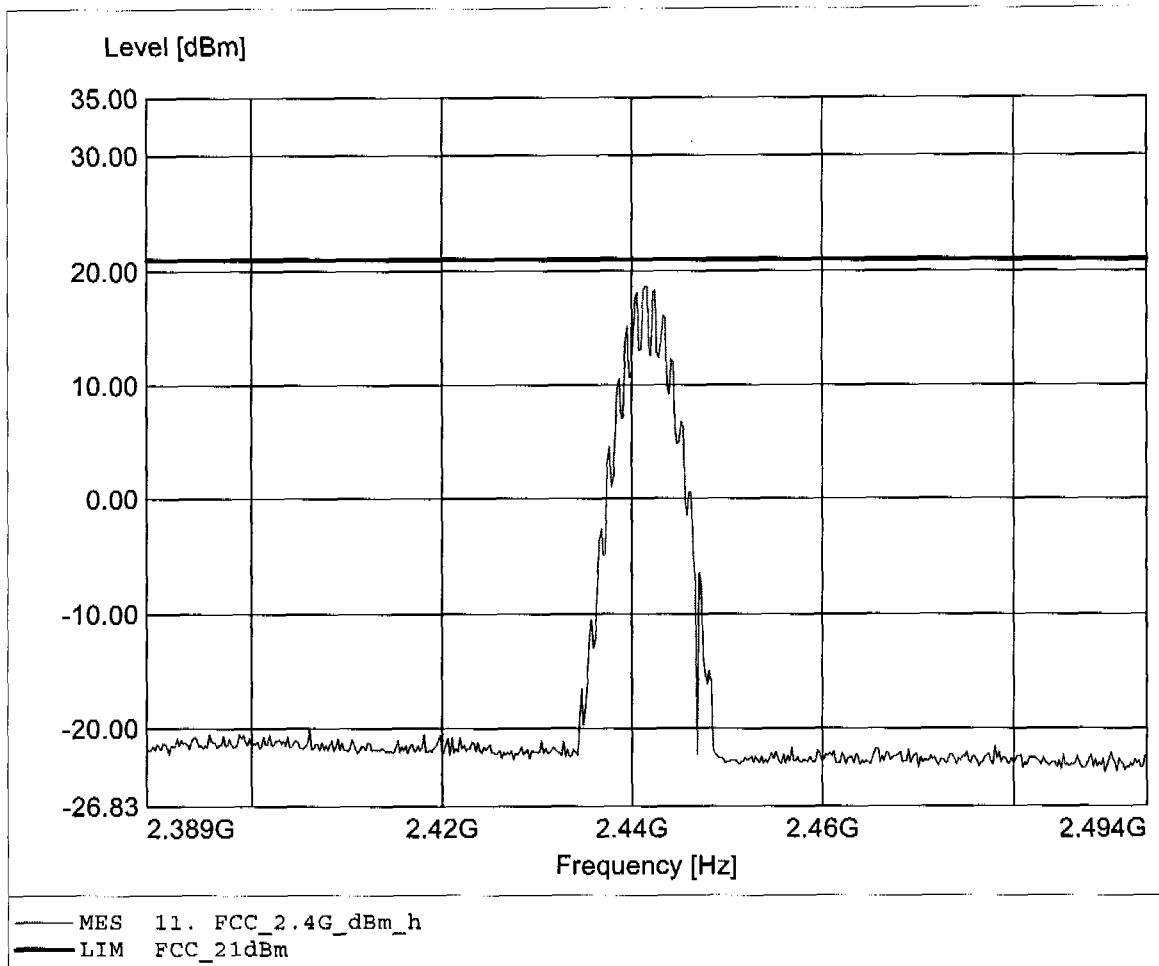

Carrier power (dBm)

FCC RULES PART 15, SUBPART C


Approval Holder: VTech Telecommunications Limited
EUT: 2.4 GHz Cordless VoIP Phone / Base / Antenna 1 / Ch.: 23
Model: USB7100 (HS+BS)
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 7.0 V DC (120 V AC/DC adaptor)
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq: 2.441GHz, Pmax: 15.36dBm, RBW: 5MHz

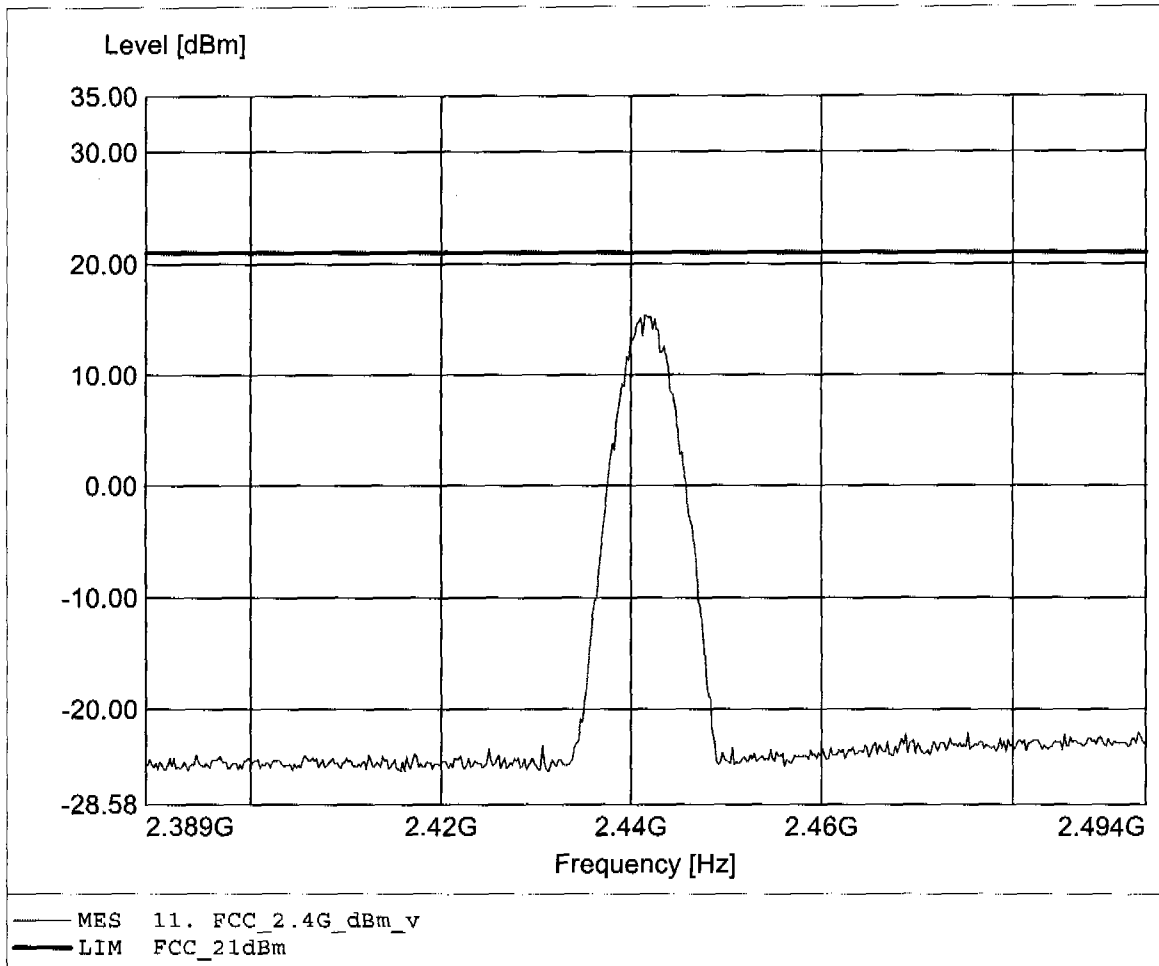

Carrier power (dBm)

FCC RULES PART 15, SUBPART C


Approval Holder: VTech Telecommunications Limited
EUT: 2.4 GHz Cordless VoIP Phone / Base / Antenna 1 / Ch.: 23
Model: USB7100 (HS+BS)
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 7.0 V DC (120 V-15% AC/DC adaptor)
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq: 2.441GHz, Pmax: 18.66dBm, RBW: 5MHz

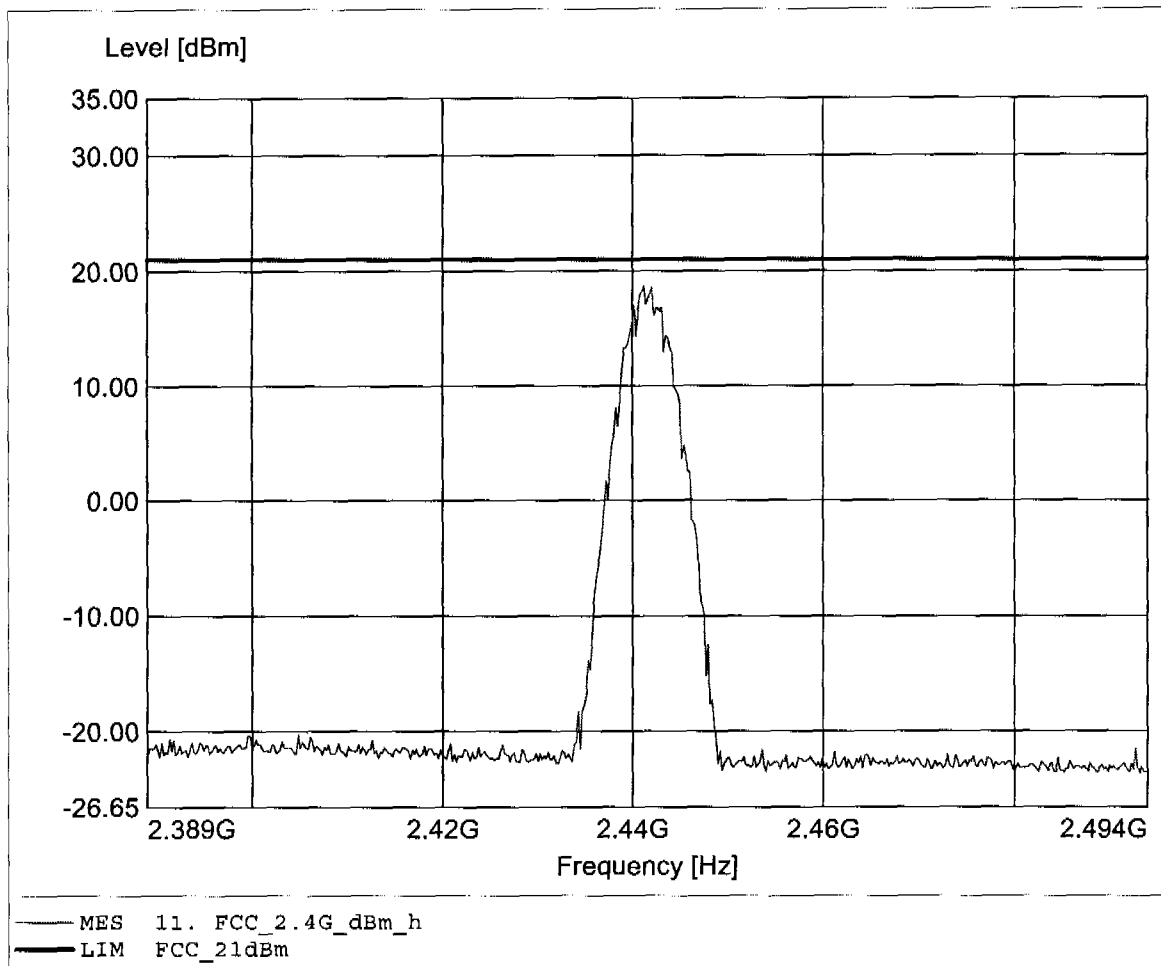

Carrier power (dBm)

FCC RULES PART 15, SUBPART C


Approval Holder: VTech Telecommunications Limited
EUT: 2.4 GHz Cordless VoIP Phone / Base / Antenna 1 / Ch.: 23
Model: USB7100 (HS+BS)
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 7.0 V DC (120 V-15% AC/DC adaptor)
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq: 2.442GHz, Pmax: 15.38dBm, RBW: 5MHz

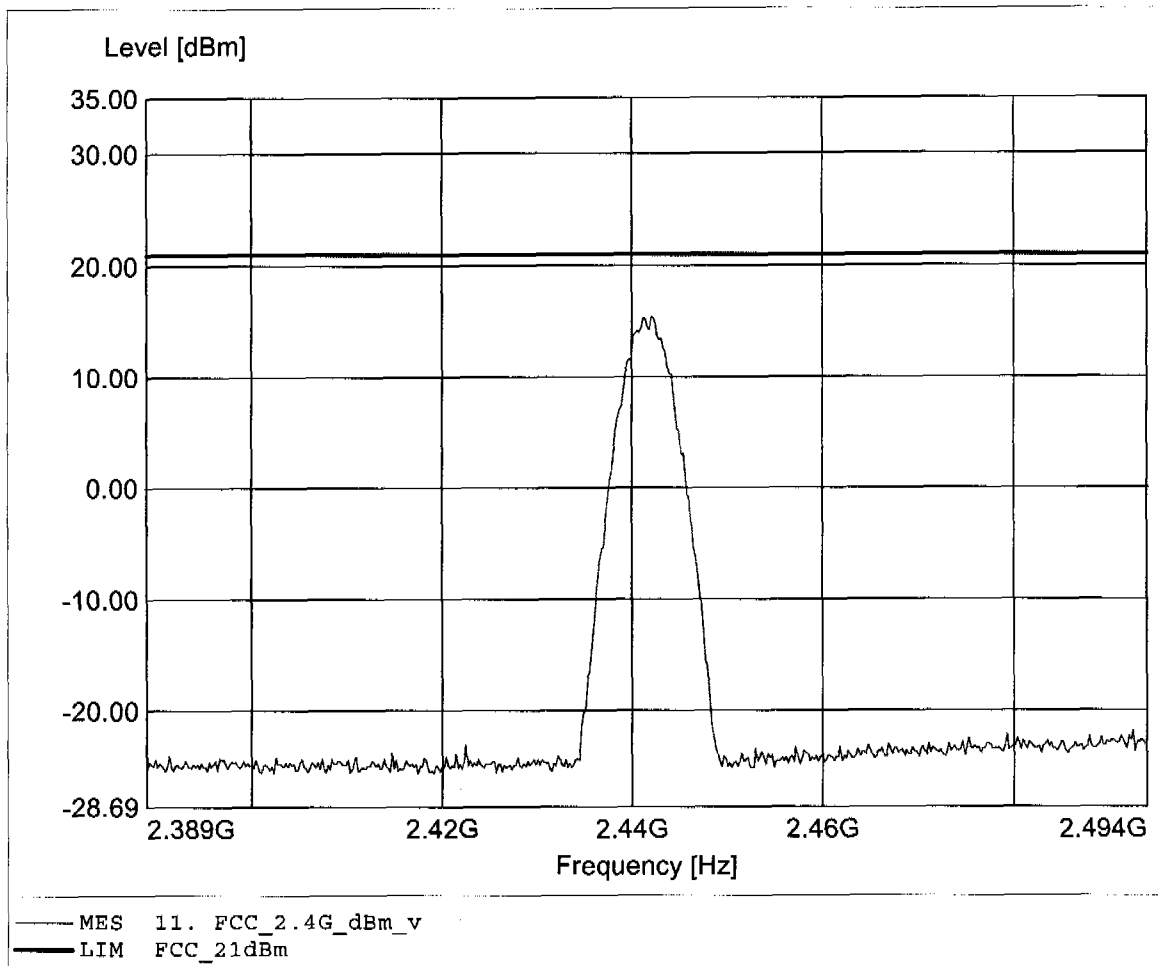

Carrier power (dBm)

FCC RULES PART 15, SUBPART C


Approval Holder: VTech Telecommunications Limited
EUT: 2.4 GHz Cordless VoIP Phone / Base / Antenna 1 / Ch.: 23
Model: USB7100 (HS+BS)
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 7.0 V DC (120 V+15% AC/DC adaptor)
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq: 2.442GHz, Pmax: 18.66dBm, RBW: 5MHz

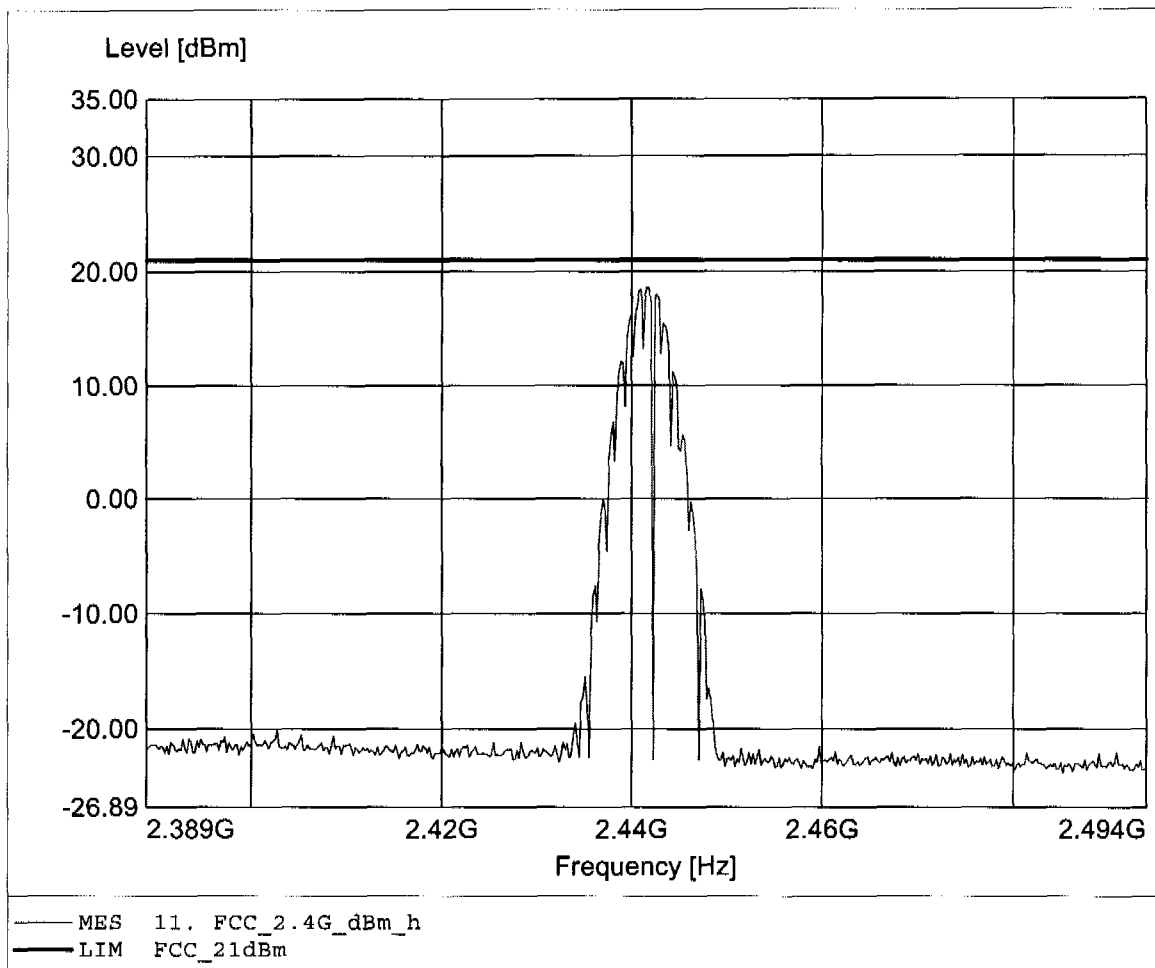

Carrier power (dBm)

FCC RULES PART 15, SUBPART C


Approval Holder: VTech Telecommunications Limited
EUT: 2.4 GHz Cordless VoIP Phone / Base / Antenna 1 / Ch.: 23
Model: USB7100 (HS+BS)
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 7.0 V DC (120 V+15% AC/DC adaptor)
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq: 2.442GHz, Pmax: 15.37dBm, RBW: 5MHz

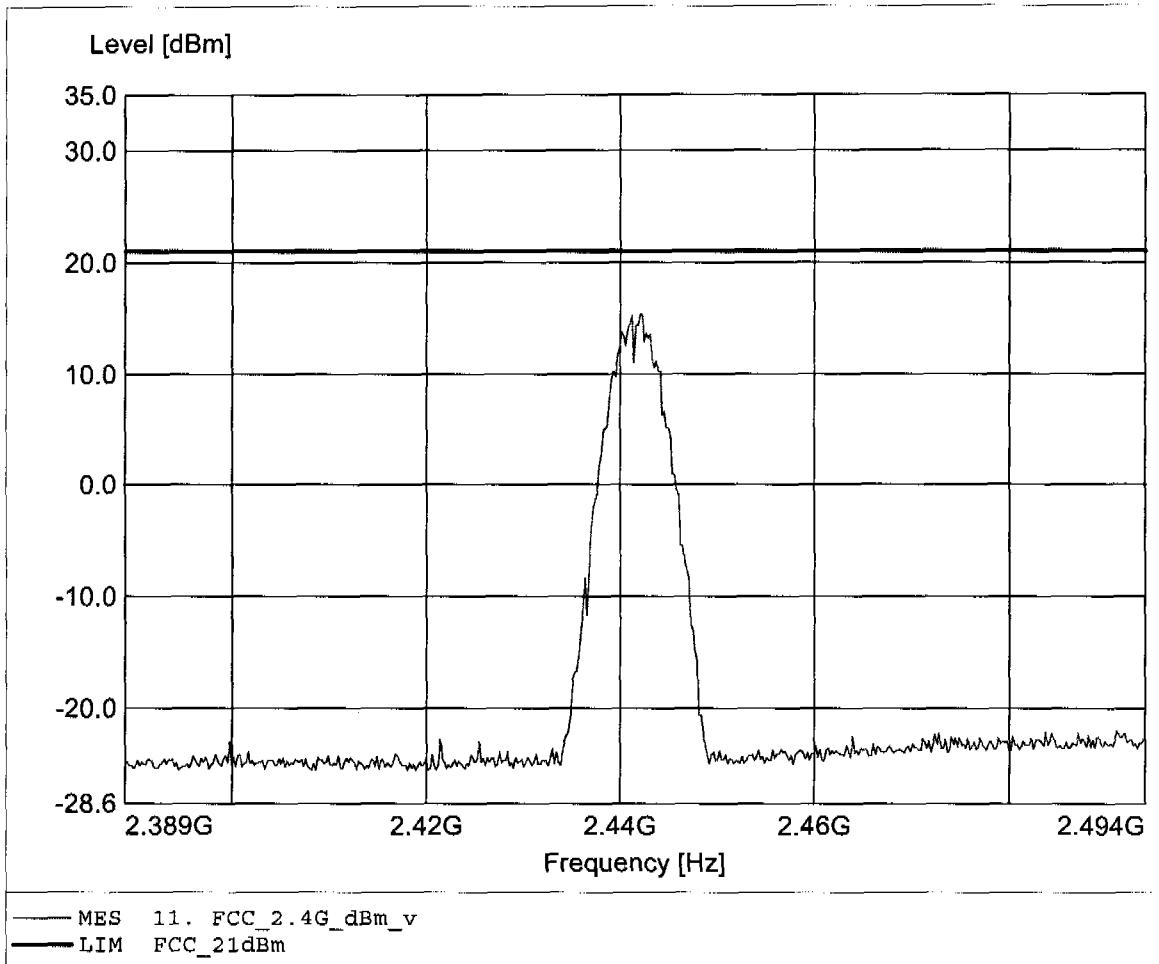

Carrier power (dBm)

FCC RULES PART 15, SUBPART C


Approval Holder: VTech Telecommunications Limited
EUT: 2.4 GHz Cordless VoIP Phone / Base / Antenna 1 / Ch.: 46
Model: USB7100 (HS+BS)
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 7.0 V DC (120 V AC/DC adaptor)
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq: 2.481GHz, Pmax: 15.09dBm, RBW: 5MHz

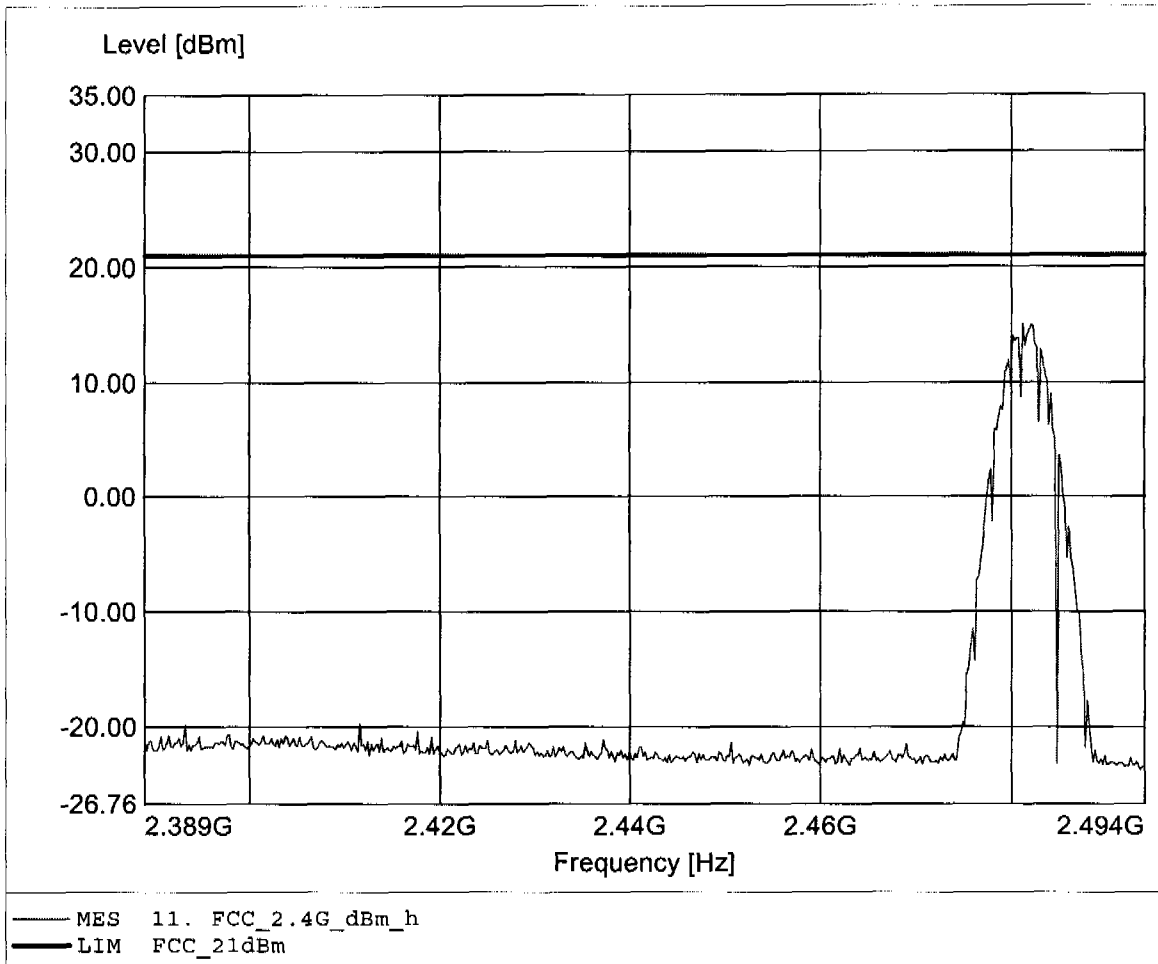

Carrier power (dBm)

FCC RULES PART 15, SUBPART C


Approval Holder: VTech Telecommunications Limited
EUT: 2.4 GHz Cordless VoIP Phone / Base / Antenna 1 / Ch.: 46
Model: USB7100 (HS+BS)
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 7.0 V DC (120 V AC/DC adaptor)
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq: 2.482GHz, Pmax: 19.42dBm, RBW: 5MHz

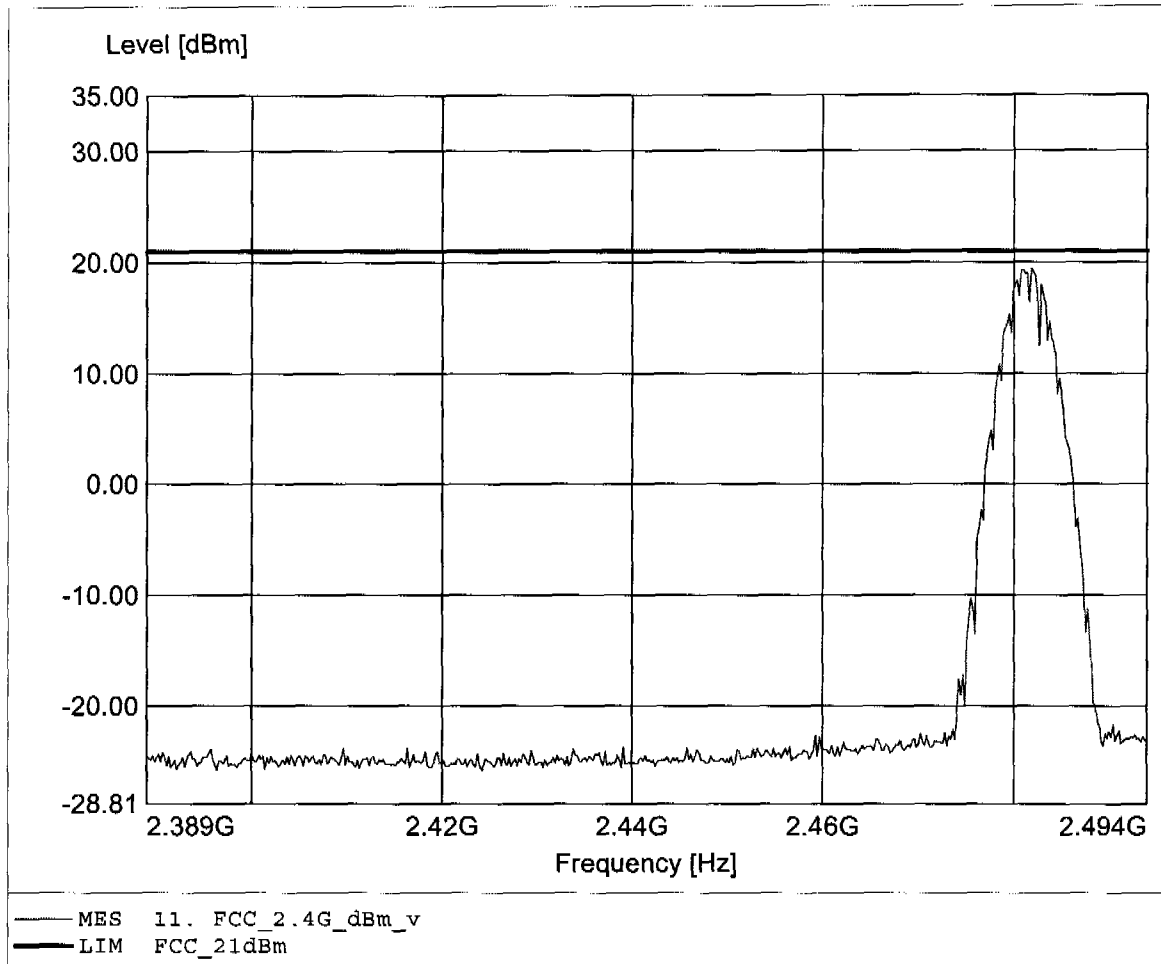

Carrier power (dBm)

FCC RULES PART 15, SUBPART C


Approval Holder: VTech Telecommunications Limited
EUT: 2.4 GHz Cordless VoIP Phone / Base / Antenna 1 / Ch.: 46
Model: USB7100 (HS+BS)
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 7.0 V DC (120 V-15% AC/DC adaptor)
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq: 2.482GHz, Pmax: 15.11dBm, RBW: 5MHz

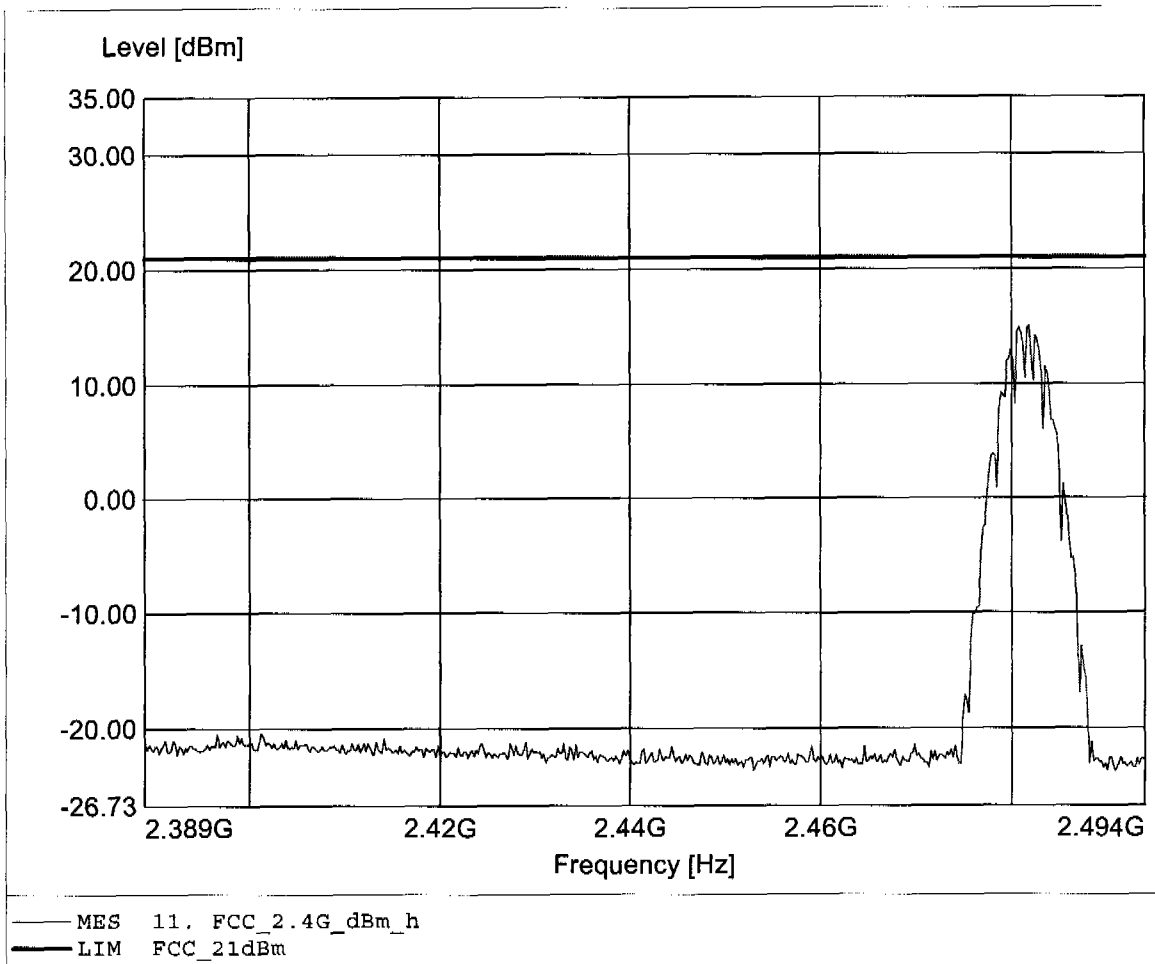

Carrier power (dBm)

FCC RULES PART 15, SUBPART C


Approval Holder: VTech Telecommunications Limited
EUT: 2.4 GHz Cordless VoIP Phone / Base / Antenna 1 / Ch.: 46
Model: USB7100 (HS+BS)
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 7.0 V DC (120 V-15% AC/DC adaptor)
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq: 2.482GHz, Pmax: 19.34dBm, RBW: 5MHz

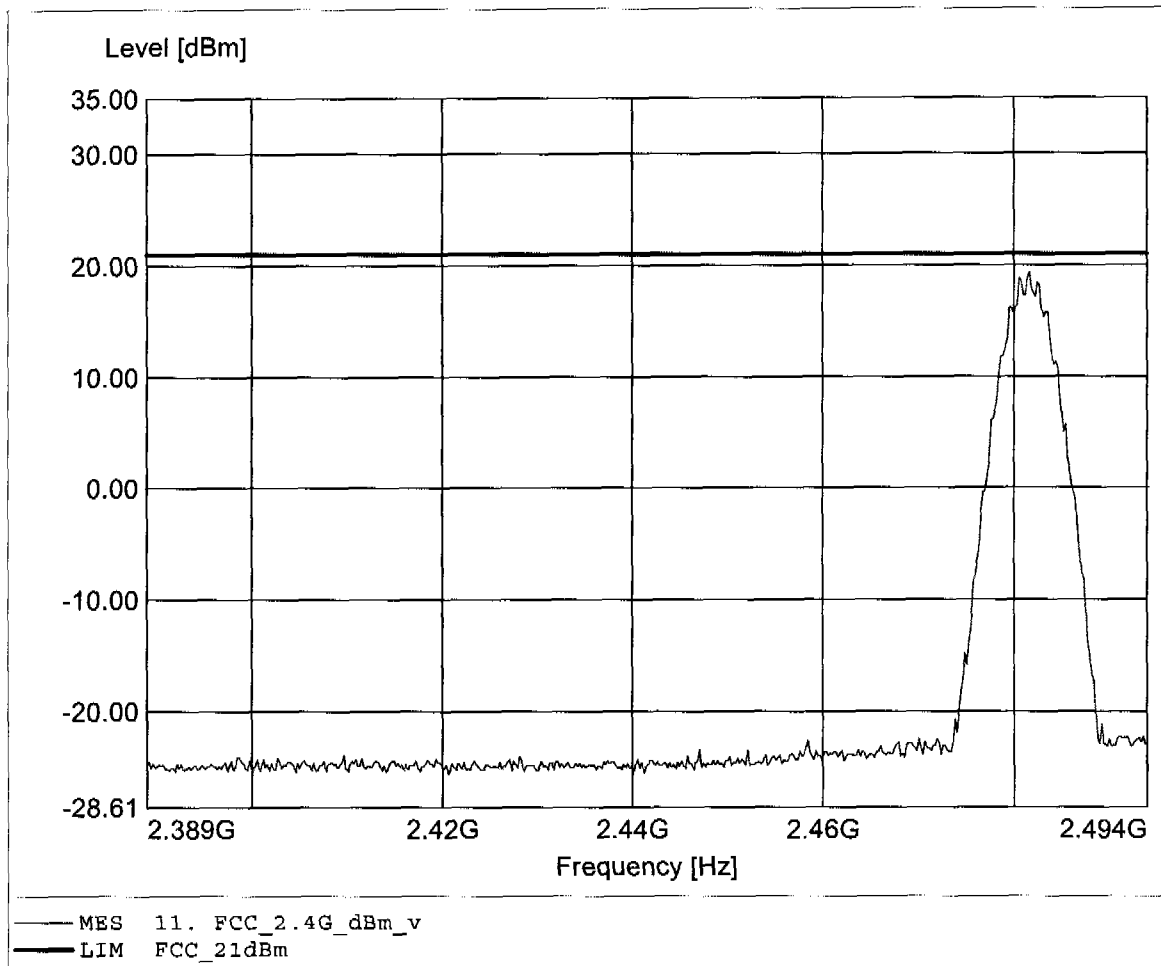

Carrier power (dBm)

FCC RULES PART 15, SUBPART C


Approval Holder: VTech Telecommunications Limited
EUT: 2.4 GHz Cordless VoIP Phone / Base / Antenna 1 / Ch.: 46
Model: USB7100 (HS+BS)
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 7.0 V DC (120 V+15% AC/DC adaptor)
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq: 2.481GHz, Pmax: 15.05dBm, RBW: 5MHz

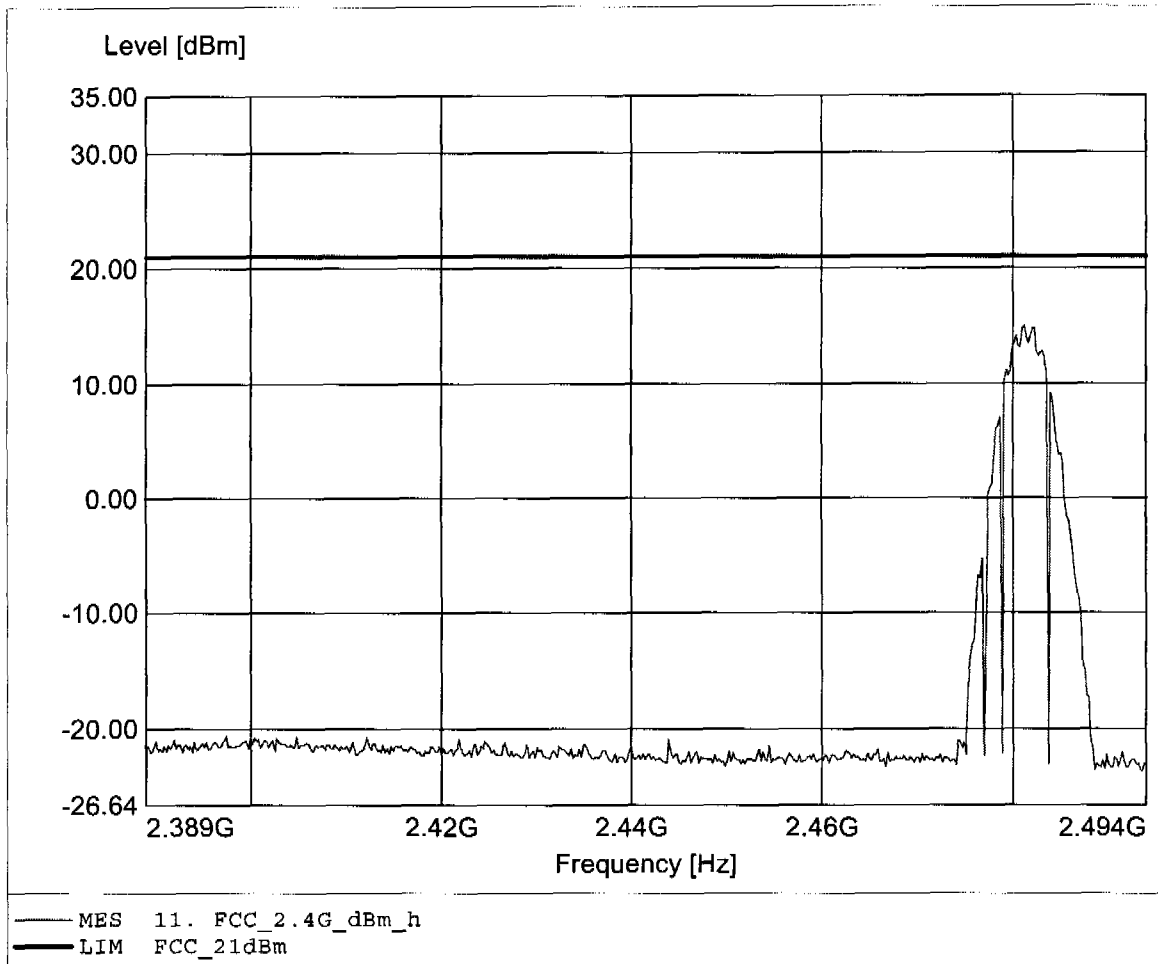

Carrier power (dBm)

FCC RULES PART 15, SUBPART C


Approval Holder: VTech Telecommunications Limited
EUT: 2.4 GHz Cordless VoIP Phone / Base / Antenna 1 / Ch.: 46
Model: USB7100 (HS+BS)
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 7.0 V DC (120 V+15% AC/DC adaptor)
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq: 2.482GHz, Pmax: 19.35dBm, RBW: 5MHz

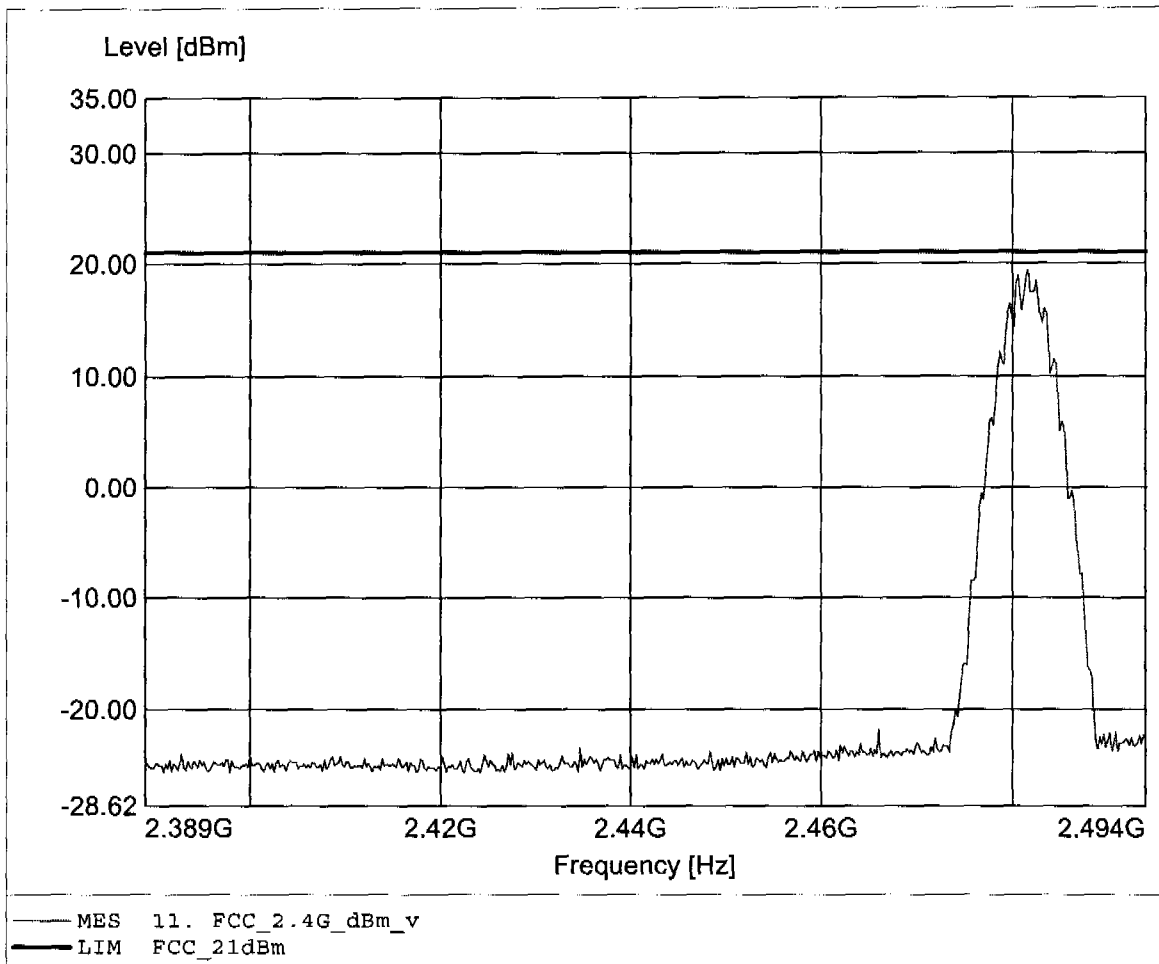

Carrier power (dBm)

FCC RULES PART 15, SUBPART C


Approval Holder: VTech Telecommunications Limited
EUT: 2.4 GHz Cordless VoIP Phone / Base / Antenna 2 / Ch.: 0
Model: USB7100 (HS+BS)
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 7.0 V DC (120 AC/DC adaptor)
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq: 2.402GHz, Pmax: 24.14dBm, RBW: 5MHz

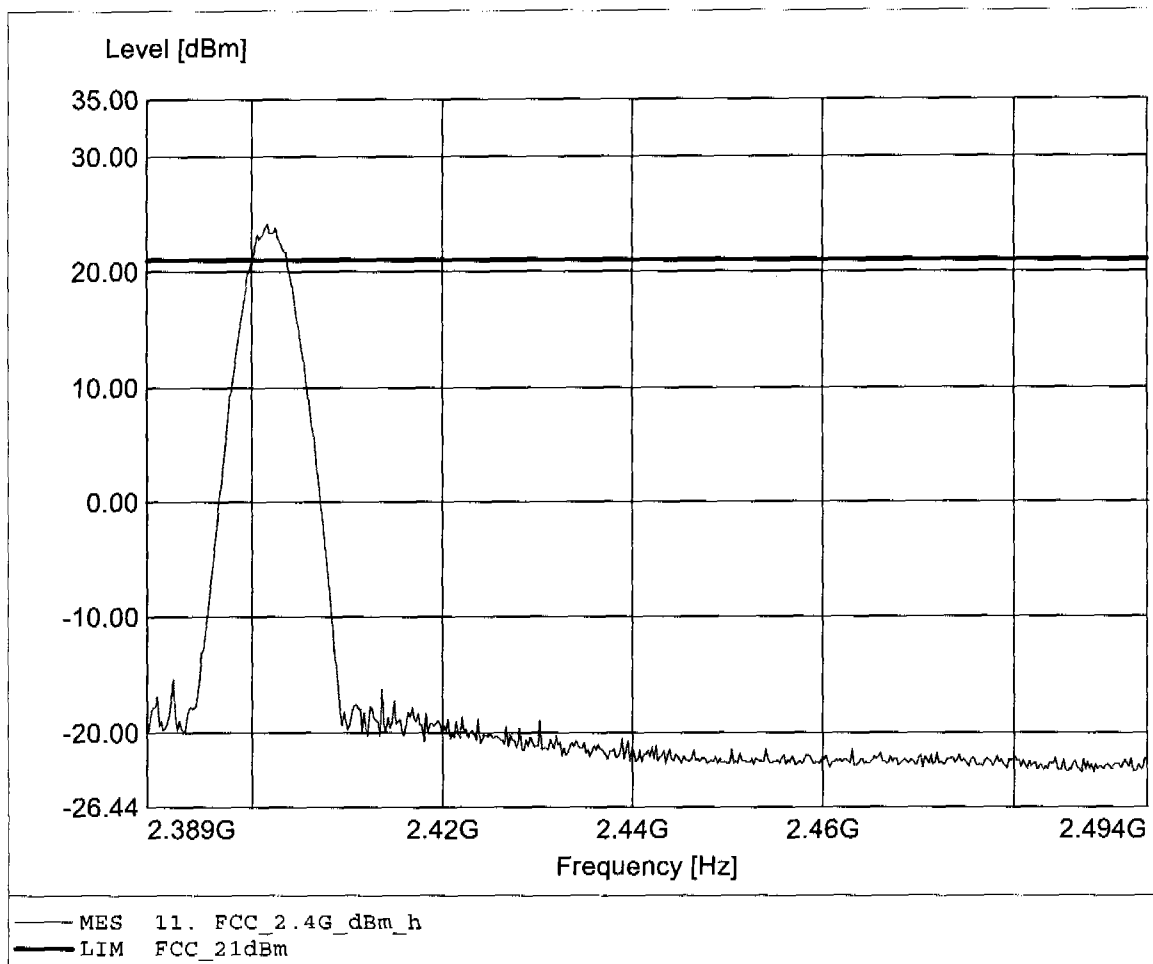

Carrier power (dBm)

FCC RULES PART 15, SUBPART C


Approval Holder: VTech Telecommunications Limited
EUT: 2.4 GHz Cordless VoIP Phone / Base / Antenna 2 / Ch.: 0
Model: USB7100 (HS+BS)
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 7.0 V DC (120 V AC/DC adaptor)
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq: 2.402GHz, Pmax: 12.81dBm, RBW: 5MHz

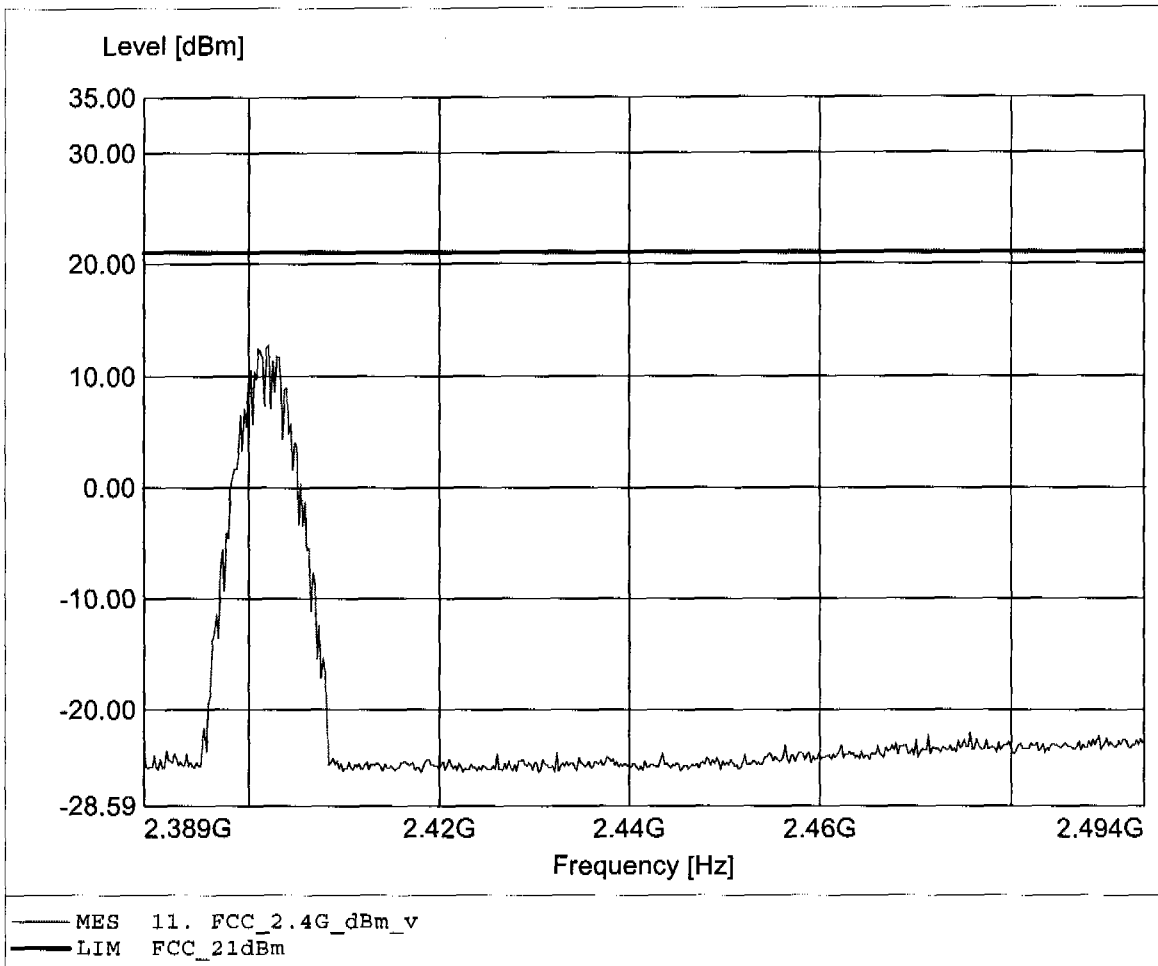

Carrier power (dBm)

FCC RULES PART 15, SUBPART C


Approval Holder: VTech Telecommunications Limited
EUT: 2.4 GHz Cordless VoIP Phone / Base / Antenna 2 / Ch.: 0
Model: USB7100 (HS+BS)
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 7.0 V DC (120 V-15% AC/DC adaptor)
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq: 2.402GHz, Pmax: 24.46dBm, RBW: 5MHz

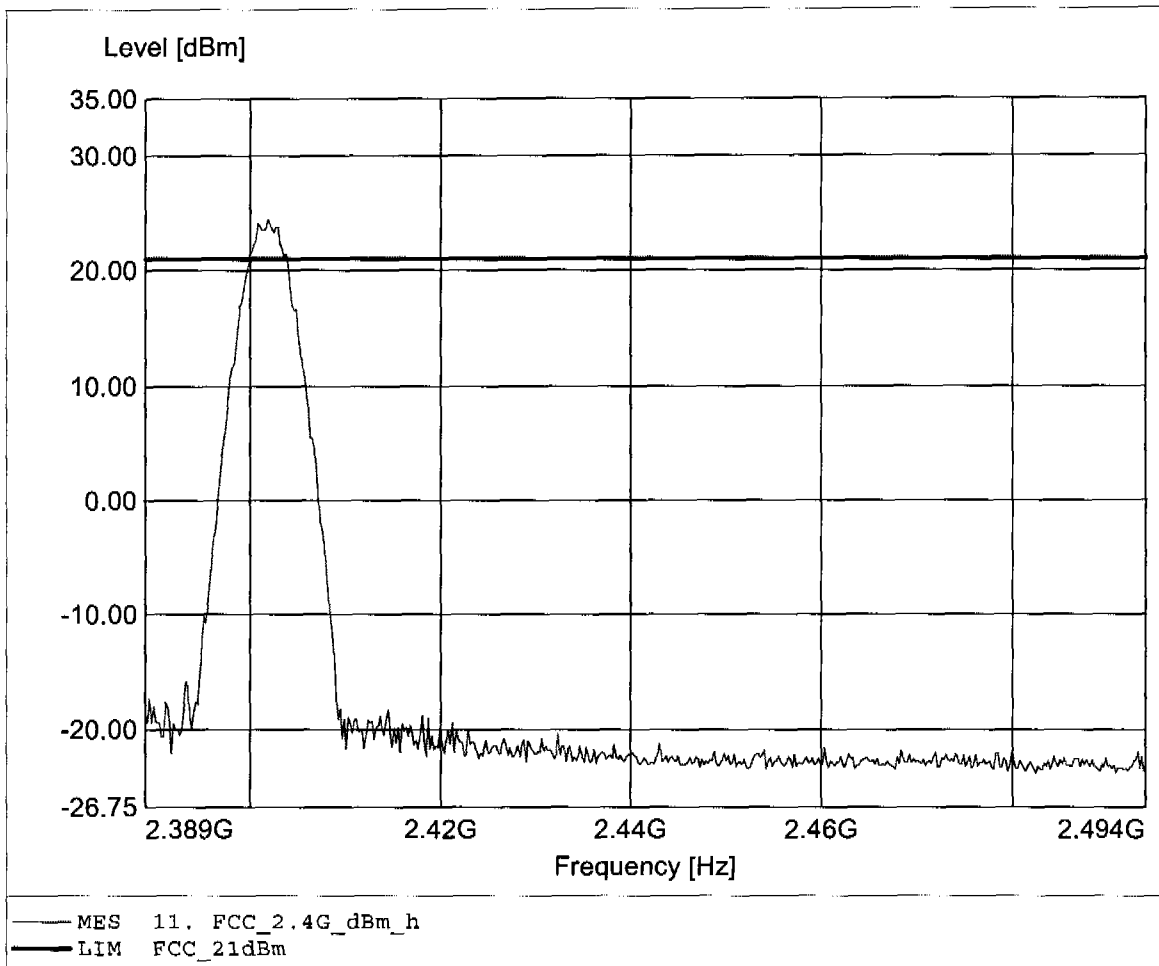

Carrier power (dBm)

FCC RULES PART 15, SUBPART C


Approval Holder: VTech Telecommunications Limited
EUT: 2.4 GHz Cordless VoIP Phone / Base / Antenna 2 / Ch.: 0
Model: USB7100 (HS+BS)
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 7.0 V DC (120 V-15% AC/DC adaptor)
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq: 2.402GHz, Pmax: 12.92dBm, RBW: 5MHz

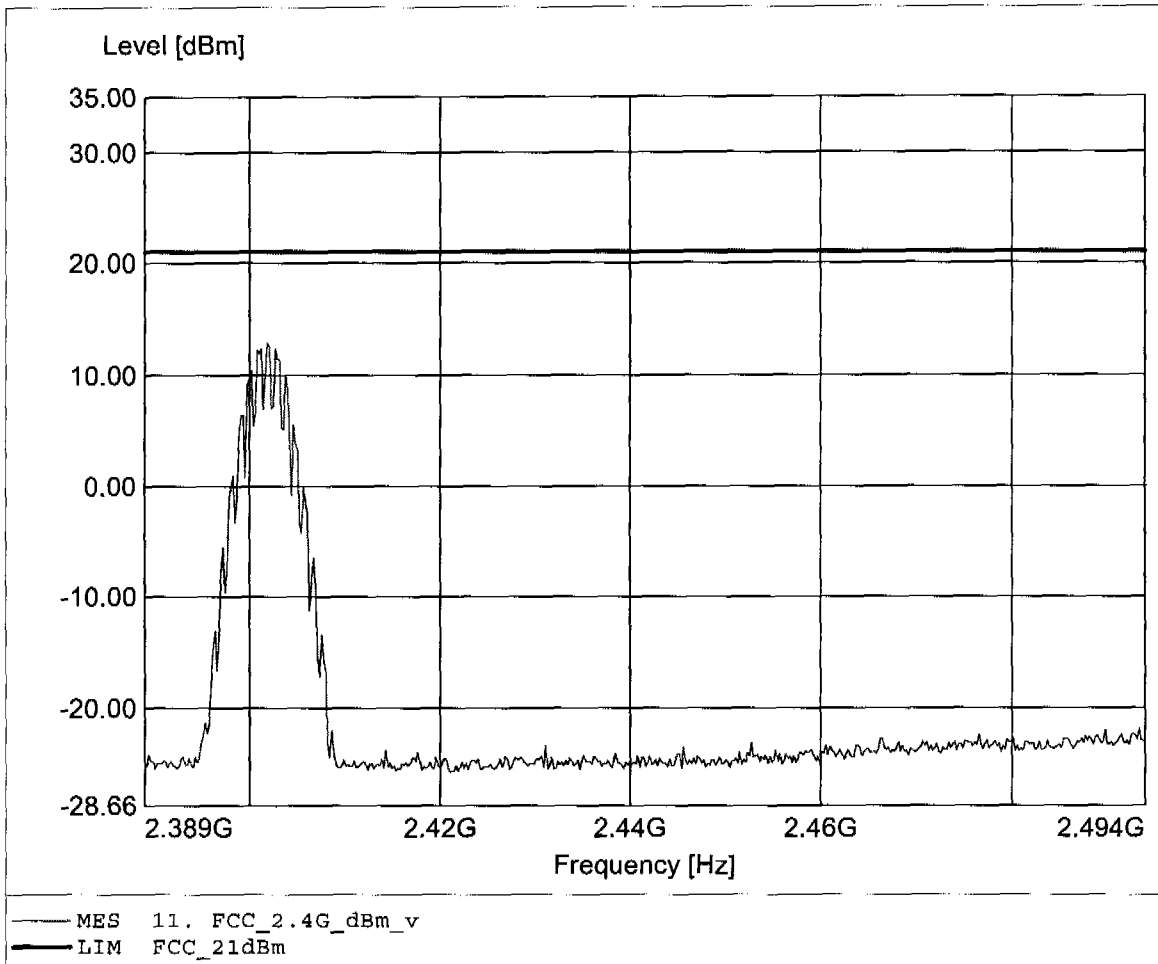

Carrier power (dBm)

FCC RULES PART 15, SUBPART C


Approval Holder: VTech Telecommunications Limited
EUT: 2.4 GHz Cordless VoIP Phone / Base / Antenna 2 / Ch.: 0
Model: USB7100 (HS+BS)
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 7.0 V DC (120 V+15% AC/DC adaptor)
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq: 2.401GHz, Pmax: 24.47dBm, RBW: 5MHz

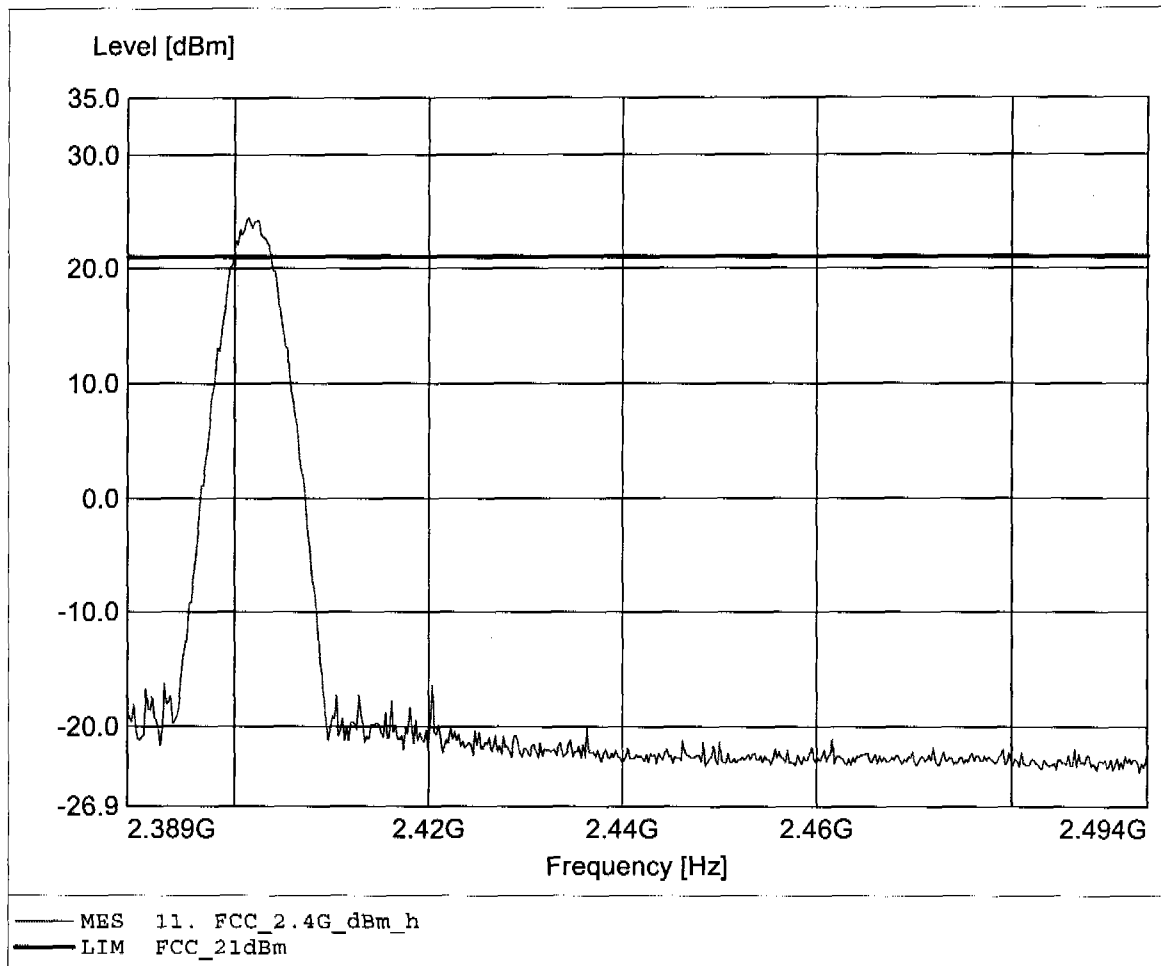

Carrier power (dBm)

FCC RULES PART 15, SUBPART C


Approval Holder: VTech Telecommunications Limited
EUT: 2.4 GHz Cordless VoIP Phone / Base / Antenna 2 / Ch.: 0
Model: USB7100 (HS+BS)
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 7.0 V DC (120 V+15% AC/DC adaptor)
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq: 2.402GHz, Pmax: 12.87dBm, RBW: 5MHz

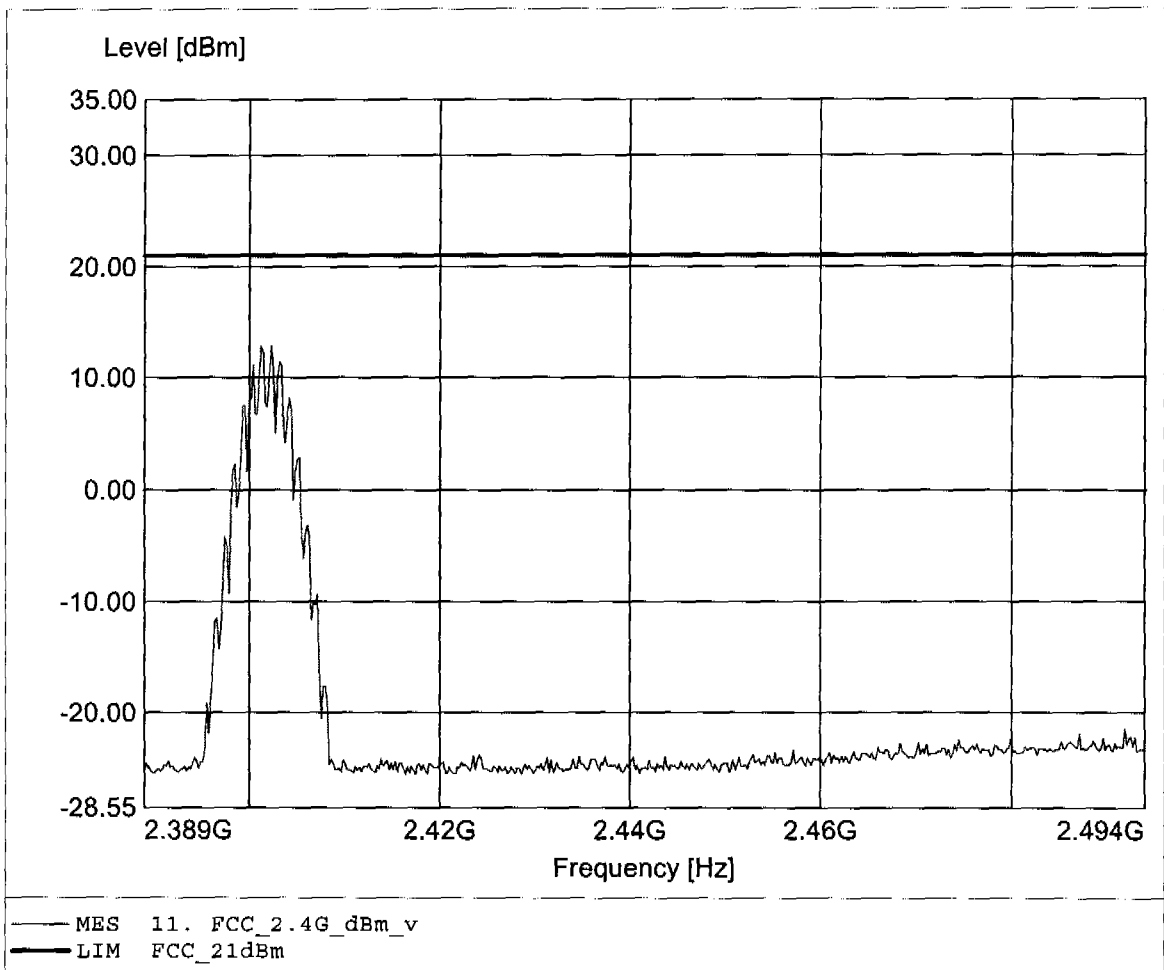

Carrier power (dBm)

FCC RULES PART 15, SUBPART C


Approval Holder: VTech Telecommunications Limited
EUT: 2.4 GHz Cordless VoIP Phone / Base / Antenna 2 / Ch.: 23
Model: USB7100 (HS+BS)
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 7.0 V DC (120 V AC/DC adaptor)
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq: 2.442GHz, Pmax: 23.09dBm, RBW: 5MHz

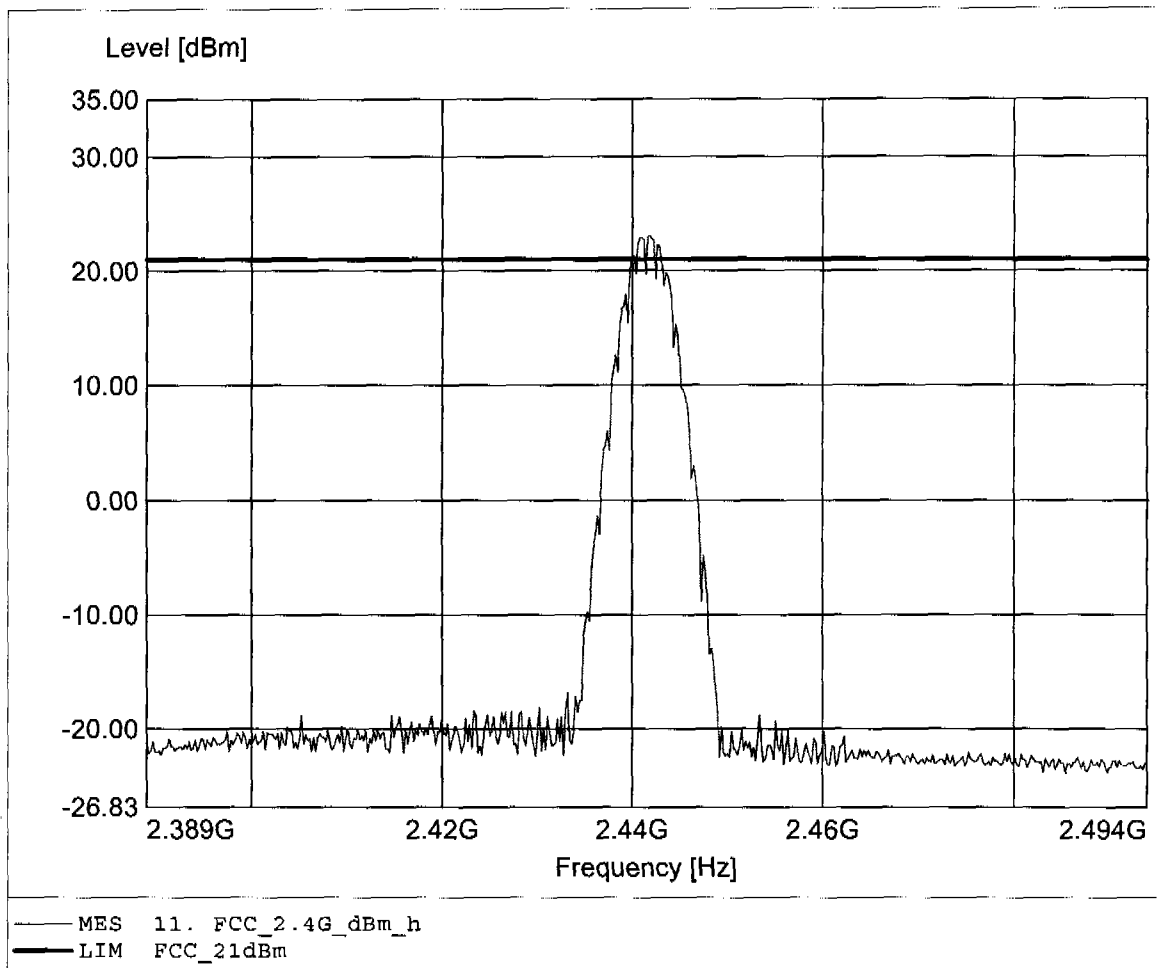

Carrier power (dBm)

FCC RULES PART 15, SUBPART C


Approval Holder: VTech Telecommunications Limited
EUT: 2.4 GHz Cordless VoIP Phone / Base / Antenna 2 / Ch.: 23
Model: USB7100 (HS+BS)
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 7.0 V DC (120 V AC/DC adaptor)
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq: 2.441GHz, Pmax: 13.20dBm, RBW: 5MHz

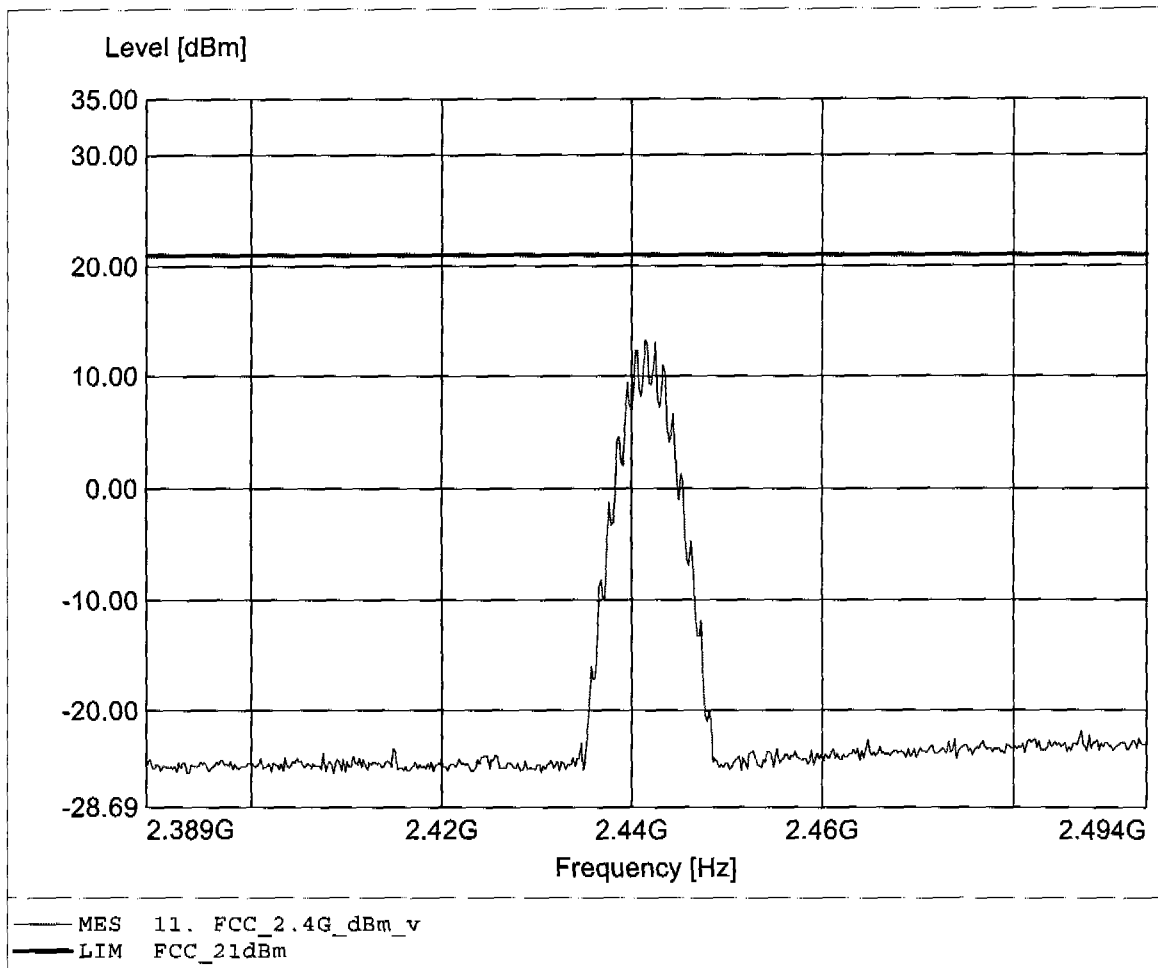

Carrier power (dBm)

FCC RULES PART 15, SUBPART C


Approval Holder: VTech Telecommunications Limited
EUT: 2.4 GHz Cordless VoIP Phone / Base / Antenna 2 / Ch.: 23
Model: USB7100 (HS+BS)
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 7.0 V DC (120 V-15% AC/DC adaptor)
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq: 2.441GHz, Pmax: 23.09dBm, RBW: 5MHz

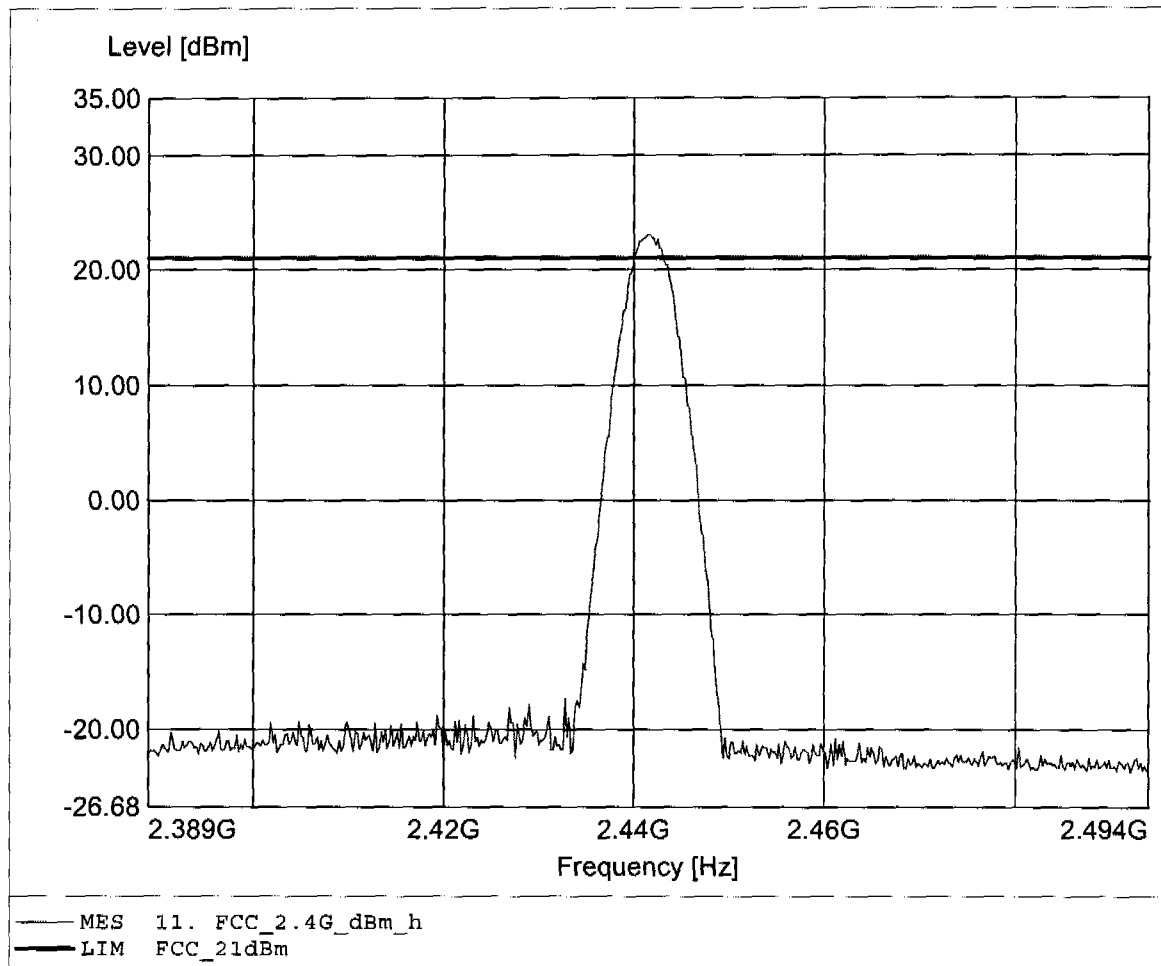

Carrier power (dBm)

FCC RULES PART 15, SUBPART C


Approval Holder: VTech Telecommunications Limited
EUT: 2.4 GHz Cordless VoIP Phone / Base / Antenna 2 / Ch.: 23
Model: USB7100 (HS+BS)
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 7.0 V DC (120 V-15% AC/DC adaptor)
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq: 2.442GHz, Pmax: 13.30dBm, RBW: 5MHz

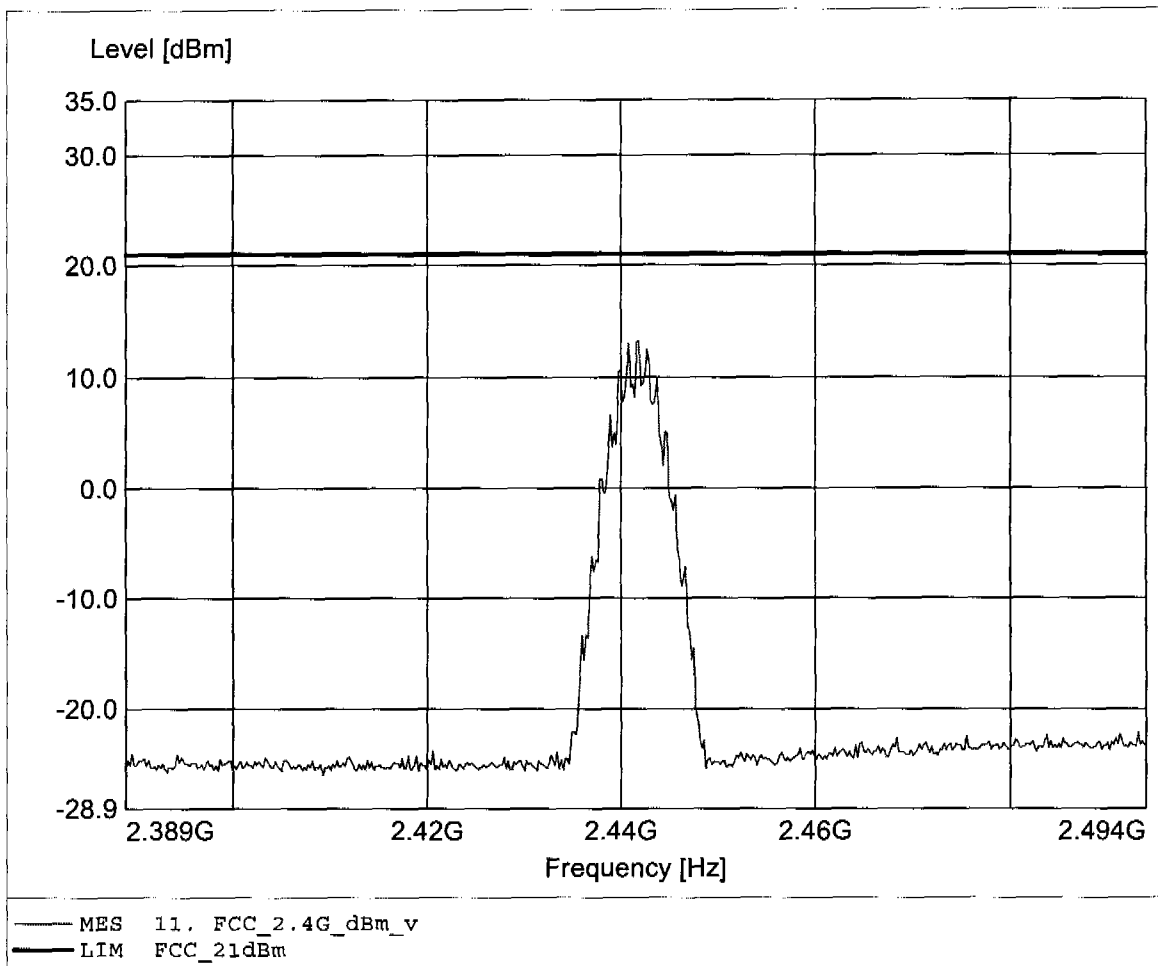

Carrier power (dBm)

FCC RULES PART 15, SUBPART C


Approval Holder: VTech Telecommunications Limited
EUT: 2.4 GHz Cordless VoIP Phone / Base / Antenna 2 / Ch.: 23
Model: USB7100 (HS+BS)
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 7.0 V DC (120 V+15% AC/DC adaptor)
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq: 2.442GHz, Pmax: 22.89dBm, RBW: 5MHz

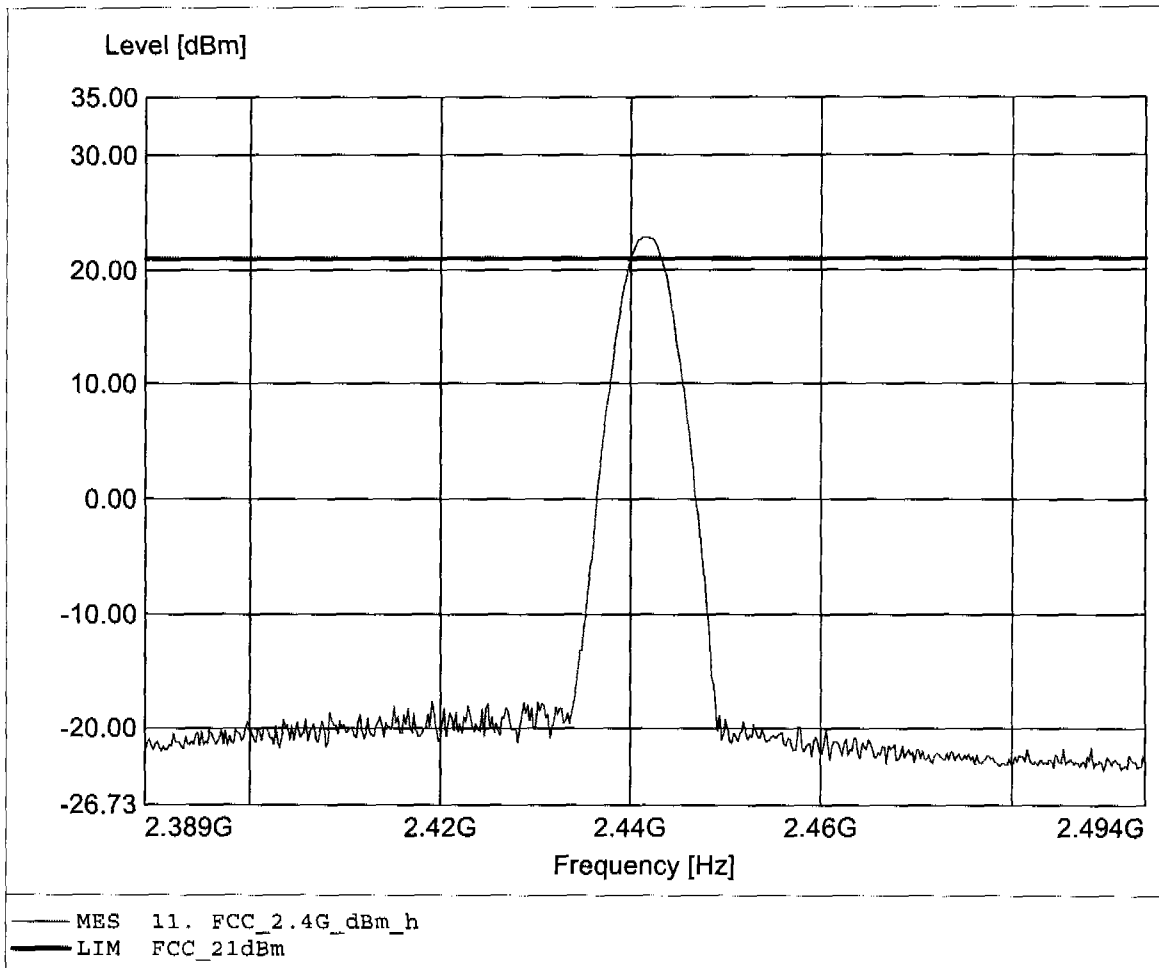

Carrier power (dBm)

FCC RULES PART 15, SUBPART C


Approval Holder: VTech Telecommunications Limited
EUT: 2.4 GHz Cordless VoIP Phone / Base / Antenna 2 / Ch.: 23
Model: USB7100 (HS+BS)
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 7.0 V DC (120 V+15% AC/DC adaptor)
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq: 2.442GHz, Pmax: 13.30dBm, RBW: 5MHz

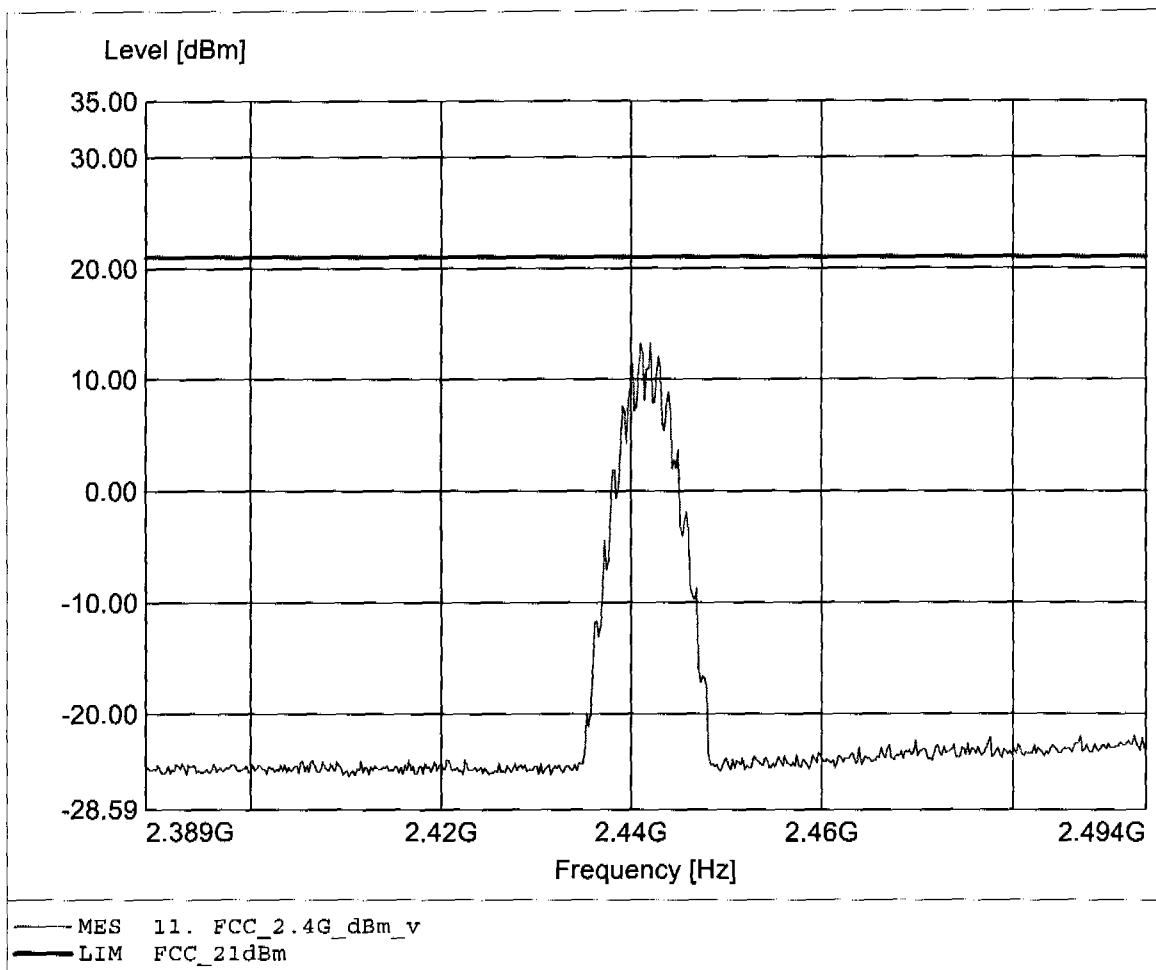

Carrier power (dBm)

FCC RULES PART 15, SUBPART C


Approval Holder: VTech Telecommunications Limited
EUT: 2.4 GHz Cordless VoIP Phone / Base / Antenna 2 / Ch.: 46
Model: USB7100 (HS+BS)
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 7.0 V DC (120 V AC/DC adaptor)
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq: 2.482GHz, Pmax: 19.04dBm, RBW: 5MHz

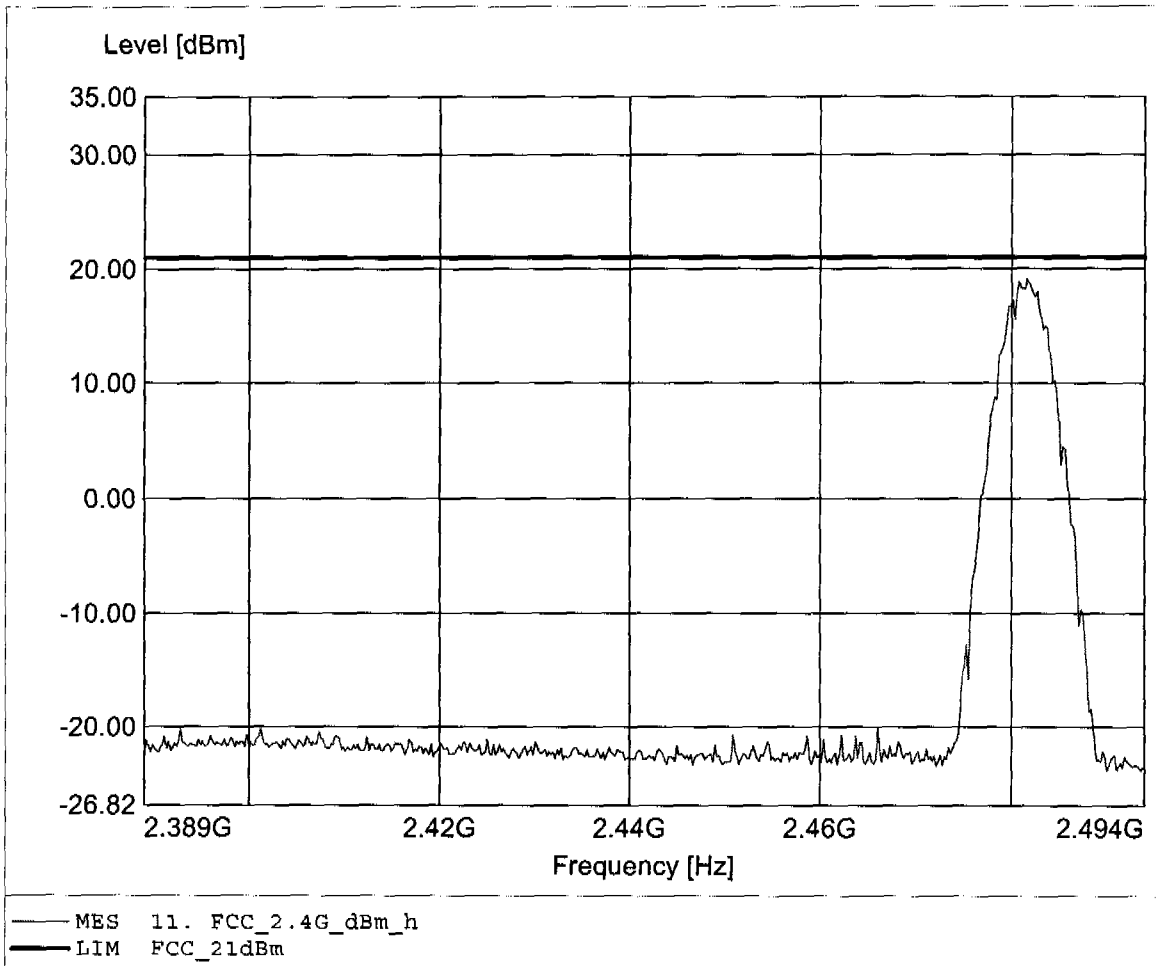

Carrier power (dBm)

FCC RULES PART 15, SUBPART C


Approval Holder: VTech Telecommunications Limited
EUT: 2.4 GHz Cordless VoIP Phone / Base / Antenna 2 / Ch.: 46
Model: USB7100 (HS+BS)
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 7.0 V DC (120 V AC/DC adaptor)
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq: 2.481GHz, Pmax: 16.34dBm, RBW: 5MHz

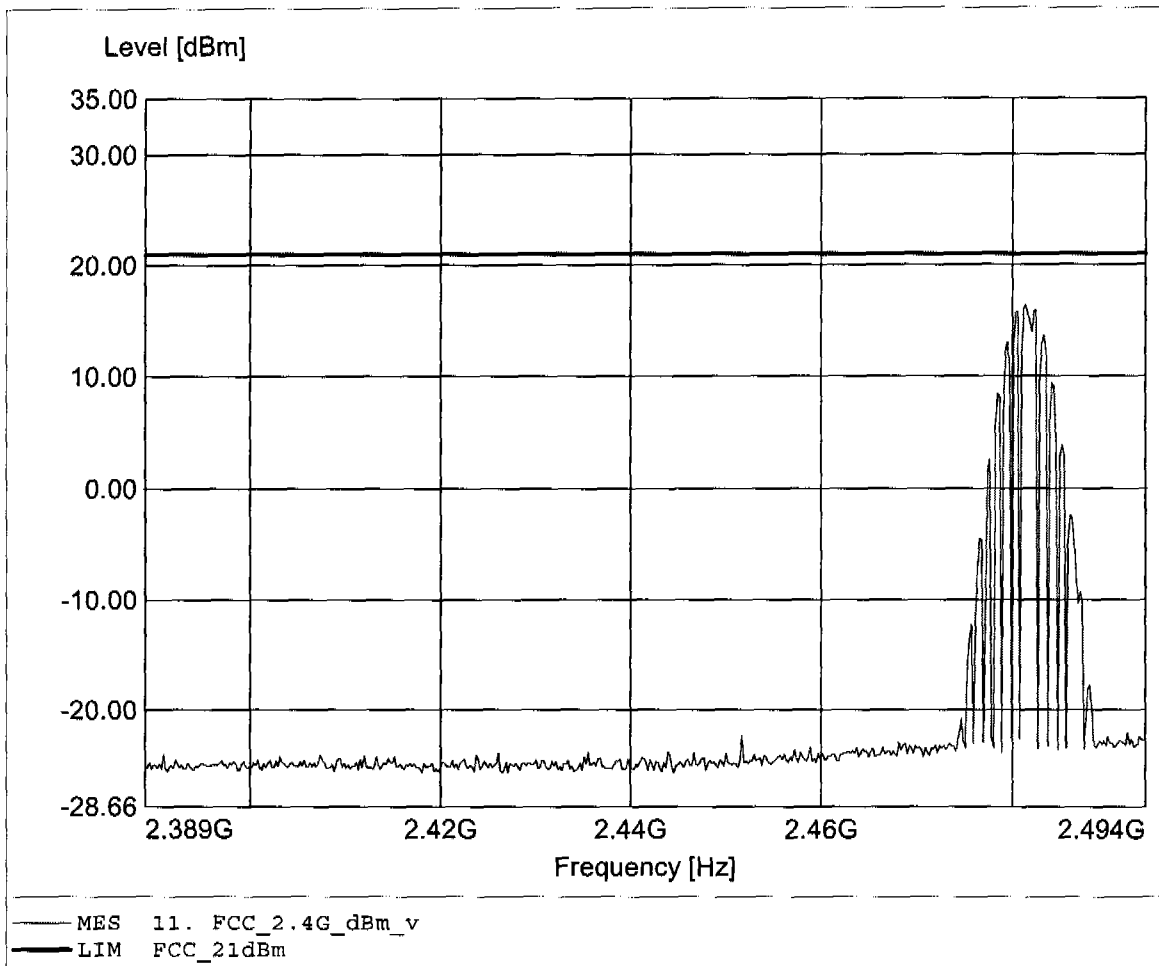

Carrier power (dBm)

FCC RULES PART 15, SUBPART C


Approval Holder: VTech Telecommunications Limited
EUT: 2.4 GHz Cordless VoIP Phone / Base / Antenna 2 / Ch.: 46
Model: USB7100 (HS+BS)
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 7.0 V DC (120 V-15% AC/DC adaptor)
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq: 2.481GHz, Pmax: 19.21dBm, RBW: 5MHz

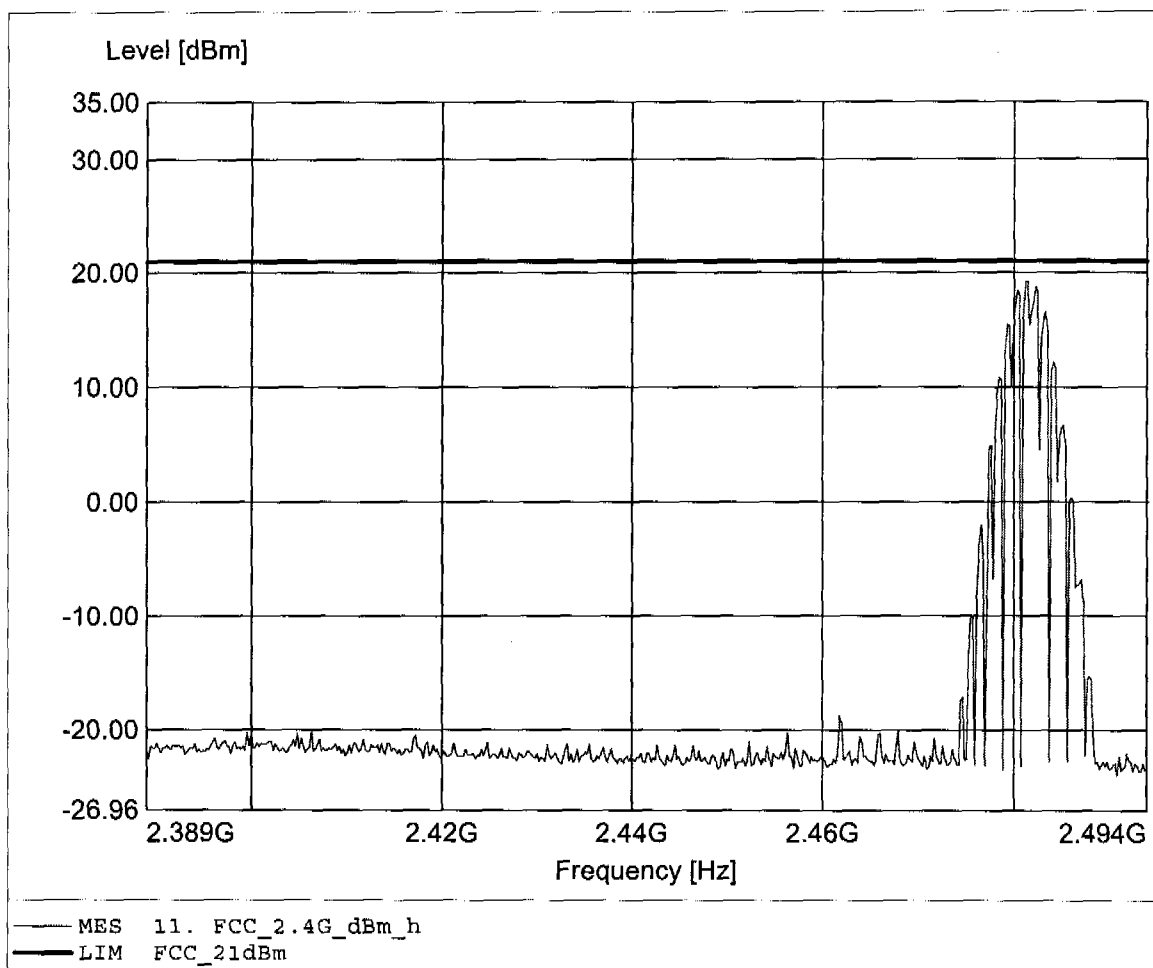

Carrier power (dBm)

FCC RULES PART 15, SUBPART C


Approval Holder: VTech Telecommunications Limited
EUT: 2.4 GHz Cordless VoIP Phone / Base / Antenna 2 / Ch.: 46
Model: USB7100 (HS+BS)
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 7.0 V DC (120 V-15% AC/DC adaptor)
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq: 2.481GHz, Pmax: 16.32dBm, RBW: 5MHz

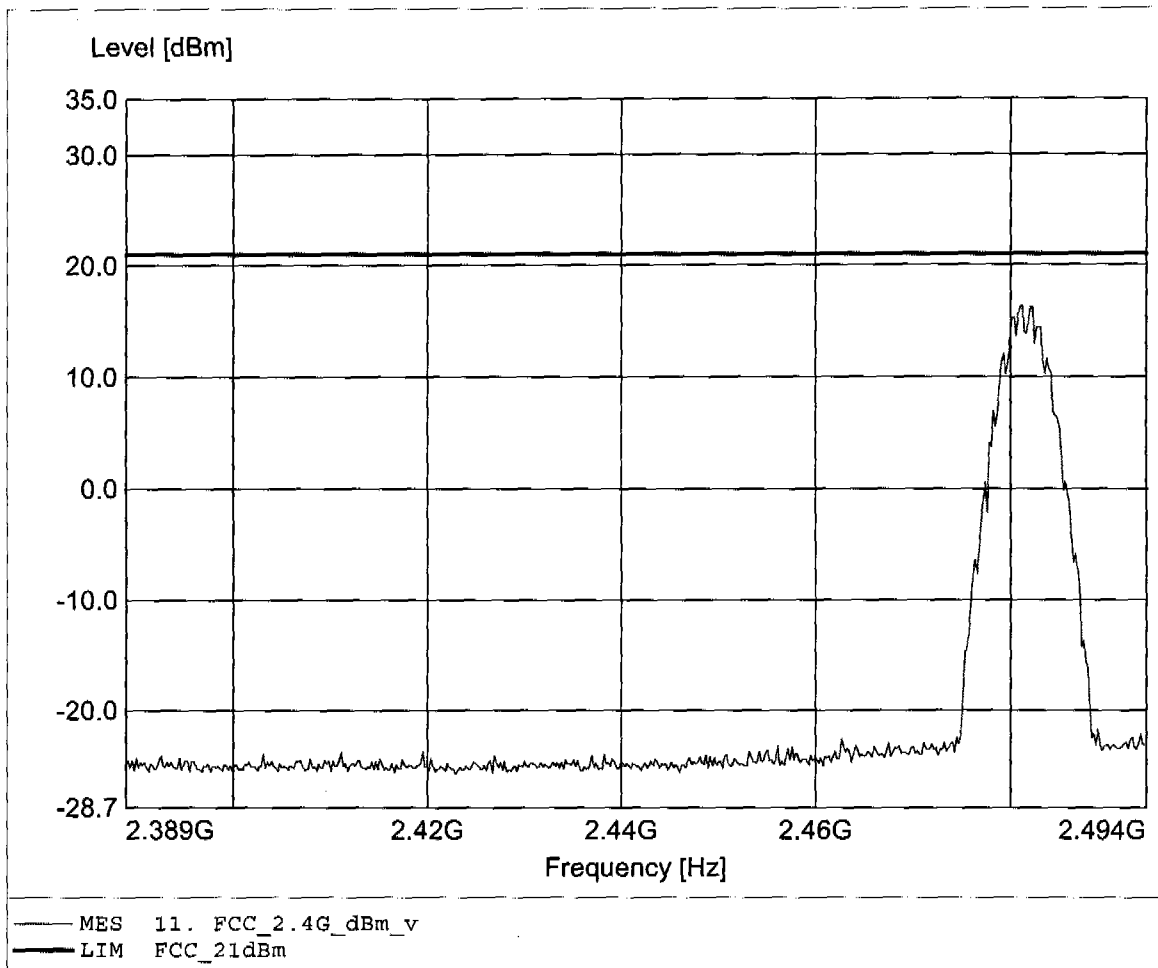

Carrier power (dBm)

FCC RULES PART 15, SUBPART C


Approval Holder: VTech Telecommunications Limited
EUT: 2.4 GHz Cordless VoIP Phone / Base / Antenna 2 / Ch.: 46
Model: USB7100 (HS+BS)
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 7.0 V DC (120 V+15% AC/DC adaptor)
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq: 2.482GHz, Pmax: 19.14dBm, RBW: 5MHz

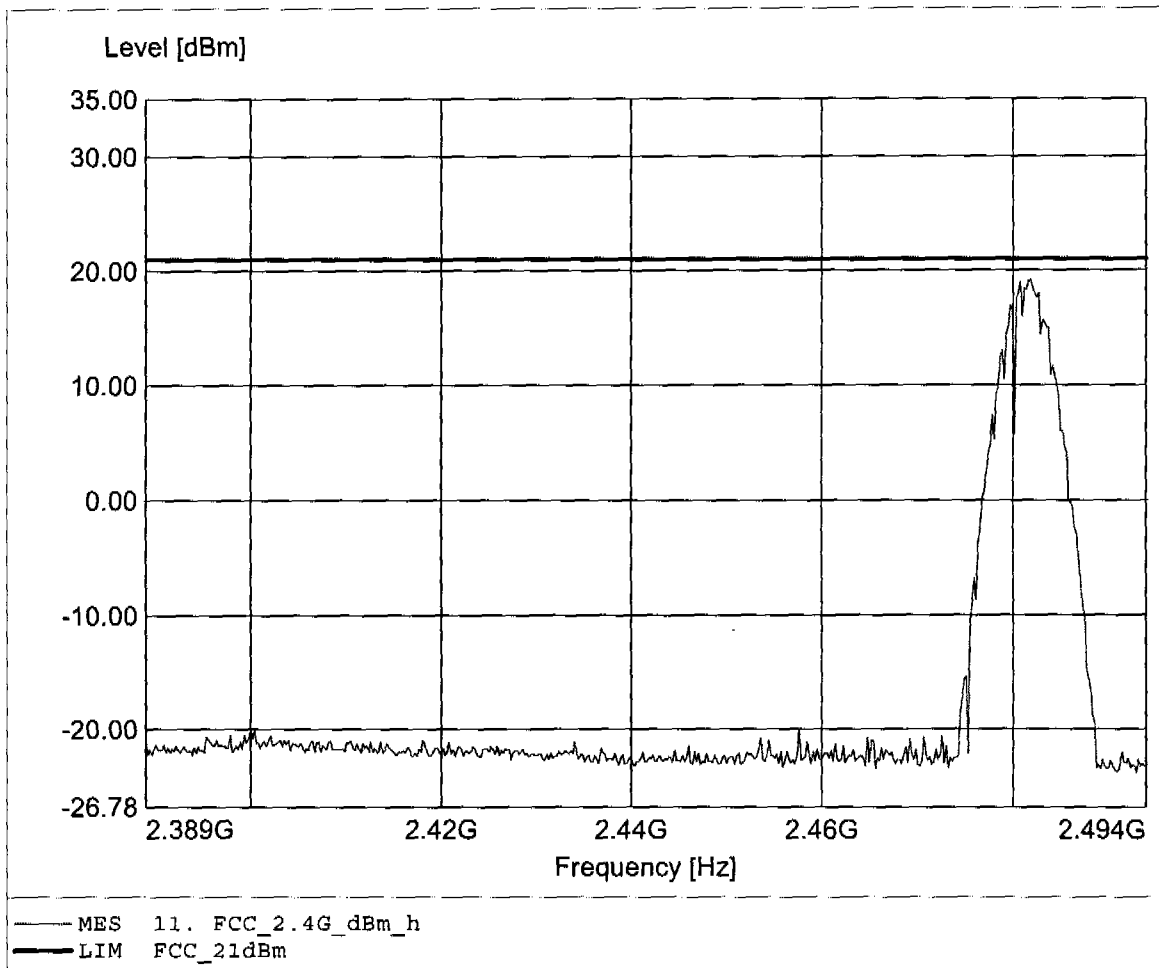

Carrier power (dBm)

FCC RULES PART 15, SUBPART C

Approval Holder: VTech Telecommunications Limited
EUT: 2.4 GHz Cordless VoIP Phone / Base / Antenna 2 / Ch.: 46
Model: USB7100 (HS+BS)
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 7.0 V DC (120 V+15% AC/DC adaptor)
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq: 2.482GHz, Pmax: 16.36dBm, RBW: 5MHz

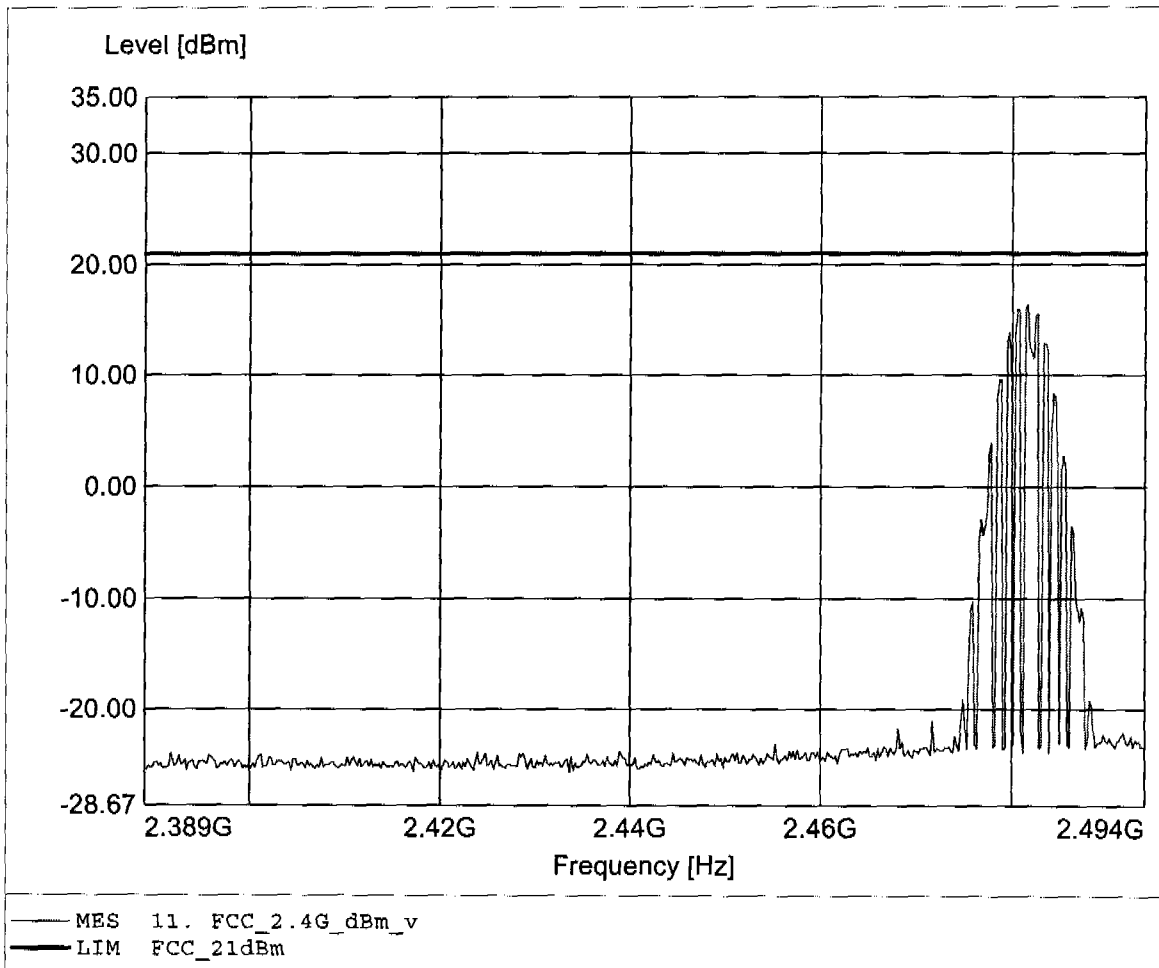




Appendix C

Spurious Emissions radiated - Transmitter operating

Carrier power (Field Strength)

FCC RULES PART 15, SUBPART C


Approval Holder: VTech Telecommunications Limited
EUT: 2.4 GHz Cordless VoIP Phone / Base / Antenna 1 / Ch.: 0
Model: USB7100 (HS+BS)
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 7.0 V DC (120 V AC/DC adaptor)
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq: 2.402GHz, Emax: 109.66dBµV/m, RBW: 100kHz

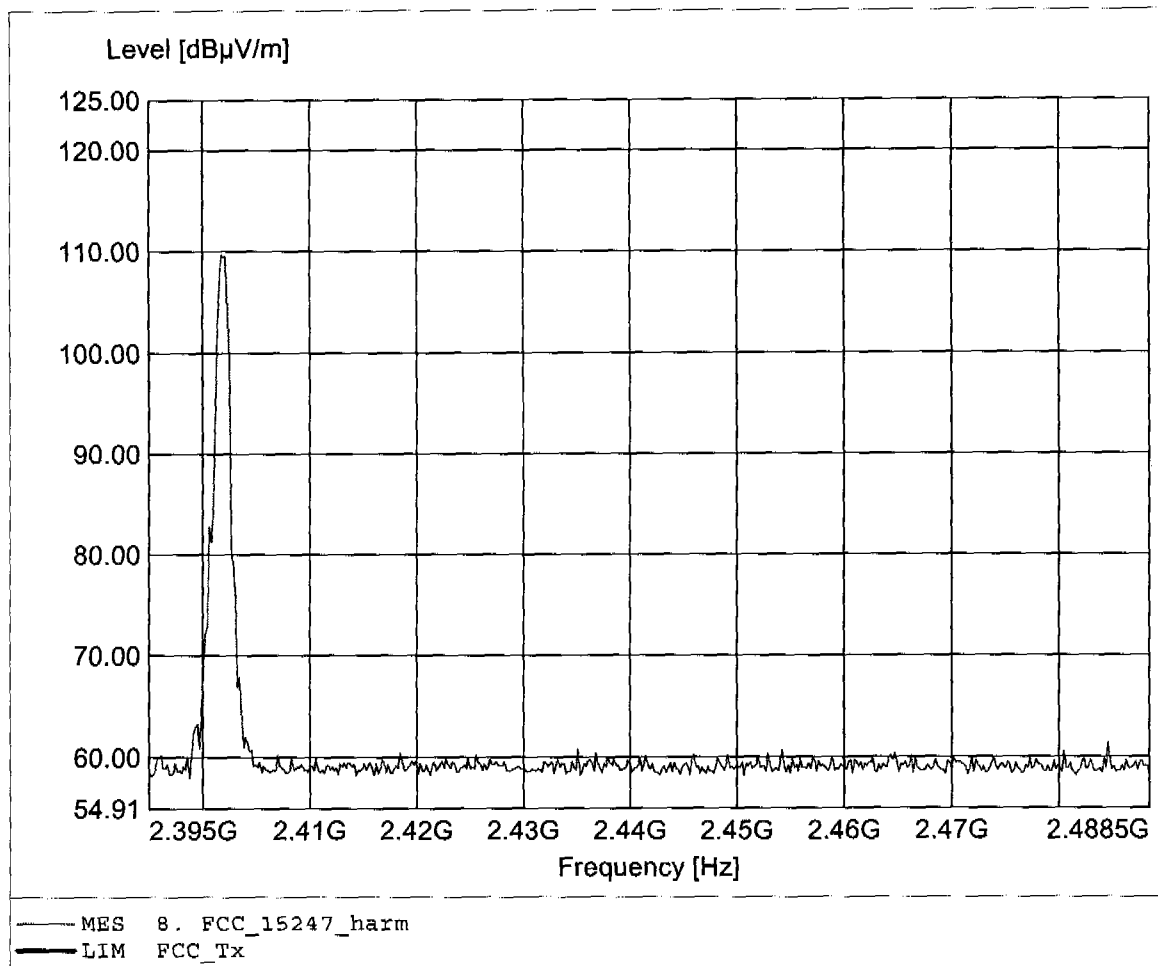

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: VTech Telecommunications Limited
EUT: 2.4 GHz Cordless VoIP Phone / Base / Antenna 1 / Ch.: 0
Model: USB7100 (HS+BS)
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 7.0 V DC (120 V AC/DC adaptor)
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq: 198.978MHz, Emax: 33.28dBµV/m, RBW: 100kHz

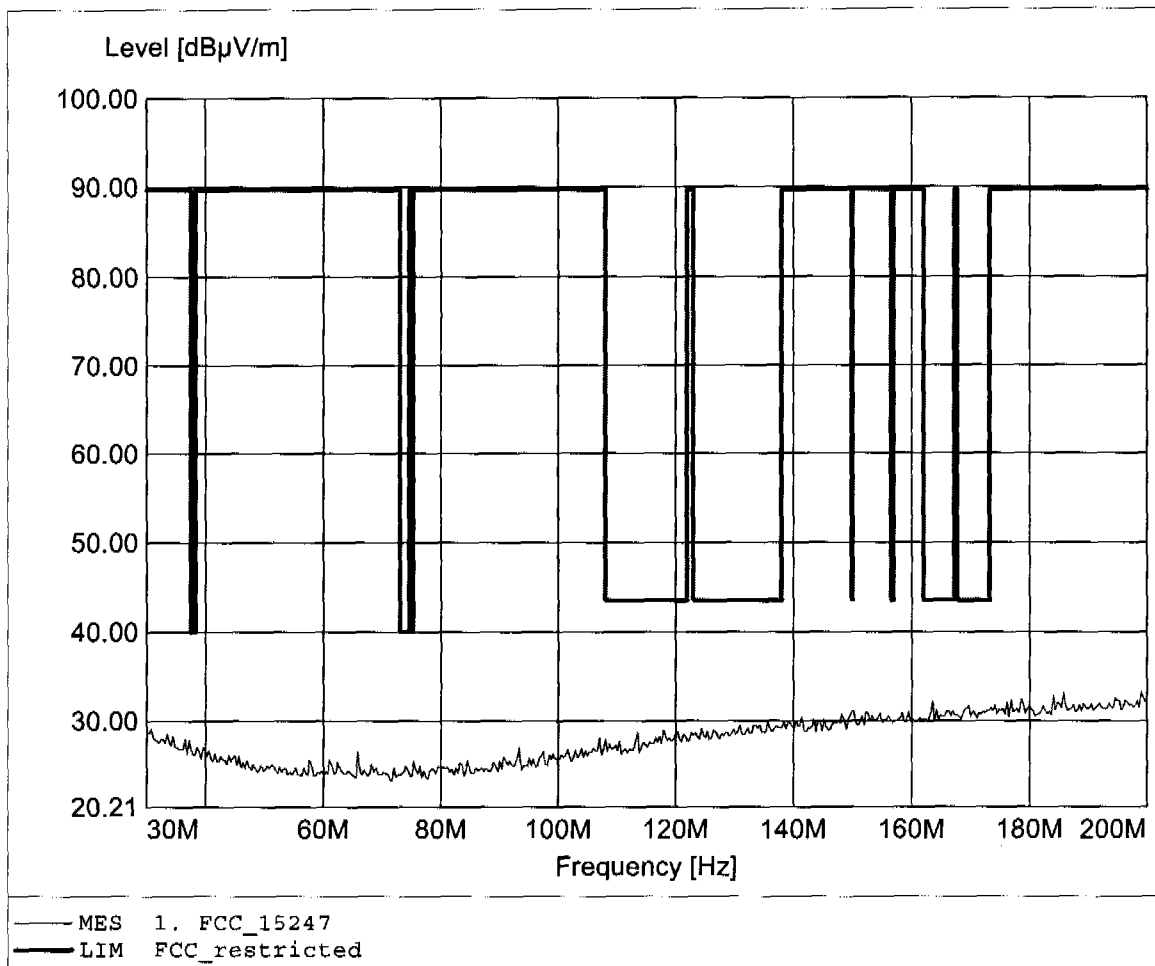

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: VTech Telecommunications Limited
EUT: 2.4 GHz Cordless VoIP Phone / Base / Antenna 1 / Ch.: 0
Model: USB7100 (HS+BS)
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 7.0 V DC (120 V AC/DC adaptor)
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq: 193.527MHz, Emax: 33.62dB μ V/m, RBW: 100kHz

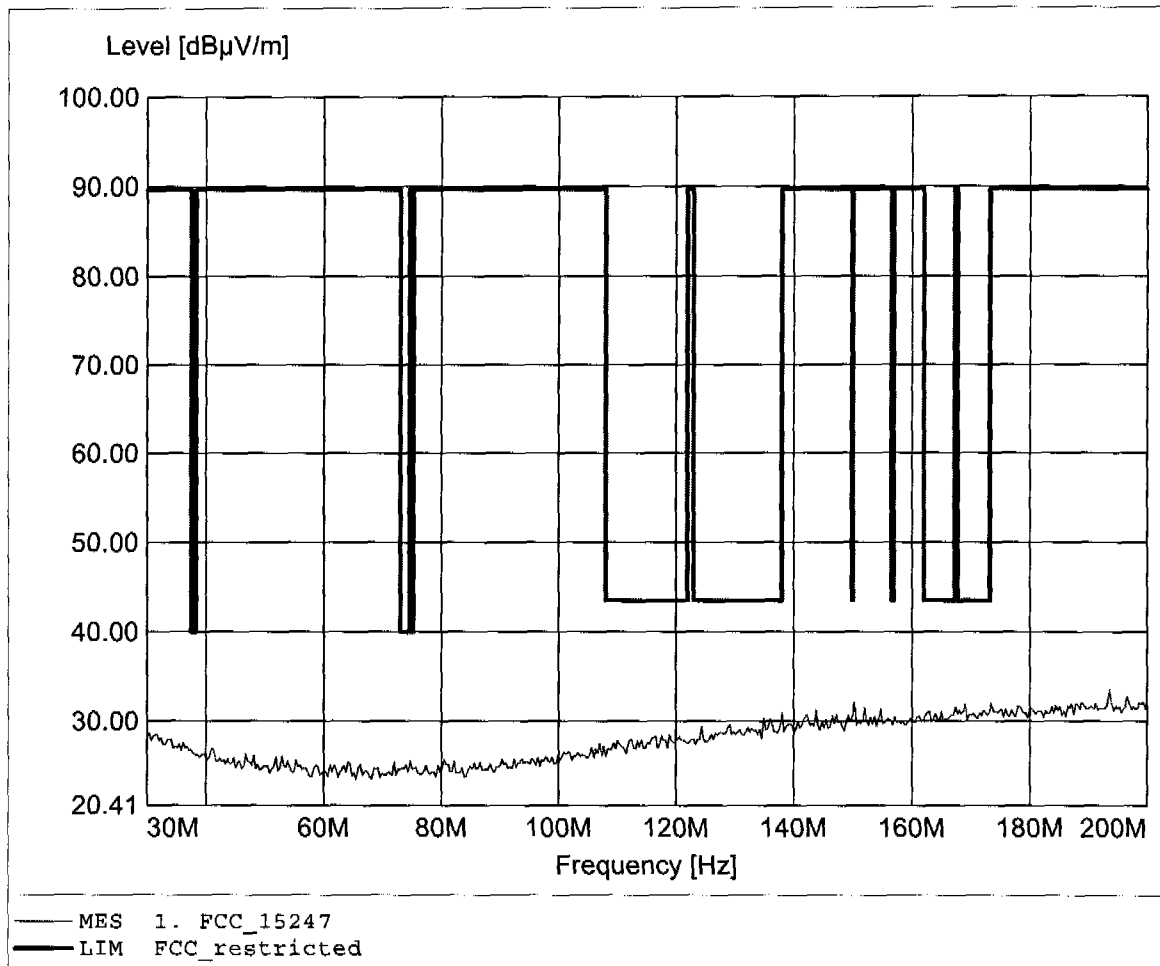

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: VTech Telecommunications Limited
EUT: 2.4 GHz Cordless VoIP Phone / Base / Antenna 1 / Ch.: 0
Model: USB7100 (HS+BS)
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 7.0 V DC (120 V AC/DC adaptor)
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HL 223, amplif.
Comment 2: Freq: 995.190MHz, Emax: 23.00dBµV/m, RBW: 100kHz

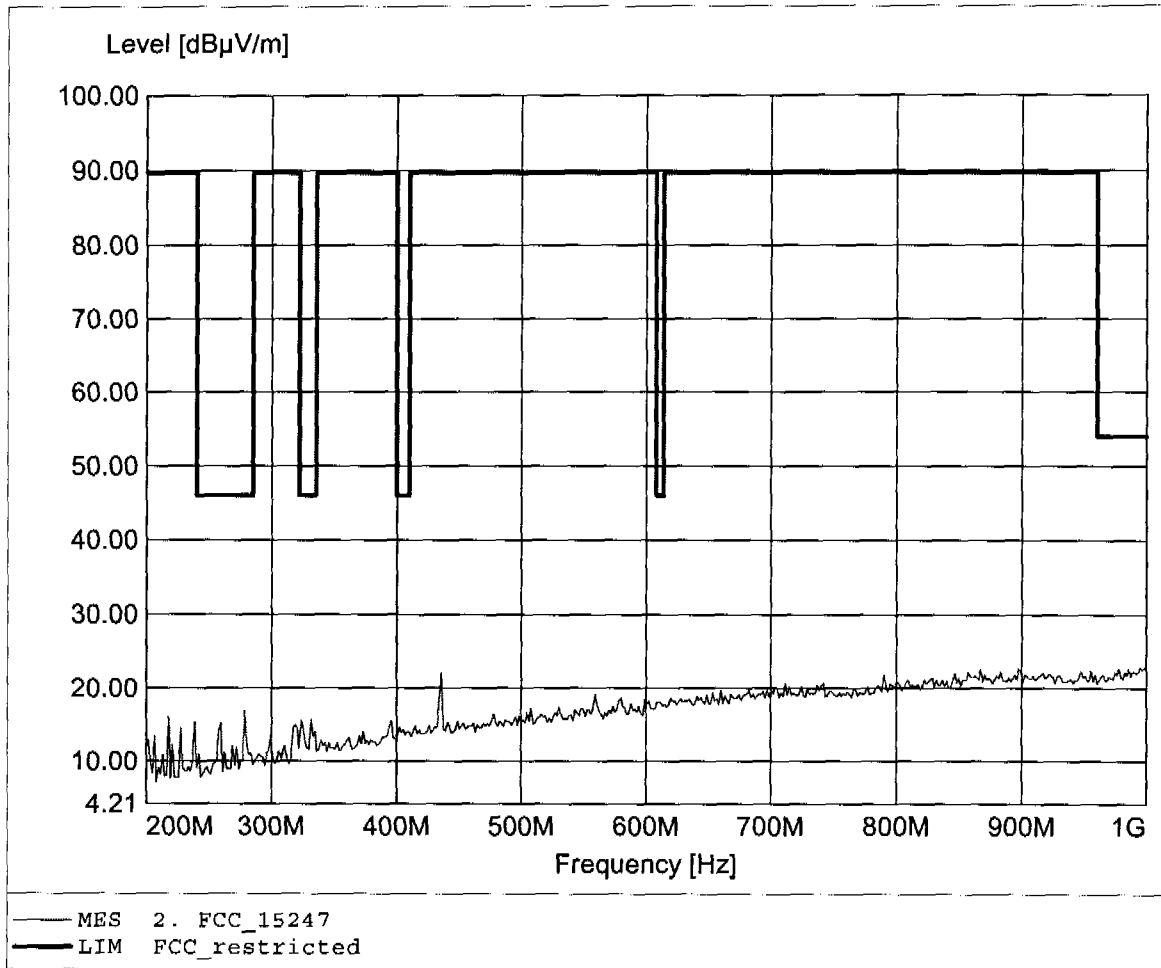

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: VTech Telecommunications Limited
EUT: 2.4 GHz Cordless VoIP Phone / Base / Antenna 1 / Ch.: 0
Model: USB7100 (HS+BS)
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 7.0 V DC (120 V AC/DC adaptor)
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HL 223, amplif.
Comment 2: Freq: 435.671MHz, Emax: 28.85dBµV/m, RBW: 100kHz

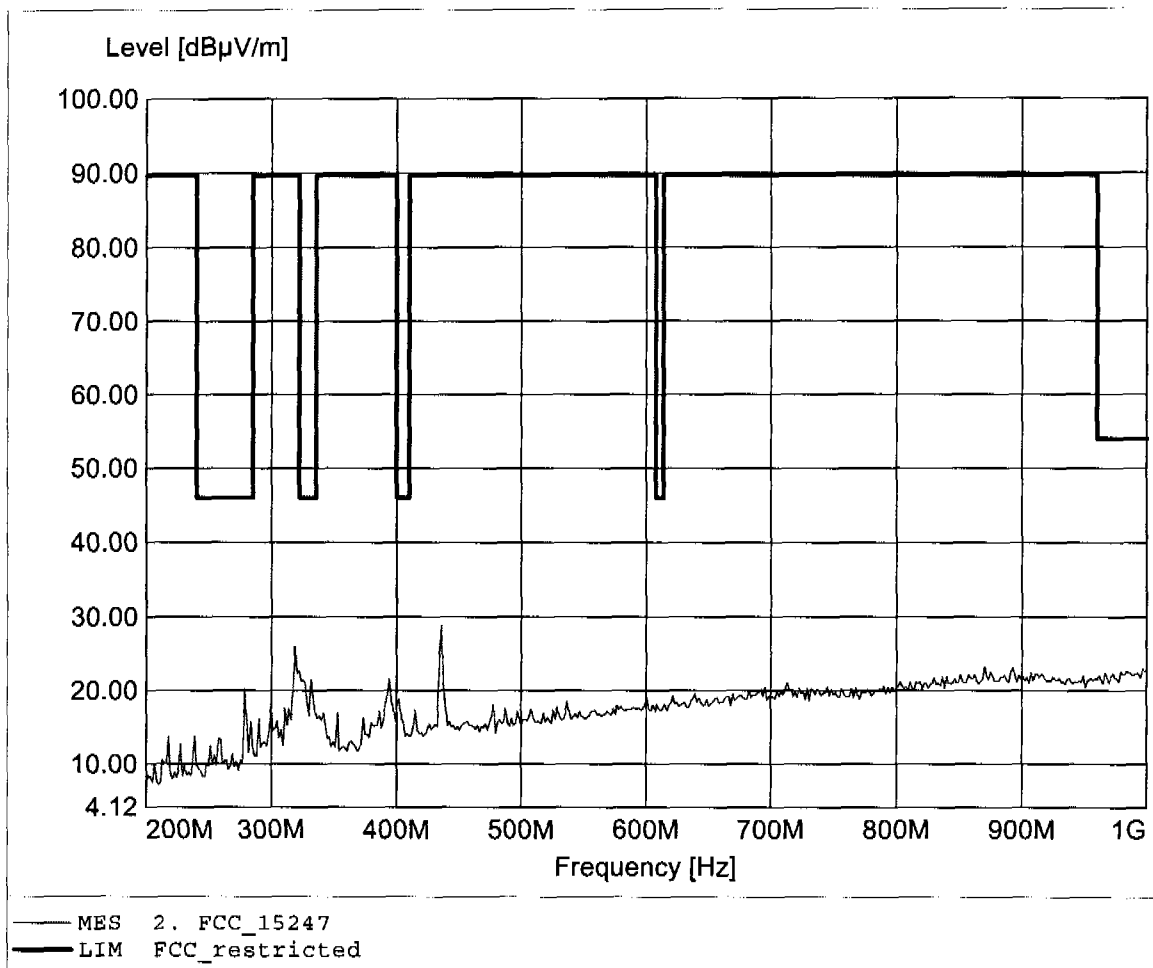

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: VTech Telecommunications Limited
EUT: 2.4 GHz Cordless VoIP Phone / Base / Antenna 1 / Ch.: 0
Model: USB7100 (HS+BS)
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 7.0 V DC (120 V AC/DC adaptor)
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, amplif.
Comment 2: Freq: 2.400GHz, Emax: 85.71dBµV/m, RBW: 1MHz

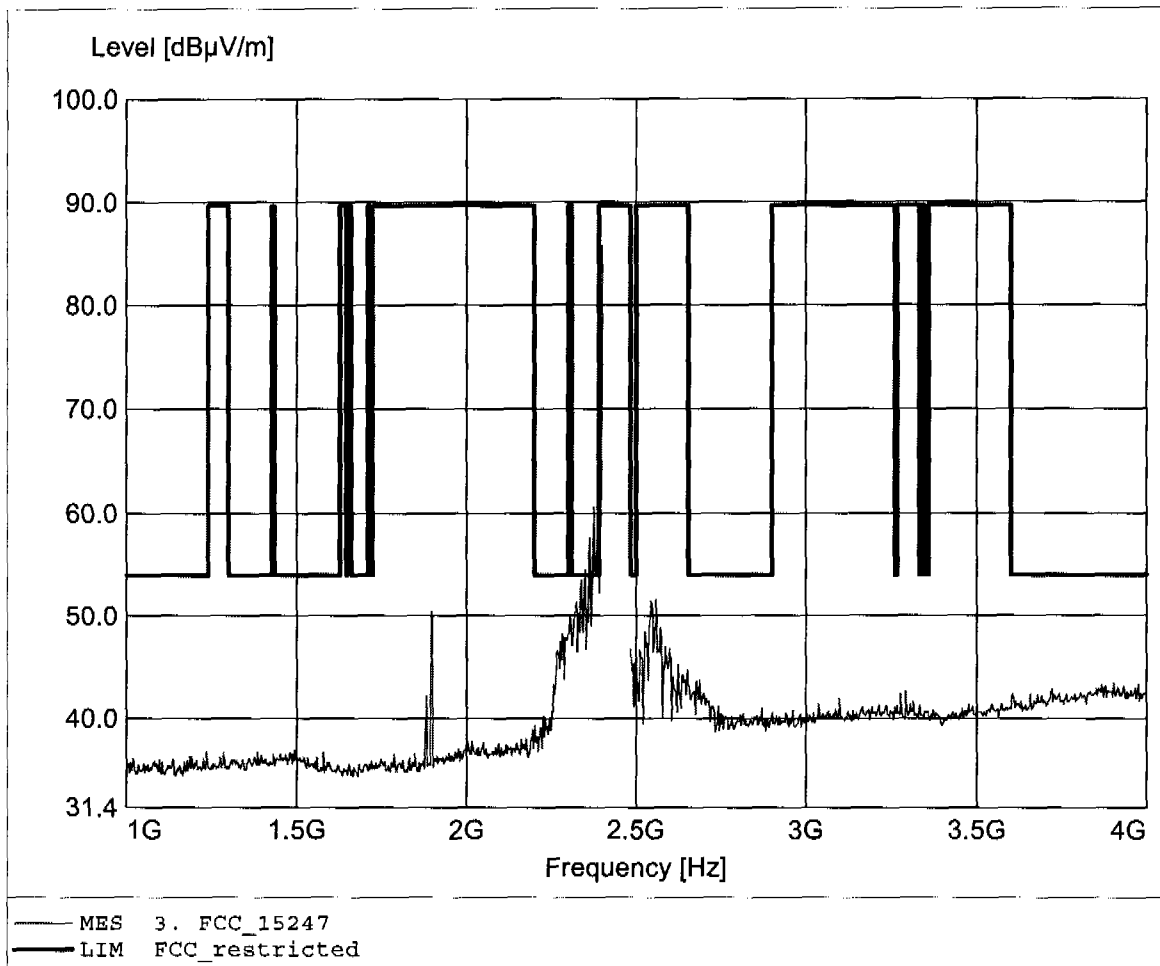

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: VTech Telecommunications Limited
EUT: 2.4 GHz Cordless VoIP Phone / Base / Antenna 1 / Ch.: 0
Model: USB7100 (HS+BS)
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 7.0 V DC (120 V AC/DC adaptor)
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, amplif.
Comment 2: Freq: 2.400GHz, Emax: 85.71dBµV/m, RBW: 1MHz

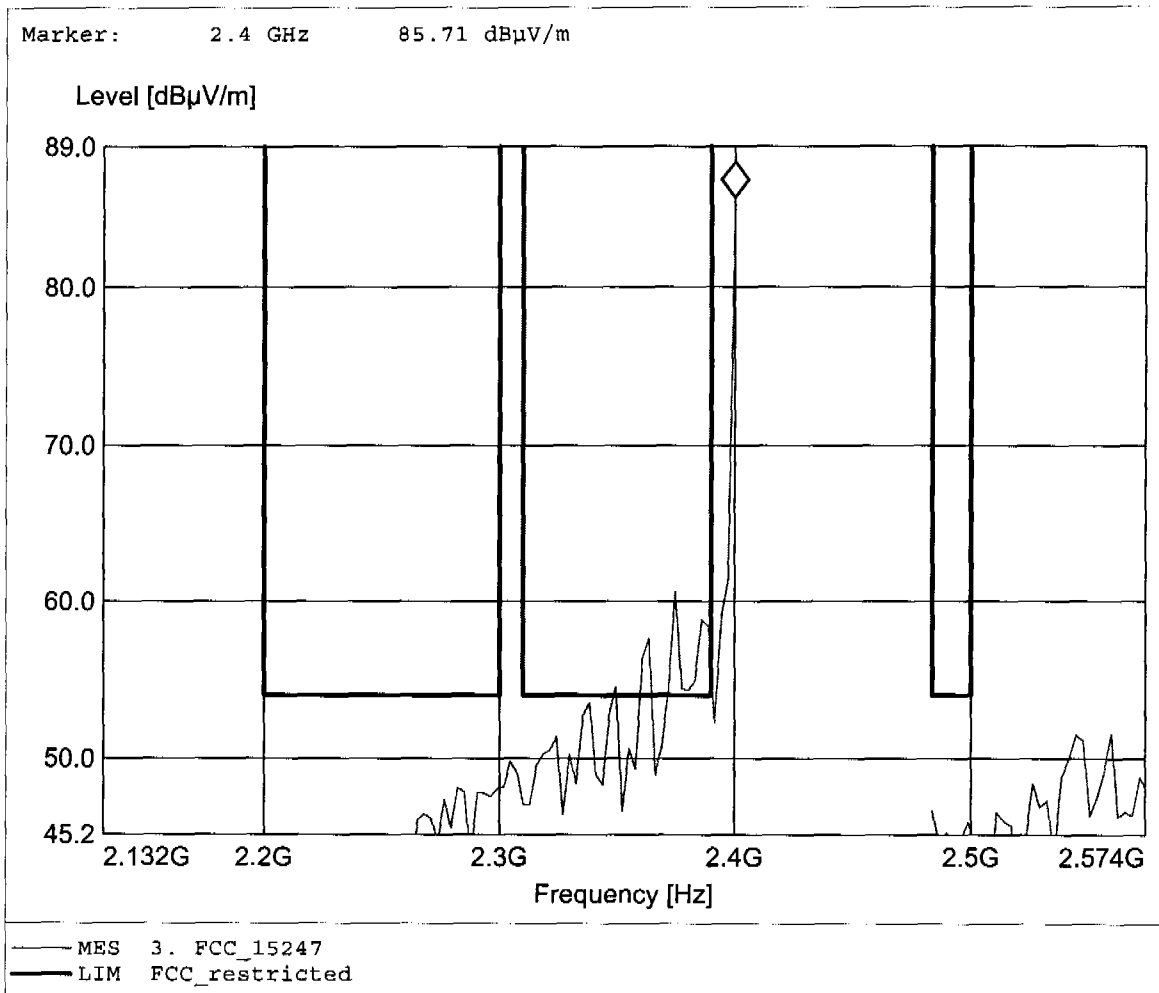

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: VTech Telecommunications Limited
EUT: 2.4 GHz Cordless VoIP Phone / Base / Antenna 1 / Ch.: 0
Model: USB7100 (HS+BS)
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 7.0 V DC (120 V AC/DC adaptor)
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, amplif.
Comment 2: Freq: 2.400GHz, Emax: 85.71dBuV/m, RBW: 1MHz

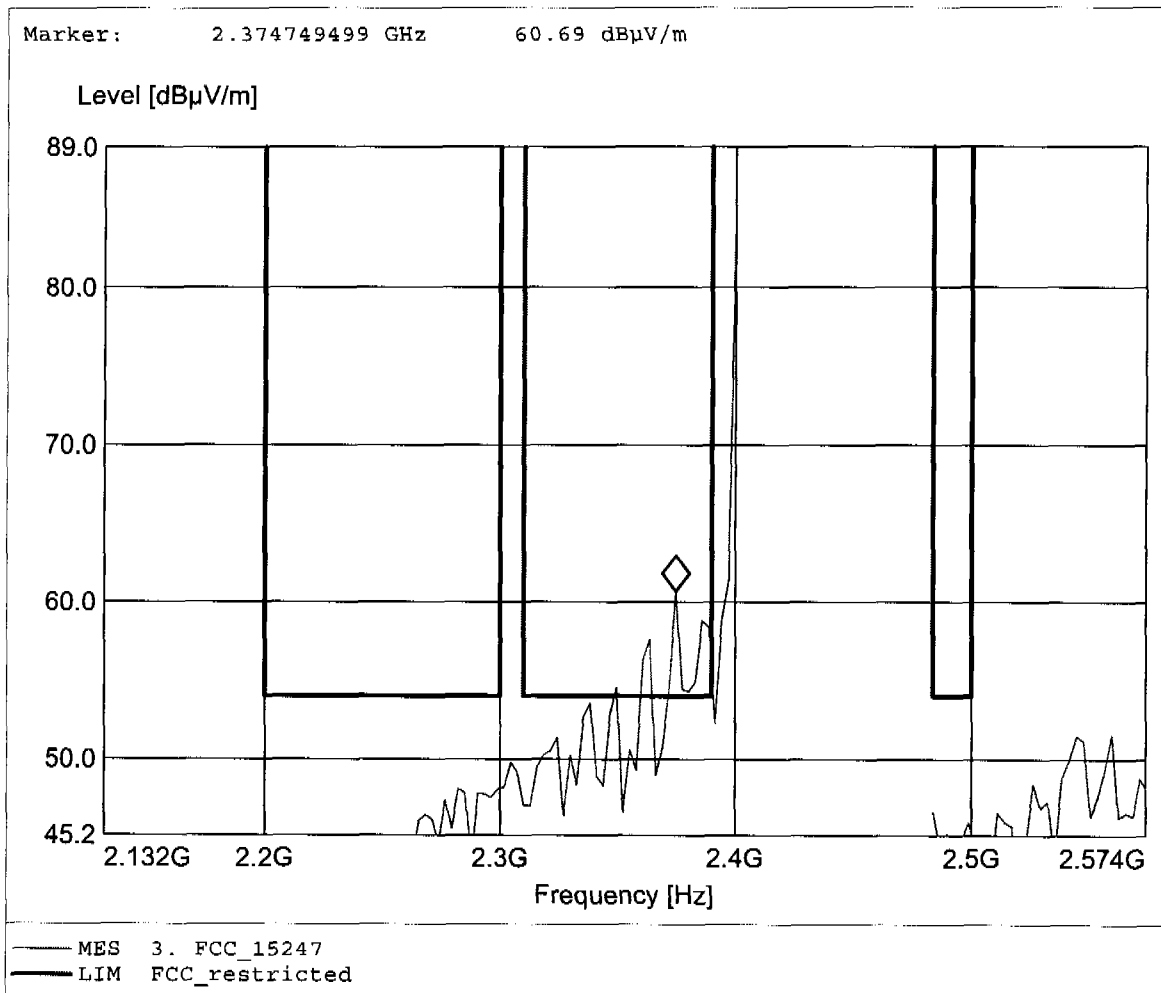

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: VTech Telecommunications Limited
EUT: 2.4 GHz Cordless VoIP Phone / Base / Antenna 1 / Ch.: 0
Model: USB7100 (HS+BS)
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 7.0 V DC (120 V AC/DC adaptor)
Test Specification: according to §15.247, average detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, amplif.
Comment 2: Freq: 2.400GHz, Emax: 46.38dBµV/m, RBW: 1MHz

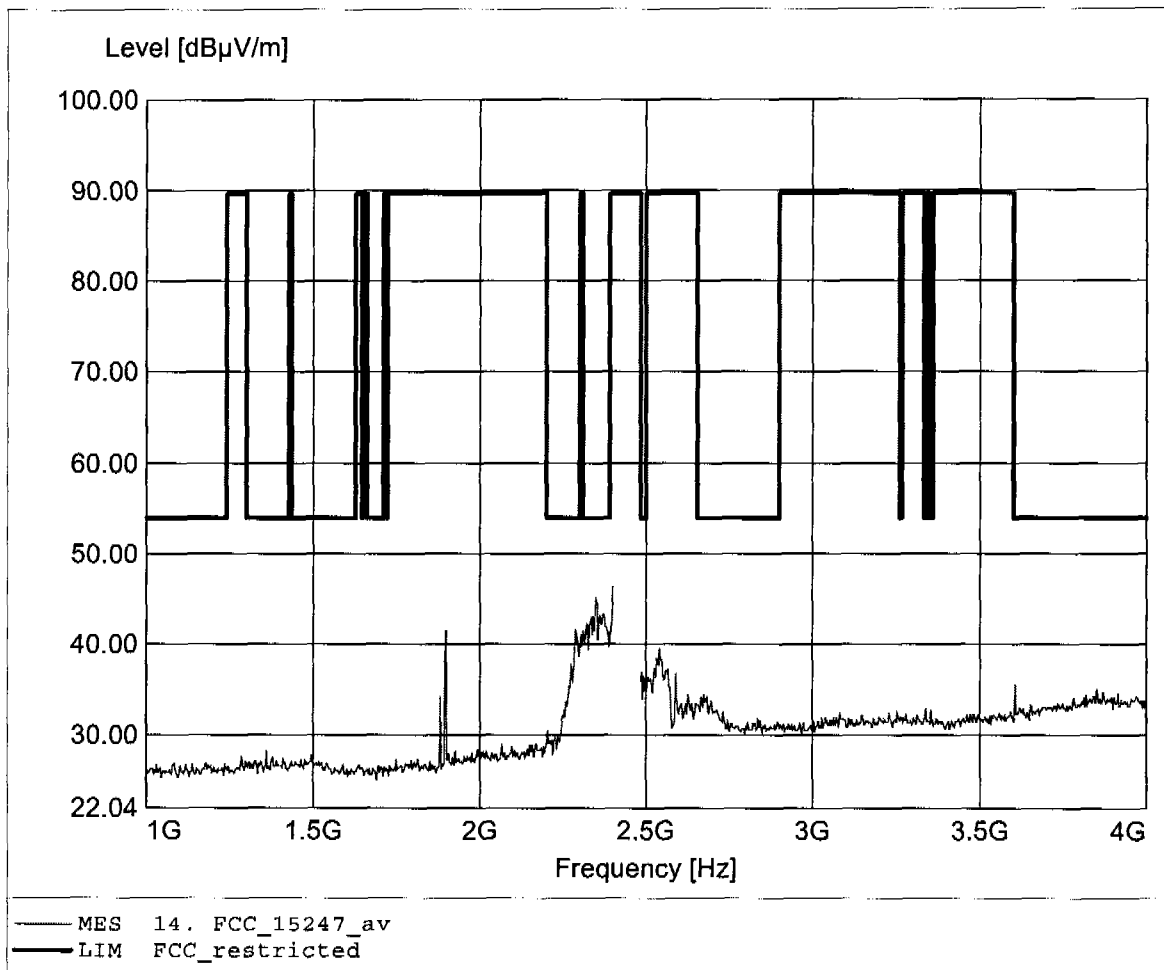

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: VTech Telecommunications Limited
EUT: 2.4 GHz Cordless VoIP Phone / Base / Antenna 1 / Ch.: 0
Model: USB7100 (HS+BS)
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 7.0 V DC (120 V AC/DC adaptor)
Test Specification: according to §15.247, average detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, amplif.
Comment 2: Freq: 2.400GHz, Emax: 48.49dBuV/m, RBW: 1MHz

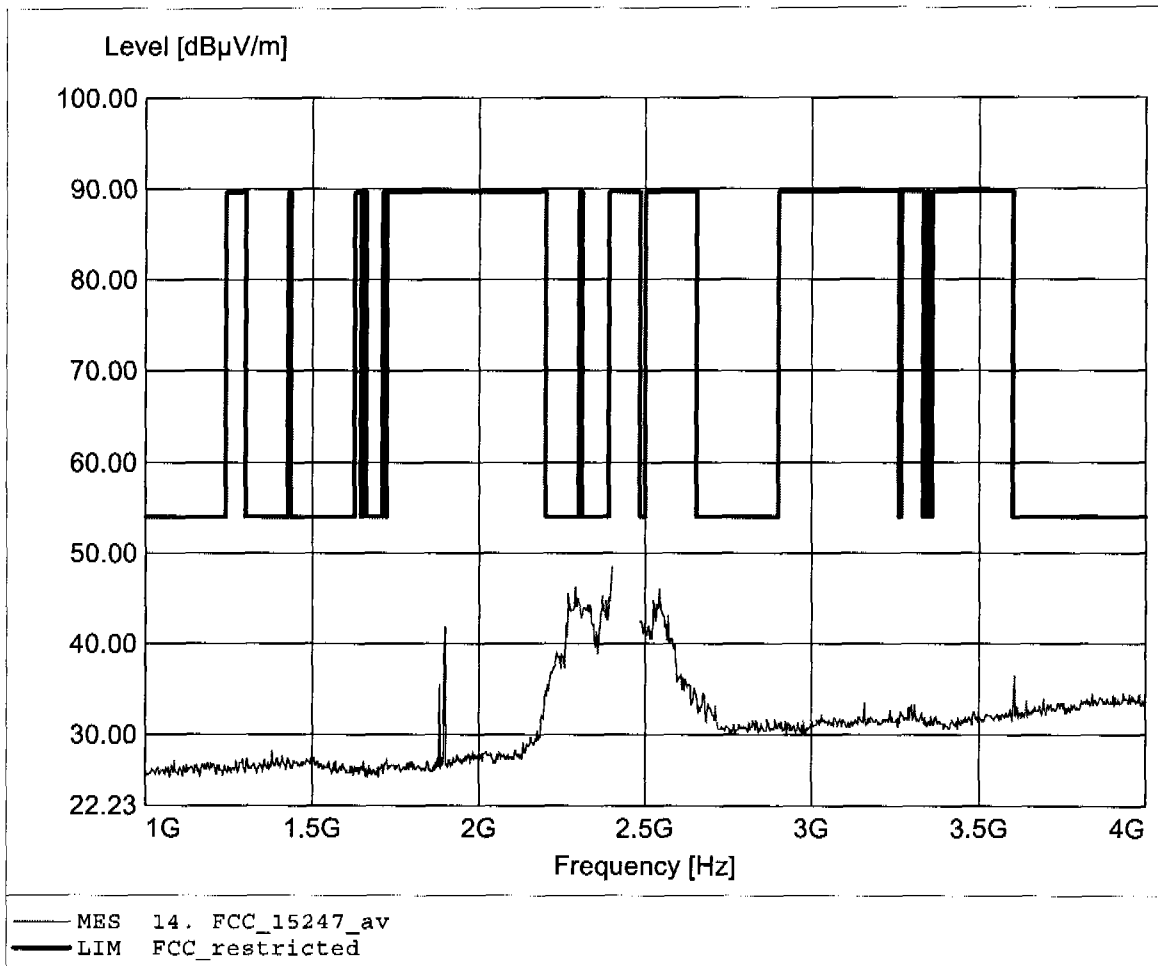

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: VTech Telecommunications Limited
EUT: 2.4 GHz Cordless VoIP Phone / Base / Antenna 1 / Ch.: 0
Model: USB7100 (HS+BS)
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 7.0 V DC (120 V AC/DC adaptor)
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, amplif.
Comment 2: Freq: 2.400GHz, Emax: 82.90dBµV/m, RBW: 1MHz

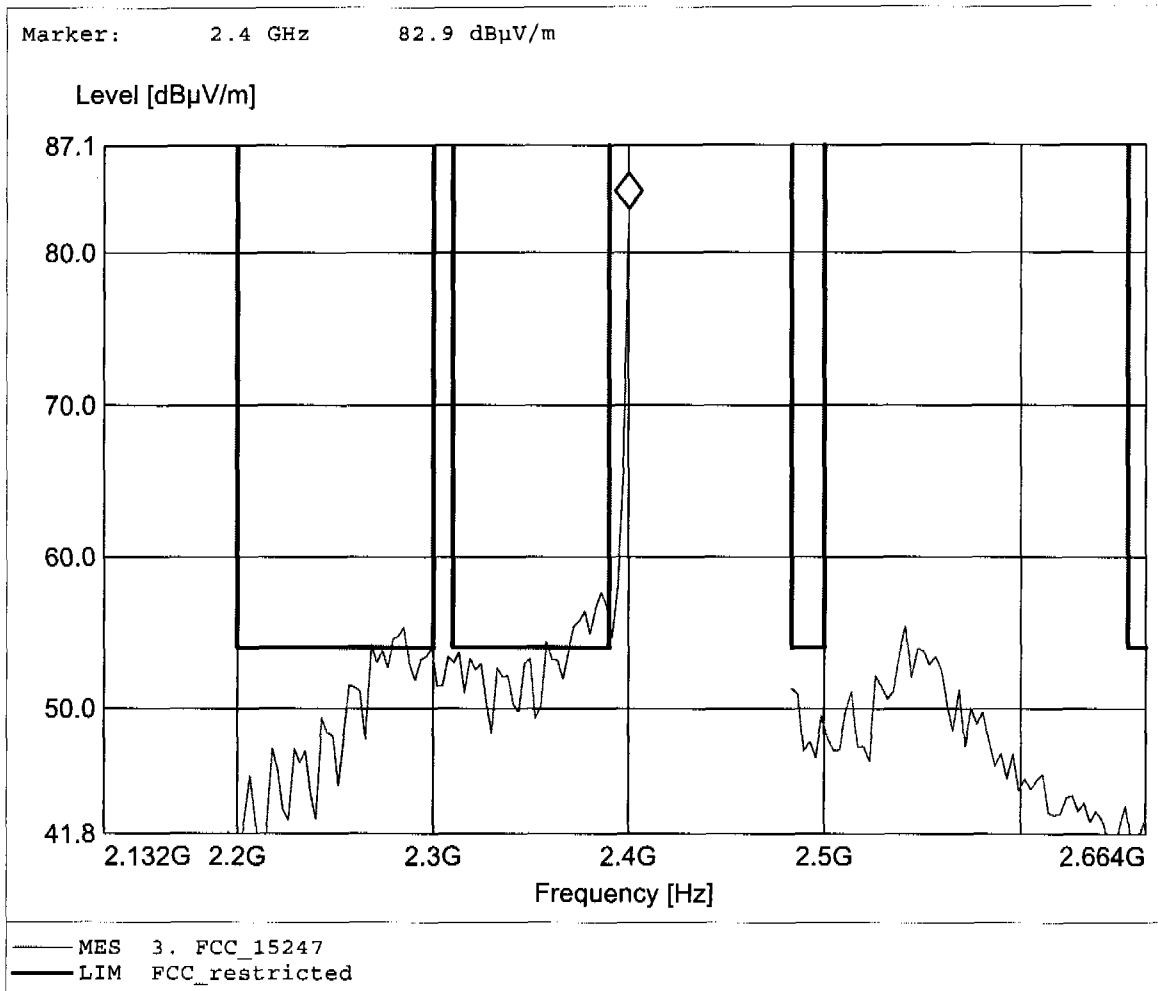

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: VTech Telecommunications Limited
EUT: 2.4 GHz Cordless VoIP Phone / Base / Antenna 1 / Ch.: 0
Model: USB7100 (HS+BS)
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 7.0 V DC (120 V AC/DC adaptor)
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, amplif.
Comment 2: Freq: 2.400GHz, Emax: 82.90dBµV/m, RBW: 1MHz

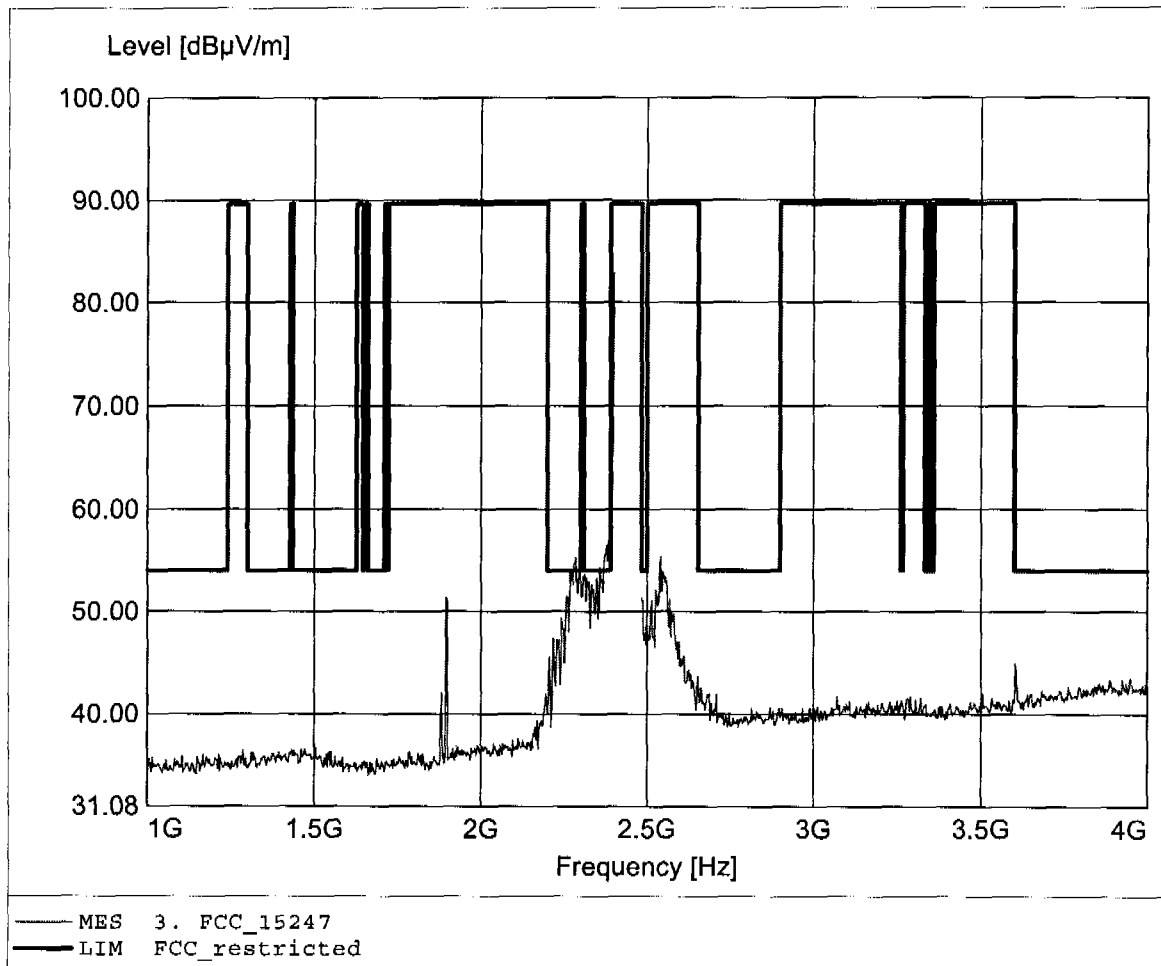

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: VTech Telecommunications Limited
EUT: 2.4 GHz Cordless VoIP Phone / Base / Antenna 1 / Ch.: 0
Model: USB7100 (HS+BS)
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 7.0 V DC (120 V AC/DC adaptor)
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 7.206GHz, Emax: 49.58dBuV/m, RBW: 1MHz

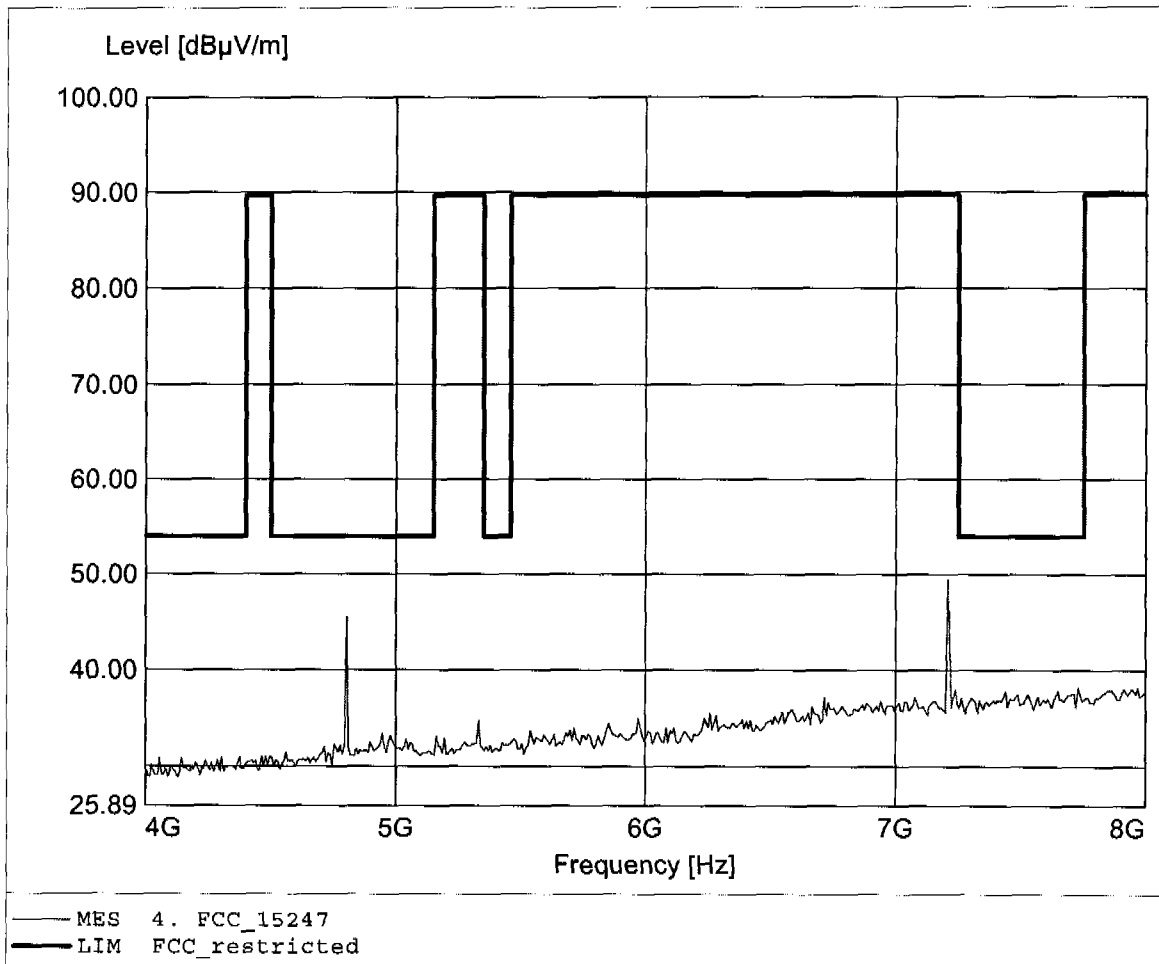

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: VTech Telecommunications Limited
EUT: 2.4 GHz Cordless VoIP Phone / Base / Antenna 1 / Ch.: 0
Model: USB7100 (HS+BS)
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 7.0 V DC (120 V AC/DC adaptor)
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 7.206GHz, Emax: 44.99dBµV/m, RBW: 1MHz

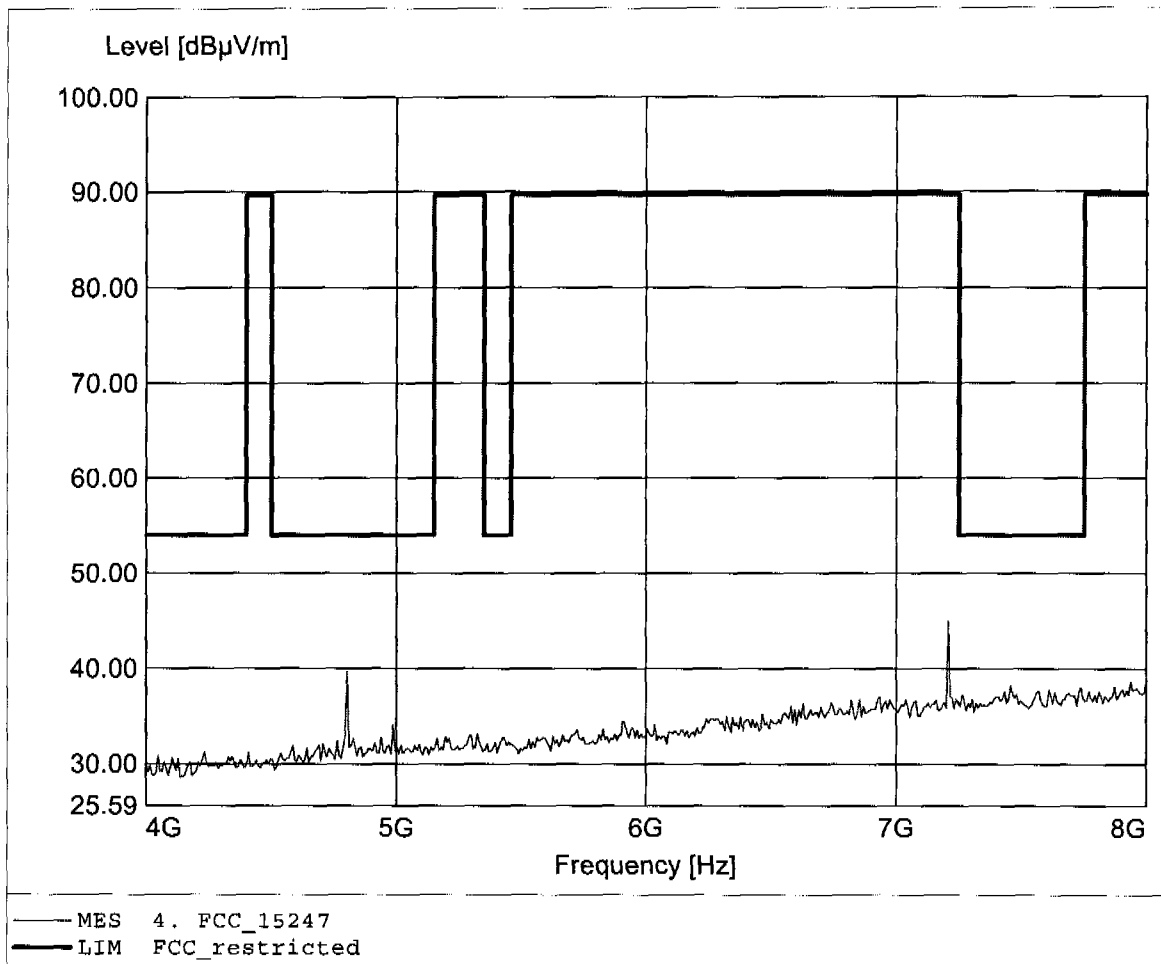

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: VTech Telecommunications Limited
EUT: 2.4 GHz Cordless VoIP Phone / Base / Antenna 1 / Ch.: 0
Model: USB7100 (HS+BS)
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 7.0 V DC (120 V AC/DC adaptor)
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 11.399GHz, Emax: 42.21dBµV/m, RBW: 1MHz

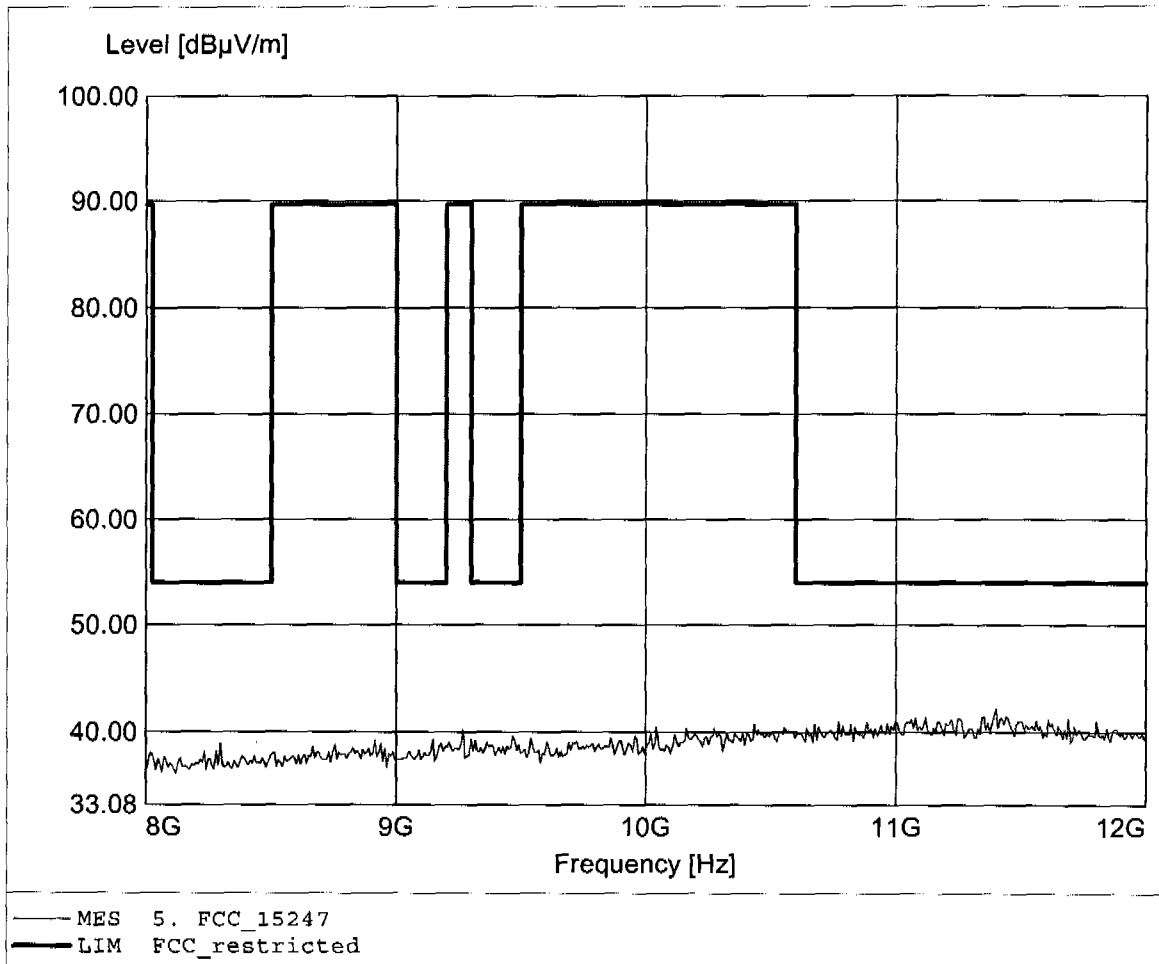

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: VTech Telecommunications Limited
EUT: 2.4 GHz Cordless VoIP Phone / Base / Antenna 1 / Ch.: 0
Model: USB7100 (HS+BS)
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 7.0 V DC (120 V AC/DC adaptor)
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 9.603GHz, Emax: 49.30dBµV/m, RBW: 1MHz

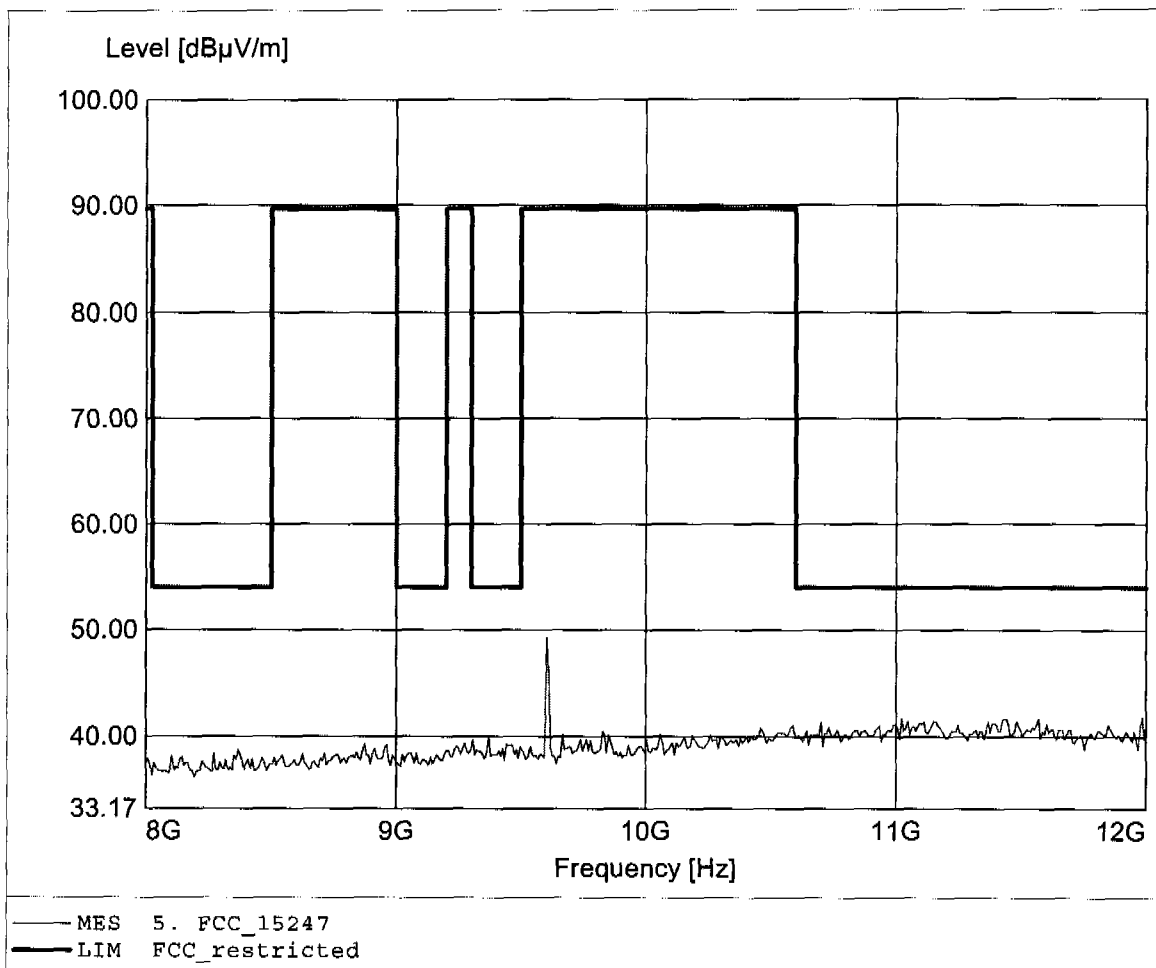

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: VTech Telecommunications Limited
EUT: 2.4 GHz Cordless VoIP Phone / Base / Antenna 1 / Ch.: 0
Model: USB7100 (HS+BS)
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 7.0 V DC (120 V AC/DC adaptor)
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 14.415GHz, Emax: 52.09dBµV/m, RBW: 1MHz

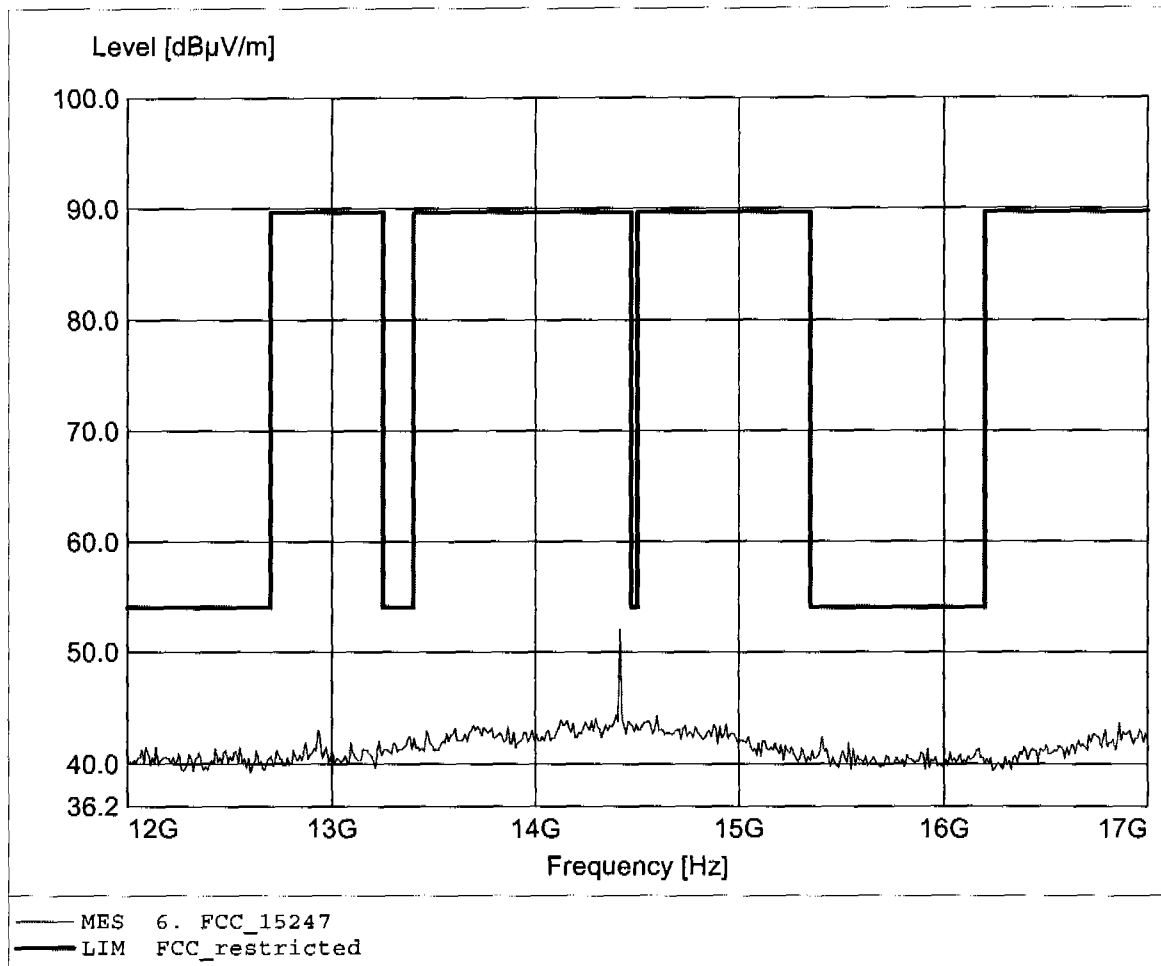

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: VTech Telecommunications Limited
EUT: 2.4 GHz Cordless VoIP Phone / Base / Antenna 1 / Ch.: 0
Model: USB7100 (HS+BS)
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 7.0 V DC (120 V AC/DC adaptor)
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 14.415GHz, Emax: 52.64dBµV/m, RBW: 1MHz

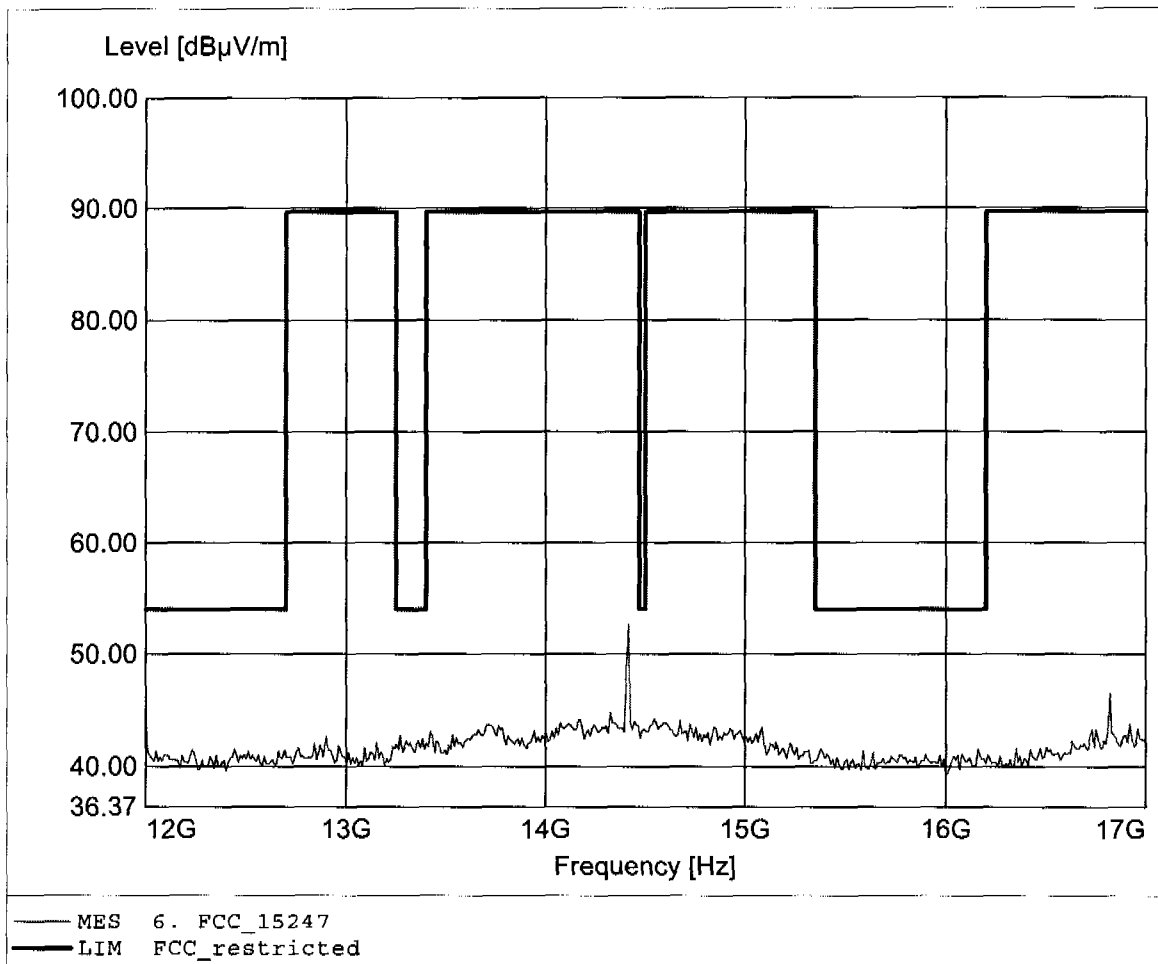

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: VTech Telecommunications Limited
EUT: 2.4 GHz Cordless VoIP Phone / Base / Antenna 1 / Ch.: 0
Model: USB7100 (HS+BS)
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 7.0 V DC (120 V AC/DC adaptor)
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq: 17.000GHz, Emax: 45.61dBµV/m, RBW: 1MHz

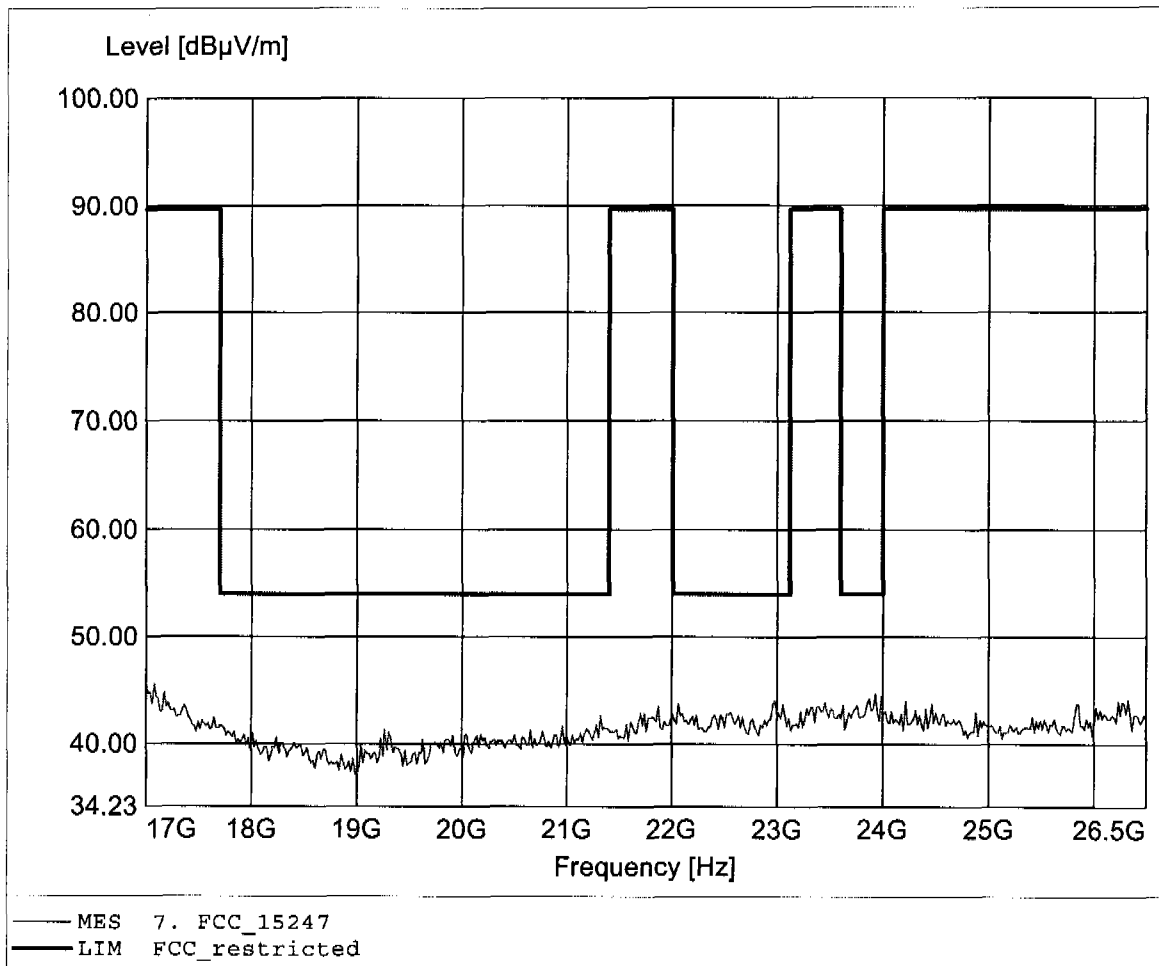

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: VTech Telecommunications Limited
EUT: 2.4 GHz Cordless VoIP Phone / Base / Antenna 1 / Ch.: 0
Model: USB7100 (HS+BS)
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 7.0 V DC (120 V AC/DC adaptor)
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq: 17.000GHz, Emax: 45.14dBµV/m, RBW: 1MHz

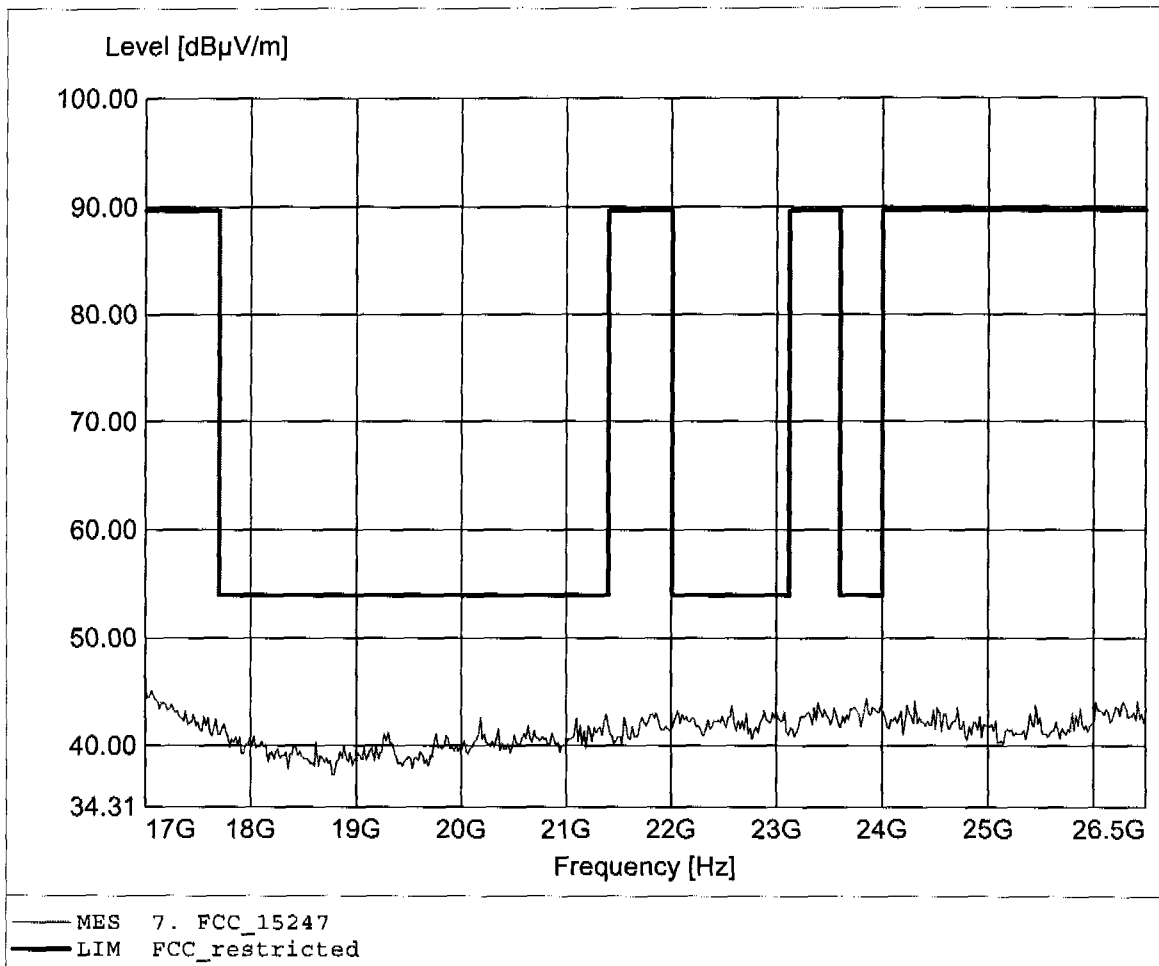

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: VTech Telecommunications Limited
EUT: 2.4 GHz Cordless VoIP Phone / Base / Antenna 1 / Ch.: 23
Model: USB7100 (HS+BS)
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 7.0 V DC (120 V AC/DC adaptor)
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq: 197.956MHz, Emax: 33.70dBµV/m, RBW: 100kHz

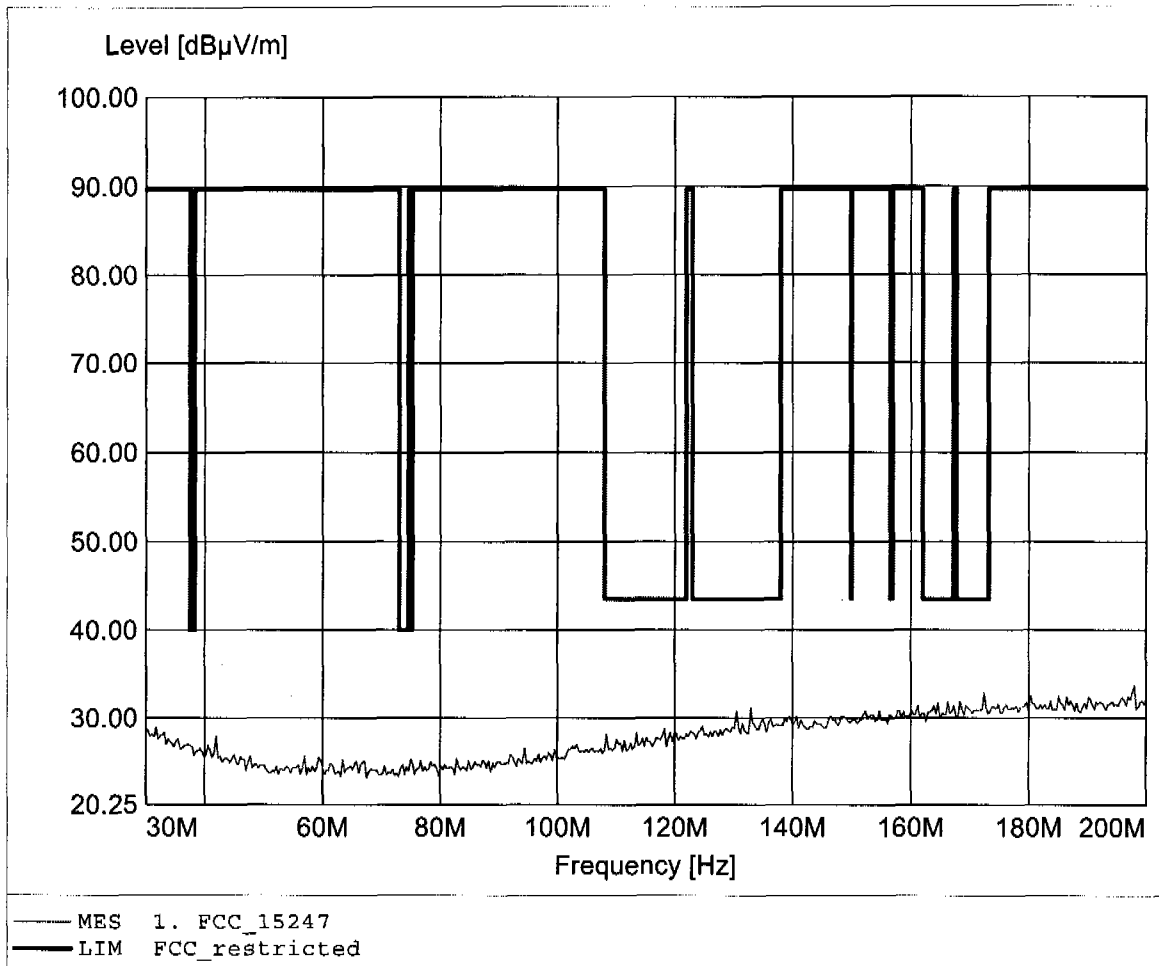

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: VTech Telecommunications Limited
EUT: 2.4 GHz Cordless VoIP Phone / Base / Antenna 1 / Ch.: 23
Model: USB7100 (HS+BS)
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 7.0 V DC (120 V AC/DC adaptor)
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq: 195.230MHz, Emax: 32.55dBµV/m, RBW: 100kHz

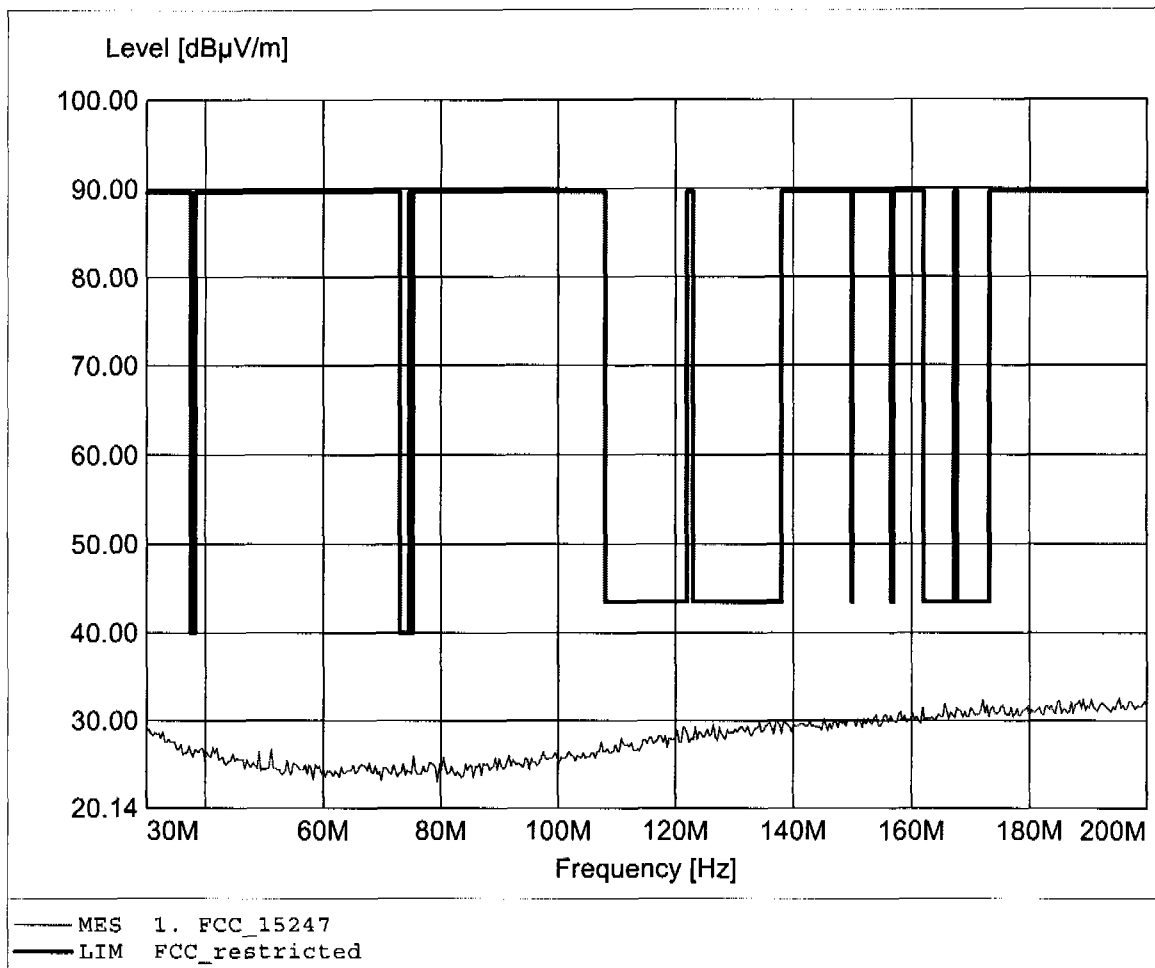

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: VTech Telecommunications Limited
EUT: 2.4 GHz Cordless VoIP Phone / Base / Antenna 1 / Ch.: 23
Model: USB7100 (HS+BS)
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 7.0 V DC (120 V AC/DC adaptor)
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HL 223, amplif.
Comment 2: Freq: 988.778MHz, Emax: 23.09dBµV/m, RBW: 100kHz

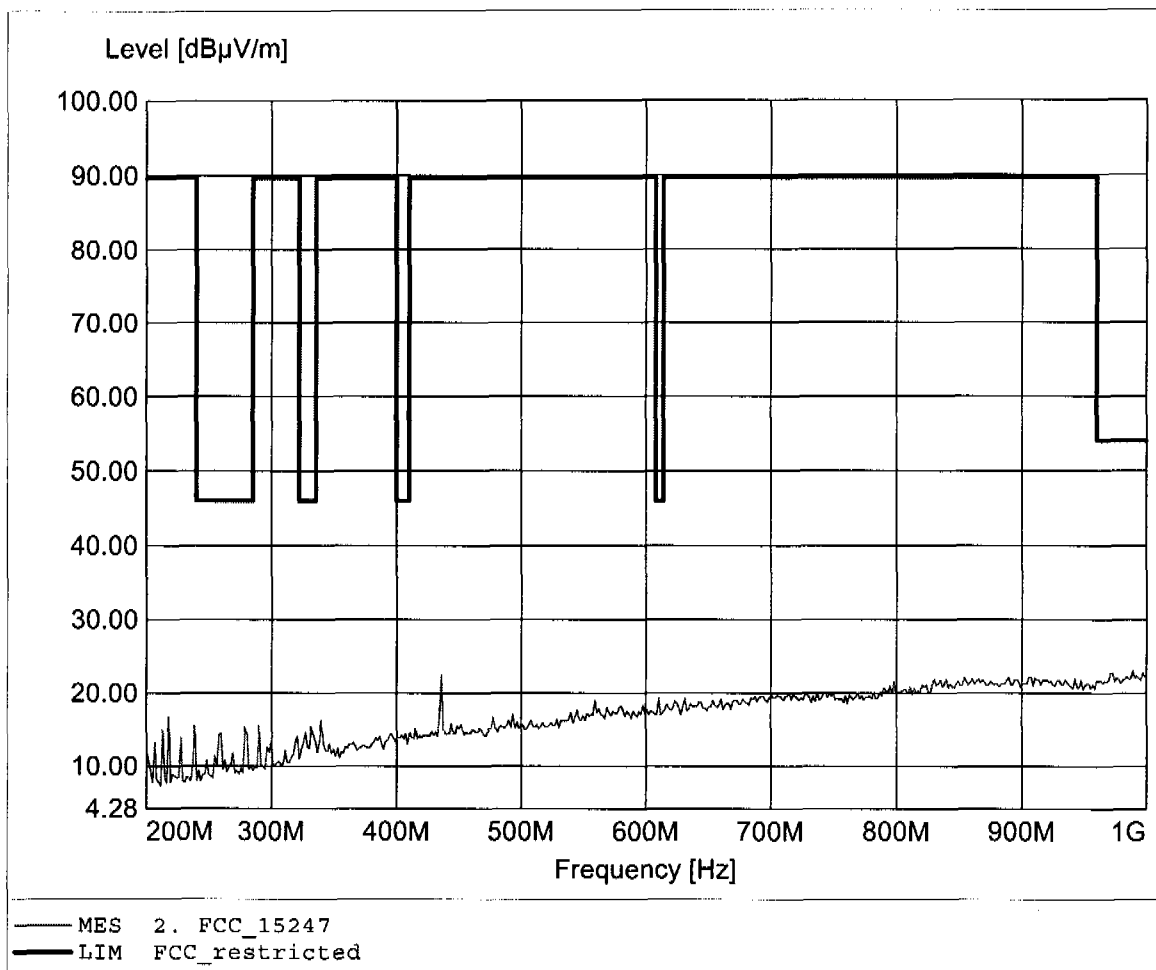

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: VTech Telecommunications Limited
EUT: 2.4 GHz Cordless VoIP Phone / Base / Antenna 1 / Ch.: 23
Model: USB7100 (HS+BS)
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 7.0 V DC (120 V AC/DC adaptor)
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HL 223, amplif.
Comment 2: Freq: 435.671MHz, Emax: 28.50dBµV/m, RBW: 100kHz

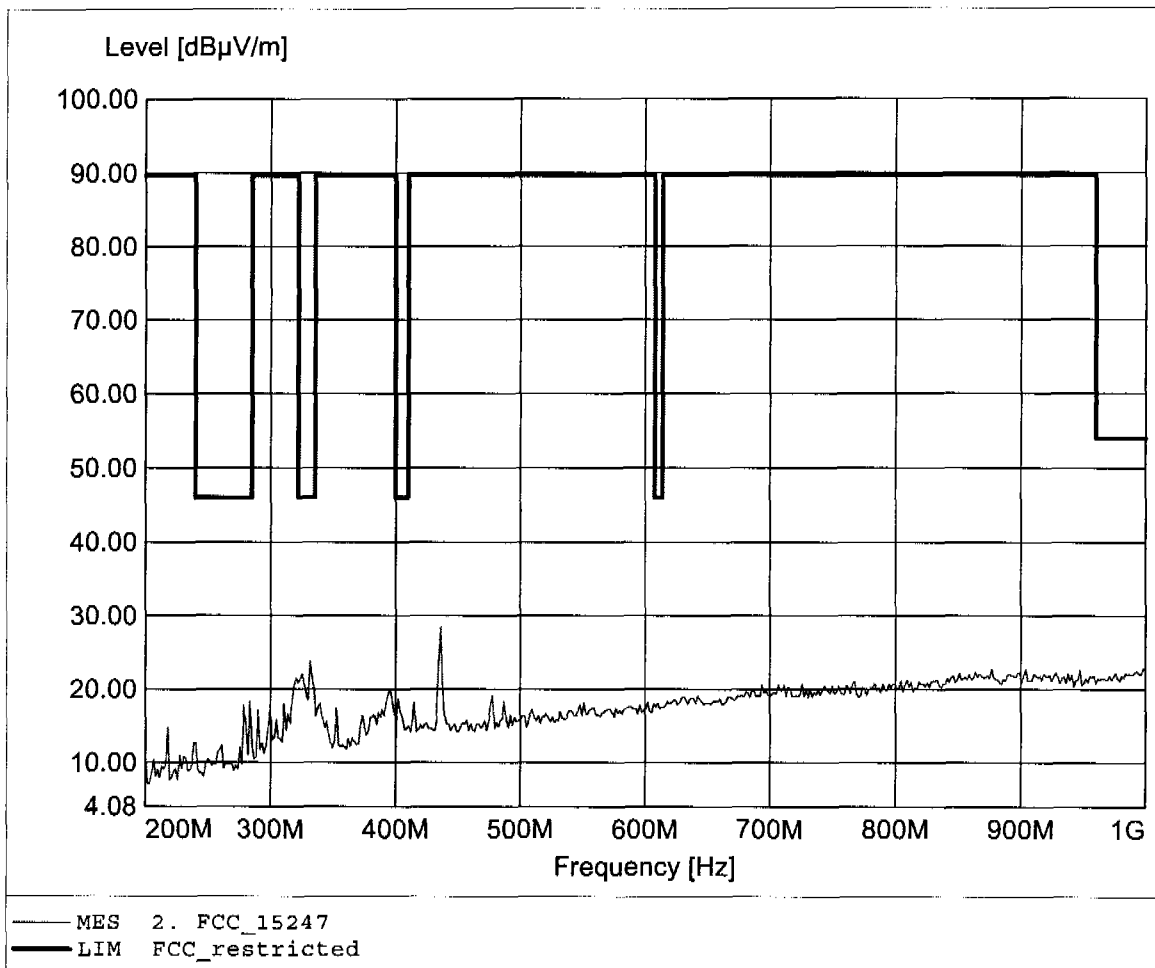

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: VTech Telecommunications Limited
EUT: 2.4 GHz Cordless VoIP Phone / Base / Antenna 1 / Ch.: 23
Model: USB7100 (HS+BS)
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 7.0 V DC (120 V AC/DC adaptor)
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, amplif.
Comment 2: Freq: 2.375GHz, Emax: 55.25dBµV/m, RBW: 1MHz

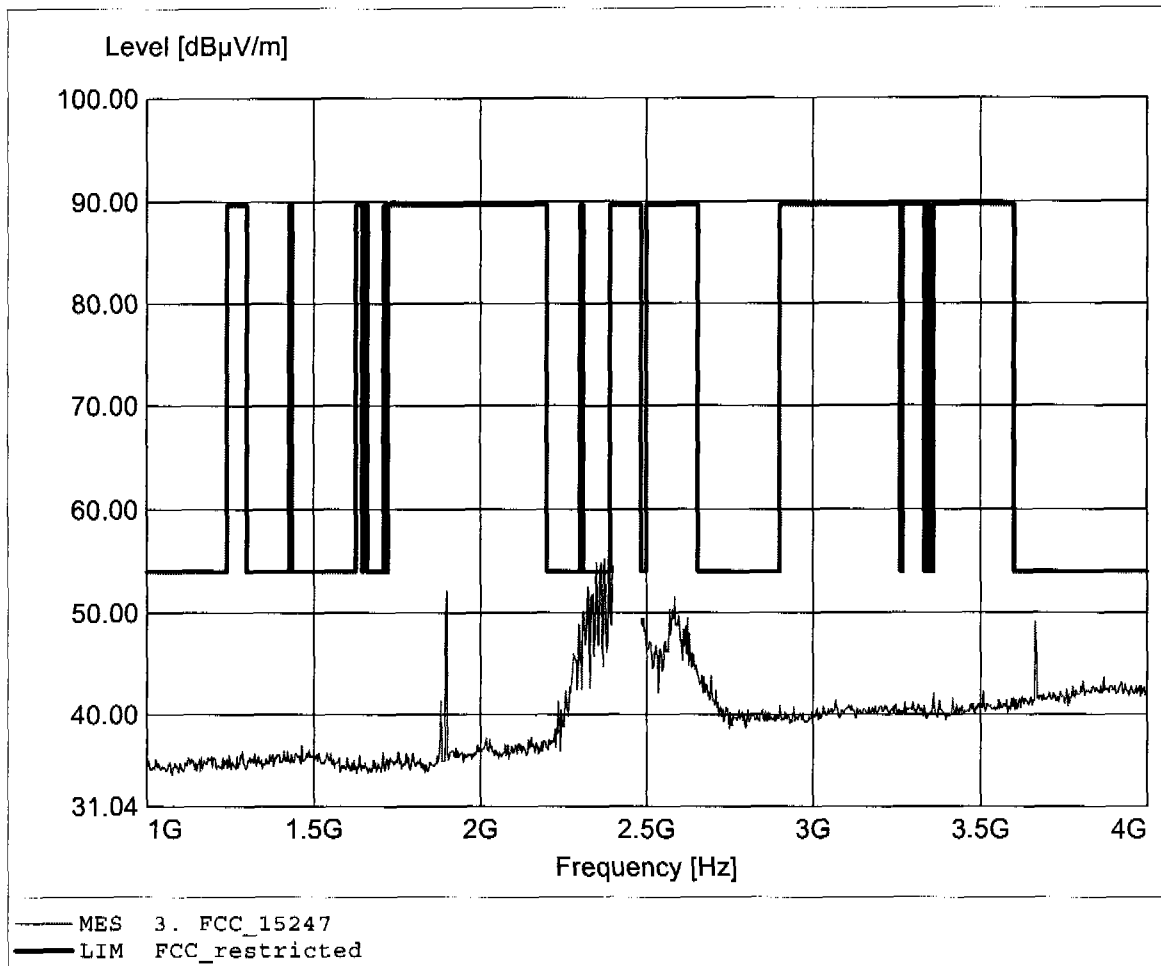

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: VTech Telecommunications Limited
EUT: 2.4 GHz Cordless VoIP Phone / Base / Antenna 1 / Ch.: 23
Model: USB7100 (HS+BS)
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 7.0 V DC (120 V AC/DC adaptor)
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, amplif.
Comment 2: Freq: 2.375GHz, Emax: 55.25dBµV/m, RBW: 1MHz

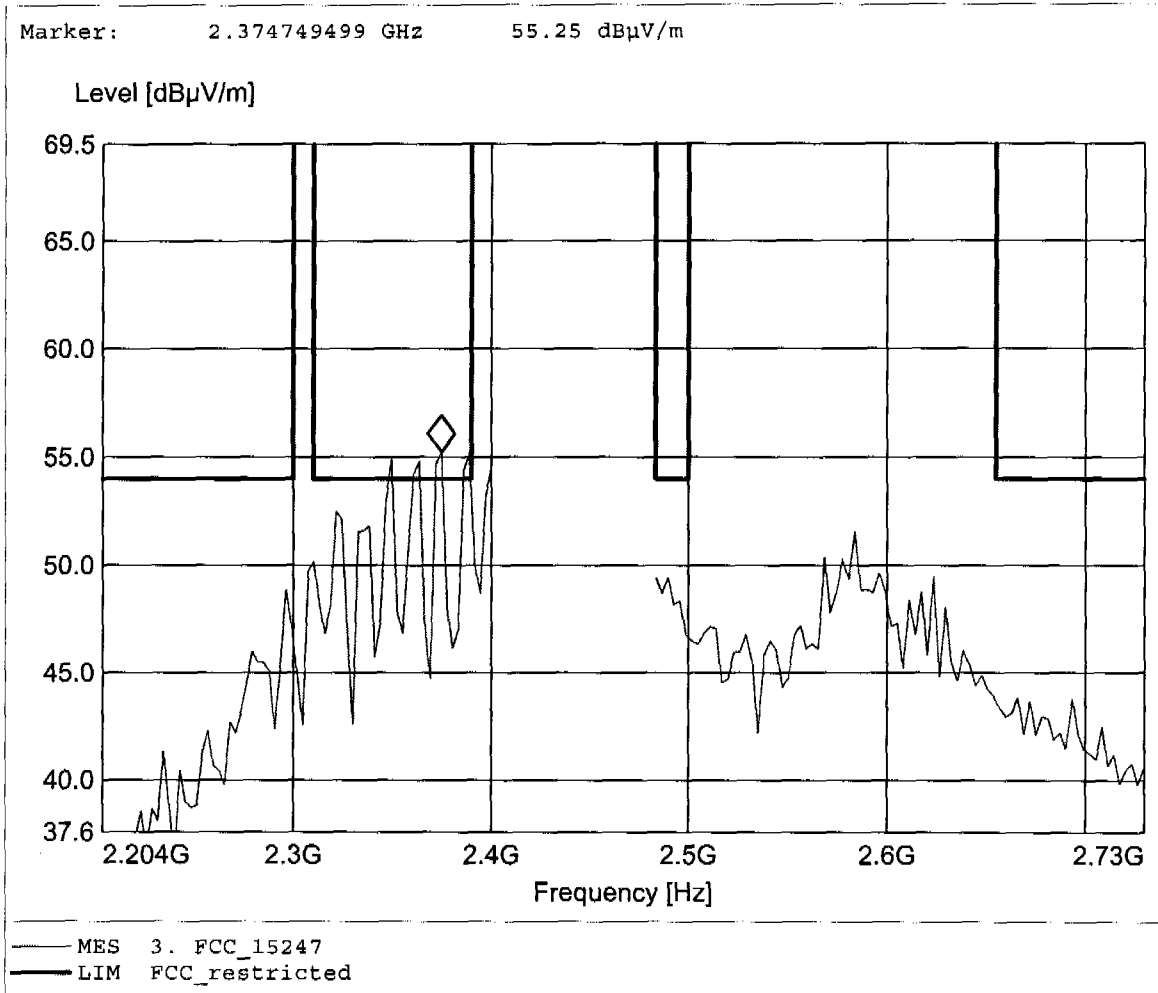

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: VTech Telecommunications Limited
EUT: 2.4 GHz Cordless VoIP Phone / Base / Antenna 1 / Ch.: 23
Model: USB7100 (HS+BS)
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 7.0 V DC (120 V AC/DC adaptor)
Test Specification: according to §15.247, average detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, amplif.
Comment 2: Freq: 2.364GHz, Emax: 45.64dBuV/m, RBW: 1MHz

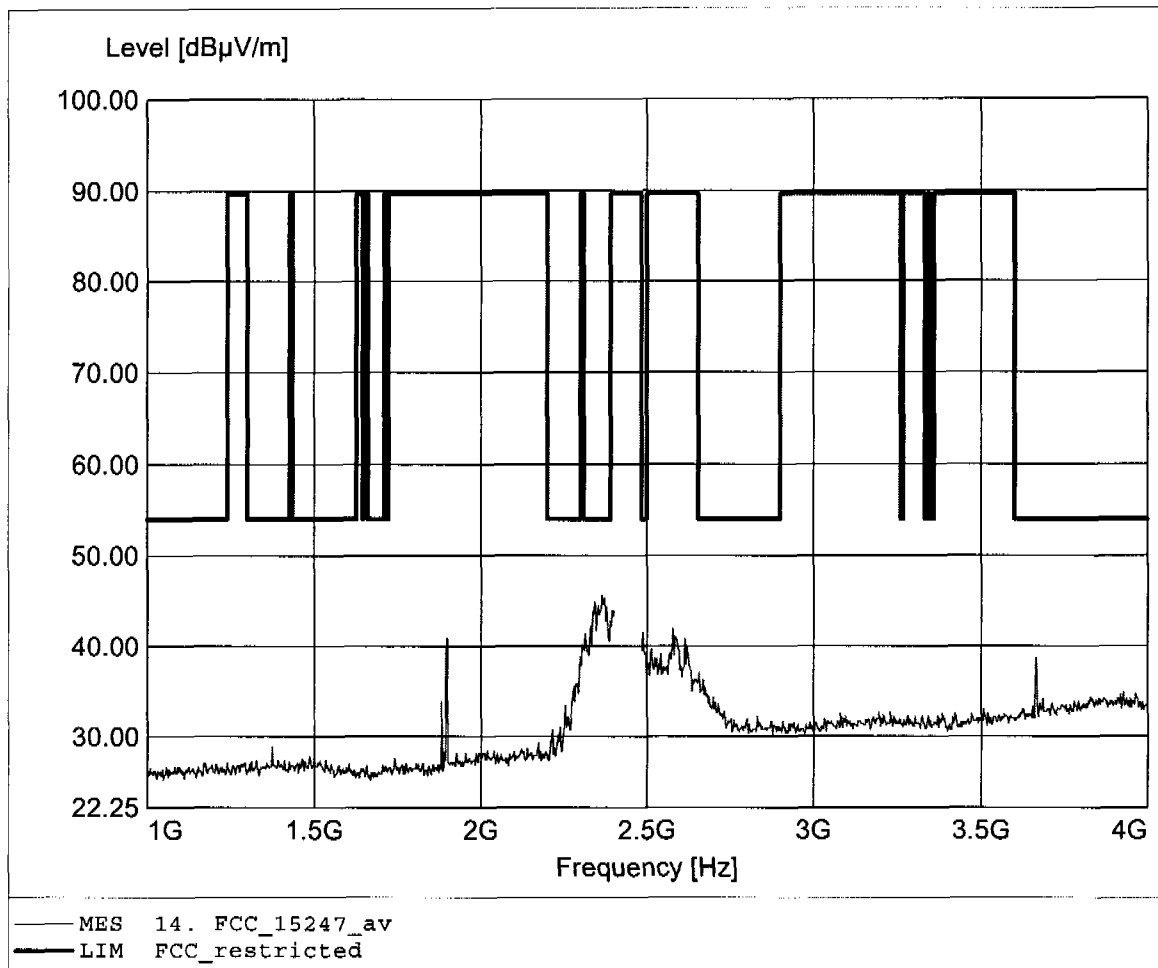

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: VTech Telecommunications Limited
EUT: 2.4 GHz Cordless VoIP Phone / Base / Antenna 1 / Ch.: 23
Model: USB7100 (HS+BS)
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 7.0 V DC (120 V AC/DC adaptor)
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, amplif.
Comment 2: Freq: 2.397GHz, Emax: 54.63dBuV/m, RBW: 1MHz

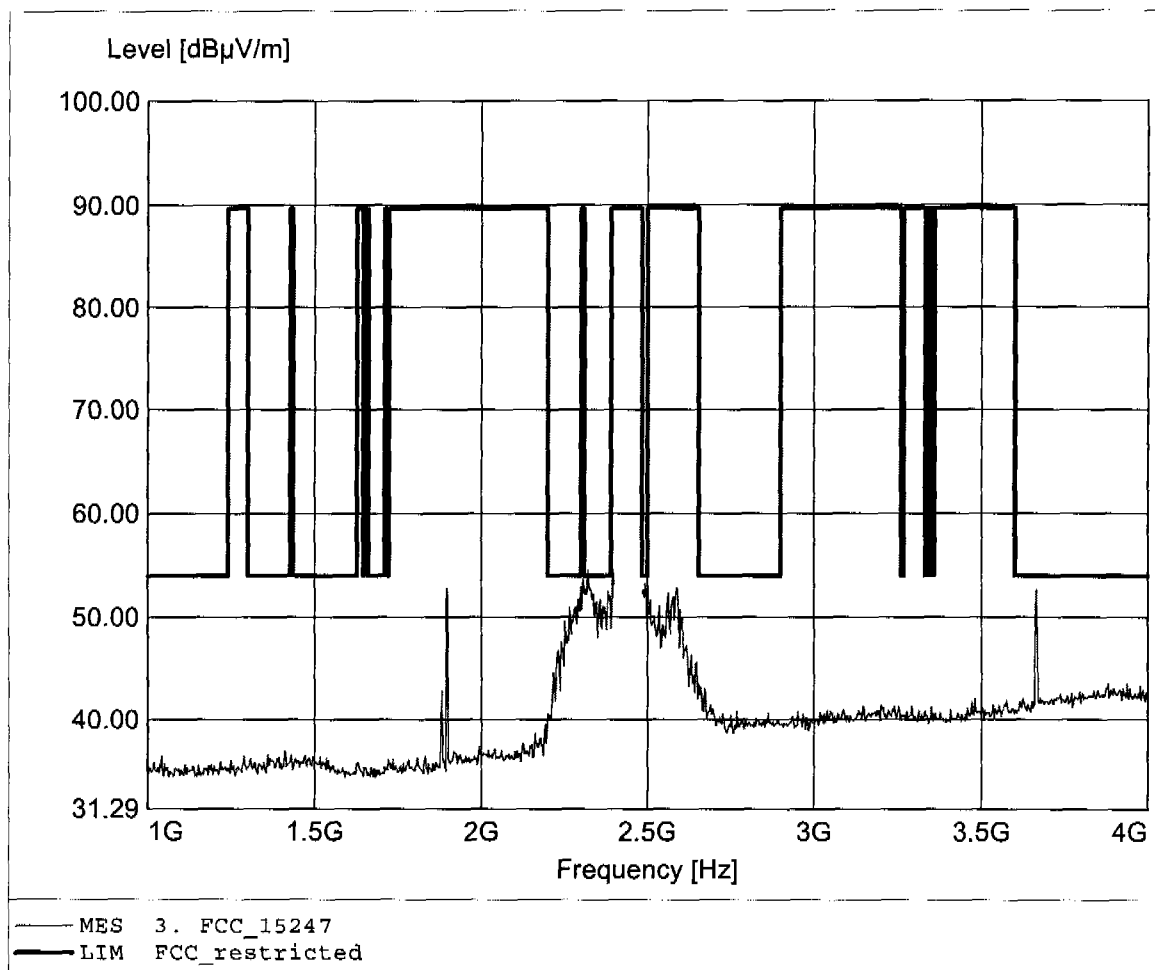

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: VTech Telecommunications Limited
EUT: 2.4 GHz Cordless VoIP Phone / Base / Antenna 1 / Ch.: 23
Model: USB7100 (HS+BS)
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 7.0 V DC (120 V AC/DC adaptor)
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, amplif.
Comment 2: Freq: 2.397GHz, Emax: 54.63dBµV/m, RBW: 1MHz

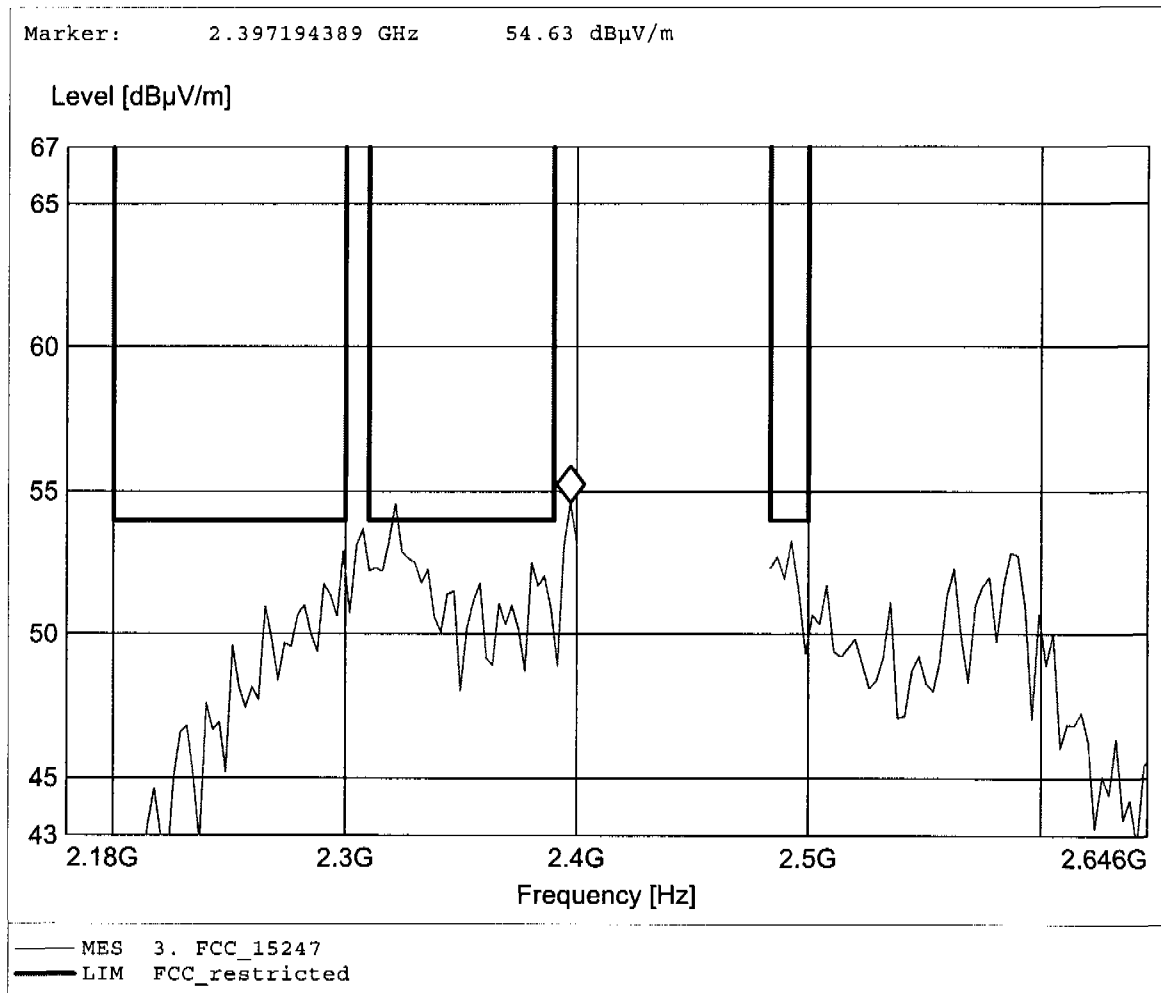

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: VTech Telecommunications Limited
EUT: 2.4 GHz Cordless VoIP Phone / Base / Antenna 1 / Ch.: 23
Model: USB7100 (HS+BS)
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 7.0 V DC (120 V AC/DC adaptor)
Test Specification: according to §15.247, average detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, amplif.
Comment 2: Freq: 2.313GHz, Emax: 44.60dBµV/m, RBW: 1MHz

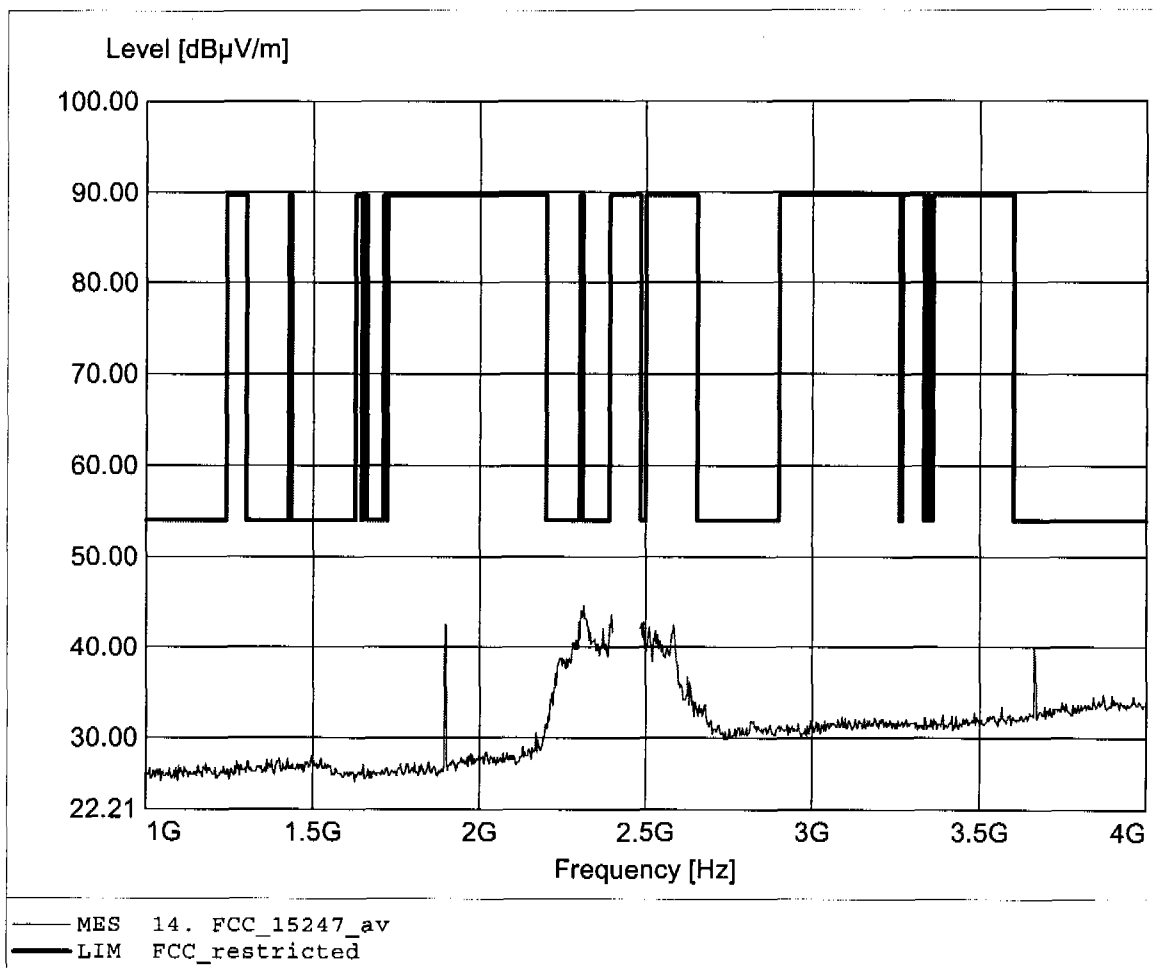

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: VTech Telecommunications Limited
EUT: 2.4 GHz Cordless VoIP Phone / Base / Antenna 1 / Ch.: 23
Model: USB7100 (HS+BS)
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 7.0 V DC (120 V AC/DC adaptor)
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 4.882GHz, Emax: 45.88dBμV/m, RBW: 1MHz

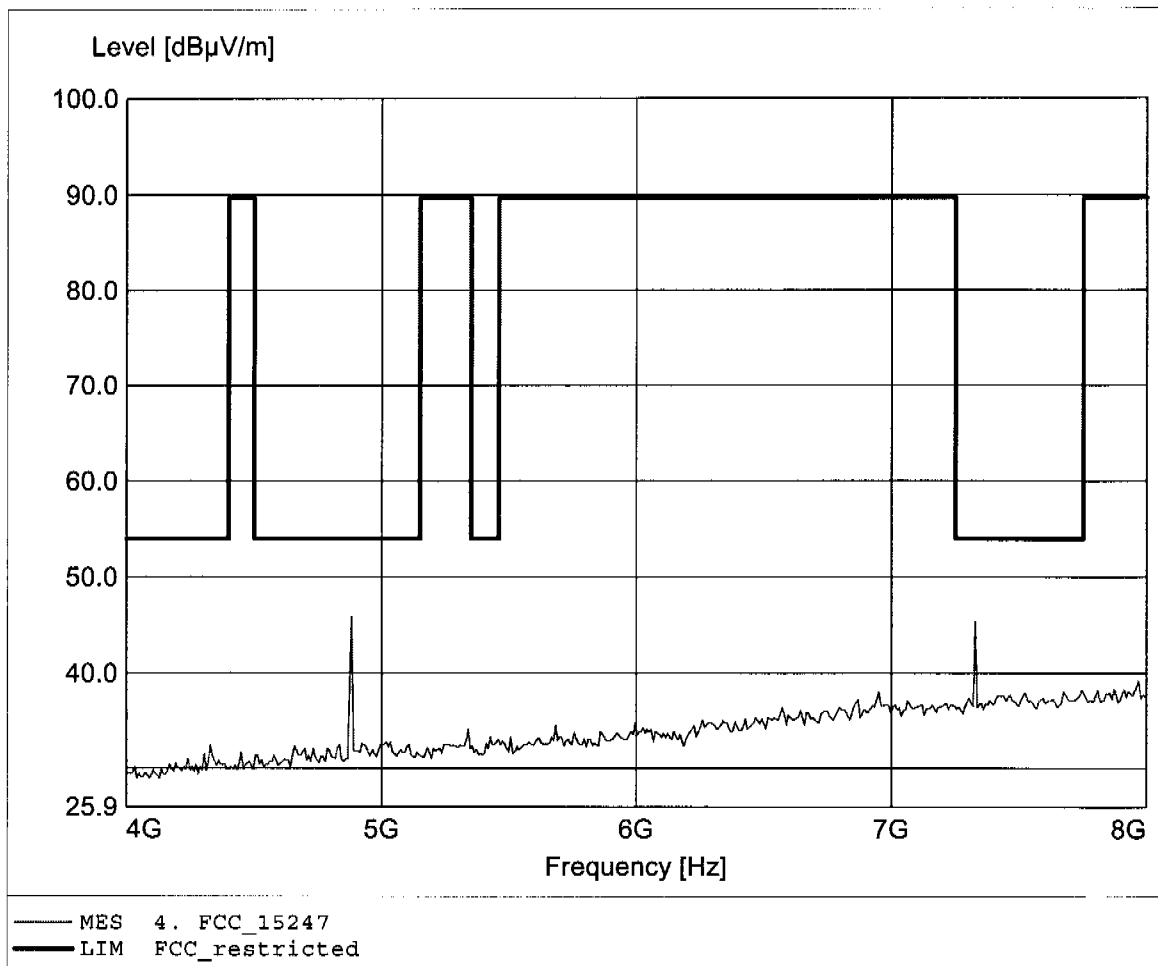

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: VTech Telecommunications Limited
EUT: 2.4 GHz Cordless VoIP Phone / Base / Antenna 1 / Ch.: 23
Model: USB7100 (HS+BS)
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 7.0 V DC (120 V AC/DC adaptor)
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 7.327GHz, Emax: 43.73dBuV/m, RBW: 1MHz

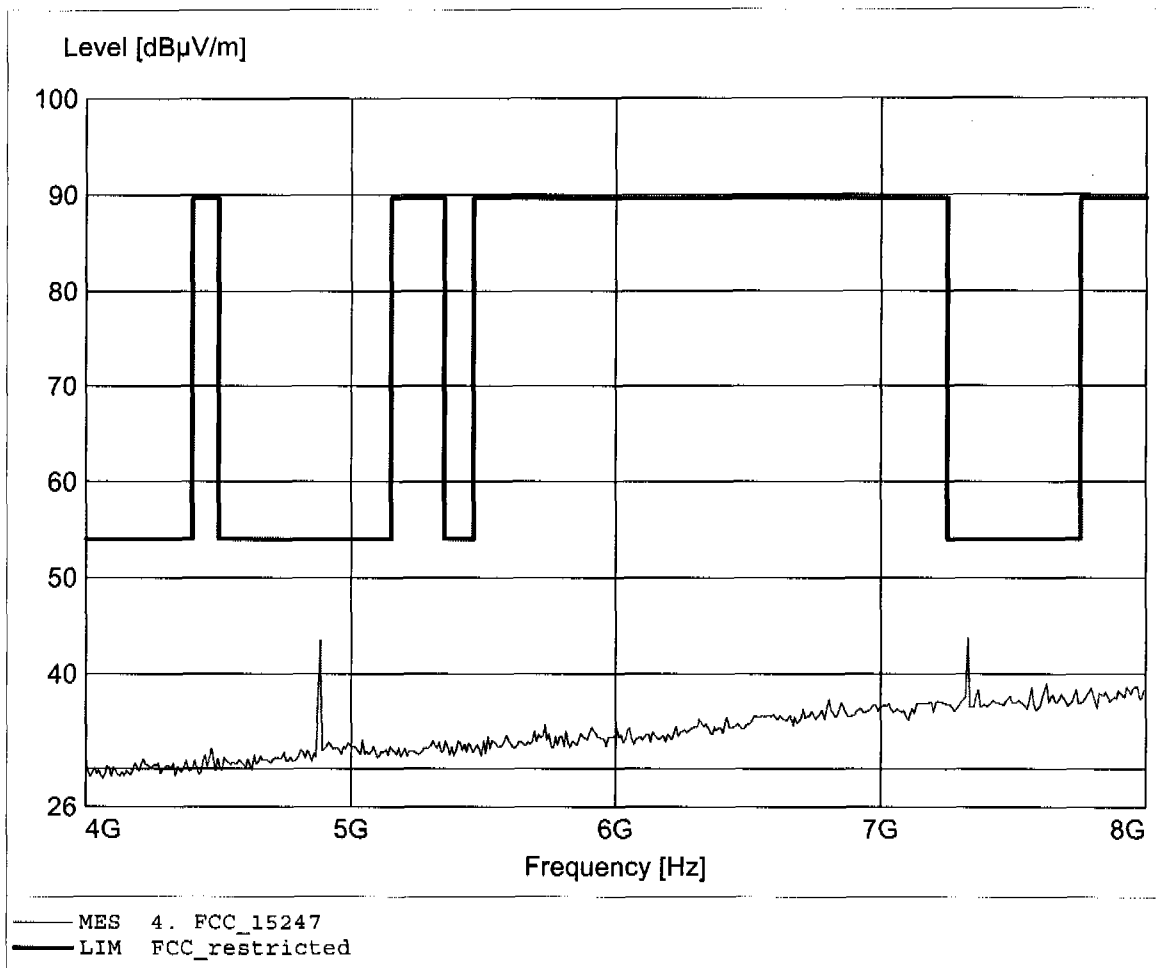

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: VTech Telecommunications Limited
EUT: 2.4 GHz Cordless VoIP Phone / Base / Antenna 1 / Ch.: 23
Model: USB7100 (HS+BS)
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 7.0 V DC (120 V AC/DC adaptor)
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 9.764GHz, Emax: 49.08dBµV/m, RBW: 1MHz

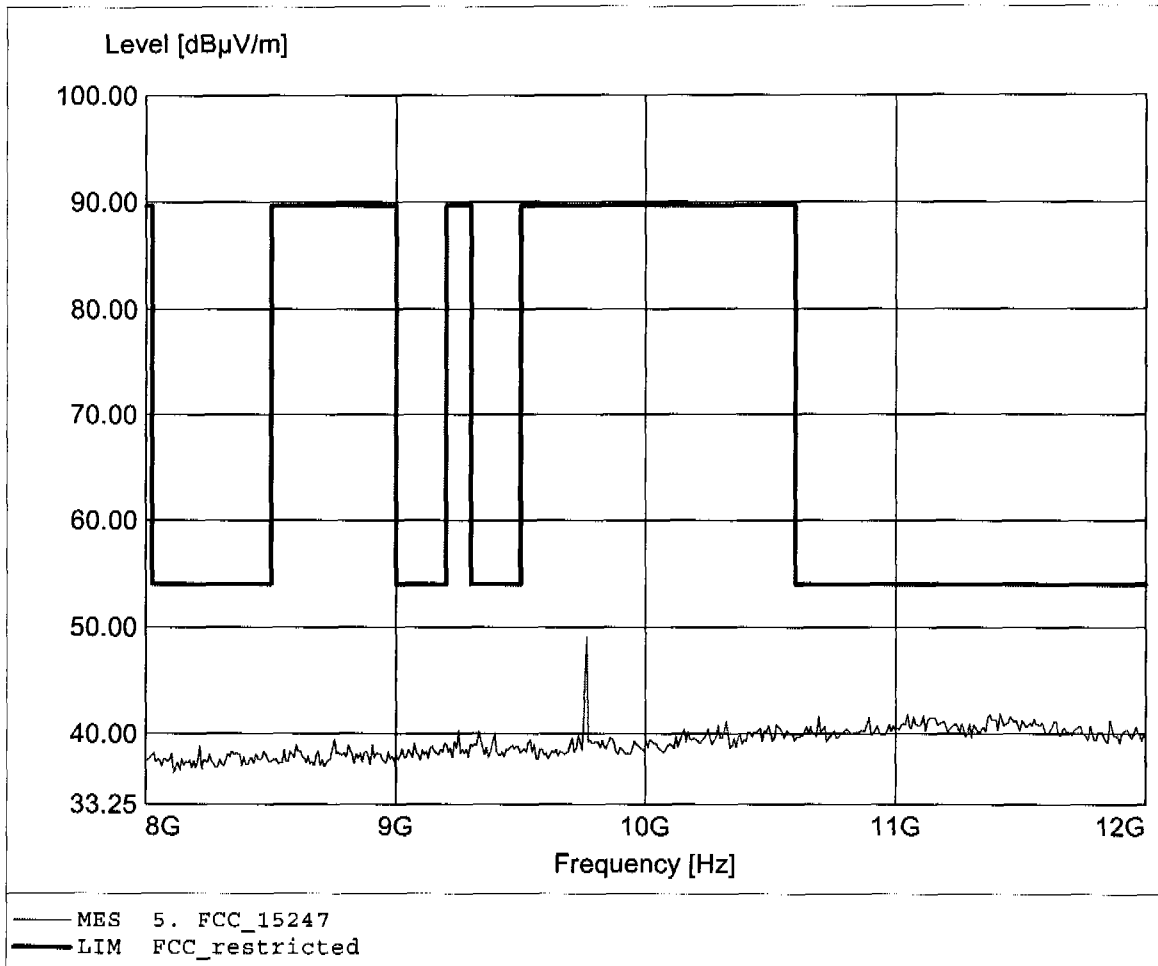

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: VTech Telecommunications Limited
EUT: 2.4 GHz Cordless VoIP Phone / Base / Antenna 1 / Ch.: 23
Model: USB7100 (HS+BS)
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 7.0 V DC (120 V AC/DC adaptor)
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 9.764GHz, Emax: 46.50dBµV/m, RBW: 1MHz

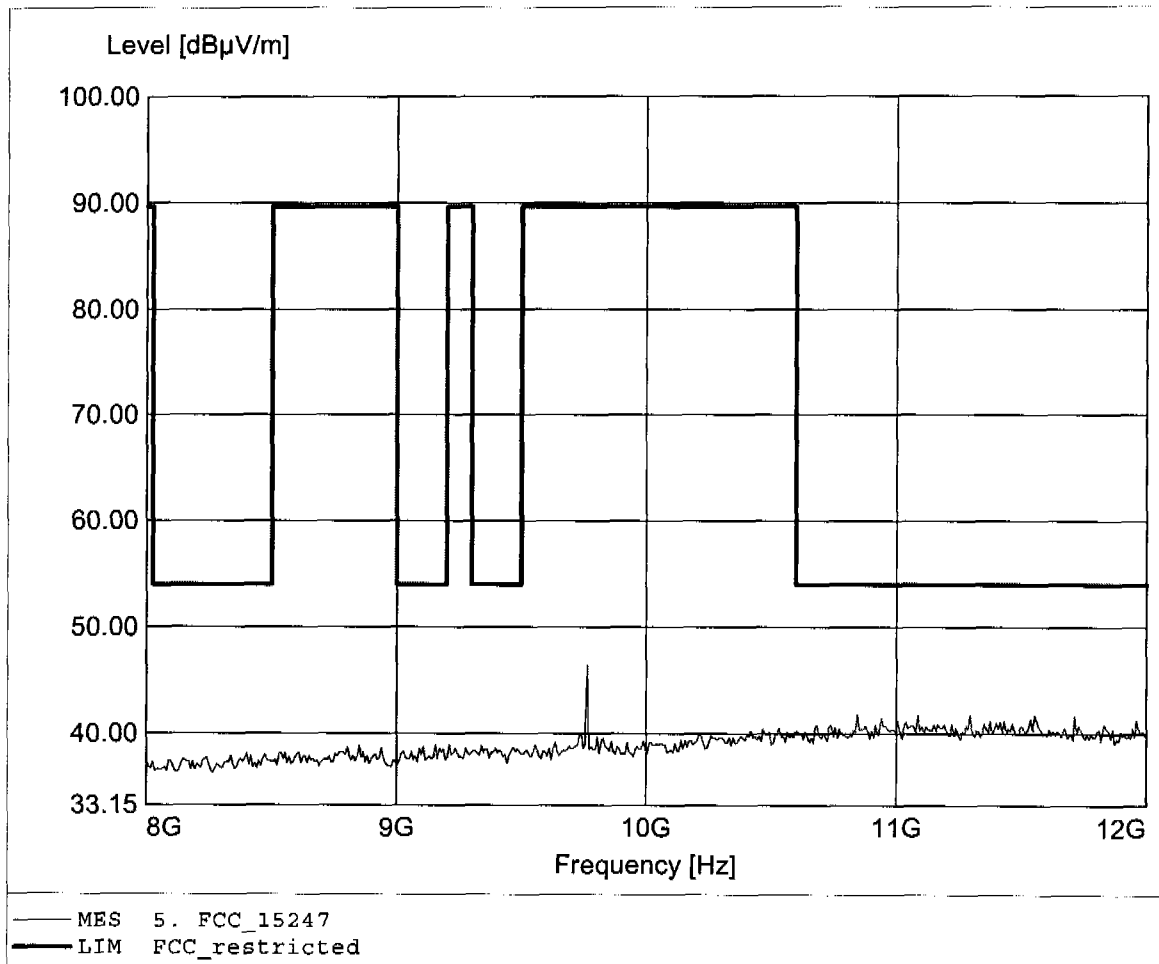

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: VTech Telecommunications Limited
EUT: 2.4 GHz Cordless VoIP Phone / Base / Antenna 1 / Ch.: 23
Model: USB7100 (HS+BS)
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 7.0 V DC (120 V AC/DC adaptor)
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 12.200GHz, Emax: 56.92dBµV/m, RBW: 1MHz

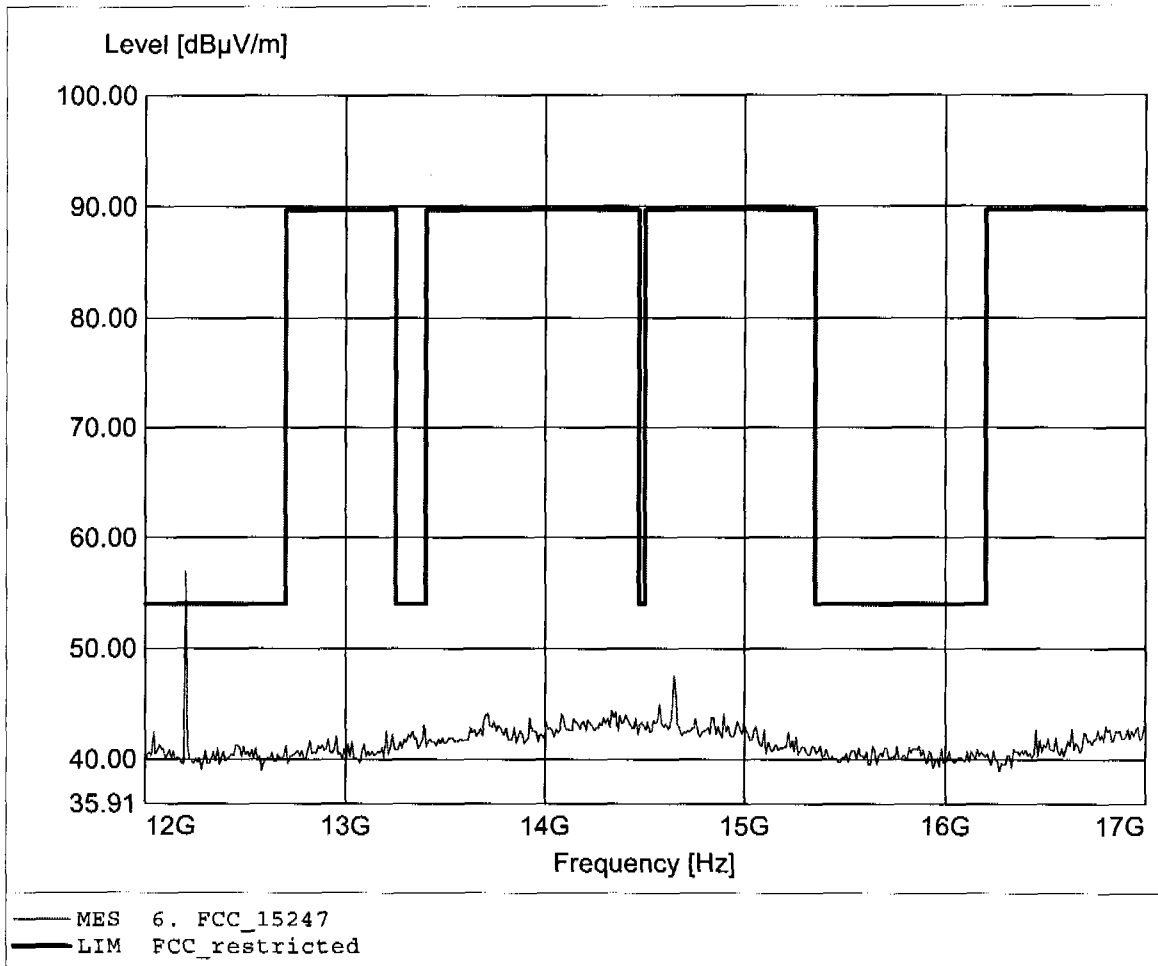

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: VTech Telecommunications Limited
EUT: 2.4 GHz Cordless VoIP Phone / Base / Antenna 1 / Ch.: 23
Model: USB7100 (HS+BS)
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 7.0 V DC (120 V AC/DC adaptor)
Test Specification: according to §15.247, average detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 14.645GHz, Emax: 34.18dBµV/m, RBW: 1MHz

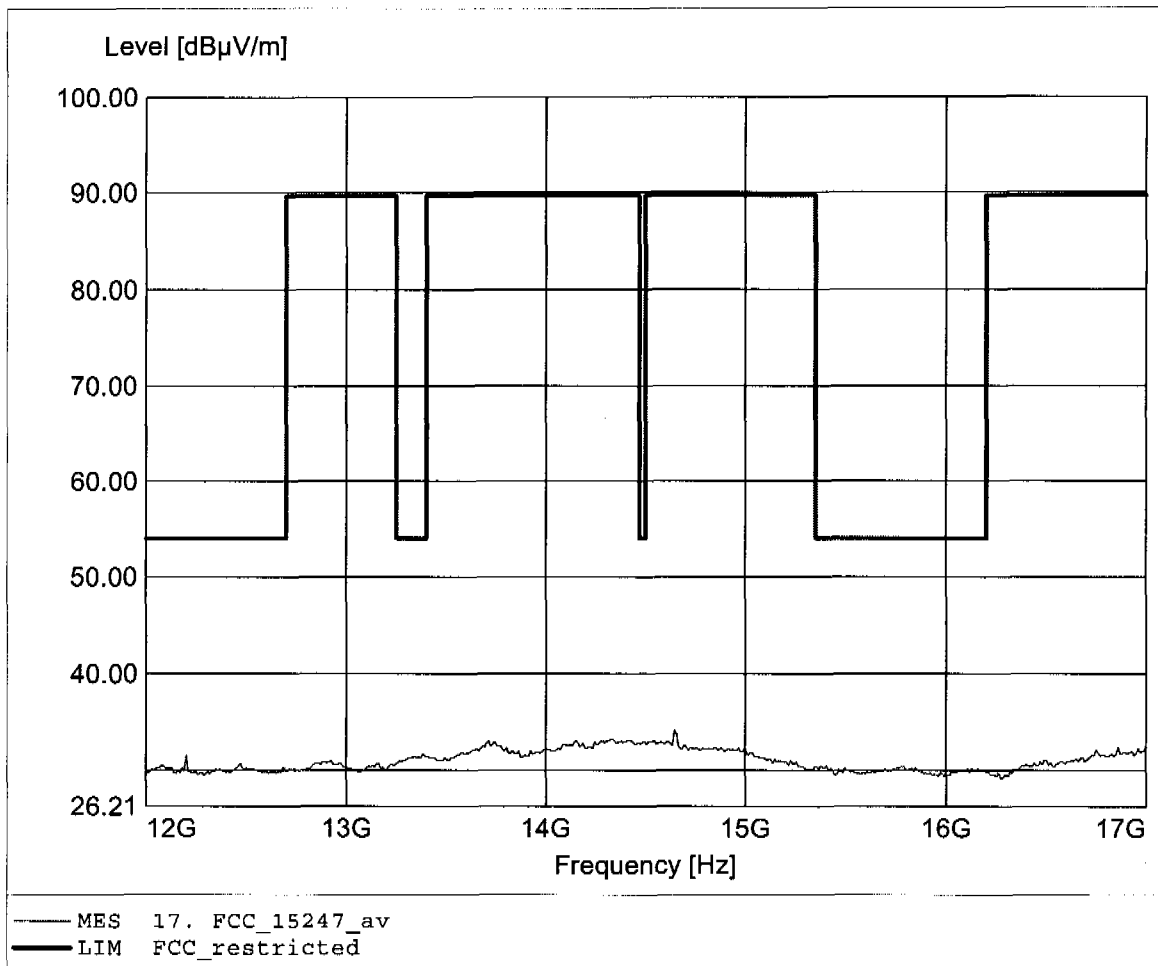

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: VTech Telecommunications Limited
EUT: 2.4 GHz Cordless VoIP Phone / Base / Antenna 1 / Ch.: 23
Model: USB7100 (HS+BS)
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 7.0 V DC (120 V AC/DC adaptor)
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 14.655GHz, Emax: 47.94dBµV/m, RBW: 1MHz

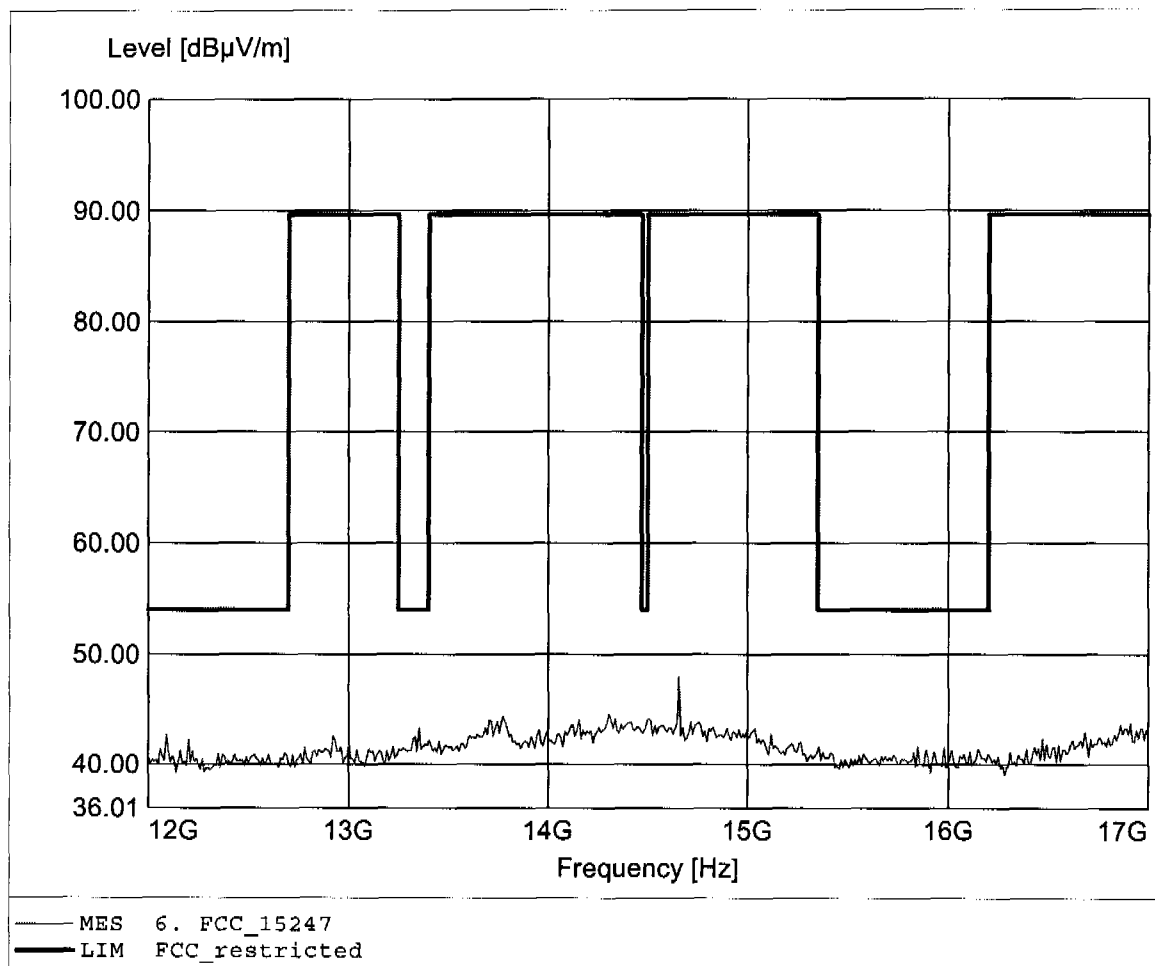

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: VTech Telecommunications Limited
EUT: 2.4 GHz Cordless VoIP Phone / Base / Antenna 1 / Ch.: 23
Model: USB7100 (HS+BS)
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 7.0 V DC (120 V AC/DC adaptor)
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq: 17.000GHz, Emax: 45.38dBµV/m, RBW: 1MHz

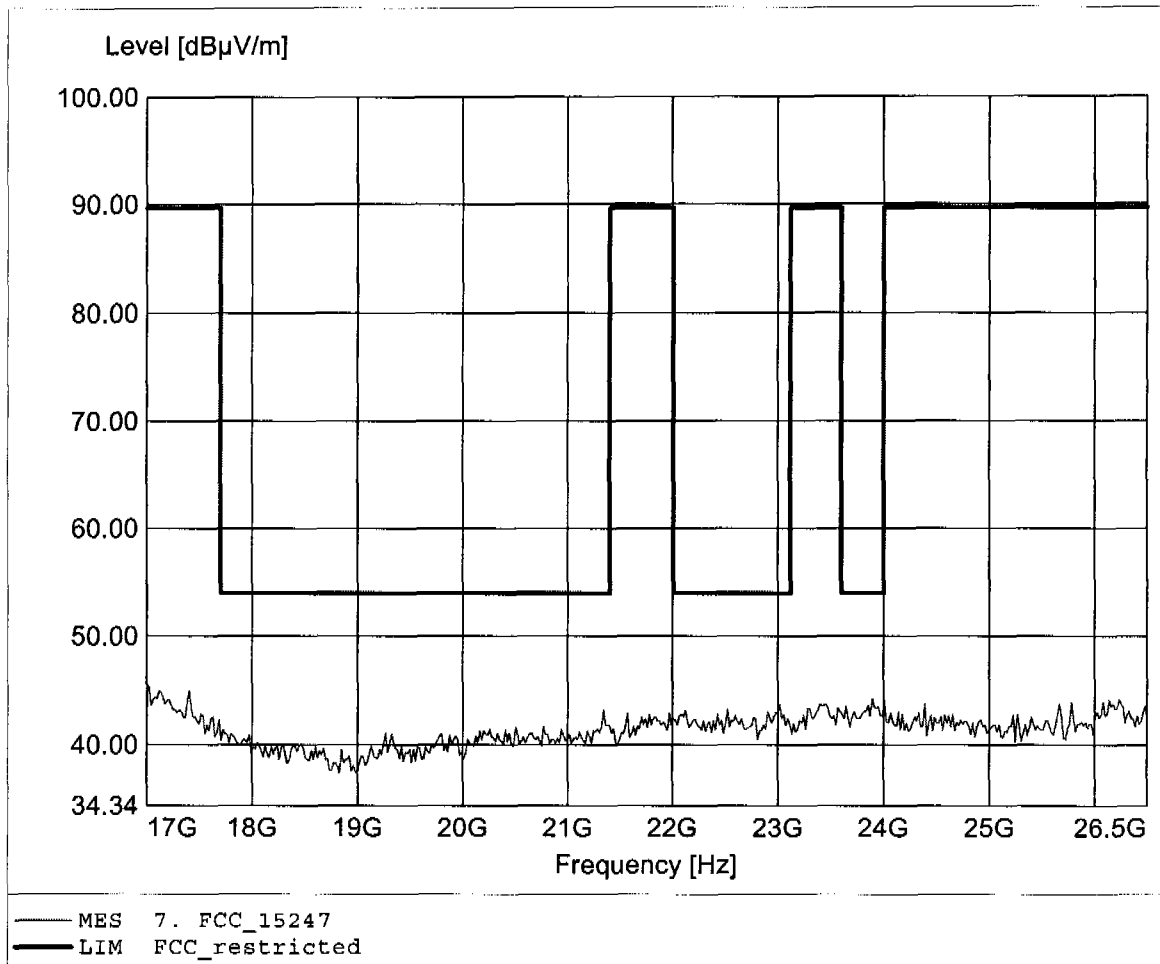

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: VTech Telecommunications Limited
EUT: 2.4 GHz Cordless VoIP Phone / Base / Antenna 1 / Ch.: 23
Model: USB7100 (HS+BS)
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 7.0 V DC (120 V AC/DC adaptor)
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq: 23.568GHz, Emax: 45.61dBµV/m, RBW: 1MHz

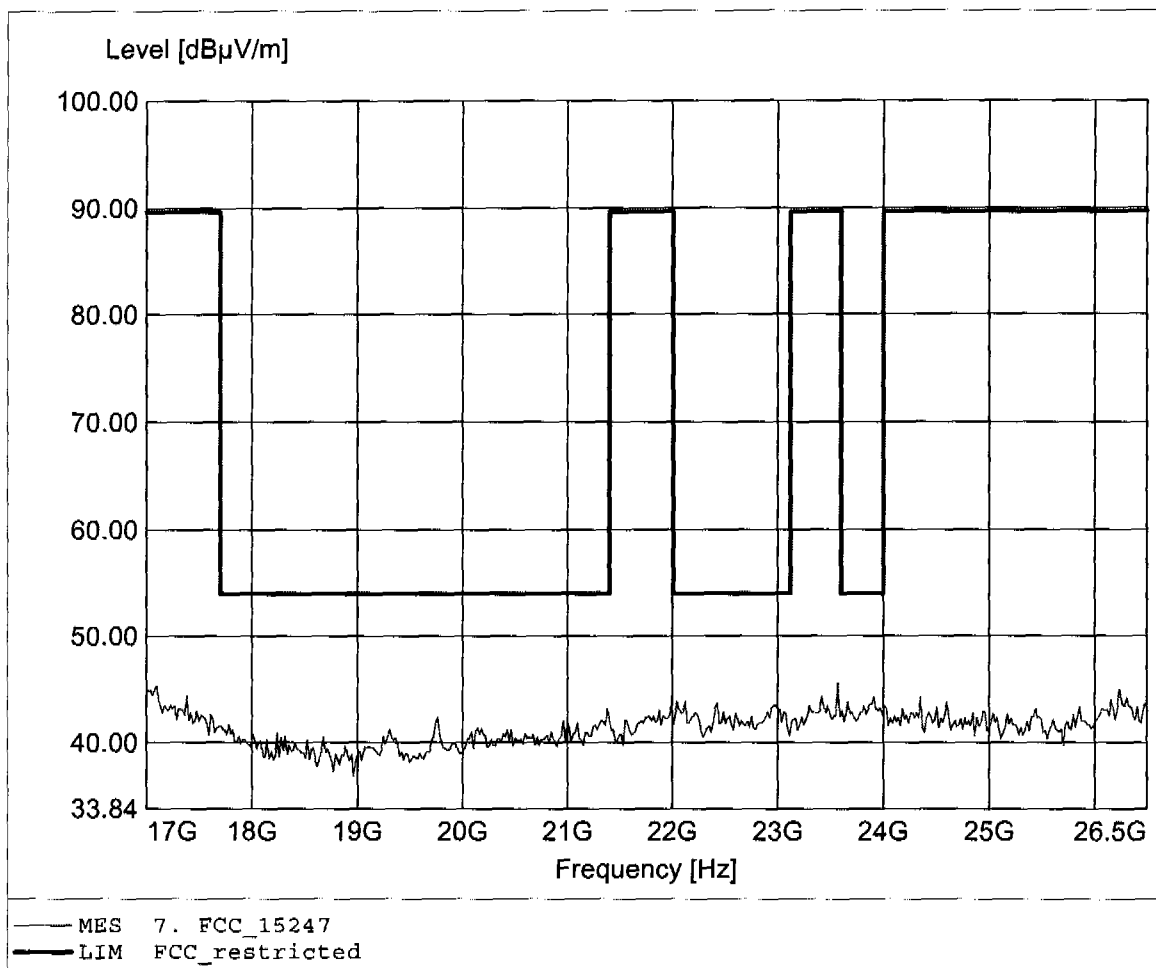

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: VTech Telecommunications Limited
EUT: 2.4 GHz Cordless VoIP Phone / Base / Antenna 1 / Ch.: 46
Model: USB7100 (HS+BS)
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 7.0 V DC (120 V AC/DC adaptor)
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq: 192.164MHz, Emax: 32.63dBµV/m, RBW: 100kHz

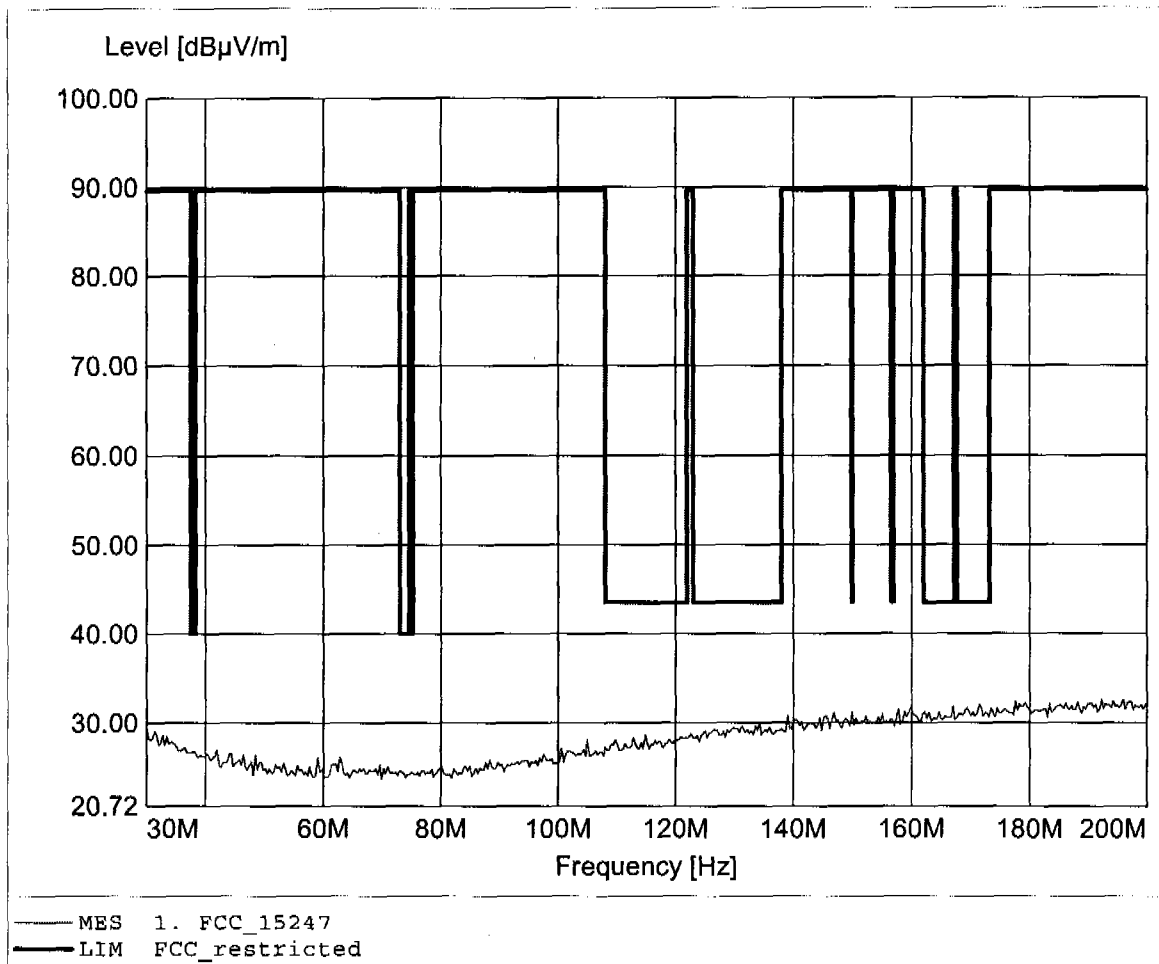

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: VTech Telecommunications Limited
EUT: 2.4 GHz Cordless VoIP Phone / Base / Antenna 1 / Ch.: 46
Model: USB7100 (HS+BS)
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 7.0 V DC (120 V AC/DC adaptor)
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq: 192.846MHz, Emax: 33.00dBμV/m, RBW: 100kHz

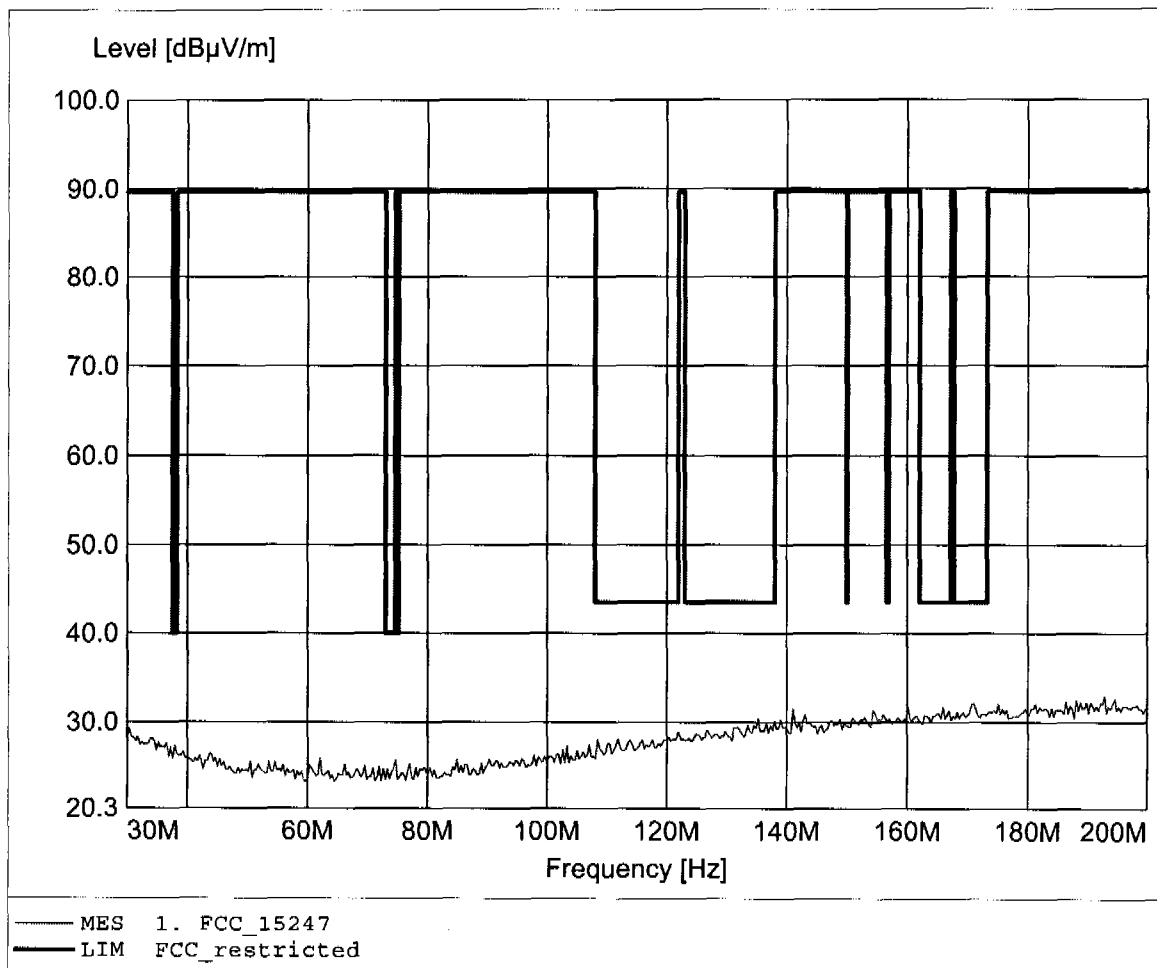

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: VTech Telecommunications Limited
EUT: 2.4 GHz Cordless VoIP Phone / Base / Antenna 1 / Ch.: 46
Model: USB7100 (HS+BS)
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 7.0 V DC (120 V AC/DC adaptor)
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HL 223, amplif.
Comment 2: Freq: 971.142MHz, Emax: 23.13dBµV/m, RBW: 100kHz

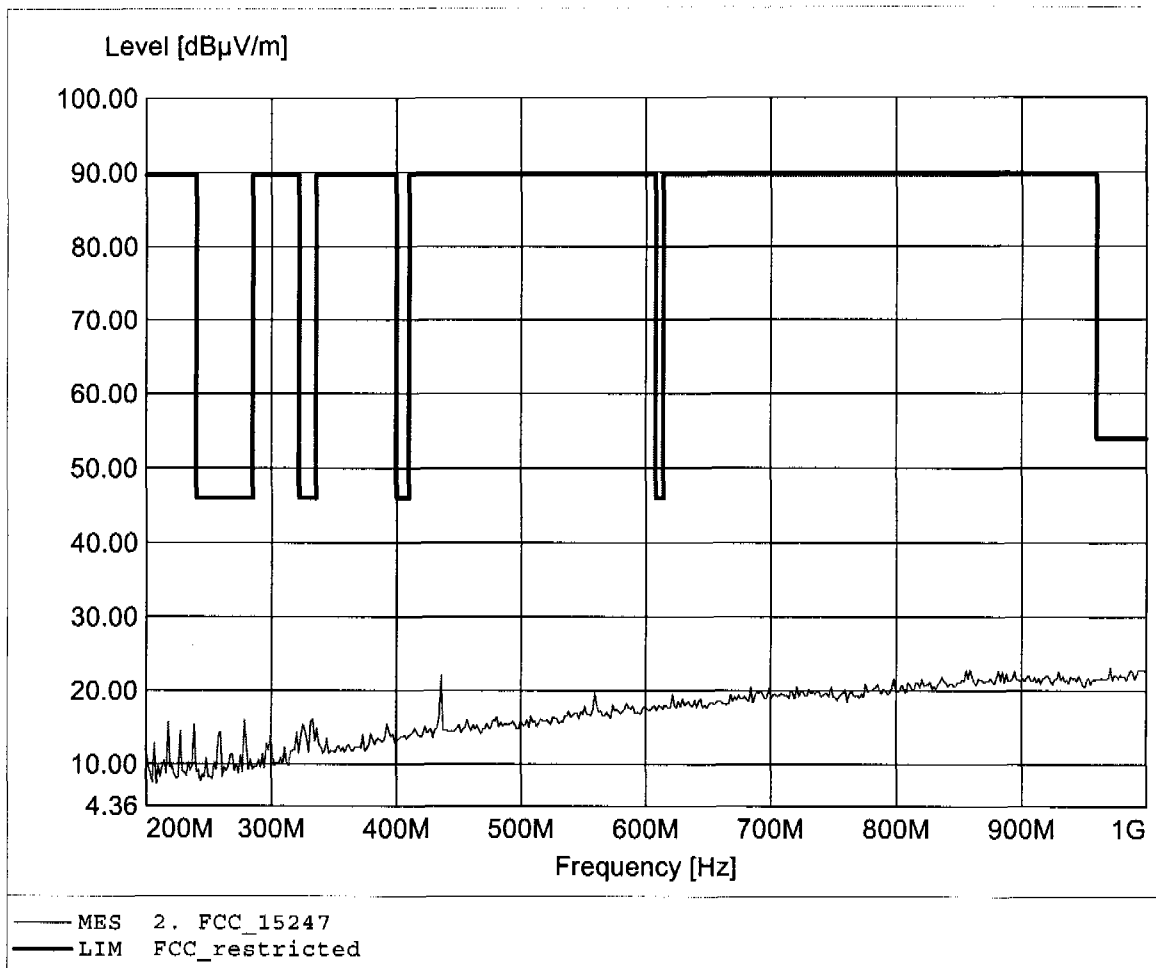

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: VTech Telecommunications Limited
EUT: 2.4 GHz Cordless VoIP Phone / Base / Antenna 1 / Ch.: 46
Model: USB7100 (HS+BS)
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 7.0 V DC (120 V AC/DC adaptor)
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HL 223, amplif.
Comment 2: Freq: 435.671MHz, Emax: 29.01dBµV/m, RBW: 100kHz

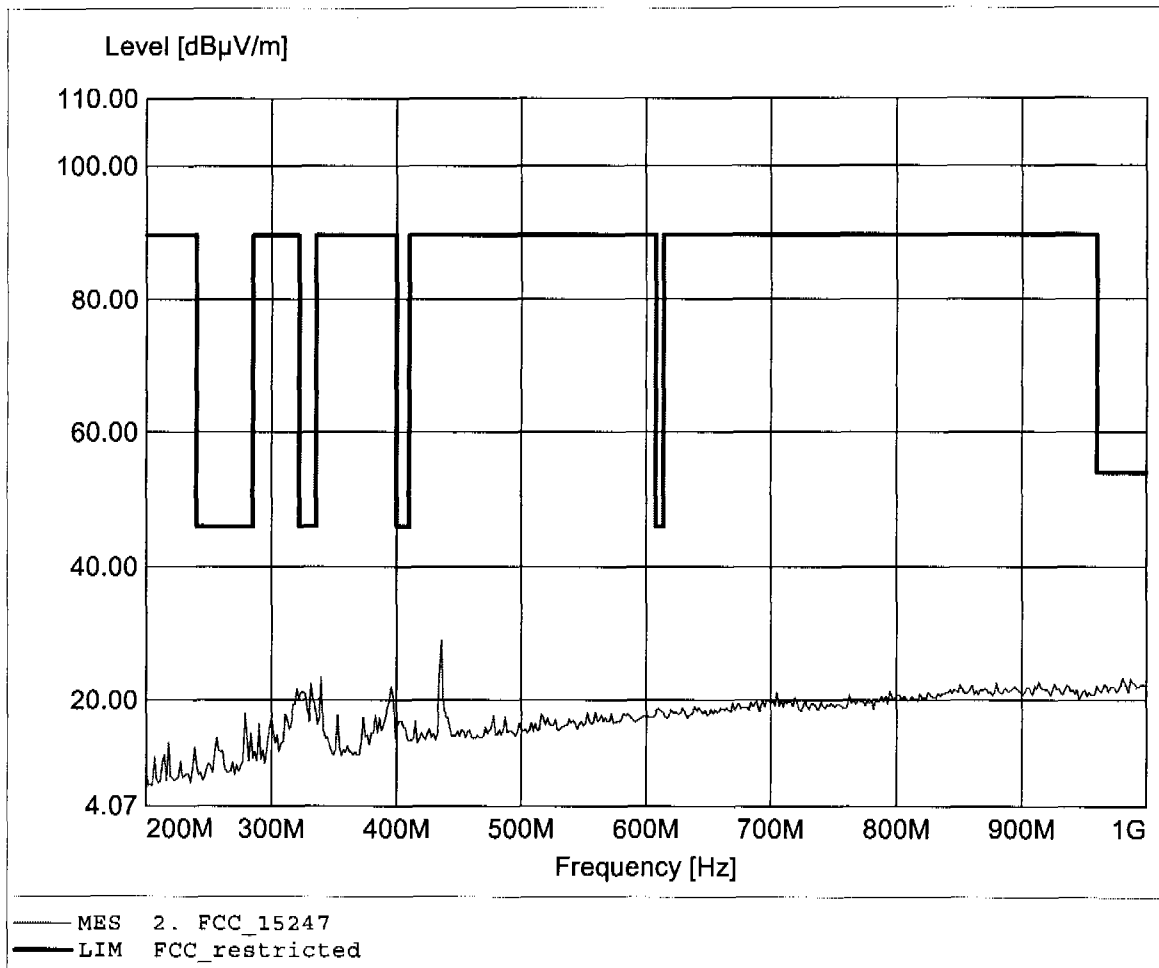

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: VTech Telecommunications Limited
EUT: 2.4 GHz Cordless VoIP Phone / Base / Antenna 1 / Ch.: 46
Model: USB7100 (HS+BS)
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 7.0 V DC (120 V AC/DC adaptor)
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, amplif.
Comment 2: Freq: 2.484GHz, Emax: 82.62dBuV/m, RBW: 1MHz

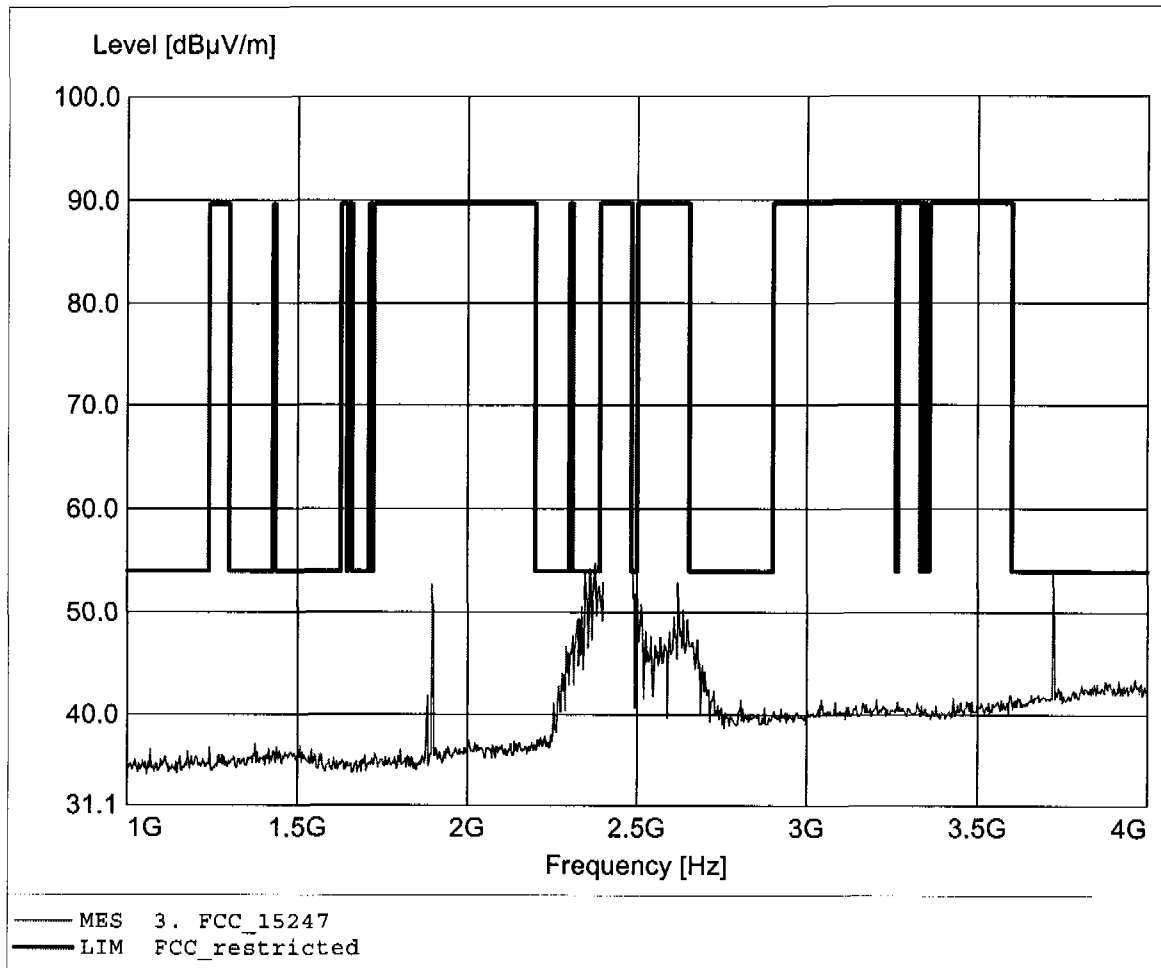

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: VTech Telecommunications Limited
EUT: 2.4 GHz Cordless VoIP Phone / Base / Antenna 1 / Ch.: 46
Model: USB7100 (HS+BS)
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 7.0 V DC (120 V AC/DC adaptor)
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, amplif.
Comment 2: Freq: 2.484GHz, Emax: 82.62dBµV/m, RBW: 1MHz

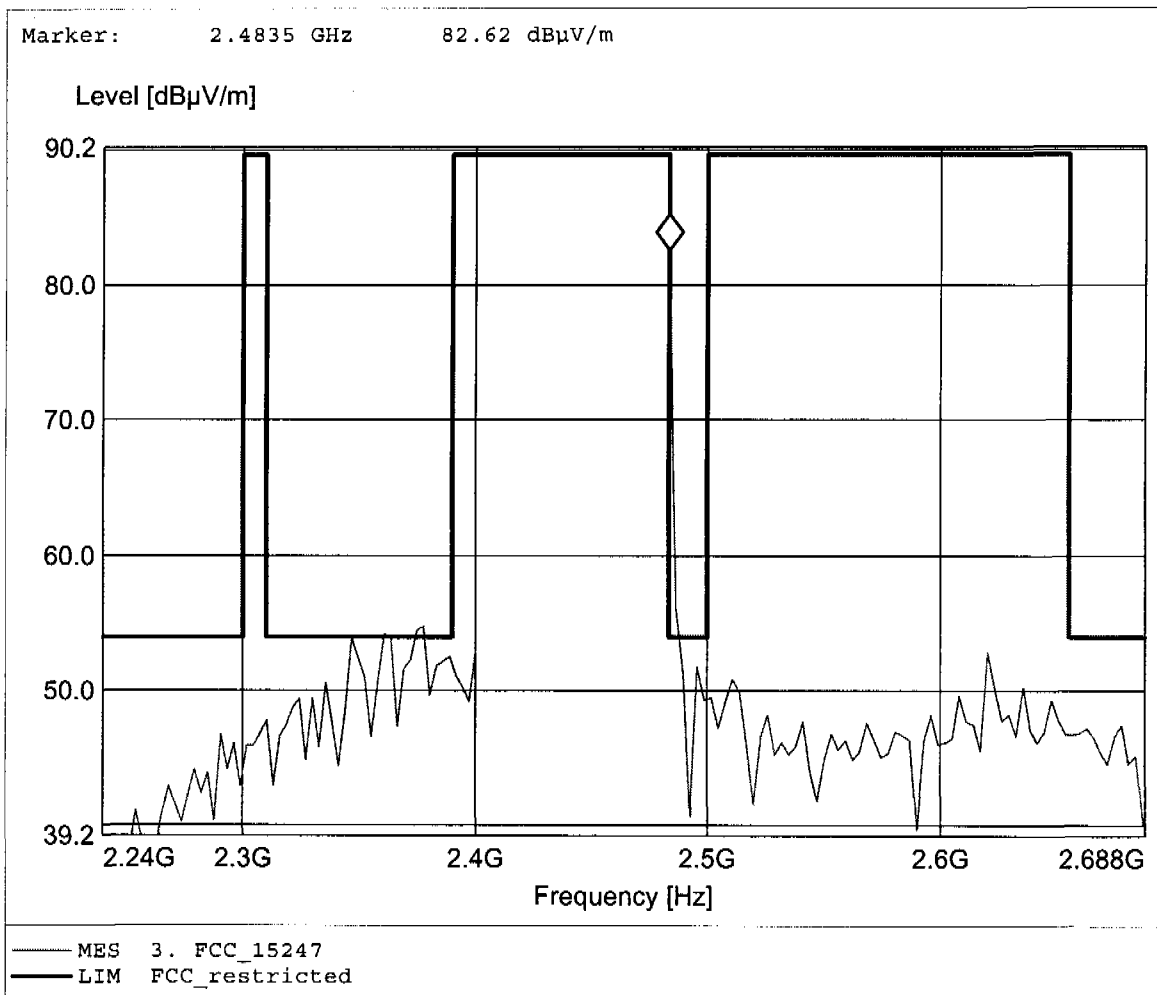

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: VTech Telecommunications Limited
EUT: 2.4 GHz Cordless VoIP Phone / Base / Antenna 1 / Ch.: 46
Model: USB7100 (HS+BS)
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 7.0 V DC (120 V AC/DC adaptor)
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, amplif.
Comment 2: Freq: 2.484GHz, Emax: 82.62dBµV/m, RBW: 1MHz

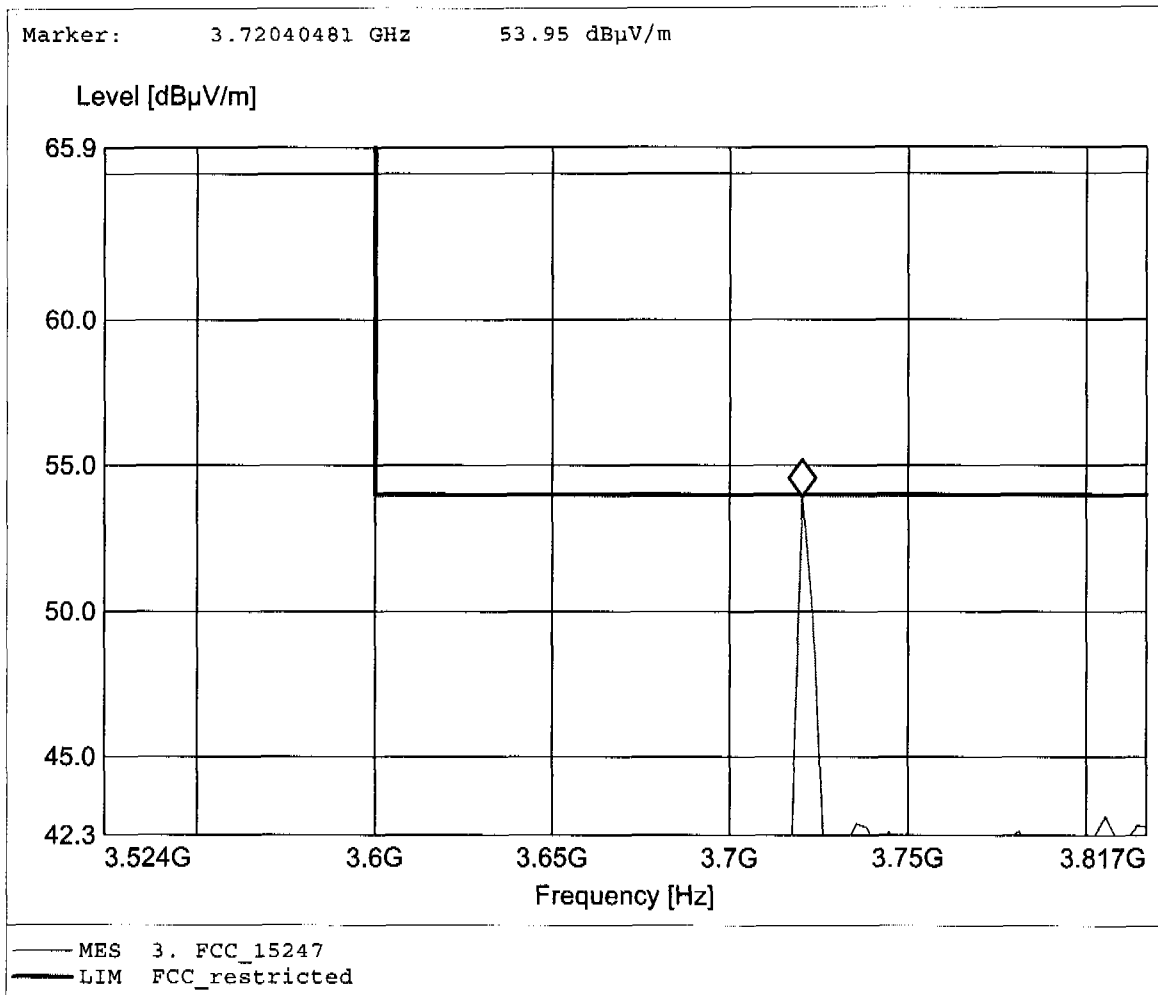

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: VTech Telecommunications Limited
EUT: 2.4 GHz Cordless VoIP Phone / Base / Antenna 1 / Ch.: 46
Model: USB7100 (HS+BS)
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 7.0 V DC (120 V AC/DC adaptor)
Test Specification: according to §15.247, average detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, amplif.
Comment 2: Freq: 2.484GHz, Emax: 74.18dBµV/m, RBW: 1MHz

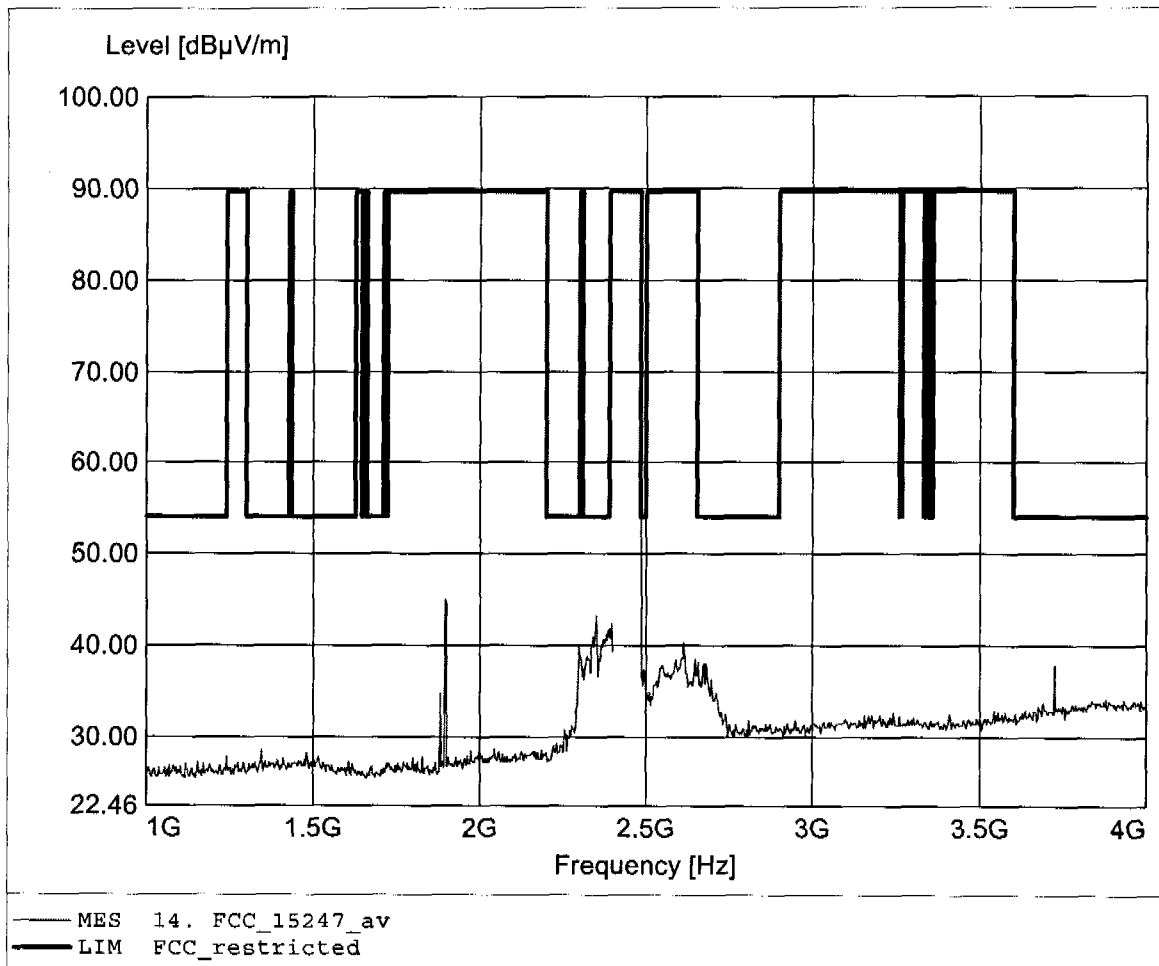

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: VTech Telecommunications Limited
EUT: 2.4 GHz Cordless VoIP Phone / Base / Antenna 1 / Ch.: 46
Model: USB7100 (HS+BS)
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 7.0 V DC (120 V AC/DC adaptor)
Test Specification: according to §15.247, average detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, amplif.
Comment 2: Freq: 2.484GHz, Emax: 74.18dBµV/m, RBW: 1MHz

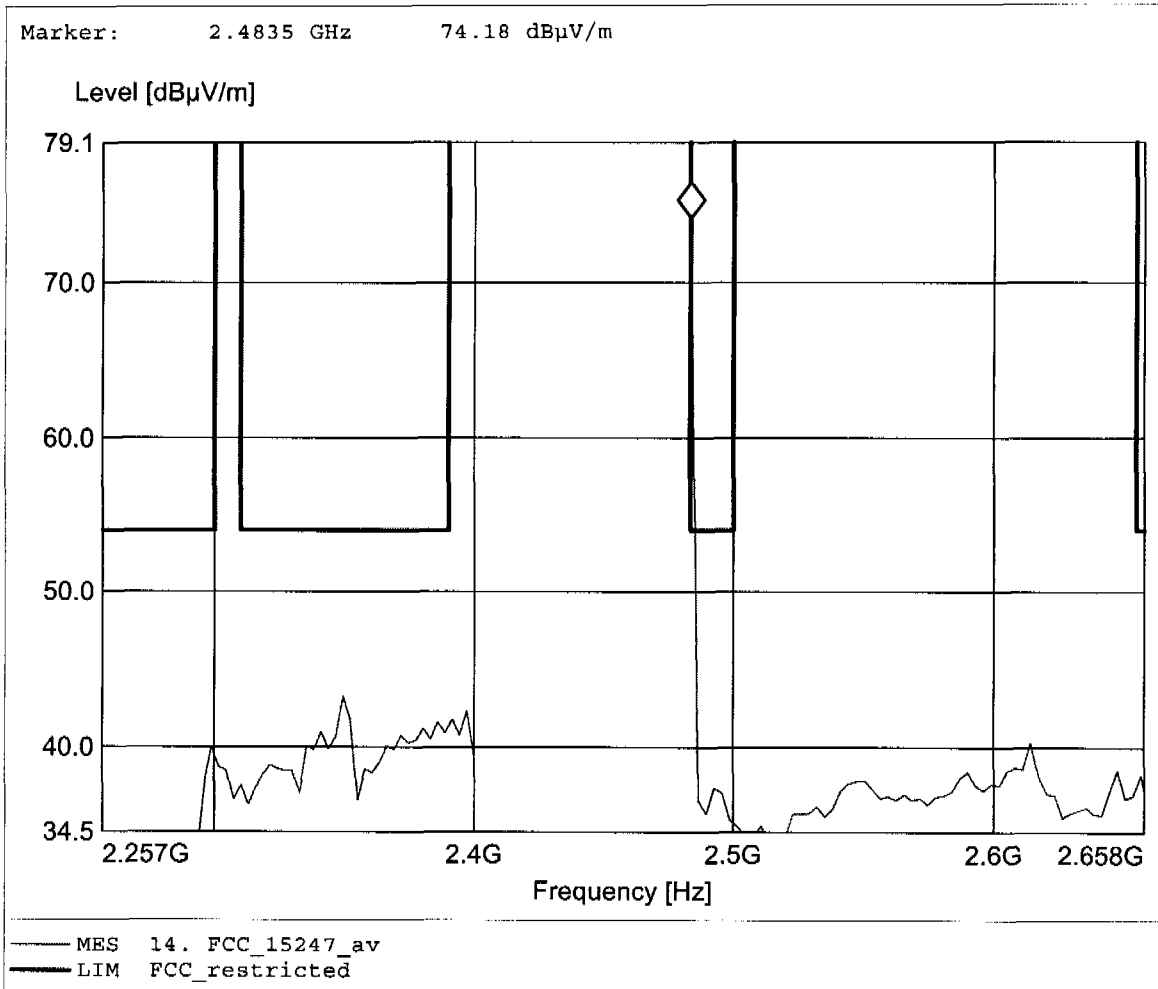

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: VTech Telecommunications Limited
EUT: 2.4 GHz Cordless VoIP Phone / Base / Antenna 1 / Ch.: 46
Model: USB7100 (HS+BS)
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 7.0 V DC (120 V AC/DC adaptor)
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, amplif.
Comment 2: Freq: 2.484GHz, Emax: 84.43dBµV/m, RBW: 1MHz

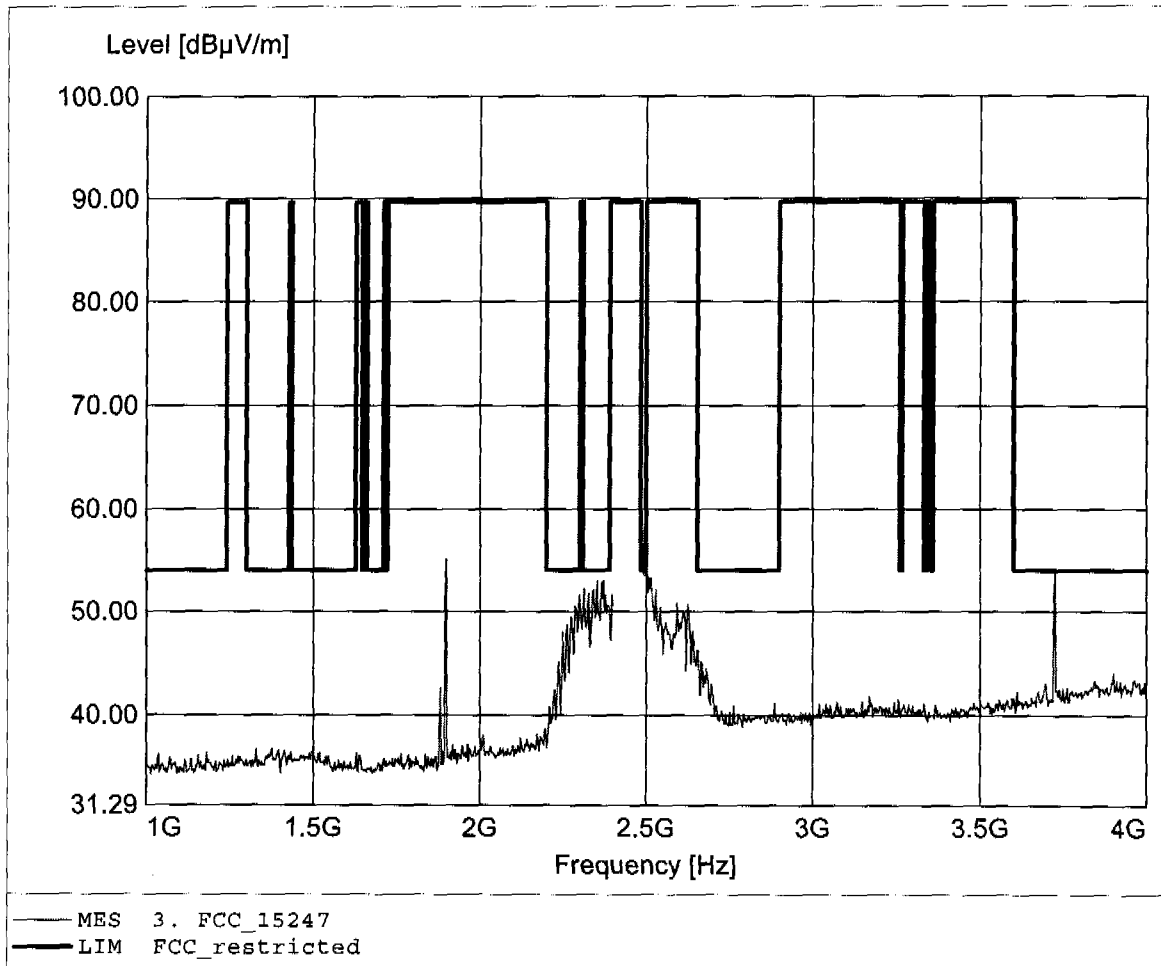

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: VTech Telecommunications Limited
EUT: 2.4 GHz Cordless VoIP Phone / Base / Antenna 1 / Ch.: 46
Model: USB7100 (HS+BS)
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 7.0 V DC (120 V AC/DC adaptor)
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, amplif.
Comment 2: Freq: 2.484GHz, Emax: 84.43dBµV/m, RBW: 1MHz

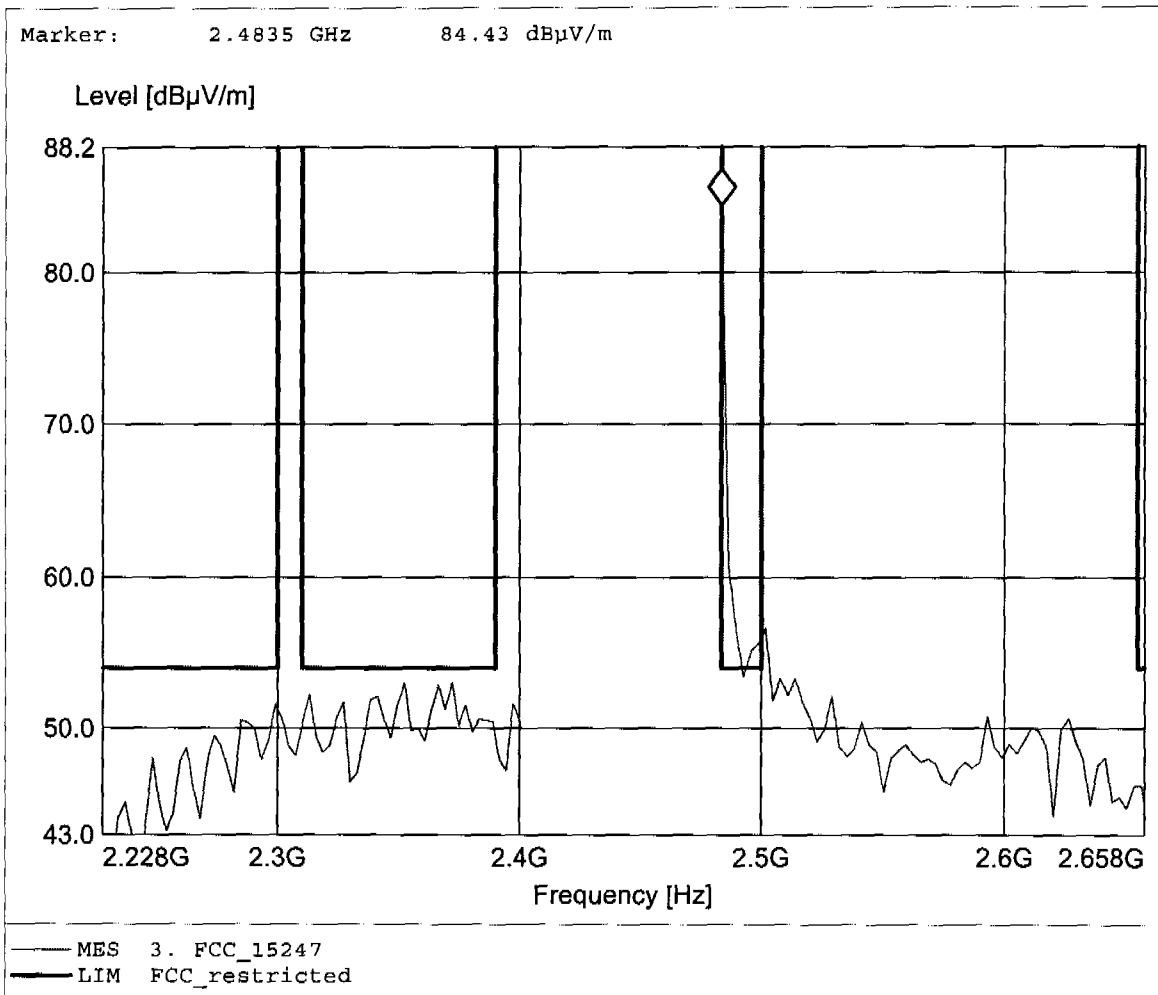

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: VTech Telecommunications Limited
EUT: 2.4 GHz Cordless VoIP Phone / Base / Antenna 1 / Ch.: 46
Model: USB7100 (HS+BS)
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 7.0 V DC (120 V AC/DC adaptor)
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, amplif.
Comment 2: Freq: 2.484GHz, Emax: 84.43dBµV/m, RBW: 1MHz

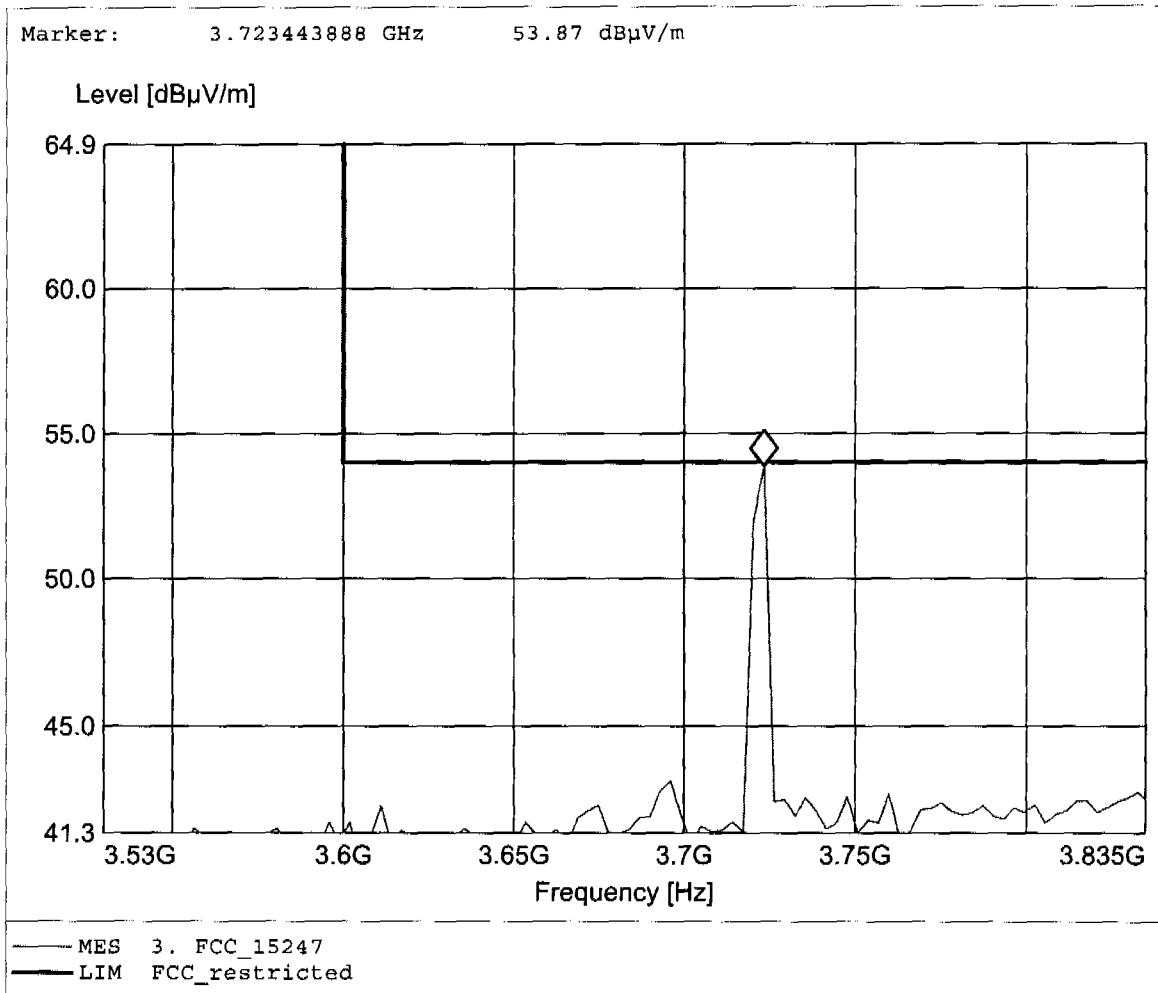

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: VTech Telecommunications Limited
EUT: 2.4 GHz Cordless VoIP Phone / Base / Antenna 1 / Ch.: 46
Model: USB7100 (HS+BS)
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 7.0 V DC (120 V AC/DC adaptor)
Test Specification: according to §15.247, average detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, amplif.
Comment 2: Freq: 2.484GHz, Emax: 76.99dB μ V/m, RBW: 1MHz

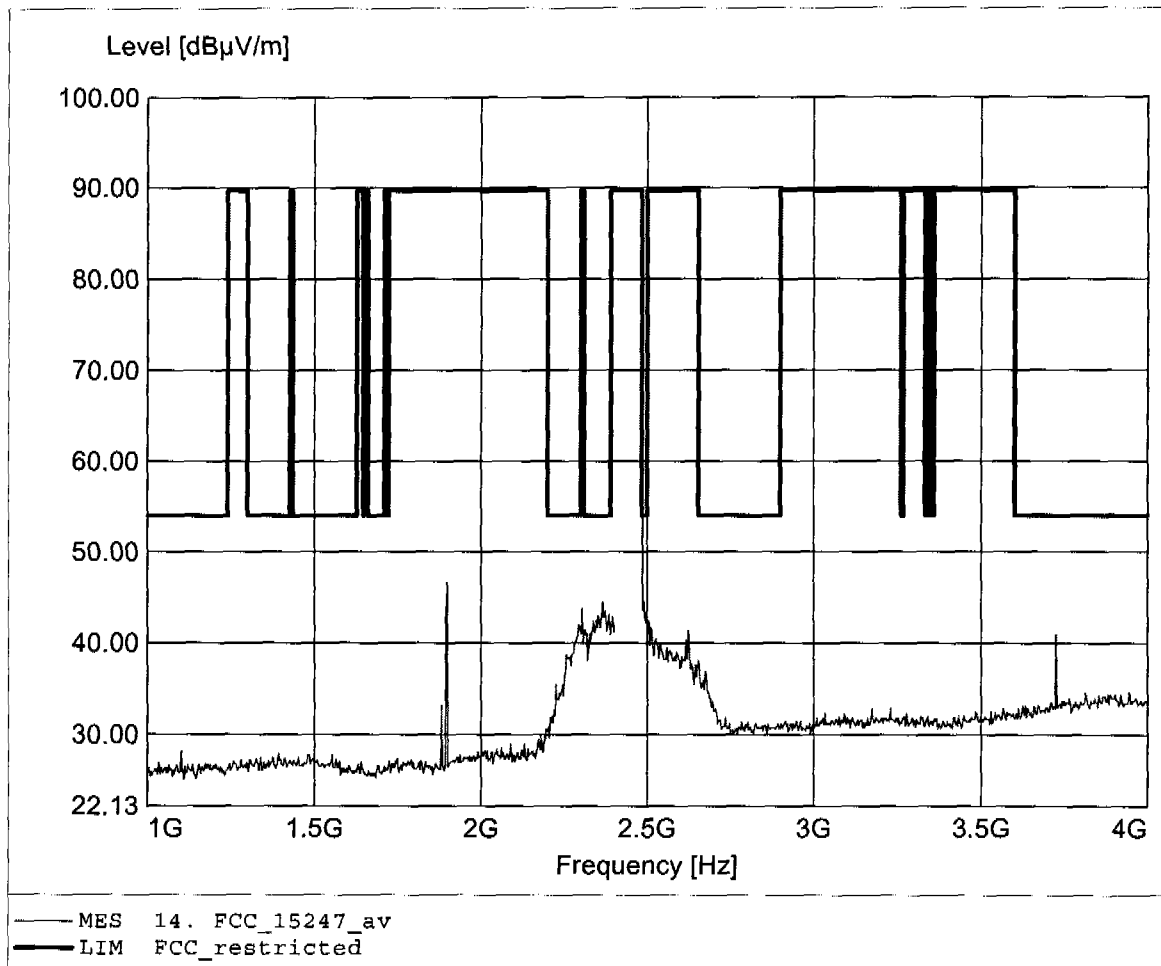

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: VTech Telecommunications Limited
EUT: 2.4 GHz Cordless VoIP Phone / Base / Antenna 1 / Ch.: 46
Model: USB7100 (HS+BS)
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 7.0 V DC (120 V AC/DC adaptor)
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 4.962GHz, Emax: 50.38dBµV/m, RBW: 1MHz

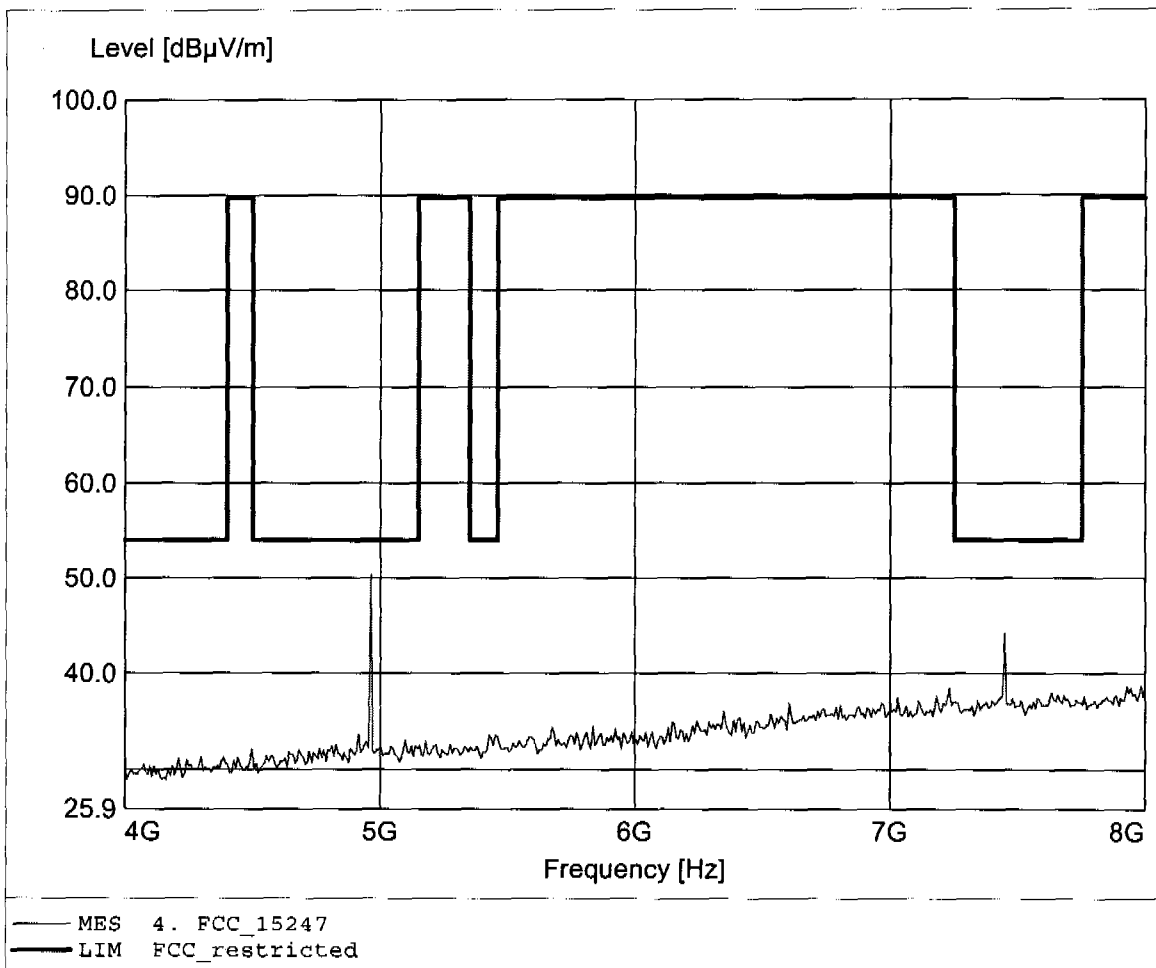

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: VTech Telecommunications Limited
EUT: 2.4 GHz Cordless VoIP Phone / Base / Antenna 1 / Ch.: 46
Model: USB7100 (HS+BS)
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 7.0 V DC (120 V AC/DC adaptor)
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 4.962GHz, Emax: 49.86dBµV/m, RBW: 1MHz

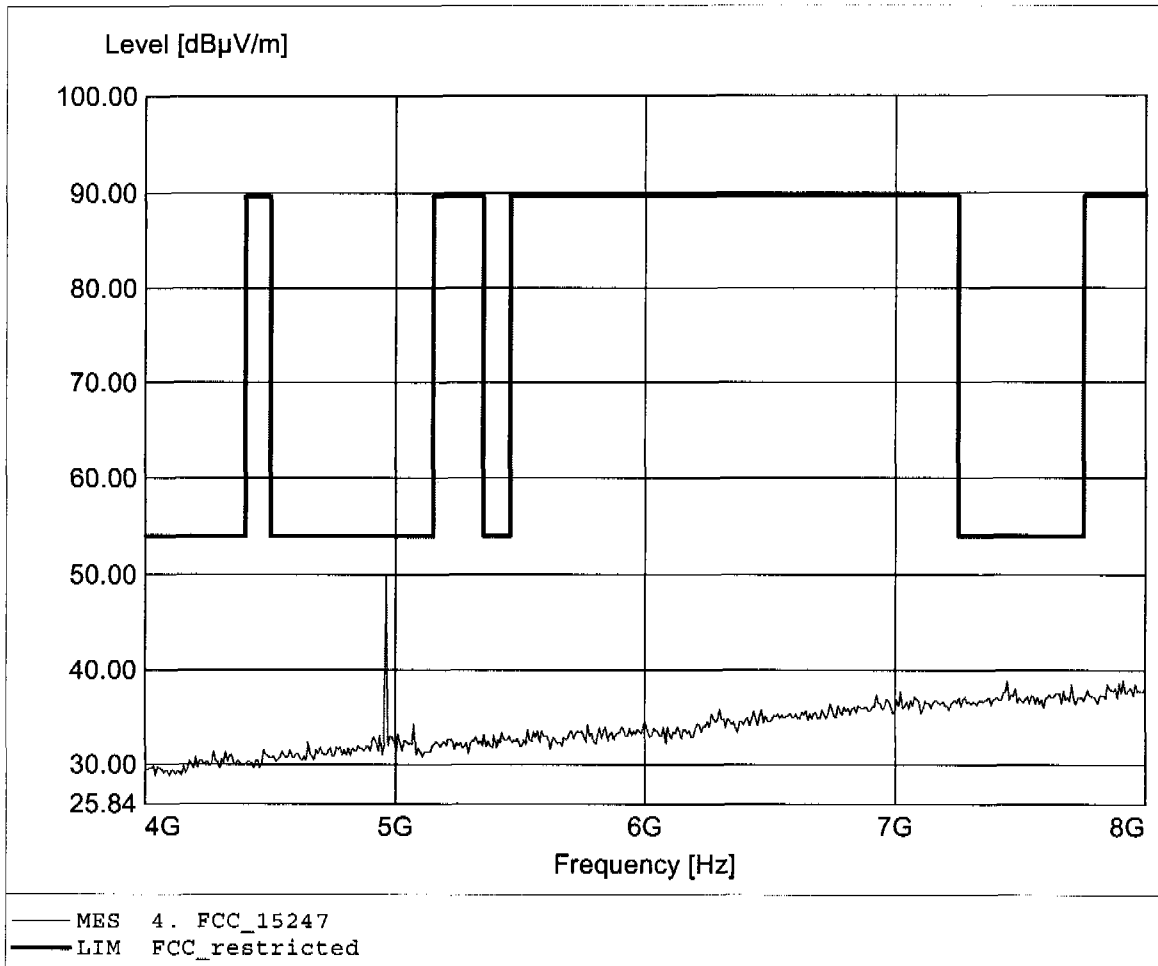

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: VTech Telecommunications Limited
EUT: 2.4 GHz Cordless VoIP Phone / Base / Antenna 1 / Ch.: 46
Model: USB7100 (HS+BS)
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 7.0 V DC (120 V AC/DC adaptor)
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 11.575GHz, Emax: 42.69dBµV/m, RBW: 1MHz

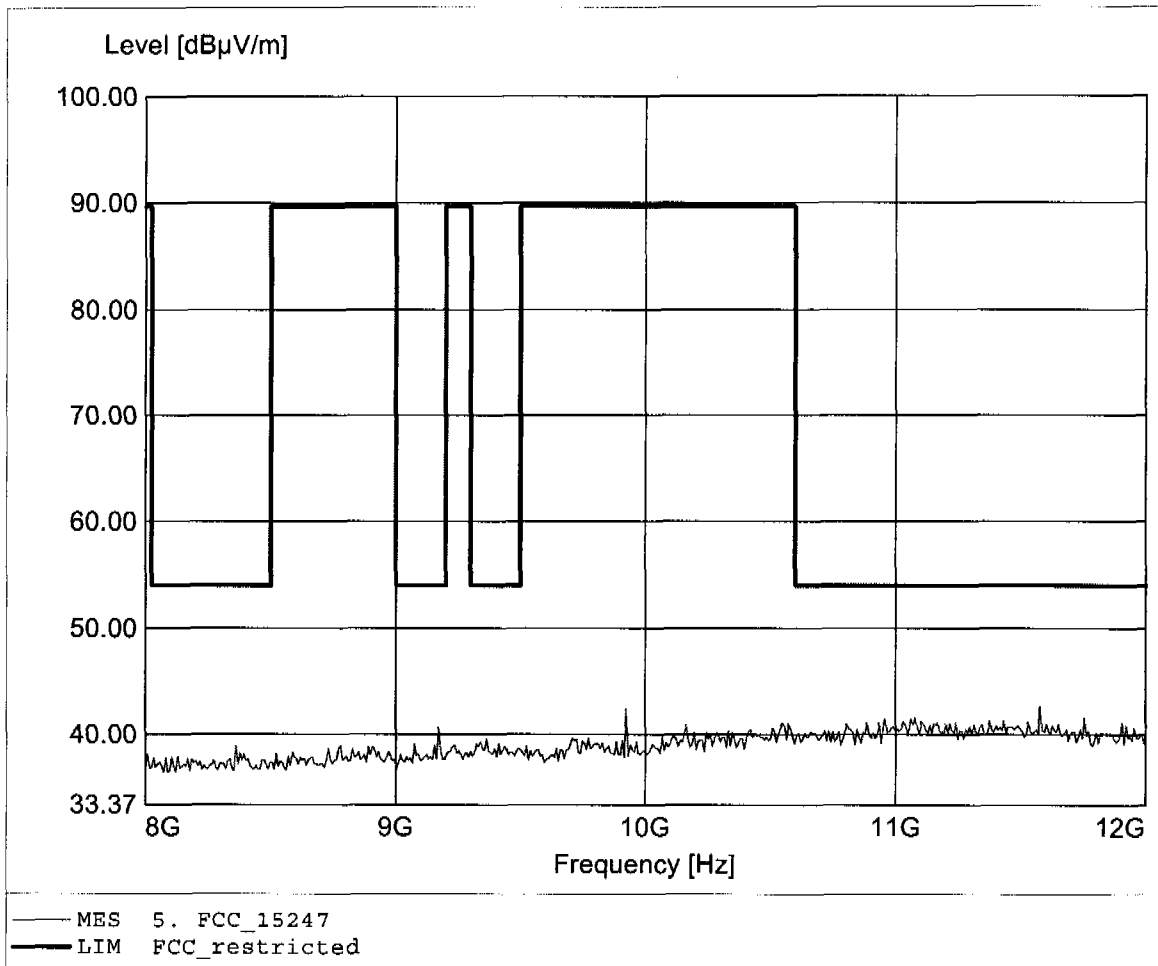

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: VTech Telecommunications Limited
EUT: 2.4 GHz Cordless VoIP Phone / Base / Antenna 1 / Ch.: 46
Model: USB7100 (HS+BS)
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 7.0 V DC (120 V AC/DC adaptor)
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 9.924GHz, Emax: 52.60dBuV/m, RBW: 1MHz

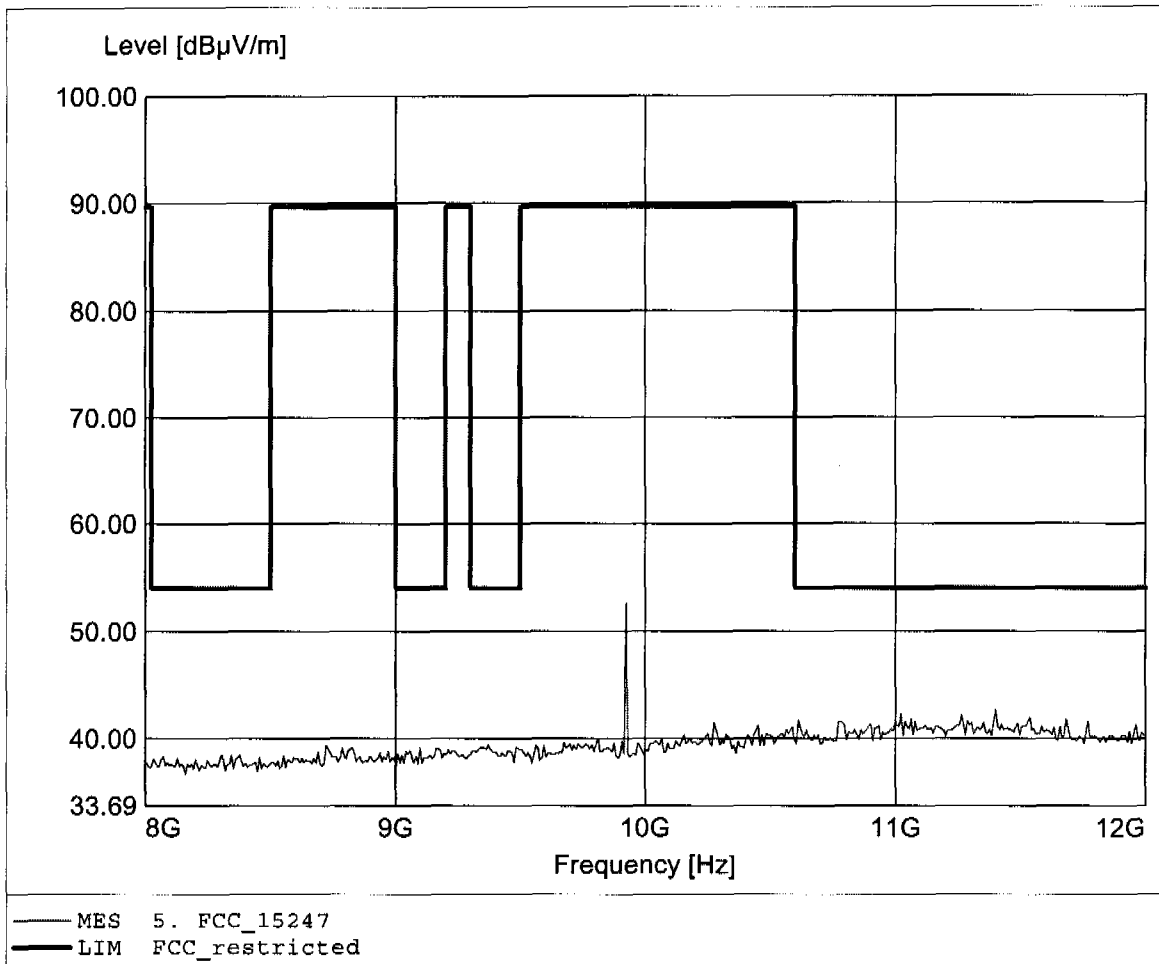

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: VTech Telecommunications Limited
EUT: 2.4 GHz Cordless VoIP Phone / Base / Antenna 1 / Ch.: 46
Model: USB7100 (HS+BS)
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 7.0 V DC (120 V AC/DC adaptor)
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 14.886GHz, Emax: 52.62dBµV/m, RBW: 1MHz

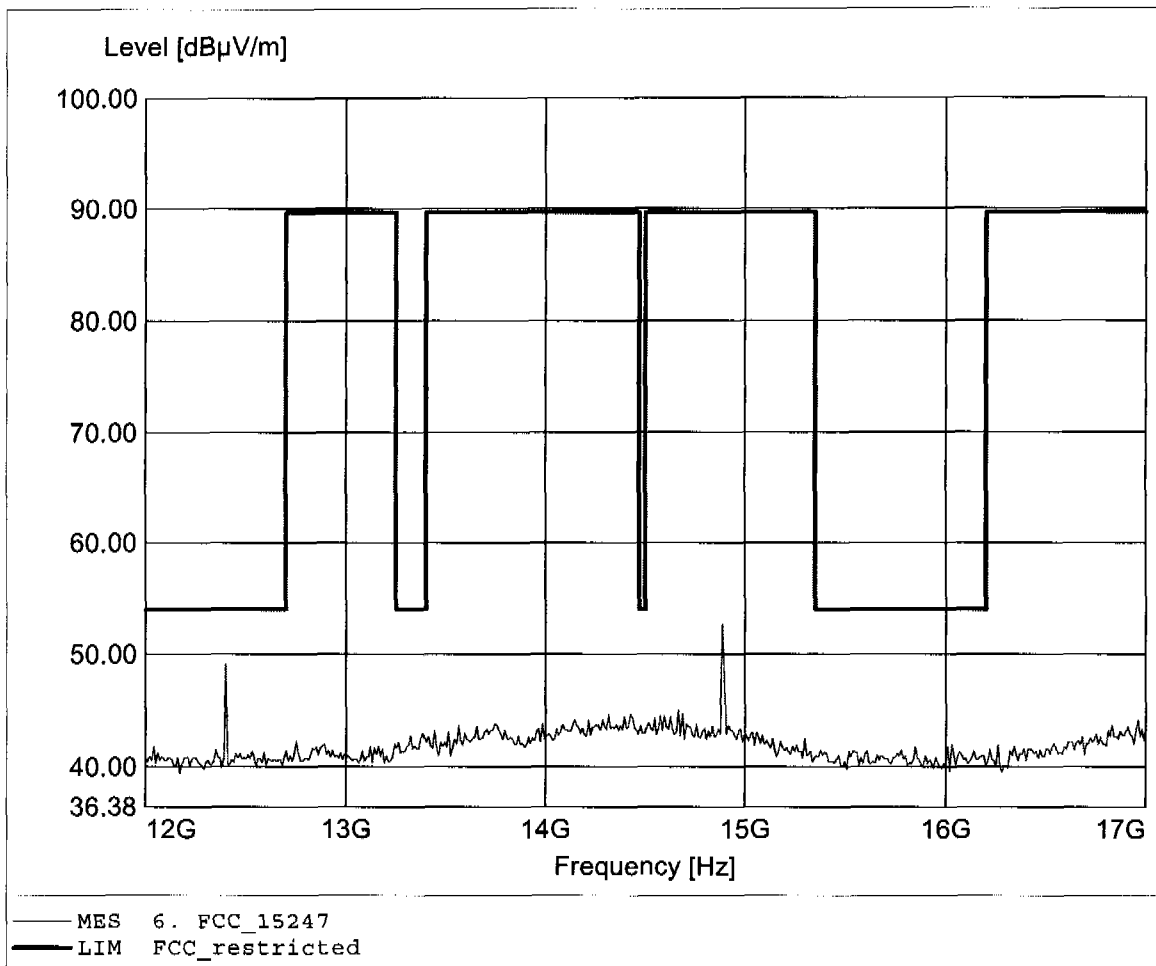

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: VTech Telecommunications Limited
EUT: 2.4 GHz Cordless VoIP Phone / Base / Antenna 1 / Ch.: 46
Model: USB7100 (HS+BS)
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 7.0 V DC (120 V AC/DC adaptor)
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 14.886GHz, Emax: 48.06dBµV/m, RBW: 1MHz

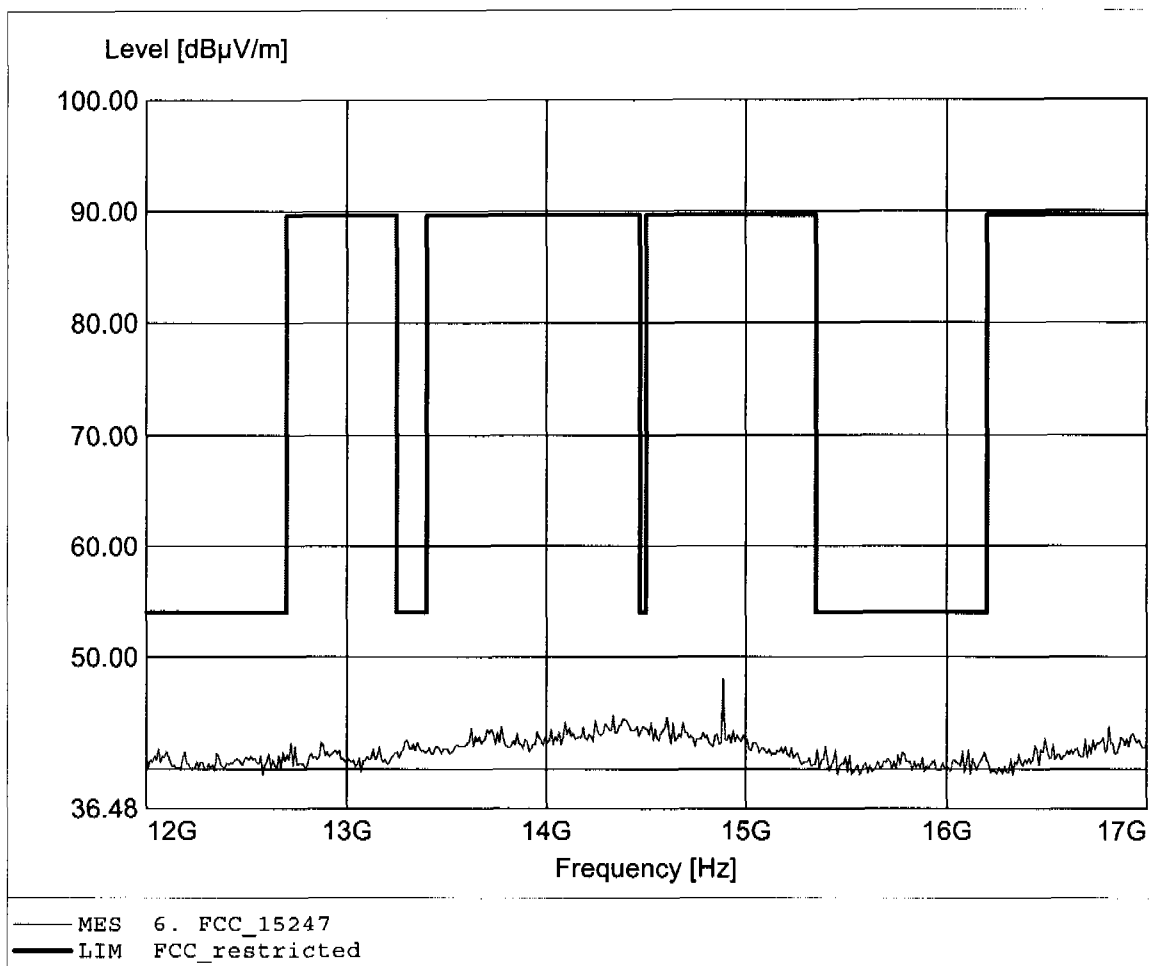

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C

Approval Holder: VTech Telecommunications Limited
EUT: 2.4 GHz Cordless VoIP Phone / Base / Antenna 1 / Ch.: 46
Model: USB7100 (HS+BS)
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 7.0 V DC (120 V AC/DC adaptor)
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq: 17.038GHz, Emax: 45.16dBµV/m, RBW: 1MHz

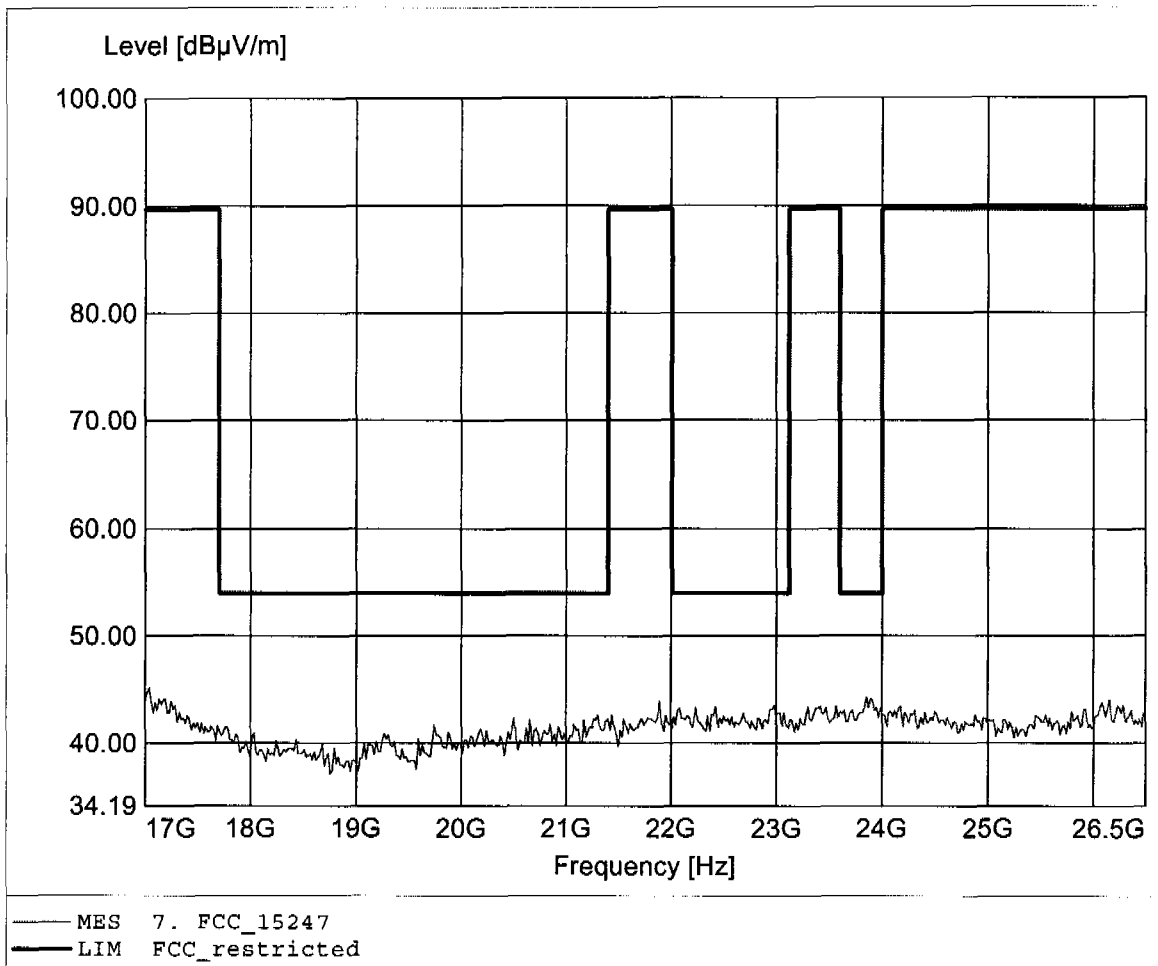

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C

Approval Holder: VTech Telecommunications Limited
EUT: 2.4 GHz Cordless VoIP Phone / Base / Antenna 1 / Ch.: 46
Model: USB7100 (HS+BS)
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 7.0 V DC (120 V AC/DC adaptor)
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq: 17.114GHz, Emax: 45.42dBµV/m, RBW: 1MHz

