




Report No.: HK08080526-1  
Talk with Charging Mode  
AC Mains "L"

Scan Settings (1 Range)

Frequencies			Receiver Settings					
Start	Stop	Step	IF BW	Detector	M-Time	Atten	Preamp	OpRge
150k	30M	5k	10k	PK+AV	10ms	AUTO	LN OFF	60dB

Final Measurement: x QP / + AV  
Meas Time: 1 s  
Subranges: 16  
Acc Margin: 20dB

Transducer No.	Start	Stop	Name
2	1 9k	30M	EW0700
3	9k	30M	EW2454
12	9k	30M	EW0090

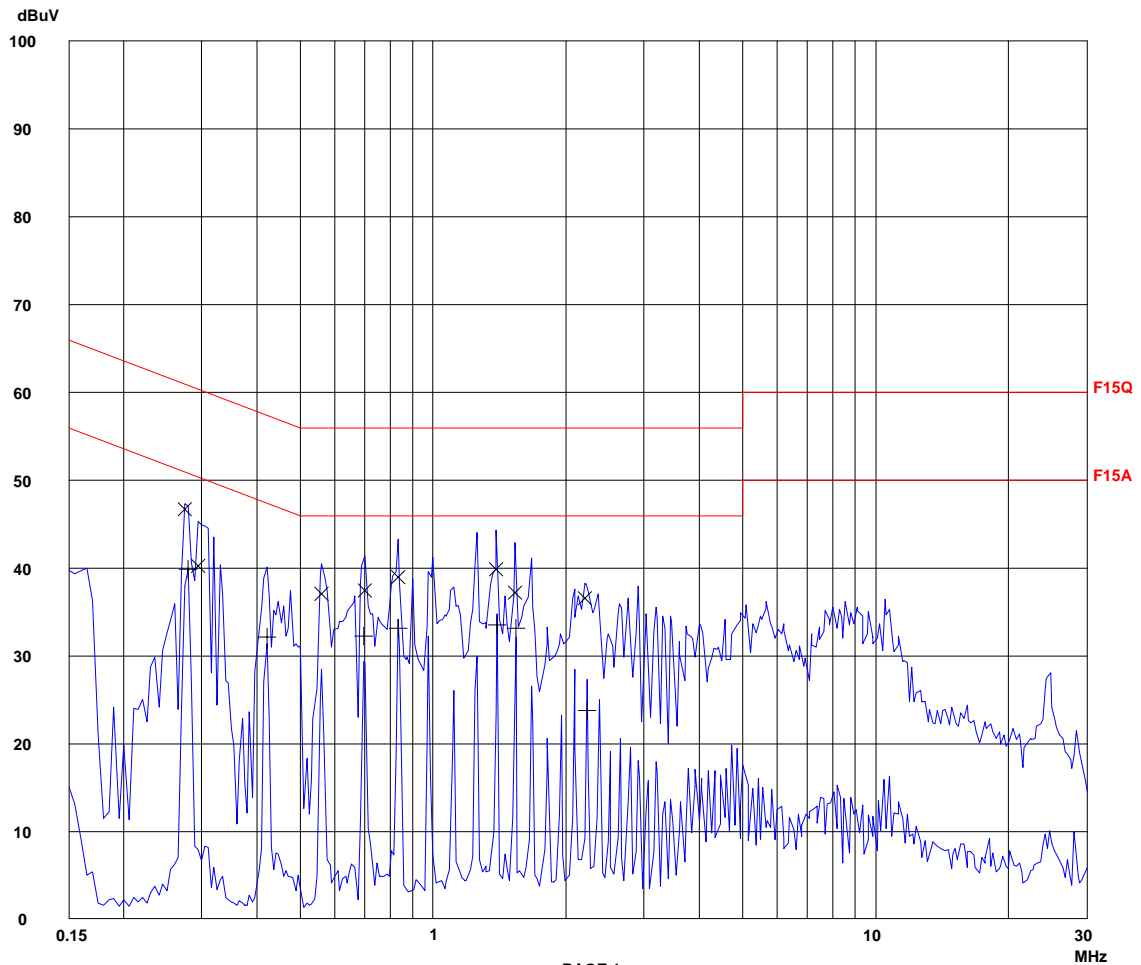



Report No.: HK08080526-1  
Talk with Charging Mode  
AC Mains "L"

Scan Settings (1 Range)

|----- Frequencies -----||----- Receiver Settings -----|  
Start Stop Step IF BW Detector M-Time Atten Preamp OpRge  
150k 30M 5k 10k PK+AV 10ms AUTO LN OFF 60dB

Final Measurement Results:

Frequency	QP Level	QP Limit	Delta
MHz	dBuV	dBuV	dB
0.27500	46.6	61.0	-14.4
0.29500	40.2	60.3	-20.1
0.56000	37.0	56.0	-19.0
0.70000	37.4	56.0	-18.6
0.83500	39.0	56.0	-17.0
1.39000	39.8	56.0	-16.2
1.53000	37.1	56.0	-18.9
2.20000	36.6	56.0	-19.4

Frequency	AV Level	AV Limit	Delta
MHz	dBuV	dBuV	dB
0.28000	39.8	50.8	-11.0
0.42000	32.0	47.5	-15.5
0.69500	32.2	46.0	-13.8
0.83500	33.1	46.0	-12.9
1.39500	33.5	46.0	-12.5
1.53500	33.1	46.0	-12.9
2.23000	23.7	46.0	-22.3

\* limit exceeded