



Report no.: HK10061452-1
Adaptor: Sunstrong
Ringing & Charging Mode
AC Mains "L"

Report No.:HK10061452-1

Scan Settings (1 Range)


Frequencies			Receiver Settings					
Start	Stop	Step	IF BW	Detector	M-Time	Atten	Preamp	OpRge
150k	30M	4.5k	10k	PK+AV	10ms	AUTO	LN OFF	60dB

Final Measurement: x QP / + AV

Meas Time: 1 s
Subranges: 16
Acc Margin: 20dB

Transducer No. Start Stop Name

1	1	9k	30M	2454
2	9k	30M	0700	
3	9k	30M	0090	

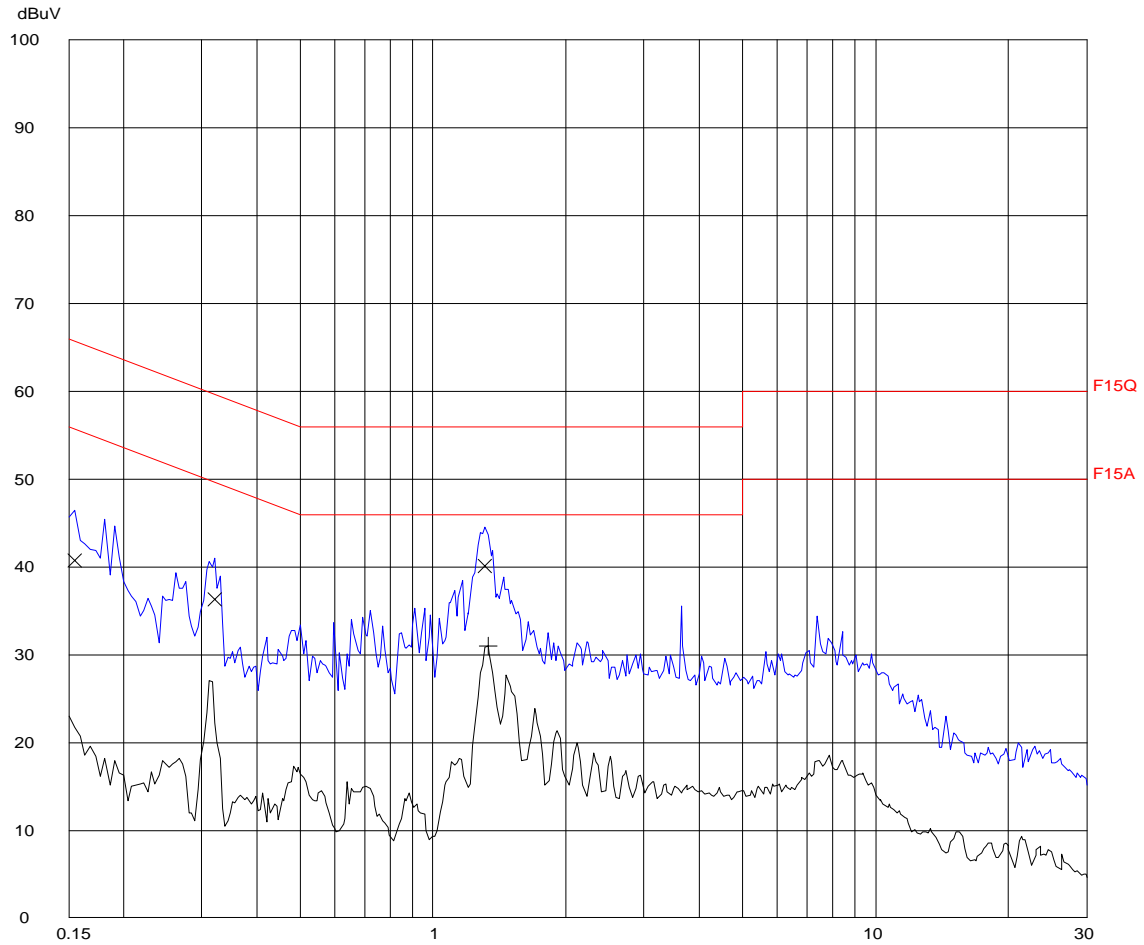

Ctrl No.: N/A



Report no.: HK10061452-1
Adaptor: Sunstrong
Ringing & Charging Mode
AC Mains "L"

Report No.:HK10061452-1

Scan Settings (1 Range)

Frequencies			Receiver Settings					
Start	Stop	Step	IF BW	Detector	M-Time	Atten	Preamp	OpRge
150k	30M	4.5k	10k	PK+AV	10ms	AUTO	LN OFF	60dB

Final Measurement Results:

Frequency	QP Level	QP Limit	Delta
MHz	dBuV	dBuV	dB
0.15450	40.8	65.7	-24.9
0.32100	36.3	59.7	-23.4
1.31100	40.1	56.0	-15.9

Frequency	AV Level	AV Limit	Delta
MHz	dBuV	dBuV	dB
1.32900	30.9	46.0	-15.1

* limit exceeded



Report no.: HK10061452-1
Adaptor: Ten Pao
Ringing & Charging Mode
AC Mains "L"

Report No.:HK10061452-1


Scan Settings (1 Range)

Frequencies			Receiver Settings					
Start	Stop	Step	IF BW	Detector	M-Time	Atten	Preamp	OpRge
150k	30M	4.5k	10k	PK+AV	10ms	AUTO	LN OFF	60dB

Final Measurement: x QP / + AV

Meas Time: 1 s
Subranges: 16
Acc Margin: 20dB

Transducer No.	Start	Stop	Name
1	9k	30M	2454
2	9k	30M	0700
3	9k	30M	0090

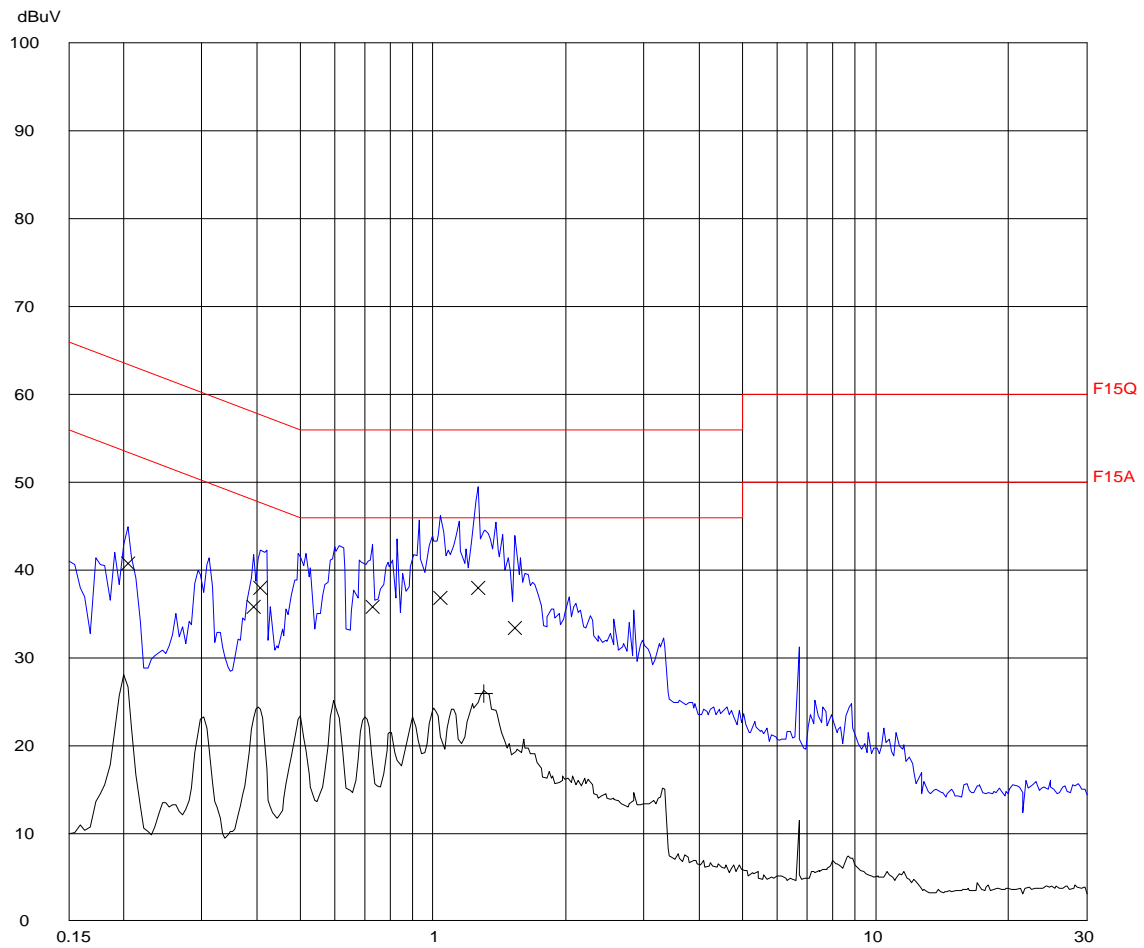



Report no.: HK10061452-1
Adaptor: Ten Pao
Ringing & Charging Mode
AC Mains "L"

Report No.:HK10061452-1

Scan Settings (1 Range)

|----- Frequencies -----||----- Receiver Settings -----|

Start	Stop	Step	IF BW	Detector	M-Time	Atten	Preamp	OpRge
150k	30M	4.5k	10k	PK+AV	10ms	AUTO	LN OFF	60dB

Final Measurement Results:

Frequency	QP Level	QP Limit	Delta
MHz	dB	dB	dB
0.20400	40.7	63.4	-22.7
0.39300	35.8	58.0	-22.2
0.40650	37.9	57.7	-19.8
0.73050	35.8	56.0	-20.2
1.04100	36.8	56.0	-19.2
1.26150	37.9	56.0	-18.1
1.53150	33.3	56.0	-22.7

Frequency	AV Level	AV Limit	Delta
MHz	dB	dB	dB
1.29750	25.9	46.0	-20.1

* limit exceeded




Report no.: HK10061452-1
Adaptor: Sunstrong
Ringing & Charging Mode
AC Mains "N"

Report No.: HK10061452-1
Scan Settings (1 Range)

Frequencies			Receiver Settings					
Start	Stop	Step	IF BW	Detector	M-Time	Atten	Preamp	OpRge
150k	30M	4.5k	10k	PK+AV	10ms	AUTO	LN OFF	60dB

Final Measurement: x QP / + AV
Meas Time: 1 s
Subranges: 16
Acc Margin: 20dB

Transducer No.	Start	Stop	Name
1	9k	30M	2454
2	9k	30M	0700
3	9k	30M	0090

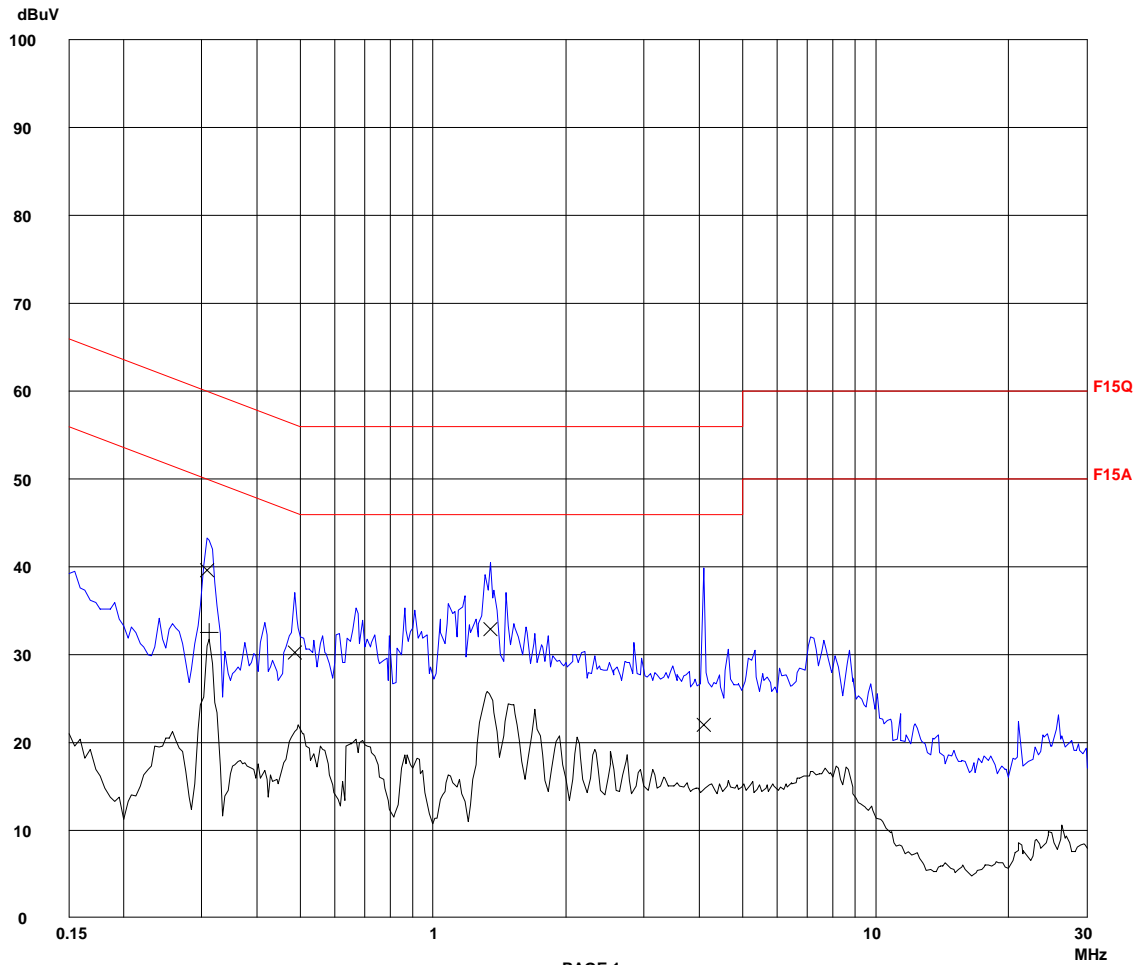



Report no.: HK10061452-1
Adaptor: Sunstrong
Ringing & Charging Mode
AC Mains "N"

Report No.:HK10061452-1

Scan Settings (1 Range)

|----- Frequencies -----||----- Receiver Settings -----|
Start Stop Step IF BW Detector M-Time Atten Preamp OpRge
150k 30M 4.5k 10k PK+AV 10ms AUTO LN OFF 60dB
Final Measurement Results:

Frequency	QP Level	QP Limit	Delta
MHz	dBuV	dBuV	dB
0.30750	39.6	60.0	-20.4
0.48750	30.2	56.3	-26.1
1.34700	32.8	56.0	-23.2
4.07850	22.0	56.0	-34.0

Frequency	AV Level	AV Limit	Delta
MHz	dBuV	dBuV	dB
0.31200	32.5	49.9	-17.4

* limit exceeded