

TEST REPORT

Report Number: HK11041669-2

Application
for
Original Grant of 47 CFR Part 15 Certification
New Family of RSS-210 Issue 8 Equipment Certification

2.4GHz Frequency Hopping Spread Spectrum Video Baby Monitor - Parent
Unit

FCC ID: EW780-8181-01

IC: 1135B-80818101

Prepared and Checked by:



Koo Wai Ip
Lead Engineer
May 30, 2011

Approved by:



Nip Ming Fung, Melvin
Supervisor
May 30, 2011

- The test report only allows to be revised within the retention period unless further standard or the requirement was noticed.
- This report is for the exclusive use of Intertek's Client and is provided pursuant to the agreement between Intertek and its Client. Intertek's responsibility and liability are limited to the terms and conditions of the agreement. Intertek assumes no liability to any party, other than to the Client in accordance with the agreement, for any loss, expense or damage occasioned by the use of this report. Only the Client is authorized to permit copying or distribution of this report and then only in its entirety. Any use of the Intertek name or one of its marks for the sale or advertisement of the tested material, product or service must first be approved in writing by Intertek. The observations and test results in this report are relevant only to the sample tested. This report by itself does not imply that the material, product, or service is or has ever been under an Intertek certification program.

INTERTEK TESTING SERVICES

GENERAL INFORMATION

Applicant Name:	VTech Telecommunications Ltd.
Applicant Address:	23/F., Tai Ping Industrial Centre, Block 1, 57 Ting Kok Road, Tai Po, Hong Kong.
FCC Specification Standard:	FCC Part 15, October 1, 2009 Edition
FCC ID:	EW780-8181-01
FCC Model(s):	VM321 PU, VM321-2 PU, VM321-3 PU, VM321-4 PU, VM321-X PU
IC Specification Standard:	RSS-210 Issue 8, December 2010 RSS-Gen Issue 3, December 2010 RSS-102 Issue 4, March 2010
IC:	1135B-80818101
IC Model(s):	VM321 PU, VM321-2 PU, VM321-3 PU, VM321-4 PU
Type of EUT:	Spread Spectrum Transmitter
Description of EUT:	2.4GHz Frequency Hopping Spread Spectrum Video Baby Monitor - Parent Unit
Serial Number:	N/A
Sample Receipt Date:	April 29, 2011
Date of Test:	April 29 to May 20, 2011
Report Date:	May 30, 2011
Environmental Conditions:	Temperature: +10 to 40°C Humidity: 10 to 90%

INTERTEK TESTING SERVICES

Table of Contents

1.0 Test Results Summary & Statement of Compliance	4
1.1 Summary of Test Results	4
1.2 Statement of Compliance	5
2.0 General Description	7
2.1 Product Description	7
2.2 Test Methodology	7
2.3 Test Facility	7
3.0 System Test Configuration	9
3.1 Justification	9
3.2 EUT Exercising Software	10
3.3 Details of EUT and Description of Accessories	11
3.4 Measurement Uncertainty	11
4.0 Test Results	13
4.1 Maximum Conducted Output Power at Antenna Terminals	13
4.2 Maximum 20 dB RF Bandwidth	14
4.3 Minimum Number of Hopping Frequencies	15
4.4 Minimum Hopping Channel Carrier Frequency Separation	16
4.5 Average Channel Occupancy Time	17
4.6 Out of Band Conducted Emissions	18
4.7 Field Strength Calculation	19
4.8 Transmitter Radiated Emissions in Restricted Bands and Spurious Emissions	20
4.8.1 Radiated Emission Configuration Photograph	21
4.8.2 Radiated Emission Data	21
4.8.3 Transmitter Duty Cycle Calculation	22
4.9 Radiated Emissions from Receiver	27
4.9.1 Radiated Emission Configuration Photograph	27
4.9.2 Radiated Emission Data	27
4.10 AC Power Line Conducted Emission	29
4.10.1 AC Power Line Conducted Emission Configuration Photograph	29
4.10.2 AC Power Line Conducted Emission Data	29
4.11 Radio Frequency Radiation Exposure	31
4.12 Radio Frequency Exposure Compliance	31
5.0 Equipment List	33

Appendix – Exhibits for Application of Certification

INTERTEK TESTING SERVICES

**EXHIBIT 1
TEST RESULTS SUMMARY & STATEMENT OF COMPLIANCE**

INTERTEK TESTING SERVICES

1.0 Test Results Summary & Statement of Compliance

1.1 Summary of Test Results

Test Items	FCC Part 15 Section	RSS-210/ RSS-Gen [#] Section	Results	Details see section
Antenna Requirement	15.203	7.1.2 [#]	Pass	2.1
Max. Conducted Output Power	15.247(b)(1) & (4)	A8.4(2)	Pass	4.1
Max. 20dB RF Bandwidth	15.247(a)(1)(iii)	A8.1(d)	Pass	4.2
Min. No. of Hopping Frequencies	15.247(a)(1)(iii)	A8.1(d)	Pass	4.3
Min. Hopping Channel Carrier Frequency Separation	15.247(a)(1)	A8.1(b)	Pass	4.4
Average Time of Occupancy	15.247(a)(1)(iii)	A8.1(d)	Pass	4.5
Out of Band Antenna Conducted Emission	15.247(d)	A8.5	Pass	4.6
Radiated Emission in Restricted Bands and Spurious Emissions	15.247(d) & 15.109	2.2	Pass	4.8
Radiated Emission from Receiver	N/A	2.3	Pass	4.9
AC Power Line Conducted Emission	15.207 & 15.107	7.2.4 [#]	Pass	4.10
Radio Frequency Radiation Exposure	15.247(i)	RSS-102	Pass	4.11 4.12

Note: Pursuant to FCC Part 15 Section 15.215(c), the 20dB bandwidth of the emission was contained within the frequency band designated (mentioned as above) which the EUT operated. The effects, if any, from frequency sweeping, frequency hopping, other modulation techniques and frequency stability over expected variations in temperature and supply voltage were considered.

INTERTEK TESTING SERVICES

1.2 Statement of Compliance

The equipment under test is found to be complying with the following standards:

FCC Part 15, October 1, 2009 Edition
RSS-210 Issue 8, December 2010
RSS-Gen Issue 3, December 2010
RSS-102 Issue 4, March 2010

INTERTEK TESTING SERVICES

**EXHIBIT 2
GENERAL DESCRIPTION**

INTERTEK TESTING SERVICES

2.0 General Description

2.1 Product Description

The Equipment Under Test (EUT) is a 2.4GHz Frequency Hopping Spread Spectrum Parent Unit of Video Monitor operating at frequency range of 2402.000MHz to 2478.500MHz. There are total of 52 channels, and 20 channels are used for each hopping sequence. The EUT is powered by a 100-120VAC to 6VDC 800mA switching AC adaptor and/or 3.7VDC 950mAh "Li-ion" type rechargeable battery.

The antenna used in the EUT is integral, and the test sample is a prototype.

For FCC, The Model(s): VM321-2 PU, VM321-3 PU, VM321-4 PU and VM321-X PU are the same as the Model: VM321 PU in electronics/electrical designs including software & firmware, PCB layout and construction design/physical design/enclosure. The only difference between these models is model number to be sold for marketing purpose. Suffix (X) indicates different number of baby unit.

For IC, The Model(s): VM321-2 PU, VM321-3 PU and VM321-4 PU are the same as the Model: VM321 PU in electronics/electrical designs including software & firmware, PCB layout and construction design/physical design/enclosure. The only difference between these models is model number to be sold for marketing purpose.

The circuit description and frequency hopping algorithm are attached in the Appendix and saved with filename: descri.pdf.

2.2 Test Methodology

Both AC power line-conducted and radiated emission measurements were performed according to the procedures in ANSI C63.4 (2003). Preliminary radiated scans and all radiated measurements were performed in Open Area Test Sites. All Radiated tests were performed at an antenna to EUT distance of 3 meters, unless stated otherwise in the "**Justification Section**" of this Application. Antenna port conducted measurements were performed according to FCC Public Notice DA 00-705. All other measurements were made in accordance with the procedures in 47 CFR Part 2.

2.3 Test Facility

The open area test site, AC Power Line conducted measurement facility, and antenna port conducted measurement facility used to collect the radiated data, AC Power Line conducted data, and conductive data are at Roof Top, 2nd Floor, and 5th Floor respectively of Intertek Testing Services Hong Kong Ltd., which is located at Garment Centre, 576 Castle Peak Road, Kowloon, Hong Kong. This test facility and site measurement data have been fully placed on file with the FCC and the Industry Canada.

INTERTEK TESTING SERVICES

**EXHIBIT 3
SYSTEM TEST CONFIGURATION**

INTERTEK TESTING SERVICES

3.0 System Test Configuration

3.1 Justification

For radiated emissions testing, the equipment under test (EUT) was setup to transmit / receive continuously to simplify the measurement methodology. Care was taken to ensure proper power supply voltages during testing. During testing, all cables (if any) were manipulated to produce worst case emissions.

The EUT was powered by a 100-120VAC to 6VDC 800mA adaptor and/or 3.7VDC 950mAh "Li-ion" type rechargeable battery.

For the measurements, the EUT was attached to a plastic stand if necessary and placed on the wooden turntable. If the EUT attached to peripherals, they were connected and operational (as typical as possible).

The signal was maximized through rotation and placement in the three orthogonal axes. The antenna height and polarization were varied during the search for maximum signal level. The antenna height was varied from 1 to 4 meters. Radiated emissions were taken at three meters unless the signal level was too low for measurement at that distance. If necessary, a pre-amplifier was used and/or the test was conducted at a closer distance.

For any intentional radiator powered by AC power line, measurements of the radiated signal level of the fundamental frequency component of the emission was performed with the supply voltage varied between 85% and 115% of the nominal rated supply voltage.

For transmitter radiated measurement, the spectrum analyzer resolution bandwidth was 100 kHz for frequencies below 1000 MHz. The resolution bandwidth was 1 MHz for frequencies above 1000 MHz.

For receiver radiated measurement, the spectrum analyzer resolution bandwidth was 1MHz for measurement above 1GHz while 100kHz for measurement from 30MHz to 1GHz.

Radiated emission measurement for transmitter were performed from the lowest radio frequency signal generated in the device which is greater than 9 kHz to the tenth harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower. Receiver was performed from 30MHz to the fifth harmonic of the highest frequency or 40GHz, whichever is lower.

Emission that are directly caused by digital circuits in the transmit path and transmitter portion were measured, and the limit are according to FCC Part 15 Section 15.109.

INTERTEK TESTING SERVICES

3.1 Justification - Cont'd

Detector function for radiated emissions was in peak mode. Average readings, when required, were taken by measuring the duty cycle of the equipment under test and subtracting the corresponding amount in dB from the measured peak readings. A detailed description for the calculation of the average factor can be found in Exhibit 4.8.3.

Determination of pulse desensitization was made according to *Hewlett Packard Application Note 150-2, Spectrum Analysis... Pulsed RF*. The effective period (Teff) was referred to Exhibit 4.8.3. With the resolution bandwidth 1MHz and spectrum analyzer IF bandwidth 3dB, the pulse desensitization factor was 0dB.

For AC line conducted emission test, the EUT along with its peripherals were placed on a 1.0m(W)x1.5m(L) and 0.8m in height wooden table and the EUT was adjusted to maintain a 0.4 meter space from a vertical reference plane. The EUT was connected to power mains through a line impedance stabilization network (LISN), which provided 50ohm coupling impedance for measuring instrument. The LISN housing, measuring instrument case, reference ground plane, and vertical ground plane were bounded together. The excess power cable between the EUT and the LISN was bundled.

All connecting cables of EUT and peripherals were manipulated to find the maximum emission.

All relevant operation modes have been tested, and the worst case data is included in this report.

3.2 EUT Exercising Software

The EUT exercise program used during radiated and conducted testing was designed to exercise the various system components in a manner similar to a typical use.

INTERTEK TESTING SERVICES

3.3 Details of EUT and Description of Accessories

Details of EUT:

An AC adaptor and/or a battery (provided with the unit) were used to power the device. Their description are listed below.

- (1) An AC adaptor (100-120VAC to 6VDC 800mA, Model: SSA-5AP-09 US 060080L) (Supplied by Client)
- (2) A "Li-ion" type rechargeable battery (3.7V, 950mAh) (Supplied by Client)

Description of Accessories:

- (1) Baby Unit, Model: VM321 BU, FCC ID: EW780-8181-00 (Supplied by Client)

3.4 Measurement Uncertainty

When determining of the test conclusion, the Measurement Uncertainty of test has been considered.

INTERTEK TESTING SERVICES

**EXHIBIT 4
TEST RESULTS**

INTERTEK TESTING SERVICES

4.0 Test Results

4.1 Maximum Conducted Output Power at Antenna Terminals

- The antenna power of the EUT was connected to the input of a power meter. Power was read directly and cable loss correction was added to the reading to obtain power at the EUT antenna terminals.
- The antenna port of the EUT was connected to the input of a spectrum analyzer. The analyzer was set for RBW>20dB bandwidth and power was read directly in dBm. External attenuation and cable loss were compensated for using the OFFSET function of the analyser.

(Parent Unit) Antenna Gain = 2 dBi		
Frequency (MHz)	Output in dBm	Output in mWatt
Low Channel: 2402.000	19.47	88.5
Middle Channel: 2439.500	19.17	82.6
High Channel: 2478.500	17.85	61.0

Cable loss : 0.5 dB External Attenuation : 0 dB

Cable loss, external attenuation: included in OFFSET function
 added to SA raw reading

dBm max. output level = 19.47 dBm

Limits:

- 0.125W (21dBm) for antennas with gains of 6dBi or less
- 0.25W (24dBm) for antennas with gains of 6dBi or less
- 1W (30dBm) for antennas with gains of 6dBi or less
- ___W (___dBm) for antennas with gains more than 6dBi

The plots of conducted output power are attached in the Appendix and saved with filename: maxop.pdf

INTERTEK TESTING SERVICES

4.2 Maximum 20 dB RF Bandwidth

The antenna port of the EUT was connected to the input of a spectrum analyzer. Analyzer RES BW was chosen so that the display was a result of the hopping channel modulation. For each RF output channel investigated, the spectrum analyzer center frequency was set to the channel carrier. A PEAK output reading was taken, a DISPLAY line was drawn 20 dB lower than PEAK level. The 20 dB bandwidth was determined from where the channel output spectrum intersected the display line.

Parent Unit	
Frequency (MHz)	20 dB Bandwidth (MHz)
Low Channel: 2402.000	2.10
Middle Channel: 2439.500	2.11
High Channel: 2478.500	2.11

Limits

$\leq 500\text{kHz}$ for 902-928MHz

N/A for 2400-2483.5MHz

$\leq 1\text{MHz}$ for 5725-5850MHz

The plots of 20dB RF bandwidth are attached in the Appendix and saved with filename: 20dB.pdf

INTERTEK TESTING SERVICES

4.3 Minimum Number of Hopping Frequencies

With the analyzer set to MAX HOLD readings were taken for 2-3 minutes in each band. The channel peaks so recorded were added together, and the total number compared to the minimum number of channels required in the regulation.

Parent Unit	
No. of hopping channels (traffic)	20
No. of hopping channels (Standby)	52

Minimum Requirements:

- at least 50 hopping channels for 902MHz-928MHz (20 dB bandwidth of hopping channel < 250kHz)
- at least 25 hopping channels for 902MHz-928MHz (20 dB bandwidth of hopping channel \geq 250kHz)
- at least 15 hopping channels for 2400MHz-2483.5MHz.
- at least 75 hopping channels for 5725MHz-5850MHz.

The plots of number of hopping frequencies are attached in the Appendix and saved with filename: chno.pdf

INTERTEK TESTING SERVICES

4.4 Minimum Hopping Channel Carrier Frequency Separation

Using the DELTA MARKER function of the analyzer, the frequency separation between two adjacent channels was measured and met the requirement.

Parent Unit	
Channel Separation (Channel <u>25</u> and Channel <u>26</u>)	1.5 MHz

Limits:

The channel separation must be larger than:

- 25 kHz
- 20 dB bandwidth of hopping channel: ___ Hz
- 2/3 of 20dB bandwidth of hopping channel: 1.41 MHz

The plot(s) of hopping channel carrier frequency separation is attached in the Appendix and saved with filename: fsepa.pdf

INTERTEK TESTING SERVICES

4.5 Average Channel Occupancy Time

The spectrum analyzer center frequency was set to one of the known hopping channels. The SWEEP was set to 10ms, the SPAN was set to ZERO SPAN, and the TRIGGER was set to VIDEO. The time duration of the transmission so captured was measured with the MARKER DELTA function.

The SWEEP was then set to the time required by the regulation (20 seconds for 902-928 MHz devices, if the 20dB bandwidth is less than 250kHz, 10 seconds for 902-928 MHz if the 20dB bandwidth is or greater than 250kHz, “0.4 seconds x Number of hopping channels employed” seconds for 2400-2483.5 MHz, 30 seconds for 5725-5850 MHz). The analyzer was set to SINGLE SWEEP, the total ON time was added and compared against the limit (0.4 seconds).

Parent Unit (worst-case: Traffic)	
Average Occupancy Time = $0.412\text{ms} \times 1 \times 8\text{s} / 96\text{ms}$	34.33ms

Limits:

Average 0.4 seconds maximum occupancy in:

- 8 seconds (0.4 sec. x 20) for 2400MHz-2483.5MHz
- 20 seconds for 902MHz-928MHz \geq 50 hopping channels
- 10 seconds for 902MHz-928MHz \geq 25 hopping channels
- 30 seconds for 5725-5850MHz

The plots of average channel occupancy time are attached in the Appendix and saved with filename: avetime.pdf

INTERTEK TESTING SERVICES

4.6 Out of Band Conducted Emissions

In any 100 kHz bandwidth outside the EUT passband, the RF power produced by the modulation products of the spreading sequence, the information sequence, and the carrier frequency shall be at least 20 dB below that of the maximum in-band 100 kHz emission.

The plot(s) of bandedge compliance is shown the worst-case which has been already considered between enable and disable the hopping function of the EUT.

Furthermore, delta measurement technique for measuring bandedge emissions was incorporated in the test of the edge at 2483.5MHz.

Limits:

All spurious emission and up to the tenth harmonic was measured and they were found to be at least 20 dB below the highest level of the desired power in the passband.

The plots of out of band conducted emissions are attached in the Appendix and saved with filenames: obantcon.pdf

INTERTEK TESTING SERVICES

4.7 Field Strength Calculation

The field strength is calculated by adding the reading on the Spectrum Analyzer to the factors associated with preamplifiers (if any), antennas, cables, pulse desensitization and average factors (when specified limit is in average and measurements are made with peak detectors). A sample calculation is included below.

$$FS = RA + AF + CF - AG + PD + AV$$

where

- FS = Field Strength in dB μ V/m
- RA = Receiver Amplitude (including preamplifier) in dB μ V
- CF = Cable Attenuation Factor in dB
- AF = Antenna Factor in dB
- AG = Amplifier Gain in dB
- PD = Pulse Desensitization in dB
- AV = Average Factor in -dB

In the radiated emission table which follows, the reading shown on the data table may reflect the preamplifier gain. An example of the calculations, where the reading does not reflect the preamplifier gain, follows:

$$FS = RA + AF + CF - AG + PD + AV$$

Example

Assume a receiver reading of 62.0 dB μ V is obtained. The antenna factor of 7.4 dB and cable factor of 1.6 dB is added. The amplifier gain of 29 dB is subtracted. The pulse desensitization factor of the spectrum analyzer was 0 dB, and the resultant average factor was -10 dB. The net field strength for comparison to the appropriate emission limit is 32 dB μ V/m. This value in dB μ V/m was converted to its corresponding level in μ V/m.

$$\begin{aligned} RA &= 62.0 \text{ dB}\mu\text{V} \\ AF &= 7.4 \text{ dB} \\ CF &= 1.6 \text{ dB} \\ AG &= 29 \text{ dB} \\ PD &= 0 \text{ dB} \\ AV &= -10 \text{ dB} \\ FS &= 62 + 7.4 + 1.6 - 29 + 0 + (-10) = 32 \text{ dB}\mu\text{V/m} \end{aligned}$$

$$\text{Level in } \mu\text{V/m} = \text{Common Antilogarithm} [(32 \text{ dB}\mu\text{V/m})/20] = 39.8 \mu\text{V/m}$$

INTERTEK TESTING SERVICES

4.8 Transmitter Radiated Emissions in Restricted Bands and Spurious Emissions

Data is included of the worst case configuration (the configuration which resulted in the highest emission levels). A sample calculation, configuration photographs and data tables of the emissions are included.

The data on the following pages list the significant emission frequencies, the limit and the margin of compliance.

INTERTEK TESTING SERVICES

4.8.1 Radiated Emission Configuration Photograph

Worst Case Restricted Band Radiated Emission
at

64.006 MHz

The worst case radiated emission configuration photographs are attached in the Appendix and saved with filename: config photos.pdf

4.8.2 Radiated Emission Data

The data in tables 1-4 list the significant emission frequencies, the limit and the margin of compliance.

Judgement -

Passed by 6.1 dB margin

INTERTEK TESTING SERVICES

4.8.3 Transmitter Duty Cycle Calculation

For 4 Baby Unit operation,

$$\begin{aligned}\text{Duty Cycle (DC)} &= \text{Maximum On time in } 96\text{ms}/96\text{ms} \\ &= (0.412\text{ms} \times 1)/96\text{ms} \\ &= 0.004292\end{aligned}$$

$$\begin{aligned}\text{Average Factor (AF)} &= 20 \log(\text{DC}) \\ &= 20 * \log (0.004292) \\ &= -47.3\text{dB}\end{aligned}$$

The plot(s) shows the bit timing is attached in the Appendix and saved with filename: dcc.pdf

INTERTEK TESTING SERVICES

Mode: TX-Channel 00

Table 1, Parent Unit

Radiated Emission Data

Polarization	Frequency (MHz)	Reading (dB μ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Average Factor (dB)	Calculated at 3m (dB μ V/m)	Average Limit at 3m (dB μ V/m)	Margin (dB)
<i>H</i>	<i>4804.000</i>	<i>50.7</i>	<i>33</i>	<i>34.9</i>	<i>47.3</i>	<i>5.3</i>	<i>54.0</i>	<i>-48.7</i>
<i>H</i>	<i>12010.000</i>	<i>45.9</i>	<i>33</i>	<i>40.5</i>	<i>47.3</i>	<i>6.1</i>	<i>54.0</i>	<i>-47.9</i>

Polarization	Frequency (MHz)	Reading (dB μ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dB μ V/m)	Peak Limit at 3m (dB μ V/m)	Margin (dB)
<i>H</i>	<i>4804.000</i>	<i>50.7</i>	<i>33</i>	<i>34.9</i>	<i>52.6</i>	<i>74.0</i>	<i>-21.4</i>
<i>H</i>	<i>12010.000</i>	<i>45.9</i>	<i>33</i>	<i>40.5</i>	<i>53.4</i>	<i>74.0</i>	<i>-20.6</i>

- NOTES:
1. Peak detector is used for the emission measurement.
 2. All measurements were made at 3 meters. Radiated emissions not detected at the 3-meter distance were measured at 0.3-meter and an inverse proportional extrapolation was performed to compare the signal level to the 3-meter limit. No other radiated emissions than those reported were detected at a test distance of 0.3-meter.
 3. Negative value in the margin column shows emission below limit.
 4. Horn antenna is used for the emission over 1000MHz.
 5. Emission (the row indicated by ***bold italic***) within the restricted band meets the requirement of FCC Part 15 Section 15.205 / RSS-210 Section 2.2.

INTERTEK TESTING SERVICES

Mode: TX-Channel 25

Table 2, Parent Unit

Radiated Emission Data

Polarization	Frequency (MHz)	Reading (dB μ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Average Factor (dB)	Calculated at 3m (dB μ V/m)	Average Limit at 3m (dB μ V/m)	Margin (dB)
<i>H</i>	<i>4879.000</i>	<i>50.4</i>	<i>33</i>	<i>34.9</i>	<i>47.3</i>	<i>5.0</i>	<i>54.0</i>	<i>-49.0</i>
<i>H</i>	<i>7318.500</i>	<i>54.4</i>	<i>33</i>	<i>37.9</i>	<i>47.3</i>	<i>12.0</i>	<i>54.0</i>	<i>-42.0</i>
<i>H</i>	<i>12197.500</i>	<i>45.7</i>	<i>33</i>	<i>40.5</i>	<i>47.3</i>	<i>5.9</i>	<i>54.0</i>	<i>-48.1</i>

Polarization	Frequency (MHz)	Reading (dB μ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dB μ V/m)	Peak Limit at 3m (dB μ V/m)	Margin (dB)
<i>H</i>	<i>4879.000</i>	<i>50.4</i>	<i>33</i>	<i>34.9</i>	<i>52.3</i>	<i>74.0</i>	<i>-21.7</i>
<i>H</i>	<i>7318.500</i>	<i>54.4</i>	<i>33</i>	<i>37.9</i>	<i>59.3</i>	<i>74.0</i>	<i>-14.7</i>
<i>H</i>	<i>12197.500</i>	<i>45.7</i>	<i>33</i>	<i>40.5</i>	<i>53.2</i>	<i>74.0</i>	<i>-20.8</i>

- NOTES:
1. Peak detector is used for the emission measurement.
 2. All measurements were made at 3 meters. Radiated emissions not detected at the 3-meter distance were measured at 0.3-meter and an inverse proportional extrapolation was performed to compare the signal level to the 3-meter limit. No other radiated emissions than those reported were detected at a test distance of 0.3-meter.
 3. Negative value in the margin column shows emission below limit.
 4. Horn antenna is used for the emission over 1000MHz.
 5. Emission (the row indicated by ***bold italic***) within the restricted band meets the requirement of FCC Part 15 Section 15.205 / RSS-210 Section 2.2.

INTERTEK TESTING SERVICES

Mode: TX-Channel 51

Table 3, Parent Unit

Radiated Emission Data

Polarization	Frequency (MHz)	Reading (dB μ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Average Factor (dB)	Calculated at 3m (dB μ V/m)	Average Limit at 3m (dB μ V/m)	Margin (dB)
**V	2478.500	119.2	33	29.4	47.3	68.3		
H	4957.000	50.5	33	34.9	47.3	5.1	54.0	-48.9
H	7435.500	54.5	33	37.9	47.3	12.1	54.0	-41.9
H	12392.500	45.7	33	40.5	47.3	5.9	54.0	-48.1

Polarization	Frequency (MHz)	Reading (dB μ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dB μ V/m)	Peak Limit at 3m (dB μ V/m)	Margin (dB)
**V	2478.500	119.2	33	29.4	115.6		
H	4957.000	50.5	33	34.9	52.4	74.0	-21.6
H	7435.500	54.5	33	37.9	59.4	74.0	-14.6
H	12392.500	45.7	33	40.5	53.2	74.0	-20.8

- NOTES:
1. Peak detector is used for the emission measurement.
 2. All measurements were made at 3 meters. Radiated emissions not detected at the 3-meter distance were measured at 0.3-meter and an inverse proportional extrapolation was performed to compare the signal level to the 3-meter limit. No other radiated emissions than those reported were detected at a test distance of 0.3-meter.
 3. Negative value in the margin column shows emission below limit.
 4. Horn antenna is used for the emission over 1000MHz.
 5. Emission (the row indicated by **bold italic**) within the restricted band meets the requirement of FCC Part 15 Section 15.205 / RSS-210 Section 2.2.
- ** Fundamental emission was measured for determining band-edge compliance of using delta measurement technique. Peak level and average level at the upper bandedge were 63.0 dB μ V/m and 15.7 dB μ V/m respectively.

INTERTEK TESTING SERVICES

Mode: Talk

Table 4, Parent Unit

Radiated Emission Data

Polarization	Frequency (MHz)	Reading (dB μ V)	Pre-amp (dB)	Antenna Factor (dB)	Net at 3m (dB μ V/m)	Limit at 3m (dB μ V/m)	Margin (dB)
V	64.006	40.9	16	9.0	33.9	40.0	-6.1
V	128.012	36.1	16	14.0	34.1	43.5	-9.4
H	192.018	34.6	16	16.0	34.6	43.5	-8.9
H	256.024	29.1	16	21.0	34.1	46.0	-11.9
H	320.030	27.5	16	23.0	34.5	46.0	-11.5
H	384.036	26.9	16	24.0	34.9	46.0	-11.1
H	448.042	24.6	16	26.0	34.6	46.0	-11.4
H	512.048	24.9	16	27.0	35.9	46.0	-10.1
H	576.054	25.2	16	28.0	37.2	46.0	-8.8
H	640.060	22.1	16	29.0	35.1	46.0	-10.9
H	704.066	20.6	16	30.0	34.6	46.0	-11.4

- NOTES: 1. Peak detector is used for the emission measurement.
2. All measurements were made at 3 meters. Radiated emissions not detected at the 3-meter distance were measured at 0.3-meter and an inverse proportional extrapolation was performed to compare the signal level to the 3-meter limit. No other radiated emissions than those reported were detected at a test distance of 0.3-meter.
3. Negative value in the margin column shows emission below limit.
4. Emission (the row indicated by **bold italic**) within the restricted band meets the requirement of FCC Part 15 Section 15.205 / RSS-210 Section 2.2.

INTERTEK TESTING SERVICES

4.9 Radiated Emissions from Receiver

4.9.1 Radiated Emission Configuration Photograph

Worst Case Radiated Emission
at

2437.500 MHz

The worst case radiated emission configuration photographs are attached in the Appendix and saved with filename: config photos.pdf

4.9.2 Radiated Emission Data

The data in tables 5 list the significant emission frequencies, the limit and the margin of compliance.

Judgement –

Passed by 13.2 dB margin

INTERTEK TESTING SERVICES

Mode: Receiving – Middle Channel

Table 9, Parent Unit

Radiated Emissions Data

Polarization	Frequency (MHz)	Reading (dB μ V)	Pre-amp (dB)	Antenna Factor (dB)	Net at 3m (dB μ V/m)	Limit at 3m (dB μ V/m)	Margin (dB)
V	2437.500	44.4	33	29.4	40.8	54.0	-13.2
V	4875.000	38.3	33	34.9	40.2	54.0	-13.8
V	7312.500	35.1	33	37.9	40.0	54.0	-14.0
V	9750.000	32.2	33	40.4	39.6	54.0	-14.4
V	12187.500	31.9	33	40.5	39.4	54.0	-14.6

NOTES:

1. Peak detector is used for the emission measurement.
2. All measurements were made at 3 meters. Radiated emissions not detected at the 3-meter distance were measured at 0.3-meter and an inverse proportional extrapolation was performed to compare the signal level to the 3-meter limit. No other radiated emissions than those reported were detected at a test distance of 0.3-meter.
3. Negative value in the margin column shows emission below limit.
4. Horn antenna is used for the emission over 1000MHz.

INTERTEK TESTING SERVICES

4.10 AC Power Line Conducted Emission

- Not applicable – EUT is only powered by battery for operation.
- EUT connects to AC power line. Emission Data is listed in following pages.
- Base Unit connects to AC power line and has transmission. Handset connects to AC power line but has no transmission. Emission Data of Base Unit is listed in following pages.

4.10.1 AC Power Line Conducted Emission Configuration Photograph

Worst Case Line-Conducted Configuration

The worst case line conducted configuration photographs are attached in the Appendix and saved with filename: config photos.pdf


4.10.2 AC Power Line Conducted Emission Data

The plot(s) and data in the following pages list the significant emission frequencies, the limit and the margin of compliance.

Passed by more than 20 dB margin

INTERTEK TESTING SERVICES

Worst Case: Receiving Sounds and Video From Baby Unit and Battery Charging

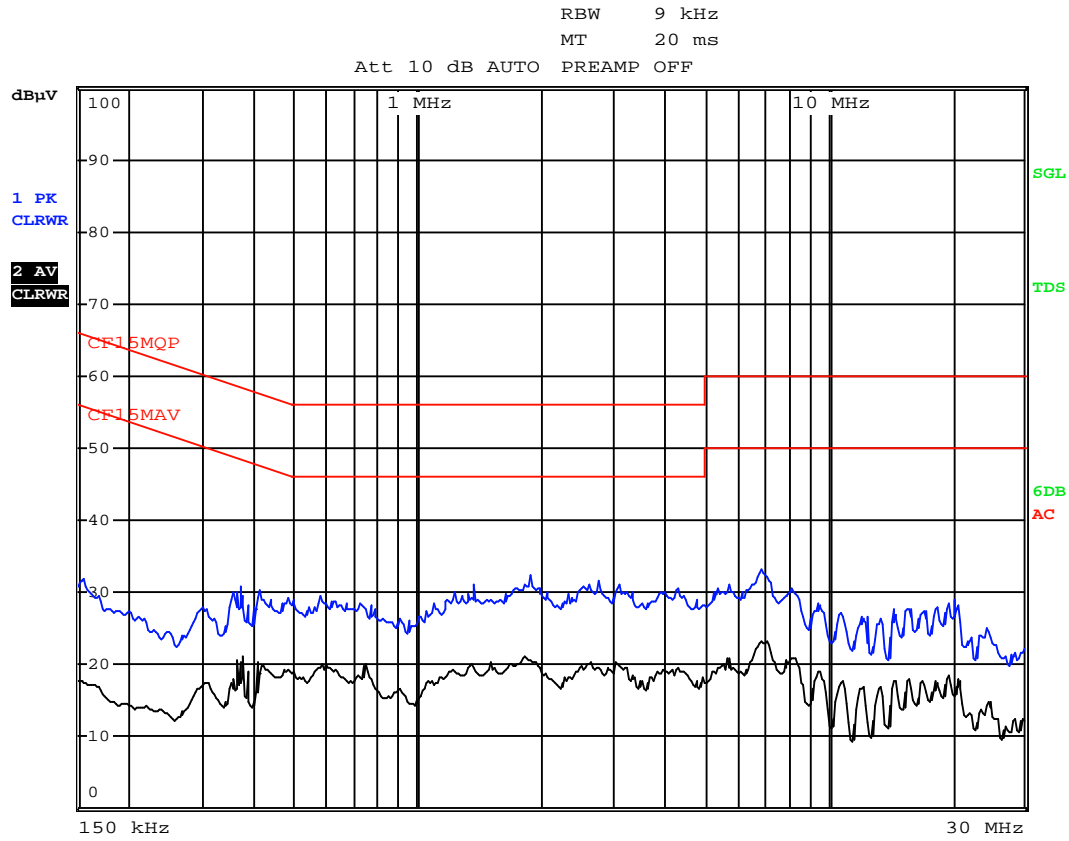

Date: 29.APR.2011 18:35:39

INTERTEK TESTING SERVICES

4.11 Radio Frequency Radiation Exposure

EUT is subject to the radio frequency exposure requirements specified in FCC Rule §§ 1.1307. It shall be considered to operate in a “general population / uncontrolled” environment.

- Output power is less than the applicable low threshold from SAR evaluation.
The evaluation calculation results are saved as filename: RF exposure info.pdf
- EUT was evaluated for Maximum Permissible Exposure (MPE) evaluation compliance according to OET Bulletin 65, Supplement C (Edition 01-01). The evaluation calculation results are attached in the Appendix and saved as filename: RF exposure info.pdf

4.12 Radio Frequency Exposure Compliance

The Routine RF Exposure Evaluation, Routine SAR Evaluation and Declaration of RF Exposure Compliance are saved as filename: RF exposure.pdf

INTERTEK TESTING SERVICES

**EXHIBIT 5
EQUIPMENT LIST**

INTERTEK TESTING SERVICES

5.0 Equipment List

1) Radiated Emissions Test

Equipment	Biconical Antenna	Log Periodic Antenna	EMI Test Receiver
Registration No.	EW-0954	EW-0446	EW-2500
Manufacturer	EMCO	EMCO	R&S
Model No.	3104C	3146	ESCI
Calibration Date	Apr. 14, 2010	Apr. 26, 2010	Jan. 25, 2011
Calibration Due Date	Oct. 14, 2011	Oct. 26, 2011	Jan. 25, 2012

Equipment	Spectrum Analyzer	Broad-Band Horn Antenna with frequency range 14G - 40GHz	Double Ridged Guide Antenna
Registration No.	EW-2188	EW-1679	EW-1015
Manufacturer	AGILENTTECH	SCHWARZBECK	EMCO
Model No.	E4407B	BBHA9170	3115
Calibration Date	Dec. 27, 2010	Mar. 03, 2011	Feb. 09, 2010
Calibration Due Date	Dec. 31, 2011	Sep. 03, 2012	Aug. 09, 2011

Equipment	Biconical Antenna	Log Periodic Antenna
Registration No.	EW-2512	EW-0572
Manufacturer	EMCO	EMCO
Model No.	3104C	3146
Calibration Date	May 12, 2010	May 12, 2010
Calibration Due Date	Nov. 12, 2011	Nov. 12, 2011

2) Conducted Emissions Test

Equipment	EMI Test Receiver	Artificial Mains		Pulse Limiter
Registration No.	EW-2666	EW-0090	EW-0192	EW-0698
Manufacturer	R&S	R&S	R&S	R&S
Model No.	ESCI7	ESH3-Z5	ESH3-Z5	ESH3-Z2
Calibration Date	Oct. 12, 2010	Feb. 05, 2010	Nov. 30, 2010	Mar. 11, 2011
Calibration Due Date	Oct. 12, 2011	May 05, 2011	Nov. 30, 2011	Mar. 11, 2012

3) Conductive Measurement Test

Equipment	Spectrum Analyzer
Registration No.	EW-2253
Manufacturer	R&S
Model No.	FSP40
Calibration Date	Nov. 23, 2010
Calibration Due Date	Nov. 23, 2011

END OF TEST REPORT