

Issuing Laboratory:  
Intertek Testing Services Hong Kong Limited

HKAS has accredited this laboratory (HOKLAS 005 – TEST) under HOKLAS for specific laboratory activities as listed in the HOKLAS directory of accredited laboratories.



## TEST REPORT

**Report Number: 15040233HKG-001**

Application  
for  
Original Grant of 47 CFR Part 15 Certification  
New Family of RSS-210 Issue 8 Equipment Certification

2.4GHz Frequency Hopping Spread Spectrum Baby Monitor - Baby Unit

**FCC ID: EW780-9968-00**

**IC: 1135B-80996800**

Prepared and Checked by:

Approved by:

Handwritten signature of Tang Kwan Mo, Jess.

---

Tang Kwan Mo, Jess  
Lead Engineer

Handwritten signature of Nip Ming Fung, Melvin.

---

Nip Ming Fung, Melvin  
Assistant Manager  
April 21, 2015

- Intertek's standard Terms and Conditions can be obtained at our website: <http://www.intertek.com/terms/>.
- The test report only allows to be revised within the retention period unless further standard or the requirement was noticed.
- This report is for the exclusive use of Intertek's Client and is provided pursuant to the agreement between Intertek and its Client. Intertek's responsibility and liability are limited to the terms and conditions of the agreement. Intertek assumes no liability to any party, other than to the Client in accordance with the agreement, for any loss, expense or damage occasioned by the use of this report. Only the Client is authorized to permit copying or distribution of this report and then only in its entirety. Any use of the Intertek name or one of its marks for the sale or advertisement of the tested material, product or service must first be approved in writing by Intertek. The observations and test results in this report are relevant only to the sample tested. This report by itself does not imply that the material, product, or service is or has ever been under an Intertek certification program.

**Intertek Testing Services Hong Kong Ltd.**

2/F., Garment Centre, 576 Castle Peak Road, Kowloon, Hong Kong.  
Tel: (852) 2173 8888 Fax: (852) 2785 5487 Website: [www.hk.intertek-etlsemko.com](http://www.hk.intertek-etlsemko.com)

## GENERAL INFORMATION

<b>Applicant Name:</b>	VTech Telecommunications Ltd.
<b>Applicant Address:</b>	23/F., Tai Ping Industrial Centre, Block 1, 57 Ting Kok Road, Tai Po, Hong Kong.
<b>FCC Specification Standard:</b>	FCC Part 15, October 1, 2013 Edition
<b>FCC ID:</b>	EW780-9968-00
<b>FCC Model(s):</b>	VM341 BU, VM341-2 BU, VM304, VM3x1-ab BU
<b>IC Specification Standard:</b>	RSS-210 Issue 8, December 2010 RSS-Gen Issue 3, December 2010
<b>IC:</b>	1135B-80996800
<b>IC Model(s):</b>	VM341 BU, VM341-2 BU, VM304
<b>Type of EUT:</b>	Spread Spectrum Transmitter
<b>Description of EUT:</b>	2.4GHz Frequency Hopping Spread Spectrum Baby Monitor - Baby Unit
<b>Serial Number:</b>	N/A
<b>Sample Receipt Date:</b>	April 08, 2015
<b>Date of Test:</b>	April 11-20, 2015
<b>Report Date:</b>	April 21, 2015
<b>Environmental Conditions:</b>	Temperature: +10 to 40°C Humidity: 10 to 90%

## Table of Contents

<b>1.0 Test Results Summary &amp; Statement of Compliance</b> .....	4
1.1 Summary of Test Results .....	4
1.2 Statement of Compliance .....	4
<b>2.0 General Description</b> .....	6
2.1 Product Description .....	6
2.2 Test Methodology .....	6
2.3 Test Facility .....	6
<b>3.0 System Test Configuration</b> .....	9
3.1 Justification .....	9
3.2 EUT Exercising Software .....	10
3.3 Details of EUT and Description of Accessories .....	11
3.4 Measurement Uncertainty .....	11
<b>4.0 Test Results</b> .....	13
4.1 Maximum Conducted Output Power at Antenna Terminals .....	13
4.2 Maximum 20 dB RF Bandwidth .....	16
4.3 Minimum Number of Hopping Frequencies .....	19
4.4 Minimum Hopping Channel Carrier Frequency Separation .....	22
4.5 Average Channel Occupancy Time .....	24
4.6 Out of Band Conducted Emissions .....	27
4.7 Field Strength Calculation .....	32
4.8 Transmitter Radiated Emissions in Restricted Bands and Spurious Emissions .....	33
4.8.1 Radiated Emission Configuration Photograph .....	34
4.8.2 Radiated Emission Data .....	34
4.8.3 Transmitter Duty Cycle Calculation .....	40
4.9 AC Power Line Conducted Emission .....	42
4.9.1 AC Power Line Conducted Emission Configuration Photograph .....	42
4.9.2 AC Power Line Conducted Emission Data .....	42
<b>5.0 Equipment List</b> .....	48

Issuing Laboratory:  
Intertek Testing Services Hong Kong Limited

HKAS has accredited this laboratory (HOKLAS 005 – TEST) under HOKLAS for specific laboratory activities as listed in the HOKLAS directory of accredited laboratories.



## EXHIBIT 1 TEST RESULTS SUMMARY & STATEMENT OF COMPLIANCE

---

Test Report Number: 15040233HKG-001  
FCC ID: EW780-9968-00  
IC: 1135B-80996800

Page 3 of 48

## 1.0 Test Results Summary & Statement of Compliance

### 1.1 Summary of Test Results

Test Items	FCC Part 15 Section	RSS-210/ RSS-Gen <sup>#</sup> Section	Results	Details see section
Antenna Requirement	15.203	7.1.2 <sup>#</sup>	Pass	2.1
Max. Conducted Output Power	15.247(b)(1)	A8.4(2)	Pass	4.1
Max. 20dB RF Bandwidth	15.247(a)(1)(iii)	A8.1(d)	Pass	4.2
Min. No. of Hopping Frequencies	15.247(a)(1)(iii)	A8.1(d)	Pass	4.3
Min. Hopping Channel Carrier Frequency Separation	15.247(a)(1)	A8.1(b)	Pass	4.4
Average Time of Occupancy	15.247(a)(1)(iii)	A8.1(d)	Pass	4.5
Out of Band Antenna Conducted Emission	15.247(d)	A8.5	Pass	4.6
Radiated Emission in Restricted Bands and Spurious Emissions	15.247(d) & 15.109	2.2	Pass	4.8
AC Power Line Conducted Emission	15.207 & 15.107	7.2.4 <sup>#</sup>	Pass	4.9

Note: Pursuant to FCC Part 15 Section 15.215(c), the 20dB bandwidth of the emission was contained within the frequency band designated (mentioned as above) which the EUT operated. The effects, if any, from frequency sweeping, frequency hopping, other modulation techniques and frequency stability over expected variations in temperature and supply voltage were considered.

### 1.2 Statement of Compliance

The equipment under test is found to be complying with the following standards:

FCC Part 15, October 1, 2013 Edition  
RSS-210 Issue 8, December 2010  
RSS-Gen Issue 3, December 2010

Issuing Laboratory:  
Intertek Testing Services Hong Kong Limited

HKAS has accredited this laboratory (HOKLAS 005 – TEST) under HOKLAS for specific laboratory activities as listed in the HOKLAS directory of accredited laboratories.



## EXHIBIT 2 GENERAL DESCRIPTION

---

Test Report Number: 15040233HKG-001  
FCC ID: EW780-9968-00  
IC: 1135B-80996800

Page 5 of 48

## 2.0 General Description

### 2.1 Product Description

The VM341-2 BU is a 2.4GHz Frequency Hopping Spread Spectrum Baby Monitor - Baby Unit. It operates at frequency range of 2406MHz to 2475MHz. There are total 24 channels. The Baby Unit is powered by an adaptor 100-240VAC 50/60Hz 300mA to 6.0VDC 1000mA.

The antenna(s) used in the EUT is integral, and the test sample is a prototype.

For FCC, The Model(s): VM341 BU, VM304 and VM3x1-ab BU are the same as the Model: VM341-2 BU in electronics/ electrical designs including software & firmware, construction design/physical design/enclosure and PCB layout. The only differences between these models are color, cosmetic details, model number, number of baby unit and type packaging for marketing purpose. Suffix (x) indicates presenting different type packaging. Suffix (a) indicates any alphanumeric character or blank is presenting number of baby unit. Suffix (b) indicates any alphanumeric character or blank is presenting color of enclosure

For IC, The Model(s): VM341 BU and VM304 are the same as the Model: VM341-2 BU in electronics/electrical designs including software & firmware, construction design/physical design/enclosure and PCB layout. The only differences between these models are color, cosmetic details, model number, number of baby unit and type packaging for marketing purpose.

The circuit description and frequency hopping algorithm are saved with filename: descri.pdf.

### 2.2 Test Methodology

Both AC power line-conducted and radiated emission measurements were performed according to the procedures in ANSI C63.4 (2009). Preliminary radiated scans and all radiated measurements were performed in Open Area Test Sites. All Radiated tests were performed at an antenna to EUT distance of 3 meters, unless stated otherwise in the "**Justification Section**" of this Application. Antenna port conducted measurements were performed according to ANSI C63.10 (2009). All other measurements were made in accordance with the procedures in 47 CFR Part 2.

### 2.3 Test Facility

The open area test site, AC power line conducted measurement facility and antenna port conducted measurement facility used to collect the radiated data, AC Power Line conducted data, and conductive data are at Fo Tan office of Intertek Testing Services Hong Kong Ltd., which is located at Workshop No.3 G/F, World-Wide Industrial Centre, 43-47 Shan Mei Street, Fo Tan, Shatin, New Territories, Hong Kong. This test facility

Issuing Laboratory:  
**Intertek Testing Services Hong Kong Limited**

HKAS has accredited this laboratory (HOKLAS 005 – TEST) under HOKLAS for specific laboratory activities as listed in the HOKLAS directory of accredited laboratories.



and site measurement data have been fully placed on file with FCC and Industry Canada.



Issuing Laboratory:  
Intertek Testing Services Hong Kong Limited

HKAS has accredited this laboratory (HOKLAS 005 – TEST) under HOKLAS for specific laboratory activities as listed in the HOKLAS directory of accredited laboratories.



## EXHIBIT 3 SYSTEM TEST CONFIGURATION

---

Test Report Number: 15040233HKG-001  
FCC ID: EW780-9968-00  
IC: 1135B-80996800

Page 8 of 48

**Intertek Testing Services Hong Kong Ltd.**  
2/F., Garment Centre, 576 Castle Peak Road, Kowloon, Hong Kong.  
Tel: (852) 2173 8888 Fax: (852) 2785 5487 Website: [www.hk.intertek-etlsemko.com](http://www.hk.intertek-etlsemko.com)

### 3.0 **System Test Configuration**

#### 3.1 Justification

For radiated emissions testing, the equipment under test (EUT) was setup to transmit / receive continuously to simplify the measurement methodology. Care was taken to ensure proper power supply voltages during testing. During testing, all cables (if any) were manipulated to produce worst case emissions.

The Baby Unit was powered by a 100-240VAC to 6.0VDC 1000mA adaptor.

For the measurements, the EUT was attached to a plastic stand if necessary and placed on the wooden turntable. If the base unit attached to peripherals, they were connected and operational (as typical as possible). The parent unit was remotely located as far from the antenna and the base as possible to ensure full power transmission from the baby unit. Else, the base was wired to transmit full power with modulation.

The signal was maximized through rotation and placement in the three orthogonal axes. The antenna height and polarization were varied during the search for maximum signal level. The antenna height was varied from 1 to 4 meters. Radiated emissions were taken at three meters unless the signal level was too low for measurement at that distance. If necessary, a pre-amplifier was used and/or the test was conducted at a closer distance.

For any intentional radiator powered by AC power line, measurements of the radiated signal level of the fundamental frequency component of the emission was performed with the supply voltage varied between 85% and 115% of the nominal rated supply voltage.

For transmitter radiated measurement, the spectrum analyzer resolution bandwidth was 100 kHz for frequencies below 1000 MHz. The resolution bandwidth was 1 MHz for frequencies above 1000 MHz.

Radiated emission measurement for transmitter were performed from the lowest radio frequency signal generated in the device which is greater than 9 kHz to the tenth harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower.

Emission that are directly caused by digital circuits in the transmit path and transmitter portion were measured, and the limit are according to FCC Part 15 Section 15.209. Digital circuitry used to control additional functions other than the operation of the transmitter is subject to FCC Part Section 15.109 Limits.

### 3.1 Justification - Cont'd

Detector function for radiated emissions was in peak mode. Average readings, when required, were taken by measuring the duty cycle of the equipment under test and subtracting the corresponding amount in dB from the measured peak readings. A detailed description for the calculation of the average factor can be found in section 4.8.3.

For AC line conducted emission test, the EUT along with its peripherals were placed on a 1.0m(W)x1.5m(L) and 0.8m in height wooden table and the EUT was adjusted to maintain a 0.4 meter space from a vertical reference plane. The EUT was connected to power mains through a line impedance stabilization network (LISN), which provided 50ohm coupling impedance for measuring instrument. The LISN housing, measuring instrument case, reference ground plane, and vertical ground plane were bounded together. The excess power cable between the EUT and the LISN was bundled.

All connecting cables of EUT and peripherals were manipulated to find the maximum emission.

All relevant operation modes have been tested, and the worst case data is included in this report.

### 3.2 EUT Exercising Software

The EUT exercise program used during radiated and conducted testing was designed to exercise the various system components in a manner similar to a typical use.

### 3.3 Details of EUT and Description of Accessories

#### Details of EUT:

An AC adaptor (provided with the unit) was used to power the device. Their description are listed below.

- (1) An AC adaptor (100-240VAC 50/60Hz 300mA to 6.0VDC 1000mA, Model: S006MU0600100, Brand: Ten Pao) (Supplied by Client)

#### Description of Accessories:

- (1) Parent Unit, Model: VM341 PU, FCC ID: EW780-9395-01 (Provided by Client)

### 3.4 Measurement Uncertainty

When determining of the test conclusion, the Measurement Uncertainty of test has been considered.

Uncertainty and Compliance - Unless the standard specifically states that measured values are to be extended by the measurement uncertainty in determining compliance, all compliance determinations are based on the actual measured value.

Issuing Laboratory:  
**Intertek Testing Services Hong Kong Limited**

HKAS has accredited this laboratory (HOKLAS 005 – TEST) under HOKLAS for specific laboratory activities as listed in the HOKLAS directory of accredited laboratories.



**EXHIBIT 4**  
**TEST RESULTS**

#### 4.0 Test Results

##### 4.1 Maximum Conducted Output Power at Antenna Terminals

- The antenna power of the EUT was connected to the input of a power meter. Power was read directly and cable loss correction was added to the reading to obtain power at the EUT antenna terminals.
- The antenna port of the EUT was connected to the input of a spectrum analyzer. The analyzer was set for RBW>20dB bandwidth and power was read directly in dBm. External attenuation and cable loss were compensated for using the OFFSET function of the analyser.

Antenna Gain = 2dBi			
Frequency (MHz)		Output in dBm	Output in mW
Low Channel:	2406	18.55	71.6
Middle Channel:	2442	18.49	70.6
High Channel:	2475	18.52	71.1

Cable loss : 0.5 dB External Attenuation : 10 dB

Cable loss, external attenuation:  included in OFFSET function  
 added to SA raw reading

dBm max. output level = 18.55 dBm

Limits:

- 0.125W (21dBm) for antennas with gains of 6dBi or less
- 0.25W (24dBm) for antennas with gains of 6dBi or less
- 1W (30dBm) for antennas with gains of 6dBi or less
- \_\_\_W (\_\_\_dBm) for antennas with gains more than 6dBi

The plots of conducted output power are saved as below.


Issuing Laboratory:  
Intertek Testing Services Hong Kong Limited

HKAS has accredited this laboratory (HOKLAS 005 – TEST) under HOKLAS for specific laboratory activities as listed in the HOKLAS directory of accredited laboratories.




## Plots of conducted output power

### Lowest Channel

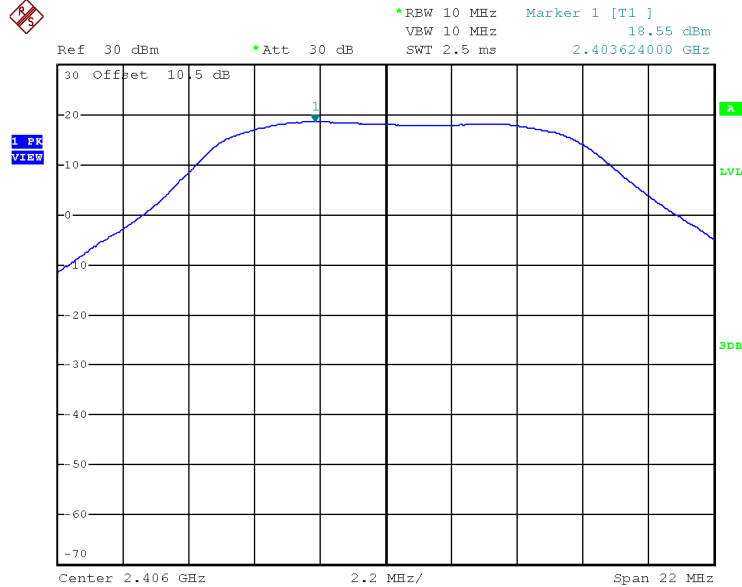

Date: 13.APR.2015 15:31:41

### Middle Channel

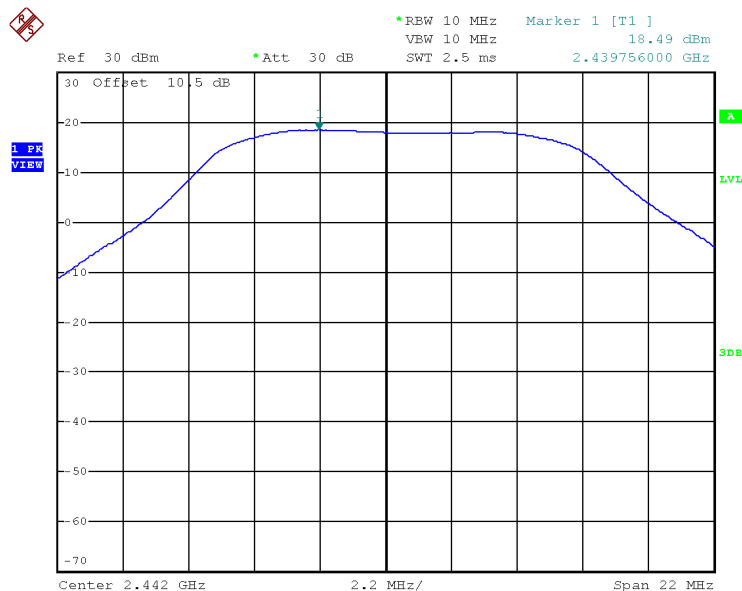

Date: 13.APR.2015 15:33:49


Issuing Laboratory:  
Intertek Testing Services Hong Kong Limited

HKAS has accredited this laboratory (HOKLAS 005 – TEST) under HOKLAS for specific laboratory activities as listed in the HOKLAS directory of accredited laboratories.



## Plots of conducted output power

### Highest Channel

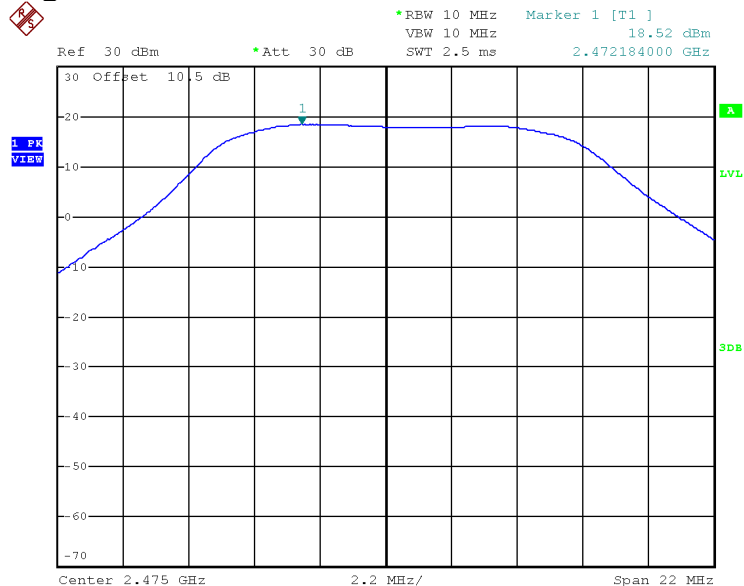

Date: 13.APR.2015 15:34:44



#### 4.2 Maximum 20 dB RF Bandwidth

The antenna port of the EUT was connected to the input of a spectrum analyzer. Analyzer RES BW was chosen so that the display was a result of the hopping channel modulation. For each RF output channel investigated, the spectrum analyzer center frequency was set to the channel carrier. A PEAK output reading was taken, a DISPLAY line was drawn 20 dB lower than PEAK level. The 20 dB bandwidth was determined from where the channel output spectrum intersected the display line.

Frequency (MHz)	20 dB Bandwidth (kHz)
Low Channel: 2406	4320
Middle Channel: 2442	4380
High Channel: 2475	4280

#### Limits

- $\leq 500\text{kHz}$  for 902-928MHz
- N/A for 2400-2483.5MHz
- $\leq 1\text{MHz}$  for 5725-5850MHz


The plots of 20dB RF bandwidth and occupied bandwidth are saved as below.

Issuing Laboratory:  
Intertek Testing Services Hong Kong Limited

HKAS has accredited this laboratory (HOKLAS 005 – TEST) under HOKLAS for specific laboratory activities as listed in the HOKLAS directory of accredited laboratories.




Plots of 20dB RF bandwidth  
Lowest Channel

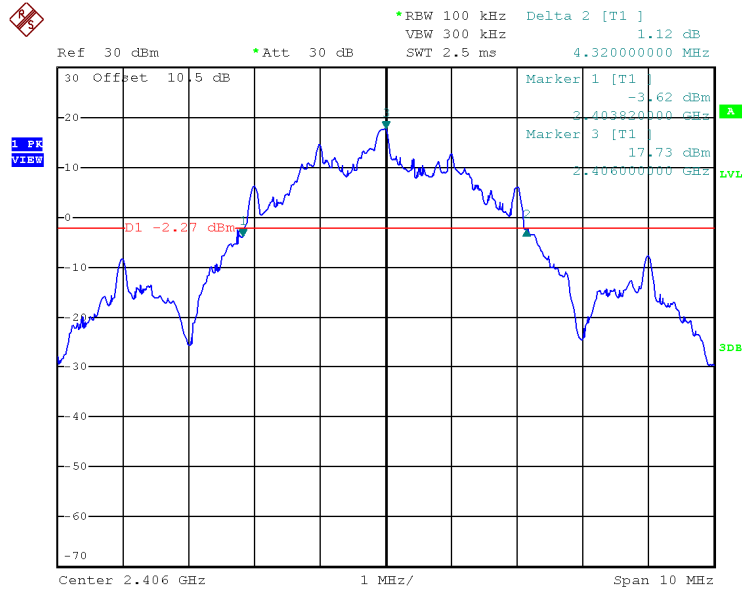

Date: 13.APR.2015 15:50:42

Middle Channel

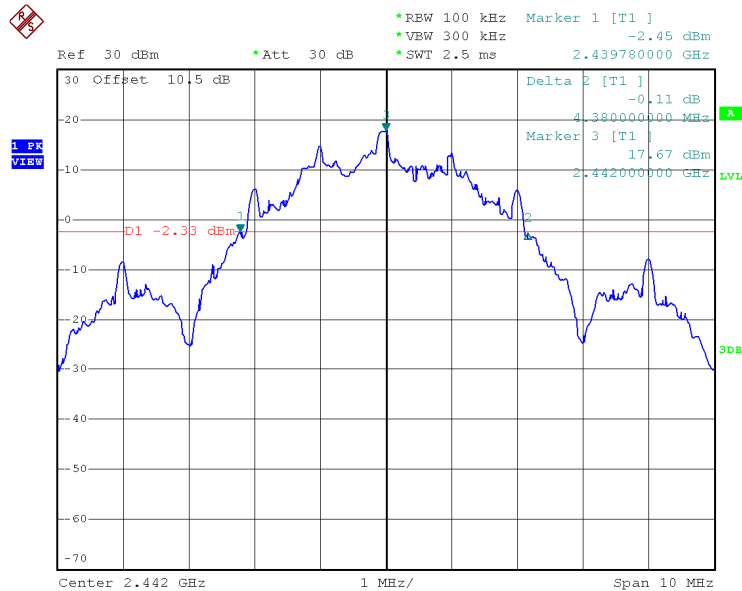


Date: 20.APR.2015 16:30:57

Issuing Laboratory:  
Intertek Testing Services Hong Kong Limited

HKAS has accredited this laboratory (HOKLAS 005 – TEST) under HOKLAS for specific laboratory activities as listed in the HOKLAS directory of accredited laboratories.



### Highest Channel

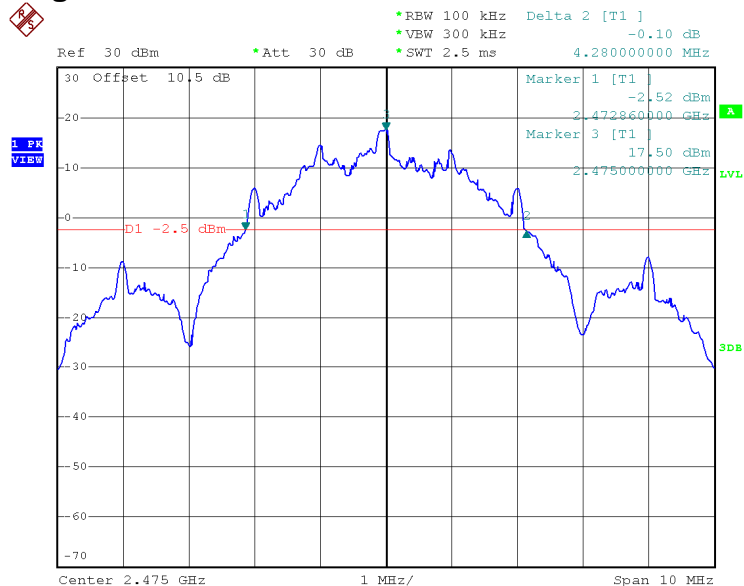

Date: 20.APR.2015 16:41:18

### 4.3 Minimum Number of Hopping Frequencies

With the analyzer set to MAX HOLD readings were taken for 2-3 minutes in each band. The channel peaks so recorded were added together, and the total number compared to the minimum number of channels required in the regulation.

No. of hopping channels (Talk and Camera On)	16
---	----


Minimum Requirements:

- at least 50 hopping channels for 902MHz-928MHz (20 dB bandwidth of hopping channel < 250kHz)
- at least 25 hopping channels for 902MHz-928MHz (20 dB bandwidth of hopping channel  $\geq$  250kHz)
- at least 15 hopping channels for 2400MHz-2483.5MHz.  
-----
- at least 75 hopping channels for 5725MHz-5850MHz.


The plots of number of hopping frequencies are saved as below.

## Plots of number of hopping frequencies

### Plot A

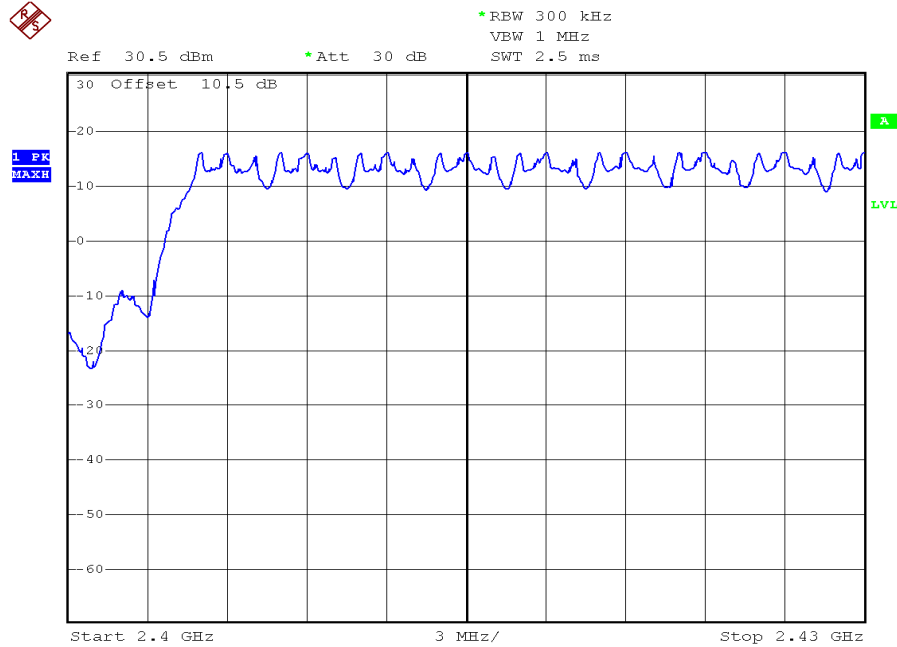

### Plot B

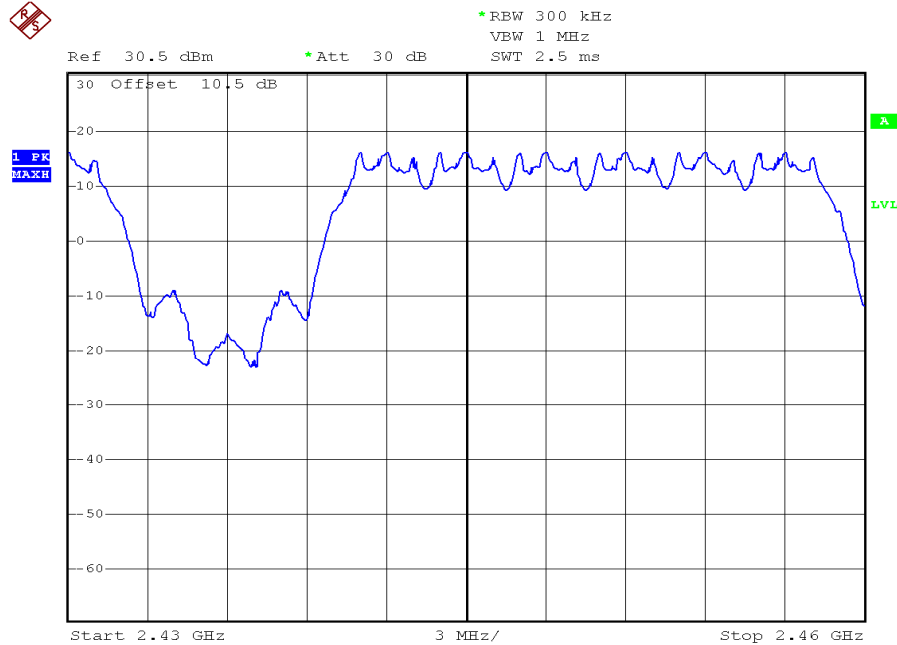


Issuing Laboratory:  
Intertek Testing Services Hong Kong Limited

HKAS has accredited this laboratory (HOKLAS 005 – TEST) under HOKLAS for specific laboratory activities as listed in the HOKLAS directory of accredited laboratories.



### Plots of number of hopping frequencies

#### Plot C

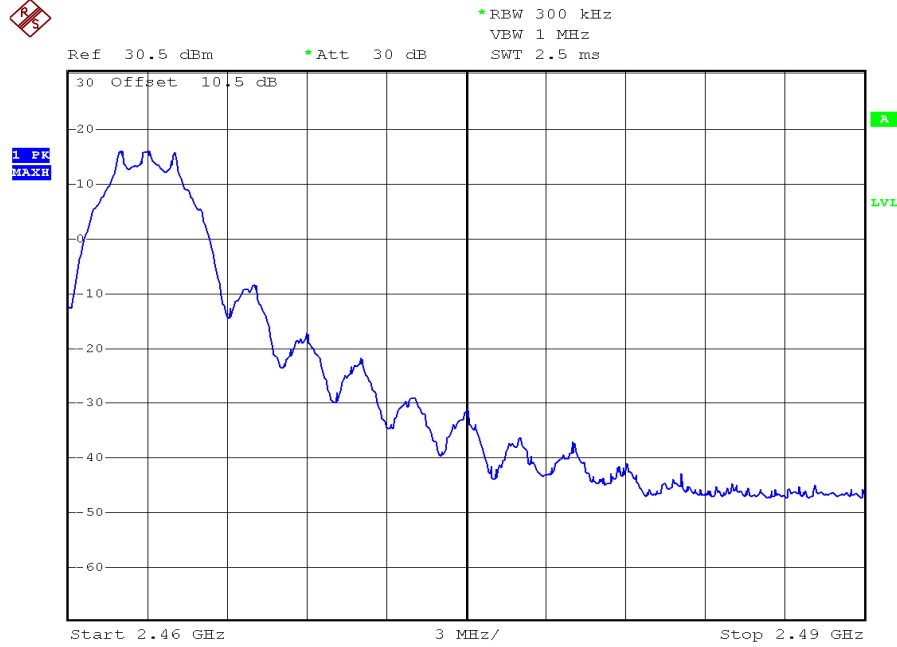

#### 4.4 Minimum Hopping Channel Carrier Frequency Separation

Using the DELTA MARKER function of the analyzer, the frequency separation between two adjacent channels was measured and met the requirement.

Channel Separation (Channel <u>10</u> and Channel <u>11</u> )	3020 kHz
---	----------

Limits:


The channel separation must be larger than:

- 25 kHz
- 20 dB bandwidth of hopping channel: \_\_\_\_Hz
- 2/3 of 20dB bandwidth of hopping channel: 2920KHz

The plot(s) of hopping channel carrier frequency separation is saved as below.

## Plots of hopping channel carrier frequency separation

### Between channel 10 and channel 11

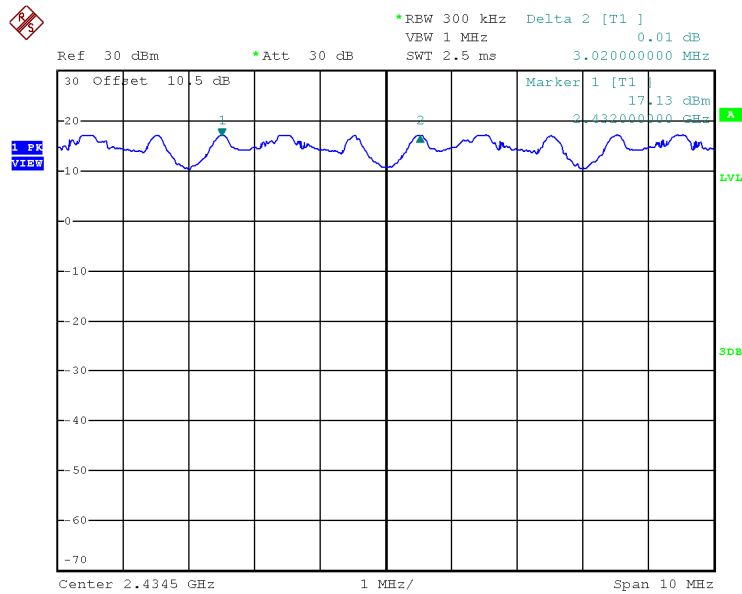

Date: 13.APR.2015 17:45:47



#### 4.5 Average Channel Occupancy Time

The spectrum analyzer center frequency was set to one of the known hopping channels. The SWEEP was set to 10ms, the SPAN was set to ZERO SPAN, and the TRIGGER was set to VIDEO. The time duration of the transmission so captured was measured with the MARKER DELTA function.

The SWEEP was then set to the time required by the regulation (20 seconds for 902-928 MHz devices, if the 20dB bandwidth is less than 250kHz, 10 seconds for 902-928 MHz if the 20dB bandwidth is or greater than 250kHz, “0.4 seconds x Number of hopping channels employed” seconds for 2400-2483.5 MHz, 30 seconds for 5725-5850 MHz). The analyzer was set to SINGLE SWEEP, the total ON time was added and compared against the limit (0.4 seconds).

Baby Unit (worst-case: )	
Average Occupancy Time = $0.6\text{ms} \times 7 \times 2 \times 38$	319.2 ms

Limits:


Average 0.4 seconds maximum occupancy in:

- 6.4 seconds (0.4 sec. x 16) for 2400MHz-2483.5MHz
- 20 seconds for 902MHz-928MHz  $\geq$  50 hopping channels
- 10 seconds for 902MHz-928MHz  $\geq$  25 hopping channels
- 30 seconds for 5725-5850MHz

The plots of average channel occupancy time are saved as below.


## Plots of average channel occupancy time

### Plot A, Tx time for one pluse

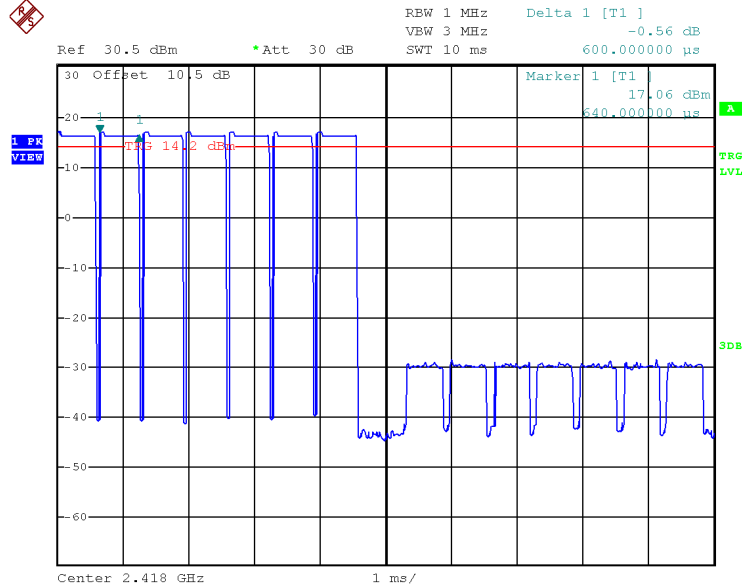

Date: 14.APR.2015 10:39:38

### Plot B, No. of Tx in 300ms

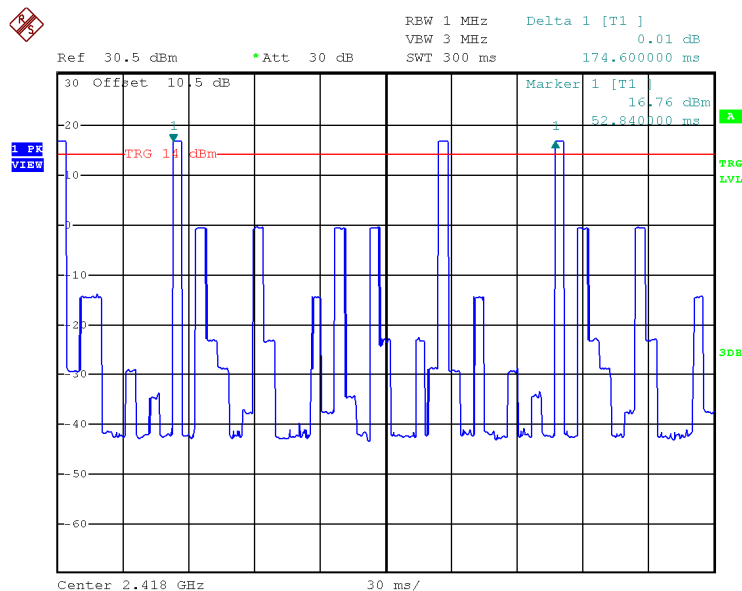

Date: 14.APR.2015 10:52:14


Issuing Laboratory:  
Intertek Testing Services Hong Kong Limited

HKAS has accredited this laboratory (HOKLAS 005 – TEST) under HOKLAS for specific laboratory activities as listed in the HOKLAS directory of accredited laboratories.



## Plots of average channel occupancy time

### Plot C, No. of Tx in 6.4s

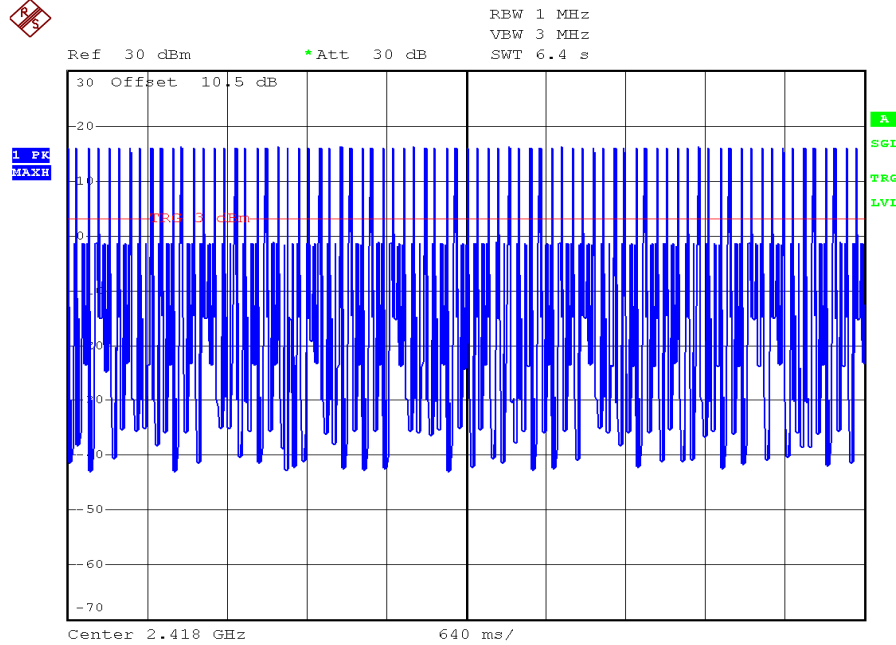

#### 4.6 Out of Band Conducted Emissions

In any 100 kHz bandwidth outside the EUT passband, the RF power produced by the modulation products of the spreading sequence, the information sequence, and the carrier frequency shall be at least 20 dB below that of the maximum in-band 100 kHz emission.

The plot(s) of bandedge compliance is shown the worst-case which has been already considered between enable and disable the hopping function of the EUT.

Furthermore, delta measurement technique for measuring bandedge emissions was incorporated in the test of the edge at 2483.5MHz.


**Limits:**

All spurious emission and up to the tenth harmonic was measured and they were found to be at least 20 dB below the highest level of the desired power in the passband.

The plots of out of band conducted emissions and bandedge are saved as below.


## Plots of out of band conducted emissions

### Lowest channel, Plot 1

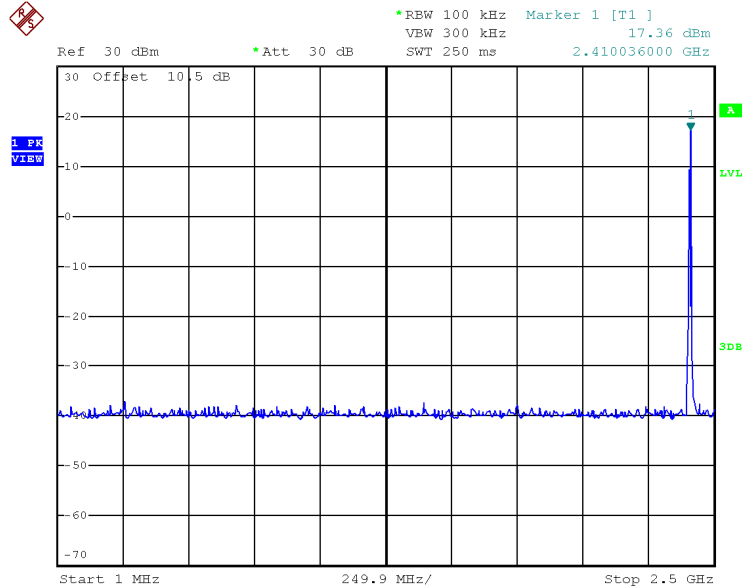

Date: 13.APR.2015 16:13:39


### Lowest channel, Plot 2

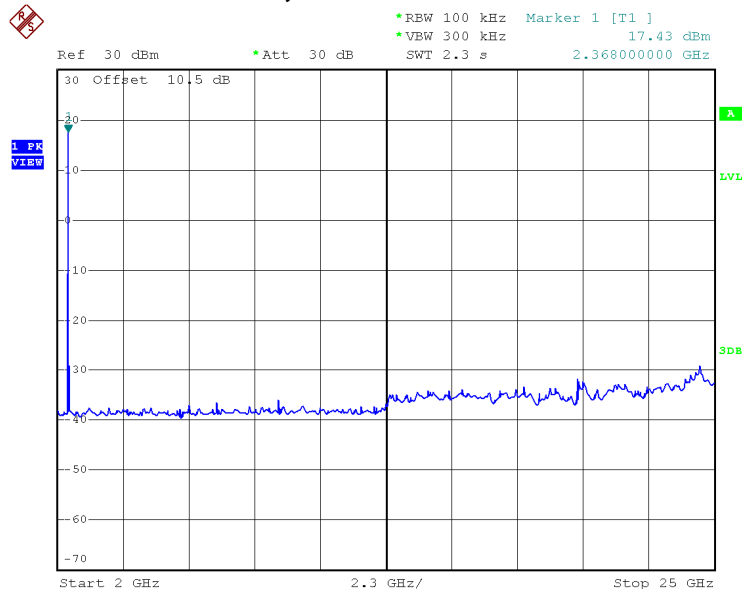

Date: 20.APR.2015 17:07:43


## Plots of out of band conducted emissions

### Middle channel, Plot 1

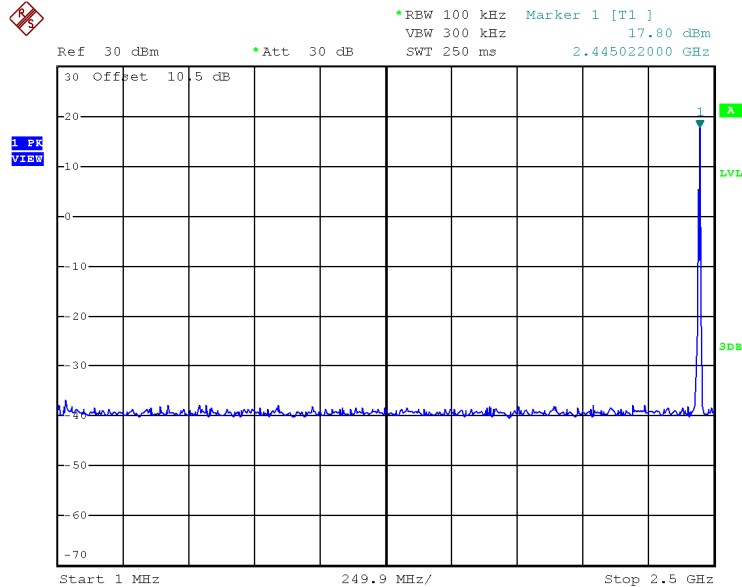

Date: 13.APR.2015 16:17:14


### Middle channel, Plot 2

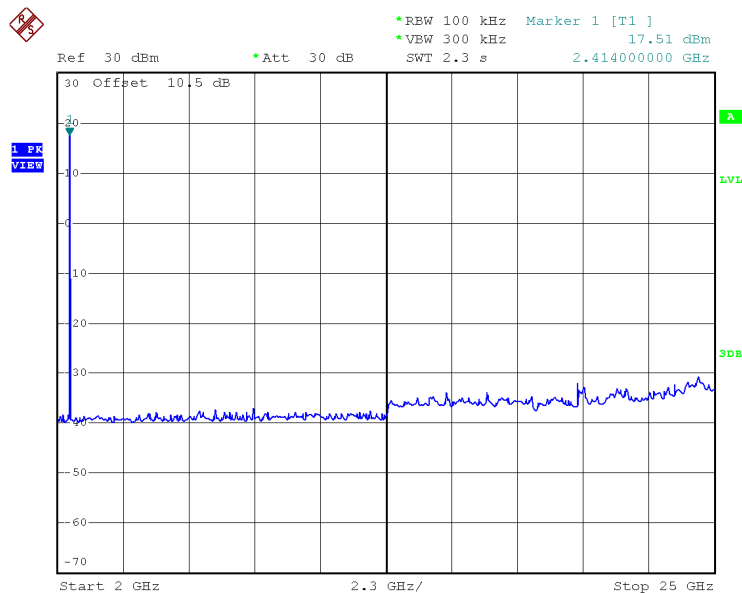

Date: 20.APR.2015 17:09:39


## Plots of out of band conducted emissions

### Highest channel, Plot 1

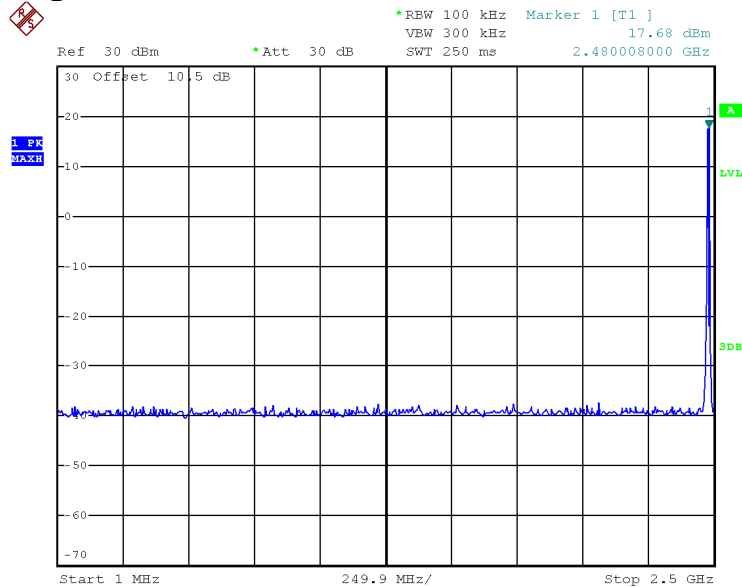

Date: 13.APR.2015 16:20:06

### Highest channel, Plot 2

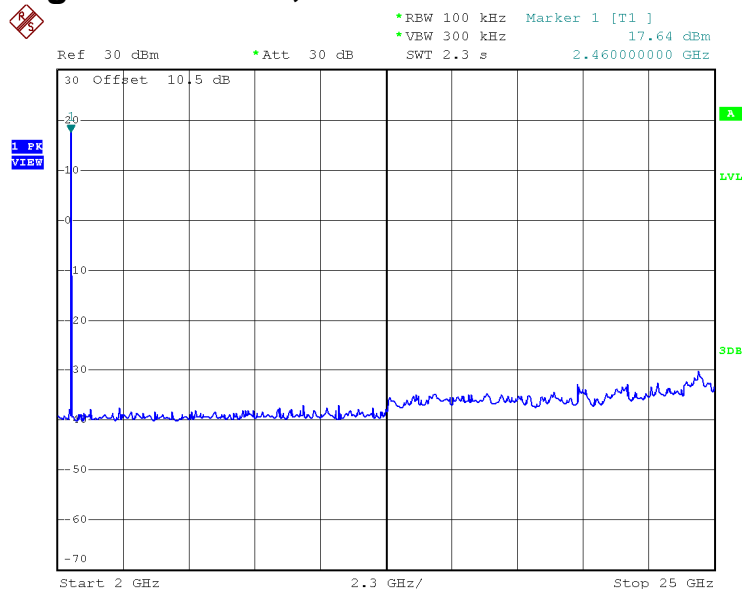


Date: 20.APR.2015 17:10:50

Issuing Laboratory:  
Intertek Testing Services Hong Kong Limited

HKAS has accredited this laboratory (HOKLAS 005 – TEST) under HOKLAS for specific laboratory activities as listed in the HOKLAS directory of accredited laboratories.




Plots of bandedge , Plot 1

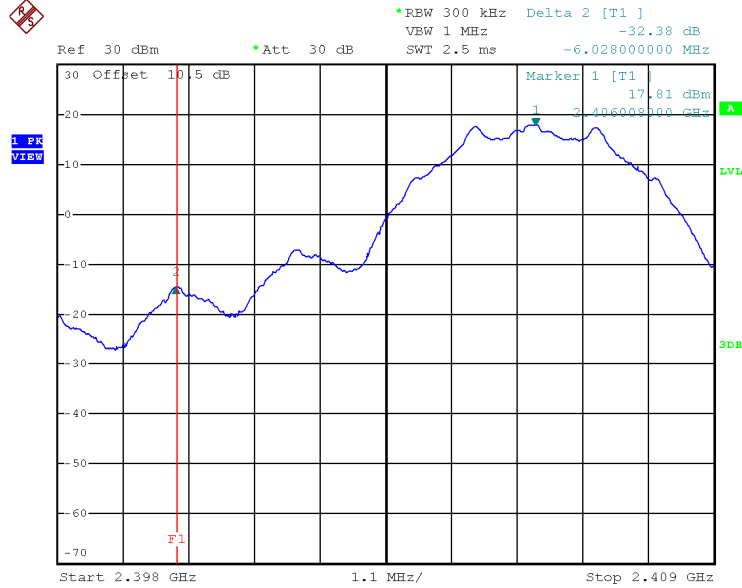

Date: 13.APR.2015 16:37:55

Plots of bandedge , Plot 2

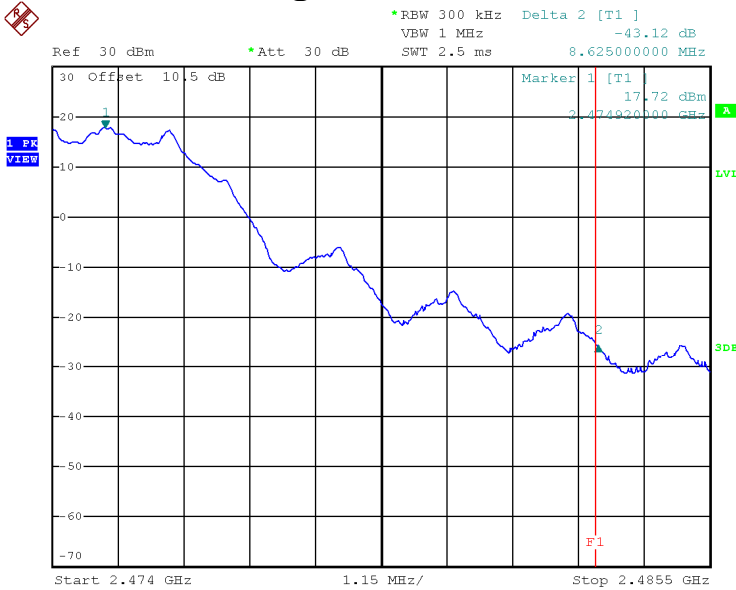

Date: 13.APR.2015 16:44:45



#### 4.7 Field Strength Calculation

The field strength is calculated by adding the reading on the Spectrum Analyzer to the factors associated with preamplifiers (if any), antennas, cables, pulse desensitization and average factors (when specified limit is in average and measurements are made with peak detectors). A sample calculation is included below.

$$FS = RA + AF + CF - AG + PD + AV$$

where

- FS = Field Strength in dB $\mu$ V/m
- RA = Receiver Amplitude (including preamplifier) in dB $\mu$ V
- CF = Cable Attenuation Factor in dB
- AF = Antenna Factor in dB
- AG = Amplifier Gain in dB
- PD = Pulse Desensitization in dB
- AV = Average Factor in -dB

In the radiated emission table which follows, the reading shown on the data table may reflect the preamplifier gain. An example of the calculations, where the reading does not reflect the preamplifier gain, follows:

$$FS = RA + AF + CF - AG + PD + AV$$

#### Example

Assume a receiver reading of 62.0 dB $\mu$ V is obtained. The antenna factor of 7.4 dB and cable factor of 1.6 dB is added. The amplifier gain of 29 dB is subtracted. The pulse desensitization factor of the spectrum analyzer was 0 dB, and the resultant average factor was -10 dB. The net field strength for comparison to the appropriate emission limit is 32 dB $\mu$ V/m. This value in dB $\mu$ V/m was converted to its corresponding level in  $\mu$ V/m.

$$\begin{aligned} RA &= 62.0 \text{ dB}\mu\text{V} \\ AF &= 7.4 \text{ dB} \\ CF &= 1.6 \text{ dB} \\ AG &= 29 \text{ dB} \\ PD &= 0 \text{ dB} \\ AV &= -10 \text{ dB} \\ FS &= 62 + 7.4 + 1.6 - 29 + 0 + (-10) = 32 \text{ dB}\mu\text{V/m} \end{aligned}$$

$$\text{Level in } \mu\text{V/m} = \text{Common Antilogarithm} [(32 \text{ dB}\mu\text{V/m})/20] = 39.8 \mu\text{V/m}$$

Issuing Laboratory:  
**Intertek Testing Services Hong Kong Limited**

HKAS has accredited this laboratory (HOKLAS 005 – TEST) under HOKLAS for specific laboratory activities as listed in the HOKLAS directory of accredited laboratories.



#### 4.8 Transmitter Radiated Emissions in Restricted Bands and Spurious Emissions

Data is included of the worst case configuration (the configuration which resulted in the highest emission levels). A sample calculation, configuration photographs and data tables of the emissions are included.

The data on the following pages list the significant emission frequencies, the limit and the margin of compliance.

Issuing Laboratory:  
Intertek Testing Services Hong Kong Limited

HKAS has accredited this laboratory (HOKLAS 005 – TEST) under HOKLAS for specific laboratory activities as listed in the HOKLAS directory of accredited laboratories.



#### 4.8.1 Radiated Emission Configuration Photograph

Worst Case Restricted Band Radiated Emission  
at

385.280 MHz

The worst case radiated emission configuration photographs are attached in the Appendix and saved with filename: config photos.pdf

#### 4.8.2 Radiated Emission Data

The data in tables 1-4 list the significant emission frequencies, the limit and the margin of compliance.

Judgement -

Passed by 2.5 dB margin

Mode: TX-Channel 01

Table 1

**Radiated Emission Data**

Polarization	Frequency (MHz)	Reading (dB $\mu$ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Average Factor (dB)	Calculated at 3m (dB $\mu$ V/m)	Average Limit at 3m (dB $\mu$ V/m)	Margin (dB)
V	<b>4812.000</b>	<b>57.5</b>	<b>33</b>	<b>34.9</b>	<b>21.5</b>	<b>37.9</b>	<b>54.0</b>	<b>-16.1</b>
V	<b>12030.000</b>	<b>50.5</b>	<b>33</b>	<b>40.5</b>	<b>21.5</b>	<b>36.5</b>	<b>54.0</b>	<b>-17.5</b>

Polarization	Frequency (MHz)	Reading (dB $\mu$ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dB $\mu$ V/m)	Peak Limit at 3m (dB $\mu$ V/m)	Margin (dB)
V	<b>4812.000</b>	<b>57.5</b>	<b>33</b>	<b>34.9</b>	<b>59.4</b>	<b>74.0</b>	<b>-14.6</b>
V	<b>12030.000</b>	<b>50.5</b>	<b>33</b>	<b>40.5</b>	<b>58.0</b>	<b>74.0</b>	<b>-16.0</b>

- NOTES:
1. Peak detector is used for the emission measurement.
  2. All measurements were made at 3 meters. Radiated emissions not detected at the 3-meter distance were measured at 0.3-meter and an inverse proportional extrapolation was performed to compare the signal level to the 3-meter limit. No other radiated emissions than those reported were detected at a test distance of 0.3-meter.
  3. Negative value in the margin column shows emission below limit.
  4. Horn antenna is used for the emission over 1000MHz.
  5. For the measurement of radiated emission, summation method was used which numerical integrating (in terms of linear power) over the transmitter occupied bandwidth.
  6. For the linear power measurement, data in 1MHz spacing was collected by spectrum analyzer with 1MHz resolution bandwidth.
  7. Emission (the row indicated by **bold italic**) within the restricted band meets the requirement of FCC Part 15 Section 15.205 / RSS-210 Section 2.2.

Mode: TX-Channel 13

Table 2

**Radiated Emission Data**

Polarization	Frequency (MHz)	Reading (dBµV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Average Factor (dB)	Calculated at 3m (dBµV/m)	Average Limit at 3m (dBµV/m)	Margin (dB)
V	<b>4884.000</b>	<b>56.9</b>	<b>33</b>	<b>34.9</b>	<b>21.5</b>	<b>37.3</b>	<b>54.0</b>	<b>-16.7</b>
V	<b>7326.000</b>	<b>46.8</b>	<b>33</b>	<b>37.9</b>	<b>21.5</b>	<b>30.2</b>	<b>54.0</b>	<b>-23.8</b>
V	<b>12210.000</b>	<b>51.2</b>	<b>33</b>	<b>40.5</b>	<b>21.5</b>	<b>37.2</b>	<b>54.0</b>	<b>-16.8</b>

Polarization	Frequency (MHz)	Reading (dBµV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dBµV/m)	Peak Limit at 3m (dBµV/m)	Margin (dB)
V	<b>4884.000</b>	<b>56.9</b>	<b>33</b>	<b>34.9</b>	<b>58.8</b>	<b>74.0</b>	<b>-15.2</b>
V	<b>7326.000</b>	<b>46.8</b>	<b>33</b>	<b>37.9</b>	<b>51.7</b>	<b>74.0</b>	<b>-22.3</b>
V	<b>12210.000</b>	<b>51.2</b>	<b>33</b>	<b>40.5</b>	<b>58.7</b>	<b>74.0</b>	<b>-15.3</b>

- NOTES:
1. Peak detector is used for the emission measurement.
  2. All measurements were made at 3 meters. Radiated emissions not detected at the 3-meter distance were measured at 0.3-meter and an inverse proportional extrapolation was performed to compare the signal level to the 3-meter limit. No other radiated emissions than those reported were detected at a test distance of 0.3-meter.
  3. Negative value in the margin column shows emission below limit.
  4. Horn antenna is used for the emission over 1000MHz.
  5. For the measurement of radiated emission, summation method was used which numerical integrating (in terms of linear power) over the transmitter occupied bandwidth.
  6. For the linear power measurement, data in 1MHz spacing was collected by spectrum analyzer with 1MHz resolution bandwidth.
  7. Emission (the row indicated by **bold italic**) within the restricted band meets the requirement of FCC Part 15 Section 15.205 / RSS-210 Section 2.2.

Mode: TX-Channel 24

Table 3

**Radiated Emission Data**

Polarization	Frequency (MHz)	Reading (dBµV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Average Factor (dB)	Calculated at 3m (dBµV/m)	Average Limit at 3m (dBµV/m)	Margin (dB)
V	**2475.000	116.4	33	29.4	21.5	91.3		
V	<b>4950.000</b>	<b>58.1</b>	<b>33</b>	<b>34.9</b>	<b>21.5</b>	<b>38.5</b>	<b>54.0</b>	<b>-15.5</b>
V	<b>7425.000</b>	<b>47.0</b>	<b>33</b>	<b>37.9</b>	<b>21.5</b>	<b>30.4</b>	<b>54.0</b>	<b>-23.6</b>
V	<b>12375.000</b>	<b>51.4</b>	<b>33</b>	<b>40.5</b>	<b>21.5</b>	<b>37.4</b>	<b>54.0</b>	<b>-16.6</b>

Polarization	Frequency (MHz)	Reading (dBµV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dBµV/m)	Peak Limit at 3m (dBµV/m)	Margin (dB)
V	**2475.000	116.4	33	29.4	112.8		
V	<b>4950.000</b>	<b>58.1</b>	<b>33</b>	<b>34.9</b>	<b>60.0</b>	<b>74.0</b>	<b>-14.0</b>
V	<b>7425.000</b>	<b>47.0</b>	<b>33</b>	<b>37.9</b>	<b>51.9</b>	<b>74.0</b>	<b>-22.1</b>
V	<b>12375.000</b>	<b>51.4</b>	<b>33</b>	<b>40.5</b>	<b>58.9</b>	<b>74.0</b>	<b>-15.1</b>

- NOTES: 1. Peak detector is used for the emission measurement.
2. All measurements were made at 3 meters. Radiated emissions not detected at the 3-meter distance were measured at 0.3-meter and an inverse proportional extrapolation was performed to compare the signal level to the 3-meter limit. No other radiated emissions than those reported were detected at a test distance of 0.3-meter.
3. Negative value in the margin column shows emission below limit.
4. Horn antenna is used for the emission over 1000MHz.
5. For the measurement of radiated emission, summation method was used which numerical integrating (in terms of linear power) over the transmitter occupied bandwidth.
6. For the linear power measurement, data in 1MHz spacing was collected by spectrum analyzer with 1MHz resolution bandwidth.
7. Emission (the row indicated by **bold italic**) within the restricted band meets the requirement of FCC Part 15 Section 15.205 / RSS-210 Section 2.2.
- \*\* Fundamental emission was measured for determining band-edge compliance of using delta measurement technique. Peak level and

Issuing Laboratory:  
**Intertek Testing Services Hong Kong Limited**

HKAS has accredited this laboratory (HOKLAS 005 – TEST) under HOKLAS for specific laboratory activities as listed in the HOKLAS directory of accredited laboratories.



average level at the upper bandedge were 69.7dB $\mu$ V/m and 48.2dB $\mu$ V/m respectively.

Mode: Talk with lullaby

Table 4

**Radiated Emission Data**

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-amp (dB)	Antenna Factor (dB)	Net at 3m (dBμV/m)	Limit at 3m (dBμV/m)	Margin (dB)
V	96.098	32.8	16	12.0	28.8	43.5	-14.7
<b>V</b>	<b>125.812</b>	<b>40.0</b>	<b>16</b>	<b>14.0</b>	<b>38.0</b>	<b>43.5</b>	<b>-5.5</b>
H	144.334	37.4	16	14.0	35.4	43.5	-8.1
V	179.386	33.5	16	20.0	37.5	43.5	-6.0
V	216.782	37.7	16	17.0	38.7	46.0	-7.3
H	289.010	35.8	16	22.0	41.8	46.0	-4.2
H	312.179	33.7	16	23.0	40.7	46.0	-5.3
H	385.280	35.5	16	24.0	43.5	46.0	-2.5
V	528.245	29.6	16	27.0	40.6	46.0	-5.4
V	625.078	26.3	16	29.0	39.3	46.0	-6.7
V	675.208	25.6	16	29.0	38.6	46.0	-7.4

- NOTES: 1. Peak detector is used for the emission measurement.
2. All measurements were made at 3 meters. Radiated emissions not detected at the 3-meter distance were measured at 0.3-meter and an inverse proportional extrapolation was performed to compare the signal level to the 3-meter limit. No other radiated emissions than those reported were detected at a test distance of 0.3-meter.
3. Negative value in the margin column shows emission below limit.
4. Emission (the row indicated by **bold italic**) within the restricted band meets the requirement of FCC Part 15 Section 15.205 / RSS-210 Section 2.2.



Issuing Laboratory:  
Intertek Testing Services Hong Kong Limited

HKAS has accredited this laboratory (HOKLAS 005 – TEST) under HOKLAS for specific laboratory activities as listed in the HOKLAS directory of accredited laboratories.




#### 4.8.3 Transmitter Duty Cycle Calculation

$$\begin{aligned}\text{Duty Cycle (DC)} &= \text{Maximum On time in 100ms/100ms} \\ &= (0.6\text{ms} \times 7 \times 2)/100\text{ms} \\ \text{Duty Cycle (DC)} &= \text{duration of one cycle/ effective period of the cycle} \\ \text{Average Factor (AF)} &= 20 \log (\text{DC}) \\ &= 20 * \log (0.084) \\ &= -21.5\text{dB}\end{aligned}$$

The EUT antenna output port was connected to the input of the spectrum analyzer. The analyzer center frequency was set to EUT RF channel carrier. The SPAN function on the analyzer was set to ZERO. The transmitter ON time was determined from the resultant time-amplitude display.


Please refer to the attached plot(s) for more details.

## Plots of transmitter On time Plot A, Tx time for one pulse

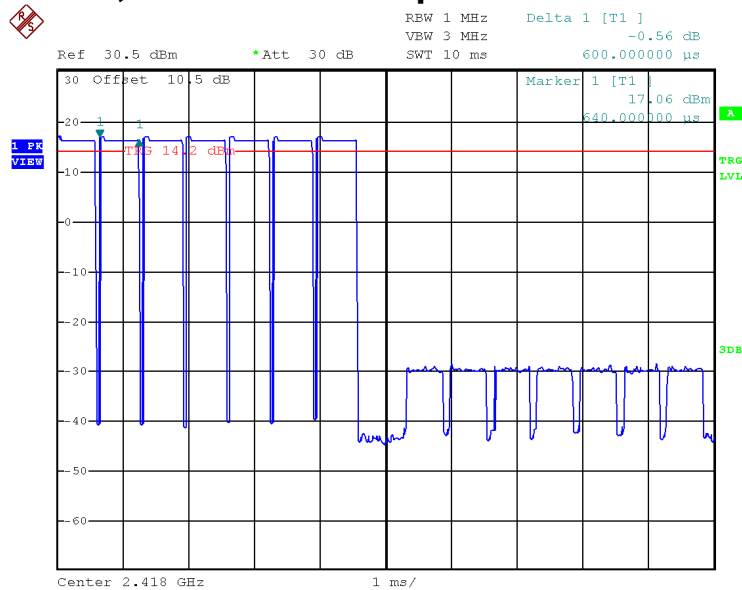

Date: 14.APR.2015 10:39:38

## Plot B, Tx time for 100ms

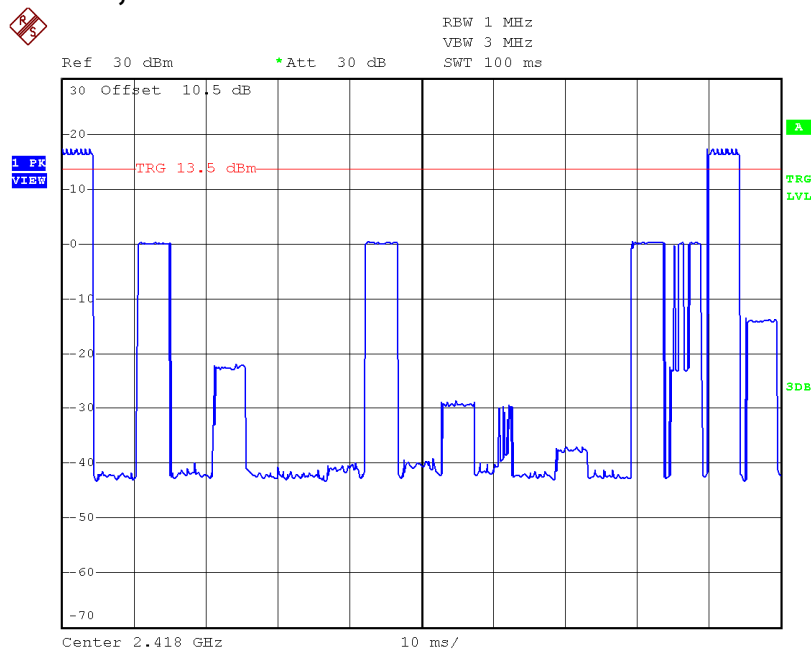

Date: 20.APR.2015 17:25:04

#### 4.9 AC Power Line Conducted Emission

- Not applicable – EUT is only powered by battery for operation.
- EUT connects to AC power line. Emission Data is listed in following pages.
  
- Base Unit connects to AC power line and has transmission. Handset connects to AC power line but has no transmission. Emission Data of Base Unit is listed in following pages.

##### 4.9.1 AC Power Line Conducted Emission Configuration Photograph

Worst Case Line-Conducted Configuration  
at

384 kHz

The worst case line conducted configuration photographs are attached in the Appendix and saved with filename: config photos.pdf

##### 4.9.2 AC Power Line Conducted Emission Data

The plot(s) and data in the following pages list the significant emission frequencies, the limit and the margin of compliance.


Passed by 14.58 dB margin compare with average limit

Issuing Laboratory:  
Intertek Testing Services Hong Kong Limited

HKAS has accredited this laboratory (HOKLAS 005 – TEST) under HOKLAS for specific laboratory activities as listed in the HOKLAS directory of accredited laboratories.



Worst Case: Sound Receiving and Music ON

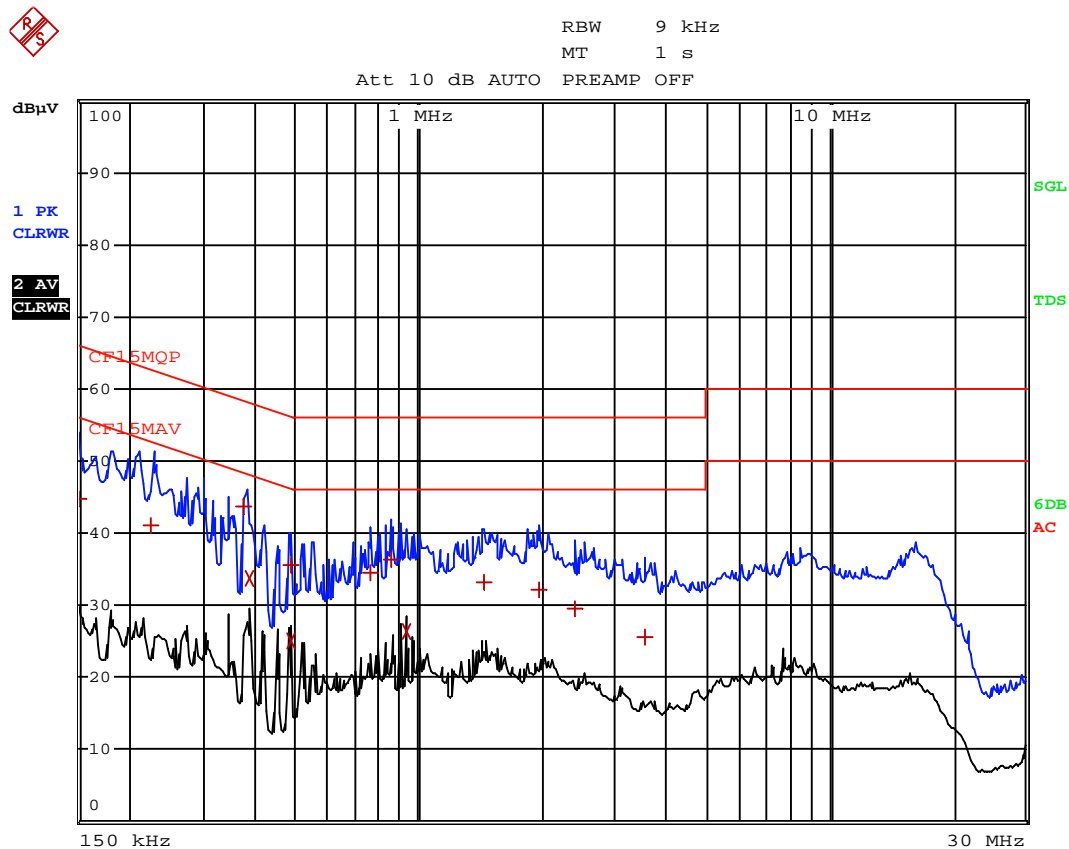

Date: 16.APR.2015 10:15:51

Issuing Laboratory:  
Intertek Testing Services Hong Kong Limited

HKAS has accredited this laboratory (HOKLAS 005 – TEST) under HOKLAS for specific laboratory activities as listed in the HOKLAS directory of accredited laboratories.



Worst Case: Sound Receiving and Music ON

EDIT PEAK LIST (Final Measurement Results)					
Trace1: CF15MQP					
Trace2: CF15MAV					
Trace3: ---					
	TRACE	FREQUENCY	LEVEL	dB $\mu$ V	DELTA LIMIT dB
1	Quasi Peak	150 kHz	44.73	L1	-21.26
1	Quasi Peak	226.5 kHz	41.04	N	-21.53
1	Quasi Peak	379.5 kHz	43.61	L1	-14.67
2	CISPR Average	384 kHz	33.60	N	-14.58
1	Quasi Peak	487.5 kHz	35.66	L1	-20.54
2	CISPR Average	487.5 kHz	25.06	L1	-21.15
1	Quasi Peak	762 kHz	34.58	L1	-21.41
1	Quasi Peak	861 kHz	36.35	L1	-19.64
2	CISPR Average	937.5 kHz	26.25	L1	-19.74
1	Quasi Peak	1.446 MHz	33.27	L1	-22.72
1	Quasi Peak	1.9635 MHz	32.26	L1	-23.73
1	Quasi Peak	2.4135 MHz	29.60	L1	-26.39
1	Quasi Peak	3.57 MHz	25.71	L1	-30.28


Date: 16.APR.2015 10:15:25

Issuing Laboratory:  
Intertek Testing Services Hong Kong Limited

HKAS has accredited this laboratory (HOKLAS 005 – TEST) under HOKLAS for specific laboratory activities as listed in the HOKLAS directory of accredited laboratories.



Worst Case: Talk with lullaby

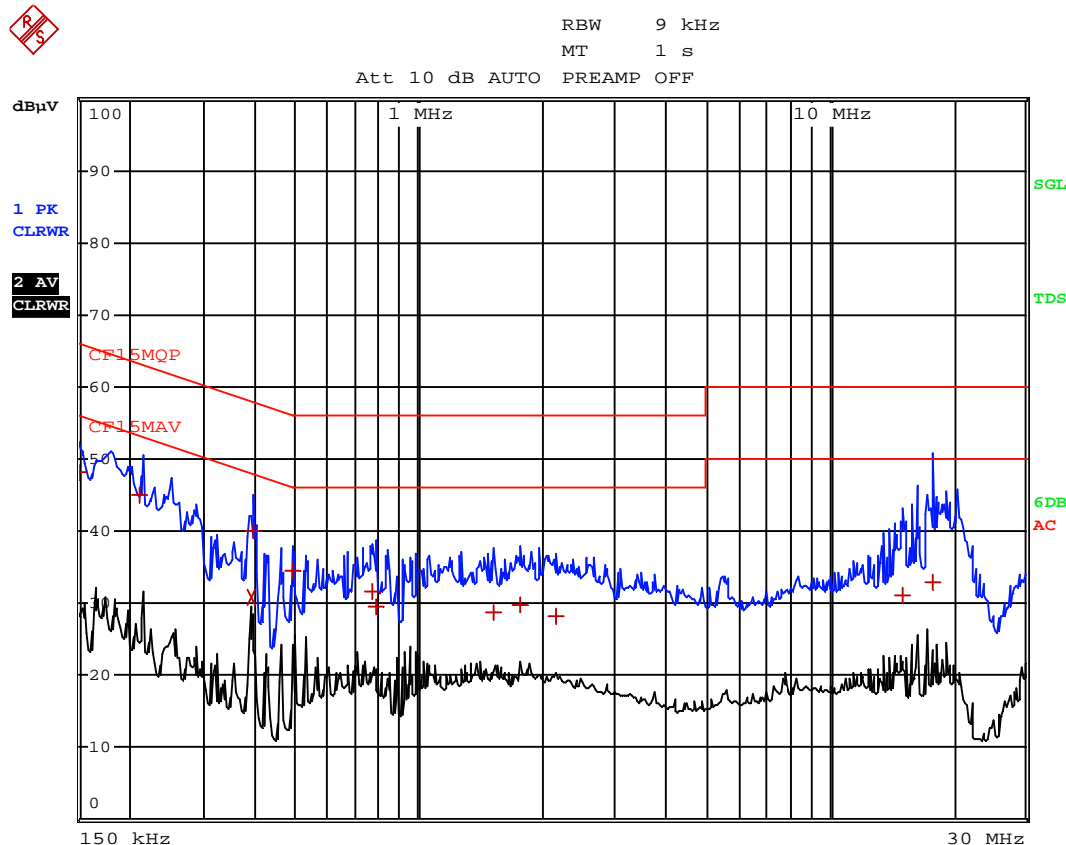

Date: 20.APR.2015 12:48:28

Issuing Laboratory:  
Intertek Testing Services Hong Kong Limited

HKAS has accredited this laboratory (HOKLAS 005 – TEST) under HOKLAS for specific laboratory activities as listed in the HOKLAS directory of accredited laboratories.



Worst Case: Talk with lullaby

EDIT PEAK LIST (Final Measurement Results)				
Trace1:	CF15MQP			
Trace2:	CF15MAV			
Trace3:	---			
	TRACE	FREQUENCY	LEVEL dBμV	DELTA LIMIT dB
1	Quasi Peak	150 kHz	48.15 N	-17.84
1	Quasi Peak	213 kHz	45.07 L1	-18.00
2	CISPR Average	388.5 kHz	30.94 N	-17.15
1	Quasi Peak	393 kHz	40.15 L1	-17.84
1	Quasi Peak	492 kHz	34.42 L1	-21.70
1	Quasi Peak	771 kHz	31.54 L1	-24.45
1	Quasi Peak	789 kHz	29.61 L1	-26.38
1	Quasi Peak	1.518 MHz	28.85 L1	-27.14
1	Quasi Peak	1.761 MHz	29.73 L1	-26.26
1	Quasi Peak	2.1525 MHz	28.27 L1	-27.72
1	Quasi Peak	14.982 MHz	31.18 L1	-28.81
1	Quasi Peak	17.7855 MHz	33.01 L1	-26.98

Date: 20.APR.2015 12:48:07

Issuing Laboratory:  
**Intertek Testing Services Hong Kong Limited**

HKAS has accredited this laboratory (HOKLAS 005 – TEST) under HOKLAS for specific laboratory activities as listed in the HOKLAS directory of accredited laboratories.



**EXHIBIT 5  
EQUIPMENT LIST**



## 5.0 Equipment List

### 1) Radiated Emissions Test

Equipment	Spectrum Analyzer	BiConiLog Antenna	EMI Test Receiver
Registration No.	EW-2253	EW-3061	EW-2251
Manufacturer	R&S	EMCO	R&S
Model No.	FSP40	3412E	ESCI
Calibration Date	May 08, 2014	Jul. 17, 2014	Dec. 04, 2014
Calibration Due Date	May 08, 2015	Jul. 17, 2015	Dec. 04, 2015

Equipment	Double Ridged Guide Antenna	Broad-Band Horn Antenna
Registration No.	EW-0194	EW-1679
Manufacturer	EMCO	SCHWARZBECK
Model No.	3115	BBHA9170
Calibration Date	Jan. 29, 2015	Jun. 05, 2014
Calibration Due Date	Jul. 29, 2016	Jun. 05, 2015

### 2) Conducted Emissions Test

Equipment	EMI Test Receiver	LISN
Registration No.	EW-3095	EW-2874
Manufacturer	R&S	R&S
Model No.	ESCI	ENV-216
Calibration Date	Oct. 16, 2014	Oct. 17, 2014
Calibration Due Date	Oct. 16, 2015	Aug. 17, 2015

### 3) Conductive Measurement Test

Equipment	Spectrum Analyzer
Registration No.	EW-2466
Manufacturer	R&S
Model No.	FSP30
Calibration Date	Sep.02, 2014
Calibration Due Date	Sep. 02, 2015

**END OF TEST REPORT**