



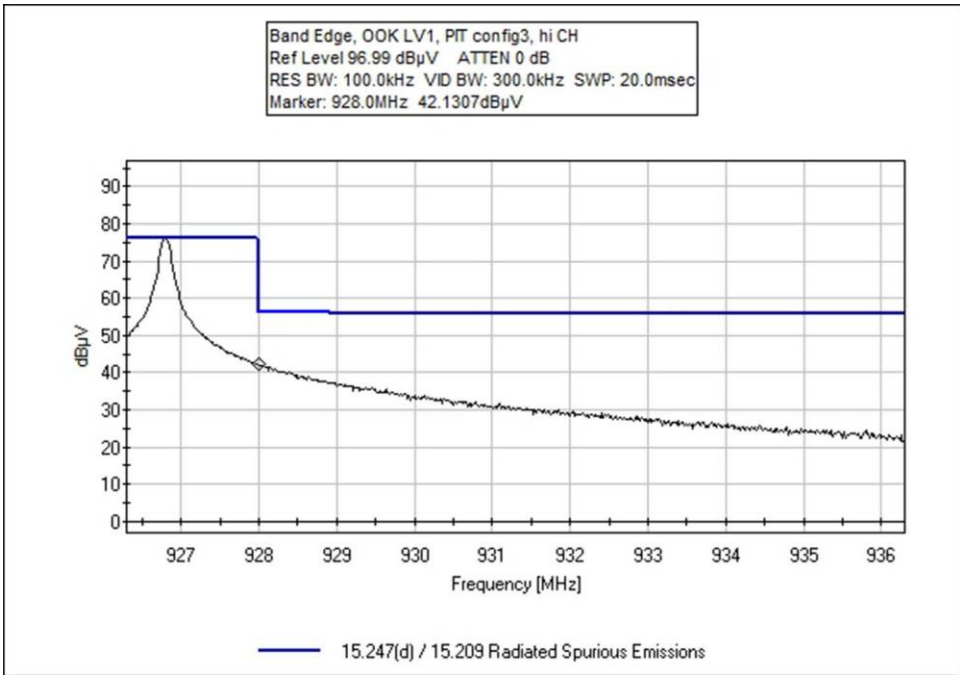
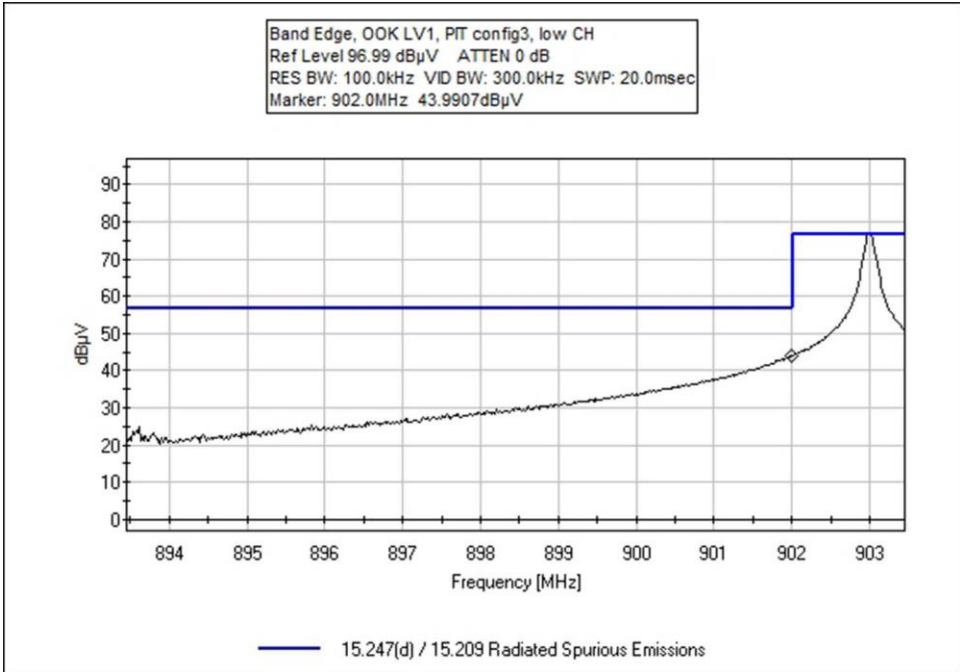
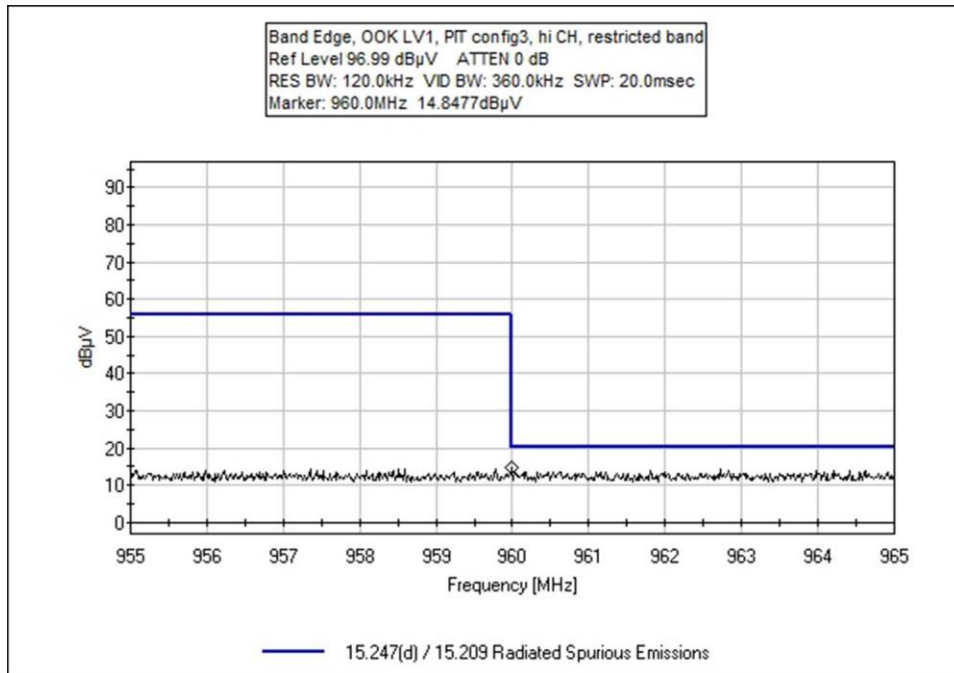
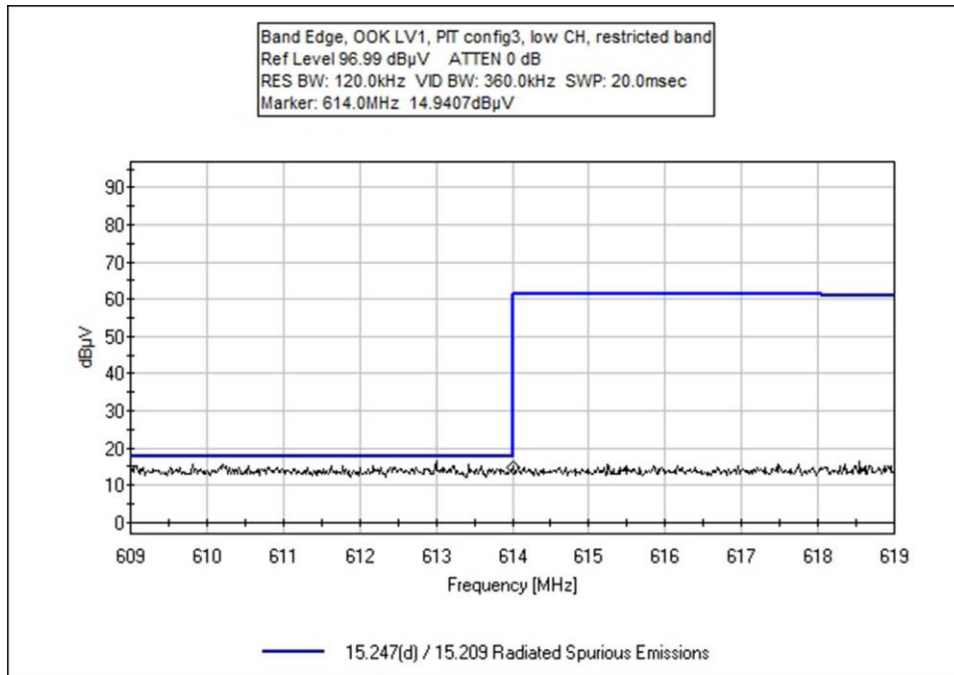




Band Edge Plots, Configuration 3


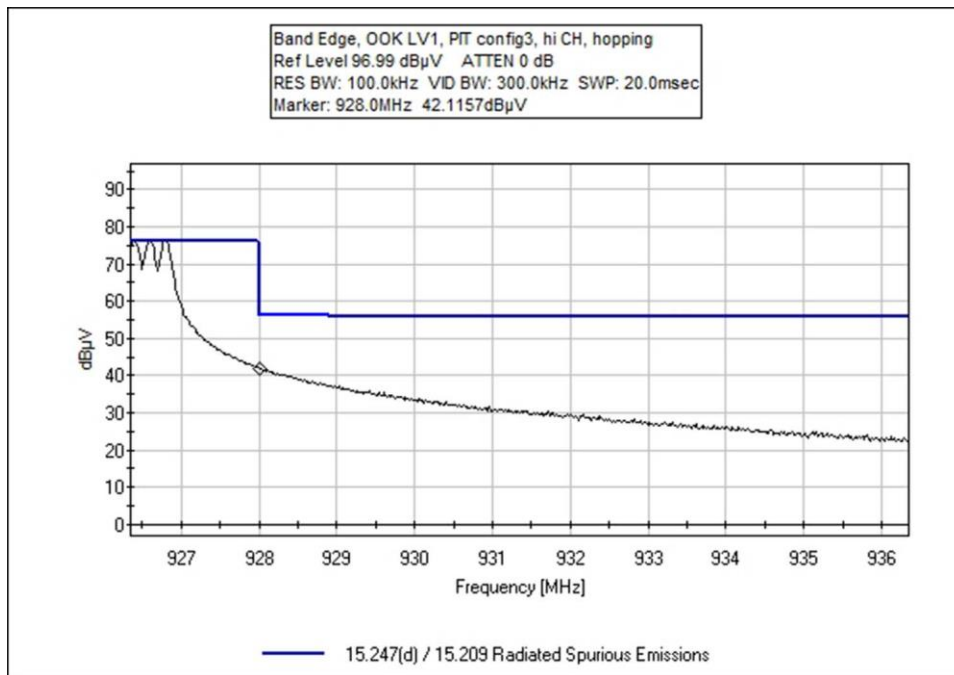



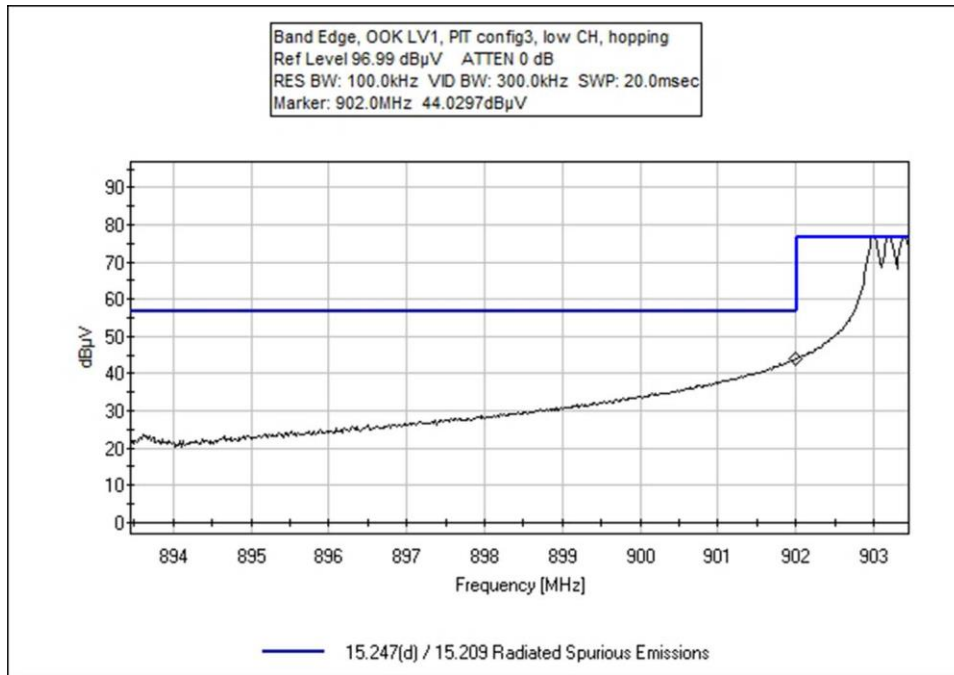



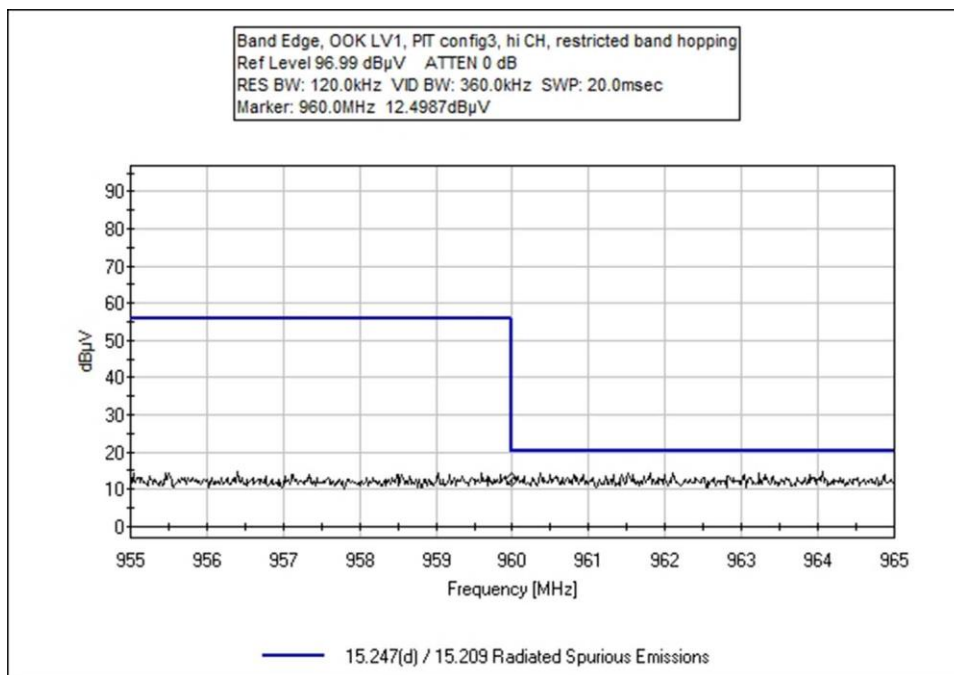



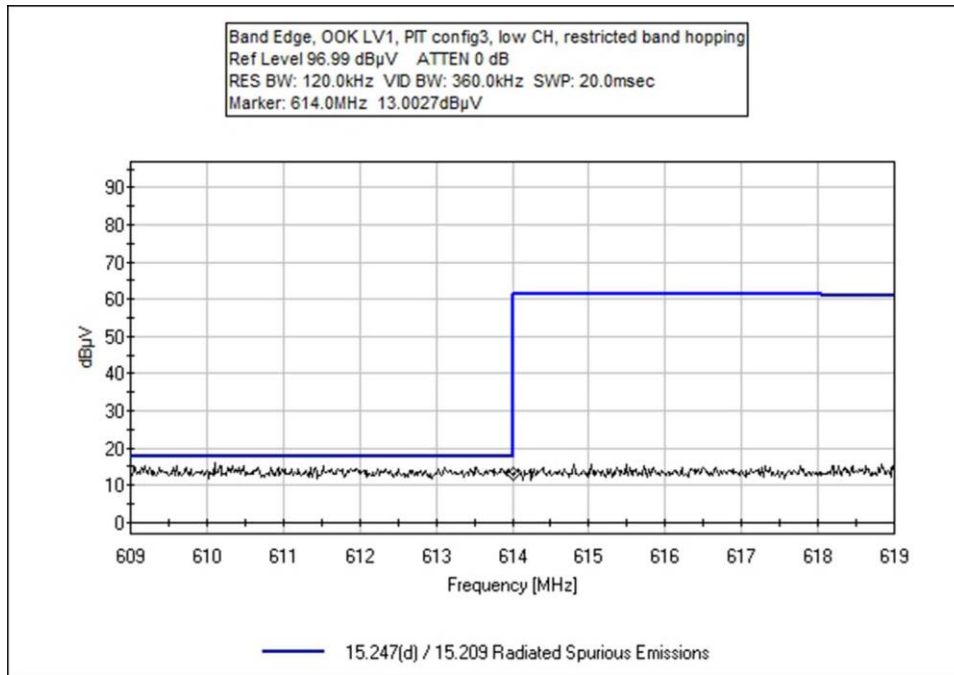


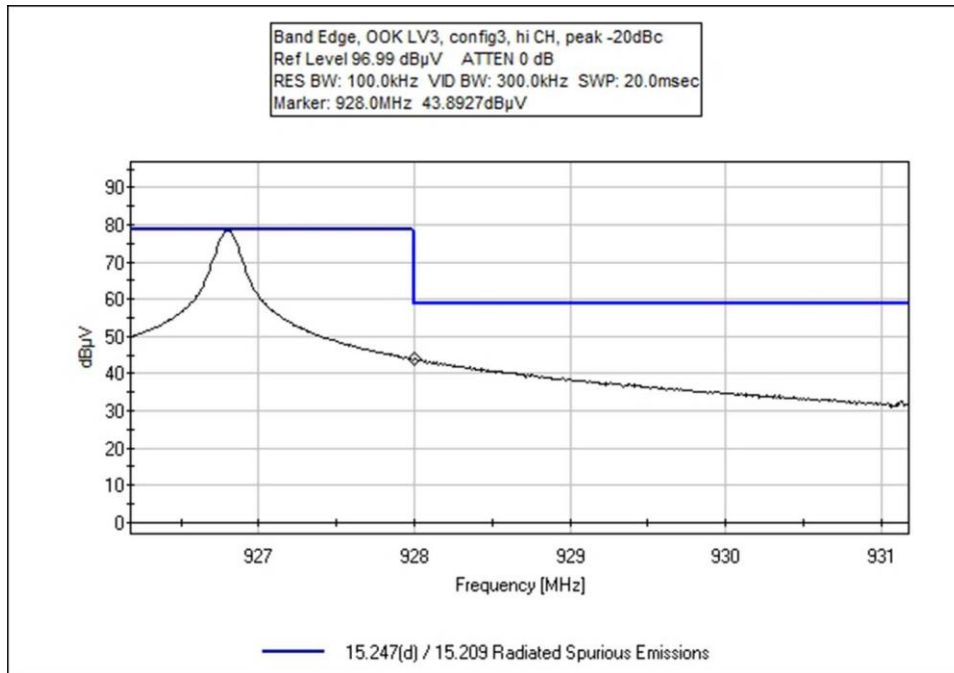
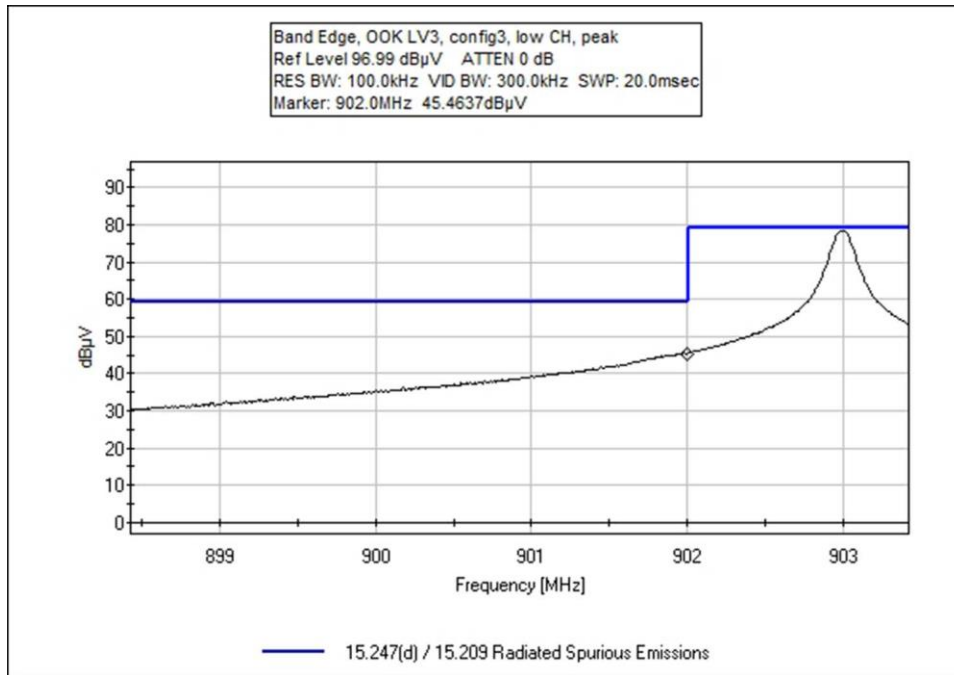


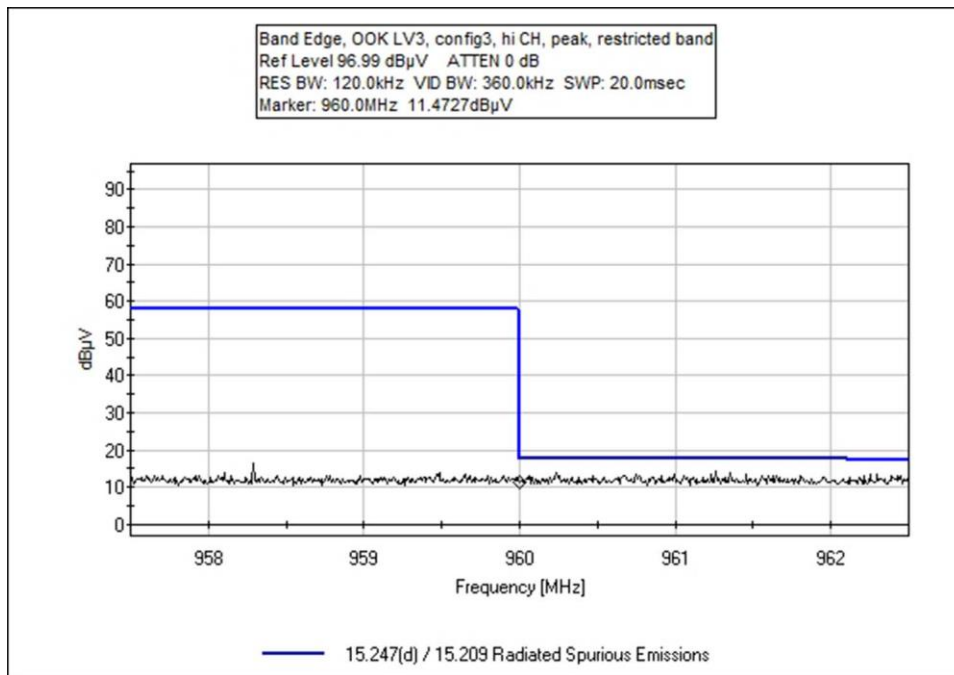
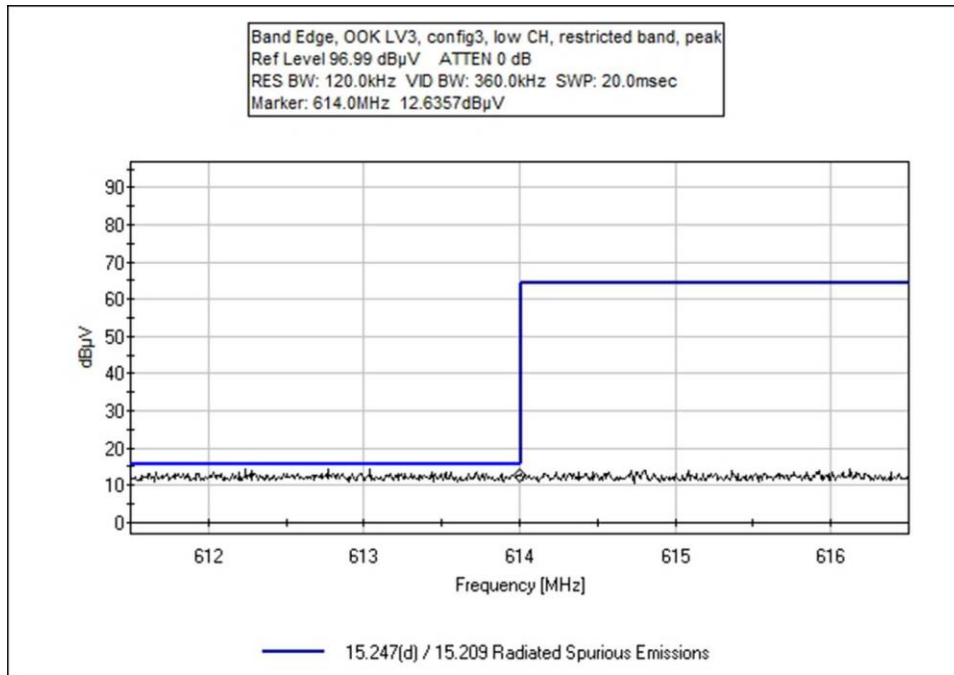


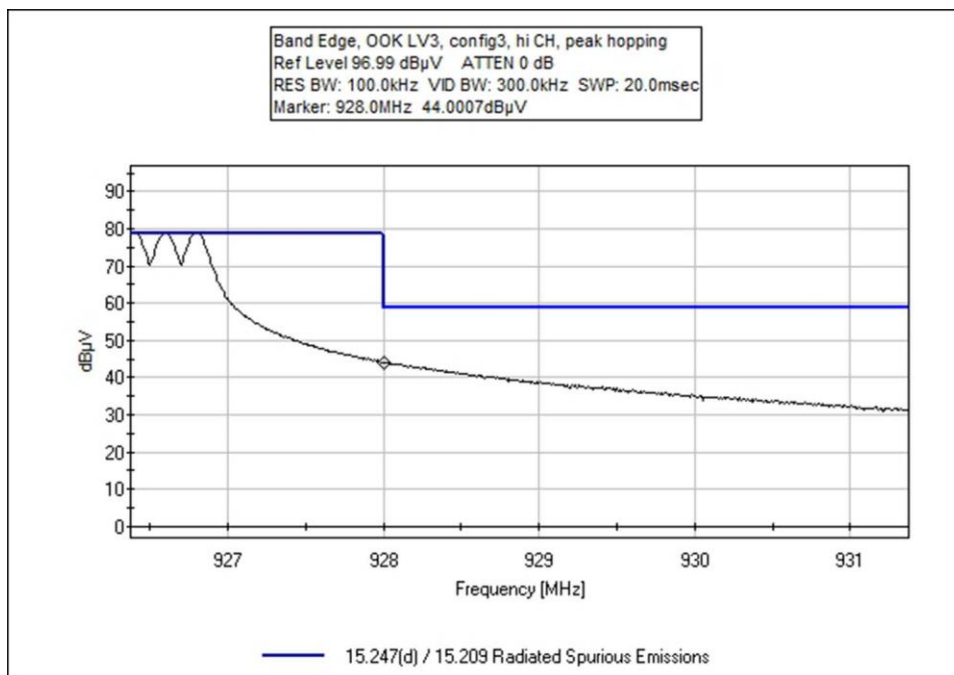
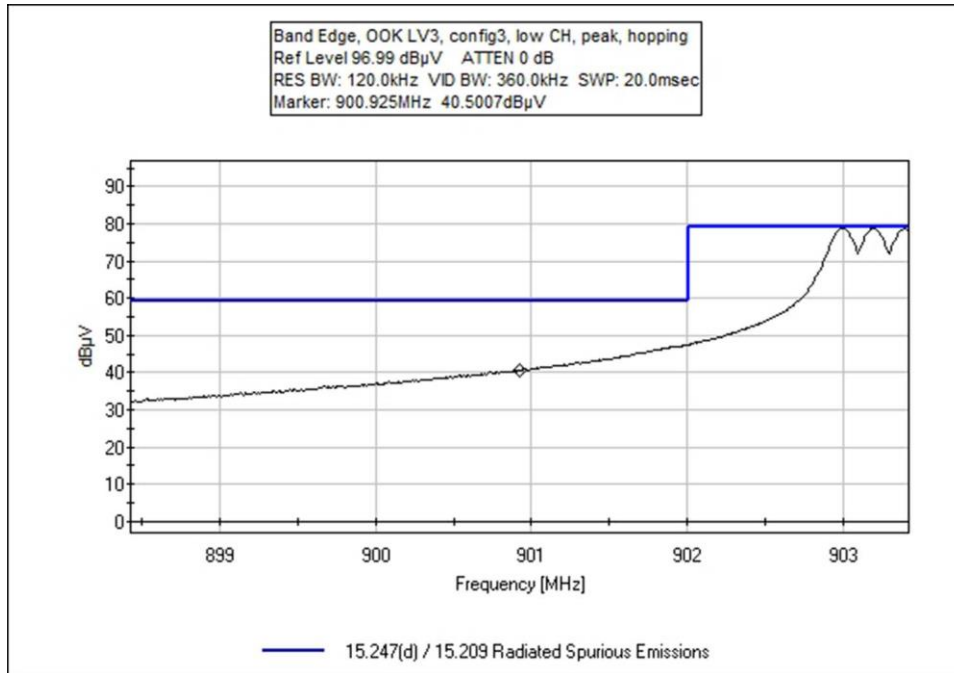


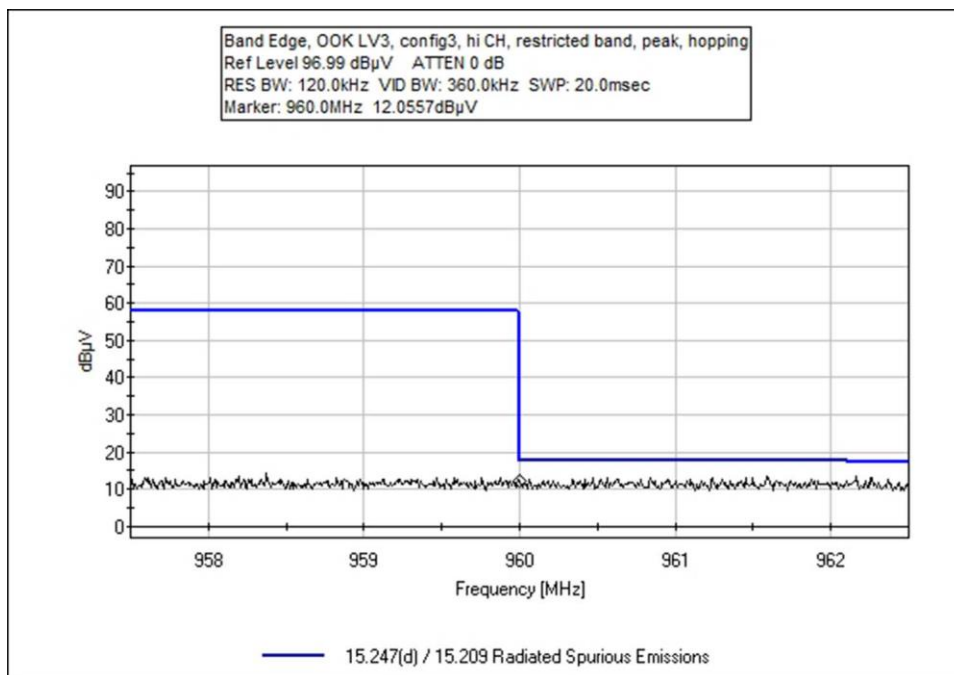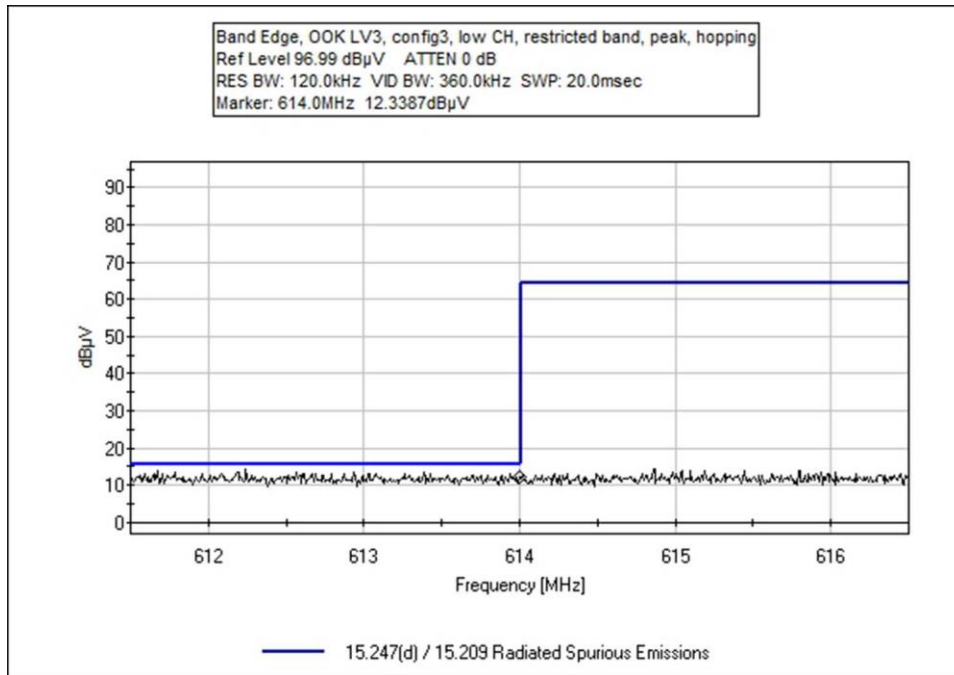

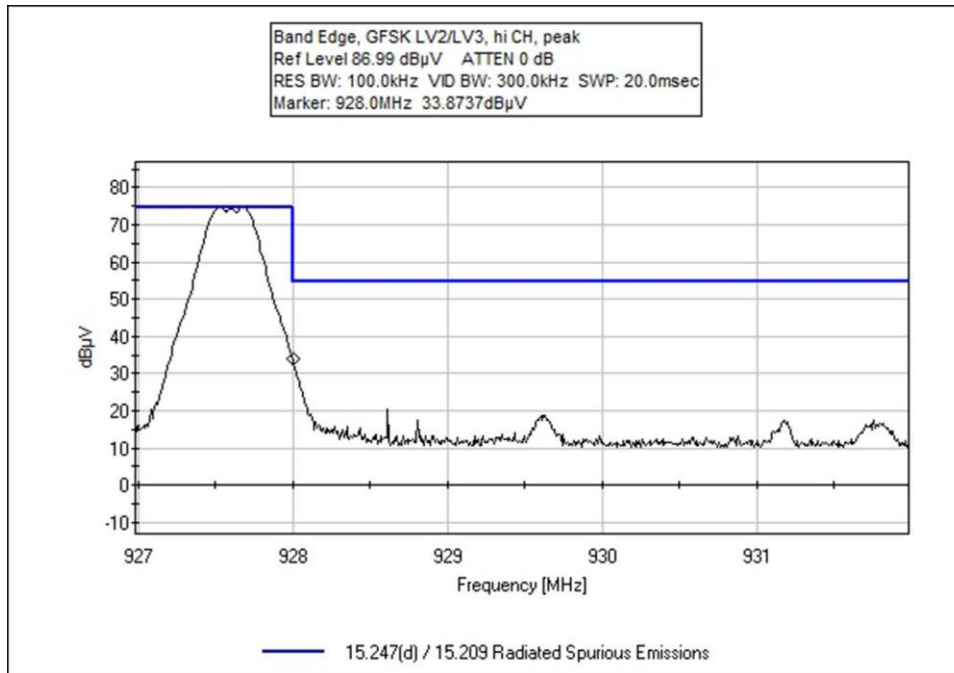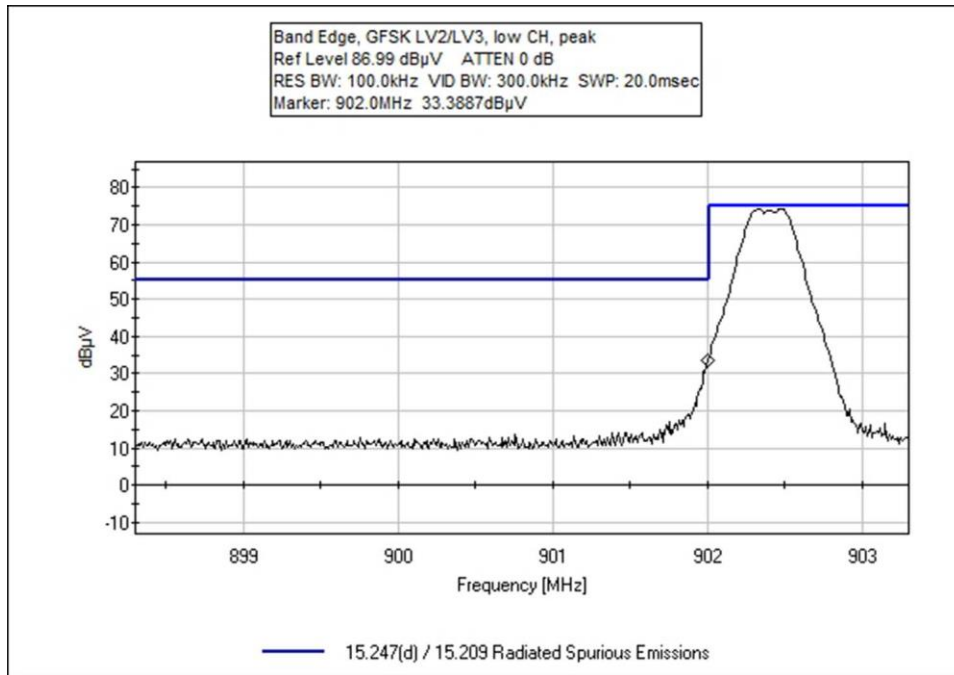

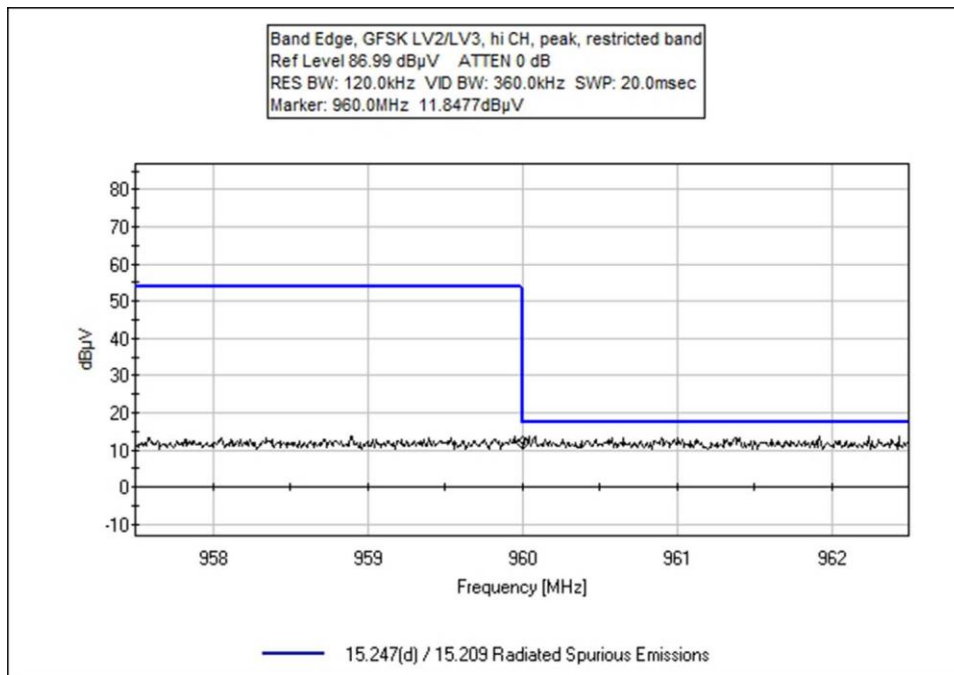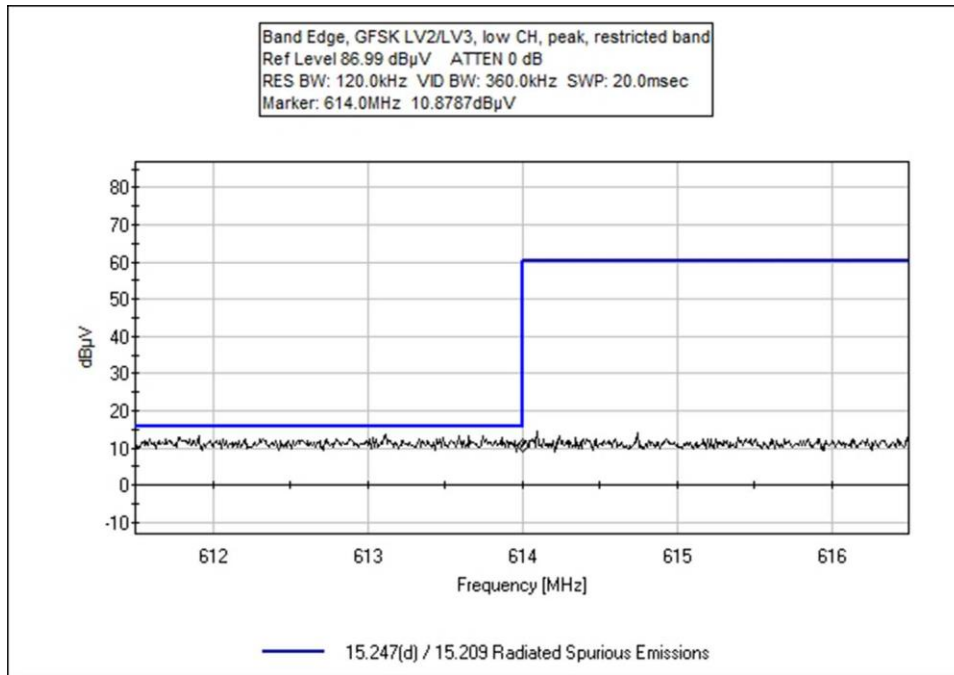

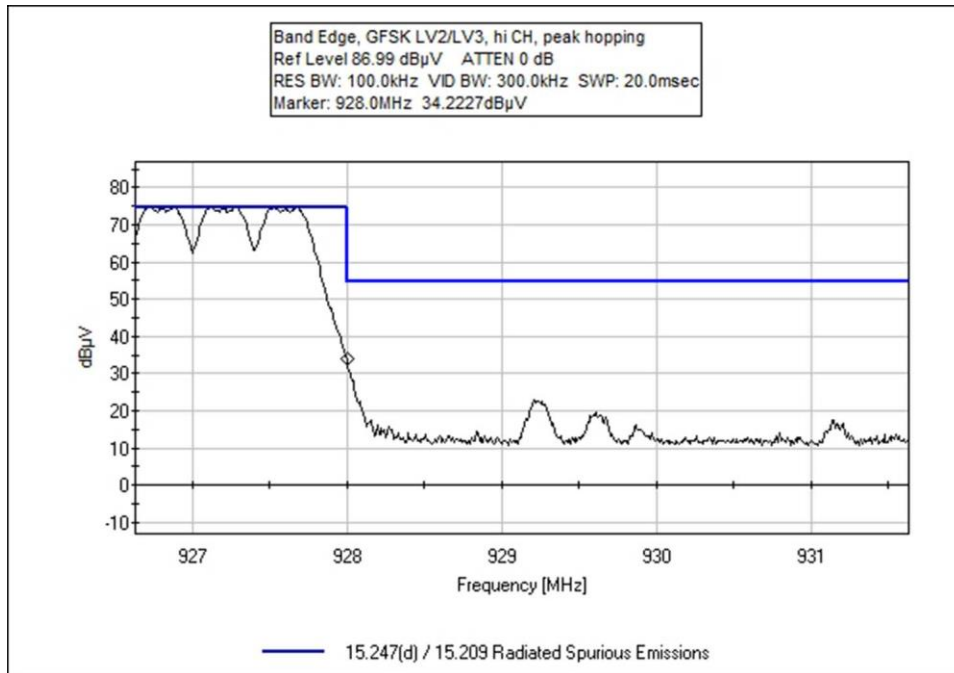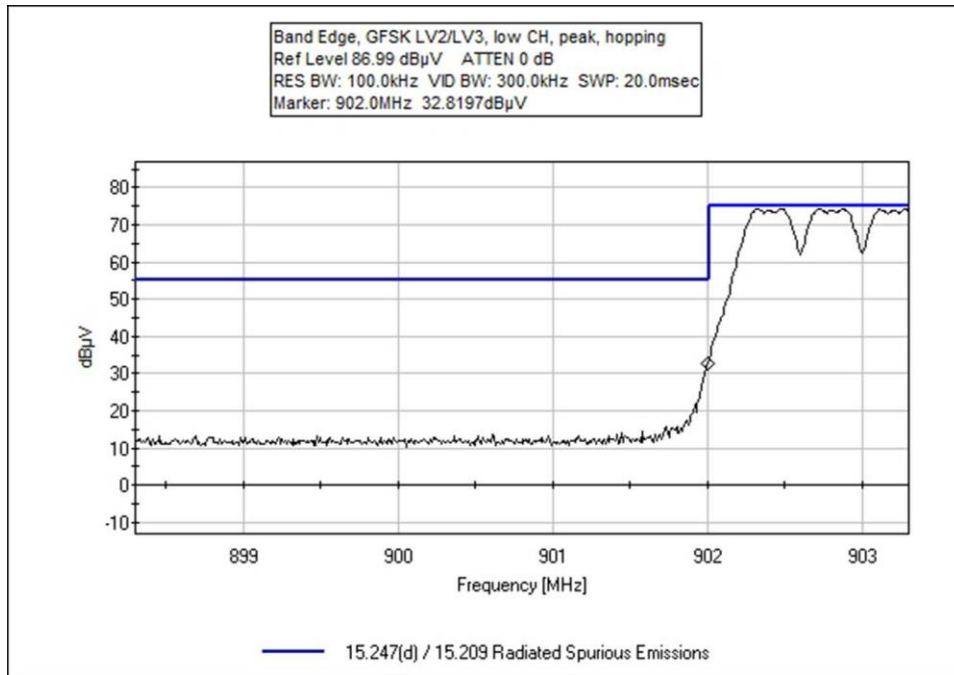

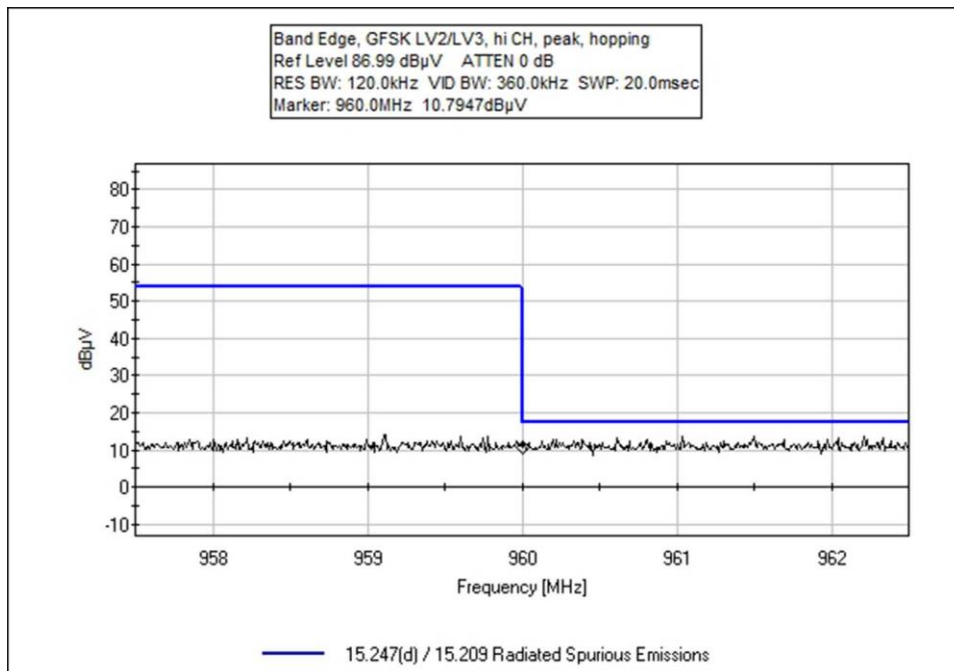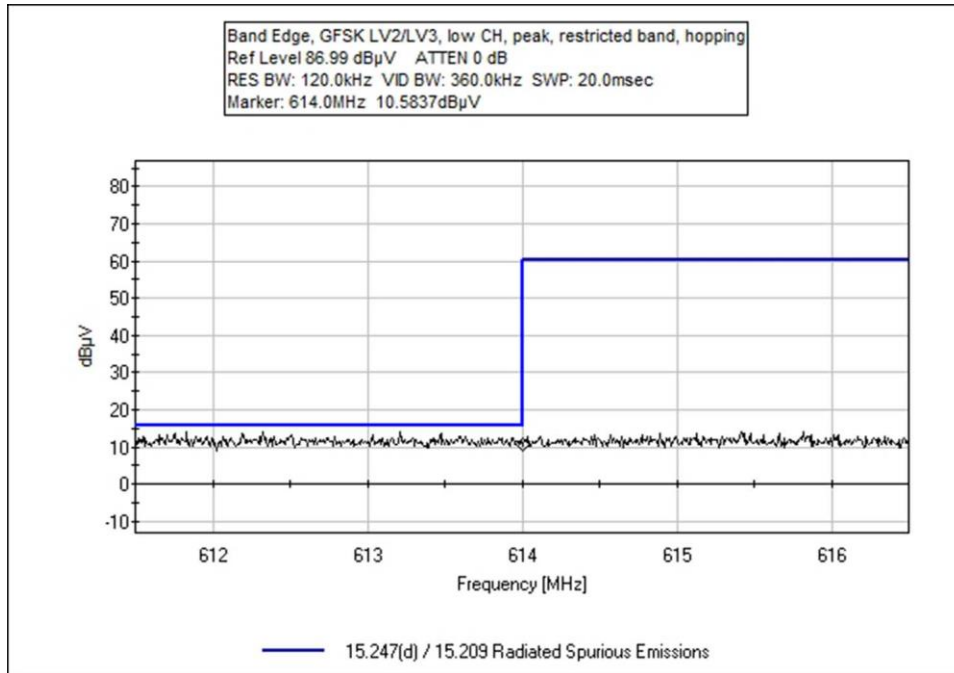

Test Setup / Conditions / Data

Test Location: CKC Laboratories Inc. • 110 N. Olinda Pl. • Brea, CA 92823 • 714-993-6112
 Customer: **Itron, Inc.**
 Specification: **15.247(d) / 15.209 Radiated Spurious Emissions**
 Work Order #: **104621** Date: 1/25/2021
 Test Type: **Radiated Emissions** Time: 10:18:32
 Tested By: Don Nguyen Sequence#: 11
 Software: EMITest 5.03.19

Equipment Tested:

Device	Manufacturer	Model #	S/N
Configuration 1			

Support Equipment:

Device	Manufacturer	Model #	S/N
Configuration 1			

Test Conditions / Notes:

The EUT is placed on Styrofoam platform and powered from 3.6V fresh battery. The EUT is connected to a remote located laptop running CLI Tool ver.2.0.1.24.
 EUT has fixed orientation per manufacture's specification.
 Operating frequency range/ mode
 902.4 - 927.6MHz, 400kHz steps, 64 channels, 300kbps GFSK LV2/LV3
 Frequency of measurement: 614-960MHz
 RBW=120kHz, VBW=360kHz (restricted band)
 RBW=100kHz, VBW=300kHz (-20dBc)

 Test Method: ANSI C63.10 (2013)
 Temperature (°C): 24
 Relative Humidity (%): 30
 Modification 1 was in place during testing.

Test Equipment:

ID	Asset #	Description	Model	Calibration Date	Cal Due Date
T1	ANP05281	Attenuator	1B	4/7/2020	4/7/2022
T2	AN01993	Biconilog Antenna	CBL6111C	6/11/2019	6/11/2021
T3	AN02869	Spectrum Analyzer	E4440A	8/3/2020	8/3/2021
T4	ANP05198	Cable-Amplitude +15C to +45C (dB)	8268	12/21/2020	12/21/2022

Measurement Data: Reading listed by margin. Test Distance: 3 Meters

#	Freq MHz	Rdng dB μ V	T1 dB	T2 dB	T3 dB	T4 dB	Dist Table	Corr dB μ V/m	Spec dB μ V/m	Margin dB	Polar Ant
1	614.000M	11.5	+5.9	+19.8	+0.0	+4.6	+0.0	41.8	46.0 hopping	-4.2	Vert
2	960.000M	12.9	+6.0	+24.4	+0.0	+6.0	+0.0	49.3	54.0	-4.7	Vert
3	614.000M	10.8	+5.9	+19.8	+0.0	+4.6	+0.0	41.1	46.0	-4.9	Vert
4	960.000M	11.1	+6.0	+24.4	+0.0	+6.0	+0.0	47.5	54.0 hopping	-6.5	Vert
5	902.000M	32.5	+6.0	+23.5	+0.0	+5.8	+0.0	67.8	88.5	-20.7	Vert
6	928.000M	31.0	+6.0	+23.9	+0.0	+5.9	+0.0	66.8	88.5	-21.7	Vert
7	928.000M	30.5	+6.0	+23.9	+0.0	+5.9	+0.0	66.3	88.5 hopping	-22.2	Vert
8	902.000M	30.9	+6.0	+23.5	+0.0	+5.8	+0.0	66.2	88.5 hopping	-22.3	Vert

Test Location: CKC Laboratories Inc. • 110 N. Olinda Pl. • Brea, CA 92823 • 714-993-6112
 Customer: **Itron, Inc.**
 Specification: **15.247(d) / 15.209 Radiated Spurious Emissions**
 Work Order #: **104621** Date: 12/22/2020
 Test Type: **Radiated Emissions** Time: 10:51:22
 Tested By: Don Nguyen Sequence#: 2
 Software: EMITest 5.03.19

Equipment Tested:

Device	Manufacturer	Model #	S/N
Configuration 1			

Support Equipment:

Device	Manufacturer	Model #	S/N
Configuration 1			

Test Conditions / Notes:

The EUT is placed on Styrofoam platform and powered from 3.6V fresh battery. The EUT is connected to a remote located laptop running CLI Tool ver.2.0.1.24.
 EUT has fixed orientation per manufacture's specification.
 Operating frequency range/ mode
 903 - 926.8MHz, 200kHz steps, 120 channels, 16384 OOK LV1
 Frequency of measurement: 614-960MHz
 RBW=120kHz, VBW=360kHz (restricted band)
 RBW=100kHz, VBW=300kHz (-20dBc)

Test Method: ANSI C63.10 (2013)
 Temperature (°C): 24
 Relative Humidity (%): 30
 Modification 1 was in place during testing.

Test Equipment:

ID	Asset #	Description	Model	Calibration Date	Cal Due Date
T1	AN03643	Spectrum Analyzer	E4440A	5/20/2020	5/20/2022
T2	ANP01911	Cable-Amplitude +15C to +45C (dB)	RG214/U	1/2/2020	1/2/2022
T3	ANP05281	Attenuator	1B	4/7/2020	4/7/2022
T4	AN01993	Biconilog Antenna	CBL6111C	6/11/2019	6/11/2021

Measurement Data: Reading listed by margin. Test Distance: 3 Meters

#	Freq MHz	Rdng dB μ V	T1 dB	T2 dB	T3 dB	T4 dB	Dist Table	Corr dB μ V/m	Spec dB μ V/m	Margin dB	Polar Ant
1	614.000M	13.9	+0.0	+2.5	+5.9	+19.8	+0.0	42.1	46.0	-3.9	Vert
2	960.000M	15.2	+0.0	+3.3	+6.0	+24.4	+0.0	48.9	54.0	-5.1	Vert
3	614.000M	12.2	+0.0	+2.5	+5.9	+19.8	+0.0	40.4	46.0 hopping	-5.6	Vert
4	960.000M	13.2	+0.0	+3.3	+6.0	+24.4	+0.0	46.9	54.0 hopping	-7.1	Vert
5	928.000M	43.9	+0.0	+3.3	+6.0	+23.9	+0.0	77.1	89.6	-12.5	Vert
6	902.000M	43.5	+0.0	+3.2	+6.0	+23.5	+0.0	76.2	89.6	-13.4	Vert
7	928.000M	42.3	+0.0	+3.3	+6.0	+23.9	+0.0	75.5	89.6 hopping	-14.1	Vert
8	902.000M	41.7	+0.0	+3.2	+6.0	+23.5	+0.0	74.4	89.6 hopping	-15.2	Vert

Test Location: CKC Laboratories Inc. • 110 N. Olinda Pl. • Brea, CA 92823 • 714-993-6112
 Customer: **Itron, Inc.**
 Specification: **15.247(d) / 15.209 Radiated Spurious Emissions**
 Work Order #: **104621** Date: 1/25/2021
 Test Type: **Radiated Emissions** Time: 10:22:10
 Tested By: Don Nguyen Sequence#: 3
 Software: EMITest 5.03.19

Equipment Tested:

Device	Manufacturer	Model #	S/N
Configuration 1			

Support Equipment:

Device	Manufacturer	Model #	S/N
Configuration 1			

Test Conditions / Notes:

The EUT is placed on Styrofoam platform and powered from 3.6V fresh battery. The EUT is connected to a remote located laptop running CLI Tool ver.2.0.1.24.
 EUT has fixed orientation per manufacture's specification.
 Operating frequency range/ mode
 903 - 926.8MHz, 200kHz steps, 120 channels, 16384 OOK LV3
 Frequency of measurement: 614-960MHz
 RBW=120kHz, VBW=360kHz (restricted band)
 RBW=100kHz, VBW=300kHz (-20dBc)

Test Method: ANSI C63.10 (2013)
 Temperature (°C): 24
 Relative Humidity (%): 30
 Modification 1 was in place during testing.

Test Equipment:

ID	Asset #	Description	Model	Calibration Date	Cal Due Date
T1	ANP05281	Attenuator	1B	4/7/2020	4/7/2022
T2	AN01993	Biconilog Antenna	CBL6111C	6/11/2019	6/11/2021
T3	AN02869	Spectrum Analyzer	E4440A	8/3/2020	8/3/2021
T4	ANP05198	Cable-Amplitude +15C to +45C (dB)	8268	12/21/2020	12/21/2022

Measurement Data: Reading listed by margin. Test Distance: 3 Meters

#	Freq MHz	Rdng dB μ V	T1 dB	T2 dB	T3 dB	T4 dB	Dist Table	Corr dB μ V/m	Spec dB μ V/m	Margin dB	Polar Ant
1	614.000M	10.9	+5.9	+19.8	+0.0	+4.6	+0.0	41.2	46.0 hopping	-4.8	Vert
2	614.000M	10.7	+5.9	+19.8	+0.0	+4.6	+0.0	41.0	46.0	-5.0	Vert
3	960.000M	12.0	+6.0	+24.4	+0.0	+6.0	+0.0	48.4	54.0 hopping	-5.6	Vert
4	960.000M	11.1	+6.0	+24.4	+0.0	+6.0	+0.0	47.5	54.0	-6.5	Vert
5	902.000M	45.9	+6.0	+23.5	+0.0	+5.8	+0.0	81.2	93.9 hopping	-12.7	Vert
6	902.000M	45.5	+6.0	+23.5	+0.0	+5.8	+0.0	80.8	93.9	-13.1	Vert
7	928.000M	43.4	+6.0	+23.9	+0.0	+5.9	+0.0	79.2	93.9 hopping	-14.7	Vert
8	928.000M	43.2	+6.0	+23.9	+0.0	+5.9	+0.0	79.0	93.9	-14.9	Vert

Test Location: CKC Laboratories Inc. • 110 N. Olinda Pl. • Brea, CA 92823 • 714-993-6112
 Customer: **Itron, Inc.**
 Specification: **15.247(d) / 15.209 Radiated Spurious Emissions**
 Work Order #: **104621** Date: 1/25/2021
 Test Type: **Radiated Emissions** Time: 09:55:52
 Tested By: Don Nguyen Sequence#: 5
 Software: EMITest 5.03.19

Equipment Tested:

Device	Manufacturer	Model #	S/N
Configuration 2			

Support Equipment:

Device	Manufacturer	Model #	S/N
Configuration 2			

Test Conditions / Notes:

The EUT is placed on Styrofoam platform and powered from 3.6V fresh battery. The EUT is connected to a remote located laptop running CLI Tool ver.2.0.1.24.
 EUT has fixed orientation per manufacture's specification.
 Operating frequency range/ mode
 902.4 - 927.6MHz, 400kHz steps, 64 channels, 300k GFSK LV2/LV3
 Frequency of measurement: 614-960MHz
 RBW=120kHz, VBW=360kHz (restricted band)
 RBW=100kHz, VBW=300kHz (-20dBc)

 Test Method: ANSI C63.10 (2013)
 Temperature (°C): 24
 Relative Humidity (%): 30
 Modification 1 was in place during testing.

Test Equipment:

ID	Asset #	Description	Model	Calibration Date	Cal Due Date
T1	ANP05281	Attenuator	1B	4/7/2020	4/7/2022
T2	AN01993	Biconilog Antenna	CBL6111C	6/11/2019	6/11/2021
T3	AN02869	Spectrum Analyzer	E4440A	8/3/2020	8/3/2021
T4	ANP05198	Cable-Amplitude +15C to +45C (dB)	8268	12/21/2020	12/21/2022

Measurement Data: Reading listed by margin. Test Distance: 3 Meters

#	Freq MHz	Rdng dB μ V	T1 dB	T2 dB	T3 dB	T4 dB	Dist Table	Corr dB μ V/m	Spec dB μ V/m	Margin dB	Polar Ant
1	614.000M	12.9	+5.9	+19.8	+0.0	+4.6	+0.0	43.2	46.0	-2.8	Vert
2	614.000M	12.9	+5.9	+19.8	+0.0	+4.6	+0.0	43.2	46.0 hopping	-2.8	Vert
3	960.000M	11.7	+6.0	+24.4	+0.0	+6.0	+0.0	48.1	54.0	-5.9	Vert
4	960.000M	11.2	+6.0	+24.4	+0.0	+6.0	+0.0	47.6	54.0 hopping	-6.4	Vert
5	928.000M	34.0	+6.0	+23.9	+0.0	+5.9	+0.0	69.8	87.6	-17.8	Vert
6	928.000M	33.8	+6.0	+23.9	+0.0	+5.9	+0.0	69.6	87.6 hopping	-18.0	Vert
7	902.000M	31.0	+6.0	+23.5	+0.0	+5.8	+0.0	66.3	87.6	-21.3	Vert
8	902.000M	30.1	+6.0	+23.5	+0.0	+5.8	+0.0	65.4	87.6 hopping	-22.2	Vert

Test Location: CKC Laboratories Inc. • 110 N. Olinda Pl. • Brea, CA 92823 • 714-993-6112
 Customer: **Itron, Inc.**
 Specification: **15.247(d) / 15.209 Radiated Spurious Emissions**
 Work Order #: **104621** Date: 12/22/2020
 Test Type: **Radiated Emissions** Time: 13:57:49
 Tested By: Don Nguyen Sequence#: 8
 Software: EMITest 5.03.19

Equipment Tested:

Device	Manufacturer	Model #	S/N
Configuration 2			

Support Equipment:

Device	Manufacturer	Model #	S/N
Configuration 2			

Test Conditions / Notes:

The EUT is placed on Styrofoam platform and powered from 3.6V fresh battery. The EUT is connected to a remote located laptop running CLI Tool ver.2.0.1.24.
 EUT has fixed orientation per manufacture's specification.
 Operating frequency range/ mode
 903 - 926.8MHz, 200kHz steps, 120 channels, 16384 OOK LV1
 Frequency of measurement: 614-960MHz
 RBW=120kHz, VBW=360kHz (restricted band)
 RBW=100kHz, VBW=300kHz (-20dBc)

Test Method: ANSI C63.10 (2013)
 Temperature (°C): 24
 Relative Humidity (%): 30
 Modification 1 was in place during testing.

Test Equipment:

ID	Asset #	Description	Model	Calibration Date	Cal Due Date
T1	AN03643	Spectrum Analyzer	E4440A	5/20/2020	5/20/2022
T2	ANP01911	Cable-Amplitude +15C to +45C (dB)	RG214/U	1/2/2020	1/2/2022
T3	ANP05281	Attenuator	1B	4/7/2020	4/7/2022
T4	AN01993	Biconilog Antenna	CBL6111C	6/11/2019	6/11/2021

Measurement Data: Reading listed by margin. Test Distance: 3 Meters

#	Freq MHz	Rdng dB μ V	T1 dB	T2 dB	T3 dB	T4 dB	Dist Table	Corr dB μ V/m	Spec dB μ V/m	Margin dB	Polar Ant
1	614.000M	14.1	+0.0	+2.5	+5.9	+19.8	+0.0	42.3	46.0 hopping	-3.7	Vert
2	614.000M	12.5	+0.0	+2.5	+5.9	+19.8	+0.0	40.7	46.0	-5.3	Vert
3	960.000M	12.2	+0.0	+3.3	+6.0	+24.4	+0.0	45.9	54.0	-8.1	Vert
4	960.000M	12.0	+0.0	+3.3	+6.0	+24.4	+0.0	45.7	54.0 hopping	-8.3	Vert
5	902.000M	41.7	+0.0	+3.2	+6.0	+23.5	+0.0	74.4	88.2 hopping	-13.8	Vert
6	902.000M	41.5	+0.0	+3.2	+6.0	+23.5	+0.0	74.2	88.2	-14.0	Vert
7	928.000M	40.9	+0.0	+3.3	+6.0	+23.9	+0.0	74.1	88.2	-14.1	Vert
8	928.000M	40.8	+0.0	+3.3	+6.0	+23.9	+0.0	74.0	88.2 hopping	-14.2	Vert

Test Location: CKC Laboratories Inc. • 110 N. Olinda Pl. • Brea, CA 92823 • 714-993-6112
 Customer: **Itron, Inc.**
 Specification: **15.247(d) / 15.209 Radiated Spurious Emissions**
 Work Order #: **104621** Date: 1/25/2021
 Test Type: **Radiated Emissions** Time: 10:00:39
 Tested By: Don Nguyen Sequence#: 4
 Software: EMITest 5.03.19

Equipment Tested:

Device	Manufacturer	Model #	S/N
Configuration 2			

Support Equipment:

Device	Manufacturer	Model #	S/N
Configuration 2			

Test Conditions / Notes:

The EUT is placed on Styrofoam platform and powered from 3.6V fresh battery. The EUT is connected to a remote located laptop running CLI Tool ver.2.0.1.24.
 EUT has fixed orientation per manufacture's specification.
 Operating frequency range/ mode
 903 - 926.8MHz, 200kHz steps, 120 channels, 16384 OOK LV3
 Frequency of measurement: 614-960MHz
 RBW=120kHz, VBW=360kHz (restricted band)
 RBW=100kHz, VBW=300kHz (-20dBc)

 Test Method: ANSI C63.10 (2013)
 Temperature (°C): 24
 Relative Humidity (%): 30
 Modification 1 was in place during testing.

Test Equipment:

ID	Asset #	Description	Model	Calibration Date	Cal Due Date
T1	ANP05281	Attenuator	1B	4/7/2020	4/7/2022
T2	AN01993	Biconilog Antenna	CBL6111C	6/11/2019	6/11/2021
T3	AN02869	Spectrum Analyzer	E4440A	8/3/2020	8/3/2021
T4	ANP05198	Cable-Amplitude +15C to +45C (dB)	8268	12/21/2020	12/21/2022

Measurement Data: Reading listed by margin. Test Distance: 3 Meters

#	Freq MHz	Rdng dB μ V	T1 dB	T2 dB	T3 dB	T4 dB	Dist Table	Corr dB μ V/m	Spec dB μ V/m	Margin dB	Polar Ant
1	614.000M	11.3	+5.9	+19.8	+0.0	+4.6	+0.0	41.6	46.0 hopping	-4.4	Vert
2	960.000M	12.3	+6.0	+24.4	+0.0	+6.0	+0.0	48.7	54.0 hopping	-5.3	Vert
3	614.000M	10.1	+5.9	+19.8	+0.0	+4.6	+0.0	40.4	46.0	-5.6	Vert
4	960.000M	12.0	+6.0	+24.4	+0.0	+6.0	+0.0	48.4	54.0	-5.6	Vert
5	902.000M	46.4	+6.0	+23.5	+0.0	+5.8	+0.0	81.7	93.0	-11.3	Vert
6	902.000M	46.2	+6.0	+23.5	+0.0	+5.8	+0.0	81.5	93.0 hopping	-11.5	Vert
7	928.000M	42.3	+6.0	+23.9	+0.0	+5.9	+0.0	78.1	93.0 hopping	-14.9	Vert
8	928.000M	42.1	+6.0	+23.9	+0.0	+5.9	+0.0	77.9	93.0	-15.1	Vert

Test Location: CKC Laboratories Inc. • 110 N. Olinda Pl. • Brea, CA 92823 • 714-993-6112
 Customer: **Itron, Inc.**
 Specification: **15.247(d) / 15.209 Radiated Spurious Emissions**
 Work Order #: **104621** Date: 1/25/2021
 Test Type: **Radiated Emissions** Time: 10:04:36
 Tested By: Don Nguyen Sequence#: 10
 Software: EMITest 5.03.19

Equipment Tested:

Device	Manufacturer	Model #	S/N
Configuration 3			

Support Equipment:

Device	Manufacturer	Model #	S/N
Configuration 3			

Test Conditions / Notes:

The EUT is placed on Styrofoam platform and powered from 3.6V fresh battery. The EUT is connected to a remote located laptop running CLI Tool ver.2.0.1.24.
 EUT has fixed orientation per manufacture's specification.
 Operating frequency range/ mode
 902.4 - 927.6MHz, 400kHz steps, 64 channels, 300kbps GFSK LV2/LV3
 Frequency of measurement: 614-960MHz
 RBW=120kHz, VBW=360kHz (restricted band)
 RBW=100kHz, VBW=300kHz (-20dBc)

 Test Method: ANSI C63.10 (2013)
 Temperature (°C): 24
 Relative Humidity (%): 30
 Modification 1 was in place during testing.

Test Equipment:

ID	Asset #	Description	Model	Calibration Date	Cal Due Date
T1	ANP05281	Attenuator	1B	4/7/2020	4/7/2022
T2	AN01993	Biconilog Antenna	CBL6111C	6/11/2019	6/11/2021
T3	AN02869	Spectrum Analyzer	E4440A	8/3/2020	8/3/2021
T4	ANP05198	Cable-Amplitude +15C to +45C (dB)	8268	12/21/2020	12/21/2022

Measurement Data: Reading listed by margin. Test Distance: 3 Meters

#	Freq MHz	Rdng dB μ V	T1 dB	T2 dB	T3 dB	T4 dB	Dist Table	Corr dB μ V/m	Spec dB μ V/m	Margin dB	Polar Ant
1	614.000M	10.9	+5.9	+19.8	+0.0	+4.6	+0.0	41.2	46.0	-4.8	Vert
2	614.000M	10.6	+5.9	+19.8	+0.0	+4.6	+0.0	40.9	46.0 hopping	-5.1	Vert
3	960.000M	11.9	+6.0	+24.4	+0.0	+6.0	+0.0	48.3	54.0	-5.7	Vert
4	960.000M	10.8	+6.0	+24.4	+0.0	+6.0	+0.0	47.2	54.0 hopping	-6.8	Vert
5	928.000M	34.2	+6.0	+23.9	+0.0	+5.9	+0.0	70.0	90.5 hopping	-20.5	Vert
6	928.000M	33.9	+6.0	+23.9	+0.0	+5.9	+0.0	69.7	90.5	-20.8	Vert
7	902.000M	33.4	+6.0	+23.5	+0.0	+5.8	+0.0	68.7	90.5	-21.8	Vert
8	902.000M	32.8	+6.0	+23.5	+0.0	+5.8	+0.0	68.1	90.5 hopping	-22.4	Vert

Test Location: CKC Laboratories Inc. • 110 N. Olinda Pl. • Brea, CA 92823 • 714-993-6112
 Customer: **Itron, Inc.**
 Specification: **15.247(d) / 15.209 Radiated Spurious Emissions**
 Work Order #: **104621** Date: 12/23/2020
 Test Type: **Radiated Emissions** Time: 09:13:09
 Tested By: Don Nguyen Sequence#: 9
 Software: EMITest 5.03.19

Equipment Tested:

Device	Manufacturer	Model #	S/N
Configuration 3			

Support Equipment:

Device	Manufacturer	Model #	S/N
Configuration 3			

Test Conditions / Notes:

The EUT is placed on Styrofoam platform and powered from 3.6V fresh battery. The EUT is connected to a remote located laptop running CLI Tool ver.2.0.1.24.
 EUT has fixed orientation per manufacture's specification.
 Operating frequency range/ mode
 903 - 926.8MHz, 200kHz steps, 120 channels, 16384 OOK LV1
 Frequency of measurement: 614-960MHz
 RBW=120kHz, VBW=360kHz (restricted band)
 RBW=100kHz, VBW=300kHz (-20dBc)

Test Method: ANSI C63.10 (2013)
 Temperature (°C): 24
 Relative Humidity (%): 30
 Modification 1 was in place during testing.

Test Equipment:

ID	Asset #	Description	Model	Calibration Date	Cal Due Date
T1	AN03643	Spectrum Analyzer	E4440A	5/20/2020	5/20/2022
T2	ANP01911	Cable-Amplitude +15C to +45C (dB)	RG214/U	1/2/2020	1/2/2022
T3	ANP05281	Attenuator	1B	4/7/2020	4/7/2022
T4	AN01993	Biconilog Antenna	CBL6111C	6/11/2019	6/11/2021

Measurement Data: Reading listed by margin. Test Distance: 3 Meters

#	Freq MHz	Rdng dB μ V	T1 dB	T2 dB	T3 dB	T4 dB	Dist Table	Corr dB μ V/m	Spec dB μ V/m	Margin dB	Polar Ant
1	614.000M	14.9	+0.0	+2.5	+5.9	+19.8	+0.0	43.1	46.0	-2.9	Vert
2	614.000M	13.0	+0.0	+2.5	+5.9	+19.8	+0.0	41.2	46.0 hopping	-4.8	Vert
3	960.000M	14.9	+0.0	+3.3	+6.0	+24.4	+0.0	48.6	54.0	-5.4	Vert
4	960.000M	12.5	+0.0	+3.3	+6.0	+24.4	+0.0	46.2	54.0 hopping	-7.8	Vert
5	902.000M	44.0	+0.0	+3.2	+6.0	+23.5	+0.0	76.7	89.4	-12.7	Vert
6	902.000M	44.0	+0.0	+3.2	+6.0	+23.5	+0.0	76.7	89.4 hopping	-12.7	Vert
7	928.000M	42.1	+0.0	+3.3	+6.0	+23.9	+0.0	75.3	89.4 hopping	-14.1	Vert
8	928.000M	42.1	+0.0	+3.3	+6.0	+23.9	+0.0	75.3	89.4	-14.1	Vert

Test Location: CKC Laboratories Inc. • 110 N. Olinda Pl. • Brea, CA 92823 • 714-993-6112
 Customer: **Itron, Inc.**
 Specification: **15.247(d) / 15.209 Radiated Spurious Emissions**
 Work Order #: **104621** Date: 1/25/2021
 Test Type: **Radiated Emissions** Time: 10:11:40
 Tested By: Don Nguyen Sequence#: 9
 Software: EMITest 5.03.19

Equipment Tested:

Device	Manufacturer	Model #	S/N
Configuration 3			

Support Equipment:

Device	Manufacturer	Model #	S/N
Configuration 3			

Test Conditions / Notes:

The EUT is placed on Styrofoam platform and powered from 3.6V fresh battery. The EUT is connected to a remote located laptop running CLI Tool ver.2.0.1.24.
 EUT has fixed orientation per manufacture's specification.
 Operating frequency range/ mode
 903 - 926.8MHz, 200kHz steps, 120 channels, 16384 OOK LV3
 Frequency of measurement: 614-960MHz
 RBW=120kHz, VBW=360kHz (restricted band)
 RBW=100kHz, VBW=300kHz (-20dBc)

Test Method: ANSI C63.10 (2013)
 Temperature (°C): 24
 Relative Humidity (%): 30
 Modification 1 was in place during testing.

Test Equipment:

ID	Asset #/Serial #	Description	Model	Calibration Date	Cal Due Date
T1	ANP05281	Attenuator	1B	4/7/2020	4/7/2022
T2	AN01993	Biconilog Antenna	CBL6111C	6/11/2019	6/11/2021
T3	AN02869	Spectrum Analyzer	E4440A	8/3/2020	8/3/2021
T4	ANP05198	Cable-Amplitude +15C to +45C (dB)	8268	12/21/2020	12/21/2022

Measurement Data: Reading listed by margin. Test Distance: 3 Meters

#	Freq MHz	Rdng dB μ V	T1 dB	T2 dB	T3 dB	T4 dB	Dist Table	Corr dB μ V/m	Spec dB μ V/m	Margin dB	Polar Ant
1	614.000M	12.6	+5.9	+19.8	+0.0	+4.6	+0.0	42.9	46.0	-3.1	Vert
2	614.000M	12.3	+5.9	+19.8	+0.0	+4.6	+0.0	42.6	46.0 hopping	-3.4	Vert
3	960.000M	12.1	+6.0	+24.4	+0.0	+6.0	+0.0	48.5	54.0 hopping	-5.5	Vert
4	960.000M	11.5	+6.0	+24.4	+0.0	+6.0	+0.0	47.9	54.0	-6.1	Vert
5	902.000M	45.5	+6.0	+23.5	+0.0	+5.8	+0.0	80.8	94.6	-13.8	Vert
6	928.000M	44.0	+6.0	+23.9	+0.0	+5.9	+0.0	79.8	94.6 hopping	-14.8	Vert
7	928.000M	43.9	+6.0	+23.9	+0.0	+5.9	+0.0	79.7	94.6	-14.9	Vert
8	902.000M	40.5	+6.0	+23.5	+0.0	+5.8	+0.0	75.8	94.6 hopping	-18.8	Vert


Test Setup Photo(s)




Configuration 1, Below 1GHz



Configuration 1, Below 1GHz

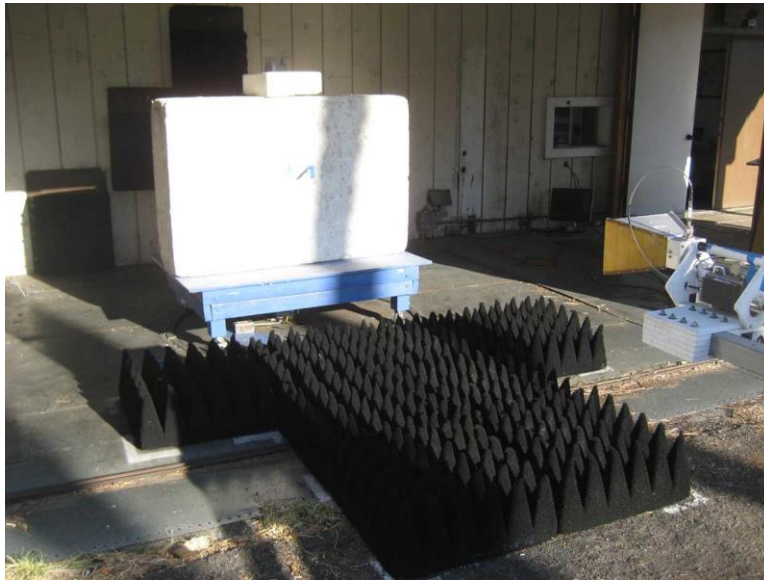

Configuration 1, Above 1GHz

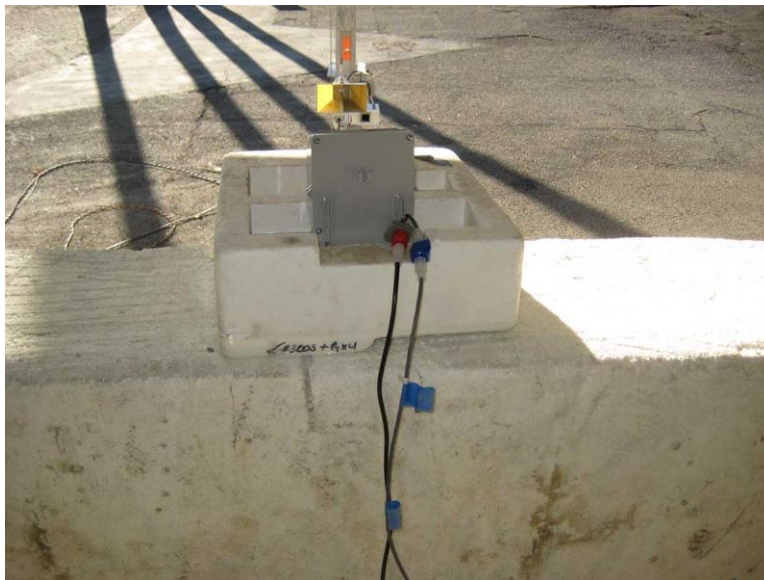


Configuration 1, Above 1GHz




Configuration 2, Below 1GHz




Configuration 2, Below 1GHz

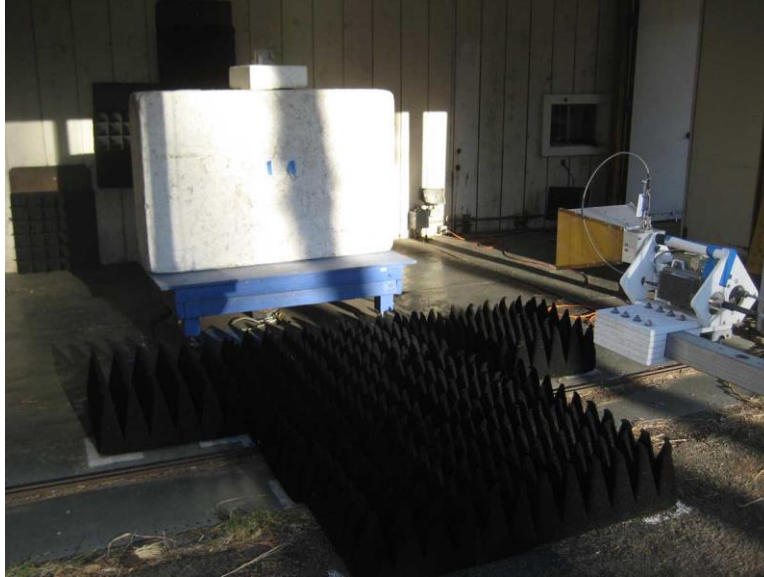

Configuration 2, Above 1GHz

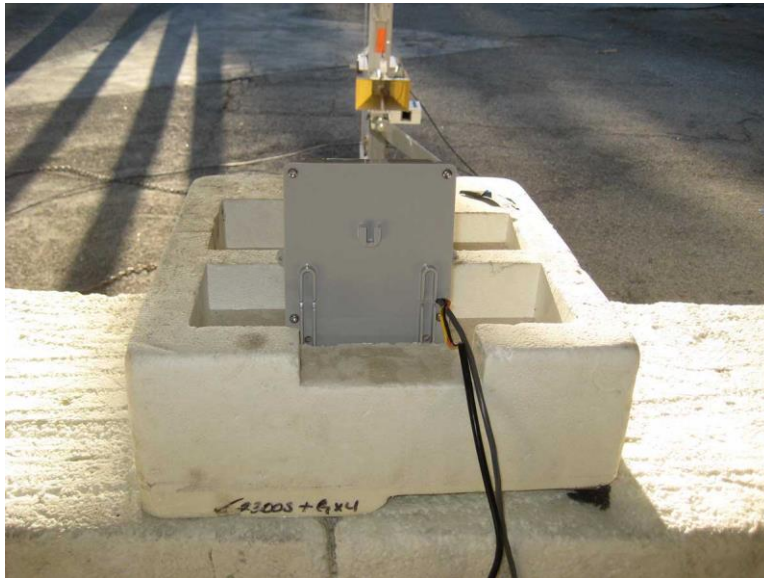

Configuration 2, Above 1GHz

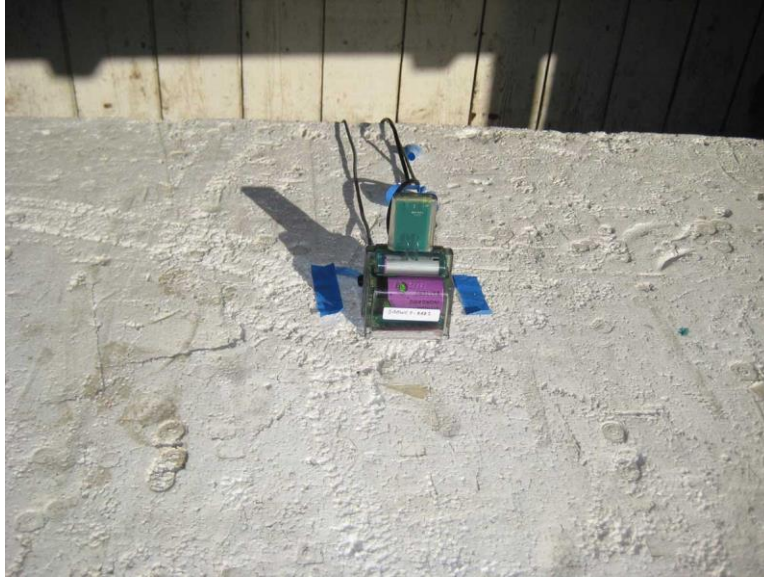


Configuration 3, Below 1GHz



Configuration 3, Below 1GHz



Configuration 3, Above 1GHz

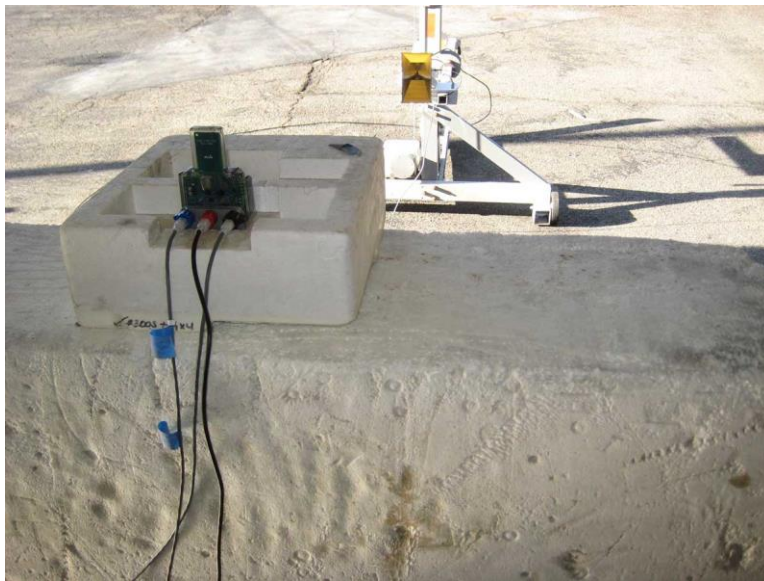

Configuration 3, Above 1GHz

SUPPLEMENTAL INFORMATION

Measurement Uncertainty

Uncertainty Value	Parameter
4.73 dB	Radiated Emissions
3.34 dB	Mains Conducted Emissions
3.30 dB	Disturbance Power

Uncertainties reported are worst case for all CKC Laboratories’ sites and represent expanded uncertainties expressed at approximately the 95% confidence level using a coverage factor of k=2. Compliance is deemed to occur provided measurements are below the specified limits.

Emissions Test Details

TESTING PARAMETERS

Unless otherwise indicated, the following configuration parameters are used for equipment setup: The cables were routed consistent with the typical application by varying the configuration of the test sample. Interface cables were connected to the available ports of the test unit. The effect of varying the position of the cables was investigated to find the configuration that produced maximum emissions. Cables were of the type and length specified in the individual requirements. The length of cable that produced maximum emissions was selected.

The equipment under test (EUT) was set up in a manner that represented its normal use, as shown in the setup photographs. Any special conditions required for the EUT to operate normally are identified in the comments that accompany the emissions tables.

The emissions data was taken with a spectrum analyzer or receiver. Incorporating the applicable correction factors for distance, antenna, cable loss and amplifier gain, the data was reduced as shown in the table below. The corrected data was then compared to the applicable emission limits. Preliminary and final measurements were taken in order to ensure that all emissions from the EUT were found and maximized.

CORRECTION FACTORS

The basic spectrum analyzer reading was converted using correction factors as shown in the highest emissions readings in the tables. For radiated emissions in dBμV/m, the spectrum analyzer reading in dBμV was corrected by using the following formula. This reading was then compared to the applicable specification limit. Individual measurements were compared with the displayed limit value in the margin column. The margin was calculated based on subtracting the limit value from the corrected measurement value; a positive margin represents a measurement exceeding the limit, while a negative margin represents a measurement less than the limit.

SAMPLE CALCULATIONS		
	Meter reading	(dBμV)
+	Antenna Factor	(dB/m)
+	Cable Loss	(dB)
-	Distance Correction	(dB)
-	Preamplifier Gain	(dB)
=	Corrected Reading	(dBμV/m)

TEST INSTRUMENTATION AND ANALYZER SETTINGS

The test instrumentation and equipment listed were used to collect the emissions data. A spectrum analyzer or receiver was used for all measurements. Unless otherwise specified, the following table shows the measuring equipment bandwidth settings that were used in designated frequency bands. For testing emissions, an appropriate reference level and a vertical scale size of 10 dB per division were used.

MEASURING EQUIPMENT BANDWIDTH SETTINGS PER FREQUENCY RANGE			
TEST	BEGINNING FREQUENCY	ENDING FREQUENCY	BANDWIDTH SETTING
CONDUCTED EMISSIONS	150 kHz	30 MHz	9 kHz
RADIATED EMISSIONS	9 kHz	150 kHz	200 Hz
RADIATED EMISSIONS	150 kHz	30 MHz	9 kHz
RADIATED EMISSIONS	30 MHz	1000 MHz	120 kHz
RADIATED EMISSIONS	1000 MHz	>1 GHz	1 MHz

SPECTRUM ANALYZER/RECEIVER DETECTOR FUNCTIONS

The notes that accompany the measurements contained in the emissions tables indicate the type of detector function used to obtain the given readings. Unless otherwise noted, all readings were made in the "positive peak" detector mode. Whenever a "quasi-peak" or "average" reading was recorded, the measurement was annotated with a "QP" or an "Ave" on the appropriate rows of the data sheets. In cases where quasi-peak or average limits were employed and data exists for multiple measurement types for the same frequency then the peak measurement was retained in the report for reference, however the numbering for the affected row was removed and an arrow or caret ("^") was placed in the far left-hand column indicating that the row above takes precedence for comparison to the limit. The following paragraphs describe in more detail the detector functions and when they were used to obtain the emissions data.

Peak

In this mode, the spectrum analyzer or receiver recorded all emissions at their peak value as the frequency band selected was scanned. By combining this function with another feature called "peak hold," the measurement device had the ability to measure intermittent or low duty cycle transient emission peak levels. In this mode the measuring device made a slow scan across the frequency band selected and measured the peak emission value found at each frequency across the band.

Quasi-Peak

Quasi-peak measurements were taken using the quasi-peak detector when the true peak values exceeded or were within 2 dB of a quasi-peak specification limit. Additional QP measurements may have been taken at the discretion of the operator.

Average

Average measurements were taken using the average detector when the true peak values exceeded or were within 2 dB of an average specification limit. Additional average measurements may have been taken at the discretion of the operator. If the specification or test procedure requires trace averaging, then the averaging was performed using 100 samples or as required by the specification. All other average measurements are performed using video bandwidth averaging. To make these measurements, the test engineer reduces the video bandwidth on the measuring device until the modulation of the signal is filtered out. At this point the measuring device is set into the linear mode and the scan time is reduced.