

Itron, Inc.

TEST REPORT FOR

**Gas Endpoint
Model: 500GC**

Tested To The Following Standards:

FCC Part 15 Subpart C Section(s)

**15.247
(FHSS 902-928 MHz)**

Report No.: 98972-4

Date of issue: September 6, 2016



This test report bears the accreditation symbol indicating that the testing performed herein meets the test and reporting requirements of ISO/IEC 17025 under the applicable scope of EMC testing for CKC Laboratories, Inc.

We strive to create long-term, trust based relationships by providing sound, adaptive, customer first testing services. We embrace each of our customers' unique EMC challenges, not as an interruption to set processes, but rather as the reason we are in business.

TABLE OF CONTENTS

Administrative Information	3
Test Report Information	3
Report Authorization	3
Test Facility Information	4
Software Versions	4
Site Registration & Accreditation Information	4
Summary of Results	5
Modifications During Testing	5
Conditions During Testing	5
Equipment Under Test	6
General Product Information	6
FCC Part 15 Subpart C	7
15.247(d) Radiated Emissions & Band Edge	7
Supplemental Information	27
Measurement Uncertainty	27
Emissions Test Details	27

ADMINISTRATIVE INFORMATION

Test Report Information

REPORT PREPARED FOR:

Ittron, Inc.
2111 N. Molter Road
Liberty Lake, WA 99019

REPORT PREPARED BY:

Terri Rayle
CKC Laboratories, Inc.
5046 Sierra Pines Drive
Mariposa, CA 95338

REPRESENTATIVE: Jay Holcomb
Customer Reference Number: 104538

Project Number: 98971

DATE OF EQUIPMENT RECEIPT:

August 24, 2016

DATE(S) OF TESTING:

August 24 -26, 2016

Report Authorization

The test data contained in this report documents the observed testing parameters pertaining to and are relevant for only the sample equipment tested in the agreed upon operational mode(s) and configuration(s) as identified herein. Compliance assessment remains the client's responsibility. This report may not be used to claim product endorsement by A2LA or any government agencies. This test report has been authorized for release under quality control from CKC Laboratories, Inc.

A handwritten signature in black ink, reading "Steve Behm", is positioned above a horizontal line.

Steve Behm
Director of Quality Assurance & Engineering Services
CKC Laboratories, Inc.

Test Facility Information



Our laboratories are configured to effectively test a wide variety of product types. CKC utilizes first class test equipment, anechoic chambers, data acquisition and information services to create accurate, repeatable and affordable test results.

TEST LOCATION(S):
CKC Laboratories, Inc.
110 Olinda Place
Brea, CA 92823

Software Versions

CKC Laboratories Proprietary Software	Version
EMITest Emissions	5.03.02

Site Registration & Accreditation Information

Location	CB #	TAIWAN	CANADA	FCC	JAPAN
Brea D	US0060	SL2-IN-E-1146R	3082D-2	100638	A-0147

SUMMARY OF RESULTS

Standard / Specification: FCC Part 15 Subpart C - 15.247 (FHSS 902-928MHz)

Test Procedure	Description	Modifications	Results
15.247(a)(1)(i)	Occupied Bandwidth	NA	NP
15.247(a)(1)	Carrier Separation	NA	NP
15.247(a)(1)(i)	Number of Hopping Channels	NA	NP
15.247(a)(1)(i)	Average Time of Occupancy	NA	NP
15.247(b)(2)	Output Power	NA	NP
15.247(d)	RF Conducted Emissions & Band Edge	NA	NP
15.247(d)	Radiated Emissions & Band Edge	NA	Pass
15.207	AC Conducted Emissions	NA	NA1

NA = Not Applicable

NA1 = Not applicable because the EUT only operates on battery power.

NP = CKC Laboratories was not contracted to perform test.

Modifications During Testing

This list is a summary of the modifications made to the equipment during testing.

Summary of Conditions
No modifications were made during testing.

Modifications listed above must be incorporated into all production units.

Conditions During Testing

This list is a summary of the conditions noted to the equipment during testing.

Summary of Conditions
None

EQUIPMENT UNDER TEST (EUT)

During testing numerous configurations may have been utilized. The configurations listed below support compliance to the standard(s) listed in the Summary of Results section.

Configuration 1

Equipment Tested:

Device	Manufacturer	Model #	S/N
Gas Endpoint	Itron, Inc.	500GC	NA

Support Equipment:

Device	Manufacturer	Model #	S/N
None			

General Product Information:

Product Information	Manufacturer-Provided Details
Equipment Type:	Stand-Alone Equipment
Type of Wideband System:	FHSS
Operating Frequency Range:	902-928 MHz
Number of Hopping Channels:	See supplemental report
Modulation Type(s):	CW, OOK
Maximum Duty Cycle:	See supplemental report.
Number of TX Chains:	1
Antenna Type(s) and Gain:	See supplemental report
Beamforming Type:	None
Antenna Connection Type:	Integral
Nominal Input Voltage:	Battery, 6.3Vdc
Firmware / Software used for Test:	App Version: 1.9.13.174 CSL Version: 2.9.1.1

FCC Part 15 Subpart C

15.247(d) Radiated Emissions & Band Edge

Test Location: CKC Laboratories, Inc. • 110 N. Olinda Place • Brea, CA 92823 • 714-993-6112
 Customer: **Itron, Inc.**
 Specification: **15.247(d)/ 15.209 Radiated Spurious Emissions**
 Work Order #: **98972** Date: 8/26/2016
 Test Type: **Maximized Emissions** Time: 14:18:19
 Tested By: Don Nguyen Sequence#: 7
 Software: EMITest 5.03.02

Equipment Tested:

Device	Manufacturer	Model #	S/N
Configuration 1			

Support Equipment:

Device	Manufacturer	Model #	S/N
Configuration 1			

Test Conditions / Notes:

The EUT is placed on a Styrofoam platform at 0.8m in height for measurement below 1GHz and 1.5m in height for measurement above 1GHz. The EUT is turned on and set in transmitting mode.
 The EUT has fresh battery installed. Nominal input voltage is 6.3Vdc.
 The EUT is tested in preferred orientation declared by the manufacturer.
 Operating frequency: 903, 910, 915, and 926.8MHz. Modulation: OOK
 Rated power output: +10dBm


Frequency range of measurement = 9kHz-9.28GHz
 9 kHz - 150 kHz, RBW=200 Hz, VBW=600 Hz
 150 kHz -30 MHz, RBW=9 kHz, VBW=27 kHz
 30 MHz - 1000MHz, RBW=120 kHz, VBW=300 kHz (peak detector), RBW=120 kHz, VBW=1MHz (QP detector)
 1000 MHz - 9280MHz, RBW=1 MHz, VBW=3 MHz

Test environment conditions:
 Temperature: 26°C
 Relative Humidity: 46%
 Pressure: 100kPa

Site D
 Test Method: ANSI C63.10 (2013)

Note: The highest fundamental power is measured at 102.4 dBuV/m.

Itron, Inc W/O#: 98972 Sequence#: 7 Date: 8/26/2016
15.247(d)/ 15.209 Radiated Spurious Emissions Test Distance: 3 Meters Horiz

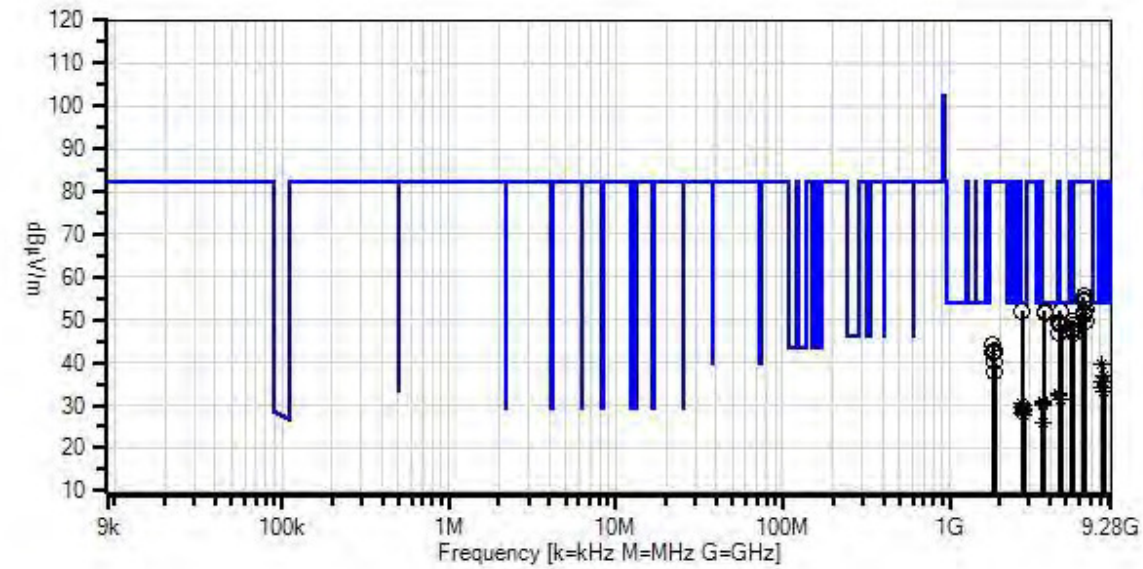

— Readings
× QP Readings
▼ Ambient
— 1 - 15.247(d)/ 15.209 Radiated Spurious Emissions
○ Peak Readings
* Average Readings
Software Version: 5.03.02

Test Equipment:

ID	Asset #	Description	Model	Calibration Date	Cal Due Date
	AN00314	Loop Antenna	6502	5/20/2016	5/20/2018
	AN00010	Preamp	8447D	3/14/2016	3/14/2018
	AN01992	Biconilog Antenna	CBL6111C	12/4/2014	12/4/2016
	ANP05283	Attenuator	ATT-0218-06- NNN-02	5/5/2016	5/5/2018
	ANP05555	Cable	RG223/U	4/5/2016	4/5/2018
	ANP05569	Cable	RG-214/U	4/4/2016	4/4/2018
T1	AN02467	Spectrum Analyzer	E7405A	5/10/2016	5/10/2017
T2	ANP04382	Cable	LDF-50	6/6/2016	6/6/2018
T3	AN00787	Preamp	83017A	6/10/2015	6/10/2017
T4	AN01646	Horn Antenna	3115	3/4/2016	3/4/2018
T5	ANP05563	Cable	ANDL-1-PNMN- 48	6/6/2016	6/6/2018
T6	ANP06977	Cable	PHASEFLEX EJR01N01036.0	4/5/2016	4/5/2018
T7	AN03169	High Pass Filter	HM1155-11SS	6/24/2015	6/24/2017

Measurement Data:

Reading listed by margin.

Test Distance: 3 Meters

#	Freq MHz	Rdng dBμV	T1 T5 dB	T2 T6 dB	T3 T7 dB	T4 dB	Dist Table	Corr dBμV/m	Spec dBμV/m	Margin dB	Polar Ant
1	2709.000M	56.1	+0.0 +2.6	+6.4 +0.4	-39.9 +0.2	+26.3	+0.0	52.1	54.0 OOK, 10dBm, 903MHz	-1.9	Horiz
2	4575.004M	49.9	+0.0 +3.3	+8.6 +0.5	-40.2 +0.1	+29.9	+0.0	52.1	54.0 OOK, 10dBm, 915MHz	-1.9	Vert
3	3707.192M	53.2	+0.0 +3.1	+7.4 +0.6	-40.4 +0.1	+28.0	+0.0	52.0	54.0 OOK, 10dBm, 926.8MHz	-2.0	Horiz
4	3707.221M	52.9	+0.0 +3.1	+7.4 +0.6	-40.4 +0.1	+28.0	+0.0	51.7	54.0 OOK, 10dBm, 926.8MHz	-2.3	Vert
5	5458.827M	44.1	+0.0 +3.7	+9.5 +0.7	-40.1 +0.2	+31.4	+0.0	49.5	54.0 OOK, 10dBm, 910MHz	-4.5	Vert
6	4575.016M	47.0	+0.0 +3.3	+8.6 +0.5	-40.2 +0.1	+29.9	+0.0	49.2	54.0 OOK, 10dBm, 915MHz	-4.8	Horiz
7	4549.020M	47.1	+0.0 +3.2	+8.5 +0.5	-40.2 +0.1	+29.9	+0.0	49.1	54.0 OOK, 10dBm, 910MHz	-4.9	Horiz
8	4633.992M	46.7	+0.0 +3.3	+8.6 +0.6	-40.2 +0.1	+29.9	+0.0	49.0	54.0 OOK, 10dBm, 926.8MHz	-5.0	Horiz
9	5417.996M	43.8	+0.0 +3.7	+9.4 +0.7	-40.1 +0.2	+31.3	+0.0	49.0	54.0 OOK, 10dBm, 903MHz	-5.0	Vert

10	5458.869M	42.5	+0.0 +3.7	+9.5 +0.7	-40.1 +0.2	+31.4	+0.0	47.9	54.0 OOK, 10dBm, 910MHz	-6.1	Horiz
11	5418.013M	42.4	+0.0 +3.7	+9.4 +0.7	-40.1 +0.2	+31.3	+0.0	47.6	54.0 OOK, 10dBm, 903MHz	-6.4	Horiz
12	4515.013M	45.1	+0.0 +3.2	+8.5 +0.5	-40.2 +0.1	+29.9	+0.0	47.1	54.0 OOK, 10dBm, 903MHz	-6.9	Horiz
13	8127.000M Ave	27.4	+0.0 +5.4	+11.9 +0.8	-40.0 +0.2	+34.1	+0.0	39.8	54.0 OOK, 10dBm, 903MHz	-14.2	Vert
^	8127.000M	43.7	+0.0 +5.4	+11.9 +0.8	-40.0 +0.2	+34.1	+0.0	56.1	54.0 OOK, 10dBm, 903MHz	+2.1	Vert
15	8341.192M Ave	22.9	+0.0 +5.6	+12.2 +0.8	-39.9 +0.3	+34.8	+0.0	36.7	54.0 OOK, 10dBm, 926.8MHz	-17.3	Horiz
^	8341.192M	42.8	+0.0 +5.6	+12.2 +0.8	-39.9 +0.3	+34.8	+0.0	56.6	54.0 OOK, 10dBm, 926.8MHz	+2.6	Horiz
17	8235.012M Ave	23.4	+0.0 +5.6	+12.1 +0.8	-40.0 +0.3	+34.5	+0.0	36.7	54.0 OOK, 10dBm, 915MHz	-17.3	Horiz
^	8235.012M	42.7	+0.0 +5.6	+12.1 +0.8	-40.0 +0.3	+34.5	+0.0	56.0	54.0 OOK, 10dBm, 915MHz	+2.0	Horiz
19	8188.252M Ave	22.8	+0.0 +5.5	+12.0 +0.8	-40.0 +0.3	+34.3	+0.0	35.7	54.0 OOK, 10dBm, 910MHz	-18.3	Horiz
^	8188.252M	44.4	+0.0 +5.5	+12.0 +0.8	-40.0 +0.3	+34.3	+0.0	57.3	54.0 OOK, 10dBm, 910MHz	+3.3	Horiz
21	8235.012M Ave	22.3	+0.0 +5.6	+12.1 +0.8	-40.0 +0.3	+34.5	+0.0	35.6	54.0 OOK, 10dBm, 915MHz	-18.4	Vert
^	8235.012M	42.3	+0.0 +5.6	+12.1 +0.8	-40.0 +0.3	+34.5	+0.0	55.6	54.0 OOK, 10dBm, 915MHz	+1.6	Vert
23	8127.000M Ave	21.8	+0.0 +5.4	+11.9 +0.8	-40.0 +0.2	+34.1	+0.0	34.2	54.0 OOK, 10dBm, 903MHz	-19.8	Horiz
^	8127.000M	44.9	+0.0 +5.4	+11.9 +0.8	-40.0 +0.2	+34.1	+0.0	57.3	54.0 OOK, 10dBm, 903MHz	+3.3	Horiz
25	8341.246M Ave	19.5	+0.0 +5.6	+12.2 +0.8	-39.9 +0.3	+34.8	+0.0	33.3	54.0 OOK, 10dBm, 926.8MHz	-20.7	Vert
^	8341.246M	42.7	+0.0 +5.6	+12.2 +0.8	-39.9 +0.3	+34.8	+0.0	56.5	54.0 OOK, 10dBm, 926.8MHz	+2.5	Vert

27	4548.990M Ave	30.6	+0.0 +3.2	+8.5 +0.5	-40.2 +0.1	+29.9	+0.0	32.6	54.0 OOK, 10dBm, 910MHz	-21.4	Vert
^	4548.990M	52.4	+0.0 +3.2	+8.5 +0.5	-40.2 +0.1	+29.9	+0.0	54.4	54.0 OOK, 10dBm, 910MHz	+0.4	Vert
29	4514.996M Ave	30.3	+0.0 +3.2	+8.5 +0.5	-40.2 +0.1	+29.9	+0.0	32.3	54.0 OOK, 10dBm, 903MHz	-21.7	Vert
^	4514.996M	52.7	+0.0 +3.2	+8.5 +0.5	-40.2 +0.1	+29.9	+0.0	54.7	54.0 OOK, 10dBm, 903MHz	+0.7	Vert
31	4634.000M Ave	29.0	+0.0 +3.3	+8.6 +0.6	-40.2 +0.1	+29.9	+0.0	31.3	54.0 OOK, 10dBm, 926.8MHz	-22.7	Vert
^	4634.021M	51.6	+0.0 +3.3	+8.6 +0.6	-40.2 +0.1	+29.9	+0.0	53.9	54.0 OOK, 10dBm, 926.8MHz	-0.1	Vert
33	3639.211M Ave	32.7	+0.0 +3.0	+7.3 +0.6	-40.4 +0.1	+27.8	+0.0	31.1	54.0 OOK, 10dBm, 910MHz	-22.9	Vert
^	3639.211M	56.0	+0.0 +3.0	+7.3 +0.6	-40.4 +0.1	+27.8	+0.0	54.4	54.0 OOK, 10dBm, 910MHz	+0.4	Vert
35	3612.000M Ave	32.5	+0.0 +3.0	+7.3 +0.6	-40.4 +0.2	+27.8	+0.0	31.0	54.0 OOK, 10dBm, 903MHz	-23.0	Vert
^	3612.000M	57.9	+0.0 +3.0	+7.3 +0.6	-40.4 +0.2	+27.8	+0.0	56.4	54.0 OOK, 10dBm, 903MHz	+2.4	Vert
37	3612.000M Ave	32.2	+0.0 +3.0	+7.3 +0.6	-40.4 +0.2	+27.8	+0.0	30.7	54.0 OOK, 10dBm, 903MHz	-23.3	Horiz
^	3612.000M	58.1	+0.0 +3.0	+7.3 +0.6	-40.4 +0.2	+27.8	+0.0	56.6	54.0 OOK, 10dBm, 903MHz	+2.6	Horiz
39	2709.000M Ave	34.7	+0.0 +2.6	+6.4 +0.4	-39.9 +0.2	+26.3	+0.0	30.7	54.0 OOK, 10dBm, 903MHz	-23.3	Vert
^	2709.000M	58.3	+0.0 +2.6	+6.4 +0.4	-39.9 +0.2	+26.3	+0.0	54.3	54.0 OOK, 10dBm, 903MHz	+0.3	Vert
41	3639.203M Ave	31.7	+0.0 +3.0	+7.3 +0.6	-40.4 +0.1	+27.8	+0.0	30.1	54.0 OOK, 10dBm, 910MHz	-23.9	Horiz
^	3639.203M	57.8	+0.0 +3.0	+7.3 +0.6	-40.4 +0.1	+27.8	+0.0	56.2	54.0 OOK, 10dBm, 910MHz	+2.2	Horiz
43	2780.400M Ave	33.7	+0.0 +2.6	+6.6 +0.4	-40.0 +0.2	+26.6	+0.0	30.1	54.0 OOK, 10dBm, 926.8MHz	-23.9	Vert

^	2780.400M	60.8	+0.0 +2.6	+6.6 +0.4	-40.0 +0.2	+26.6	+0.0	57.2	54.0 OOK, 10dBm, 926.8MHz	+3.2	Vert
45	3659.983M Ave	31.3	+0.0 +3.1	+7.4 +0.6	-40.4 +0.1	+27.9	+0.0	30.0	54.0 OOK, 10dBm, 915MHz	-24.0	Horiz
^	3659.983M	56.9	+0.0 +3.1	+7.4 +0.6	-40.4 +0.1	+27.9	+0.0	55.6	54.0 OOK, 10dBm, 915MHz	+1.6	Horiz
47	2729.399M Ave	33.5	+0.0 +2.6	+6.5 +0.4	-40.0 +0.2	+26.4	+0.0	29.6	54.0 OOK, 10dBm, 910MHz	-24.4	Vert
^	2729.399M	59.7	+0.0 +2.6	+6.5 +0.4	-40.0 +0.2	+26.4	+0.0	55.8	54.0 OOK, 10dBm, 910MHz	+1.8	Vert
49	2744.991M Ave	33.0	+0.0 +2.6	+6.5 +0.4	-40.0 +0.2	+26.4	+0.0	29.1	54.0 OOK, 10dBm, 915MHz	-24.9	Vert
^	2744.991M	59.4	+0.0 +2.6	+6.5 +0.4	-40.0 +0.2	+26.4	+0.0	55.5	54.0 OOK, 10dBm, 915MHz	+1.5	Vert
51	2780.392M Ave	32.4	+0.0 +2.6	+6.6 +0.4	-40.0 +0.2	+26.6	+0.0	28.8	54.0 OOK, 10dBm, 926.8MHz	-25.2	Horiz
^	2780.392M	58.5	+0.0 +2.6	+6.6 +0.4	-40.0 +0.2	+26.6	+0.0	54.9	54.0 OOK, 10dBm, 926.8MHz	+0.9	Horiz
53	2729.412M Ave	32.2	+0.0 +2.6	+6.5 +0.4	-40.0 +0.2	+26.4	+0.0	28.3	54.0 OOK, 10dBm, 910MHz	-25.7	Horiz
^	2729.412M	58.1	+0.0 +2.6	+6.5 +0.4	-40.0 +0.2	+26.4	+0.0	54.2	54.0 OOK, 10dBm, 910MHz	+0.2	Horiz
55	2744.983M Ave	31.5	+0.0 +2.6	+6.5 +0.4	-40.0 +0.2	+26.4	+0.0	27.6	54.0 OOK, 10dBm, 915MHz	-26.4	Horiz
^	2744.983M	57.3	+0.0 +2.6	+6.5 +0.4	-40.0 +0.2	+26.4	+0.0	53.4	54.0 OOK, 10dBm, 915MHz	-0.6	Horiz
57	6368.619M	48.9	+0.0 +4.1	+10.0 +0.7	-39.8 +0.3	+31.2	+0.0	55.4	82.4 OOK, 10dBm, 910MHz	-27.0	Vert
58	6321.000M	48.5	+0.0 +4.1	+10.0 +0.7	-39.9 +0.3	+31.2	+0.0	54.9	82.4 OOK, 10dBm, 903MHz	-27.5	Vert
59	3659.991M Ave	27.3	+0.0 +3.1	+7.4 +0.6	-40.4 +0.1	+27.9	+0.0	26.0	54.0 OOK, 10dBm, 915MHz	-28.0	Vert
^	3659.991M	55.8	+0.0 +3.1	+7.4 +0.6	-40.4 +0.1	+27.9	+0.0	54.5	54.0 OOK, 10dBm, 915MHz	+0.5	Vert

61	6405.012M	47.8	+0.0 +4.1	+10.1 +0.7	-39.8 +0.3	+31.1	+0.0	54.3	82.4 OOK, 10dBm, 915MHz	-28.1	Vert
62	6487.621M	46.2	+0.0 +4.1	+10.1 +0.7	-40.0 +0.3	+31.0	+0.0	52.4	82.4 OOK, 10dBm, 926.8MHz	-30.0	Vert
63	6368.636M	45.5	+0.0 +4.1	+10.0 +0.7	-39.8 +0.3	+31.2	+0.0	52.0	82.4 OOK, 10dBm, 910MHz	-30.4	Horiz
64	6405.016M	44.9	+0.0 +4.1	+10.1 +0.7	-39.8 +0.3	+31.1	+0.0	51.4	82.4 OOK, 10dBm, 915MHz	-31.0	Horiz
65	6321.013M	44.4	+0.0 +4.1	+10.0 +0.7	-39.9 +0.3	+31.2	+0.0	50.8	82.4 OOK, 10dBm, 903MHz	-31.6	Horiz
66	6487.592M	43.3	+0.0 +4.1	+10.1 +0.7	-40.0 +0.3	+31.0	+0.0	49.5	82.4 OOK, 10dBm, 926.8MHz	-32.9	Horiz
67	5490.016M	42.3	+0.0 +3.7	+9.5 +0.7	-40.1 +0.2	+31.5	+0.0	47.8	82.4 OOK, 10dBm, 915MHz	-34.6	Horiz
68	5490.012M	42.1	+0.0 +3.7	+9.5 +0.7	-40.1 +0.2	+31.5	+0.0	47.6	82.4 OOK, 10dBm, 915MHz	-34.8	Vert
69	5560.792M	41.5	+0.0 +3.7	+9.5 +0.7	-40.2 +0.2	+31.5	+0.0	46.9	82.4 OOK, 10dBm, 926.8MHz	-35.5	Horiz
70	1805.996M	52.0	+0.0 +2.2	+5.0 +0.5	-39.4 +0.3	+23.8	+0.0	44.4	82.4 OOK, 10dBm, 903MHz	-38.0	Vert
71	1830.004M	50.5	+0.0 +2.2	+5.1 +0.5	-39.4 +0.3	+23.8	+0.0	43.0	82.4 OOK, 10dBm, 915MHz	-39.4	Vert
72	1830.016M	49.9	+0.0 +2.2	+5.1 +0.5	-39.4 +0.3	+23.8	+0.0	42.4	82.4 OOK, 10dBm, 915MHz	-40.0	Horiz
73	1819.607M	49.9	+0.0 +2.2	+5.1 +0.5	-39.4 +0.3	+23.8	+0.0	42.4	82.4 OOK, 10dBm, 910MHz	-40.0	Vert
74	1806.013M	49.9	+0.0 +2.2	+5.0 +0.5	-39.4 +0.3	+23.8	+0.0	42.3	82.4 OOK, 10dBm, 903MHz	-40.1	Horiz
75	1819.620M	49.8	+0.0 +2.2	+5.1 +0.5	-39.4 +0.3	+23.8	+0.0	42.3	82.4 OOK, 10dBm, 910MHz	-40.1	Horiz
76	1853.621M	47.3	+0.0 +2.3	+5.2 +0.5	-39.5 +0.3	+23.9	+0.0	40.0	82.4 OOK, 10dBm, 926.8MHz	-42.4	Vert
77	1853.658M	45.0	+0.0 +2.3	+5.2 +0.5	-39.5 +0.3	+23.9	+0.0	37.7	82.4 OOK, 10dBm, 926.8MHz	-44.7	Horiz

Test Location: CKC Laboratories, Inc. • 110 N. Olinda Place • Brea, CA 92823 • 714-993-6112
 Customer: **Itron, Inc.**
 Specification: **15.247(d)/ 15.209 Radiated Spurious Emissions**
 Work Order #: **98972** Date: 8/25/2016
 Test Type: **Maximized Emissions** Time: 09:11:10
 Tested By: Don Nguyen Sequence#: 6
 Software: EMITest 5.03.02

Equipment Tested:

Device	Manufacturer	Model #	S/N
Configuration 1			

Support Equipment:

Device	Manufacturer	Model #	S/N
Configuration 1			

Test Conditions / Notes:

The EUT is placed on a Styrofoam platform at 0.8m in height for measurement below 1GHz and 1.5m in height for measurement above 1GHz. The EUT is turned on and set in transmitting mode.
 The EUT has fresh battery installed. Nominal input voltage is 6.3Vdc.
 The EUT is tested in preferred orientation declared by the manufacturer.

Operating frequency: 902.2, 910, 915, and 927.75MHz. Modulation: CW
 Operating frequency: 903, 926.8MHz. Modulation: OOK
 Rated power output: +27dBm


Frequency range of measurement = 9kHz-9.28GHz
 9 kHz - 150 kHz, RBW=200 Hz, VBW=600 Hz
 150 kHz -30 MHz, RBW=9 kHz, VBW=27 kHz
 30 MHz - 1000MHz, RBW=120 kHz, VBW=300 kHz (peak detector), RBW=120 kHz, VBW=1MHz (QP detector)
 1000 MHz - 9280MHz, RBW=1 MHz, VBW=3 MHz

Test environment conditions:
 Temperature: 26°C
 Relative Humidity: 46%
 Pressure: 100kPa

Site D
 Test Method: ANSI C63.10 (2013)

Note: The highest fundamental power is measured at 123.3 dBuV/m.

Itron, Inc W/O#: 98972 Sequence#: 6 Date: 8/25/2016
 15.247(d)/ 15.209 Radiated Spurious Emissions Test Distance: 3 Meters Horiz

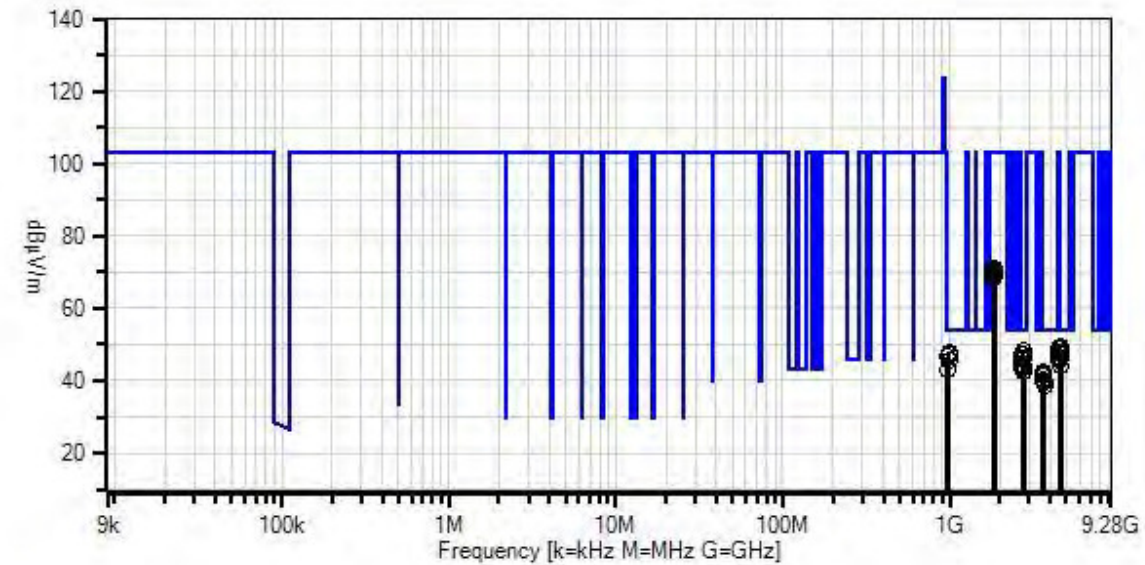

— Readings
 × QP Readings
 ▼ Ambient
 — 1 - 15.247(d)/ 15.209 Radiated Spurious Emissions

○ Peak Readings
 * Average Readings
 Software Version: 5.03.02

Test Equipment:

ID	Asset #	Description	Model	Calibration Date	Cal Due Date
	AN00314	Loop Antenna	6502	5/20/2016	5/20/2018
T1	AN00010	Preamp	8447D	3/14/2016	3/14/2018
T2	AN01992	Biconilog Antenna	CBL6111C	12/4/2014	12/4/2016
T3	ANP05555	Cable	RG223/U	4/5/2016	4/5/2018
T4	ANP05569	Cable	RG-214/U	4/4/2016	4/4/2018
T5	ANP05283	Attenuator	ATT-0218-06- NNN-02	5/5/2016	5/5/2018
T6	ANP04382	Cable	LDF-50	6/6/2016	6/6/2018
T7	AN02467	Spectrum Analyzer	E7405A	5/10/2016	5/10/2017
T8	AN00787	Preamp	83017A	6/10/2015	6/10/2017
T9	AN01646	Horn Antenna	3115	3/4/2016	3/4/2018
T10	ANP05563	Cable	ANDL-1-PNMN- 48	6/6/2016	6/6/2018
T11	ANP06977	Cable	PHASEFLEX EJR01N01036.0	4/5/2016	4/5/2018
T12	AN03169	High Pass Filter	HM1155-11SS	6/24/2015	6/24/2017

Measurement Data:

Reading listed by margin.

Test Distance: 3 Meters

#	Freq	Rdng	T1 T5 T9	T2 T6 T10	T3 T7 T11	T4 T8 T12	Dist	Corr	Spec	Margin	Polar
	MHz	dBμV	dB	dB	dB	dB	Table	dBμV/m	dBμV/m	dB	Ant
1	4575.000M	47.3	+0.0 +0.0 +29.9	+0.0 +8.6 +3.3	+0.0 +0.0 +0.5	+0.0 -40.2 +0.1	+0.0	49.5	54.0 CW, 27dBm, 915MHz	-4.5	Horiz
2	4549.996M	46.7	+0.0 +0.0 +29.9	+0.0 +8.5 +3.2	+0.0 +0.0 +0.5	+0.0 -40.2 +0.1	+0.0	48.7	54.0 CW, 27dBm, 910MHz	-5.3	Horiz
3	4638.750M	46.4	+0.0 +0.0 +29.9	+0.0 +8.6 +3.3	+0.0 +0.0 +0.6	+0.0 -40.2 +0.1	+0.0	48.7	54.0 CW, 27dBm, 927.75MHz	-5.3	Horiz
4	2744.996M	52.1	+0.0 +0.0 +26.4	+0.0 +6.5 +2.6	+0.0 +0.0 +0.4	+0.0 -40.0 +0.2	+0.0	48.2	54.0 CW, 27dBm, 915MHz	-5.8	Vert
5	993.002M	37.9	-27.4 +5.9 +0.0	+23.5 +3.5 +0.0	+0.6 +0.0 +0.0	+3.8 +0.0 +0.0	+0.0	47.8	54.0	-6.2	Horiz
6	4633.996M	45.3	+0.0 +0.0 +29.9	+0.0 +8.6 +3.3	+0.0 +0.0 +0.6	+0.0 -40.2 +0.1	+0.0	47.6	54.0 OOK, 27dBm, 926.8MHz	-6.4	Horiz
7	4514.996M	45.6	+0.0 +0.0 +29.9	+0.0 +8.5 +3.2	+0.0 +0.0 +0.5	+0.0 -40.2 +0.1	+0.0	47.6	54.0 OOK, 27dBm, 903MHz	-6.4	Horiz
8	987.994M	37.6	-27.4 +5.9 +0.0	+23.5 +3.5 +0.0	+0.6 +0.0 +0.0	+3.8 +0.0 +0.0	+0.0	47.5	54.0	-6.5	Horiz
9	2706.596M	51.4	+0.0 +0.0 +26.2	+0.0 +6.4 +2.6	+0.0 +0.0 +0.4	+0.0 -39.9 +0.2	+0.0	47.3	54.0 CW, 27dBm, 902.2MHz	-6.7	Vert

10	2783.250M	50.7	+0.0	+0.0	+0.0	+0.0	+0.0	47.1	54.0	-6.9	Horiz
			+0.0	+6.6	+0.0	-40.0			CW, 27dBm,		
			+26.6	+2.6	+0.4	+0.2			927.75MHz		
11	4633.996M	44.8	+0.0	+0.0	+0.0	+0.0	+0.0	47.1	54.0	-6.9	Vert
			+0.0	+8.6	+0.0	-40.2			OOK, 27dBm,		
			+29.9	+3.3	+0.6	+0.1			926.8MHz		
12	967.028M	37.3	-27.5	+23.3	+0.6	+3.7	+0.0	46.7	54.0	-7.3	Horiz
			+5.9	+3.4	+0.0	+0.0					
			+0.0	+0.0	+0.0	+0.0					
13	4510.996M	44.6	+0.0	+0.0	+0.0	+0.0	+0.0	46.6	54.0	-7.4	Vert
			+0.0	+8.5	+0.0	-40.2			CW, 27dBm,		
			+29.9	+3.2	+0.5	+0.1			902.2MHz		
14	2729.996M	50.3	+0.0	+0.0	+0.0	+0.0	+0.0	46.4	54.0	-7.6	Vert
			+0.0	+6.5	+0.0	-40.0			CW, 27dBm,		
			+26.4	+2.6	+0.4	+0.2			910MHz		
15	4549.996M	44.3	+0.0	+0.0	+0.0	+0.0	+0.0	46.3	54.0	-7.7	Vert
			+0.0	+8.5	+0.0	-40.2			CW, 27dBm,		
			+29.9	+3.2	+0.5	+0.1			910MHz		
16	2780.396M	49.9	+0.0	+0.0	+0.0	+0.0	+0.0	46.3	54.0	-7.7	Horiz
			+0.0	+6.6	+0.0	-40.0			OOK, 27dBm,		
			+26.6	+2.6	+0.4	+0.2			926.8MHz		
17	4574.996M	44.0	+0.0	+0.0	+0.0	+0.0	+0.0	46.2	54.0	-7.8	Vert
			+0.0	+8.6	+0.0	-40.2			CW, 27dBm,		
			+29.9	+3.3	+0.5	+0.1			915MHz		
18	4514.984M	44.1	+0.0	+0.0	+0.0	+0.0	+0.0	46.1	54.0	-7.9	Vert
			+0.0	+8.5	+0.0	-40.2			OOK, 27dBm,		
			+29.9	+3.2	+0.5	+0.1			903MHz		
19	4510.996M	43.9	+0.0	+0.0	+0.0	+0.0	+0.0	45.9	54.0	-8.1	Horiz
			+0.0	+8.5	+0.0	-40.2			CW, 27dBm,		
			+29.9	+3.2	+0.5	+0.1			902.2MHz		
20	993.019M	35.6	-27.4	+23.5	+0.6	+3.8	+0.0	45.5	54.0	-8.5	Horiz
			+5.9	+3.5	+0.0	+0.0					
			+0.0	+0.0	+0.0	+0.0					
21	2708.996M	48.5	+0.0	+0.0	+0.0	+0.0	+0.0	44.5	54.0	-9.5	Horiz
			+0.0	+6.4	+0.0	-39.9			OOK, 27dBm,		
			+26.3	+2.6	+0.4	+0.2			903MHz		
22	4638.746M	42.0	+0.0	+0.0	+0.0	+0.0	+0.0	44.3	54.0	-9.7	Vert
			+0.0	+8.6	+0.0	-40.2			CW, 27dBm,		
			+29.9	+3.3	+0.6	+0.1			927.75MHz		
23	2729.996M	47.9	+0.0	+0.0	+0.0	+0.0	+0.0	44.0	54.0	-10.0	Horiz
			+0.0	+6.5	+0.0	-40.0			CW, 27dBm,		
			+26.4	+2.6	+0.4	+0.2			910MHz		
24	2745.000M	47.7	+0.0	+0.0	+0.0	+0.0	+0.0	43.8	54.0	-10.2	Horiz
			+0.0	+6.5	+0.0	-40.0			CW, 27dBm,		
			+26.4	+2.6	+0.4	+0.2			915MHz		
25	2706.596M	47.8	+0.0	+0.0	+0.0	+0.0	+0.0	43.7	54.0	-10.3	Horiz
			+0.0	+6.4	+0.0	-39.9			CW, 27dBm,		
			+26.2	+2.6	+0.4	+0.2			902.2MHz		
26	2783.246M	47.0	+0.0	+0.0	+0.0	+0.0	+0.0	43.4	54.0	-10.6	Vert
			+0.0	+6.6	+0.0	-40.0			CW, 27dBm,		
			+26.6	+2.6	+0.4	+0.2			927.75MHz		

27	2708.980M	47.4	+0.0 +0.0 +26.3	+0.0 +6.4 +2.6	+0.0 +0.0 +0.4	+0.0 -39.9 +0.2	+0.0	43.4	54.0 OOK, 27dBm, 903MHz	-10.6	Vert
28	961.987M	33.7	-27.5 +5.9 +0.0	+23.2 +3.4 +0.0	+0.6 +0.0 +0.0	+3.7 +0.0 +0.0	+0.0	43.0	54.0	-11.0	Horiz
29	2780.396M	46.0	+0.0 +0.0 +26.6	+0.0 +6.6 +2.6	+0.0 +0.0 +0.4	+0.0 -40.0 +0.2	+0.0	42.4	54.0 OOK, 27dBm, 926.8MHz	-11.6	Vert
30	3608.796M	43.8	+0.0 +0.0 +27.8	+0.0 +7.3 +3.0	+0.0 +0.0 +0.6	+0.0 -40.4 +0.2	+0.0	42.3	54.0 CW, 27dBm, 902.2MHz	-11.7	Vert
31	3608.796M	43.3	+0.0 +0.0 +27.8	+0.0 +7.3 +3.0	+0.0 +0.0 +0.6	+0.0 -40.4 +0.2	+0.0	41.8	54.0 CW, 27dBm, 902.2MHz	-12.2	Horiz
32	3659.996M	42.9	+0.0 +0.0 +27.9	+0.0 +7.4 +3.1	+0.0 +0.0 +0.6	+0.0 -40.4 +0.1	+0.0	41.6	54.0 CW, 27dBm, 915MHz	-12.4	Vert
33	3611.980M	41.8	+0.0 +0.0 +27.8	+0.0 +7.3 +3.0	+0.0 +0.0 +0.6	+0.0 -40.4 +0.2	+0.0	40.3	54.0 OOK, 27dBm, 903MHz	-13.7	Vert
34	3660.000M	41.4	+0.0 +0.0 +27.9	+0.0 +7.4 +3.1	+0.0 +0.0 +0.6	+0.0 -40.4 +0.1	+0.0	40.1	54.0 CW, 27dBm, 915MHz	-13.9	Horiz
35	3639.996M	41.6	+0.0 +0.0 +27.8	+0.0 +7.3 +3.0	+0.0 +0.0 +0.6	+0.0 -40.4 +0.1	+0.0	40.0	54.0 CW, 27dBm, 910MHz	-14.0	Horiz
36	3611.996M	41.3	+0.0 +0.0 +27.8	+0.0 +7.3 +3.0	+0.0 +0.0 +0.6	+0.0 -40.4 +0.2	+0.0	39.8	54.0 OOK, 27dBm, 903MHz	-14.2	Horiz
37	3639.996M	41.3	+0.0 +0.0 +27.8	+0.0 +7.3 +3.0	+0.0 +0.0 +0.6	+0.0 -40.4 +0.1	+0.0	39.7	54.0 CW, 27dBm, 910MHz	-14.3	Vert
38	3710.996M	40.9	+0.0 +0.0 +28.0	+0.0 +7.4 +3.1	+0.0 +0.0 +0.6	+0.0 -40.4 +0.1	+0.0	39.7	54.0 CW, 27dBm, 927.75MHz	-14.3	Vert
39	3711.000M	40.7	+0.0 +0.0 +28.0	+0.0 +7.4 +3.1	+0.0 +0.0 +0.6	+0.0 -40.4 +0.1	+0.0	39.5	54.0 CW, 27dBm, 927.75MHz	-14.5	Horiz
40	3707.196M	40.1	+0.0 +0.0 +28.0	+0.0 +7.4 +3.1	+0.0 +0.0 +0.6	+0.0 -40.4 +0.1	+0.0	38.9	54.0 OOK, 27dBm, 926.8MHz	-15.1	Vert
41	3707.196M	40.0	+0.0 +0.0 +28.0	+0.0 +7.4 +3.1	+0.0 +0.0 +0.6	+0.0 -40.4 +0.1	+0.0	38.8	54.0 OOK, 27dBm, 926.8MHz	-15.2	Horiz
42	1804.396M	78.8	+0.0 +0.0 +23.8	+0.0 +5.0 +2.2	+0.0 +0.0 +0.5	+0.0 -39.4 +0.3	+0.0	71.2	103.3 CW, 27dBm, 902.2MHz	-32.1	Vert
43	1855.496M	78.4	+0.0 +0.0 +23.9	+0.0 +5.2 +2.3	+0.0 +0.0 +0.5	+0.0 -39.5 +0.3	+0.0	71.1	103.3 CW, 27dBm, 927.75MHz	-32.2	Vert

44	1853.596M	78.0	+0.0	+0.0	+0.0	+0.0	+0.0	70.7	103.3	-32.6	Vert
			+0.0	+5.2	+0.0	-39.5			OOK, 27dBm,		
			+23.9	+2.3	+0.5	+0.3			926.8MHz		
45	1855.500M	77.5	+0.0	+0.0	+0.0	+0.0	+0.0	70.2	103.3	-33.1	Horiz
			+0.0	+5.2	+0.0	-39.5			CW, 27dBm,		
			+23.9	+2.3	+0.5	+0.3			927.75MHz		
46	1830.000M	77.6	+0.0	+0.0	+0.0	+0.0	+0.0	70.1	103.3	-33.2	Horiz
			+0.0	+5.1	+0.0	-39.4			CW, 27dBm,		
			+23.8	+2.2	+0.5	+0.3			915MHz		
47	1804.396M	77.6	+0.0	+0.0	+0.0	+0.0	+0.0	70.0	103.3	-33.3	Horiz
			+0.0	+5.0	+0.0	-39.4			CW, 27dBm,		
			+23.8	+2.2	+0.5	+0.3			902.2MHz		
48	1829.996M	77.1	+0.0	+0.0	+0.0	+0.0	+0.0	69.6	103.3	-33.7	Vert
			+0.0	+5.1	+0.0	-39.4			CW, 27dBm,		
			+23.8	+2.2	+0.5	+0.3			915MHz		
49	1819.996M	77.0	+0.0	+0.0	+0.0	+0.0	+0.0	69.5	103.3	-33.8	Vert
			+0.0	+5.1	+0.0	-39.4			CW, 27dBm,		
			+23.8	+2.2	+0.5	+0.3			910MHz		
50	1853.596M	76.4	+0.0	+0.0	+0.0	+0.0	+0.0	69.1	103.3	-34.2	Horiz
			+0.0	+5.2	+0.0	-39.5			OOK, 27dBm,		
			+23.9	+2.3	+0.5	+0.3			926.8MHz		
51	1819.996M	75.9	+0.0	+0.0	+0.0	+0.0	+0.0	68.4	103.3	-34.9	Horiz
			+0.0	+5.1	+0.0	-39.4			CW, 27dBm,		
			+23.8	+2.2	+0.5	+0.3			910MHz		
52	1805.996M	75.9	+0.0	+0.0	+0.0	+0.0	+0.0	68.3	103.3	-35.0	Horiz
			+0.0	+5.0	+0.0	-39.4			OOK, 27dBm,		
			+23.8	+2.2	+0.5	+0.3			903MHz		
53	1805.980M	75.8	+0.0	+0.0	+0.0	+0.0	+0.0	68.2	103.3	-35.1	Vert
			+0.0	+5.0	+0.0	-39.4			OOK, 27dBm,		
			+23.8	+2.2	+0.5	+0.3			903MHz		

Band Edge

Band Edge Summary

Frequency (MHz)	Modulation	Ant. Type	Field Strength (dBuV/m @3m)	Limit (dBuV/m @3m)	Results
614	OOK	Integral	30.2	<46	Pass
902	OOK	Integral	88.8	<103.3	Pass
928	OOK	Integral	87.4	<103.3	Pass
960	OOK	Integral	49.7	<54	Pass

Note: The highest fundamental power is measured at 123.3 dBuV/m @3m.

Test Setup / Conditions / Data

Test Location: CKC Laboratories, Inc. • 110 N. Olinda Place • Brea, CA 92823 • 714-993-6112
 Customer: **Itron, Inc.**
 Specification: **15.247(d) Band-edge Radiated Spurious Emissions**
 Work Order #: **98972** Date: 8/24/2016
 Test Type: **Maximized Emissions** Time: 13:35:37
 Tested By: Don Nguyen Sequence#: 7
 Software: EMITest 5.03.02

Equipment Tested:

Device	Manufacturer	Model #	S/N
Configuration 1			

Support Equipment:

Device	Manufacturer	Model #	S/N
Configuration 1			

Test Conditions / Notes:

The EUT is placed on a Styrofoam platform at 0.8m in height for measurement below 1GHz and 1.5m in height for measurement above 1GHz. The EUT is turned on and set in transmitting mode.
 The EUT has fresh battery installed. Nominal input voltage is 6.3Vdc.
 The EUT is tested in preferred orientation declared by the manufacturer.
 Operating frequency: 903 and 926.8MHz
 Modulation: OOK
 Rated power output: +27dBm


Frequency range of measurement = 9kHz-9.28GHz
 9 kHz - 150 kHz, RBW=200 Hz, VBW=600 Hz
 150 kHz - 30 MHz, RBW=9 kHz, VBW=27 kHz
 30 MHz - 1000MHz, RBW=120 kHz, VBW=300 kHz (peak detector), RBW=120 kHz, VBW=1MHz (QP detector)
 1000 MHz - 9280MHz, RBW=1 MHz, VBW=3 MHz

Test environment conditions:
 Temperature: 26°C
 Relative Humidity: 46%
 Pressure: 100kPa

Site D
 Test Method: ANSI C63.10 (2013)

Note: The highest fundamental power is measured at 123.3 dBuV/m.

Itron, Inc WO#: 98972 Sequence#: 7 Date: 8/24/2016
15.247(d) Band-edge Radiated Spurious Emissions Test Distance: 3 Meters Horiz

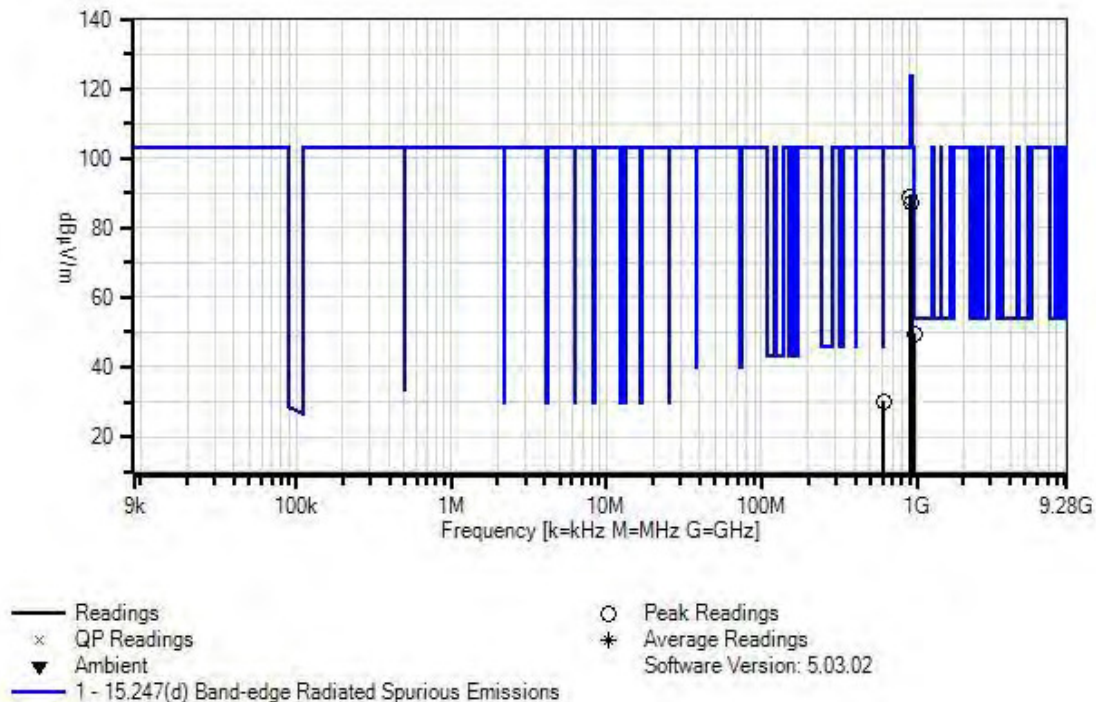

Test Equipment:

ID	Asset #	Description	Model	Calibration Date	Cal Due Date
T1	AN00010	Preamp	8447D	3/14/2016	3/14/2018
T2	AN01992	Biconilog Antenna	CBL6111C	12/4/2014	12/4/2016
T3	ANP04382	Cable	LDF-50	6/6/2016	6/6/2018
T4	ANP05555	Cable	RG223/U	4/5/2016	4/5/2018
T5	ANP05569	Cable	RG-214/U	4/4/2016	4/4/2018
T6	AN02467	Spectrum Analyzer	E7405A	5/10/2016	5/10/2017
T7	ANP05283	Attenuator	ATT-0218-06-NNN-02	5/5/2016	5/5/2018



Measurement Data:



Reading listed by margin.

Test Distance: 3 Meters

#	Freq	Rdng	T1	T2	T3	T4	Dist	Corr	Spec	Margin	Polar
	MHz	dBμV	T5	T6	T7		Table	dBμV/m	dBμV/m	dB	Ant
1	960.000M	40.4	-27.5	+23.2	+3.4	+0.6	+0.0	49.7	54.0	-4.3	Horiz
			+3.7	+0.0	+5.9						
2	902.000M	80.5	-27.6	+22.6	+3.3	+0.5	+0.0	88.8	103.3	-14.5	Horiz
			+3.6	+0.0	+5.9						
3	614.000M	26.6	-28.1	+19.9	+2.7	+0.5	+0.0	30.2	46.0	-15.8	Horiz
			+2.8	+0.0	+5.8						
4	928.000M	78.4	-27.5	+22.9	+3.4	+0.6	+0.0	87.4	103.3	-15.9	Horiz
			+3.7	+0.0	+5.9						

Band Edge Plots

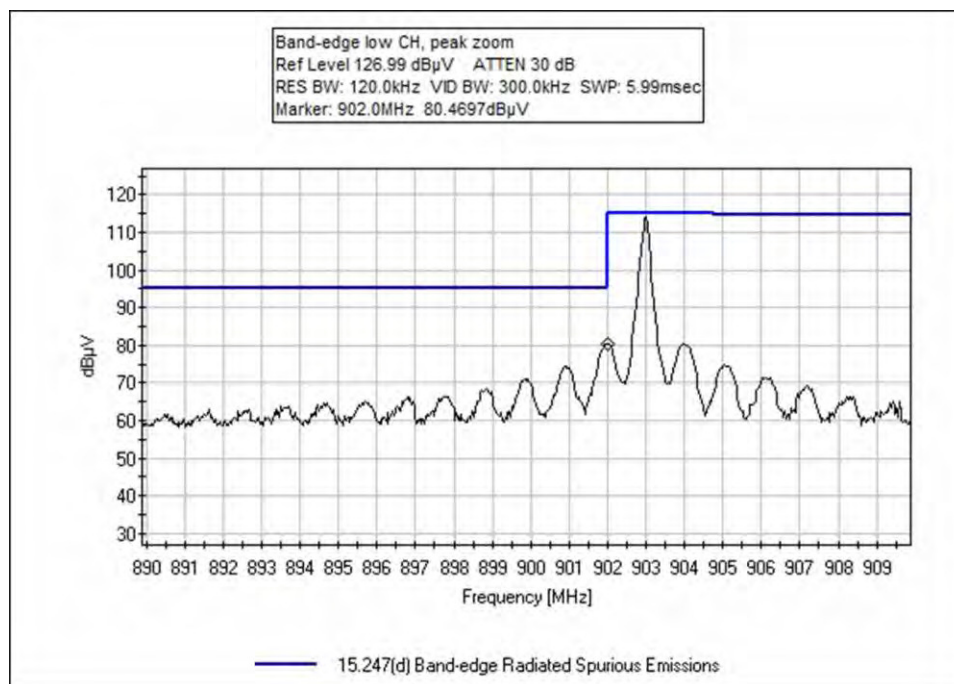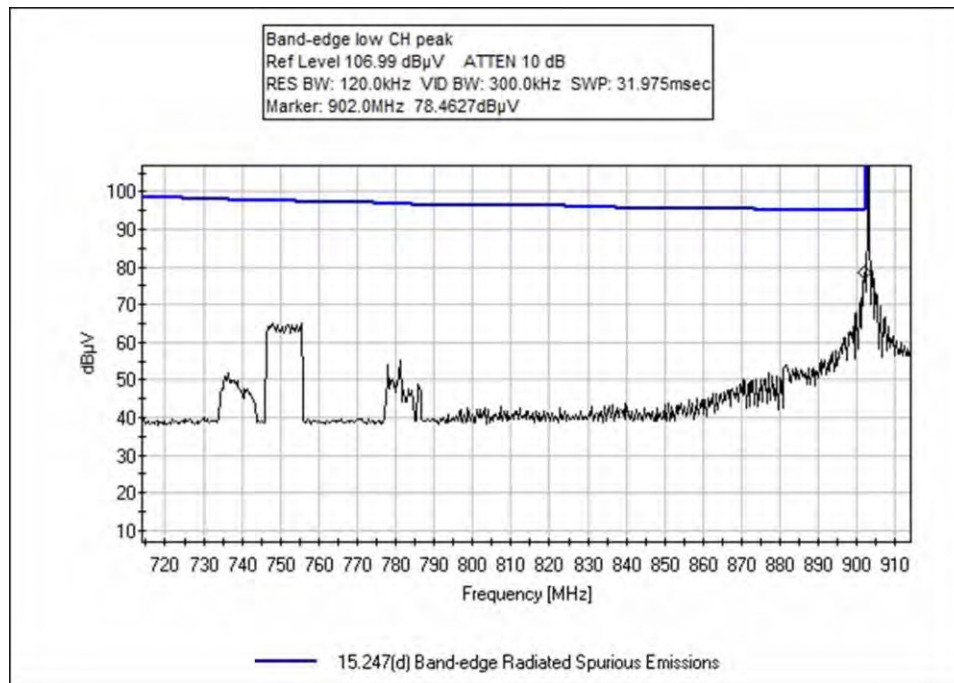

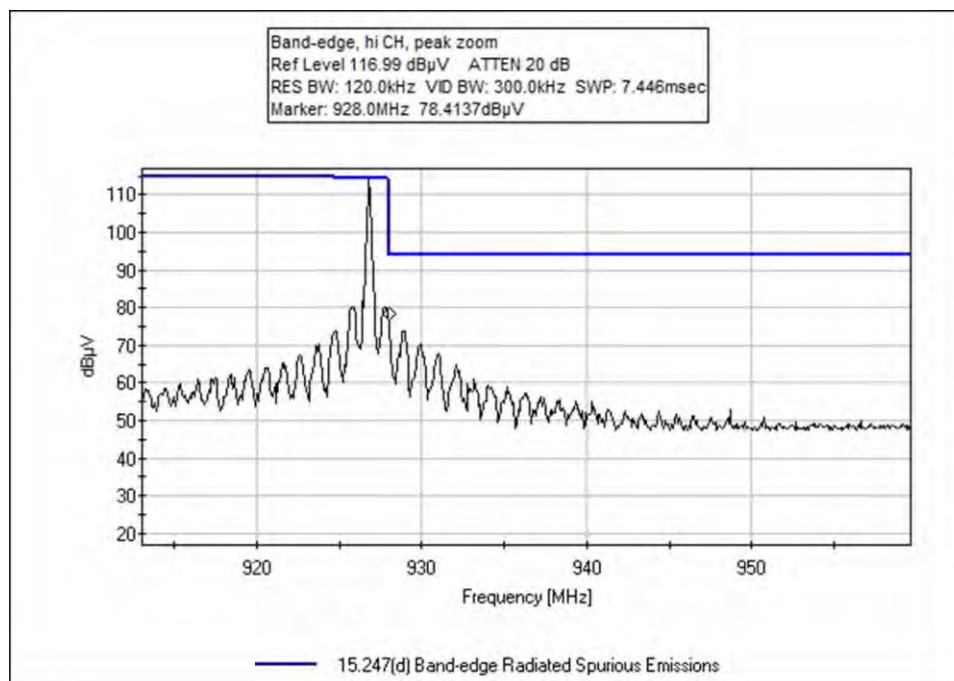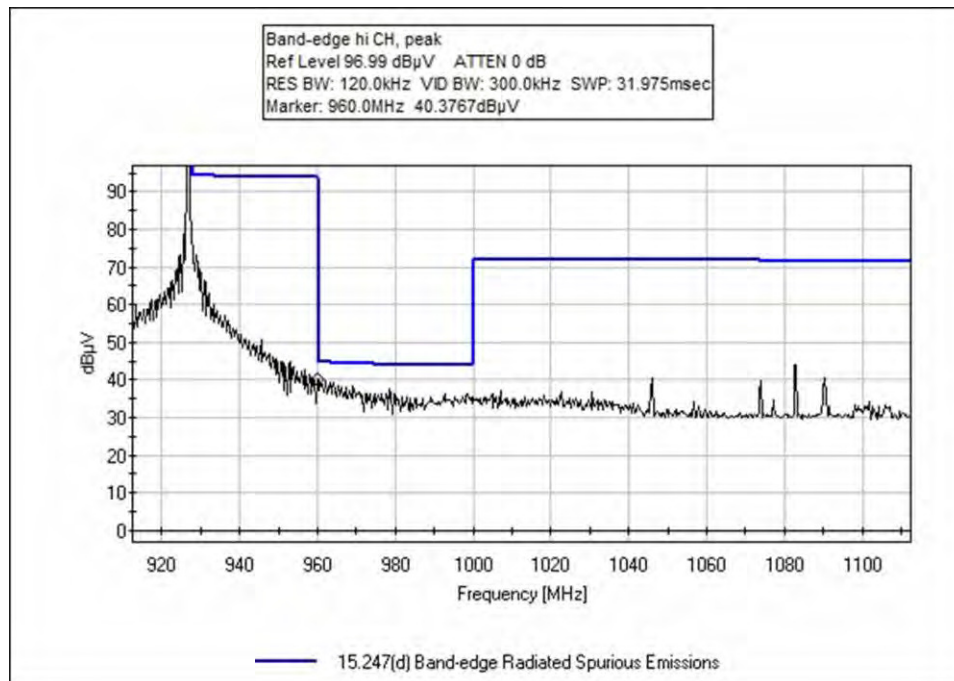

Test Setup Photos





SUPPLEMENTAL INFORMATION

Measurement Uncertainty

Uncertainty Value	Parameter
4.73 dB	Radiated Emissions
3.34 dB	Mains Conducted Emissions
3.30 dB	Disturbance Power

Reported uncertainties represent expanded uncertainties expressed at approximately the 95% confidence level using a coverage factor of $k=2$. Compliance is deemed to occur provided measurements are below the specified limits.

Emissions Test Details

TESTING PARAMETERS

Unless otherwise indicated, the following configuration parameters are used for equipment setup: The cables were routed consistent with the typical application by varying the configuration of the test sample. Interface cables were connected to the available ports of the test unit. The effect of varying the position of the cables was investigated to find the configuration that produced maximum emissions. Cables were of the type and length specified in the individual requirements. The length of cable that produced maximum emissions was selected.

The equipment under test (EUT) was set up in a manner that represented its normal use, as shown in the setup photographs. Any special conditions required for the EUT to operate normally are identified in the comments that accompany the emissions tables.

The emissions data was taken with a spectrum analyzer or receiver. Incorporating the applicable correction factors for distance, antenna, cable loss and amplifier gain, the data was reduced as shown in the table below. The corrected data was then compared to the applicable emission limits. Preliminary and final measurements were taken in order to ensure that all emissions from the EUT were found and maximized.

CORRECTION FACTORS

The basic spectrum analyzer reading was converted using correction factors as shown in the highest emissions readings in the tables. For radiated emissions in $\text{dB}\mu\text{V}/\text{m}$, the spectrum analyzer reading in $\text{dB}\mu\text{V}$ was corrected by using the following formula. This reading was then compared to the applicable specification limit. Individual measurements were compared with the displayed limit value in the margin column. The margin was calculated based on subtracting the limit value from the corrected measurement value; a positive margin represents a measurement exceeding the limit, while a negative margin represents a measurement less than the limit.

SAMPLE CALCULATIONS		
	Meter reading	($\text{dB}\mu\text{V}$)
+	Antenna Factor	(dB/m)
+	Cable Loss	(dB)
-	Distance Correction	(dB)
-	Preamplifier Gain	(dB)
=	Corrected Reading	($\text{dB}\mu\text{V}/\text{m}$)

TEST INSTRUMENTATION AND ANALYZER SETTINGS

The test instrumentation and equipment listed were used to collect the emissions data. A spectrum analyzer or receiver was used for all measurements. Unless otherwise specified, the following table shows the measuring equipment bandwidth settings that were used in designated frequency bands. For testing emissions, an appropriate reference level and a vertical scale size of 10 dB per division were used.

MEASURING EQUIPMENT BANDWIDTH SETTINGS PER FREQUENCY RANGE			
TEST	BEGINNING FREQUENCY	ENDING FREQUENCY	BANDWIDTH SETTING
CONDUCTED EMISSIONS	150 kHz	30 MHz	9 kHz
RADIATED EMISSIONS	9 kHz	150 kHz	200 Hz
RADIATED EMISSIONS	150 kHz	30 MHz	9 kHz
RADIATED EMISSIONS	30 MHz	1000 MHz	120 kHz
RADIATED EMISSIONS	1000 MHz	>1 GHz	1 MHz

SPECTRUM ANALYZER/RECEIVER DETECTOR FUNCTIONS

The notes that accompany the measurements contained in the emissions tables indicate the type of detector function used to obtain the given readings. Unless otherwise noted, all readings were made in the "positive peak" detector mode. Whenever a "quasi-peak" or "average" reading was recorded, the measurement was annotated with a "QP" or an "Ave" on the appropriate rows of the data sheets. In cases where quasi-peak or average limits were employed and data exists for multiple measurement types for the same frequency then the peak measurement was retained in the report for reference, however the numbering for the affected row was removed and an arrow or caret ("^") was placed in the far left-hand column indicating that the row above takes precedence for comparison to the limit. The following paragraphs describe in more detail the detector functions and when they were used to obtain the emissions data.

Peak

In this mode, the spectrum analyzer or receiver recorded all emissions at their peak value as the frequency band selected was scanned. By combining this function with another feature called "peak hold," the measurement device had the ability to measure intermittent or low duty cycle transient emission peak levels. In this mode the measuring device made a slow scan across the frequency band selected and measured the peak emission value found at each frequency across the band.

Quasi-Peak

Quasi-peak measurements were taken using the quasi-peak detector when the true peak values exceeded or were within 2 dB of a quasi-peak specification limit. Additional QP measurements may have been taken at the discretion of the operator.

Average

Average measurements were taken using the average detector when the true peak values exceeded or were within 2 dB of an average specification limit. Additional average measurements may have been taken at the discretion of the operator. If the specification or test procedure requires trace averaging, then the averaging was performed using 100 samples or as required by the specification. All other average measurements are performed using video bandwidth averaging. To make these measurements, the test engineer reduces the video bandwidth on the measuring device until the modulation of the signal is filtered out. At this point the measuring device is set into the linear mode and the scan time is reduced.