




Test Data

Maximum Conducted Output Power

Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Limit (dBm)	Verdict
NVNT	BLE	2402	Ant1	3.535	30	Pass
NVNT	BLE	2442	Ant1	2.45	30	Pass
NVNT	BLE	2480	Ant1	1.232	30	Pass



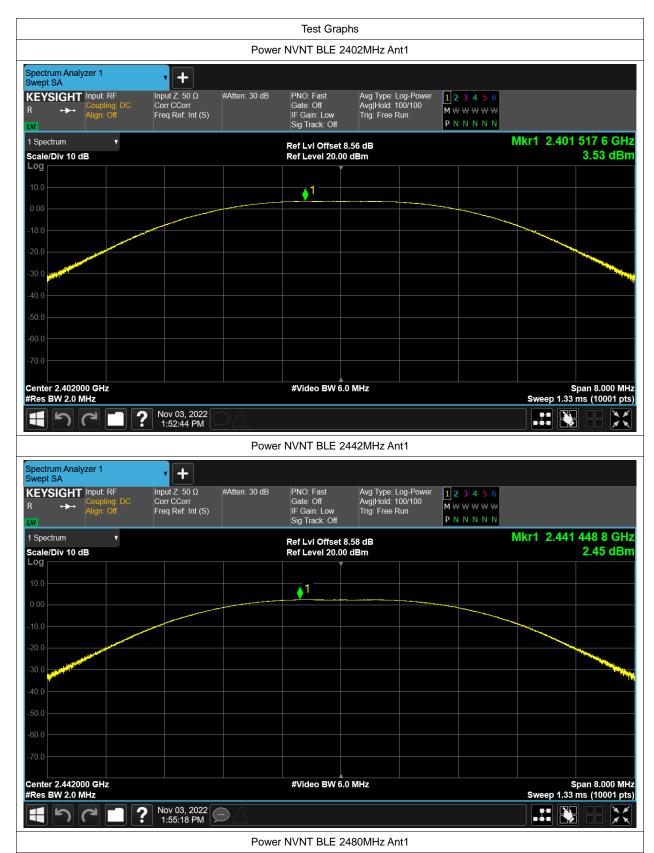









-6dB Bandwidth

Condition	Mode	Frequency (MHz)	Antenna	-6 dB Bandwidth (MHz)	limit	Verdic
NVNT	BLE	2402	Ant1	1.092	0.5	Pass
NVNT	BLE	2442	Ant1	1.127	0.5	Pass
NVNT	BLE	2480	Ant1	1.126	0.5	Pass













Occupied Channel Bandwidth

Condition	Mode	Frequency (MHz)	Antenna	99% OBW (MHz)	
NVNT	BLE	2402	Ant1	2.033	
NVNT	BLE	2442	Ant1	2.034	
NVNT	BLE	2480	Ant1	2.041	

Page 7 of 19

Project No.: JYTSZR2211005















Maximum Power Spectral Density Level

Condition	Mode	Frequency (MHz)	Antenna	Max PSD (dBm)	Limit (dBm)	Verdict
NVNT	BLE	2402	Ant1	-14.42	8	Pass
NVNT	BLE	2442	Ant1	-15.724	8	Pass
NVNT	BLE	2480	Ant1	-16.924	8	Pass



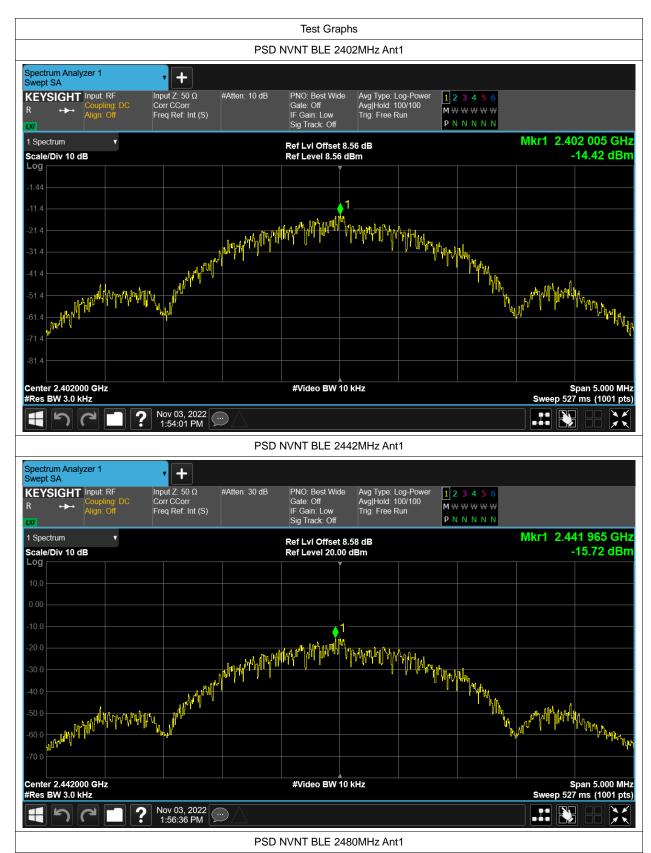



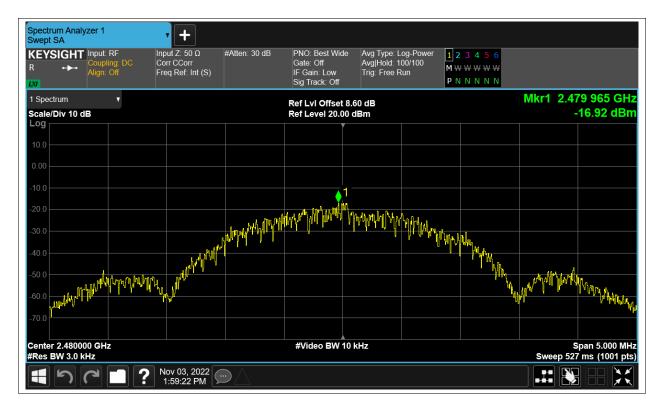






Band Edge

Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	BLE	2402	Ant1	-50.52	-20	Pass
NVNT	BLE	2480	Ant1	-52.09	-20	Pass







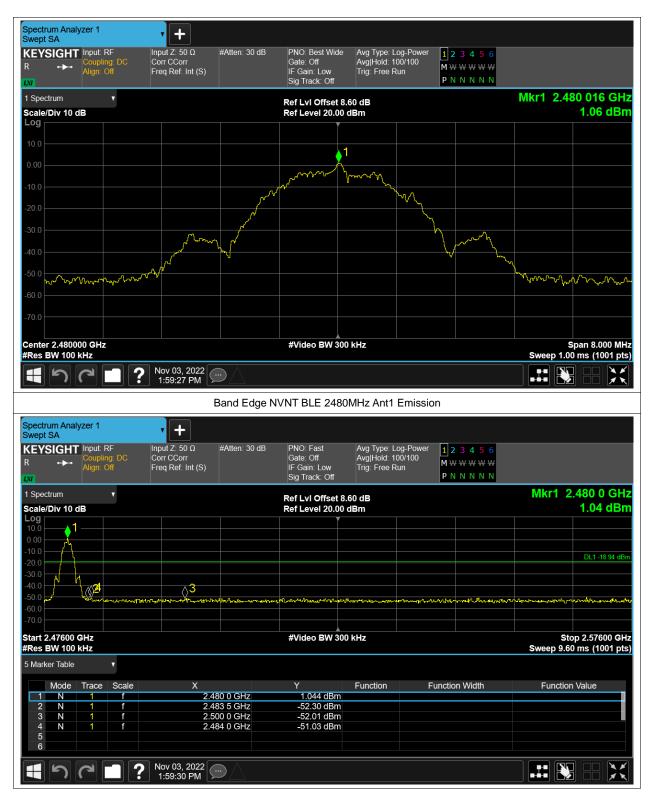





Conducted RF Spurious Emission

Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	BLE	2402	Ant1	-44.64	-20	Pass
NVNT	BLE	2442	Ant1	-43.47	-20	Pass
NVNT	BLE	2480	Ant1	-43.09	-20	Pass



