

Nemko Test Report: 114552-1TRFWL

Applicant: Autostart Inc.
5764 Rue Paré
Mont-Royal, Québec
H4P 2M2

Apparatus: HST-2524

FCC ID: EZSAESHG24A

In Accordance With: FCC Part 15 Subpart C, 15.231
Periodic operation in the band 40.66-40.70MHz and
above 70 MHz.

Authorized By:

A handwritten signature in blue ink, appearing to read 'Andrey Adelberg', is written over a faint, light blue circular watermark that contains the letters 'N' and 'M'.

Andrey Adelberg, EMC/Wireless Specialist

Date: October 10, 2008

Total Number of Pages: 21

TABLE OF CONTENTS

Section 1 : Report Summary	3
Section 2 : Equipment Under Test.....	4
2.1 Identification of Equipment Under Test (EUT).....	4
2.2 Accessories	4
2.3 EUT Description.....	4
2.4 Technical Specifications of the EUT	4
2.5 EUT Setup diagram	5
2.6 Operation of the EUT during testing	5
2.7 Modifications incorporated in the EUT	5
Section 3 : Test Conditions.....	6
3.1 Specifications	6
3.2 Deviations From Laboratory Test Procedures	6
3.3 Test Environment	6
3.4 Measurement Uncertainty.....	6
3.5 Test Equipment.....	7
Section 4 : Results Summary	8
4.1 FCC Part 15 Subpart B : Test Results	8
4.2 FCC Part 15 Subpart C : Test Results	8
Appendix A : Part 15 Subpart B Test Results.....	9
Clause 15.109(a) Radiated Emissions.....	9
Appendix B : Part 15 Subpart C Test Results.....	11
Clause 15.209(a) Radiated Emissions within Restricted Bands	11
Clause 15.231(a) Conditions for intentional radiators to comply with periodic operation	14
Clause 15.231(b) Radiated Emissions	16
Clause 15.231(c) 20dB Bandwidth.....	18
Appendix B : Setup Photographs	19
Appendix C : Block Diagram of Test Setups.....	21

Section 1 : Report Summary

These tests were conducted on a sample of the equipment for the purpose of demonstrating compliance with Part 15, Subpart C. Radiated tests were conducted in accordance with ANSI C63.4-2003.

The assessment summary is as follows:

Apparatus Assessed:	HST-2524
Specification:	FCC Part 15 Subpart C, 15.231
Compliance Status:	Complies
Exclusions:	None
Non-compliances:	None
Report Release History:	Original Release
Test Location:	Nemko Canada Inc. 303 River Road Ottawa, Ontario K1V 1H2
Registration Number:	176392 (3m Semi-Anechoic Chamber)
Tests Performed By:	Jason Nixon
Test Dates:	October 1, 2008

Note that the results contained in this report relate only to the items tested and were obtained in the period between the date of initial receipt of samples and the date of issue of the report.

This test report has been completed in accordance with the requirements of ISO/IEC 17025. All results contain in this report are within Nemko Canada's ISO/IEC 17025 accreditation.

Nemko Canada Inc. authorizes the applicant to reproduce this report provided it is reproduced in its entirety and for use by the company's employees only.

Any use which a third party makes of this report, or any reliance on or decisions to be made based on it, are the responsibility of such third parties. Nemko Canada Inc. accepts no responsibility f



Section 2 : Equipment Under Test

2.1 Identification of Equipment Under Test (EUT)

The following information identifies the EUT under test:

Type of Equipment:	2-Way Remote Control
Brand Name:	HHU 2524
Model Name or Number:	HST-2524
Serial Number:	None
Nemko Sample Number:	1
FCC ID:	EZSAESHG24A
Date of Receipt:	September 30, 2008

2.2 Accessories

No accessories were used during this assessment.


2.3 EUT Description

The EUT is a 2-way remote car starter with 4 keys.

2.4 Technical Specifications of the EUT

Operating Frequency:	372.5MHz
Modulation:	OOK modulation using ASK
Occupied Bandwidth:	925kHz
Emission Designator:	925KK1D
Antenna Data:	Integral
Power Supply Requirements:	2 x 3VDC CR2016 Batteries

2.5 EUT Setup diagram

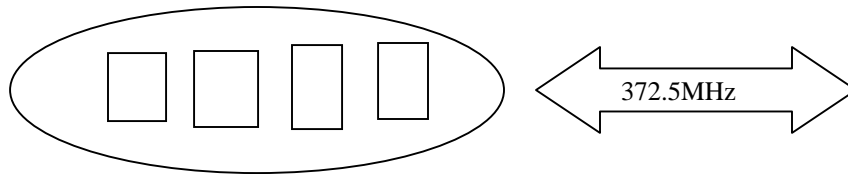

2.6 Operation of the EUT during testing

The EUT used test software that allowed a continuous transmit mode or continuous receive mode.

2.7 Modifications incorporated in the EUT

There were no modifications performed to the EUT during this assessment.

Section 3 : Test Conditions

3.1 Specifications

The apparatus was assessed against the following specifications:

FCC Part 15 Subpart B, 15.107 and 15.109

Unintentional Radiators

FCC Part 15 Subpart C, 15.231

Periodic operation in the band 40.66-40.70 MHz and above 70 MHz.

3.2 Deviations From Laboratory Test Procedures

No deviations were made from laboratory test procedures.

3.3 Test Environment

All tests were performed under the following environmental conditions:

Temperature range	:	15 – 30 °C
Humidity range	:	20 - 75 %
Pressure range	:	86 - 106 kPa
Power supply range	:	+/- 5% of rated voltages

3.4 Measurement Uncertainty

Nemko Canada measurement uncertainty has been calculated using guidance of UKAS LAB 34:2003 and TIA-603-B Nov 7, 2002. All calculations have been performed to provide a confidence level of 95% and can be found in Nemko Canada document MU-003.

3.5 Test Equipment

Equipment	Manufacturer	Model No.	Asset/Serial No.	Cal. Date	Next Cal.
3m EMI Test Chamber	TDK	SAC-3	FA002047	May 06/08	May 06/09
Bilog	Sunol	JB3	FA002108	Jan. 21/08	Jan. 21/09
Flush Mount Turntable	Sunol	FM2022	FA002082	NCR	NCR
Controller	Sunol	SC104V	FA002060	NCR	NCR
Mast	Sunol	TLT2	FA002061	NCR	NCR
Receiver/Spectrum Analyzer	Rohde & Schwarz	ESU 26	FA002043	Dec. 07/07	Dec. 07/08
50 Coax cable	HUBER + SUHNER	None	FA002022	July 07/08	July 07/09
50 Coax cable	HUBER + SUHNER	None	FA002074	July 07/08	July 07/09
Horn Antenna #2	EMCO	3115	FA000825	Jan. 15/08	Jan. 15/09
1 – 18 GHz Amplifier	JCA	JCA118-503	FA002091	Oct 2/07	Oct 2/08

COU – Calibrate on Use

NCR – No Calibration Required

Section 4 : Results Summary

This section contains the following:

FCC Part 15 Subpart B : Test Results
 FCC Part 15 Subpart C : Test Results

The column headed 'Required' indicates whether the associated clauses were invoked for the apparatus under test. The following abbreviations are used:

N No : not applicable / not relevant.

Y Yes : Mandatory i.e. the apparatus shall conform to these tests.

N/T Not Tested, mandatory but not assessed. (See Report Summary)

4.1 FCC Part 15 Subpart B : Test Results

Part 15	Test Description	Required	Result
15.107(a)	Conducted Emissions for Class B	N	PASS
15.109(a)	Radiated Emissions for Class B	Y	

4.2 FCC Part 15 Subpart C : Test Results

Part 15	Test Description	Required	Result
15.31(e)	Variation of Power source	N	PASS
15.207(a)	Powerline Conducted Emissions	N	
15.209(a)	Radiated Emissions within Restricted Bands	Y	
15.231(a)(1)	Manually operated transmitter	Y	
15.231(a)(2)	Automatically activated transmitter	N	
15.231(a)(3)	Periodic transmissions at regular predetermined intervals	N	
15.231(a)(4)	Radiators used in cases of emergency	N	
15.231(a)(5)	Set-up information for security systems	N	
15.231(b)	Radiated Emissions	Y	
15.231(c)	20dB Bandwidth	Y	
15.231(d)	Devices operating within the frequency band 40.66-40.70 MHz	N	PASS
15.231(e)	Radiated emissions for Periodic radiators	N	

Notes:



Appendix A : Part 15 Subpart B Test Results

Clause 15.109(a) Radiated Emissions

Except for Class A digital devices, the field strength of radiated emissions from unintentional radiators at a distance of 3 meters shall not exceed the following values:

Frequency of Emission (MHz)	Field Strength (microvoltsmeter)
30 - 88	100
88 - 216	150
216 - 960	200
Above 960	500

Test Results: Pass


Additional Observations:

The Spectrum was searched from 30MHz to 2GHz.

The EUT was measured using fresh new batteries.

Measurement equipment setup was 120kHz Quasi-peak detector for measurements below 1GHz and 1MHz RBW/VBW peak detector above 1GHz.

All Measurements were performed at 3 meters.

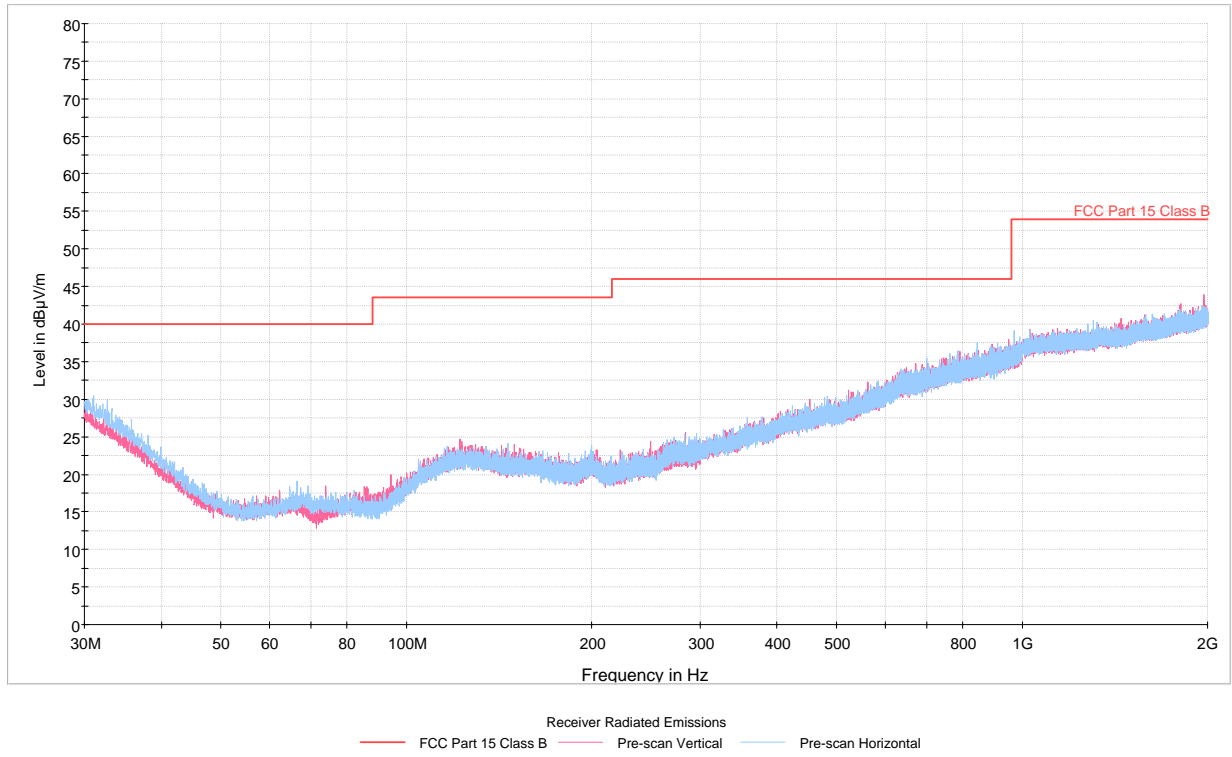



Appendix B : Part 15 Subpart C Test Results

Clause 15.209(a) Radiated Emissions within Restricted Bands

Except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength (microvoltsmeter) (kHz)	Measurement Distance (meters)
0.009-0.490	2400/F	300
0.490-1.705	24000/F	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Test Results: Pass

Additional Observations:

The Spectrum was searched from 30MHz to the 10th Harmonic.

These results apply to emissions found in the Restricted bands defined in FCC Part 15 Subpart C, 15.205.

The EUT was measured on three orthogonal axis with fresh new batteries.

All measurements were performed using a Peak Detector with 100kHz RBW/VBW below 1GHz and a 1MHz RBW/VBW above 1GHz at a distance of 3 meters.

Peak Measurements

Freq. (MHz)	Ant	Pol. V/H	RCVD Signal (dB μ V)	Corr. (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)
1117.5	Horn2	V	79.21	-18.1	61.11	74	12.89
1117.5	Horn2	H	73.68	-18.1	55.58	74	18.42
1490	Horn2	V	89.86	-16.8	73.06	74	0.94
1490	Horn2	H	83.86	-16.8	67.06	74	6.94
2235	Horn2	V	70.85	-13.4	57.45	74	16.55
2235	Horn2	H	72.22	-13.4	58.82	74	15.18
3352.5	Horn2	V	65.53	-9.4	56.13	74	17.87
3352.5	Horn2	H	67.62	-9.4	58.22	74	15.78
3725	Horn2	V	60.28	-7.1	53.18	74	20.82
3725	Horn2	H	58.51	-7.1	51.41	74	22.59


Note 1: Antenna Legend: BC = Biconical, JB = Bilog, LP = Log-Periodic, Horn = Horn, ED = EMCO Dipole
 Note 2: Corr. Values includes Antenna factor, cable loss and pre-amp gain (if applicable).

Average Measurements


Freq. (MHz)	Ant	Pol. V/H	RCVD Signal (dB μ V)	Corr. (dB)	Duty Cycle (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)
1117.5	Horn2	V	79.21	-18.1	-20.65	40.46	54	13.54
1117.5	Horn2	H	73.68	-18.1	-20.65	34.93	54	19.07
1490	Horn2	V	89.86	-16.8	-20.65	52.41	54	1.59
1490	Horn2	H	83.86	-16.8	-20.65	46.41	54	7.59
2235	Horn2	V	70.85	-13.4	-20.65	36.8	54	17.2
2235	Horn2	H	72.22	-13.4	-20.65	38.17	54	15.83
3352.5	Horn2	V	65.53	-9.4	-20.65	35.48	54	18.52
3352.5	Horn2	H	67.62	-9.4	-20.65	37.57	54	16.43
3725	Horn2	V	60.28	-7.1	-20.65	32.53	54	21.47
3725	Horn2	H	58.51	-7.1	-20.65	30.76	54	23.24

Note 1: Antenna Legend: BC = Biconical, JB = Bilog, LP = Log-Periodic, Horn = Horn, ED = EMCO Dipole
 Note 2: Corr. Values includes Antenna factor, cable loss and pre-amp gain (if applicable).

**Duty Cycle:
 On-time in 100msec**

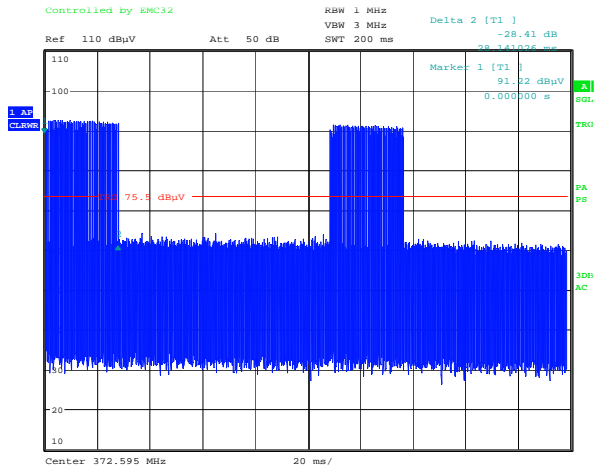

Date: 1.OCT.2008 17:12:41

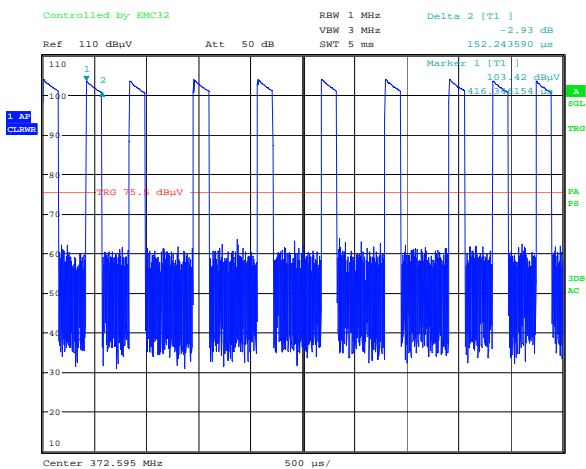

Date: 1.OCT.2008 17:03:43


Maximum number of pulses per packet = 61

On time in packet = 61 x 152.2usec = 9.28msec

Duty cycle correction factor calculation:

$$Duty\ Cycle = 20\log\left(\frac{On\ time}{100\ ms}\right) = 20\log\left(\frac{9.28}{100}\right) = -20.65\ dB$$

Packet length

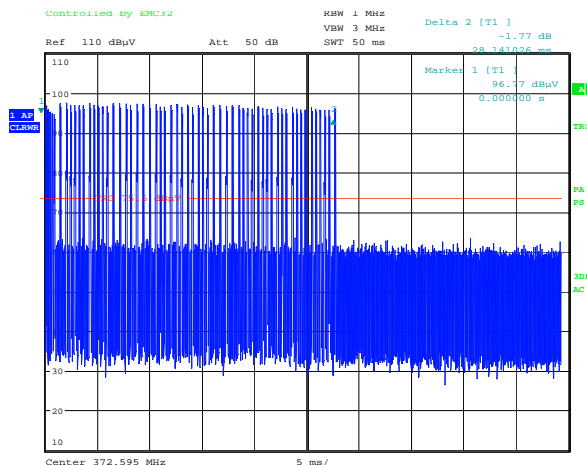

Date: 1.OCT.2008 17:11:35


Clause 15.231(a) Conditions for intentional radiators to comply with periodic operation

The provisions of this section are restricted to periodic operation within the band 40.66-40.70 MHz and above 70 MHz. Except as shown in paragraph (e) of this section, the intentional radiator is restricted to the transmission of a control signal such as those used with alarm systems, door openers, remote switches, etc. Continuous transmissions, voice, video and the radio control of toys are not permitted. Data is permitted to be sent with a control signal. The following conditions shall be met to comply with the provisions for this periodic operation:

- (1) A manually operated transmitter shall employ a switch that will automatically deactivate the transmitter within not more than 5 seconds of being released.
- (2) A transmitter activated automatically shall cease transmission within 5 seconds after activation.
- (3) Periodic transmissions at regular predetermined intervals are not permitted. However, polling or supervision transmissions, including data, to determine system integrity of transmitters used in security or safety applications are allowed if the total duration of transmissions does not exceed more than two seconds per hour for each transmitter. There is no limit on the number of individual transmissions, provided the total transmission time does not exceed two seconds per hour.
- (4) Intentional radiators, which are employed for radio control purposes during emergencies involving fire, security, and safety of life, when activated to signal an alarm, may operate during the pendency of the alarm condition.
- (5) Transmission of set-up information for security systems may exceed the transmission duration limits in paragraphs (a)(1) and (a)(2) of this section, provided such transmissions are under the control of a professional installer and do not exceed ten seconds after a manually operated switch is released or a transmitter is activated automatically. Such set-up information may include data.

Test Results: Pass

- (1) The EUT ceases transmission within 2.39secs of release of the button, See attached plot.
- (2) The EUT is not automatically triggered.
- (3) The EUT does not periodically transmit.
- (4) The EUT is not used as part of an emergency system.
- (5) The EUT is not part of a security system.

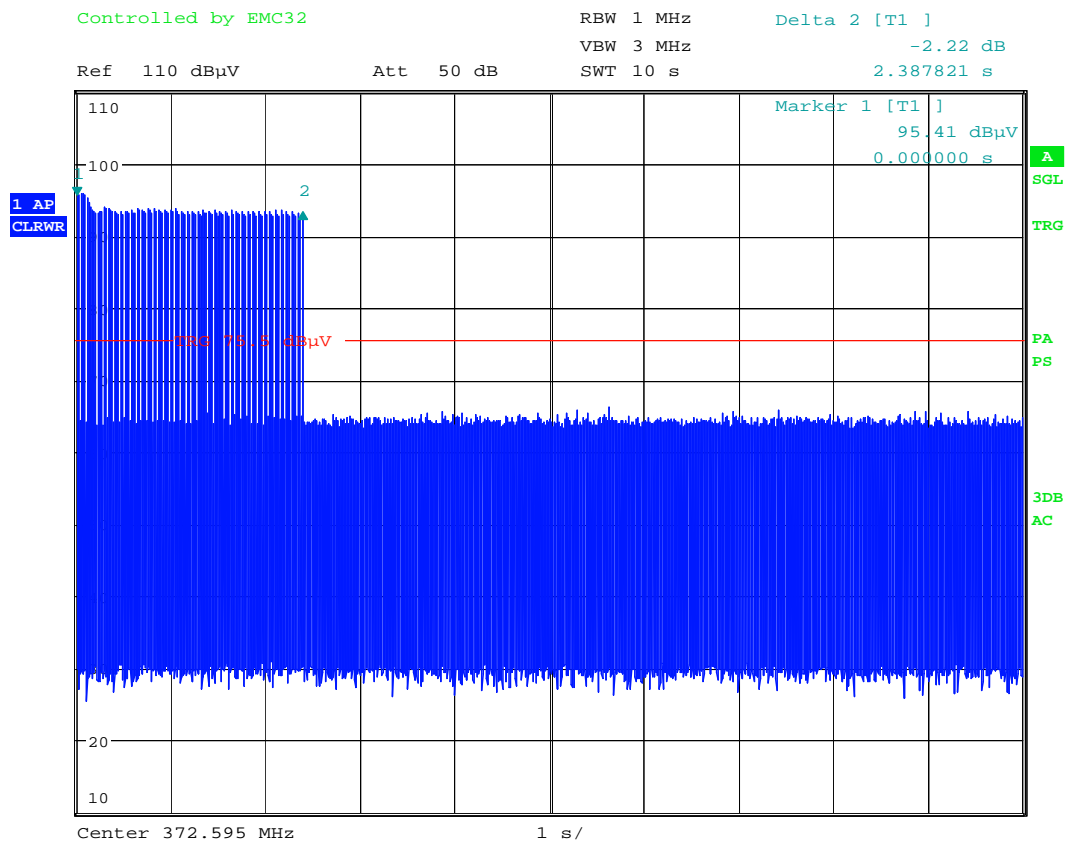

Date: 1.OCT.2008 17:13:19



Clause 15.231(b) Radiated Emissions

In addition to the provisions of 15.205, the field strength of emissions from intentional radiators operated under this section shall not exceed the following:

Fundamental Frequency (MHz)	Field Strength of Fundamental (microvolts/meter)	Field Strength of Spurious Emissions (microvolts/meter)
40.66-40.70	2,250	225
70-130	1,250	125
130-174	1,250 to 3,750	125 to 375
174-260	3,750	375
260-470	3,750 to 12,500	375 to 1,250
Above 470	12,500	1,250

Test Results: Pass

Additional Observations:

The Spectrum was searched from 30MHz to the 10th Harmonic.

The EUT was measured on three orthogonal axis using fresh new batteries.

All measurements were performed using a Peak Detector with 100kHz RBW/VBW below 1GHz and a 1MHz RBW/VBW above 1GHz at a distance of 3 meters.

Peak Measurements

Freq. (MHz)	Ant	Pol. V/H	RCVD Signal (dBμV)	Corr. (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)
372.5	JB3	V	81.35	17.1	98.45	98.52	0.07
372.5	JB3	H	81.13	17.2	98.33	98.52	0.19
745	JB3	V	25.76	23.6	49.36	78.52	29.16
745	JB3	H	28.84	23.6	52.44	78.52	26.08
1862.5	Horn2	V	77.8	-15.1	62.7	78.52	15.82
1862.5	Horn2	H	71.17	-15.1	56.07	78.52	22.45
2607.5	Horn2	V	70.34	-11.9	58.44	78.52	20.08
2607.5	Horn2	H	74.85	-11.9	62.95	78.52	15.57
2980	Horn2	V	86.72	-10.4	76.32	78.52	2.2
2980	Horn2	H	86.4	-10.4	76	78.52	2.52

Note 1: Antenna Legend: BC = Biconical, JB = Bilog, LP = Log-Periodic, Horn = Horn, ED = EMCO Dipole

Note 2: Corr. Values includes Antenna factor, cable loss and pre-amp gain (if applicable).

Average Measurements

Freq. (MHz)	Ant	Pol. V/H	RCVD Signal (dBμV)	Corr. (dB)	Duty Cycle (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)
372.5	JB3	V	81.35	17.1	-20.65	77.8	78.52	0.72
372.5	JB3	H	81.13	17.2	-20.65	77.68	78.52	0.84
745	JB3	V	25.76	23.6	-20.65	28.71	58.52	29.81
745	JB3	H	28.84	23.6	-20.65	31.79	58.52	26.73
1862.5	Horn2	V	77.8	-15.1	-20.65	42.05	58.52	16.47
1862.5	Horn2	H	71.17	-15.1	-20.65	35.42	58.52	23.1
2607.5	Horn2	V	70.34	-11.9	-20.65	37.79	58.52	20.73
2607.5	Horn2	H	74.85	-11.9	-20.65	42.3	58.52	16.22
2980	Horn2	V	86.72	-10.4	-20.65	55.67	58.52	2.85
2980	Horn2	H	86.4	-10.4	-20.65	55.35	58.52	3.17

Note 1: Antenna Legend: BC = Biconical, JB = Bilog, LP = Log-Periodic, Horn = Horn, ED = EMCO Dipole

Note 2: Corr. Values includes Antenna factor, cable loss and pre-amp gain (if applicable).



Nemko Canada Inc.

Report Number: 114552-1TRFWL


Specification: FCC Part 15 Subpart C, 15.231

Clause 15.231(c) 20dB Bandwidth

The bandwidth of the emission shall be no wider than 0.25% of the center frequency for devices operating above 70 MHz and below 900 MHz. For devices operating above 900 MHz, the emission shall be no wider than 0.5% of the center frequency. Bandwidth is determined at the points 20 dB down from the modulated carrier.

Test Results: Pass

20dB Bandwidth:

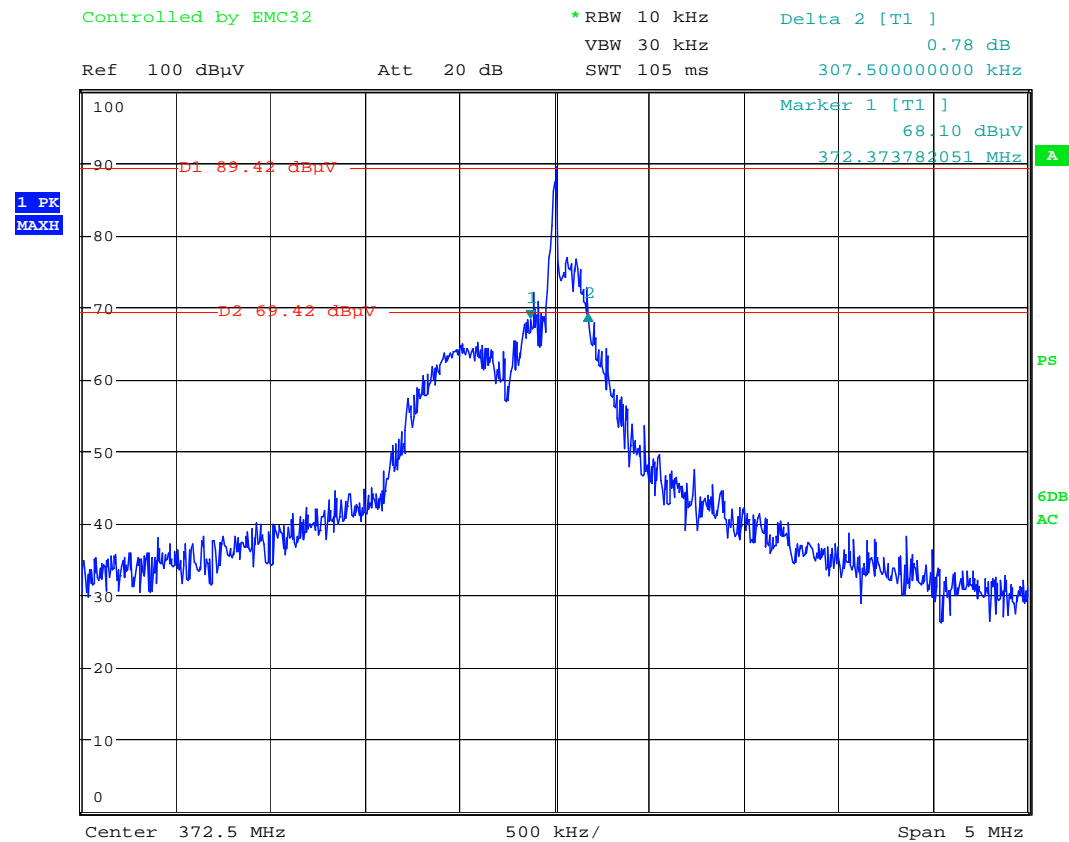

Date: 1.OCT.2008 21:34:06

Limit = 372.5MHz x 0.0025 = 931.25kHz

Appendix B : Setup Photographs

Spurious Emissions Setup:





Appendix C : Block Diagram of Test Setups

Radiated Emissions above 30MHz Test Site

