

August 28, 2013

Nemko Canada Inc
303 River Road
Ottawa, Ontario, Canada
K1V 1H2


Attn: Director of Certification

FCC ID: EZSDEI7756

Models: 7756X
7756V
ASRS-7504
GSRS-7504
PDRS-7504

HHU LCD Distance between antenna and hand user

The distance from the user's hand on the button on the remote and the antenna is 35mm.

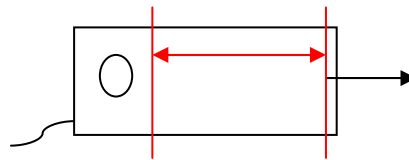

The user holds the remote from the keychain side, if not he will not see the LED display.

447498 D01 General 10 RF Exposure Guidance v05r01	
4.3.1. Standalone SAR test exclusion considerations	
The minimum test separation distance is determined by the smallest distance from the antenna and radiating structures or outer surface of the device, according to the host form factor, exposure conditions and platform requirements, to any part of the body or extremity of a user or bystander.	
	LCD
Maximum peak output power --conducted:	108 mW
Minimum Test Separation Distance:	35 mm
Evaluation frequency:	0.923 GHz
Square Root of Frequency in GHz:	0.961
10-g Extremity test threshold:	3.0 ≤ 7.5
1-g Body test threshold:	3.0 ≤ 3

DIRECTED

one viper way
vista, ca
92081-7853

p | 760.598.6200

2750 alphonse-gariépy
lachine, québec
h8t 3m2

p | 1.800.361.7271

www.directed.com

VIPER

AUTOSTART

XPRESSKIT

CLIFFORD

AstroStart

Auto mate

PYTHON

AVITAL

Sincerely,



Minas Minassian
Sr. director, hw/rf systems

DIRECTED[®]

one viper way
vista, ca
92081-7853

p | 760.598.6200

2750 alphonse-gariépy
lachine, québec
h8t 3m2

p | 1.800.361.7271

www.directed.com

VIPER

AUTOSTART

XPRESSKIT

CLIFFORD

AstroStart

**Auto
mate**

PYTHON

AVITAL