




Test Data

Maximum Conducted Output Power

Condition	Mode	Frequency	Antenna	Conducted Power	Duty Factor	Total Power	Limit	Verdict
		(MHz)		(dBm)	(dB)	(dBm)	(dBm)	
NVNT	BLE	2402	Ant1	3.642	0	3.642	30	Pass
NVNT	BLE	2442	Ant1	3.672	0	3.672	30	Pass
NVNT	BLE	2480	Ant1	3.701	0	3.701	30	Pass



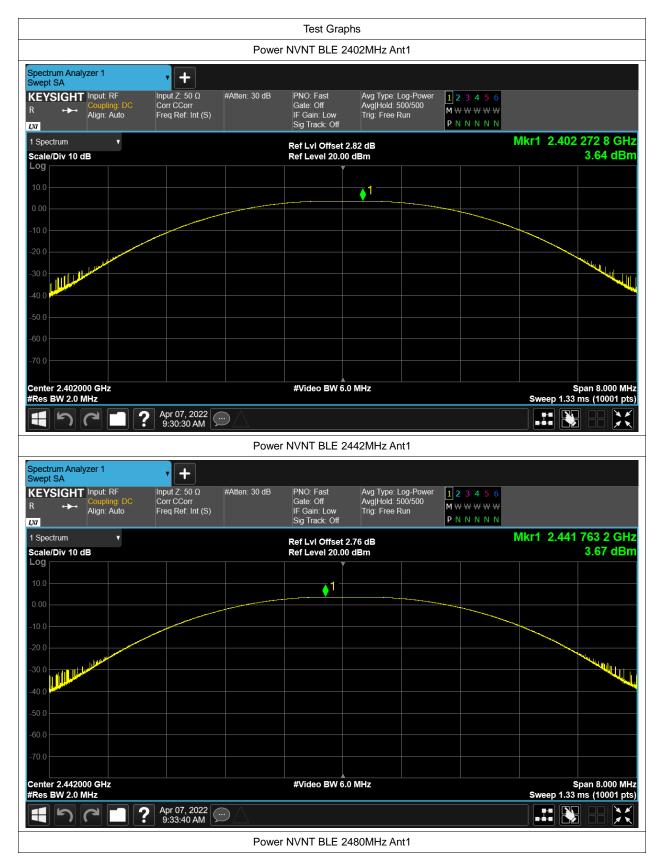









-6dB Bandwidth

Condition	Mode	Frequency (MHz)	Antenna	-6 dB Bandwidth (MHz)	Limit -6 dB Bandwidth (MHz)	Verdict
NVNT	BLE	2402	Ant1	0.686	0.5	Pass
NVNT	BLE	2442	Ant1	0.691	0.5	Pass
NVNT	BLE	2480	Ant1	0.69	0.5	Pass













Occupied Channel Bandwidth

Condition	Mode	Frequency (MHz)	Antenna	99% OBW (MHz)	
NVNT	BLE	2402	Ant1	1.055024504	
NVNT	BLE	2442	Ant1	1.05901775	
NVNT	BLE	2480	Ant1	1.057718239	









Tel: +86-755-23118282, Fax: +86-755-23116366





Maximum Power Spectral Density Level

Condition	Mode	Frequency (MHz)	Antenna	Max PSD (dBm)	Limit (dBm)	Verdict
NVNT	BLE	2402	Ant1	-11.846	8	Pass
NVNT	BLE	2442	Ant1	-11.802	8	Pass
NVNT	BLE	2480	Ant1	-11.888	8	Pass















Band Edge

Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	BLE	2402	Ant1	-58.75	-20	Pass
NVNT	BLE	2480	Ant1	-58.35	-20	Pass



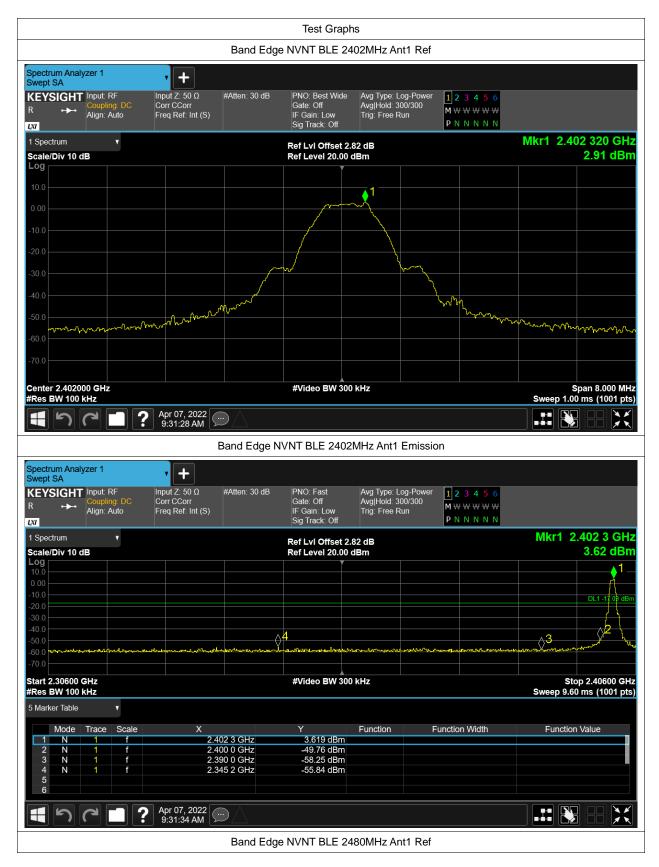



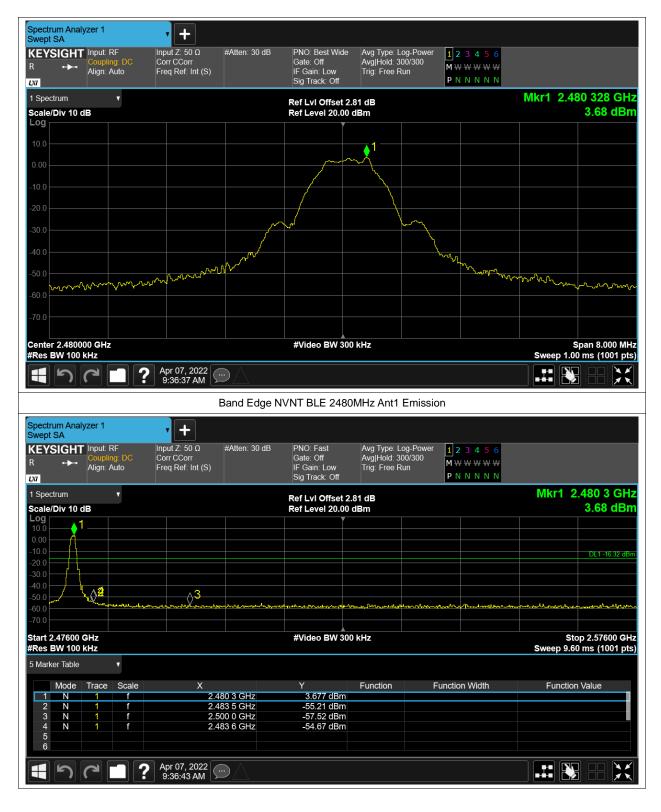





Conducted RF Spurious Emission

Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	BLE	2402	Ant1	-53.46	-20	Pass
NVNT	BLE	2442	Ant1	-54.25	-20	Pass
NVNT	BLE	2480	Ant1	-54.05	-20	Pass











