



ADDENDUM TO FC02-080B

FOR THE

CABLE MODEM GATEWAY, SBG 1000 P5

FCC PART 15 SUBPART C SECTIONS 15.207, 15.209 AND 15.247
AND SUBPART B SECTIONS 15.107 AND 15.109 CLASS B

COMPLIANCE

DATE OF ISSUE: FEBRUARY 3, 2002

PREPARED FOR:

Motorola BCS
6450 Sequence Drive
San Diego, CA 92121

P.O. No.: 4109242
W.O. No.: 79346

PREPARED BY:

Mary Ellen Clayton
CKC Laboratories, Inc.
5473A Clouds Rest
Mariposa, CA 95338

Date of test: August 7-21, November 15 and
December 5, 2002

Report No.: FC02-080C

This report contains a total of 104 pages and may be reproduced in full only. Partial reproduction may only be done with the written consent of CKC Laboratories, Inc. The results in this report apply only to the items tested, as identified herein.

TABLE OF CONTENTS

| | |
|---------------------------------------------------------------------------------|----|
| Administrative Information | 4 |
| Summary of Results..... | 5 |
| Conditions for Compliance..... | 5 |
| Approvals..... | 5 |
| Equipment Under Test (EUT) Description..... | 6 |
| 15.31(e) Voltage Variation | 6 |
| 15.31(m) Number Of Channels | 6 |
| 15.33(a) Frequency Ranges Tested | 6 |
| 15.203 Antenna Requirements | 6 |
| 15.205 Restricted Bands | 7 |
| Mode Of Operation..... | 7 |
| Eut Operating Frequency..... | 7 |
| Antenna Gain..... | 7 |
| Equipment Under Test..... | 8 |
| Peripheral Devices | 8 |
| Report of Measurements..... | 10 |
| 15.247(a)(2) 6 dB Bandwidth Plots – Direct Sequence..... | 10 |
| 15.247(b)(1) Peak Output (EIRP)..... | 13 |
| 15.247(b)(1) Peak Output (Conducted) | 13 |
| 15.247(b)(1) Peak Output | 14 |
| Table 1: 15.247(c) Antenna Terminal Six Highest Radiated Emission Levels... | 15 |
| Table 2: 15.247(c) OATS Six Highest Radiated Emission Levels: 9 kHz - 30 MHz... | 16 |
| Table 3: 15.247(c) OATS Six Highest Radiated Emission Levels: 30-1000 MHz..... | 17 |
| Table 4: 15.247(c) OATS Six Highest Radiated Emission Levels: 1-25 GHz.... | 18 |
| 15.247(c) Bandedge Plots – Direct Sequence | 19 |
| Table 5: 15.247(c) OATS Six Highest Radiated Emission Levels: 30-1000 MHz..... | 21 |
| 15.247(c) Bandedge Plots – Direct Sequence | 22 |
| 15.247(d) Power Spectral Density..... | 24 |
| Table 6: 15.107/15.207 Six Highest Conducted Emission Levels | 27 |
| Table 7: 15.109 Six Highest Radiated Emission Levels | 28 |
| Table 8: 15.209 Six Highest Radiated Emission Levels | 29 |
| 2.1093 MPE Calculations | 30 |
| Temperature And Humidity During Testing | 31 |
| Measurement Uncertainty..... | 31 |
| EUT Setup | 31 |
| Correction Factors | 31 |
| Table A: Sample Calculations | 31 |
| Test Instrumentation and Analyzer Settings..... | 32 |
| Spectrum Analyzer Detector Functions..... | 32 |
| Peak | 32 |
| Quasi-Peak..... | 32 |
| Average..... | 32 |

| | |
|------------------------------------------------------------|----|
| EUT Testing | 33 |
| Mains Conducted Emissions | 33 |
| Antenna Conducted Emissions | 33 |
| Radiated Emissions | 33 |
| Transmitter Characteristics | 34 |
| 15.247(a)(2) Bandwidth – Direct Sequence | 34 |
| 15.247(b) Peak Output Power | 34 |
| 15.247(d) Peak Power Spectral Density | 34 |
| Appendix A: Test Setup Photographs | 35 |
| Equipment Test Setup Diagram - November Testing | 36 |
| Photograph Showing Voltage Variations and Peak Output..... | 37 |
| Photograph Showing Occupied Bandwidth..... | 38 |
| Photograph Showing Direct Connect Testing | 39 |
| Photograph Showing Oats Testing | 40 |
| Photograph Showing Oats Testing | 41 |
| Photograph Showing Oats Testing | 42 |
| Photograph Showing Oats Testing | 43 |
| Photograph Showing Power Spectral Density..... | 44 |
| Photograph Showing Mains Conducted Emissions..... | 45 |
| Photograph Showing Mains Conducted Emissions..... | 46 |
| Appendix B: Test Equipment List..... | 47 |
| Appendix C: Measurement Data Sheets..... | 51 |

CKC Laboratories, Inc. has received Certificates of Accreditation from the following agencies:

A2LA (USA); DATech (Germany); BSMI (Taiwan); Nemko (Norway); and GOST (Russia).

CKC Laboratories, Inc. has received test site Registration Acceptance from the following agencies:

FCC (USA); VCCI (Japan); and Industry Canada.

CKC Laboratories, Inc. has received Letters of Acceptance through an MRA for the following agencies:

ACA/NATA (Australia); SABS (South Africa); SWEDAC (Sweden); Radio Communications Agency (RA); HOKLAS (Hong Kong); Bakom (Swiss); BIPT (Belgium); Denmark Telestyrelsen; RvA (Netherlands); SEE (Luxembourg) SITTEL (Bolivia); and UKAS (UK).

ADMINISTRATIVE INFORMATION

DATE OF TEST: August 7-21, November 15 and December 5, 2002

DATE OF RECEIPT: August 7, 2002

PURPOSE OF TEST: To demonstrate the compliance of the Cable Modem Gateway, SBG 1000 P5, with the requirements for FCC Part 15 Subpart C Sections 15.207 and 15.247 and Subpart B Sections 15.107 and 15.109 Class B devices. The purpose of **Addendum A** is to revise the outpower on pages 6, 13 and 25. **Addendum B** adds 15.209, 15.247(b) and 15.247(c) testing with a new antenna. **Addendum C** is to revise the MPE Calculations.

TEST METHOD: ANSI C63.4 (1992)

MANUFACTURER: Motorola BCS
6450 Sequence Drive
San Diego, CA 92121

REPRESENTATIVE: Daniel Exum

TEST LOCATION: CKC Laboratories, Inc.
110 Olinda Place
Brea, CA 92621

SUMMARY OF RESULTS

As received, the Motorola BCS Cable Modem Gateway, SBG 1000 P5 was found to be fully compliant with the following standards and specifications:

United States


- FCC Part 15 Subpart B Sections 15.107 and 15.109 Class B
- FCC Part 15 Subpart C Sections 15.207, 15.209 and 15.247
- ANSI C63.4 (1992) method

CONDITIONS FOR COMPLIANCE

No modifications to the EUT were necessary to comply.

APPROVALS

QUALITY ASSURANCE:



Steve Behm, Director of Engineering Services



Joyce Walker, Quality Assurance Administrative Manager



Septimiu Apahidean, EMC/Lab Manager

TEST PERSONNEL:



Stuart Yamamoto, EMC Engineer

EQUIPMENT UNDER TEST (EUT) DESCRIPTION

The Cable Modem Gateway tested by CKC Laboratories was representative of a production unit.

15.31(e) Voltage Variations

Equipment setup: The EUT is a cable modem. The EUT's USB and one of its ethernet ports is connected to a desktop computer via shielded cable. The other four ethernet ports are connected in loopback with shielded cables. Connected to the parallel port of the EUT is a thermal printer. The HPNA ports have unshielded terminated cables connected. The F connector port is connected to the remotely located support equipment. The desktop computer and one laptop computer are running hyperterminal and are pinging the ethernet through MS DOS. The Dolch computer is running the TFTP32 program. The active antenna port is connected to the Agilent E4440A spectrum analyzer.

| | Power at Nominal Voltage (dBm) | Power at 85% Nominal Voltage (dBm) | Power at 115% Nominal Voltage (dBm) |
|------------|-----------------------------------------|---------------------------------------------|----------------------------------------------|
| Channel 1 | 15.04 | 15.04 | 15.04 |
| Channel 6 | 14.56 | 14.56 | 14.56 |
| Channel 11 | 14.16 | 14.16 | 14.16 |

Testing performed at antenna terminal

15.31(m) Number Of Channels

This device operates on 11 channel.

15.33(a) Frequency Ranges Tested

15.109/15.247 Radiated Emissions: 9 kHz – 25 GHz

15.207/15.107 Conducted Emissions: 450 kHz – 30 MHz

| FCC SECTION 15.35: ANALYZER BANDWIDTH SETTINGS PER FREQUENCY RANGE | | | |
|-------------------------------------------------------------------------------|---------------------|------------------|-------------------|
| TEST | BEGINNING FREQUENCY | ENDING FREQUENCY | BANDWIDTH SETTING |
| CONDUCTED EMISSIONS | 450 kHz | 30 MHz | 9 kHz |
| RADIATED EMISSIONS | 9 kHz | 150 kHz | 200 Hz |
| RADIATED EMISSIONS | 150 kHz | 30 MHz | 9 kHz |
| RADIATED EMISSIONS | 30 MHz | 1000 MHz | 120 kHz |
| RADIATED EMISSIONS | 1000 MHz | 25 GHz | 1 MHz |

15.203 Antenna Requirements

The antenna is removable but has a unique connector; therefore the EUT complies with Section 15.203 of the FCC rules.

15.205 Restricted Bands

The fundamental operating frequency lies outside the restricted bands and therefore complies with the requirements of Section 15.205 of the FCC rules. Any spurious emission coming from the EUT was investigated to determine if any portion lies inside the restricted band. If any portion of a spurious emissions signal was found to be within a restricted band, investigation was performed to ensure compliance with Section 15.209.

Mode Of Operation

The EUT was configured by the manufacturer to operate in a continuous transmit mode for testing purposes. The EUT is normally in continuous mode with CW signal.

Eut Operating Frequency

The EUT was operating at 2412-2462 MHz.

The Eut is a direct sequencing device operating in the 2400 – 2483.5 MHz band.

Antenna Gain

The antenna gain specification of the new remote antenna (model CAF94333) supplied with the antenna by Motorola is +5.0 dBi.

EQUIPMENT UNDER TEST

Cable Modem Gateway

Manuf: Motorola BCS
Model: SBG 1000 P5
Serial: 00080ED2F1E0
FCC ID: pending

PERIPHERAL DEVICES

The EUT was tested with the following peripheral device(s):

C6U Converter

Manuf: General Instruments
Model: C6U
Serial: J5M7000101358
FCC ID: DoC

Hub

Manuf: Bay Networks
Model: DS104
Serial: DS14H08355155
FCC ID: DoC

Computer

Manuf: Dolch
Model: L-PAC 585
Serial: DCS2016538
FCC ID: DoC

Mouse

Manuf: Gateway
Model: MOSXK
Serial: NA
FCC ID: DoC

Computer

Manuf: Toshiba
Model: PA1215UV
Serial: 04694236
FCC ID: DoC

Thermal Printer

Manuf: SII
Model: DPU-414
Serial: 1033083A
FCC ID: DoC

Keyboard

Manuf: Dell
Model: SK-1000RS
Serial: M940111179
FCC ID: DoC

Computer

Manuf: Gateway
Model: G6-366C
Serial: 0013168086
FCC ID: DoC

Monitor

Manuf: NEC
Model: JC-1538VMA
Serial: 5900265EA
FCC ID: DoC

Head End


Manuf: Cisco
Model: uBR-MC11C
Serial: CN1ISS0AA
FCC ID: DoC

Parallel Printer


Manuf: Epson
Model: P156A
Serial: CMR1545596
FCC ID: DoC

REPORT OF MEASUREMENTS


15.247(a)(2) 6 dB BANDWIDTH PLOTS – Direct Sequence CHANNEL 1

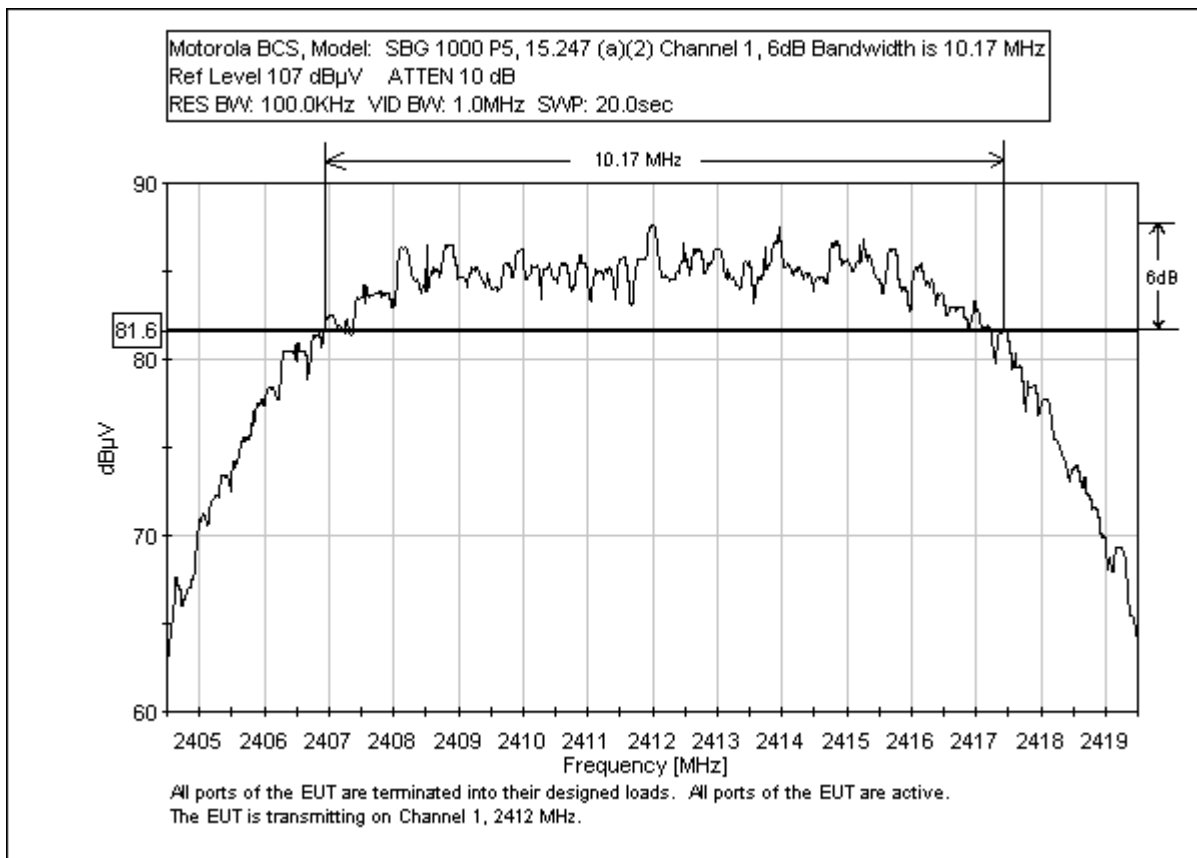

6 dB BANDWIDTH - CHANNEL 6

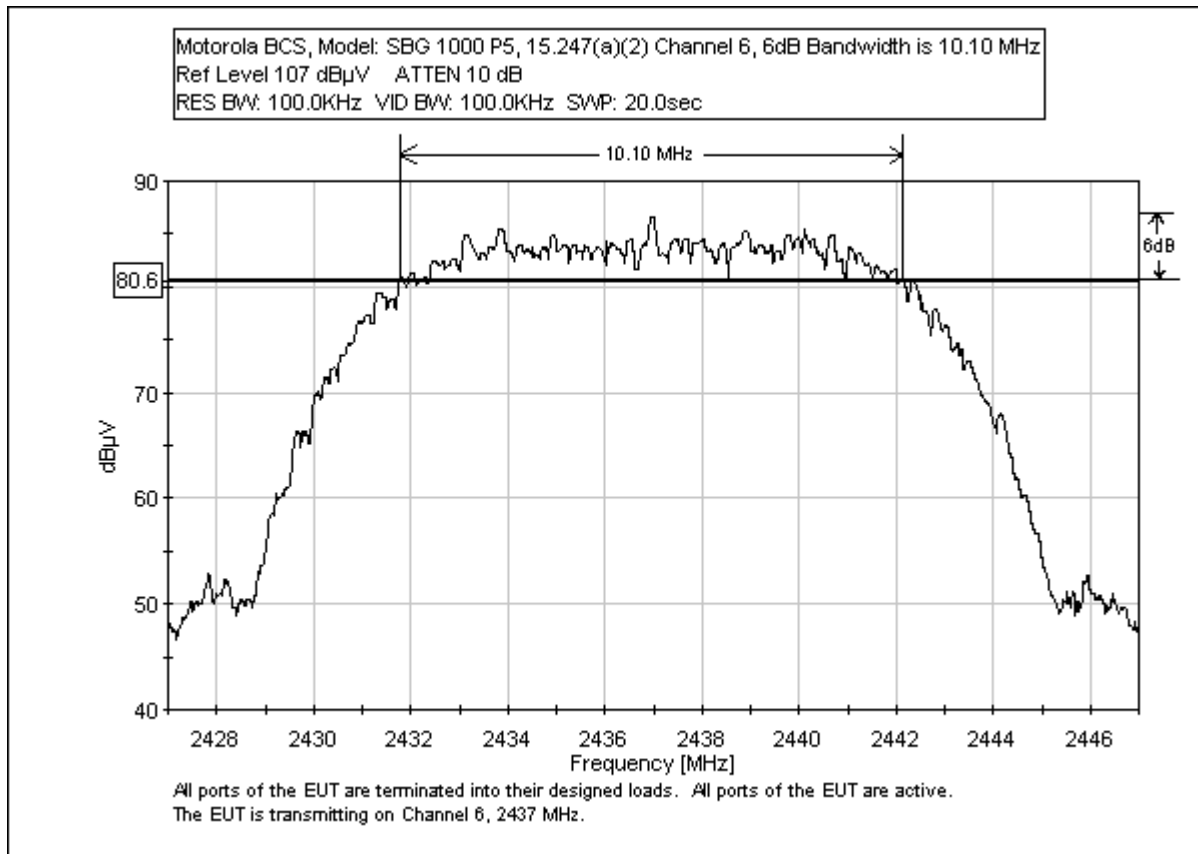

6 dB BANDWIDTH - CHANNEL 11

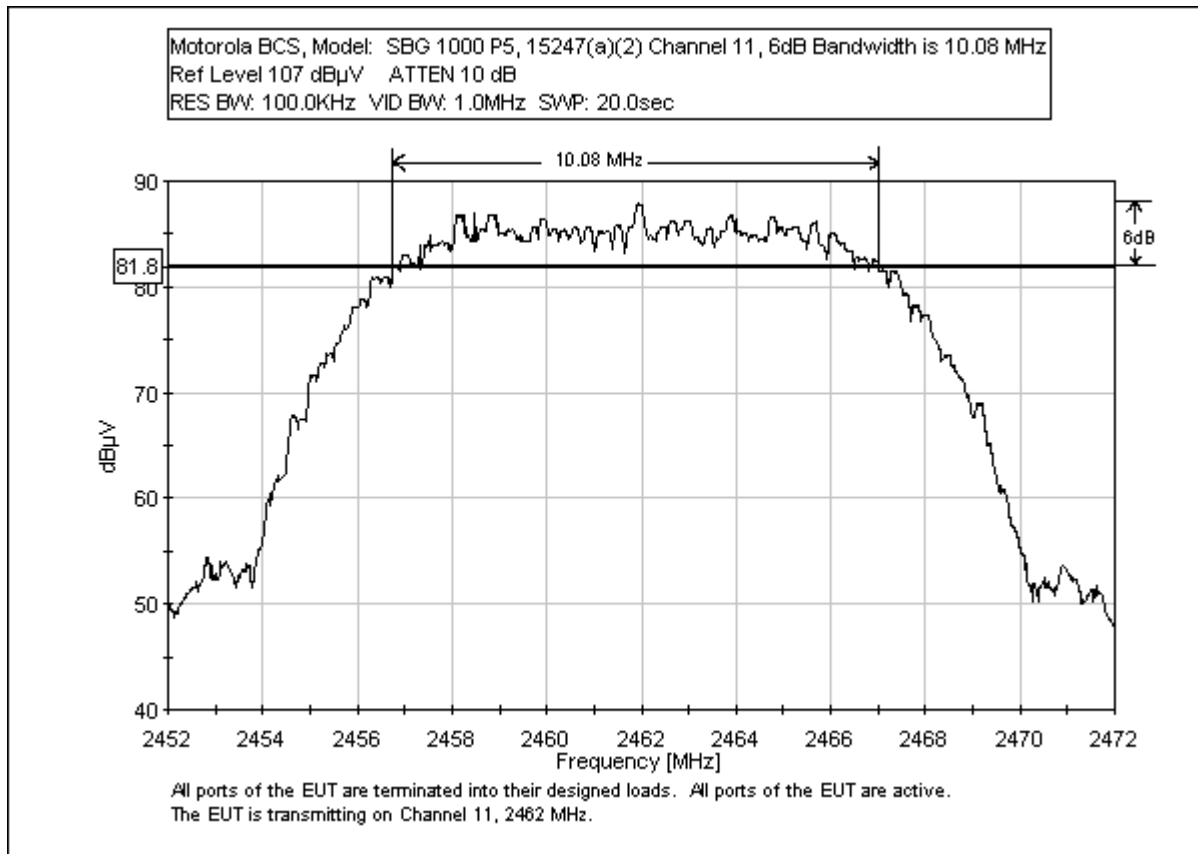

15.247(b)(1) Peak Output (EIRP)

Equipment Setup: The EUT is a cable modem. The EUT's USB and one of its ethernet ports is connected to a desktop computer via shielded cable. The other four ethernet ports are connected in loopback with shielded cables. Connected to the parallel port of the EUT is a thermal printer. The HPNA ports have unshielded terminated cables connected. The F connector port is connected to the remotely located support equipment. The desktop computer and one laptop computer are running hyperterminal and are pinging the ethernet through MS DOS. The Dolch computer is running the TFTP32 program. The active antenna port is connected to the Agilent E4440A Spectrum analyzer.

| | Frequency (GHz) | Spectrum analyzer Measurement (dBm) | BW Correction Factor (dB) | Corrected Reading (dBm) | Antenna Gain (dBi) | EIRP (dBm) | EIRP Limit (dBm) | Result Pass/Fail |
|------------|--------------------|----------------------------------------------|------------------------------------|-------------------------------|--------------------------|---------------|------------------------|---------------------|
| Channel 1 | 2.412 | 13.66 | 1.38 | 15.04 | 2.5 | 17.54 | 30 | Pass |
| Channel 6 | 2.437 | 13.18 | 1.38 | 14.56 | 2.5 | 17.06 | 30 | Pass |
| Channel 11 | 2.462 | 12.78 | 1.38 | 14.16 | 2.5 | 16.6 | 30 | Pass |

15.247(b)(1) Peak Output (Conducted)

Equipment Setup: The EUT is a cable modem. The EUT's USB and one of its ethernet ports is connected to a desktop computer via shielded cable. The other four ethernet ports are connected in loopback with shielded cables. Connected to the parallel port of the EUT is a thermal printer. The HPNA ports have unshielded terminated cables connected. The F connector port is connected to the remotely located support equipment. The desktop computer and one laptop computer are running hyperterminal and are pinging the ethernet through MS DOS. The Dolch computer is running the TFTP32 program. The active antenna port is connected to the Agilent E4440A spectrum analyzer.

| | Frequency (GHz) | Spectrum analyzer Measurement (dBm) | BW Correction Factor (dB) | Corrected Reading (dBm) | Limit (dBm) | Result Pass/Fail |
|------------|--------------------|-------------------------------------------|---------------------------------|-------------------------------|----------------|---------------------|
| Channel 1 | 2.412 | 13.66 | 1.38 | 15.04 | 30 | Pass |
| Channel 6 | 2.437 | 13.18 | 1.38 | 14.56 | 30 | Pass |
| Channel 11 | 2.462 | 12.78 | 1.38 | 14.16 | 30 | Pass |

Note: BW corr = $10 \cdot 10 \log$ (Emission BW/measurement BW)
 BW Corr = $10 \cdot 10 \log(11/8) = 1.38$ dB

15.247(b)(1) Peak Output

Equipment setup: The EUT is a cable modem. The EUT's USB and one of its ethernet ports is connected to a desktop computer via shielded cable. The other four ethernet ports are connected in loopback with shielded cables. Connected to the parallel port of the EUT is a thermal printer. The HPNA ports have unshielded terminated cables connected. The F connector port is connected to the remotely located support equipment. The desktop computer and one laptop computer are running hyperterminal and are pinging the ethernet through MS DOS. The Dolch computer is running the TFTP32 program. The active antenna port is connected to the Agilent E4440A Spectrum analyzer. Testing November 15, 2002 with new antenna.

| | Spectrum Frequency (GHz) | Analyzer Measurement (dBm) | BW Correction Factor (dB) | Corrected Reading (dBm) | Antenna Gain (dBi) | EIRP (dBm) | EIRP Limit (dBm) | Result Pass/Fail |
|------------|--------------------------------|----------------------------------|------------------------------------|-------------------------------|--------------------------|---------------|------------------------|---------------------|
| Channel 1 | 2.412 | 13.66 | 1.38 | 15.04 | 5 | 20.04 | 30 | Pass |
| Channel 6 | 2.437 | 13.18 | 1.38 | 14.56 | 5 | 19.56 | 30 | Pass |
| Channel 11 | 2.462 | 12.78 | 1.38 | 14.16 | 5 | 19.16 | 30 | Pass |

The following tables report the six highest worst case levels recorded during the tests performed on the Cable Modem Gateway, SBG 1000 P5. All readings taken are peak readings unless otherwise noted. The data sheets from which these tables were compiled are contained in Appendix B.

Table 1: 15.247(c) Antenna Terminal Six Highest Radiated Emission Levels

| FREQUENCY MHz | METER READING dB μ V | CORRECTION FACTORS | | | | CORRECTED READING dB μ V | SPEC LIMIT dB μ V | MARGIN dB | NOTES |
|------------------|--------------------------------|--------------------|--|--|--|------------------------------------|-----------------------------|--------------|-------|
| | | Ant dB | | | | | | | |
| 626.352 | 57.9 | 0.0 | | | | 57.9 | 89.6 | -31.7 | V-6 |
| 651.390 | 56.7 | 0.0 | | | | 56.7 | 88.7 | -32.0 | V-11 |
| 1607.968 | 58.9 | 0.0 | | | | 58.9 | 89.8 | -30.9 | V-1 |
| 1624.634 | 58.5 | 0.0 | | | | 58.5 | 89.6 | -31.1 | V-6 |
| 1641.304 | 59.8 | 0.0 | | | | 59.8 | 88.7 | -28.9 | V-11 |
| 7386.036 | 56.5 | 0.0 | | | | 56.5 | 88.7 | -32.2 | V-11 |

Test Method: ANSI C63.4 (1992)
Spec Limit: FCC Part 15 Subpart C Section 15.247(c)

NOTES:
V = Vertical Polarization
1 = Channel 1
6 = Channel 6
11 = Channel 11

COMMENTS: The EUT is a cable modem. The EUT's USB and one of its ethernet ports is connected to a desktop computer via shielded cable. The other four ethernet ports are connected in loopback with shielded cables. Connected to the parallel port of the EUT is a thermal printer. The HPNA ports have unshielded terminated cables connected. The "F" connector port is connected to the remotely located support equipment. The desktop computer and one laptop computer are running hyperterminal and are pinging the ethernet through MS DOS. The Dolch computer is running the TFTP32 program. The EUT is transmitting on Channels 1, 6 and 11. Temperature: 25°C, Humidity: 46%, Pressure: 100kPa. Voltage to EUT is 120 Vac 60Hz. Data represents all emissions seen from 9 kHz to 25 GHz. Antenna terminal conducted emissions test (-20dBc limit).

Table 2: 15.247(c) OATS Six Highest Radiated Emission Levels: 9 kHz - 30 MHz

| FREQUENCY MHz | METER READING dB μ V | CORRECTION FACTORS | | | | CORRECTED READING dB μ V/m | SPEC LIMIT dB μ V/m | MARGIN dB | NOTES |
|------------------|--------------------------------|--------------------|-----------|-------------|-------------|--------------------------------------|-------------------------------|--------------|-------|
| | | Ant dB | Amp dB | Cable dB | 15.31 dB | | | | |
| 0.076 | 72.6 | 10.5 | | 0.2 | -80.0 | 3.3 | 30.0 | -26.7 | N-6 |
| 0.077 | 72.3 | 10.5 | | 0.2 | -80.0 | 3.0 | 29.9 | -26.9 | N-11 |
| 0.079 | 72.4 | 10.5 | | 0.2 | -80.0 | 3.1 | 29.6 | -26.5 | N-1 |
| 0.137 | 64.8 | 10.1 | | 0.2 | -80.0 | -4.9 | 24.8 | -29.7 | N-11 |
| 0.138 | 65.4 | 10.1 | | 0.2 | -80.0 | -4.3 | 24.8 | -29.1 | N-1 |
| 0.138 | 64.5 | 10.1 | | 0.2 | -80.0 | -5.2 | 24.8 | -30.0 | N-6 |

Test Method: ANSI C63.4 (1992)
 Spec Limit: FCC Part 15 Subpart C Section 15.247(c)
 Test Distance: 3 Meters

NOTES:
 N = No Polarization
 1 = Channel 1
 6 = Channel 6
 11 = Channel 11

COMMENTS: Channel 1: The EUT is a cable modem. The EUT's USB and one of its ethernet ports is connected to a desktop computer via shielded cable. The other four ethernet ports are connected in loopback with shielded cables. Connected to the parallel port of the EUT is a thermal printer. The HPNA ports have unshielded terminated cables connected. The "F" connector port is connected to the remotely located support equipment. The desktop computer and one laptop computer are running hyperterminal and are pinging the ethernet through MS DOS. The Dolch computer is running the TFTP32 program. The EUT is transmitting on Channels 1,6 and 11. Temperature: 23°C, Humidity: 53%, Pressure: 100kPa. Voltage to EUT is 120 Vac 60Hz. Data sheet represents emissions from the frequency range of 0.009 to 30.0 MHz.

Table 3: 15.247(c) OATS Six Highest Radiated Emission Levels: 30-1000 MHz

| FREQUENCY MHz | METER READING dB μ V | CORRECTION FACTORS | | | | CORRECTED READING dB μ V/m | SPEC LIMIT dB μ V/m | MARGIN dB | NOTES |
|------------------|--------------------------------|--------------------|-----------|-------------|------------|--------------------------------------|-------------------------------|--------------|-------|
| | | Ant dB | Amp dB | Cable dB | Dist dB | | | | |
| 37.534 | 47.5 | 15.4 | -28.4 | 1.2 | | 35.7 | 40.0 | -4.3 | HQ-1 |
| 48.047 | 52.2 | 11.5 | -28.3 | 1.3 | | 36.7 | 40.0 | -3.3 | VQ-1 |
| 48.076 | 52.9 | 11.5 | -28.3 | 1.3 | | 37.4 | 40.0 | -2.6 | VQ-6 |
| 48.101 | 53.1 | 11.5 | -28.3 | 1.3 | | 37.6 | 40.0 | -2.4 | VQ-11 |
| 82.531 | 55.6 | 7.4 | -28.2 | 1.7 | | 36.5 | 40.0 | -3.5 | HQ-1 |
| 640.062 | 44.4 | 20.5 | -27.9 | 5.5 | | 42.5 | 46.0 | -3.5 | HQ-6 |

Test Method: ANSI C63.4 (1992)
 Spec Limit: FCC Part 15 Subpart C Section 15.247(c)
 Test Distance: 3 Meters

NOTES:
 H = Horizontal Polarization
 V = Vertical Polarization
 D = Dipole Reading
 1 = Channel 1
 6 = Channel 6
 11 = Channel 11

COMMENTS: The EUT is a cable modem. The EUT's USB and one of its ethernet ports is connected to a desktop computer via shielded cable. The other four ethernet ports are connected in loopback with shielded cables. Connected to the parallel port of the EUT is a thermal printer. The HPNA ports have unshielded terminated cables connected. The "F" connector port is connected to the remotely located support equipment. The desktop computer and one laptop computer are running hyperterminal and are pinging the ethernet through MS DOS. The Dolch computer is running the TFTP32 program. The EUT is transmitting on Channels 1, 6 and 11. Temperature: 25°C, Humidity: 46%, Pressure: 100kPa. Voltage to EUT is 120 Vac 60Hz. Data sheet represents emissions from the frequency range of 30.0 to 1000.0 MHz.

Table 4: 15.247(c) OATS Six Highest Radiated Emission Levels: 1-25 GHz

| FREQUENCY MHz | METER READING dB μ V | CORRECTION FACTORS | | | | CORRECTED READING dB μ V/m | SPEC LIMIT dB μ V/m | MARGIN dB | NOTES |
|------------------|--------------------------------|--------------------|-----------|-------------|------------|--------------------------------------|-------------------------------|--------------|-------|
| | | Ant dB | Amp dB | Cable dB | Dist dB | | | | |
| 1605.707 | 56.0 | 24.9 | -38.6 | 5.2 | | 47.5 | 54.0 | -6.5 | V-1 |
| 1844.400 | 56.3 | 25.9 | -38.4 | 3.8 | | 47.6 | 54.0 | -6.4 | V-6 |
| 1882.180 | 58.1 | 26.0 | -38.3 | 3.8 | | 49.6 | 54.0 | -4.4 | VA-11 |
| 7310.691 | 40.5 | 35.9 | -37.8 | 13.0 | | 51.6 | 54.0 | -2.4 | VA-6 |
| 7310.802 | 38.3 | 35.9 | -37.8 | 13.0 | | 49.4 | 54.0 | -4.6 | HA-6 |
| 7385.929 | 38.0 | 36.0 | -37.9 | 13.0 | | 49.1 | 54.0 | -4.9 | HA-11 |


Test Method: ANSI C63.4 (1992)
 Spec Limit: FCC Part 15 Subpart C Section 15.247(c)
 Test Distance: 3 Meters

NOTES:
 H = Horizontal Polarization
 V = Vertical Polarization
 A = Average Reading
 1 = Channel 1
 6 = Channel 6
 11 = Channel 11

COMMENTS: The EUT is a cable modem. The EUT's USB and one of its ethernet ports is connected to a desktop computer via shielded cable. The other four ethernet ports are connected in loopback with shielded cables. Connected to the parallel port of the EUT is a thermal printer. The HPNA ports have unshielded terminated cables connected. The "F" connector port is connected to the remotely located support equipment. The desktop computer and one laptop computer are running hyperterminal and are pinging the ethernet through MS DOS. The Dolch computer is running the TFTP32 program. The EUT is transmitting on Channels 1, 6 and 11. Temperature: 25°C, Humidity: 46%, Pressure: 100kPa. Voltage to EUT is 120 Vac 60Hz. Data sheet represents emissions from the frequency range of 1.0 to 25.0 GHz.

15.247(c) BANDEDGE PLOTS – DIRECT SEQUENCE

CHANNEL 1

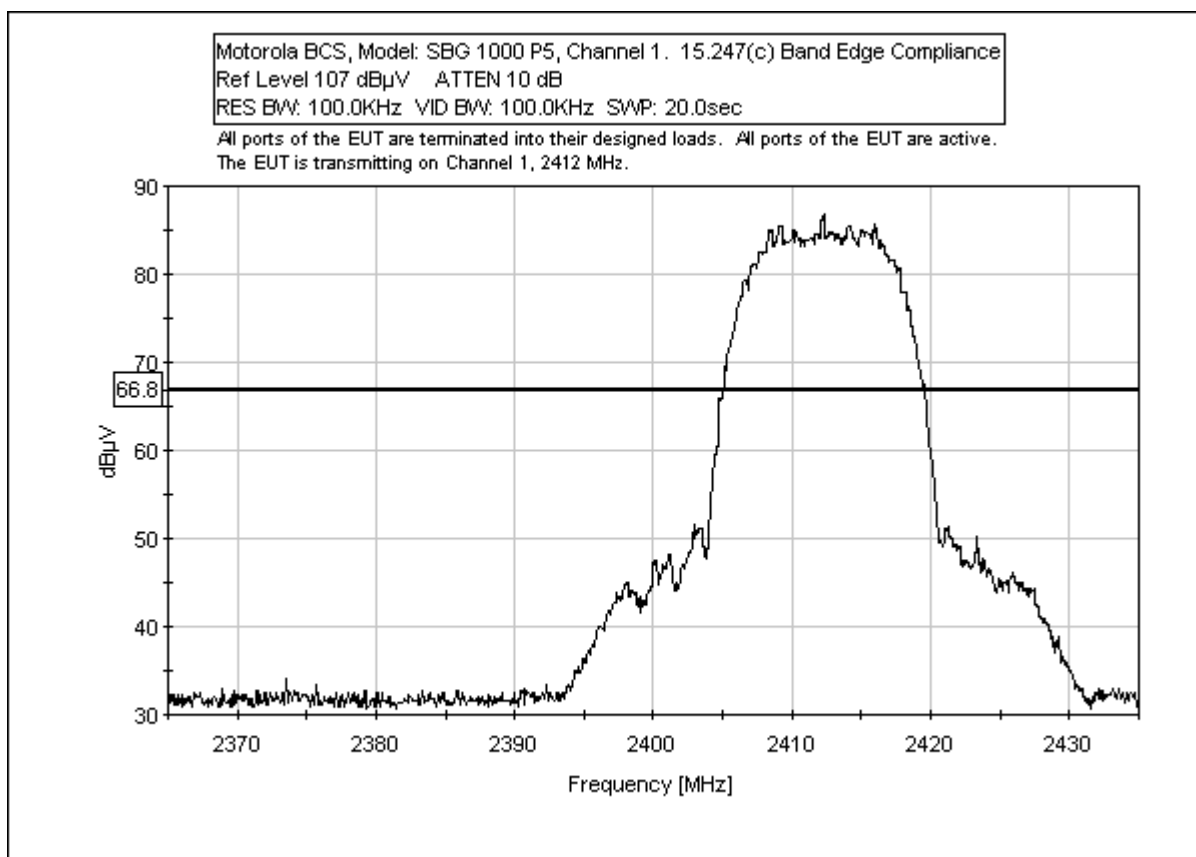

BANDEDGE PLOT - CHANNEL 11

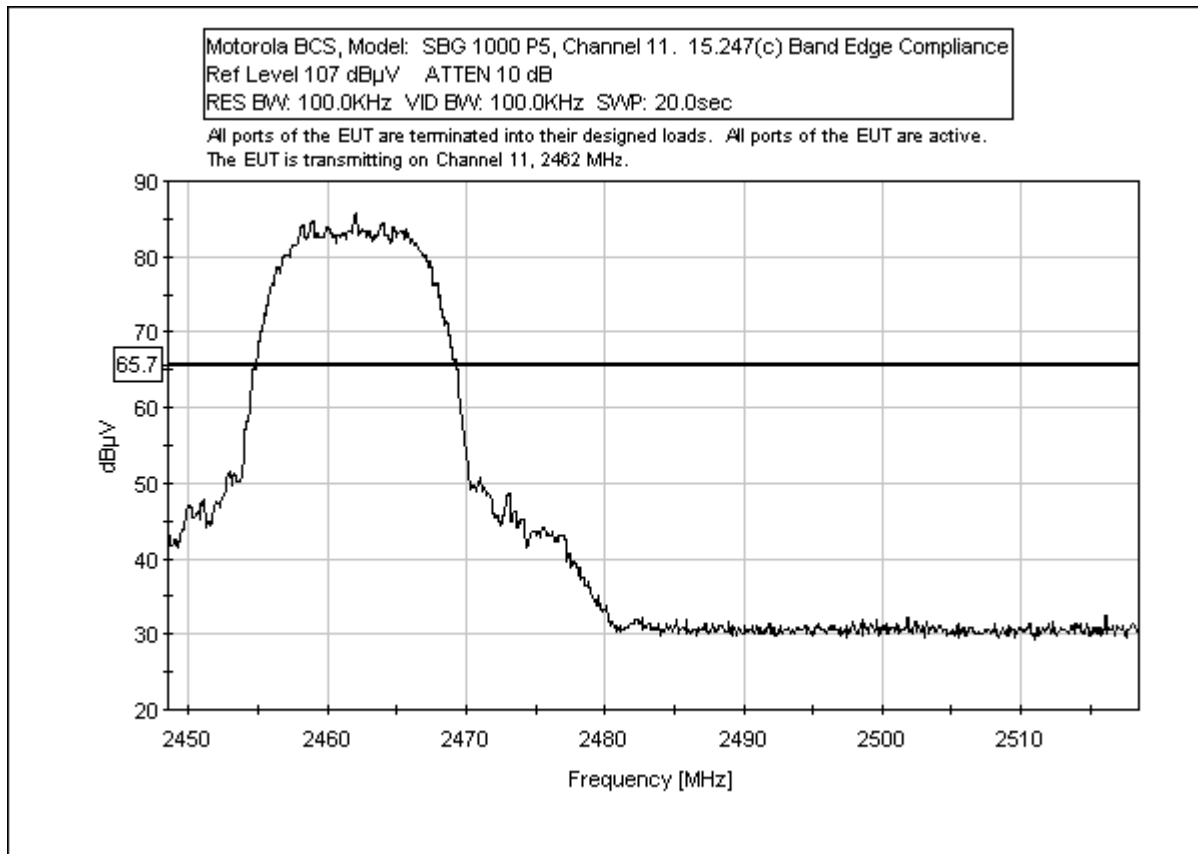


Table 5: 15.247(c) OATS Six Highest Radiated Emission Levels: 30-1000 MHz

| FREQUENCY MHz | METER READING dB μ V | CORRECTION FACTORS | | | | CORRECTED READING dB μ V/m | SPEC LIMIT dB μ V/m | MARGIN dB | NOTES |
|------------------|--------------------------------|--------------------|-----------|-------------|------------|--------------------------------------|-------------------------------|--------------|-------|
| | | Ant dB | Amp dB | Cable dB | Dist dB | | | | |
| 63.989 | 57.0 | 8.1 | -28.4 | 1.5 | | 38.2 | 40.0 | -1.8 | VQ |
| 106.755 | 55.8 | 13.4 | -28.4 | 2.0 | | 42.8 | 43.5 | -0.7 | VQ |
| 111.376 | 53.5 | 14.3 | -28.4 | 2.0 | | 41.4 | 43.5 | -2.1 | VQ |
| 111.621 | 53.4 | 14.3 | -28.4 | 2.0 | | 41.3 | 43.5 | -2.2 | VQ |
| 112.226 | 53.1 | 14.4 | -28.3 | 2.1 | | 41.3 | 43.5 | -2.2 | VQ |
| 511.982 | 47.4 | 19.9 | -28.1 | 4.8 | | 44.0 | 46.0 | -2.0 | VQ |


Test Method: ANSI C63.4 (1992)
 Spec Limit: FCC Part 15 Subpart C Section 15.247
 Test Distance: 3 Meters

NOTES: Q = Quasi Peak Reading
 V = Vertical Polarization

COMMENTS: The EUT is a cable modem (32MB SDRAM). The EUT's USB and one of its ethernet ports is connected to a desktop computer via shielded cable. The other four ethernet ports are connected in loopback with unshielded cat. 5 cables. Connected to the parallel port of the EUT is a thermal printer. One of the HPNA ports has an unshielded terminated cable connected. The F connector port is connected to the remotely located support equipment. The desktop computer and one laptop computer are running hyperterminal and are pinging the ethernet through MS DOS. The Dolch computer is running the TFTP32 program. The EUT is transmitting on Channel 1. Temperature: 22C, Humidity: 42%, Pressure: 100kPa. Voltage to EUT is 120 Vac 60Hz. Data sheet represents emissions from the frequency range of 30.0 to 1000.0 MHz. Testing November 15, 2002 with new antenna.


15.247(c) BANDEDGE PLOTS – DIRECT SEQUENCE

CHANNEL 1

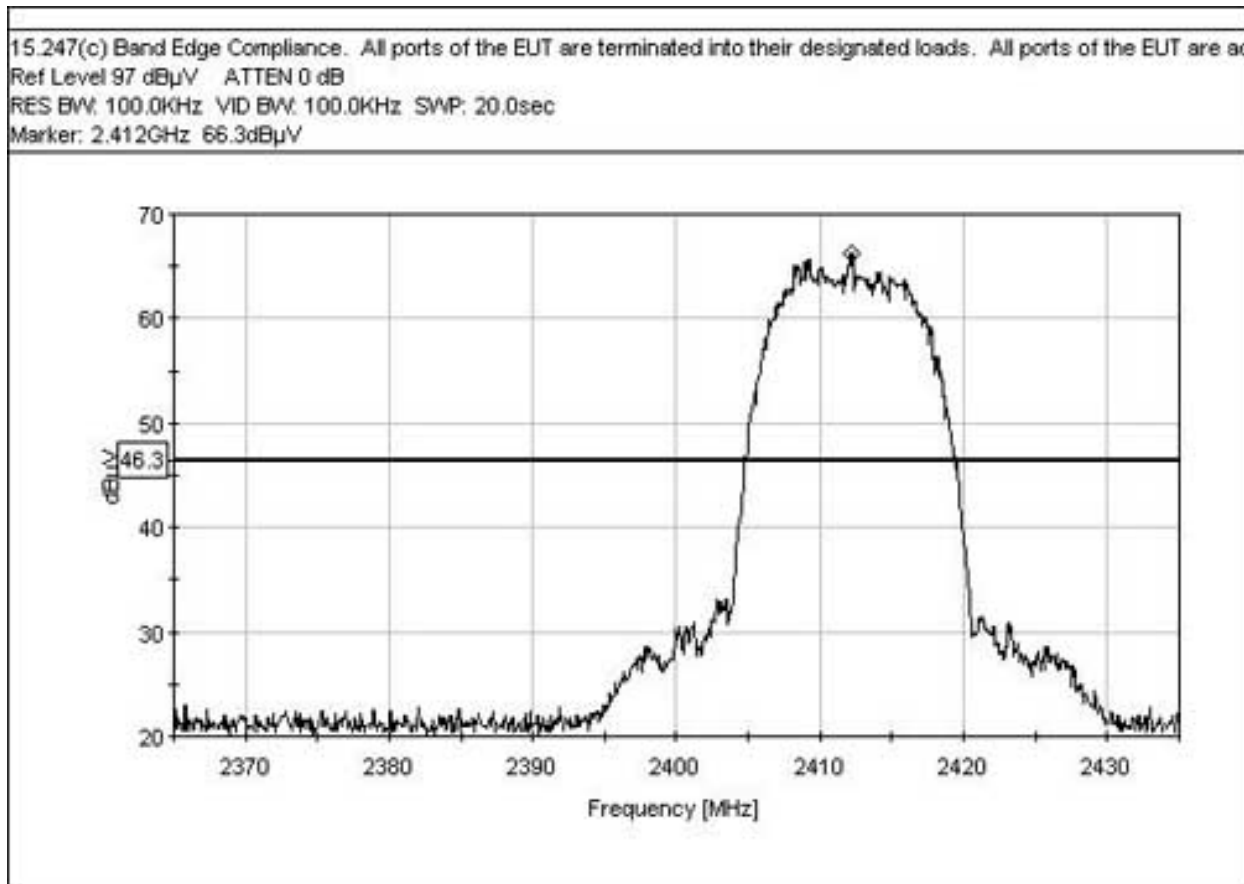


Notes: Testing November 15, 2002 with new antenna.

CHANNEL 11

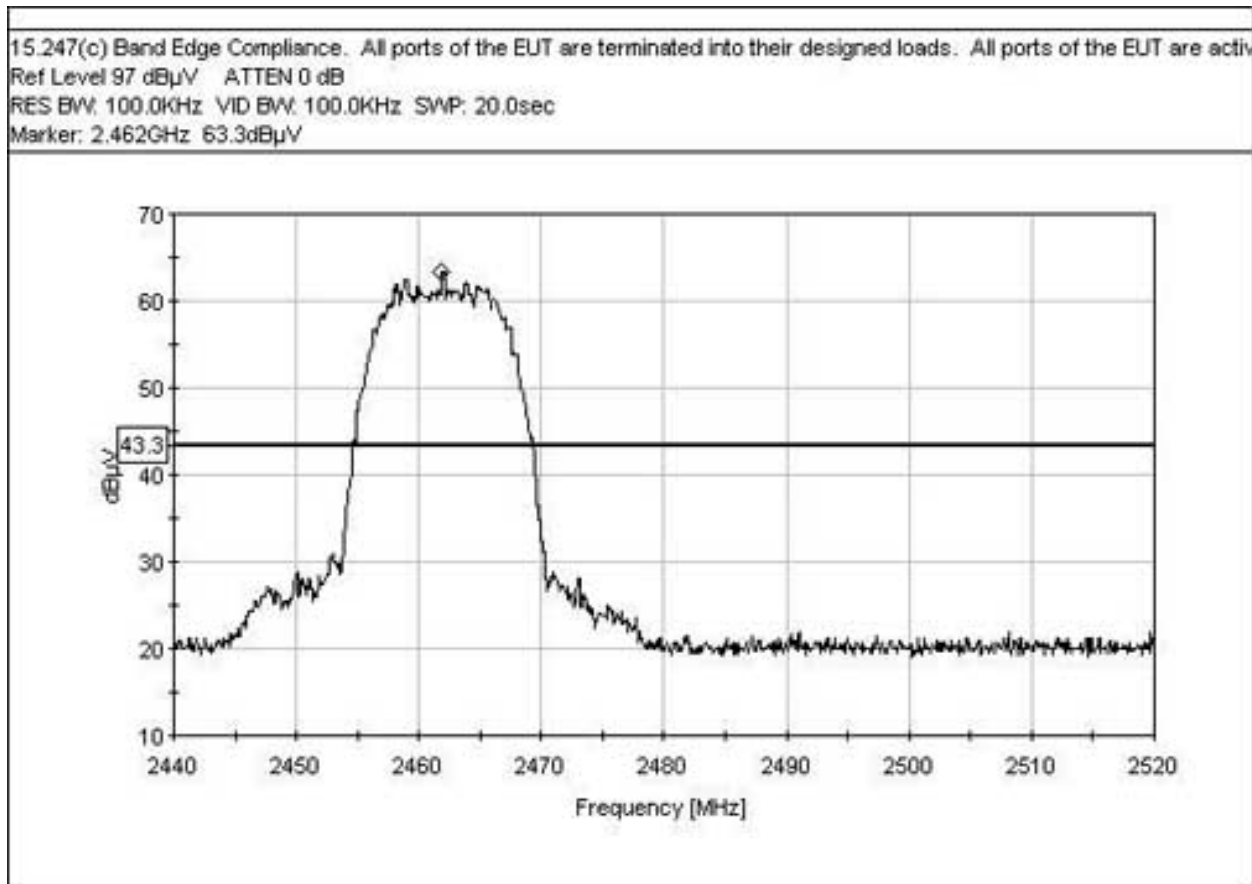


Notes: Testing November 15, 2002 with new antenna.

15.247(d) POWER SPECTRAL DENSITY - CHANNEL 1

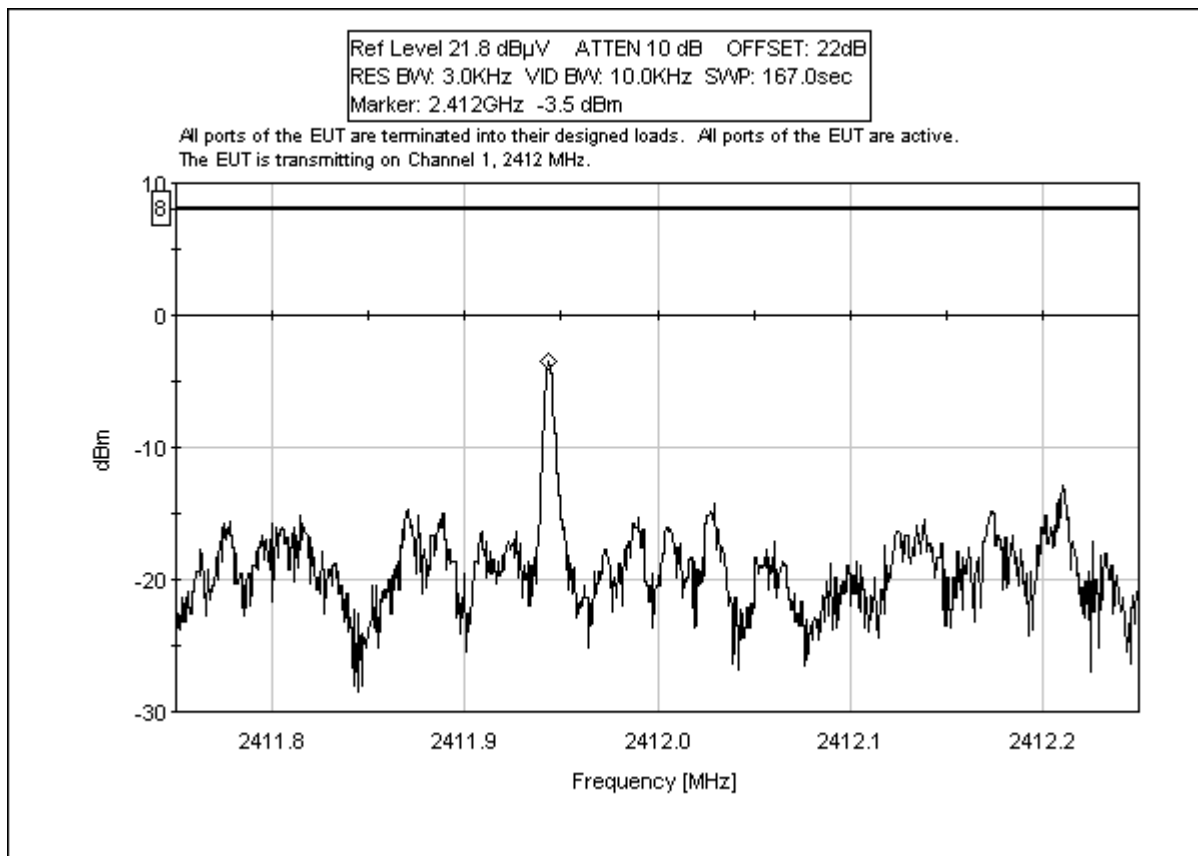

POWER SPECTRAL DENSITY - CHANNEL 6

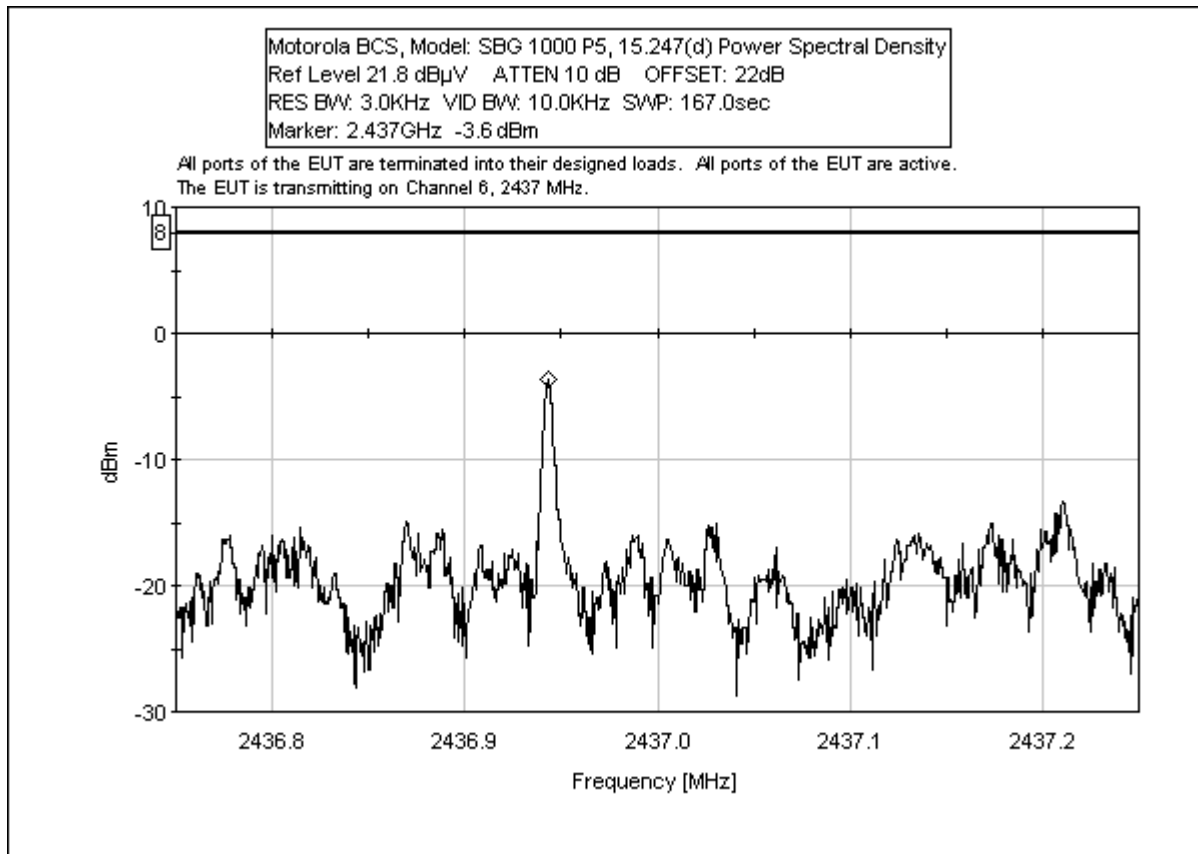

POWER SPECTRAL DENSITY - CHANNEL 11

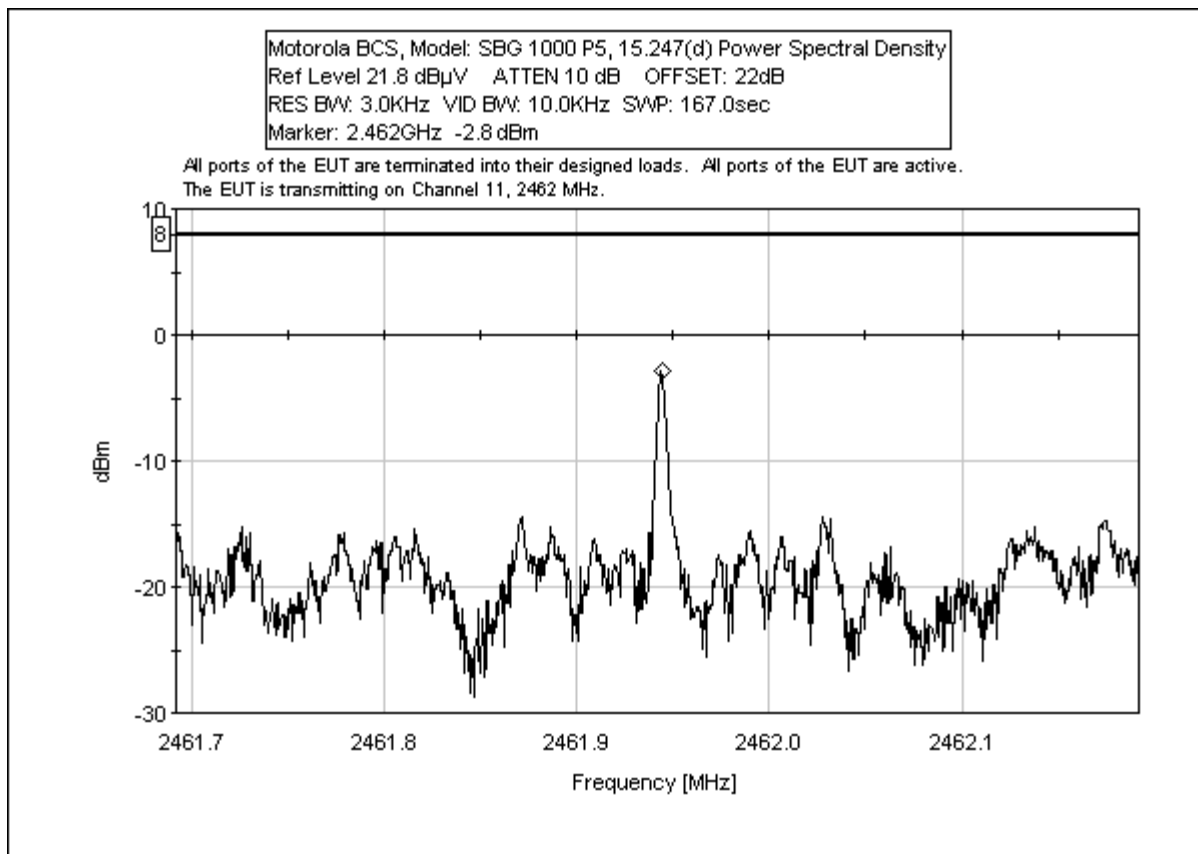


Table 6: 15.107/15.207 Six Highest Conducted Emission Levels

| FREQUENCY MHz | METER READING dB μ V | CORRECTION FACTORS | | | | CORRECTED READING dB μ V | SPEC LIMIT dB μ V | MARGIN dB | NOTES |
|------------------|--------------------------------|--------------------|--|--|--|------------------------------------|-----------------------------|--------------|-------|
| | | Lisn dB | | | | | | | |
| 1.206643 | 38.0 | 0.0 | | | | 38.0 | 48.0 | -10.0 | B |
| 3.314586 | 39.3 | 0.0 | | | | 39.3 | 48.0 | -8.7 | B |
| 3.314586 | 38.8 | 0.0 | | | | 38.8 | 48.0 | -9.2 | W |
| 4.044224 | 36.3 | 0.0 | | | | 36.3 | 48.0 | -11.7 | B |
| 25.209390 | 36.7 | 0.0 | | | | 36.7 | 48.0 | -11.3 | W |
| 25.218400 | 36.2 | 0.0 | | | | 36.2 | 48.0 | -11.8 | B |

Test Method: ANSI C63.4 (1992)
Spec Limit: FCC Part 15 Subpart B Section 15.107/Subpart C Section 15.207 Class B

NOTES: B = Black Lead
W = White Lead

COMMENTS: The EUT is a cable modem. The EUT's USB and one of its ethernet ports is connected to a desktop computer via shielded cable. The other four ethernet ports are connected in loopback with shielded cables. Connected to the parallel port of the EUT is a thermal printer. The HPNA ports have unshielded terminated cables connected. The "F" connector port is connected to the remotely located support equipment. The desktop computer and one laptop computer are running hyperterminal and are pinging the ethernet through MS DOS. The Dolch computer is running the TFTP32 program. The EUT is transmitting on Channel 1. Temperature: 25°C, Humidity: 50%, Pressure: 100kPa. Voltage to EUT is 120 Vac 60Hz.

Table 7: 15.109 Six Highest Radiated Emission Levels

| FREQUENCY MHz | METER READING dB μ V | CORRECTION FACTORS | | | | CORRECTED READING dB μ V/m | SPEC LIMIT dB μ V/m | MARGIN dB | NOTES |
|------------------|--------------------------------|--------------------|-----------|-------------|--|--------------------------------------|-------------------------------|--------------|-------|
| | | Ant dB | Amp dB | Cable dB | | | | | |
| 46.844 | 49.1 | 12.0 | -28.3 | 1.3 | | 34.1 | 40.0 | -5.9 | VQ |
| 48.065 | 52.1 | 11.5 | -28.3 | 1.3 | | 36.6 | 40.0 | -3.4 | VQ |
| 82.547 | 53.5 | 7.4 | -28.2 | 1.7 | | 34.4 | 40.0 | -5.6 | HQ |
| 330.057 | 44.1 | 20.2 | -28.2 | 3.7 | | 39.8 | 46.0 | -6.2 | H |
| 390.013 | 48.4 | 16.1 | -28.3 | 4.0 | | 40.2 | 46.0 | -5.8 | HQ |
| 640.054 | 44.2 | 20.5 | -27.9 | 5.5 | | 42.3 | 46.0 | -3.7 | HQ |

Test Method: ANSI C63.4 (1992)
 Spec Limit: FCC Part 15 Subpart B Section 15.109 Class B
 Test Distance: 3 Meters

NOTES: H = Horizontal Polarization
 V = Vertical Polarization
 Q = Quasi Peak Reading

COMMENTS: The EUT is a cable modem. The EUT's USB and one of its ethernet ports is connected to a desktop computer via shielded cable. The other four ethernet ports are connected in loopback with shielded cables. Connected to the parallel port of the EUT is a thermal printer. The HPNA ports have unshielded terminated cables connected. The "F" connector port is connected to the remotely located support equipment. The desktop computer and one laptop computer are running hyperterminal and are pinging the ethernet through MS DOS. The Dolch computer is running the TFTP32 program. Temperature: 24°C, Humidity: 53%, Pressure: 100kPa. Voltage to EUT is 120 Vac 60Hz.

Table 8: 15.209 Six Highest Radiated Emission Levels

| FREQUENCY MHz | METER READING dB μ V | CORRECTION FACTORS | | | | CORRECTED READING dB μ V/m | SPEC LIMIT dB μ V/m | MARGIN dB | NOTES |
|------------------|--------------------------------|--------------------|-----------|-------------|------------|--------------------------------------|-------------------------------|--------------|-------|
| | | Ant dB | Amp dB | Cable dB | Dist dB | | | | |
| 1608.005 | 47.7 | 35.8 | -37.9 | 4.5 | | 50.1 | 54.0 | -3.9 | HA |
| 1641.412 | 50.2 | 36.0 | -37.9 | 4.6 | | 52.9 | 54.0 | -1.1 | HA |
| 1882.261 | 38.0 | 47.4 | -38.5 | 4.9 | | 51.8 | 54.0 | -2.2 | VA |
| 7235.819 | 39.5 | 38.6 | -35.9 | 10.5 | | 52.7 | 54.0 | -1.3 | VA |
| 7239.588 | 36.8 | 35.5 | -35.9 | 10.5 | | 46.9 | 54.0 | -7.1 | HA |
| 7310.990 | 36.8 | 35.7 | -35.9 | 10.4 | | 47.0 | 54.0 | -7.0 | VA |

Test Method: ANSI C63.4 (1992)
 Spec Limit: FCC Part 15 Subpart C Section 15.209
 Test Distance: 3 Meters

NOTES: H = Horizontal Polarization
 V = Vertical Polarization
 A = Average Reading

COMMENTS: The EUT is a cable modem (32MB SDRAM). The EUT's USB and one of its ethernet ports is connected to a desktop computer via shielded cable. The other four ethernet ports are connected in loopback with unshielded cat. 5 cables. Connected to the parallel port of the EUT is a thermal printer. One of the HPNA ports has an unshielded terminated cable connected. The F connector port is connected to the remotely located support equipment. The desktop computer and one laptop computer are running hyperterminal and are pinging the ethernet through MS DOS. The Dolch computer is running the TFTP32 program. The EUT is transmitting on Channel 1 and Channel 11. Temperature: 22C, Humidity: 42%, Pressure: 100kPa. Voltage to EUT is 120 Vac 60Hz. Data sheet represents emissions from the frequency range of 1 GHz to 12.9 GHz.

2.1093 MPE Calculations

Maximum Permissible Exposure Calculations

Calculations prepared for:
 Motorola BCS
 6450 Sequence Drive
 San Diego, Ca 92121

Calculations prepared by:
 Stuart Yamamoto
 110 N. Olinda Place
 Brea, Ca 9283

Model Number: SBG 1000 P5
 FCC Identification:

Fundamental Operating Frequency: 2412 MHz to 2462 MHz

Maximum Rated Output Power: 0.032 Watts (15.05 dBm)
 Measured Maximum Output Power: 0.0195 Watts (12.9 dBm)
 (Antenna terminal, 2412 MHz)

MPE limit in accordance with FCC part 1.1311, table 1
 EIRP = Maximum Rated Output Power (dBm) + Antenna Gain (dBi)
 EIRP = 15.05 dBm + 5.0 dBi = 20.05 dBm (101.15 mWatt)

Limit for Maximum permissible exposure: (B) Limit for General population/uncontrolled Exposure:

For the frequency range of 1500-100,000 MHz, the MPE is 1 (mW/cm²)

| EIRP (mW) | Distance (cm) | Power Density (mW/cm ²) | Limit (mW/cm ²) | Result |
|-----------|---------------|-------------------------------------|-----------------------------|--------|
| 101.15 | 20 | 0.0201 | 1.0000 | PASS |

$$\text{Power Density (mW/cm}^2\text{)} = \frac{\text{EIRP}}{4 * \pi * d^2}$$

EIRP is given in mW
 Distance (d) is given in centimeters

Under normal operating conditions, the antenna is designed to maintain a separation distance of 20 cm from all persons. As shown in the MPE results above, this device passes the limits specified in 1.1311 at a distance of 20 cm and at the rated output power of 0.032 Watts (32 mW). For the measured output power at the antenna terminal of 0.0195 Watts (19.5 mW), the EUT satisfies the requirement in the 1500 to 100,000 MHz frequency range.

TEMPERATURE AND HUMIDITY DURING TESTING

The temperature during testing was within +15°C and + 35°C.

The relative humidity was between 20% and 75%.

MEASUREMENT UNCERTAINTY

Measurement uncertainty associated with data in this report is a $\pm 2.94\text{dB}$ for radiated and $\pm 1.56\text{dB}$ for conducted emissions.

EUT SETUP

The equipment under test (EUT) was set up in a manner that represented its normal use, as shown in the photographs in Appendix A. Any special conditions required for the EUT to operate normally are identified in the comments that accompany the emissions tables. The corrected data was then compared to the applicable emission limits to determine compliance.

The cables were routed consistent with the typical application by varying the configuration of the test sample. Interface cables were connected to the available I/O ports of the test unit. The effect of varying the position of the cables was investigated to find the configuration that produced maximum emissions. I/O cables were of the type and length specified in the individual requirements. The length of cable that produced maximum emissions was selected. The interval between different pieces of equipment was approximately 10 centimeters. All excessive interconnecting cable was bundled in 30-40 centimeter lengths.

The radiated and conducted emissions data of the Cable Modem Gateway, SBG 1000 P5, was taken with the HP Spectrum Analyzer. Incorporating the applicable correction factors for distance, antenna, cable loss and amplifier gain, the data was reduced as shown in Table A.

Preliminary and final measurements were taken in order to ensure that all emissions from the EUT were found and maximized.

CORRECTION FACTORS

The basic spectrum analyzer reading was converted using correction factors as shown in the highest emissions readings in the tables. For radiated emissions in $\text{dB}\mu\text{V}/\text{m}$, the spectrum analyzer reading in $\text{dB}\mu\text{V}$ was corrected by using the following formula in Table A. This reading was then compared to the applicable specification limit to determine compliance.

| TABLE A: SAMPLE CALCULATIONS | | |
|-------------------------------------|---------------------|-------------------------------------|
| | Meter reading | ($\text{dB}\mu\text{V}$) |
| + | Antenna Factor | (dB) |
| + | Cable Loss | (dB) |
| - | Distance Correction | (dB) |
| - | Preamplifier Gain | (dB) |
| = | Corrected Reading | ($\text{dB}\mu\text{V}/\text{m}$) |

TEST INSTRUMENTATION AND ANALYZER SETTINGS

The test instrumentation and equipment listed in Table A were used to collect both the radiated and conducted emissions data for the Cable Modem Gateway, SBG 1000 P5. For radiated measurements from 9 kHz to 30 MHz, the magnetic loop antenna was used. For radiated measurements below 300 MHz, the biconical antenna was used. For frequencies from 300 to 1000 MHz, the log periodic antenna was used. The horn antenna was used for frequencies above 1000 MHz. All antennas were located at a distance of 3 meters from the edge of the EUT. Conducted emissions tests required the use of the FCC type LISNs.

The HP spectrum analyzer was used for all measurements. Table B shows the analyzer bandwidth settings that were used in designated frequency bands. For conducted emissions, an appropriate reference level and a vertical scale size of 10 dB per division were used. A 10 dB external attenuator was also used during conducted tests, with internal offset correction in the analyzer. During radiated testing, the measurements were made with 0 dB of attenuation, a reference level of 97 dB μ V, and a vertical scale of 10 dB per division.

SPECTRUM ANALYZER DETECTOR FUNCTIONS

The notes that accompany the measurements contained in the Tables indicate the type of detector function used to obtain the given readings. Unless otherwise noted, all readings were made in the "Peak" mode. Whenever a "Quasi-Peak" or "Average" reading is listed as one of the six highest readings, this is indicated as a "Q" or an "A" in the appropriate table. The following paragraphs describe in more detail the detector functions and when they were used to obtain the emissions data.

Peak

In this mode, the Spectrum Analyzer or test engineer recorded all emissions at their peak value as the frequency band selected was scanned. By combining this function with another feature of the analyzer called "peak hold," the analyzer had the ability to measure transients or low duty cycle transient emission peak levels. In this mode the analyzer made a slow scan across the frequency band selected and measured the peak emission value found at each frequency across the band.

Quasi-Peak

When the true peak values exceeded or were within 2 dB of the specification limit, quasi-peak measurements were taken using the HP Quasi-Peak Adapter for the HP Spectrum Analyzer. The detailed procedure for making quasi peak measurements contained in the HP Quasi-Peak Adapter manual were followed.

Average

For certain frequencies, average measurements may be made using the spectrum analyzer. To make these measurements, the test engineer reduces the video bandwidth on the analyzer until the modulation of the signal is filtered out. At this point the analyzer is set into the linear mode and the scan time is reduced.

EUT TESTING

Mains Conducted Emissions

During conducted emissions testing, the EUT was located on a wooden table measuring approximately 80 cm high, 1 meter deep, and 1.5 meters in length. One wall of the room where the EUT was located has a minimum 2 meter by 2 meter conductive plane. The EUT was mounted on the wooden table 40 cm away from the conductive plane, and 80 cm from any other conductive surface.

The vertical metal plane used for conducted emissions was grounded to the earth. Power to the EUT was provided through a LISN. The LISN was grounded to the ground plane. All other objects were kept a minimum of 80 cm away from the EUT during the conducted test.

For conducted emissions testing, a 30 to 50 second sweep time was used for automated measurements in the frequency bands of 450 kHz to 1.705 MHz, 1.705 MHz to 3 MHz, and 3 MHz to 30 MHz. All readings within 20 dB of the limit were recorded. At frequencies where the recorded emissions were close to the limit, further investigation was performed manually at a slower sweep rate.

Antenna Conducted Emissions

For measuring the signal strength on the RF output port of the EUT, the spectrum analyzer was connected directly to the EUT. The sweep time of the analyzer was adjusted so that the spectrum analyzer readings were always in a calibrated range. All readings within 20 dB of the limit were recorded.

Radiated Emissions

The EUT was mounted on a nonconductive, rotating table 80 cm above the conductive grid. The nonconductive table dimensions were 1 meter by 1.5 meters.

During the preliminary radiated scan, the host PC was powered up and operating in its defined FCC test mode. For radiated measurements from 9 kHz to 30 MHz, the magnetic loop antenna was used. The frequency range of 30 MHz to 88 MHz was scanned with the biconical antenna located about 1.5 meter above the ground plane in the vertical configuration. During this scan, the turntable was rotated and all peaks at or near the limit were recorded. The frequency range of 100 to 300 MHz was then scanned in the same manner using the biconical antenna and the peaks recorded. Lastly, a scan of the FM band from 88 to 110 MHz was made, using a reduced resolution bandwidth and frequency span. The biconical antenna was changed to the horizontal polarity and the above steps were repeated. After changing to the log periodic antenna in the horizontal configuration, the frequency range of 300 to 1000 MHz was scanned. The log periodic antenna was changed to the vertical polarity and the frequency range of 300 to 1000 MHz was again scanned. For frequencies exceeding 1000 MHz, the horn antenna was used. Care was taken to ensure that no frequencies were missed within the FM and TV bands. An analysis was performed to determine if the signals that were at or near the limit were caused by an ambient transmission. If unable to determine by analysis, the equipment was powered down to make the final determination if the EUT was the source of the emission.

A thorough scan of all frequencies was made manually using a small frequency span, rotating the turntable as needed. The test engineer maximized the readings with respect to the table rotation and configuration of EUT. Maximizing of the EUT was achieved by monitoring the spectrum analyzer on a closed circuit television monitor.

TRANSMITTER CHARACTERISTICS

15.247(a)(2) Bandwidth Measurements (Direct Sequence)

The fundamental frequency was kept within the permitted band 2400-2483.5. The minimum 6dB bandwidth shall be at least 500 kHz. Refer to the occupied bandwidth plots.

15.247(b) Peak Output Power

Frequency Band of Transmitter: 2400-2483.5

The RF conducted test was measured using a direct connection between the antenna port of the transmitter and the spectrum analyzer, through suitable attenuation. The resolution bandwidth was adjusted to greater than the 6 dB bandwidth of the emissions.

- **15.247(b)(1)** The maximum peak output power for all direct sequences, shall not exceed 1 watt.
- **15.247(b)(3)** If the transmitting antenna of directional gain greater than 6 dBi was used, except as shown in sections 15.247(b)(3)(i), (ii) & (iii), the peak output power shall be reduced below the stated values in paragraphs (b)(1) of section 15.247, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.


15.247(d) Peak Power Spectral Density

The peak power spectral density conducted from the EUT to the antenna was not greater than 8 dm in any 3 kHz band during any time interval of continuous transmission.

APPENDIX A

TEST SETUP PHOTOGRAPHS

EQUIPMENT TEST SETUP DIAGRAM - NOVEMBER TESTING

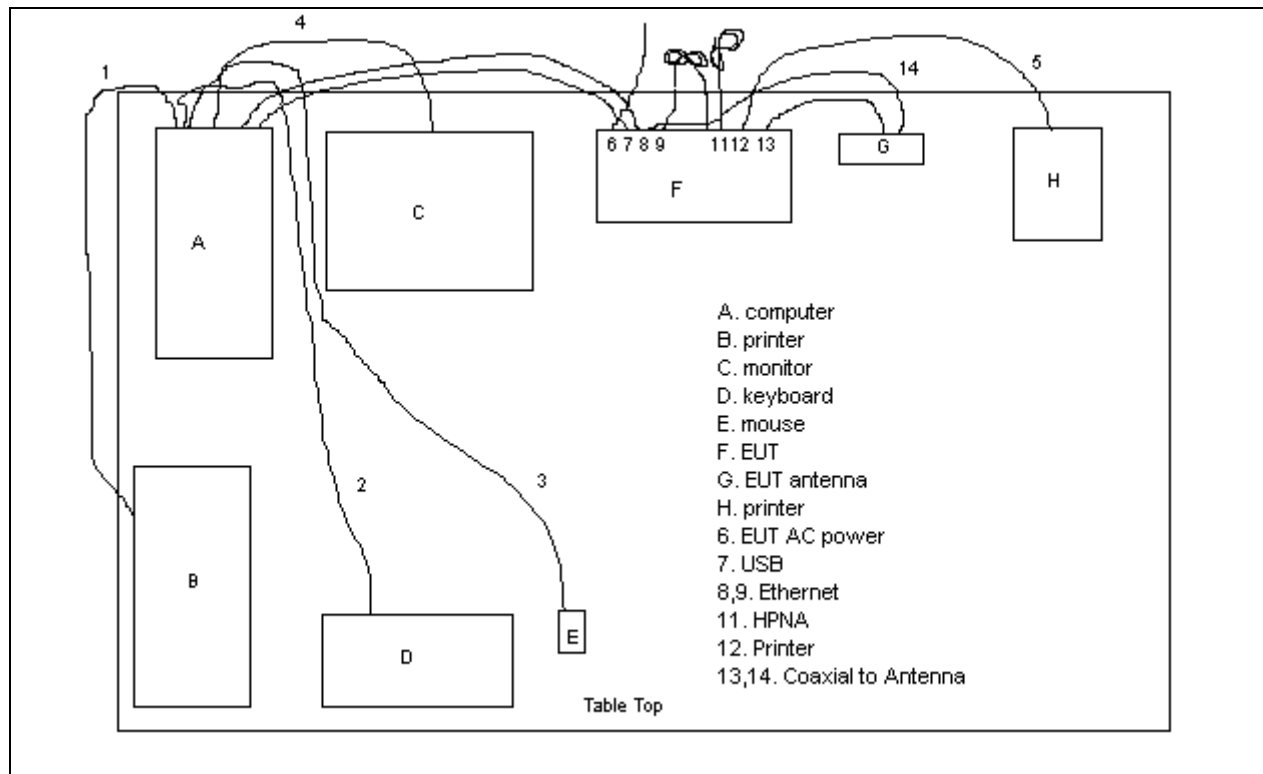

PHOTOGRAPH SHOWING VOLTAGE VARIATIONS AND PEAK OUTPUT



Voltage Variations and Peak Output

PHOTOGRAPH SHOWING OCCUPIED BANDWIDTH



Occupied Bandwidth

PHOTOGRAPH SHOWING DIRECT CONNECT TESTING



Direct Connect Testing

PHOTOGRAPH SHOWING OATS TESTING



Oats - Front View

PHOTOGRAPH SHOWING OATS TESTING



Oats - Back View

PHOTOGRAPH SHOWING OATS TESTING



Oats - Front View

Notes: Testing November 15, 2002 with new antenna.

PHOTOGRAPH SHOWING OATS TESTING



Oats – Back View

Notes: Testing November 15, 2002 with new antenna.

PHOTOGRAPH SHOWING POWER SPECTRAL DENSITY



Power Spectral Density

PHOTOGRAPH SHOWING MAINS CONDUCTED EMISSIONS



Mains Conducted Emissions - Front View

PHOTOGRAPH SHOWING MAINS CONDUCTED EMISSIONS



Mains Conducted Emissions - Back View

APPENDIX B

TEST EQUIPMENT LIST

15.31(e)

| Equipment | Asset # | Manufacturer | Model # | Serial # | Cal Date | Cal Due |
|---------------------------|-----------------|---------------------|-------------------|-----------------|-----------------|----------------|
| Power Meter | 02082 | HP | 435B | 2445A11881 | 82101 | 82102 |
| Power Sensor | 02083 | HP | 8482A | 2349A09782 | 52902 | 52903 |
| SMA Cable | 1337 | Goretex | 3825510-76 | 244922 | 82401 | 82402 |
| Programmable Power Source | 01695/ 01696 | Pacific Power | 345AMX / UPC32 | 250 / 245 | 62102 | 062103 |

15.247(a)(2)

| Equipment | Asset # | Manufacturer | Model # | Serial # | Cal Date | Cal Due |
|-------------------|----------------|---------------------|----------------|-----------------|-----------------|----------------|
| Spectrum Analyzer | 01865 | HP | 8566B | 2532A02509 | 92801 | 92802 |
| QP Adapter | 01437 | HP | 85650A | 3303A01884 | 92801 | 92802 |
| SMA Cable | 1337 | Goretex | 3825510-76 | 244922 | 82401 | 82402 |
| 10dB Attenuator | | Weinschel | 93459 | | 8602 | 8603 |
| 10dB Attenuator | | Weinschel | 93459 | | 8602 | 8603 |

15.247(b)(1)

| Equipment | Asset # | Manufacturer | Model # | Serial # | Cal Date | Cal Due |
|------------------|----------------|---------------------|----------------|-----------------|-----------------|----------------|
| Power Meter | 02082 | HP | 435B | 2445A11881 | 82101 | 82102 |
| Power Sensor | 02083 | HP | 8482A | 2349A09782 | 52902 | 52903 |
| SMA Cable | 1337 | Goretex | 3825510-76 | 244922 | 82401 | 82402 |

15.247(c)

| Equipment | Asset # | Manufacturer | Model # | Serial # | Cal Date | Cal Due |
|--------------------------|---------|--------------|-------------|------------------|----------|---------|
| Spectrum Analyzer | 01865 | HP | 8566B | 2532A02509 | 92801 | 92802 |
| QP Adapter | 01437 | HP | 85650A | 3303A01884 | 92801 | 92802 |
| Spectrum Analyzer | 02467 | Agilent | E7405A | US40240225 | 32902 | 32903 |
| Bicon Antenna | 306 | AH | SAS200/540 | 220 | 92401 | 92402 |
| Log Periodic Antenna | 331 | AH | SAS 00/516 | 330 | 92401 | 92402 |
| Pre-amp | 00309 | HP | 8447D | 1937A02548 | 90501 | 90502 |
| Antenna cable | NA | NA | RG214 | Cable#15 | 122001 | 122002 |
| Pre-amp to SA cable | NA | Harbour | RG223/U | Cable#10 | 70802 | 70803 |
| 1-18 GHz Horn Antenna | 0849 | EMCO | 3115 | 6246 | 91201 | 91202 |
| Microwave Pre-amp | 00786 | HP | 83017A | 3123A00281 | 91201 | 91202 |
| ¼" Heliac Coaxial Cable | NA | Andrew | FSJ-50A-4 | Cable#7 (6 ft) | 71502 | 71503 |
| ¼" Heliac Coaxial Cable | NA | Andrew | LDF1-50 | Cable#18 (70 ft) | 91101 | 91102 |
| SMA Cable | 2212 | Beldon | 9273 | NA | 101701 | 101702 |
| SMA Cable | 1337 | Goretex | 3825510-76 | 244922 | 82401 | 82402 |
| Loop Antenna | 00314 | EMCO | 6502 | 2014 | 72302 | 72303 |
| 3.5 GHz High Pass Filter | 02117 | HP | 84300-80038 | 3643A00027 | 62502 | 62503 |
| 8.2 GHz High Pass Filter | 02118 | HP | 84300-80039 | | 62502 | 62503 |
| 18-26.5 GHz Horn Antenna | 01413 | HP | 84125-80008 | 942126-003 | 71102 | 71103 |
| 10dB Attenuator | | Weinschel | 93459 | | 8602 | 8603 |
| 10dB Attenuator | | Weinschel | 93459 | | 8602 | 8603 |

15.247(d)

| Equipment | Asset # | Manufacturer | Model # | Serial # | Cal Date | Cal Due |
|-------------------|---------|--------------|------------|------------|----------|---------|
| Spectrum Analyzer | 01865 | HP | 8566B | 2532A02509 | 92801 | 92802 |
| QP Adapter | 01437 | HP | 85650A | 3303A01884 | 92801 | 92802 |
| SMA Cable | 1337 | Goretex | 3825510-76 | 244922 | 82401 | 82402 |
| 10dB Attenuator | | Weinschel | 93459 | | 8602 | 8603 |
| 10dB Attenuator | | Weinschel | 93459 | | 8602 | 8603 |

15.107/15.207

| Equipment | Asset # | Manufacturer | Model # | Serial # | Cal Date | Cal Due |
|-------------------|---------|--------------|----------|------------|----------|---------|
| Spectrum Analyzer | 01865 | HP | 8566B | 2532A02509 | 092801 | 092802 |
| QP Adapter | 01437 | HP | 85650A | 3303A01884 | 092801 | 092802 |
| LISN | 02128 | EMCO | 3816/2NM | 9809-1090 | 032002 | 032003 |
| LISN | 00847 | EMCO | 3816/2NM | 1104 | 101501 | 101502 |

15.109

| Equipment | Asset # | Manufacturer | Model # | Serial # | Cal Date | Cal Due |
|--------------------------|---------|--------------|-------------|------------------|----------|---------|
| Spectrum Analyzer | 01865 | HP | 8566B | 2532A02509 | 092801 | 092802 |
| QP Adapter | 01437 | HP | 85650A | 3303A01884 | 092801 | 092802 |
| Spectrum Analyzer | 02467 | Agilent | E7405A | US40240225 | 032902 | 032903 |
| Bicon Antenna | 306 | AH | SAS200/540 | 220 | 092401 | 092402 |
| Log Periodic Antenna | 331 | AH | SAS 00/516 | 330 | 092401 | 092402 |
| Pre-amp | 00309 | HP | 8447D | 1937A02548 | 090501 | 090502 |
| Antenna cable | NA | NA | RG214 | Cable#15 | 122001 | 122002 |
| Pre-amp to SA cable | NA | Harbour | RG223/U | Cable#10 | 070802 | 070803 |
| 1-18 GHz Horn Antenna | 0849 | EMCO | 3115 | 6246 | 091201 | 091202 |
| Microwave Pre-amp | 00786 | HP | 83017A | 3123A00281 | 091201 | 091202 |
| ¼” Helix Coaxial Cable | NA | Andrew | FSJ-50A-4 | Cable#7 (6 ft) | 071502 | 071503 |
| ¼” Helix Coaxial Cable | NA | Andrew | LDF1-50 | Cable#18 (70 ft) | 091101 | 091102 |
| SMA Cable | 2212 | Beldon | 9273 | NA | 101701 | 101702 |
| SMA Cable | 1337 | Goretex | 3825510-76 | 244922 | 82401 | 82402 |
| 3.5 GHz High Pass Filter | 02117 | HP | 84300-80038 | 3643A00027 | 62502 | 62503 |
| 8.2 GHz High Pass Filter | 02118 | HP | 84300-80039 | | 62502 | 62503 |
| 18-26.5 GHz Horn Antenna | 01413 | HP | 84125-80008 | 942126-003 | 71102 | 71103 |
| 10dB Attenuator | | Weinschel | 93459 | | 8602 | 8603 |
| 10dB Attenuator | | Weinschel | 93459 | | 8602 | 8603 |

2.1093

| Equipment | Asset # | Manufacturer | Model # | Serial # | Cal Date | Cal Due |
|--------------|---------|--------------|------------|------------|----------|---------|
| Power Meter | 02082 | HP | 435B | 2445A11881 | 82101 | 82102 |
| Power Sensor | 02083 | HP | 8482A | 2349A09782 | 52902 | 52903 |
| SMA Cable | 1337 | Goretex | 3825510-76 | 244922 | 82401 | 82402 |

Radiated Emissions equipment list for testing November 15, 2002

| Equipment | Asset # | Manufacturer | Model # | Serial # | Cal Date | Cal Due |
|--------------------------|---------|--------------|-------------|---------------------|----------|---------|
| Spectrum Analyzer | 01865 | HP | 8566B | 2532A02509 | 092702 | 092703 |
| QP Adapter | 01437 | HP | 85650A | 3303A01884 | 092702 | 092703 |
| Bicon Antenna | 306 | AH | SAS200/540 | 220 | 092302 | 092303 |
| Log Periodic Antenna | 300 | AH | SAS 00/516 | 331 | 092302 | 092303 |
| Pre-amp | 00309 | HP | 8447D | 1937A02548 | 082302 | 082303 |
| Antenna cable | NA | NA | RG214 | Cable#15 | 122001 | 122002 |
| Pre-amp to SA cable | NA | Harbour | RG223/U | Cable#10 | 070802 | 070803 |
| Horn Antenna | 0849 | EMCO | 3115 | 6246 | 091002 | 091003 |
| Microwave Pre-amp | 00786 | HP | 83017A | 3123A00281 | 091102 | 091103 |
| Helix Coaxial Cable | NA | Andrew | LDF-50 | Cable#20 (48 ft) | 091102 | 091103 |
| 12' SMA Cable | 01337 | W.L.Gore | NA | 244922 | 121801 | 121802 |
| 3.5 GHz High Pass Filter | 02117 | HP | 84300-80038 | 3643A00027 | 62502 | 62503 |
| 10dB Attenuator | NA | Weinschel | 1B | AJ9096 | 8602 | 8603 |
| 20dB Attenuator | NA | HP | 85053-60001 | 01432 | 8602 | 8603 |

Equipment list for testing performed on December 5, 2002

| Equipment | Asset # | Manufacturer | Model # | Serial # | Cal Date | Cal Due |
|---------------------|---------|--------------|---------|---------------------|----------|---------|
| Spectrum Analyzer | 01865 | HP | 8566B | 2532A02509 | 092702 | 092703 |
| QP Adapter | 01437 | HP | 85650A | 3303A01884 | 092702 | 092703 |
| Horn Antenna | 0849 | EMCO | 3115 | 6246 | 091002 | 091003 |
| Helix Coaxial Cable | NA | Andrew | LDF-50 | Cable#20 (48 ft) | 091102 | 091103 |

APPENDIX C
MEASUREMENT DATA SHEETS

Test Location: CKC Laboratories, Inc. • 110 N. Olinda Place • Brea, CA 92823 • (714) 993-6112

Customer: **Motorola BCS**
 Specification: **FCC 15.247(c) Emissions (-20dBc limit)**
 Work Order #: **79346** Date: 08/08/2002
 Test Type: **Maximized emission** Time: 16:06:00
 Equipment: **Cable Modem** Sequence#: 5
 Manufacturer: Motorola BCS Tested By: Stuart Yamamoto
 Model: SBG 1000 P5
 S/N: 00080ED2F1E0

Equipment Under Test (* = EUT):

| Function | Manufacturer | Model # | S/N |
|--------------|--------------|-------------|--------------|
| Cable Modem* | Motorola BCS | SBG 1000 P5 | 00080ED2F1E0 |

Support Devices:

| Function | Manufacturer | Model # | S/N |
|------------------|---------------------|------------|---------------|
| C6U Converter | General Instruments | C6U | J5M7000101358 |
| Hub | Bay Networks | DS104 | DS14H08355155 |
| Computer | Toshiba | PA1215UV | 04694236 |
| Computer | Dolch | L-PAC 585 | DCS2016538 |
| Thermal Printer | SII | DPU-414 | 1033083A |
| Mouse | Gateway | MOSXX | |
| Keyboard | Dell | SK-1000RS | M940111179 |
| Monitor | NEC | JC-1538VMA | 5900265EA |
| Computer | Gateway | G6-366C | 0013168086 |
| Parallel Printer | Epson | P156A | CMR1545596 |
| Head End | Cisco | uBR-MC11C | CN1ISS0AA |

Test Conditions / Notes:

The EUT is a cable modem. The EUT's USB and one of its ethernet ports is connected to a desktop computer via shielded cable. The other four ethernet ports are connected in loopback with shielded cables. Connected to the parallel port of the EUT is a thermal printer. The HPNA ports have unshielded terminated cables connected. The "F" connector port is connected to the remotely located support equipment. The desktop computer and one laptop computer are running hyperterminal and are pinging the ethernet through MS DOS. The Dolch computer is running the TFTP32 program. The EUT is transmitting on Channel 1. Temperature: 25°C, Humidity: 46%, Pressure: 100kPa Voltage to EUT is 120 Vac 60Hz. Data represents all emissions seen from 9 kHz to 25 GHz. Antenna terminal conducted emissions test (-20dBc limit).

Transducer Legend:

| |
|--|
| |
|--|

Measurement Data: Reading listed by margin. Test Distance: None

| # | Freq MHz | Rdng dBµV | dB | | | | Dist Table | Corr dBµV | Spec dBµV | Margin dB | Polar Ant |
|---|-------------|--------------|----|--|--|--|---------------|--------------|--------------|--------------|--------------|
| 1 | 1607.968M | 58.9 | | | | | +0.0 | 58.9 | 89.8 | -30.9 | Vert |
| 2 | 7236.300M | 56.4 | | | | | +0.0 | 56.4 | 89.8 | -33.4 | Vert |
| 3 | 4826.520M | 53.4 | | | | | +0.0 | 53.4 | 89.8 | -36.4 | Vert |

Test Location: CKC Laboratories, Inc. • 110 N. Olinda Place • Brea, CA 92823 • (714) 993-6112

Customer: **Motorola BCS**
 Specification: **FCC 15.247(c) Emissions (-20dBc limit)**
 Work Order #: **79346** Date: 08/16/2002
 Test Type: **Maximized emission** Time: 13:57:22
 Equipment: **Cable Modem** Sequence#: 13
 Manufacturer: Motorola BCS Tested By: Stuart Yamamoto
 Model: SBG 1000 P5
 S/N: 00080ED2F1E0

Equipment Under Test (* = EUT):

| Function | Manufacturer | Model # | S/N |
|--------------|--------------|-------------|--------------|
| Cable Modem* | Motorola BCS | SBG 1000 P5 | 00080ED2F1E0 |

Support Devices:

| Function | Manufacturer | Model # | S/N |
|------------------|---------------------|------------|---------------|
| C6U Converter | General Instruments | C6U | J5M7000101358 |
| Hub | Bay Networks | DS104 | DS14H08355155 |
| Computer | Toshiba | PA1215UV | 04694236 |
| Computer | Dolch | L-PAC 585 | DCS2016538 |
| Thermal Printer | SII | DPU-414 | 1033083A |
| Mouse | Gateway | MOSXX | |
| Keyboard | Dell | SK-1000RS | M940111179 |
| Monitor | NEC | JC-1538VMA | 5900265EA |
| Computer | Gateway | G6-366C | 0013168086 |
| Parallel Printer | Epson | P156A | CMR1545596 |
| Head End | Cisco | uBR-MC11C | CN1ISS0AA |

Test Conditions / Notes:

The EUT is a cable modem. The EUT's USB and one of its ethernet ports is connected to a desktop computer via shielded cable. The other four ethernet ports are connected in loopback with shielded cables. Connected to the parallel port of the EUT is a thermal printer. The HPNA ports have unshielded terminated cables connected. The "F" connector port is connected to the remotely located support equipment. The desktop computer and one laptop computer are running hyperterminal and are pinging the ethernet through MS DOS. The Dolch computer is running the TFTP32 program. The EUT is transmitting on Channel 6. Temperature: 25°C, Humidity: 50%, Pressure: 100kPa Voltage to EUT is 120 Vac 60Hz. Data represents all emissions seen from 9 kHz to 25 GHz. Antenna terminal conducted emissions test (-20dBc limit).

Transducer Legend:

| |
|--|
| |
|--|

Measurement Data: Reading listed by margin. Test Distance: None

| # | Freq MHz | Rdng dBµV | dB | | | | Dist Table | Corr dBµV | Spec dBµV | Margin dB | Polar Ant |
|---|-------------|--------------|----|--|--|--|---------------|--------------|--------------|--------------|--------------|
| 1 | 1624.634M | 58.5 | | | | | +0.0 | 58.5 | 89.6 | -31.1 | Vert |
| 2 | 626.352M | 57.9 | | | | | +0.0 | 57.9 | 89.6 | -31.7 | Vert |
| 3 | 1845.774M | 53.0 | | | | | +0.0 | 53.0 | 89.6 | -36.6 | Vert |
| 4 | 4873.642M | 50.4 | | | | | +0.0 | 50.4 | 89.6 | -39.2 | Vert |

| | | | | | | | |
|---|-----------|------|------|------|------|-------|------|
| 5 | 3249.248M | 49.9 | +0.0 | 49.9 | 89.6 | -39.7 | Vert |
| 6 | 7311.499M | 48.0 | +0.0 | 48.0 | 89.6 | -41.6 | Vert |
| 7 | 22.463M | 47.3 | +0.0 | 47.3 | 89.6 | -42.3 | Vert |
| 8 | 10.986M | 45.2 | +0.0 | 45.2 | 89.6 | -44.4 | Vert |

Test Location: CKC Laboratories, Inc. • 110 N. Olinda Place • Brea, CA 92823 • (714) 993-6112

Customer: **Motorola BCS**
 Specification: **FCC 15.247(c) Emissions (-20dBc limit)**
 Work Order #: **79346** Date: 08/16/2002
 Test Type: **Maximized emission** Time: 11:01:16
 Equipment: **Cable Modem** Sequence#: 12
 Manufacturer: Motorola BCS Tested By: Stuart Yamamoto
 Model: SBG 1000 P5
 S/N: 00080ED2F1E0

Equipment Under Test (* = EUT):

| Function | Manufacturer | Model # | S/N |
|--------------|--------------|-------------|--------------|
| Cable Modem* | Motorola BCS | SBG 1000 P5 | 00080ED2F1E0 |

Support Devices:

| Function | Manufacturer | Model # | S/N |
|------------------|---------------------|------------|---------------|
| C6U Converter | General Instruments | C6U | J5M7000101358 |
| Hub | Bay Networks | DS104 | DS14H08355155 |
| Computer | Toshiba | PA1215UV | 04694236 |
| Computer | Dolch | L-PAC 585 | DCS2016538 |
| Thermal Printer | SII | DPU-414 | 1033083A |
| Mouse | Gateway | MOSXX | |
| Keyboard | Dell | SK-1000RS | M940111179 |
| Monitor | NEC | JC-1538VMA | 5900265EA |
| Computer | Gateway | G6-366C | 0013168086 |
| Parallel Printer | Epson | P156A | CMR1545596 |
| Head End | Cisco | uBR-MC11C | CN1ISS0AA |

Test Conditions / Notes:

The EUT is a cable modem. The EUT's USB and one of its ethernet ports is connected to a desktop computer via shielded cable. The other four ethernet ports are connected in loopback with shielded cables. Connected to the parallel port of the EUT is a thermal printer. The HPNA ports have unshielded terminated cables connected. The "F" connector port is connected to the remotely located support equipment. The desktop computer and one laptop computer are running hyperterminal and are pinging the ethernet through MS DOS. The Dolch computer is running the TFTP32 program. The EUT is transmitting on Channel 11. Temperature: 25°C, Humidity: 46%, Pressure: 100kPa Voltage to EUT is 120 Vac 60Hz. Data represents all emissions seen from 9 kHz to 25 GHz. Antenna terminal conducted emissions test (-20dBc limit).

Transducer Legend:

| |
|--|
| |
|--|

Measurement Data: Reading listed by margin. Test Distance: None

| # | Freq MHz | Rdng dBµV | dB | | | | Dist Table | Corr dBµV | Spec dBµV | Margin dB | Polar Ant |
|---|-------------|--------------|----|--|--|--|---------------|--------------|--------------|--------------|--------------|
| 1 | 1641.304M | 59.8 | | | | | +0.0 | 59.8 | 88.7 | -28.9 | Vert |
| 2 | 651.390M | 56.7 | | | | | +0.0 | 56.7 | 88.7 | -32.0 | Vert |
| 3 | 7386.036M | 56.5 | | | | | +0.0 | 56.5 | 88.7 | -32.2 | Vert |
| 4 | 4924.058M | 54.1 | | | | | +0.0 | 54.1 | 88.7 | -34.6 | Vert |

| | | | | | | | |
|---|-----------|------|------|------|------|-------|------|
| 5 | 1881.280M | 50.3 | +0.0 | 50.3 | 88.7 | -38.4 | Vert |
| 6 | 48.137M | 46.6 | +0.0 | 46.6 | 88.7 | -42.1 | Vert |
| 7 | 3282.608M | 46.3 | +0.0 | 46.3 | 88.7 | -42.4 | Vert |
| 8 | 11.020M | 44.2 | +0.0 | 44.2 | 88.7 | -44.5 | Vert |

Test Location: CKC Laboratories, Inc. • 110 N. Olinda Place • Brea, CA 92823 • (714) 993-6112

Customer: **Motorola BCS**
 Specification: **FCC 15.247(c)**
 Work Order #: **79346** Date: 08/15/2002
 Test Type: **Maximized emission** Time: 14:41:27
 Equipment: **Cable Modem** Sequence#: 3
 Manufacturer: Motorola BCS Tested By: Stuart Yamamoto
 Model: SBG 1000 P5
 S/N: 00080ED2F1E0

Equipment Under Test (* = EUT):

| Function | Manufacturer | Model # | S/N |
|--------------|--------------|-------------|--------------|
| Cable Modem* | Motorola BCS | SBG 1000 P5 | 00080ED2F1E0 |

Support Devices:

| Function | Manufacturer | Model # | S/N |
|------------------|---------------------|------------|---------------|
| C6U Converter | General Instruments | C6U | J5M7000101358 |
| Hub | Bay Networks | DS104 | DS14H08355155 |
| Computer | Toshiba | PA1215UV | 04694236 |
| Computer | Dolch | L-PAC 585 | DCS2016538 |
| Thermal Printer | SII | DPU-414 | 1033083A |
| Mouse | Gateway | MOSXX | |
| Keyboard | Dell | SK-1000RS | M940111179 |
| Monitor | NEC | JC-1538VMA | 5900265EA |
| Computer | Gateway | G6-366C | 0013168086 |
| Parallel Printer | Epson | P156A | CMR1545596 |
| Head End | Cisco | uBR-MC11C | CN1ISS0AA |

Test Conditions / Notes:

The EUT is a cable modem. The EUT's USB and one of its ethernet ports is connected to a desktop computer via shielded cable. The other four ethernet ports are connected in loopback with shielded cables. Connected to the parallel port of the EUT is a thermal printer. The HPNA ports have unshielded terminated cables connected. The "F" connector port is connected to the remotely located support equipment. The desktop computer and one laptop computer are running hyperterminal and are pinging the ethernet through MS DOS. The Dolch computer is running the TFTP32 program. The EUT is transmitting on Channel 1. Temperature: 23°C, Humidity: 53%, Pressure: 100kPa. Voltage to EUT is 120 Vac 60Hz. Data sheet represents emissions from the frequency range of 0.009 to 30.0 MHz.

Transducer Legend:

| | |
|-----------------------------|------------------------------|
| T1=6502 Active Loop Antenna | T2=Cable #10 070803 |
| T3=Cable #15 120602 | T4=15.31 40dB/Dec Correction |

Measurement Data: Reading listed by margin. Test Distance: 3 Meters

| # | Freq MHz | Rdng dBµV | T1 dB | T2 dB | T3 dB | T4 dB | Dist Table | Corr dBµV/m | Spec dBµV/m | Margin dB | Polar Ant |
|---|-------------|--------------|----------|----------|----------|----------|---------------|----------------|----------------|--------------|--------------|
| 1 | 79.476k | 72.4 | +10.5 | +0.1 | +0.1 | -80.0 | +0.0 | 3.1 | 29.6 | -26.5 | None |
| 2 | 137.590k | 65.4 | +10.1 | +0.1 | +0.1 | -80.0 | +0.0 | -4.3 | 24.8 | -29.1 | None |

| | | | | | | | | | | | |
|---|----------|------|-------|------|------|-------|------|-------|------|-------|------|
| 3 | 199.780k | 59.4 | +9.9 | +0.1 | +0.1 | -80.0 | +0.0 | -10.5 | 21.6 | -32.1 | None |
| 4 | 259.590k | 54.1 | +10.0 | +0.1 | +0.1 | -80.0 | +0.0 | -15.7 | 19.3 | -35.0 | None |
| 5 | 317.620k | 51.7 | +10.1 | +0.1 | +0.1 | -80.0 | +0.0 | -18.0 | 17.6 | -35.6 | None |
| 6 | 377.040k | 46.0 | +10.0 | +0.1 | +0.1 | -80.0 | +0.0 | -23.8 | 16.1 | -39.9 | None |

Test Location: CKC Laboratories, Inc. • 110 N. Olinda Place • Brea, CA 92823 • (714) 993-6112

Customer: **Motorola BCS**
 Specification: **FCC 15.247(c)**
 Work Order #: **79346** Date: 08/15/2002
 Test Type: **Maximized emission** Time: 14:35:55
 Equipment: **Cable Modem** Sequence#: 9
 Manufacturer: Motorola BCS Tested By: Stuart Yamamoto
 Model: SBG 1000 P5
 S/N: 00080ED2F1E0

Equipment Under Test (* = EUT):

| Function | Manufacturer | Model # | S/N |
|--------------|--------------|-------------|--------------|
| Cable Modem* | Motorola BCS | SBG 1000 P5 | 00080ED2F1E0 |

Support Devices:

| Function | Manufacturer | Model # | S/N |
|------------------|---------------------|------------|---------------|
| C6U Converter | General Instruments | C6U | J5M7000101358 |
| Hub | Bay Networks | DS104 | DS14H08355155 |
| Computer | Toshiba | PA1215UV | 04694236 |
| Computer | Dolch | L-PAC 585 | DCS2016538 |
| Thermal Printer | SII | DPU-414 | 1033083A |
| Mouse | Gateway | MOSXX | |
| Keyboard | Dell | SK-1000RS | M940111179 |
| Monitor | NEC | JC-1538VMA | 5900265EA |
| Computer | Gateway | G6-366C | 0013168086 |
| Parallel Printer | Epson | P156A | CMR1545596 |
| Head End | Cisco | uBR-MC11C | CN1ISS0AA |

Test Conditions / Notes:

The EUT is a cable modem. The EUT's USB and one of its ethernet ports is connected to a desktop computer via shielded cable. The other four ethernet ports are connected in loopback with shielded cables. Connected to the parallel port of the EUT is a thermal printer. The HPNA ports have unshielded terminated cables connected. The "F" connector port is connected to the remotely located support equipment. The desktop computer and one laptop computer are running hyperterminal and are pinging the ethernet through MS DOS. The Dolch computer is running the TFTP32 program. The EUT is transmitting on Channel 6. Temperature: 23°C, Humidity: 52%, Pressure: 100kPa. Voltage to EUT is 120 Vac 60Hz. Data sheet represents emissions from the frequency range of 0.009 to 30.0 MHz.

Transducer Legend:

| | |
|-----------------------------|------------------------------|
| T1=6502 Active Loop Antenna | T2=Cable #10 070803 |
| T3=Cable #15 120602 | T4=15.31 40dB/Dec Correction |

Measurement Data: Reading listed by margin. Test Distance: 3 Meters

| # | Freq MHz | Rdng dB μ V | T1 dB | T2 dB | T3 dB | T4 dB | Dist Table | Corr dB μ V/m | Spec dB μ V/m | Margin dB | Polar Ant |
|---|-------------|--------------------|----------|----------|----------|----------|---------------|----------------------|----------------------|--------------|--------------|
| 1 | 76.223k | 72.6 | +10.5 | +0.1 | +0.1 | -80.0 | +0.0 | 3.3 | 30.0 | -26.7 | None |
| 2 | 137.970k | 64.5 | +10.1 | +0.1 | +0.1 | -80.0 | +0.0 | -5.2 | 24.8 | -30.0 | None |
| 3 | 196.904k | 59.3 | +9.9 | +0.1 | +0.1 | -80.0 | +0.0 | -10.6 | 21.7 | -32.3 | None |

| | | | | | | | | | | | |
|---|----------|------|-------|------|------|-------|------|-------|------|-------|------|
| 4 | 258.810k | 54.8 | +10.0 | +0.1 | +0.1 | -80.0 | +0.0 | -15.0 | 19.3 | -34.3 | None |
| 5 | 320.270k | 51.9 | +10.1 | +0.1 | +0.1 | -80.0 | +0.0 | -17.8 | 17.5 | -35.3 | None |
| 6 | 378.300k | 46.0 | +10.0 | +0.1 | +0.1 | -80.0 | +0.0 | -23.8 | 16.0 | -39.8 | None |

Test Location: CKC Laboratories, Inc. • 110 N. Olinda Place • Brea, CA 92823 • (714) 993-6112

Customer: **Motorola BCS**
 Specification: **FCC 15.247(c)**
 Work Order #: **79346** Date: 08/15/2002
 Test Type: **Maximized emission** Time: 14:24:57
 Equipment: **Cable Modem** Sequence#: 8
 Manufacturer: Motorola BCS Tested By: Stuart Yamamoto
 Model: SBG 1000 P5
 S/N: 00080ED2F1E0

Equipment Under Test (* = EUT):

| Function | Manufacturer | Model # | S/N |
|--------------|--------------|-------------|--------------|
| Cable Modem* | Motorola BCS | SBG 1000 P5 | 00080ED2F1E0 |

Support Devices:

| Function | Manufacturer | Model # | S/N |
|------------------|---------------------|------------|---------------|
| C6U Converter | General Instruments | C6U | J5M7000101358 |
| Hub | Bay Networks | DS104 | DS14H08355155 |
| Computer | Toshiba | PA1215UV | 04694236 |
| Computer | Dolch | L-PAC 585 | DCS2016538 |
| Thermal Printer | SII | DPU-414 | 1033083A |
| Mouse | Gateway | MOSXX | |
| Keyboard | Dell | SK-1000RS | M940111179 |
| Monitor | NEC | JC-1538VMA | 5900265EA |
| Computer | Gateway | G6-366C | 0013168086 |
| Parallel Printer | Epson | P156A | CMR1545596 |
| Head End | Cisco | uBR-MC11C | CN1ISS0AA |

Test Conditions / Notes:

The EUT is a cable modem. The EUT's USB and one of its ethernet ports is connected to a desktop computer via shielded cable. The other four ethernet ports are connected in loopback with shielded cables. Connected to the parallel port of the EUT is a thermal printer. The HPNA ports have unshielded terminated cables connected. The "F" connector port is connected to the remotely located support equipment. The desktop computer and one laptop computer are running hyperterminal and are pinging the ethernet through MS DOS. The Dolch computer is running the TFTP32 program. The EUT is transmitting on Channel 11. Temperature: 23°C, Humidity: 52%, Pressure: 100kPa. Voltage to EUT is 120 Vac 60Hz. Data sheet represents emissions from the frequency range of 0.009 to 30.0 MHz.

Transducer Legend:

| | |
|-----------------------------|------------------------------|
| T1=6502 Active Loop Antenna | T2=Cable #10 070803 |
| T3=Cable #15 120602 | T4=15.31 40dB/Dec Correction |

Measurement Data: Reading listed by margin. Test Distance: 3 Meters

| # | Freq MHz | Rdng dBµV | T1 dB | T2 dB | T3 dB | T4 dB | Dist Table | Corr dBµV/m | Spec dBµV/m | Margin dB | Polar Ant |
|---|-------------|--------------|----------|----------|----------|----------|---------------|----------------|----------------|--------------|--------------|
| 1 | 76.820k | 72.3 | +10.5 | +0.1 | +0.1 | -80.0 | +0.0 | 3.0 | 29.9 | -26.9 | None |
| 2 | 137.250k | 64.8 | +10.1 | +0.1 | +0.1 | -80.0 | +0.0 | -4.9 | 24.8 | -29.7 | None |
| 3 | 196.220k | 58.8 | +9.9 | +0.1 | +0.1 | -80.0 | +0.0 | -11.1 | 21.7 | -32.8 | None |

| | | | | | | | | | | | |
|---|----------|------|-------|------|------|-------|------|-------|------|-------|------|
| 4 | 260.870k | 54.3 | +10.0 | +0.1 | +0.1 | -80.0 | +0.0 | -15.5 | 19.3 | -34.8 | None |
| 5 | 318.980k | 50.9 | +10.1 | +0.1 | +0.1 | -80.0 | +0.0 | -18.8 | 17.5 | -36.3 | None |
| 6 | 375.948k | 45.7 | +10.0 | +0.1 | +0.1 | -80.0 | +0.0 | -24.1 | 16.1 | -40.2 | None |

Test Location: CKC Laboratories, Inc. • 110 N. Olinda Place • Brea, CA 92823 • (714) 993-6112

Customer: **Motorola BCS**
 Specification: **FCC 15.247(c)**
 Work Order #: **79346** Date: 08/07/2002
 Test Type: **Maximized emission** Time: 14:05:32
 Equipment: **Cable Modem** Sequence#: 1
 Manufacturer: Motorola BCS Tested By: Stuart Yamamoto
 Model: SBG 1000 P5
 S/N: 00080ED2F1E0

Equipment Under Test (* = EUT):

| Function | Manufacturer | Model # | S/N |
|--------------|--------------|-------------|--------------|
| Cable Modem* | Motorola BCS | SBG 1000 P5 | 00080ED2F1E0 |

Support Devices:

| Function | Manufacturer | Model # | S/N |
|------------------|---------------------|------------|---------------|
| C6U Converter | General Instruments | C6U | J5M7000101358 |
| Hub | Bay Networks | DS104 | DS14H08355155 |
| Computer | Toshiba | PA1215UV | 04694236 |
| Computer | Dolch | L-PAC 585 | DCS2016538 |
| Thermal Printer | SII | DPU-414 | 1033083A |
| Mouse | Gateway | MOSXX | |
| Keyboard | Dell | SK-1000RS | M940111179 |
| Monitor | NEC | JC-1538VMA | 5900265EA |
| Computer | Gateway | G6-366C | 0013168086 |
| Parallel Printer | Epson | P156A | CMR1545596 |
| Head End | Cisco | uBR-MC11C | CN1ISS0AA |

Test Conditions / Notes:

The EUT is a cable modem. The EUT's USB and one of its ethernet ports is connected to a desktop computer via shielded cable. The other four ethernet ports are connected in loopback with shielded cables. Connected to the parallel port of the EUT is a thermal printer. The HPNA ports have unshielded terminated cables connected. The "F" connector port is connected to the remotely located support equipment. The desktop computer and one laptop computer are running hyperterminal and are pinging the ethernet through MS DOS. The Dolch computer is running the TFTP32 program. The EUT is transmitting on Channel 1. Temperature: 25°C, Humidity: 46%, Pressure: 100kPa. Voltage to EUT is 120 Vac 60Hz. Data sheet represents emissions from the frequency range of 30.0 to 1000.0 MHz.

Transducer Legend:

| | |
|------------------------|---------------------|
| T1=Bicon 092401 | T2=Log 331 092401 |
| T3=Preamp 8447D 090501 | T4=Cable #10 070803 |
| T5=Cable #15 120602 | |

Measurement Data:

Reading listed by margin.

Test Distance: 3 Meters

| # | Freq | Rdng | T1 | T2 | T3 | T4 | Dist | Corr | Spec | Margin | Polar |
|---|---------|------|-------|------|-------|------|-------|--------|--------|--------|-------|
| | MHz | dBµV | T5 | dB | dB | dB | Table | dBµV/m | dBµV/m | dB | Ant |
| 1 | 48.047M | 52.2 | +11.5 | +0.0 | -28.3 | +0.1 | +0.0 | 36.7 | 40.0 | -3.3 | Vert |
| | QP | | +1.2 | | | | | | | | |
| ^ | 48.056M | 52.7 | +11.5 | +0.0 | -28.3 | +0.1 | +0.0 | 37.2 | 40.0 | -2.8 | Vert |
| | | | +1.2 | | | | | | | | |

| | | | | | | | | | | | |
|----|----------------|------|---------------|-------|-------|------|------|------|------|------|-------|
| 3 | 82.531M QP | 55.6 | +7.4 +1.6 | +0.0 | -28.2 | +0.1 | +0.0 | 36.5 | 40.0 | -3.5 | Horiz |
| ^ | 82.538M | 57.9 | +7.4 +1.6 | +0.0 | -28.2 | +0.1 | +0.0 | 38.8 | 40.0 | -1.2 | Horiz |
| 5 | 37.534M QP | 47.5 | +15.4 +1.1 | +0.0 | -28.4 | +0.1 | +0.0 | 35.7 | 40.0 | -4.3 | Horiz |
| ^ | 37.514M | 48.3 | +15.4 +1.1 | +0.0 | -28.4 | +0.1 | +0.0 | 36.5 | 40.0 | -3.5 | Horiz |
| 7 | 640.046M QP | 43.2 | +0.0 +5.1 | +20.5 | -27.9 | +0.4 | +0.0 | 41.3 | 46.0 | -4.7 | Horiz |
| ^ | 640.056M | 44.1 | +0.0 +5.1 | +20.5 | -27.9 | +0.4 | +0.0 | 42.2 | 46.0 | -3.8 | Horiz |
| 9 | 37.013M QP | 46.9 | +15.4 +1.1 | +0.0 | -28.4 | +0.1 | +0.0 | 35.1 | 40.0 | -4.9 | Vert |
| ^ | 37.094M | 48.6 | +15.5 +1.1 | +0.0 | -28.4 | +0.1 | +0.0 | 36.9 | 40.0 | -3.1 | Vert |
| 11 | 200.559M QP | 46.8 | +16.8 +2.6 | +0.0 | -28.4 | +0.2 | +0.0 | 38.0 | 43.5 | -5.5 | Vert |
| ^ | 200.551M | 47.8 | +16.8 +2.6 | +0.0 | -28.4 | +0.2 | +0.0 | 39.0 | 43.5 | -4.5 | Vert |
| 13 | 768.063M | 39.7 | +0.0 +5.6 | +21.9 | -27.8 | +0.4 | +0.0 | 39.8 | 46.0 | -6.2 | Vert |
| 14 | 320.031M | 43.4 | +0.0 +3.4 | +20.9 | -28.3 | +0.3 | +0.0 | 39.7 | 46.0 | -6.3 | Horiz |
| 15 | 640.071M QP | 41.6 | +0.0 +5.1 | +20.5 | -27.9 | +0.4 | +0.0 | 39.7 | 46.0 | -6.3 | Vert |
| ^ | 640.067M | 43.4 | +0.0 +5.1 | +20.5 | -27.9 | +0.4 | +0.0 | 41.5 | 46.0 | -4.5 | Vert |
| 17 | 390.034M QP | 47.8 | +0.0 +3.7 | +16.1 | -28.3 | +0.3 | +0.0 | 39.6 | 46.0 | -6.4 | Vert |
| ^ | 390.028M | 48.3 | +0.0 +3.7 | +16.1 | -28.3 | +0.3 | +0.0 | 40.1 | 46.0 | -5.9 | Vert |
| 19 | 390.039M | 47.6 | +0.0 +3.7 | +16.1 | -28.3 | +0.3 | +0.0 | 39.4 | 46.0 | -6.6 | Horiz |
| 20 | 112.550M | 49.0 | +14.0 +1.9 | +0.0 | -28.4 | +0.2 | +0.0 | 36.7 | 43.5 | -6.8 | Vert |
| 21 | 256.028M | 45.7 | +18.4 +2.9 | +0.0 | -28.2 | +0.3 | +0.0 | 39.1 | 46.0 | -6.9 | Horiz |
| 22 | 46.743M QP | 48.1 | +12.0 +1.2 | +0.0 | -28.3 | +0.1 | +0.0 | 33.1 | 40.0 | -6.9 | Vert |
| ^ | 46.758M | 51.9 | +12.0 +1.2 | +0.0 | -28.3 | +0.1 | +0.0 | 36.9 | 40.0 | -3.1 | Vert |
| 24 | 77.805M | 52.8 | +6.8 +1.6 | +0.0 | -28.3 | +0.1 | +0.0 | 33.0 | 40.0 | -7.0 | Horiz |
| 25 | 76.296M | 52.7 | +6.8 +1.6 | +0.0 | -28.3 | +0.1 | +0.0 | 32.9 | 40.0 | -7.1 | Horiz |
| 26 | 768.070M QP | 38.8 | +0.0 +5.6 | +21.9 | -27.8 | +0.4 | +0.0 | 38.9 | 46.0 | -7.1 | Horiz |
| ^ | 768.084M | 40.2 | +0.0 +5.6 | +21.9 | -27.8 | +0.4 | +0.0 | 40.3 | 46.0 | -5.7 | Horiz |

| | | | | | | | | | | | |
|----|----------------|------|---------------|-------|-------|------|------|------|------|------|-------|
| 28 | 350.043M QP | 44.5 | +0.0 +3.5 | +18.7 | -28.2 | +0.3 | +0.0 | 38.8 | 46.0 | -7.2 | Horiz |
| ^ | 350.045M | 46.7 | +0.0 +3.5 | +18.7 | -28.2 | +0.3 | +0.0 | 41.0 | 46.0 | -5.0 | Horiz |
| 30 | 300.047M | 40.9 | +0.0 +3.3 | +22.5 | -28.3 | +0.3 | +0.0 | 38.7 | 46.0 | -7.3 | Horiz |
| 31 | 350.070M | 44.3 | +0.0 +3.5 | +18.7 | -28.2 | +0.3 | +0.0 | 38.6 | 46.0 | -7.4 | Vert |
| 32 | 96.102M | 51.9 | +10.6 +1.7 | +0.0 | -28.3 | +0.1 | +0.0 | 36.0 | 43.5 | -7.5 | Vert |
| 33 | 800.063M QP | 38.4 | +0.0 +5.7 | +21.5 | -27.6 | +0.5 | +0.0 | 38.5 | 46.0 | -7.5 | Horiz |
| ^ | 800.063M | 40.1 | +0.0 +5.7 | +21.5 | -27.6 | +0.5 | +0.0 | 40.2 | 46.0 | -5.8 | Horiz |
| 35 | 464.154M | 46.1 | +0.0 +4.1 | +16.4 | -28.6 | +0.4 | +0.0 | 38.4 | 46.0 | -7.6 | Horiz |
| 36 | 200.531M | 44.7 | +16.8 +2.6 | +0.0 | -28.4 | +0.2 | +0.0 | 35.9 | 43.5 | -7.6 | Horiz |
| 37 | 70.805M | 52.1 | +6.9 +1.5 | +0.0 | -28.6 | +0.1 | +0.0 | 32.0 | 40.0 | -8.0 | Vert |
| 38 | 400.067M QP | 46.7 | +0.0 +3.8 | +15.5 | -28.3 | +0.3 | +0.0 | 38.0 | 46.0 | -8.0 | Horiz |
| ^ | 400.062M | 49.7 | +0.0 +3.8 | +15.5 | -28.3 | +0.3 | +0.0 | 41.0 | 46.0 | -5.0 | Horiz |
| 40 | 320.042M | 41.7 | +0.0 +3.4 | +20.9 | -28.3 | +0.3 | +0.0 | 38.0 | 46.0 | -8.0 | Vert |
| 41 | 331.858M | 42.4 | +0.0 +3.4 | +20.0 | -28.2 | +0.3 | +0.0 | 37.9 | 46.0 | -8.1 | Horiz |
| 42 | 550.075M | 43.4 | +0.0 +4.6 | +17.9 | -28.6 | +0.4 | +0.0 | 37.7 | 46.0 | -8.3 | Vert |
| 43 | 329.370M | 42.0 | +0.0 +3.4 | +20.2 | -28.2 | +0.3 | +0.0 | 37.7 | 46.0 | -8.3 | Horiz |
| 44 | 512.035M | 44.1 | +0.0 +4.4 | +17.2 | -28.5 | +0.4 | +0.0 | 37.6 | 46.0 | -8.4 | Vert |
| 45 | 100.032M | 49.9 | +11.5 +1.8 | +0.0 | -28.4 | +0.1 | +0.0 | 34.9 | 43.5 | -8.6 | Horiz |
| 46 | 800.068M | 37.2 | +0.0 +5.7 | +21.5 | -27.6 | +0.5 | +0.0 | 37.3 | 46.0 | -8.7 | Vert |
| 47 | 665.313M | 38.2 | +0.0 +5.1 | +21.4 | -27.9 | +0.4 | +0.0 | 37.2 | 46.0 | -8.8 | Vert |
| 48 | 449.200M | 45.3 | +0.0 +4.0 | +16.2 | -28.7 | +0.4 | +0.0 | 37.2 | 46.0 | -8.8 | Vert |
| 49 | 760.288M | 37.1 | +0.0 +5.5 | +22.0 | -27.8 | +0.4 | +0.0 | 37.2 | 46.0 | -8.8 | Horiz |
| 50 | 61.281M QP | 50.4 | +7.9 +1.3 | +0.0 | -28.6 | +0.1 | +0.0 | 31.1 | 40.0 | -8.9 | Vert |
| ^ | 61.268M | 54.6 | +7.9 +1.3 | +0.0 | -28.6 | +0.1 | +0.0 | 35.3 | 40.0 | -4.7 | Vert |

| | | | | | | | | | | | |
|----|----------------|------|---------------|-------|-------|------|------|------|------|-------|-------|
| 52 | 600.031M QP | 41.0 | +0.0 +4.9 | +18.9 | -28.1 | +0.4 | +0.0 | 37.1 | 46.0 | -8.9 | Horiz |
| ^ | 600.054M | 44.4 | +0.0 +4.9 | +18.9 | -28.1 | +0.4 | +0.0 | 40.5 | 46.0 | -5.5 | Horiz |
| 54 | 600.039M | 40.8 | +0.0 +4.9 | +18.9 | -28.1 | +0.4 | +0.0 | 36.9 | 46.0 | -9.1 | Vert |
| 55 | 61.600M | 50.2 | +7.9 +1.3 | +0.0 | -28.6 | +0.1 | +0.0 | 30.9 | 40.0 | -9.1 | Horiz |
| 56 | 500.055M | 43.6 | +0.0 +4.4 | +16.9 | -28.5 | +0.4 | +0.0 | 36.8 | 46.0 | -9.2 | Horiz |
| 57 | 80.907M | 50.2 | +7.0 +1.6 | +0.0 | -28.2 | +0.1 | +0.0 | 30.7 | 40.0 | -9.3 | Vert |
| 58 | 449.174M | 44.7 | +0.0 +4.0 | +16.2 | -28.7 | +0.4 | +0.0 | 36.6 | 46.0 | -9.4 | Horiz |
| 59 | 200.074M | 42.9 | +16.8 +2.6 | +0.0 | -28.4 | +0.2 | +0.0 | 34.1 | 43.5 | -9.4 | Horiz |
| 60 | 358.015M | 42.5 | +0.0 +3.6 | +18.2 | -28.2 | +0.3 | +0.0 | 36.4 | 46.0 | -9.6 | Horiz |
| 61 | 358.022M | 42.5 | +0.0 +3.6 | +18.2 | -28.2 | +0.3 | +0.0 | 36.4 | 46.0 | -9.6 | Horiz |
| 62 | 315.068M | 39.4 | +0.0 +3.4 | +21.3 | -28.3 | +0.3 | +0.0 | 36.1 | 46.0 | -9.9 | Vert |
| 63 | 105.026M | 47.6 | +12.5 +1.8 | +0.0 | -28.4 | +0.1 | +0.0 | 33.6 | 43.5 | -9.9 | Vert |
| 64 | 200.077M | 42.3 | +16.8 +2.6 | +0.0 | -28.4 | +0.2 | +0.0 | 33.5 | 43.5 | -10.0 | Vert |
| 65 | 331.858M | 40.1 | +0.0 +3.4 | +20.0 | -28.2 | +0.3 | +0.0 | 35.6 | 46.0 | -10.4 | Vert |
| 66 | 400.046M | 44.3 | +0.0 +3.8 | +15.5 | -28.3 | +0.3 | +0.0 | 35.6 | 46.0 | -10.4 | Vert |
| 67 | 402.842M | 44.2 | +0.0 +3.8 | +15.5 | -28.3 | +0.3 | +0.0 | 35.5 | 46.0 | -10.5 | Vert |
| 68 | 512.076M | 41.9 | +0.0 +4.5 | +17.2 | -28.5 | +0.4 | +0.0 | 35.5 | 46.0 | -10.5 | Horiz |
| 69 | 450.070M | 43.6 | +0.0 +4.0 | +16.2 | -28.7 | +0.4 | +0.0 | 35.5 | 46.0 | -10.5 | Horiz |
| 70 | 272.114M | 40.3 | +19.8 +3.1 | +0.0 | -28.3 | +0.3 | +0.0 | 35.2 | 46.0 | -10.8 | Horiz |
| 71 | 99.998M | 47.7 | +11.5 +1.8 | +0.0 | -28.4 | +0.1 | +0.0 | 32.7 | 43.5 | -10.8 | Vert |
| 72 | 105.027M | 46.3 | +12.5 +1.8 | +0.0 | -28.4 | +0.1 | +0.0 | 32.3 | 43.5 | -11.2 | Horiz |
| 73 | 500.039M | 41.5 | +0.0 +4.4 | +16.9 | -28.5 | +0.4 | +0.0 | 34.7 | 46.0 | -11.3 | Vert |
| 74 | 597.750M | 38.5 | +0.0 +4.9 | +18.9 | -28.1 | +0.4 | +0.0 | 34.6 | 46.0 | -11.4 | Horiz |
| 75 | 665.279M | 35.5 | +0.0 +5.1 | +21.4 | -27.9 | +0.4 | +0.0 | 34.5 | 46.0 | -11.5 | Horiz |
| 76 | 463.967M | 42.1 | +0.0 +4.1 | +16.4 | -28.6 | +0.4 | +0.0 | 34.4 | 46.0 | -11.6 | Vert |

| | | | | | | | | | | | |
|----|----------|------|--------------|-------|-------|------|------|------|------|-------|-------|
| 77 | 329.392M | 38.6 | +0.0 +3.4 | +20.2 | -28.2 | +0.3 | +0.0 | 34.3 | 46.0 | -11.7 | Vert |
| 78 | 528.670M | 40.3 | +0.0 +4.5 | +17.5 | -28.6 | +0.4 | +0.0 | 34.1 | 46.0 | -11.9 | Horiz |
| 79 | 384.059M | 41.8 | +0.0 +3.7 | +16.5 | -28.3 | +0.3 | +0.0 | 34.0 | 46.0 | -12.0 | Vert |
| 80 | 384.055M | 41.6 | +0.0 +3.7 | +16.5 | -28.3 | +0.3 | +0.0 | 33.8 | 46.0 | -12.2 | Horiz |
| 81 | 357.973M | 36.6 | +0.0 +3.6 | +18.2 | -28.2 | +0.3 | +0.0 | 30.5 | 46.0 | -15.5 | Vert |

Test Location: CKC Laboratories, Inc. • 110 N. Olinda Place • Brea, CA 92823 • (714) 993-6112

Customer: **Motorola BCS**
 Specification: **FCC 15.247(c)**
 Work Order #: **79346** Date: 08/15/2002
 Test Type: **Maximized emission** Time: 11:26:28
 Equipment: **Cable Modem** Sequence#: 6
 Manufacturer: Motorola BCS Tested By: Stuart Yamamoto
 Model: SBG 1000 P5
 S/N: 00080ED2F1E0

Equipment Under Test (* = EUT):

| Function | Manufacturer | Model # | S/N |
|--------------|--------------|-------------|--------------|
| Cable Modem* | Motorola BCS | SBG 1000 P5 | 00080ED2F1E0 |

Support Devices:

| Function | Manufacturer | Model # | S/N |
|------------------|---------------------|------------|---------------|
| C6U Converter | General Instruments | C6U | J5M7000101358 |
| Hub | Bay Networks | DS104 | DS14H08355155 |
| Computer | Toshiba | PA1215UV | 04694236 |
| Computer | Dolch | L-PAC 585 | DCS2016538 |
| Thermal Printer | SII | DPU-414 | 1033083A |
| Mouse | Gateway | MOSXX | |
| Keyboard | Dell | SK-1000RS | M940111179 |
| Monitor | NEC | JC-1538VMA | 5900265EA |
| Computer | Gateway | G6-366C | 0013168086 |
| Parallel Printer | Epson | P156A | CMR1545596 |
| Head End | Cisco | uBR-MC11C | CN1ISS0AA |

Test Conditions / Notes:

The EUT is a cable modem. The EUT's USB and one of its ethernet ports is connected to a desktop computer via shielded cable. The other four ethernet ports are connected in loopback with shielded cables. Connected to the parallel port of the EUT is a thermal printer. The HPNA ports have unshielded terminated cables connected. The "F" connector port is connected to the remotely located support equipment. The desktop computer and one laptop computer are running hyperterminal and are pinging the ethernet through MS DOS. The Dolch computer is running the TFTP32 program. The EUT is transmitting on Channel 6. Temperature: 23°C, Humidity: 54%, Pressure: 100kPa. Voltage to EUT is 120 Vac 60Hz. Data sheet represents emissions from the frequency range of 30.0 to 1000.0 MHz.

Transducer Legend:

| | |
|------------------------|---------------------|
| T1=Bicon 092401 | T2=Log 331 092401 |
| T3=Preamp 8447D 090501 | T4=Cable #10 070803 |
| T5=Cable #15 120602 | |

Measurement Data:

Reading listed by margin.

Test Distance: 3 Meters

| # | Freq MHz | Rdng dBµV | Reading listed by margin. | | | | Dist Table | Corr dBµV/m | Spec dBµV/m | Margin dB | Polar Ant |
|---|-------------|--------------|---------------------------|----------|----------|----------|---------------|----------------|----------------|--------------|--------------|
| | | | T1 dB | T2 dB | T3 dB | T4 dB | | | | | |
| 1 | 48.076M | 52.9 | +11.5 | +0.0 | -28.3 | +0.1 | +0.0 | 37.4 | 40.0 | -2.6 | Vert |
| | QP | | +1.2 | | | | | | | | |
| ^ | 48.084M | 54.1 | +11.5 | +0.0 | -28.3 | +0.1 | +0.0 | 38.6 | 40.0 | -1.4 | Vert |
| | | | +1.2 | | | | | | | | |

| | | | | | | | | | | | |
|----|----------------|------|---------------|-------|-------|------|------|------|------|------|-------|
| 3 | 640.062M QP | 44.4 | +0.0 +5.1 | +20.5 | -27.9 | +0.4 | +0.0 | 42.5 | 46.0 | -3.5 | Horiz |
| ^ | 640.078M | 44.5 | +0.0 +5.1 | +20.5 | -27.9 | +0.4 | +0.0 | 42.6 | 46.0 | -3.4 | Horiz |
| 5 | 96.000M QP | 54.5 | +10.6 +1.7 | +0.0 | -28.3 | +0.1 | +0.0 | 38.6 | 43.5 | -4.9 | Vert |
| ^ | 95.999M | 54.7 | +10.6 +1.7 | +0.0 | -28.3 | +0.1 | +0.0 | 38.8 | 43.5 | -4.7 | Vert |
| 7 | 37.011M QP | 46.6 | +15.5 +1.1 | +0.0 | -28.4 | +0.1 | +0.0 | 34.9 | 40.0 | -5.1 | Vert |
| ^ | 37.017M | 46.7 | +15.5 +1.1 | +0.0 | -28.4 | +0.1 | +0.0 | 35.0 | 40.0 | -5.0 | Vert |
| 9 | 80.088M QP | 54.6 | +6.8 +1.6 | +0.0 | -28.2 | +0.1 | +0.0 | 34.9 | 40.0 | -5.1 | Vert |
| ^ | 80.080M | 56.6 | +6.8 +1.6 | +0.0 | -28.2 | +0.1 | +0.0 | 36.9 | 40.0 | -3.1 | Vert |
| 11 | 37.442M QP | 45.8 | +15.4 +1.1 | +0.0 | -28.4 | +0.1 | +0.0 | 34.0 | 40.0 | -6.0 | Horiz |
| ^ | 37.447M | 49.7 | +15.4 +1.1 | +0.0 | -28.4 | +0.1 | +0.0 | 37.9 | 40.0 | -2.1 | Horiz |
| 13 | 768.096M | 39.8 | +0.0 +5.6 | +21.9 | -27.8 | +0.4 | +0.0 | 39.9 | 46.0 | -6.1 | Horiz |
| 14 | 300.077M | 42.0 | +0.0 +3.3 | +22.5 | -28.3 | +0.3 | +0.0 | 39.8 | 46.0 | -6.2 | Horiz |
| 15 | 640.111M | 41.6 | +0.0 +5.1 | +20.5 | -27.9 | +0.4 | +0.0 | 39.7 | 46.0 | -6.3 | Vert |
| 16 | 350.097M | 45.4 | +0.0 +3.5 | +18.7 | -28.2 | +0.3 | +0.0 | 39.7 | 46.0 | -6.3 | Vert |
| 17 | 112.580M | 49.5 | +14.0 +1.9 | +0.0 | -28.4 | +0.2 | +0.0 | 37.2 | 43.5 | -6.3 | Vert |
| 18 | 256.070M | 46.1 | +18.4 +3.0 | +0.0 | -28.2 | +0.3 | +0.0 | 39.6 | 46.0 | -6.4 | Horiz |
| 19 | 600.059M QP | 43.4 | +0.0 +4.9 | +18.9 | -28.1 | +0.4 | +0.0 | 39.5 | 46.0 | -6.5 | Horiz |
| ^ | 600.078M | 46.3 | +0.0 +4.9 | +18.9 | -28.1 | +0.4 | +0.0 | 42.4 | 46.0 | -3.6 | Horiz |
| 21 | 400.078M QP | 48.2 | +0.0 +3.8 | +15.5 | -28.3 | +0.3 | +0.0 | 39.5 | 46.0 | -6.5 | Horiz |
| ^ | 400.082M | 50.3 | +0.0 +3.8 | +15.5 | -28.3 | +0.3 | +0.0 | 41.6 | 46.0 | -4.4 | Horiz |
| 23 | 331.876M | 43.9 | +0.0 +3.4 | +20.0 | -28.2 | +0.3 | +0.0 | 39.4 | 46.0 | -6.6 | Horiz |
| 24 | 46.804M QP | 48.3 | +12.0 +1.2 | +0.0 | -28.3 | +0.1 | +0.0 | 33.3 | 40.0 | -6.7 | Vert |
| ^ | 46.804M | 52.1 | +12.0 +1.2 | +0.0 | -28.3 | +0.1 | +0.0 | 37.1 | 40.0 | -2.9 | Vert |
| 26 | 665.346M | 40.1 | +0.0 +5.1 | +21.4 | -27.9 | +0.4 | +0.0 | 39.1 | 46.0 | -6.9 | Horiz |

| | | | | | | | | | | | |
|----|----------------|------|---------------|-------|-------|------|------|------|------|------|-------|
| 27 | 62.690M QP | 52.4 | +7.8 +1.4 | +0.0 | -28.6 | +0.1 | +0.0 | 33.1 | 40.0 | -6.9 | Vert |
| ^ | 62.690M | 56.5 | +7.8 +1.4 | +0.0 | -28.6 | +0.1 | +0.0 | 37.2 | 40.0 | -2.8 | Vert |
| 29 | 760.341M | 38.8 | +0.0 +5.5 | +22.0 | -27.8 | +0.4 | +0.0 | 38.9 | 46.0 | -7.1 | Horiz |
| 30 | 320.071M QP | 42.6 | +0.0 +3.4 | +20.9 | -28.3 | +0.3 | +0.0 | 38.9 | 46.0 | -7.1 | Horiz |
| ^ | 320.079M | 44.2 | +0.0 +3.4 | +20.9 | -28.3 | +0.3 | +0.0 | 40.5 | 46.0 | -5.5 | Horiz |
| 32 | 768.084M | 38.7 | +0.0 +5.6 | +21.9 | -27.8 | +0.4 | +0.0 | 38.8 | 46.0 | -7.2 | Vert |
| 33 | 350.069M QP | 44.5 | +0.0 +3.5 | +18.7 | -28.2 | +0.3 | +0.0 | 38.8 | 46.0 | -7.2 | Horiz |
| ^ | 350.065M | 46.9 | +0.0 +3.5 | +18.7 | -28.2 | +0.3 | +0.0 | 41.2 | 46.0 | -4.8 | Horiz |
| 35 | 331.906M | 43.2 | +0.0 +3.4 | +20.0 | -28.2 | +0.3 | +0.0 | 38.7 | 46.0 | -7.3 | Vert |
| 36 | 329.355M | 43.0 | +0.0 +3.4 | +20.2 | -28.2 | +0.3 | +0.0 | 38.7 | 46.0 | -7.3 | Horiz |
| 37 | 80.952M QP | 52.1 | +7.0 +1.6 | +0.0 | -28.2 | +0.1 | +0.0 | 32.6 | 40.0 | -7.4 | Vert |
| ^ | 80.937M | 56.3 | +7.0 +1.6 | +0.0 | -28.2 | +0.1 | +0.0 | 36.8 | 40.0 | -3.2 | Vert |
| 39 | 320.089M | 41.7 | +0.0 +3.4 | +20.9 | -28.3 | +0.3 | +0.0 | 38.0 | 46.0 | -8.0 | Vert |
| 40 | 665.303M | 38.9 | +0.0 +5.1 | +21.4 | -27.9 | +0.4 | +0.0 | 37.9 | 46.0 | -8.1 | Vert |
| 41 | 400.063M | 46.6 | +0.0 +3.8 | +15.5 | -28.3 | +0.3 | +0.0 | 37.9 | 46.0 | -8.1 | Vert |
| 42 | 77.841M | 51.7 | +6.8 +1.6 | +0.0 | -28.3 | +0.1 | +0.0 | 31.9 | 40.0 | -8.1 | Horiz |
| 43 | 512.062M | 44.2 | +0.0 +4.5 | +17.2 | -28.5 | +0.4 | +0.0 | 37.8 | 46.0 | -8.2 | Vert |
| 44 | 800.066M QP | 37.6 | +0.0 +5.7 | +21.5 | -27.6 | +0.5 | +0.0 | 37.7 | 46.0 | -8.3 | Horiz |
| ^ | 800.095M | 40.1 | +0.0 +5.7 | +21.5 | -27.6 | +0.5 | +0.0 | 40.2 | 46.0 | -5.8 | Horiz |
| 46 | 61.602M | 51.0 | +7.9 +1.3 | +0.0 | -28.6 | +0.1 | +0.0 | 31.7 | 40.0 | -8.3 | Horiz |
| 47 | 76.296M | 51.5 | +6.8 +1.6 | +0.0 | -28.3 | +0.1 | +0.0 | 31.7 | 40.0 | -8.3 | Horiz |
| 48 | 200.086M | 43.8 | +16.8 +2.6 | +0.0 | -28.4 | +0.2 | +0.0 | 35.0 | 43.5 | -8.5 | Vert |
| 49 | 800.056M | 37.2 | +0.0 +5.7 | +21.5 | -27.6 | +0.5 | +0.0 | 37.3 | 46.0 | -8.7 | Vert |
| 50 | 200.085M | 43.6 | +16.8 +2.6 | +0.0 | -28.4 | +0.2 | +0.0 | 34.8 | 43.5 | -8.7 | Horiz |
| 51 | 100.097M | 49.5 | +11.5 +1.8 | +0.0 | -28.4 | +0.1 | +0.0 | 34.5 | 43.5 | -9.0 | Horiz |

| | | | | | | | | | | | |
|----|---------------|------|---------------|-------|-------|------|------|------|------|-------|-------|
| 52 | 100.098M | 49.2 | +11.5 +1.8 | +0.0 | -28.4 | +0.1 | +0.0 | 34.2 | 43.5 | -9.3 | Vert |
| 53 | 68.569M QP | 50.2 | +7.1 +1.5 | +0.0 | -28.6 | +0.1 | +0.0 | 30.3 | 40.0 | -9.7 | Vert |
| ^ | 68.569M | 54.8 | +7.1 +1.5 | +0.0 | -28.6 | +0.1 | +0.0 | 34.9 | 40.0 | -5.1 | Vert |
| 55 | 464.831M | 43.6 | +0.0 +4.1 | +16.4 | -28.6 | +0.4 | +0.0 | 35.9 | 46.0 | -10.1 | Horiz |
| 56 | 200.516M | 41.7 | +16.8 +2.6 | +0.0 | -28.4 | +0.2 | +0.0 | 32.9 | 43.5 | -10.6 | Horiz |

Test Location: CKC Laboratories, Inc. • 110 N. Olinda Place • Brea, CA 92823 • (714) 993-6112

Customer: **Motorola BCS**
 Specification: **FCC 15.247(c)**
 Work Order #: **79346** Date: 08/15/2002
 Test Type: **Maximized emission** Time: 14:03:58
 Equipment: **Cable Modem** Sequence#: 7
 Manufacturer: Motorola BCS Tested By: Stuart Yamamoto
 Model: SBG 1000 P5
 S/N: 00080ED2F1E0

Equipment Under Test (* = EUT):

| Function | Manufacturer | Model # | S/N |
|--------------|--------------|-------------|--------------|
| Cable Modem* | Motorola BCS | SBG 1000 P5 | 00080ED2F1E0 |

Support Devices:

| Function | Manufacturer | Model # | S/N |
|------------------|---------------------|------------|---------------|
| C6U Converter | General Instruments | C6U | J5M7000101358 |
| Hub | Bay Networks | DS104 | DS14H08355155 |
| Computer | Toshiba | PA1215UV | 04694236 |
| Computer | Dolch | L-PAC 585 | DCS2016538 |
| Thermal Printer | SII | DPU-414 | 1033083A |
| Mouse | Gateway | MOSXX | |
| Keyboard | Dell | SK-1000RS | M940111179 |
| Monitor | NEC | JC-1538VMA | 5900265EA |
| Computer | Gateway | G6-366C | 0013168086 |
| Parallel Printer | Epson | P156A | CMR1545596 |
| Head End | Cisco | uBR-MC11C | CN1ISS0AA |

Test Conditions / Notes:

The EUT is a cable modem. The EUT's USB and one of its ethernet ports is connected to a desktop computer via shielded cable. The other four ethernet ports are connected in loopback with shielded cables. Connected to the parallel port of the EUT is a thermal printer. The HPNA ports have unshielded terminated cables connected. The "F" connector port is connected to the remotely located support equipment. The desktop computer and one laptop computer are running hyperterminal and are pinging the ethernet through MS DOS. The Dolch computer is running the TFTP32 program. The EUT is transmitting on Channel 11. Temperature: 25°C, Humidity: 46%, Pressure: 100kPa. Voltage to EUT is 120 Vac 60Hz. Data sheet represents emissions from the frequency range of 30.0 to 1000.0 MHz.

Transducer Legend:

| | |
|------------------------|---------------------|
| T1=Bicon 092401 | T2=Log 331 092401 |
| T3=Preamp 8447D 090501 | T4=Cable #10 070803 |
| T5=Cable #15 120602 | |

Measurement Data:

Reading listed by margin.

Test Distance: 3 Meters

| # | Freq | Rdng | T1 | T2 | T3 | T4 | Dist | Corr | Spec | Margin | Polar |
|---|---------|------|-------|------|-------|------|-------|--------|--------|--------|-------|
| | MHz | dBµV | T5 | dB | dB | dB | Table | dBµV/m | dBµV/m | dB | Ant |
| 1 | 48.101M | 53.1 | +11.5 | +0.0 | -28.3 | +0.1 | +0.0 | 37.6 | 40.0 | -2.4 | Vert |
| | QP | | +1.2 | | | | | | | | |
| ^ | 48.101M | 54.6 | +11.5 | +0.0 | -28.3 | +0.1 | +0.0 | 39.1 | 40.0 | -0.9 | Vert |
| | | | +1.2 | | | | | | | | |

| | | | | | | | | | | | |
|----|----------------|------|---------------|-------|-------|------|------|------|------|------|-------|
| 3 | 640.055M QP | 43.3 | +0.0 +5.1 | +20.5 | -27.9 | +0.4 | +0.0 | 41.4 | 46.0 | -4.6 | Horiz |
| ^ | 640.063M | 44.3 | +0.0 +5.1 | +20.5 | -27.9 | +0.4 | +0.0 | 42.4 | 46.0 | -3.6 | Horiz |
| 5 | 61.308M QP | 54.3 | +7.9 +1.3 | +0.0 | -28.6 | +0.1 | +0.0 | 35.0 | 40.0 | -5.0 | Vert |
| ^ | 61.308M | 55.7 | +7.9 +1.3 | +0.0 | -28.6 | +0.1 | +0.0 | 36.4 | 40.0 | -3.6 | Vert |
| 7 | 37.097M QP | 46.4 | +15.5 +1.1 | +0.0 | -28.4 | +0.1 | +0.0 | 34.7 | 40.0 | -5.3 | Vert |
| ^ | 37.094M | 47.0 | +15.5 +1.1 | +0.0 | -28.4 | +0.1 | +0.0 | 35.3 | 40.0 | -4.7 | Vert |
| 9 | 400.080M QP | 49.4 | +0.0 +3.8 | +15.5 | -28.3 | +0.3 | +0.0 | 40.7 | 46.0 | -5.3 | Horiz |
| ^ | 400.078M | 51.6 | +0.0 +3.8 | +15.5 | -28.3 | +0.3 | +0.0 | 42.9 | 46.0 | -3.1 | Horiz |
| 11 | 100.099M | 52.5 | +11.5 +1.8 | +0.0 | -28.4 | +0.1 | +0.0 | 37.5 | 43.5 | -6.0 | Vert |
| 12 | 350.078M | 45.6 | +0.0 +3.5 | +18.7 | -28.2 | +0.3 | +0.0 | 39.9 | 46.0 | -6.1 | Horiz |
| 13 | 350.087M | 45.6 | +0.0 +3.5 | +18.7 | -28.2 | +0.3 | +0.0 | 39.9 | 46.0 | -6.1 | Vert |
| 14 | 46.766M QP | 48.8 | +12.0 +1.2 | +0.0 | -28.3 | +0.1 | +0.0 | 33.8 | 40.0 | -6.2 | Vert |
| ^ | 46.759M | 50.9 | +12.0 +1.2 | +0.0 | -28.3 | +0.1 | +0.0 | 35.9 | 40.0 | -4.1 | Vert |
| 16 | 80.904M | 53.3 | +7.0 +1.6 | +0.0 | -28.2 | +0.1 | +0.0 | 33.8 | 40.0 | -6.2 | Vert |
| 17 | 768.103M | 39.6 | +0.0 +5.6 | +21.9 | -27.8 | +0.4 | +0.0 | 39.7 | 46.0 | -6.3 | Horiz |
| 18 | 96.000M | 53.0 | +10.6 +1.7 | +0.0 | -28.3 | +0.1 | +0.0 | 37.1 | 43.5 | -6.4 | Vert |
| 19 | 768.106M | 39.4 | +0.0 +5.6 | +21.9 | -27.8 | +0.4 | +0.0 | 39.5 | 46.0 | -6.5 | Vert |
| 20 | 600.059M QP | 43.1 | +0.0 +4.9 | +18.9 | -28.1 | +0.4 | +0.0 | 39.2 | 46.0 | -6.8 | Horiz |
| ^ | 600.054M | 46.2 | +0.0 +4.9 | +18.9 | -28.1 | +0.4 | +0.0 | 42.3 | 46.0 | -3.7 | Horiz |
| 22 | 448.793M | 47.3 | +0.0 +4.0 | +16.2 | -28.7 | +0.4 | +0.0 | 39.2 | 46.0 | -6.8 | Horiz |
| 23 | 37.497M QP | 44.9 | +15.4 +1.1 | +0.0 | -28.4 | +0.1 | +0.0 | 33.1 | 40.0 | -6.9 | Horiz |
| ^ | 37.517M | 50.1 | +15.4 +1.1 | +0.0 | -28.4 | +0.1 | +0.0 | 38.3 | 40.0 | -1.7 | Horiz |
| 25 | 112.561M | 48.8 | +14.0 +1.9 | +0.0 | -28.4 | +0.2 | +0.0 | 36.5 | 43.5 | -7.0 | Vert |
| 26 | 320.084M QP | 42.7 | +0.0 +3.4 | +20.9 | -28.3 | +0.3 | +0.0 | 39.0 | 46.0 | -7.0 | Horiz |
| ^ | 320.093M | 44.8 | +0.0 +3.4 | +20.9 | -28.3 | +0.3 | +0.0 | 41.1 | 46.0 | -4.9 | Horiz |

| | | | | | | | | | | | |
|----|----------------|------|---------------|-------|-------|------|------|------|------|------|-------|
| 28 | 800.056M | 38.7 | +0.0 +5.7 | +21.5 | -27.6 | +0.5 | +0.0 | 38.8 | 46.0 | -7.2 | Horiz |
| 29 | 760.343M | 38.6 | +0.0 +5.5 | +22.0 | -27.8 | +0.4 | +0.0 | 38.7 | 46.0 | -7.3 | Horiz |
| 30 | 665.307M | 39.7 | +0.0 +5.1 | +21.4 | -27.9 | +0.4 | +0.0 | 38.7 | 46.0 | -7.3 | Horiz |
| 31 | 300.100M QP | 40.9 | +0.0 +3.3 | +22.5 | -28.3 | +0.3 | +0.0 | 38.7 | 46.0 | -7.3 | Horiz |
| ^ | 300.099M | 42.8 | +0.0 +3.3 | +22.5 | -28.3 | +0.3 | +0.0 | 40.6 | 46.0 | -5.4 | Horiz |
| 33 | 640.099M QP | 40.4 | +0.0 +5.1 | +20.5 | -27.9 | +0.4 | +0.0 | 38.5 | 46.0 | -7.5 | Vert |
| ^ | 640.100M | 42.5 | +0.0 +5.1 | +20.5 | -27.9 | +0.4 | +0.0 | 40.6 | 46.0 | -5.4 | Vert |
| 35 | 600.068M | 42.4 | +0.0 +4.9 | +18.9 | -28.1 | +0.4 | +0.0 | 38.5 | 46.0 | -7.5 | Vert |
| 36 | 320.071M | 42.2 | +0.0 +3.4 | +20.9 | -28.3 | +0.3 | +0.0 | 38.5 | 46.0 | -7.5 | Vert |
| 37 | 100.102M QP | 50.8 | +11.5 +1.8 | +0.0 | -28.4 | +0.1 | +0.0 | 35.8 | 43.5 | -7.7 | Horiz |
| ^ | 100.106M | 53.7 | +11.5 +1.8 | +0.0 | -28.4 | +0.1 | +0.0 | 38.7 | 43.5 | -4.8 | Horiz |
| 39 | 331.903M QP | 42.8 | +0.0 +3.4 | +20.0 | -28.2 | +0.3 | +0.0 | 38.3 | 46.0 | -7.7 | Horiz |
| ^ | 331.905M | 46.1 | +0.0 +3.4 | +20.0 | -28.2 | +0.3 | +0.0 | 41.6 | 46.0 | -4.4 | Horiz |
| 41 | 512.059M | 44.7 | +0.0 +4.5 | +17.2 | -28.5 | +0.4 | +0.0 | 38.3 | 46.0 | -7.7 | Vert |
| 42 | 400.064M | 47.0 | +0.0 +3.8 | +15.5 | -28.3 | +0.3 | +0.0 | 38.3 | 46.0 | -7.7 | Vert |
| 43 | 77.899M | 51.9 | +6.8 +1.6 | +0.0 | -28.3 | +0.1 | +0.0 | 32.1 | 40.0 | -7.9 | Horiz |
| 44 | 464.396M | 45.7 | +0.0 +4.1 | +16.4 | -28.6 | +0.4 | +0.0 | 38.0 | 46.0 | -8.0 | Horiz |
| 45 | 200.080M | 44.2 | +16.8 +2.6 | +0.0 | -28.4 | +0.2 | +0.0 | 35.4 | 43.5 | -8.1 | Horiz |
| 46 | 665.362M | 38.7 | +0.0 +5.1 | +21.4 | -27.9 | +0.4 | +0.0 | 37.7 | 46.0 | -8.3 | Vert |
| 47 | 800.062M | 37.1 | +0.0 +5.7 | +21.5 | -27.6 | +0.5 | +0.0 | 37.2 | 46.0 | -8.8 | Vert |
| 48 | 315.071M | 40.5 | +0.0 +3.4 | +21.3 | -28.3 | +0.3 | +0.0 | 37.2 | 46.0 | -8.8 | Vert |
| 49 | 200.074M | 43.1 | +16.8 +2.6 | +0.0 | -28.4 | +0.2 | +0.0 | 34.3 | 43.5 | -9.2 | Vert |
| 50 | 448.660M | 44.2 | +0.0 +4.0 | +16.2 | -28.7 | +0.4 | +0.0 | 36.1 | 46.0 | -9.9 | Vert |

| | | | | | | | | | | | |
|----|---------------|------|---------------|-------|-------|------|------|------|------|-------|-------|
| 51 | 512.055M | 42.1 | +0.0 +4.4 | +17.2 | -28.5 | +0.4 | +0.0 | 35.6 | 46.0 | -10.4 | Horiz |
| 52 | 70.781M QP | 49.5 | +6.9 +1.5 | +0.0 | -28.6 | +0.1 | +0.0 | 29.4 | 40.0 | -10.6 | Vert |
| ^ | 70.806M | 54.8 | +6.9 +1.5 | +0.0 | -28.6 | +0.1 | +0.0 | 34.7 | 40.0 | -5.3 | Vert |
| 54 | 105.085M | 46.4 | +12.5 +1.8 | +0.0 | -28.4 | +0.1 | +0.0 | 32.4 | 43.5 | -11.1 | Vert |

Test Location: CKC Laboratories, Inc. • 110 N. Olinda Place • Brea, CA 92823 • (714) 993-6112

Customer: **Motorola BCS**
 Specification: **FCC 15.247(c)**
 Work Order #: **79346** Date: 08/07/2002
 Test Type: **Maximized emission** Time: 17:23:22
 Equipment: **Cable Modem** Sequence#: 2
 Manufacturer: Motorola BCS Tested By: Stuart Yamamoto
 Model: SBG 1000 P5
 S/N: 00080ED2F1E0

Equipment Under Test (* = EUT):

| Function | Manufacturer | Model # | S/N |
|--------------|--------------|-------------|--------------|
| Cable Modem* | Motorola BCS | SBG 1000 P5 | 00080ED2F1E0 |

Support Devices:

| Function | Manufacturer | Model # | S/N |
|------------------|---------------------|------------|---------------|
| C6U Converter | General Instruments | C6U | J5M7000101358 |
| Hub | Bay Networks | DS104 | DS14H08355155 |
| Computer | Toshiba | PA1215UV | 04694236 |
| Computer | Dolch | L-PAC 585 | DCS2016538 |
| Thermal Printer | SII | DPU-414 | 1033083A |
| Mouse | Gateway | MOSXX | |
| Keyboard | Dell | SK-1000RS | M940111179 |
| Monitor | NEC | JC-1538VMA | 5900265EA |
| Computer | Gateway | G6-366C | 0013168086 |
| Parallel Printer | Epson | P156A | CMR1545596 |
| Head End | Cisco | uBR-MC11C | CN1ISS0AA |

Test Conditions / Notes:

The EUT is a cable modem. The EUT's USB and one of its ethernet ports is connected to a desktop computer via shielded cable. The other four ethernet ports are connected in loopback with shielded cables. Connected to the parallel port of the EUT is a thermal printer. The HPNA ports have unshielded terminated cables connected. The "F" connector port is connected to the remotely located support equipment. The desktop computer and one laptop computer are running hyperterminal and are pinging the ethernet through MS DOS. The Dolch computer is running the TFTP32 program. The EUT is transmitting on Channel 1. Temperature: 25°C, Humidity: 46%, Pressure: 100kPa. Voltage to EUT is 120 Vac 60Hz. Data sheet represents emissions from the frequency range of 1.0 to 25.0 GHz.

Transducer Legend:

| | |
|------------------------------|------------------------------------|
| T1=6" SMA cable #2212 101701 | T2=Helix #18 70' 11Sept2001 |
| T3=Horn Antenna sn6246 | T4=HP3017A sn3123A00281 11-Sept-01 |
| T5=12' SMA 26 GHz Cable | |

Measurement Data:

| # | Freq MHz | Rdng dBµV | Reading listed by margin. | | | | Dist Table | Corr dBµV/m | Spec dBµV/m | Margin dB | Polar Ant |
|---|-------------|--------------|---------------------------|----------|----------|----------|---------------|----------------|----------------|--------------|--------------|
| | | | T1 dB | T2 dB | T3 dB | T4 dB | | | | | |
| 1 | 1605.707M | 56.0 | +0.2 +1.5 | +3.5 | +24.9 | -38.6 | +0.0 | 47.5 | 54.0 | -6.5 | Vert |
| 2 | 7236.000M | 36.0 | +0.3 +4.8 | +8.0 | +35.8 | -37.7 | +0.0 | 47.2 | 54.0 | -6.8 | Vert |
| ^ | 7236.009M | 47.0 | +0.3 +4.8 | +8.0 | +35.8 | -37.7 | +0.0 | 58.2 | 54.0 | +4.2 | Vert |

| | | | | | | | | | | | |
|----|------------------|------|--------------|------|-------|-------|------|------|------|-------|-------|
| 4 | 7236.408M Ave | 35.7 | +0.3 +4.8 | +8.0 | +35.8 | -37.7 | +0.0 | 46.9 | 54.0 | -7.1 | Horiz |
| ^ | 7236.408M | 46.5 | +0.3 +4.8 | +8.0 | +35.8 | -37.7 | +0.0 | 57.7 | 54.0 | +3.7 | Horiz |
| 6 | 1504.958M | 55.3 | +0.2 +1.5 | +3.3 | +24.5 | -38.9 | +0.0 | 45.9 | 54.0 | -8.1 | Horiz |
| 7 | 1040.100M | 56.1 | +0.2 +1.1 | +2.7 | +24.0 | -40.5 | +0.0 | 43.6 | 54.0 | -10.4 | Vert |
| 8 | 1811.291M Ave | 50.9 | +0.2 +1.6 | +3.6 | +25.7 | -38.5 | +0.0 | 43.5 | 54.0 | -10.5 | Horiz |
| ^ | 1811.291M | 62.3 | +0.2 +1.6 | +3.6 | +25.7 | -38.5 | +0.0 | 54.9 | 54.0 | +0.9 | Horiz |
| 10 | 4834.700M | 38.3 | +0.3 +2.9 | +6.2 | +32.8 | -37.2 | +0.0 | 43.3 | 54.0 | -10.7 | Horiz |
| 11 | 1605.760M | 53.2 | +0.2 | +3.5 | +24.9 | -38.6 | +0.0 | 43.2 | 54.0 | -10.8 | Horiz |
| 12 | 1745.022M | 51.7 | +0.2 | +3.6 | +25.5 | -38.6 | +0.0 | 42.4 | 54.0 | -11.6 | Horiz |
| 13 | 1809.600M Ave | 46.7 | +0.2 +1.6 | +3.6 | +25.7 | -38.5 | +0.0 | 39.3 | 54.0 | -14.7 | Vert |
| ^ | 1809.610M | 57.0 | +0.2 +1.6 | +3.6 | +25.7 | -38.5 | +0.0 | 49.6 | 54.0 | -4.4 | Vert |
| 15 | 1504.958M Ave | 47.2 | +0.2 +1.5 | +3.3 | +24.5 | -38.9 | +0.0 | 37.8 | 54.0 | -16.2 | Vert |
| ^ | 1504.958M | 57.6 | +0.2 +1.5 | +3.3 | +24.5 | -38.9 | +0.0 | 48.2 | 54.0 | -5.8 | Vert |
| 17 | 4823.974M Ave | 32.1 | +0.3 +2.9 | +6.2 | +32.8 | -37.2 | +0.0 | 37.1 | 54.0 | -16.9 | Vert |
| ^ | 4823.998M | 45.0 | +0.3 +2.9 | +6.2 | +32.8 | -37.2 | +0.0 | 50.0 | 54.0 | -4.0 | Vert |
| 19 | 1215.895M | 49.2 | +0.2 | +2.9 | +24.2 | -39.6 | +0.0 | 36.9 | 54.0 | -17.1 | Horiz |
| 20 | 1000.039M | 49.9 | +0.2 | +2.6 | +23.9 | -40.7 | +0.0 | 35.9 | 54.0 | -18.1 | Horiz |
| 21 | 1100.001M | 48.9 | +0.2 | +2.8 | +24.0 | -40.1 | +0.0 | 35.8 | 54.0 | -18.2 | Horiz |
| 22 | 1071.293M Ave | 45.8 | +0.2 +1.2 | +2.7 | +24.0 | -40.3 | +0.0 | 33.6 | 54.0 | -20.4 | Vert |
| ^ | 1071.265M | 64.1 | +0.2 +1.2 | +2.7 | +24.0 | -40.3 | +0.0 | 51.9 | 54.0 | -2.1 | Vert |

Test Location: CKC Laboratories, Inc. • 110 N. Olinda Place • Brea, CA 92823 • (714) 993-6112

Customer: **Motorola BCS**

Specification: **FCC 15.247(c)**

Work Order #: **79346**

Date: 08/15/2002

Test Type: **Maximized emission**

Time: 16:42:31

Equipment: **Cable Modem**

Sequence#: 10

Manufacturer: Motorola BCS

Tested By: Stuart Yamamoto

Model: SBG 1000 P5

S/N: 00080ED2F1E0

Equipment Under Test (* = EUT):

| Function | Manufacturer | Model # | S/N |
|--------------|--------------|-------------|--------------|
| Cable Modem* | Motorola BCS | SBG 1000 P5 | 00080ED2F1E0 |

Support Devices:

| Function | Manufacturer | Model # | S/N |
|------------------|---------------------|------------|---------------|
| C6U Converter | General Instruments | C6U | J5M7000101358 |
| Hub | Bay Networks | DS104 | DS14H08355155 |
| Computer | Toshiba | PA1215UV | 04694236 |
| Computer | Dolch | L-PAC 585 | DCS2016538 |
| Thermal Printer | SII | DPU-414 | 1033083A |
| Mouse | Gateway | MOSXX | |
| Keyboard | Dell | SK-1000RS | M940111179 |
| Monitor | NEC | JC-1538VMA | 5900265EA |
| Computer | Gateway | G6-366C | 0013168086 |
| Parallel Printer | Epson | P156A | CMR1545596 |
| Head End | Cisco | uBR-MC11C | CN1ISS0AA |

Test Conditions / Notes:

The EUT is a cable modem. The EUT's USB and one of its ethernet ports is connected to a desktop computer via shielded cable. The other four ethernet ports are connected in loopback with shielded cables. Connected to the parallel port of the EUT is a thermal printer. The HPNA ports have unshielded terminated cables connected. The "F" connector port is connected to the remotely located support equipment. The desktop computer and one laptop computer are running hyperterminal and are pinging the ethernet through MS DOS. The Dolch computer is running the TFTP32 program. The EUT is transmitting on Channel 6. Temperature: 23°C, Humidity: 52%, Pressure: 100kPa. Voltage to EUT is 120 Vac 60Hz. Data sheet represents emissions from the frequency range of 1.0 to 25.0 GHz.

Transducer Legend:

| | |
|------------------------------|------------------------------------|
| T1=6" SMA cable #2212 101701 | T2=Helix #18 70' 11Sept2001 |
| T3=Horn Antenna sn6246 | T4=HP3017A sn3123A00281 11-Sept-01 |
| T5=12' SMA 26 GHz Cable | |

Measurement Data:

Reading listed by margin.

Test Distance: 3 Meters

| # | Freq | Rdng | T1 | T2 | T3 | T4 | Dist | Corr | Spec | Margin | Polar |
|---|-----------|------------|------|------|-------|-------|-------|--------------|--------------|--------|-------|
| | MHz | dB μ V | T5 | dB | dB | dB | Table | dB μ V/m | dB μ V/m | dB | Ant |
| 1 | 7310.691M | 40.5 | +0.0 | +8.1 | +35.9 | -37.8 | +0.0 | 51.6 | 54.0 | -2.4 | Vert |
| | Ave | | +4.9 | | | | | | | | |
| ^ | 7310.688M | 51.1 | +0.0 | +8.1 | +35.9 | -37.8 | +0.0 | 62.2 | 54.0 | +8.2 | Vert |
| | | | +4.9 | | | | | | | | |

| | | | | | | | | | | | |
|----|------------------|------|--------------|------|-------|-------|------|------|------|-------|-------|
| 3 | 7310.802M Ave | 38.3 | +0.0 +4.9 | +8.1 | +35.9 | -37.8 | +0.0 | 49.4 | 54.0 | -4.6 | Horiz |
| ^ | 7310.838M | 48.9 | +0.0 +4.9 | +8.1 | +35.9 | -37.8 | +0.0 | 60.0 | 54.0 | +6.0 | Horiz |
| 5 | 1844.400M | 56.3 | +0.2 +0.0 | +3.6 | +25.9 | -38.4 | +0.0 | 47.6 | 54.0 | -6.4 | Vert |
| 6 | 4873.871M | 42.3 | +0.0 +2.9 | +6.3 | +32.9 | -37.2 | +0.0 | 47.2 | 54.0 | -6.8 | Horiz |
| 7 | 1647.323M | 56.4 | +0.2 +0.0 | +3.5 | +25.1 | -38.6 | +0.0 | 46.6 | 54.0 | -7.4 | Horiz |
| 8 | 1647.368M | 55.8 | +0.2 +0.0 | +3.5 | +25.1 | -38.6 | +0.0 | 46.0 | 54.0 | -8.0 | Vert |
| 9 | 1097.825M | 59.0 | +0.2 +0.0 | +2.8 | +24.0 | -40.1 | +0.0 | 45.9 | 54.0 | -8.1 | Vert |
| 10 | 1548.711M Ave | 54.1 | +0.2 +0.0 | +3.4 | +24.7 | -38.8 | +0.0 | 43.6 | 54.0 | -10.4 | Vert |
| ^ | 1548.703M | 62.6 | +0.2 +0.0 | +3.4 | +24.7 | -38.8 | +0.0 | 52.1 | 54.0 | -1.9 | Vert |
| 12 | 1601.616M | 52.6 | +0.2 +0.0 | +3.5 | +24.9 | -38.6 | +0.0 | 42.6 | 54.0 | -11.4 | Vert |
| 13 | 1489.394M | 53.1 | +0.2 +0.0 | +3.3 | +24.5 | -38.9 | +0.0 | 42.2 | 54.0 | -11.8 | Vert |
| 14 | 1844.172M Ave | 47.5 | +0.0 +1.6 | +3.6 | +25.9 | -38.4 | +0.0 | 40.2 | 54.0 | -13.8 | Horiz |
| ^ | 1844.120M | 58.1 | +0.0 +1.6 | +3.6 | +25.9 | -38.4 | +0.0 | 50.8 | 54.0 | -3.2 | Horiz |
| 16 | 1065.979M | 52.7 | +0.2 +0.0 | +2.7 | +24.0 | -40.3 | +0.0 | 39.3 | 54.0 | -14.7 | Vert |
| 17 | 4873.951M Ave | 33.7 | +0.0 +2.9 | +6.3 | +32.9 | -37.2 | +0.0 | 38.6 | 54.0 | -15.4 | Vert |
| ^ | 4874.018M | 46.0 | +0.0 +2.9 | +6.3 | +32.9 | -37.2 | +0.0 | 50.9 | 54.0 | -3.1 | Vert |
| 19 | 1216.075M | 50.1 | +0.2 +0.0 | +2.9 | +24.2 | -39.6 | +0.0 | 37.8 | 54.0 | -16.2 | Vert |
| 20 | 1040.104M | 51.2 | +0.2 +0.0 | +2.7 | +24.0 | -40.5 | +0.0 | 37.6 | 54.0 | -16.4 | Vert |
| 21 | 1553.234M Ave | 33.5 | +0.2 +0.0 | +3.4 | +24.7 | -38.7 | +0.0 | 23.1 | 54.0 | -31.0 | Horiz |
| ^ | 1553.182M | 61.5 | +0.2 +0.0 | +3.4 | +24.7 | -38.7 | +0.0 | 51.1 | 54.0 | -2.9 | Horiz |

Test Location: CKC Laboratories, Inc. • 110 N. Olinda Place • Brea, CA 92823 • (714) 993-6112

Customer: **Motorola BCS**
 Specification: **FCC 15.247(c)**
 Work Order #: **79346** Date: 08/15/2002
 Test Type: **Maximized emission** Time: 17:34:12
 Equipment: **Cable Modem** Sequence#: 11
 Manufacturer: Motorola BCS Tested By: Stuart Yamamoto
 Model: SBG 1000 P5
 S/N: 00080ED2F1E0

Equipment Under Test (* = EUT):

| Function | Manufacturer | Model # | S/N |
|--------------|--------------|-------------|--------------|
| Cable Modem* | Motorola BCS | SBG 1000 P5 | 00080ED2F1E0 |

Support Devices:

| Function | Manufacturer | Model # | S/N |
|------------------|---------------------|------------|---------------|
| C6U Converter | General Instruments | C6U | J5M7000101358 |
| Hub | Bay Networks | DS104 | DS14H08355155 |
| Computer | Toshiba | PA1215UV | 04694236 |
| Computer | Dolch | L-PAC 585 | DCS2016538 |
| Thermal Printer | SII | DPU-414 | 1033083A |
| Mouse | Gateway | MOSXX | |
| Keyboard | Dell | SK-1000RS | M940111179 |
| Monitor | NEC | JC-1538VMA | 5900265EA |
| Computer | Gateway | G6-366C | 0013168086 |
| Parallel Printer | Epson | P156A | CMR1545596 |
| Head End | Cisco | uBR-MC11C | CN1ISS0AA |

Test Conditions / Notes:

The EUT is a cable modem. The EUT's USB and one of its ethernet ports is connected to a desktop computer via shielded cable. The other four ethernet ports are connected in loopback with shielded cables. Connected to the parallel port of the EUT is a thermal printer. The HPNA ports have unshielded terminated cables connected. The "F" connector port is connected to the remotely located support equipment. The desktop computer and one laptop computer are running hyperterminal and are pinging the ethernet through MS DOS. The Dolch computer is running the TFTP32 program. The EUT is transmitting on Channel 11. Temperature: 23°C, Humidity: 52%, Pressure: 100kPa. Voltage to EUT is 120 Vac 60Hz. Data sheet represents emissions from the frequency range of 1.0 to 25.0 GHz.

Transducer Legend:

| | |
|------------------------------|------------------------------------|
| T1=6" SMA cable #2212 101701 | T2=Helix #18 70' 11Sept2001 |
| T3=Horn Antenna sn6246 | T4=HP3017A sn3123A00281 11-Sept-01 |
| T5=12' SMA 26 GHz Cable | |

Measurement Data:

| # | Freq MHz | Rdng dBµV | Reading listed by margin. | | | | Test Distance: 3 Meters | | | | | |
|---|-------------|--------------|---------------------------|----------|----------|----------|-------------------------|----------------|----------------|--------------|--------------|--|
| | | | T1 dB | T2 dB | T3 dB | T4 dB | Dist Table | Corr dBµV/m | Spec dBµV/m | Margin dB | Polar Ant | |
| 1 | 1882.180M | 58.1 | +0.2 | +3.6 | +26.0 | -38.3 | +0.0 | 49.6 | 54.0 | -4.4 | Vert | |
| | Ave | | +0.0 | | | | | | | | | |
| ^ | 1882.172M | 68.4 | +0.2 | +3.6 | +26.0 | -38.3 | +0.0 | 59.9 | 54.0 | +5.9 | Vert | |
| | | | +0.0 | | | | | | | | | |

| | | | | | | | | | | | |
|----|-----------|------|------|------|-------|-------|------|------|------|-------|-------|
| 3 | 7385.929M | 38.0 | +0.0 | +8.1 | +36.0 | -37.9 | +0.0 | 49.1 | 54.0 | -4.9 | Horiz |
| | Ave | | +4.9 | | | | | | | | |
| ^ | 7385.928M | 49.0 | +0.0 | +8.1 | +36.0 | -37.9 | +0.0 | 60.1 | 54.0 | +6.1 | Horiz |
| | | | +4.9 | | | | | | | | |
| 5 | 7385.835M | 35.6 | +0.0 | +8.1 | +36.0 | -37.9 | +0.0 | 46.7 | 54.0 | -7.3 | Vert |
| | Ave | | +0.0 | | | | | | | | |
| ^ | 7385.833M | 46.9 | +0.0 | +8.1 | +36.0 | -37.9 | +0.0 | 58.0 | 54.0 | +4.0 | Vert |
| | | | +4.9 | | | | | | | | |
| 7 | 1121.396M | 59.0 | +0.2 | +2.8 | +24.1 | -40.0 | +0.0 | 46.1 | 54.0 | -7.9 | Vert |
| | | | +0.0 | | | | | | | | |
| 8 | 4923.891M | 39.7 | +0.0 | +6.3 | +33.0 | -37.2 | +0.0 | 44.6 | 54.0 | -9.4 | Horiz |
| | | | +2.8 | | | | | | | | |
| 9 | 1688.967M | 52.4 | +0.2 | +3.6 | +25.3 | -38.6 | +0.0 | 42.9 | 54.0 | -11.1 | Horiz |
| | | | +0.0 | | | | | | | | |
| 10 | 1688.970M | 51.8 | +0.2 | +3.6 | +25.3 | -38.6 | +0.0 | 42.3 | 54.0 | -11.7 | Vert |
| | Ave | | +0.0 | | | | | | | | |
| ^ | 1688.968M | 60.1 | +0.2 | +3.6 | +25.3 | -38.6 | +0.0 | 50.6 | 54.0 | -3.4 | Vert |
| | | | +0.0 | | | | | | | | |
| 12 | 1592.304M | 51.5 | +0.2 | +3.5 | +24.9 | -38.6 | +0.0 | 41.5 | 54.0 | -12.5 | Vert |
| | Ave | | +0.0 | | | | | | | | |
| ^ | 1592.293M | 61.5 | +0.2 | +3.5 | +24.9 | -38.6 | +0.0 | 51.5 | 54.0 | -2.5 | Vert |
| | | | +0.0 | | | | | | | | |
| 14 | 1882.227M | 46.5 | +0.2 | +3.6 | +26.0 | -38.3 | +0.0 | 38.0 | 54.0 | -16.0 | Horiz |
| | Ave | | +0.0 | | | | | | | | |
| ^ | 1882.223M | 57.9 | +0.2 | +3.6 | +26.0 | -38.3 | +0.0 | 49.4 | 54.0 | -4.6 | Horiz |
| | | | +0.0 | | | | | | | | |
| 16 | 4923.655M | 31.8 | +0.0 | +6.3 | +33.0 | -37.2 | +0.0 | 36.7 | 54.0 | -17.3 | Vert |
| | Ave | | +2.8 | | | | | | | | |
| ^ | 4923.643M | 44.6 | +0.0 | +6.3 | +33.0 | -37.2 | +0.0 | 49.5 | 54.0 | -4.5 | Vert |
| | | | +2.8 | | | | | | | | |

Test Location: CKC Laboratories, Inc. • 110 N. Olinda Place • Brea, CA 92823 • (714) 993-6112

Customer: **Motorola BCS**

Specification: **FCC 15.247(c)**

Work Order #: **79346**

Date: 11/15/2002

Test Type: **Maximized emission**

Time: 09:55:10

Equipment: **Cable Modem**

Sequence#: 1

Manufacturer: Motorola BCS

Tested By: Stuart Yamamoto

Model: SBG 1000 P-7

S/N: 00080ED30158

Equipment Under Test (* = EUT):

| Function | Manufacturer | Model # | S/N |
|--------------|---------------------------------------|--------------|--------------|
| Cable Modem* | Motorola BCS | SBG 1000 P-7 | 00080ED30158 |
| Antenna | Centurion Wireless Technologies, Inc. | CAF94333 | |

Support Devices:

| Function | Manufacturer | Model # | S/N |
|------------------|---------------------|------------|---------------|
| C6U Converter | General Instruments | C6U | J5M7000101358 |
| Hub | Bay Networks | DS104 | DS14H08355155 |
| Computer | Toshiba | PA1215UV | 04694236 |
| Computer | Dolch | L-PAC 585 | DCS2016538 |
| Thermal Printer | SII | DPU-414 | 1033083A |
| Mouse | Gateway | MOSXX | |
| Keyboard | Dell | SK-1000RS | M940111179 |
| Monitor | NEC | JC-1538VMA | 5900265EA |
| Computer | Gateway | G6-366C | 0013168086 |
| Parallel Printer | Epson | P156A | CMR1545596 |
| Head End | Cisco | uBR-MC11C | CN1ISS0AA |

Test Conditions / Notes:

The EUT is a cable modem (32MB SDRAM). The EUT's USB and one of its ethernet ports is connected to a desktop computer via shielded cable. The other four ethernet ports are connected in loopback with unshielded cat. 5 cables. Connected to the parallel port of the EUT is a thermal printer. One of the HPNA ports has an unshielded terminated cable connected. The F connector port is connected to the remotely located support equipment. The desktop computer and one laptop computer are running hyperterminal and are pinging the ethernet through MS DOS. The Dolch computer is running the TFTP32 program. The EUT is transmitting on Channel 1. Temperature: 22°C, Humidity: 42%, Pressure: 100kPa. Voltage to EUT is 120 Vac 60Hz. Data sheet represents emissions from the frequency range of 30.0 to 1000.0 MHz.

Transducer Legend:

| | |
|------------------------------|------------------------|
| T1=Bicon 092401 | T2=Preamp 8447D 090501 |
| T3=Cable #10 070803 | T4=Cable #15 120602 |
| T5=Log antenna, SN331 092303 | T6=Bicon SN220 092303 |
| T7=Preamp 8447D 082302 | T8=Cable #10 070803 |
| T9=Cable #15 120602 | |

| <i>Measurement Data:</i> | | Reading listed by margin. | | | | | Test Distance: 3 Meters | | | | |
|--------------------------|----------|---------------------------|-------|-------|-------|------|-------------------------|--------------|--------------------|--------|-------|
| # | Freq | Rdng | T1 | T2 | T3 | T4 | Dist | Corr | Spec | Margin | Polar |
| | MHz | dB μ V | T5 | T6 | T7 | T8 | Table | dB μ V/m | dB μ V/m | dB | Ant |
| | | | T9 | | | | | | | | |
| 1 | 106.755M | 55.8 | +0.0 | +0.0 | +0.0 | +0.0 | +0.0 | 42.8 | 43.5 | -0.7 | Vert |
| | QP | | +0.0 | +13.4 | -28.4 | +0.1 | | | | | |
| | | | +1.9 | | | | | | | | |
| ^ | 106.755M | 57.4 | +0.0 | +0.0 | +0.0 | +0.0 | +0.0 | 44.4 | 43.5 | +0.9 | Vert |
| | | | +0.0 | +13.4 | -28.4 | +0.1 | | | | | |
| | | | +1.9 | | | | | | | | |
| ^ | 106.757M | 43.1 | +0.0 | +0.0 | +0.0 | +0.0 | +0.0 | 30.1 | 43.5 | -13.4 | Vert |
| | | | +0.0 | +13.4 | -28.4 | +0.1 | | | Shielded Cat. 5 | | |
| | | | +1.9 | | | | | | cables on Ethernet | | |
| 4 | 63.989M | 57.0 | +0.0 | +0.0 | +0.0 | +0.0 | +0.0 | 38.2 | 40.0 | -1.8 | Vert |
| | QP | | +0.0 | +8.1 | -28.4 | +0.1 | | | | | |
| | | | +1.4 | | | | | | | | |
| ^ | 63.977M | 60.2 | +0.0 | +0.0 | +0.0 | +0.0 | +0.0 | 41.4 | 40.0 | +1.4 | Vert |
| | | | +0.0 | +8.1 | -28.4 | +0.1 | | | | | |
| | | | +1.4 | | | | | | | | |
| 6 | 511.982M | 47.4 | +0.0 | +0.0 | +0.0 | +0.0 | +0.0 | 44.0 | 46.0 | -2.0 | Vert |
| | QP | | +19.9 | +0.0 | -28.1 | +0.4 | | | | | |
| | | | +4.4 | | | | | | | | |
| ^ | 511.981M | 51.4 | +0.0 | +0.0 | +0.0 | +0.0 | +0.0 | 48.0 | 46.0 | +2.0 | Vert |
| | | | +19.9 | +0.0 | -28.1 | +0.4 | | | | | |
| | | | +4.4 | | | | | | | | |
| 8 | 111.376M | 53.5 | +0.0 | +0.0 | +0.0 | +0.0 | +0.0 | 41.4 | 43.5 | -2.1 | Vert |
| | QP | | +0.0 | +14.3 | -28.4 | +0.1 | | | | | |
| | | | +1.9 | | | | | | | | |
| ^ | 111.373M | 55.0 | +0.0 | +0.0 | +0.0 | +0.0 | +0.0 | 42.9 | 43.5 | -0.6 | Vert |
| | | | +0.0 | +14.3 | -28.4 | +0.1 | | | | | |
| | | | +1.9 | | | | | | | | |
| ^ | 111.374M | 42.0 | +0.0 | +0.0 | +0.0 | +0.0 | +0.0 | 29.9 | 43.5 | -13.6 | Vert |
| | | | +0.0 | +14.3 | -28.4 | +0.1 | | | Shielded Cat. 5 | | |
| | | | +1.9 | | | | | | cables on Ethernet | | |
| 11 | 576.096M | 46.3 | +0.0 | +0.0 | +0.0 | +0.0 | +0.0 | 43.8 | 46.0 | -2.2 | Vert |
| | QP | | +20.1 | +0.0 | -27.8 | +0.4 | | | | | |
| | | | +4.8 | | | | | | | | |
| ^ | 576.109M | 46.3 | +0.0 | +0.0 | +0.0 | +0.0 | +0.0 | 43.8 | 46.0 | -2.2 | Vert |
| | | | +20.1 | +0.0 | -27.8 | +0.4 | | | | | |
| | | | +4.8 | | | | | | | | |
| 13 | 111.621M | 53.4 | +0.0 | +0.0 | +0.0 | +0.0 | +0.0 | 41.3 | 43.5 | -2.2 | Vert |
| | QP | | +0.0 | +14.3 | -28.4 | +0.1 | | | | | |
| | | | +1.9 | | | | | | | | |
| ^ | 111.611M | 55.2 | +0.0 | +0.0 | +0.0 | +0.0 | +0.0 | 43.1 | 43.5 | -0.4 | Vert |
| | | | +0.0 | +14.3 | -28.4 | +0.1 | | | | | |
| | | | +1.9 | | | | | | | | |

| | | | | | | | | | | | |
|----|----------------|------|-----------------------|---------------|---------------|--------------|------|------|------|-------|-----------------------------------------------|
| 15 | 112.226M QP | 53.1 | +0.0 +0.0 +1.9 | +0.0 +14.4 | +0.0 -28.3 | +0.0 +0.2 | +0.0 | 41.3 | 43.5 | -2.2 | Vert |
| ^ | 112.219M | 55.0 | +0.0 +0.0 +1.9 | +0.0 +14.4 | +0.0 -28.3 | +0.0 +0.2 | +0.0 | 43.2 | 43.5 | -0.3 | Vert |
| 17 | 110.877M QP | 53.4 | +0.0 +0.0 +1.9 | +0.0 +14.2 | +0.0 -28.4 | +0.0 +0.1 | +0.0 | 41.2 | 43.5 | -2.3 | Vert |
| ^ | 110.884M | 54.9 | +0.0 +0.0 +1.9 | +0.0 +14.2 | +0.0 -28.4 | +0.0 +0.1 | +0.0 | 42.7 | 43.5 | -0.8 | Vert |
| 19 | 112.833M QP | 52.7 | +0.0 +0.0 +1.9 | +0.0 +14.6 | +0.0 -28.3 | +0.0 +0.2 | +0.0 | 41.1 | 43.5 | -2.4 | Vert |
| ^ | 112.825M | 54.5 | +0.0 +0.0 +1.9 | +0.0 +14.5 | +0.0 -28.3 | +0.0 +0.2 | +0.0 | 42.8 | 43.5 | -0.7 | Vert |
| ^ | 112.834M | 42.6 | +0.0 +0.0 +1.9 | +0.0 +14.6 | +0.0 -28.3 | +0.0 +0.2 | +0.0 | 31.0 | 43.5 | -12.5 | Vert Shielded Cat. 5 cables on Ethernet |
| 22 | 500.083M QP | 47.0 | +0.0 +19.8 +4.4 | +0.0 +0.0 | +0.0 -28.1 | +0.0 +0.4 | +0.0 | 43.5 | 46.0 | -2.5 | Vert |
| ^ | 500.082M | 47.1 | +0.0 +19.8 +4.4 | +0.0 +0.0 | +0.0 -28.1 | +0.0 +0.4 | +0.0 | 43.6 | 46.0 | -2.4 | Vert |
| 24 | 105.291M QP | 54.3 | +0.0 +0.0 +1.8 | +0.0 +13.1 | +0.0 -28.4 | +0.0 +0.1 | +0.0 | 40.9 | 43.5 | -2.6 | Vert |
| ^ | 105.291M | 56.5 | +0.0 +0.0 +1.8 | +0.0 +13.1 | +0.0 -28.4 | +0.0 +0.1 | +0.0 | 43.1 | 43.5 | -0.4 | Vert |
| 26 | 107.305M QP | 53.8 | +0.0 +0.0 +1.9 | +0.0 +13.5 | +0.0 -28.4 | +0.0 +0.1 | +0.0 | 40.9 | 43.5 | -2.6 | Vert |
| ^ | 107.305M | 55.0 | +0.0 +0.0 +1.9 | +0.0 +13.5 | +0.0 -28.4 | +0.0 +0.1 | +0.0 | 42.1 | 43.5 | -1.4 | Vert |
| 28 | 108.196M QP | 53.3 | +0.0 +0.0 +1.9 | +0.0 +13.7 | +0.0 -28.4 | +0.0 +0.1 | +0.0 | 40.6 | 43.5 | -2.9 | Vert |
| ^ | 108.188M | 55.2 | +0.0 +0.0 +1.9 | +0.0 +13.7 | +0.0 -28.4 | +0.0 +0.1 | +0.0 | 42.5 | 43.5 | -1.0 | Vert |
| ^ | 108.196M | 39.8 | +0.0 +0.0 +1.9 | +0.0 +13.7 | +0.0 -28.4 | +0.0 +0.1 | +0.0 | 27.1 | 43.5 | -16.4 | Vert Shielded Cat. 5 cables on Ethernet |

| | | | | | | | | | | | |
|----|----------------|------|-----------------------|---------------|---------------|--------------|------|------|------|------|-------|
| 31 | 50.022M QP | 52.8 | +0.0 +0.0 +1.2 | +0.0 +11.2 | +0.0 -28.4 | +0.0 +0.1 | +0.0 | 36.9 | 40.0 | -3.1 | Vert |
| ^ | 49.992M | 54.4 | +0.0 +0.0 +1.2 | +0.0 +11.2 | +0.0 -28.4 | +0.0 +0.1 | +0.0 | 38.5 | 40.0 | -1.5 | Vert |
| 33 | 299.994M QP | 44.6 | +0.0 +0.0 +3.3 | +0.0 +22.9 | +0.0 -28.3 | +0.0 +0.3 | +0.0 | 42.8 | 46.0 | -3.2 | Horiz |
| ^ | 299.995M | 45.3 | +0.0 +0.0 +3.3 | +0.0 +22.9 | +0.0 -28.3 | +0.0 +0.3 | +0.0 | 43.5 | 46.0 | -2.5 | Horiz |
| 35 | 108.797M QP | 52.9 | +0.0 +0.0 +1.9 | +0.0 +13.8 | +0.0 -28.4 | +0.0 +0.1 | +0.0 | 40.3 | 43.5 | -3.2 | Vert |
| ^ | 108.791M | 54.6 | +0.0 +0.0 +1.9 | +0.0 +13.8 | +0.0 -28.4 | +0.0 +0.1 | +0.0 | 42.0 | 43.5 | -1.5 | Vert |
| 37 | 106.757M QP | 52.7 | +0.0 +0.0 +1.9 | +0.0 +13.4 | +0.0 -28.4 | +0.0 +0.1 | +0.0 | 39.7 | 43.5 | -3.8 | Horiz |
| ^ | 106.757M | 53.6 | +0.0 +0.0 +1.9 | +0.0 +13.4 | +0.0 -28.4 | +0.0 +0.1 | +0.0 | 40.6 | 43.5 | -2.9 | Horiz |
| 39 | 400.051M QP | 49.1 | +0.0 +16.9 +3.8 | +0.0 +0.0 | +0.0 -28.2 | +0.0 +0.3 | +0.0 | 41.9 | 46.0 | -4.1 | Vert |
| ^ | 400.031M | 50.8 | +0.0 +16.9 +3.8 | +0.0 +0.0 | +0.0 -28.2 | +0.0 +0.3 | +0.0 | 43.6 | 46.0 | -2.4 | Vert |
| 41 | 299.998M | 44.4 | +22.2 | -28.3 | +0.3 | +3.3 | +0.0 | 41.9 | 46.0 | -4.1 | Vert |
| 42 | 600.076M | 43.9 | +0.0 +20.2 +4.9 | +0.0 +0.0 | +0.0 -27.7 | +0.0 +0.4 | +0.0 | 41.7 | 46.0 | -4.3 | Horiz |
| 43 | 350.005M | 46.5 | +0.0 +19.6 +3.5 | +0.0 +0.0 | +0.0 -28.3 | +0.0 +0.3 | +0.0 | 41.6 | 46.0 | -4.4 | Horiz |
| 44 | 108.505M | 51.6 | +0.0 +0.0 +1.9 | +0.0 +13.8 | +0.0 -28.4 | +0.0 +0.1 | +0.0 | 39.0 | 43.5 | -4.5 | Horiz |
| 45 | 104.730M | 52.3 | +0.0 +0.0 +1.8 | +0.0 +13.0 | +0.0 -28.4 | +0.0 +0.1 | +0.0 | 38.8 | 43.5 | -4.7 | Horiz |
| 46 | 62.754M QP | 53.8 | +0.0 +0.0 +1.4 | +0.0 +8.4 | +0.0 -28.4 | +0.0 +0.1 | +0.0 | 35.3 | 40.0 | -4.7 | Vert |
| ^ | 62.756M | 58.3 | +0.0 +0.0 +1.4 | +0.0 +8.4 | +0.0 -28.4 | +0.0 +0.1 | +0.0 | 39.8 | 40.0 | -0.2 | Vert |

| | | | | | | | | | | | |
|----|----------------|------|-----------------------|---------------|---------------|--------------|------|------|------|------|-------|
| 48 | 107.652M QP | 51.6 | +0.0 +0.0 +1.9 | +0.0 +13.6 | +0.0 -28.4 | +0.0 +0.1 | +0.0 | 38.8 | 43.5 | -4.7 | Vert |
| ^ | 107.652M | 54.4 | +0.0 +0.0 +1.9 | +0.0 +13.6 | +0.0 -28.4 | +0.0 +0.1 | +0.0 | 41.6 | 43.5 | -1.9 | Vert |
| 50 | 104.695M | 52.1 | +0.0 +0.0 +1.8 | +0.0 +13.0 | +0.0 -28.4 | +0.0 +0.1 | +0.0 | 38.6 | 43.5 | -4.9 | Vert |
| 51 | 114.634M | 49.8 | +0.0 +0.0 +1.9 | +0.0 +14.9 | +0.0 -28.3 | +0.0 +0.2 | +0.0 | 38.5 | 43.5 | -5.0 | Vert |
| 52 | 209.958M | 46.2 | +0.0 +0.0 +2.6 | +0.0 +17.9 | +0.0 -28.4 | +0.0 +0.2 | +0.0 | 38.5 | 43.5 | -5.0 | Horiz |
| 53 | 37.023M | 45.9 | +0.0 +0.0 +1.1 | +0.0 +16.4 | +0.0 -28.5 | +0.0 +0.1 | +0.0 | 35.0 | 40.0 | -5.0 | Vert |
| 54 | 575.994M QP | 43.3 | +0.0 +20.1 +4.8 | +0.0 +0.0 | +0.0 -27.8 | +0.0 +0.4 | +0.0 | 40.8 | 46.0 | -5.2 | Horiz |
| ^ | 575.996M | 44.1 | +0.0 +20.1 +4.8 | +0.0 +0.0 | +0.0 -27.8 | +0.0 +0.4 | +0.0 | 41.6 | 46.0 | -4.4 | Horiz |
| 56 | 200.000M | 46.1 | +0.0 +0.0 +2.6 | +0.0 +17.7 | +0.0 -28.4 | +0.0 +0.2 | +0.0 | 38.2 | 43.5 | -5.3 | Vert |
| 57 | 299.990M | 42.5 | +0.0 +0.0 +3.3 | +0.0 +22.9 | +0.0 -28.3 | +0.0 +0.3 | +0.0 | 40.7 | 46.0 | -5.3 | Vert |
| 58 | 703.977M QP | 40.7 | +0.0 +21.6 +5.2 | +0.0 +0.0 | +0.0 -27.4 | +0.0 +0.4 | +0.0 | 40.5 | 46.0 | -5.5 | Vert |
| ^ | 703.984M | 41.9 | +0.0 +21.6 +5.2 | +0.0 +0.0 | +0.0 -27.4 | +0.0 +0.4 | +0.0 | 41.7 | 46.0 | -4.3 | Vert |
| 60 | 319.995M | 43.7 | +0.0 +21.4 +3.4 | +0.0 +0.0 | +0.0 -28.3 | +0.0 +0.3 | +0.0 | 40.5 | 46.0 | -5.5 | Horiz |
| 61 | 111.559M QP | 49.9 | +0.0 +0.0 +1.9 | +0.0 +14.3 | +0.0 -28.4 | +0.0 +0.1 | +0.0 | 37.8 | 43.5 | -5.7 | Horiz |
| ^ | 111.561M | 52.0 | +0.0 +0.0 +1.9 | +0.0 +14.3 | +0.0 -28.4 | +0.0 +0.1 | +0.0 | 39.9 | 43.5 | -3.6 | Horiz |
| 63 | 400.010M | 47.4 | +0.0 +16.9 +3.8 | +0.0 +0.0 | +0.0 -28.2 | +0.0 +0.3 | +0.0 | 40.2 | 46.0 | -5.8 | Horiz |
| 64 | 46.745M | 48.9 | +0.0 +0.0 +1.2 | +0.0 +12.4 | +0.0 -28.4 | +0.0 +0.1 | +0.0 | 34.2 | 40.0 | -5.8 | Vert |

| | | | | | | | | | | | |
|----|----------------|------|-----------------------|---------------|---------------|--------------|------|------|------|------|-------|
| 65 | 124.977M | 47.5 | +0.0 +0.0 +2.0 | +0.0 +16.2 | +0.0 -28.3 | +0.0 +0.2 | +0.0 | 37.6 | 43.5 | -5.9 | Vert |
| 66 | 320.079M | 43.2 | +0.0 +21.4 +3.4 | +0.0 +0.0 | +0.0 -28.3 | +0.0 +0.3 | +0.0 | 40.0 | 46.0 | -6.0 | Vert |
| 67 | 639.974M QP | 41.2 | +0.0 +20.8 +5.1 | +0.0 +0.0 | +0.0 -27.5 | +0.0 +0.4 | +0.0 | 40.0 | 46.0 | -6.0 | Horiz |
| ^ | 639.990M | 43.2 | +0.0 +20.8 +5.1 | +0.0 +0.0 | +0.0 -27.5 | +0.0 +0.4 | +0.0 | 42.0 | 46.0 | -4.0 | Horiz |
| 69 | 77.809M | 53.2 | +0.0 +0.0 +1.6 | +0.0 +7.4 | +0.0 -28.5 | +0.0 +0.1 | +0.0 | 33.8 | 40.0 | -6.2 | Horiz |
| 70 | 48.037M QP | 49.2 | +11.5 | -28.3 | +0.1 | +1.2 | +0.0 | 33.7 | 40.0 | -6.3 | Vert |
| ^ | 47.961M | 52.7 | +11.6 | -28.3 | +0.1 | +1.2 | +0.0 | 37.3 | 40.0 | -2.7 | Vert |
| 72 | 704.015M | 39.3 | +0.0 +21.6 +5.2 | +0.0 +0.0 | +0.0 -27.4 | +0.0 +0.4 | +0.0 | 39.1 | 46.0 | -6.9 | Horiz |
| 73 | 350.009M | 43.9 | +0.0 +19.6 +3.5 | +0.0 +0.0 | +0.0 -28.3 | +0.0 +0.3 | +0.0 | 39.0 | 46.0 | -7.0 | Vert |
| 74 | 800.077M | 37.8 | +0.0 +22.2 +5.7 | +0.0 +0.0 | +0.0 -27.5 | +0.0 +0.5 | +0.0 | 38.7 | 46.0 | -7.3 | Horiz |
| 75 | 639.999M | 39.9 | +0.0 +20.8 +5.1 | +0.0 +0.0 | +0.0 -27.5 | +0.0 +0.4 | +0.0 | 38.7 | 46.0 | -7.3 | Vert |
| 76 | 450.013M | 44.2 | +0.0 +18.4 +4.0 | +0.0 +0.0 | +0.0 -28.3 | +0.0 +0.4 | +0.0 | 38.7 | 46.0 | -7.3 | Horiz |
| 77 | 96.131M | 51.7 | +0.0 +0.0 +1.7 | +0.0 +11.1 | +0.0 -28.4 | +0.0 +0.1 | +0.0 | 36.2 | 43.5 | -7.3 | Vert |
| 78 | 100.031M | 50.5 | +0.0 +0.0 +1.8 | +0.0 +12.1 | +0.0 -28.4 | +0.0 +0.1 | +0.0 | 36.1 | 43.5 | -7.4 | Vert |
| 79 | 599.996M | 40.5 | +0.0 +20.2 +4.9 | +0.0 +0.0 | +0.0 -27.7 | +0.0 +0.4 | +0.0 | 38.3 | 46.0 | -7.7 | Vert |
| 80 | 117.057M | 46.7 | +0.0 +0.0 +1.9 | +0.0 +15.3 | +0.0 -28.3 | +0.0 +0.2 | +0.0 | 35.8 | 43.5 | -7.7 | Vert |
| 81 | 768.010M | 37.5 | +0.0 +22.0 +5.6 | +0.0 +0.0 | +0.0 -27.5 | +0.0 +0.4 | +0.0 | 38.0 | 46.0 | -8.0 | Horiz |

| | | | | | | | | | | | |
|----|----------|------|-----------------------|---------------|---------------|--------------|------|------|------|-------|-------|
| 82 | 116.296M | 46.5 | +0.0 +0.0 +1.9 | +0.0 +15.2 | +0.0 -28.3 | +0.0 +0.2 | +0.0 | 35.5 | 43.5 | -8.0 | Vert |
| 83 | 449.986M | 43.4 | +0.0 +18.4 +4.0 | +0.0 +0.0 | +0.0 -28.3 | +0.0 +0.4 | +0.0 | 37.9 | 46.0 | -8.1 | Vert |
| 84 | 699.988M | 38.0 | +0.0 +21.6 +5.2 | +0.0 +0.0 | +0.0 -27.4 | +0.0 +0.4 | +0.0 | 37.8 | 46.0 | -8.2 | Horiz |
| 85 | 255.994M | 43.7 | +0.0 +0.0 +2.9 | +0.0 +19.2 | +0.0 -28.3 | +0.0 +0.3 | +0.0 | 37.8 | 46.0 | -8.2 | Horiz |
| 86 | 499.992M | 41.1 | +0.0 +19.8 +4.4 | +0.0 +0.0 | +0.0 -28.1 | +0.0 +0.4 | +0.0 | 37.6 | 46.0 | -8.4 | Horiz |
| 87 | 550.094M | 40.4 | +0.0 +20.0 +4.6 | +0.0 +0.0 | +0.0 -27.9 | +0.0 +0.4 | +0.0 | 37.5 | 46.0 | -8.5 | Vert |
| 88 | 80.910M | 50.6 | +0.0 +0.0 +1.6 | +0.0 +7.7 | +0.0 -28.5 | +0.0 +0.1 | +0.0 | 31.5 | 40.0 | -8.5 | Vert |
| 89 | 37.538M | 41.9 | +0.0 +0.0 +1.1 | +0.0 +16.3 | +0.0 -28.5 | +0.0 +0.1 | +0.0 | 30.9 | 40.0 | -9.1 | Horiz |
| 90 | 117.655M | 45.2 | +0.0 +0.0 +1.9 | +0.0 +15.4 | +0.0 -28.3 | +0.0 +0.2 | +0.0 | 34.4 | 43.5 | -9.1 | Vert |
| 91 | 114.674M | 45.6 | +0.0 +0.0 +1.9 | +0.0 +14.9 | +0.0 -28.3 | +0.0 +0.2 | +0.0 | 34.3 | 43.5 | -9.2 | Horiz |
| 92 | 768.007M | 36.2 | +0.0 +22.0 +5.6 | +0.0 +0.0 | +0.0 -27.5 | +0.0 +0.4 | +0.0 | 36.7 | 46.0 | -9.3 | Vert |
| 93 | 60.002M | 48.3 | +0.0 +0.0 +1.3 | +0.0 +9.0 | +0.0 -28.4 | +0.0 +0.1 | +0.0 | 30.3 | 40.0 | -9.7 | Vert |
| 94 | 61.595M | 48.7 | +0.0 +0.0 +1.3 | +0.0 +8.6 | +0.0 -28.4 | +0.0 +0.1 | +0.0 | 30.3 | 40.0 | -9.7 | Horiz |
| 95 | 699.994M | 36.4 | +0.0 +21.6 +5.2 | +0.0 +0.0 | +0.0 -27.4 | +0.0 +0.4 | +0.0 | 36.2 | 46.0 | -9.8 | Vert |
| 96 | 511.994M | 39.3 | +0.0 +19.9 +4.4 | +0.0 +0.0 | +0.0 -28.1 | +0.0 +0.4 | +0.0 | 35.9 | 46.0 | -10.1 | Horiz |
| 97 | 799.996M | 34.9 | +0.0 +22.2 +5.7 | +0.0 +0.0 | +0.0 -27.5 | +0.0 +0.5 | +0.0 | 35.8 | 46.0 | -10.2 | Vert |
| 98 | 92.406M | 47.5 | +0.0 +0.0 +1.7 | +0.0 +10.0 | +0.0 -28.5 | +0.0 +0.1 | +0.0 | 30.8 | 43.5 | -12.7 | Vert |

Test Location: CKC Laboratories, Inc. • 110 N. Olinda Place • Brea, CA 92823 • (714) 993-6112

Customer: **Motorola BCS**
 Specification: **FCC 15.107/15.207**
 Work Order #: **79346** Date: 08/16/2002
 Test Type: **Conducted Emissions** Time: 2:54:42 PM
 Equipment: **Cable Modem** Sequence#: 14
 Manufacturer: Motorola BCS Tested By: Stuart Yamamoto
 Model: SBG 1000 P5 120V 60Hz
 S/N: 00080ED2F1E0

Equipment Under Test (* = EUT):

| Function | Manufacturer | Model # | S/N |
|--------------|--------------|-------------|--------------|
| Cable Modem* | Motorola BCS | SBG 1000 P5 | 00080ED2F1E0 |

Support Devices:

| Function | Manufacturer | Model # | S/N |
|------------------|---------------------|------------|---------------|
| C6U Converter | General Instruments | C6U | J5M7000101358 |
| Hub | Bay Networks | DS104 | DS14H08355155 |
| Computer | Toshiba | PA1215UV | 04694236 |
| Computer | Dolch | L-PAC 585 | DCS2016538 |
| Thermal Printer | SII | DPU-414 | 1033083A |
| Mouse | Gateway | MOSXX | |
| Keyboard | Dell | SK-1000RS | M940111179 |
| Monitor | NEC | JC-1538VMA | 5900265EA |
| Computer | Gateway | G6-366C | 0013168086 |
| Parallel Printer | Epson | P156A | CMR1545596 |
| Head End | Cisco | uBR-MC11C | CN1ISS0AA |

Test Conditions / Notes:

The EUT is a cable modem. The EUT's USB and one of its ethernet ports is connected to a desktop computer via shielded cable. The other four ethernet ports are connected in loopback with shielded cables. Connected to the parallel port of the EUT is a thermal printer. The HPNA ports have unshielded terminated cables connected. The "F" connector port is connected to the remotely located support equipment. The desktop computer and one laptop computer are running hyperterminal and are pinging the ethernet through MS DOS. The Dolch computer is running the TFTP32 program. The EUT is transmitting on Channel 1. Temperature: 25°C, Humidity: 50%, Pressure: 100kPa. Voltage to EUT is 120 Vac 60Hz.

Transducer Legend:


| |
|--|
| |
|--|

Measurement Data: Reading listed by margin. Test Lead: Black

| # | Freq MHz | Rdng dBµV | dB | | | | Dist Table | Corr dBµV/m | Spec dBµV/m | Margin dB | Polar Ant |
|---|-------------|--------------|----|--|--|--|---------------|----------------|----------------|--------------|--------------|
| 1 | 3.315M | 39.3 | | | | | +0.0 | 39.3 | 48.0 | -8.7 | Black |
| 2 | 1.207M | 38.0 | | | | | +0.0 | 38.0 | 48.0 | -10.0 | Black |
| 3 | 4.044M | 36.3 | | | | | +0.0 | 36.3 | 48.0 | -11.7 | Black |
| 4 | 25.218M | 36.2 | | | | | +0.0 | 36.2 | 48.0 | -11.8 | Black |
| 5 | 3.979M | 35.7 | | | | | +0.0 | 35.7 | 48.0 | -12.3 | Black |

| | | | | | | | |
|----|----------|------|------|------|------|-------|-------|
| 6 | 656.778k | 35.6 | +0.0 | 35.6 | 48.0 | -12.4 | Black |
| 7 | 2.655M | 35.5 | +0.0 | 35.5 | 48.0 | -12.5 | Black |
| 8 | 4.767M | 35.5 | +0.0 | 35.5 | 48.0 | -12.5 | Black |
| 9 | 660.790k | 35.4 | +0.0 | 35.4 | 48.0 | -12.6 | Black |
| 10 | 3.911M | 35.4 | +0.0 | 35.4 | 48.0 | -12.6 | Black |
| 11 | 4.701M | 35.4 | +0.0 | 35.4 | 48.0 | -12.6 | Black |
| 12 | 5.230M | 35.4 | +0.0 | 35.4 | 48.0 | -12.6 | Black |
| 13 | 2.922M | 35.3 | +0.0 | 35.3 | 48.0 | -12.7 | Black |
| 14 | 3.780M | 35.3 | +0.0 | 35.3 | 48.0 | -12.7 | Black |
| 15 | 4.106M | 35.3 | +0.0 | 35.3 | 48.0 | -12.7 | Black |
| 16 | 4.177M | 35.3 | +0.0 | 35.3 | 48.0 | -12.7 | Black |
| 17 | 4.504M | 35.3 | +0.0 | 35.3 | 48.0 | -12.7 | Black |
| 18 | 4.830M | 35.3 | +0.0 | 35.3 | 48.0 | -12.7 | Black |
| 19 | 4.570M | 35.2 | +0.0 | 35.2 | 48.0 | -12.8 | Black |
| 20 | 3.512M | 35.1 | +0.0 | 35.1 | 48.0 | -12.9 | Black |
| 21 | 2.988M | 34.9 | +0.0 | 34.9 | 48.0 | -13.1 | Black |
| 22 | 4.894M | 34.9 | +0.0 | 34.9 | 48.0 | -13.1 | Black |
| 23 | 3.842M | 34.8 | +0.0 | 34.8 | 48.0 | -13.2 | Black |
| 24 | 5.029M | 34.8 | +0.0 | 34.8 | 48.0 | -13.2 | Black |
| 25 | 5.161M | 34.8 | +0.0 | 34.8 | 48.0 | -13.2 | Black |
| 26 | 4.374M | 34.7 | +0.0 | 34.7 | 48.0 | -13.3 | Black |
| 27 | 4.438M | 34.7 | +0.0 | 34.7 | 48.0 | -13.3 | Black |
| 28 | 5.095M | 34.7 | +0.0 | 34.7 | 48.0 | -13.3 | Black |
| 29 | 4.636M | 34.6 | +0.0 | 34.6 | 48.0 | -13.4 | Black |
| 30 | 5.625M | 34.6 | +0.0 | 34.6 | 48.0 | -13.4 | Black |

CKC Laboratories, Inc. Date: 08/16/2002 Time: 2:54:42 PM Motorola BCS WO#: 79346
FCC 15.207 Test Lead: Black 120V 60Hz Sequence#: 14
MOTOROLA BCS, SBG 1000 P5

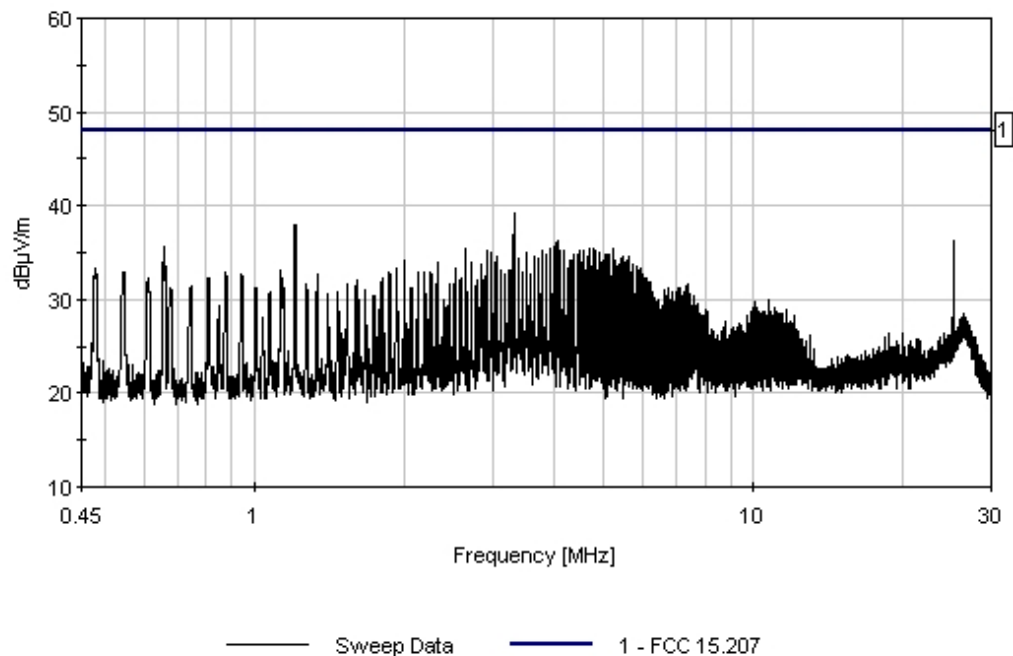

Test Location: CKC Laboratories, Inc. • 110 N. Olinda Place • Brea, CA 92823 • (714) 993-6112

Customer: **Motorola BCS**
 Specification: **FCC 15.107/15.207**
 Work Order #: **79346**
 Test Type: **Conducted Emissions**
 Equipment: **Cable Modem**
 Manufacturer: Motorola BCS
 Model: SBG 1000 P5
 S/N: 00080ED2F1E0

Date: 08/16/2002
 Time: 2:59:05 PM
 Sequence#: 15
 Tested By: Stuart Yamamoto
 120V 60Hz

Equipment Under Test (* = EUT):

| Function | Manufacturer | Model # | S/N |
|--------------|--------------|-------------|--------------|
| Cable Modem* | Motorola BCS | SBG 1000 P5 | 00080ED2F1E0 |

Support Devices:

| Function | Manufacturer | Model # | S/N |
|------------------|---------------------|------------|---------------|
| C6U Converter | General Instruments | C6U | J5M7000101358 |
| Hub | Bay Networks | DS104 | DS14H08355155 |
| Computer | Toshiba | PA1215UV | 04694236 |
| Computer | Dolch | L-PAC 585 | DCS2016538 |
| Thermal Printer | SII | DPU-414 | 1033083A |
| Mouse | Gateway | MOSXX | |
| Keyboard | Dell | SK-1000RS | M940111179 |
| Monitor | NEC | JC-1538VMA | 5900265EA |
| Computer | Gateway | G6-366C | 0013168086 |
| Parallel Printer | Epson | P156A | CMR1545596 |
| Head End | Cisco | uBR-MC11C | CN1ISS0AA |

Test Conditions / Notes:

The EUT is a cable modem. The EUT's USB and one of its ethernet ports is connected to a desktop computer via shielded cable. The other four ethernet ports are connected in loopback with shielded cables. Connected to the parallel port of the EUT is a thermal printer. The HPNA ports have unshielded terminated cables connected. The "F" connector port is connected to the remotely located support equipment. The desktop computer and one laptop computer are running hyperterminal and are pinging the ethernet through MS DOS. The Dolch computer is running the TFTP32 program. The EUT is transmitting on Channel 1. Temperature: 25°C, Humidity: 50%, Pressure: 100kPa. Voltage to EUT is 120 Vac 60Hz.

Transducer Legend:

| |
|--|
| |
|--|

Measurement Data:


Reading listed by margin.

Test Lead: White

| # | Freq MHz | Rdng dBµV | dB | dB | dB | dB | Dist Table | Corr dBµV/m | Spec dBµV/m | Margin dB | Polar Ant |
|---|-------------|--------------|----|----|----|----|---------------|----------------|----------------|--------------|--------------|
| 1 | 3.315M | 38.8 | | | | | +0.0 | 38.8 | 48.0 | -9.2 | White |
| 2 | 25.209M | 36.7 | | | | | +0.0 | 36.7 | 48.0 | -11.3 | White |
| 3 | 659.185k | 36.1 | | | | | +0.0 | 36.1 | 48.0 | -11.9 | White |
| 4 | 1.207M | 35.9 | | | | | +0.0 | 35.9 | 48.0 | -12.1 | White |
| 5 | 656.778k | 35.7 | | | | | +0.0 | 35.7 | 48.0 | -12.3 | White |

| | | | | | | | |
|----|--------|------|------|------|------|-------|-------|
| 6 | 4.044M | 35.1 | +0.0 | 35.1 | 48.0 | -12.9 | White |
| 7 | 3.975M | 34.2 | +0.0 | 34.2 | 48.0 | -13.8 | White |
| 8 | 7.274M | 33.7 | +0.0 | 33.7 | 48.0 | -14.3 | White |
| 9 | 2.920M | 33.5 | +0.0 | 33.5 | 48.0 | -14.5 | White |
| 10 | 3.052M | 33.5 | +0.0 | 33.5 | 48.0 | -14.5 | White |
| 11 | 4.108M | 33.5 | +0.0 | 33.5 | 48.0 | -14.5 | White |
| 12 | 4.177M | 33.3 | +0.0 | 33.3 | 48.0 | -14.7 | White |
| 13 | 4.374M | 33.3 | +0.0 | 33.3 | 48.0 | -14.7 | White |
| 14 | 7.208M | 33.2 | +0.0 | 33.2 | 48.0 | -14.8 | White |
| 15 | 7.340M | 33.2 | +0.0 | 33.2 | 48.0 | -14.8 | White |
| 16 | 4.307M | 33.1 | +0.0 | 33.1 | 48.0 | -14.9 | White |
| 17 | 6.877M | 33.0 | +0.0 | 33.0 | 48.0 | -15.0 | White |
| 18 | 6.940M | 33.0 | +0.0 | 33.0 | 48.0 | -15.0 | White |
| 19 | 7.009M | 33.0 | +0.0 | 33.0 | 48.0 | -15.0 | White |
| 20 | 3.379M | 32.9 | +0.0 | 32.9 | 48.0 | -15.1 | White |
| 21 | 4.243M | 32.9 | +0.0 | 32.9 | 48.0 | -15.1 | White |
| 22 | 7.399M | 32.9 | +0.0 | 32.9 | 48.0 | -15.1 | White |
| 23 | 7.597M | 32.9 | +0.0 | 32.9 | 48.0 | -15.1 | White |
| 24 | 4.695M | 32.8 | +0.0 | 32.8 | 48.0 | -15.2 | White |
| 25 | 3.909M | 32.7 | +0.0 | 32.7 | 48.0 | -15.3 | White |
| 26 | 6.678M | 32.7 | +0.0 | 32.7 | 48.0 | -15.3 | White |
| 27 | 7.078M | 32.7 | +0.0 | 32.7 | 48.0 | -15.3 | White |
| 28 | 7.142M | 32.7 | +0.0 | 32.7 | 48.0 | -15.3 | White |
| 29 | 7.465M | 32.6 | +0.0 | 32.6 | 48.0 | -15.4 | White |
| 30 | 7.531M | 32.6 | +0.0 | 32.6 | 48.0 | -15.4 | White |

CKC Laboratories, Inc. Date: 08/16/2002 Time: 2:59:05 PM Motorola BCS WO#: 79346
FCC 15.207 Test Lead: White 120V 60Hz Sequence#: 15
MOTOROLA BCS, SBG 1000 P5

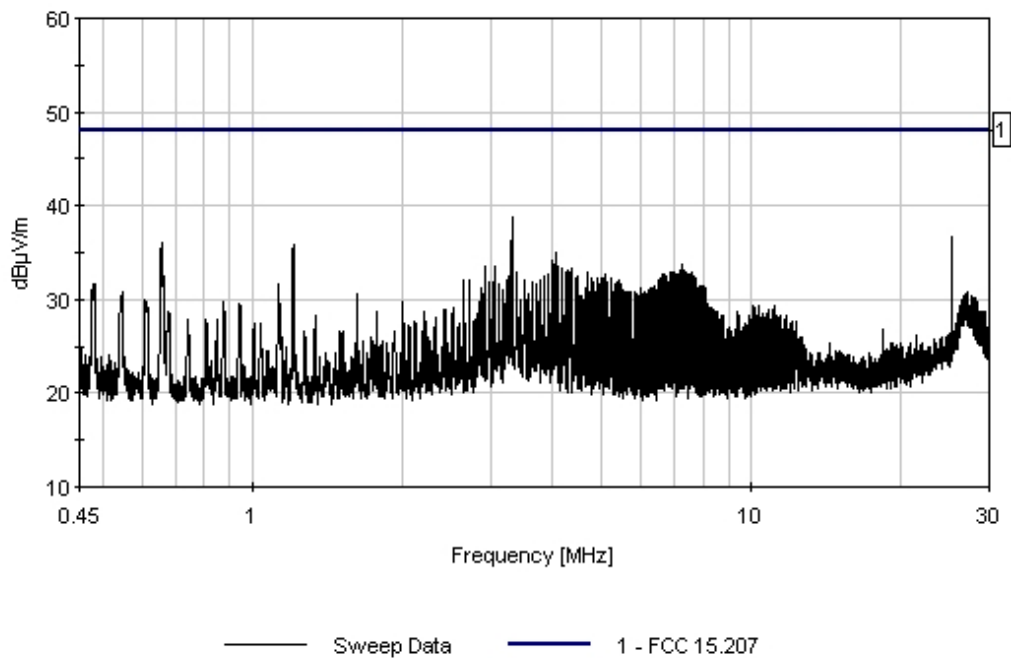

Test Location: CKC Laboratories, Inc. • 110 N. Olinda Place • Brea, CA 92823 • (714) 993-6112
 Customer: **Motorola BCS**
 Specification: **FCC 15.109 Class B**
 Work Order #: **79346** Date: 08/08/2002
 Test Type: **Maximized emission** Time: 14:04:01
 Equipment: **Cable Modem** Sequence#: 4
 Manufacturer: Motorola BCS Tested By: Stuart Yamamoto
 Model: SBG 1000 P5
 S/N: 00080ED2F1E0

Equipment Under Test (* = EUT):

| Function | Manufacturer | Model # | S/N |
|--------------|--------------|-------------|--------------|
| Cable Modem* | Motorola BCS | SBG 1000 P5 | 00080ED2F1E0 |

Support Devices:

| Function | Manufacturer | Model # | S/N |
|------------------|---------------------|------------|---------------|
| C6U Converter | General Instruments | C6U | J5M7000101358 |
| Hub | Bay Networks | DS104 | DS14H08355155 |
| Computer | Toshiba | PA1215UV | 04694236 |
| Computer | Dolch | L-PAC 585 | DCS2016538 |
| Thermal Printer | SII | DPU-414 | 1033083A |
| Mouse | Gateway | MOSXK | |
| Keyboard | Dell | SK-1000RS | M940111179 |
| Monitor | NEC | JC-1538VMA | 5900265EA |
| Computer | Gateway | G6-366C | 0013168086 |
| Parallel Printer | Epson | P156A | CMR1545596 |
| Head End | Cisco | uBR-MC11C | CN1ISS0AA |

Test Conditions / Notes:

The EUT is a cable modem. The EUT's USB and one of its ethernet ports is connected to a desktop computer via shielded cable. The other four ethernet ports are connected in loopback with shielded cables. Connected to the parallel port of the EUT is a thermal printer. The HPNA ports have unshielded terminated cables connected. The "F" connector port is connected to the remotely located support equipment. The desktop computer and one laptop computer are running hyperterminal and are pinging the ethernet through MS DOS. The Dolch computer is running the TFTP32 program. Temperature: 24°C, Humidity: 53%, Pressure: 100kPa. Voltage to EUT is 120 Vac 60Hz.

Transducer Legend:

| | |
|------------------------|---------------------|
| T1=Bicon 092401 | T2=Log 331 092401 |
| T3=Preamp 8447D 090501 | T4=Cable #10 070803 |
| T5=Cable #15 120602 | |

Measurement Data: Reading listed by margin. Test Distance: 3 Meters

| # | Freq | Rdng | T1 | T2 | T3 | T4 | Dist | Corr | Spec | Margin | Polar |
|----|----------|------------|-------|-------|-------|------|-------|--------------|--------------|--------|-------|
| | MHz | dB μ V | T5 | dB | dB | dB | Table | dB μ V/m | dB μ V/m | dB | Ant |
| 1 | 48.065M | 52.1 | +11.5 | +0.0 | -28.3 | +0.1 | +0.0 | 36.6 | 40.0 | -3.4 | Vert |
| QP | | | +1.2 | | | | | | | | |
| ^ | 48.069M | 55.3 | +11.5 | +0.0 | -28.3 | +0.1 | +0.0 | 39.8 | 40.0 | -0.2 | Vert |
| | | | +1.2 | | | | | | | | |
| 3 | 640.054M | 44.2 | +0.0 | +20.5 | -27.9 | +0.4 | +0.0 | 42.3 | 46.0 | -3.7 | Horiz |
| QP | | | +5.1 | | | | | | | | |
| ^ | 640.064M | 45.5 | +0.0 | +20.5 | -27.9 | +0.4 | +0.0 | 43.6 | 46.0 | -2.4 | Horiz |
| | | | +5.1 | | | | | | | | |

| | | | | | | | | | | | |
|----|----------|------|-------|-------|-------|------|------|------|------|------|-------|
| 5 | 82.547M | 53.5 | +7.4 | +0.0 | -28.2 | +0.1 | +0.0 | 34.4 | 40.0 | -5.6 | Horiz |
| | QP | | +1.6 | | | | | | | | |
| ^ | 82.584M | 57.0 | +7.4 | +0.0 | -28.2 | +0.1 | +0.0 | 37.9 | 40.0 | -2.1 | Horiz |
| | | | +1.6 | | | | | | | | |
| 7 | 390.013M | 48.4 | +0.0 | +16.1 | -28.3 | +0.3 | +0.0 | 40.2 | 46.0 | -5.8 | Horiz |
| | QP | | +3.7 | | | | | | | | |
| ^ | 390.017M | 49.0 | +0.0 | +16.1 | -28.3 | +0.3 | +0.0 | 40.8 | 46.0 | -5.2 | Horiz |
| | | | +3.7 | | | | | | | | |
| 9 | 46.844M | 49.1 | +12.0 | +0.0 | -28.3 | +0.1 | +0.0 | 34.1 | 40.0 | -5.9 | Vert |
| | QP | | +1.2 | | | | | | | | |
| ^ | 46.857M | 51.9 | +11.9 | +0.0 | -28.3 | +0.1 | +0.0 | 36.8 | 40.0 | -3.2 | Vert |
| | | | +1.2 | | | | | | | | |
| 11 | 768.046M | 39.7 | +0.0 | +21.9 | -27.8 | +0.4 | +0.0 | 39.8 | 46.0 | -6.2 | Vert |
| | QP | | +5.6 | | | | | | | | |
| ^ | 768.053M | 40.7 | +0.0 | +21.9 | -27.8 | +0.4 | +0.0 | 40.8 | 46.0 | -5.2 | Vert |
| | | | +5.6 | | | | | | | | |
| 13 | 330.057M | 44.1 | +0.0 | +20.2 | -28.2 | +0.3 | +0.0 | 39.8 | 46.0 | -6.2 | Horiz |
| | | | +3.4 | | | | | | | | |
| 14 | 640.051M | 41.6 | +0.0 | +20.5 | -27.9 | +0.4 | +0.0 | 39.7 | 46.0 | -6.3 | Vert |
| | QP | | +5.1 | | | | | | | | |
| ^ | 640.077M | 43.3 | +0.0 | +20.5 | -27.9 | +0.4 | +0.0 | 41.4 | 46.0 | -4.6 | Vert |
| | | | +5.1 | | | | | | | | |
| 16 | 390.010M | 47.9 | +0.0 | +16.1 | -28.3 | +0.3 | +0.0 | 39.7 | 46.0 | -6.3 | Vert |
| | | | +3.7 | | | | | | | | |
| 17 | 768.087M | 39.6 | +0.0 | +21.9 | -27.8 | +0.4 | +0.0 | 39.7 | 46.0 | -6.3 | Horiz |
| | QP | | +5.6 | | | | | | | | |
| ^ | 768.077M | 40.1 | +0.0 | +21.9 | -27.8 | +0.4 | +0.0 | 40.2 | 46.0 | -5.8 | Horiz |
| | | | +5.6 | | | | | | | | |
| 19 | 77.895M | 53.2 | +6.8 | +0.0 | -28.3 | +0.1 | +0.0 | 33.4 | 40.0 | -6.6 | Horiz |
| | | | +1.6 | | | | | | | | |
| 20 | 600.066M | 43.0 | +0.0 | +18.9 | -28.1 | +0.4 | +0.0 | 39.1 | 46.0 | -6.9 | Horiz |
| | | | +4.9 | | | | | | | | |
| 21 | 331.878M | 43.6 | +0.0 | +20.0 | -28.2 | +0.3 | +0.0 | 39.1 | 46.0 | -6.9 | Horiz |
| | | | +3.4 | | | | | | | | |
| 22 | 112.552M | 48.8 | +14.0 | +0.0 | -28.4 | +0.2 | +0.0 | 36.5 | 43.5 | -7.0 | Vert |
| | QP | | +1.9 | | | | | | | | |
| ^ | 112.549M | 50.1 | +14.0 | +0.0 | -28.4 | +0.2 | +0.0 | 37.8 | 43.5 | -5.7 | Vert |
| | | | +1.9 | | | | | | | | |
| 24 | 350.056M | 44.6 | +0.0 | +18.7 | -28.2 | +0.3 | +0.0 | 38.9 | 46.0 | -7.1 | Horiz |
| | QP | | +3.5 | | | | | | | | |
| ^ | 350.068M | 46.2 | +0.0 | +18.7 | -28.2 | +0.3 | +0.0 | 40.5 | 46.0 | -5.5 | Horiz |
| | | | +3.5 | | | | | | | | |
| 26 | 320.090M | 42.6 | +0.0 | +20.9 | -28.3 | +0.3 | +0.0 | 38.9 | 46.0 | -7.1 | Horiz |
| | QP | | +3.4 | | | | | | | | |
| ^ | 320.055M | 43.7 | +0.0 | +20.9 | -28.3 | +0.3 | +0.0 | 40.0 | 46.0 | -6.0 | Horiz |
| | | | +3.4 | | | | | | | | |
| 28 | 176.264M | 44.6 | +17.4 | +0.0 | -28.2 | +0.2 | +0.0 | 36.4 | 43.5 | -7.1 | Horiz |
| | QP | | +2.4 | | | | | | | | |
| ^ | 176.262M | 46.2 | +17.4 | +0.0 | -28.2 | +0.2 | +0.0 | 38.0 | 43.5 | -5.5 | Horiz |
| | | | +2.4 | | | | | | | | |

| | | | | | | | | | | | |
|----|----------------|------|---------------|-------|-------|------|------|------|------|------|-------|
| 30 | 37.411M QP | 44.7 | +15.4 +1.1 | +0.0 | -28.4 | +0.1 | +0.0 | 32.9 | 40.0 | -7.1 | Vert |
| ^ | 37.411M | 46.9 | +15.4 +1.1 | +0.0 | -28.4 | +0.1 | +0.0 | 35.1 | 40.0 | -4.9 | Vert |
| 32 | 70.802M | 53.0 | +6.9 +1.5 | +0.0 | -28.6 | +0.1 | +0.0 | 32.9 | 40.0 | -7.1 | Vert |
| 33 | 350.093M | 44.5 | +0.0 +3.5 | +18.7 | -28.2 | +0.3 | +0.0 | 38.8 | 46.0 | -7.2 | Vert |
| 34 | 704.906M | 38.6 | +0.0 +5.2 | +22.6 | -28.0 | +0.4 | +0.0 | 38.8 | 46.0 | -7.2 | Horiz |
| 35 | 300.071M | 41.0 | +0.0 +3.3 | +22.5 | -28.3 | +0.3 | +0.0 | 38.8 | 46.0 | -7.2 | Horiz |
| 36 | 400.060M QP | 47.4 | +0.0 +3.8 | +15.5 | -28.3 | +0.3 | +0.0 | 38.7 | 46.0 | -7.3 | Horiz |
| ^ | 400.068M | 49.2 | +0.0 +3.8 | +15.5 | -28.3 | +0.3 | +0.0 | 40.5 | 46.0 | -5.5 | Horiz |
| 38 | 800.050M | 38.5 | +0.0 +5.7 | +21.5 | -27.6 | +0.5 | +0.0 | 38.6 | 46.0 | -7.4 | Horiz |
| 39 | 112.567M | 48.4 | +14.0 +1.9 | +0.0 | -28.4 | +0.2 | +0.0 | 36.1 | 43.5 | -7.4 | Horiz |
| 40 | 76.277M | 52.1 | +6.8 +1.6 | +0.0 | -28.3 | +0.1 | +0.0 | 32.3 | 40.0 | -7.7 | Horiz |
| 41 | 665.304M | 39.1 | +0.0 +5.1 | +21.4 | -27.9 | +0.4 | +0.0 | 38.1 | 46.0 | -7.9 | Horiz |
| 42 | 449.191M | 46.2 | +0.0 +4.0 | +16.2 | -28.7 | +0.4 | +0.0 | 38.1 | 46.0 | -7.9 | Horiz |
| 43 | 760.337M | 37.8 | +0.0 +5.5 | +22.0 | -27.8 | +0.4 | +0.0 | 37.9 | 46.0 | -8.1 | Vert |
| 44 | 599.988M | 41.8 | +0.0 +4.9 | +18.9 | -28.1 | +0.4 | +0.0 | 37.9 | 46.0 | -8.1 | Vert |
| 45 | 37.586M QP | 43.7 | +15.4 +1.1 | +0.0 | -28.4 | +0.1 | +0.0 | 31.9 | 40.0 | -8.1 | Horiz |
| ^ | 37.565M | 47.2 | +15.4 +1.1 | +0.0 | -28.4 | +0.1 | +0.0 | 35.4 | 40.0 | -4.6 | Horiz |
| 47 | 550.061M | 43.5 | +0.0 +4.6 | +17.9 | -28.6 | +0.4 | +0.0 | 37.8 | 46.0 | -8.2 | Vert |
| 48 | 80.786M | 51.3 | +7.0 +1.6 | +0.0 | -28.2 | +0.1 | +0.0 | 31.8 | 40.0 | -8.2 | Vert |
| 49 | 330.042M | 42.0 | +0.0 +3.4 | +20.2 | -28.2 | +0.3 | +0.0 | 37.7 | 46.0 | -8.3 | Vert |
| 50 | 61.664M | 50.9 | +7.9 +1.3 | +0.0 | -28.6 | +0.1 | +0.0 | 31.6 | 40.0 | -8.4 | Horiz |
| 51 | 464.476M | 45.2 | +0.0 +4.1 | +16.4 | -28.6 | +0.4 | +0.0 | 37.5 | 46.0 | -8.5 | Horiz |
| 52 | 104.989M | 49.0 | +12.5 +1.8 | +0.0 | -28.4 | +0.1 | +0.0 | 35.0 | 43.5 | -8.5 | Vert |
| 53 | 320.067M | 41.1 | +0.0 +3.4 | +20.9 | -28.3 | +0.3 | +0.0 | 37.4 | 46.0 | -8.6 | Vert |
| 54 | 100.088M | 49.9 | +11.5 +1.8 | +0.0 | -28.4 | +0.1 | +0.0 | 34.9 | 43.5 | -8.6 | Horiz |

| | | | | | | | | | | | |
|----|----------|------|---------------|-------|-------|------|------|------|------|-------|-------|
| 55 | 760.270M | 37.1 | +0.0 +5.5 | +22.0 | -27.8 | +0.4 | +0.0 | 37.2 | 46.0 | -8.8 | Horiz |
| 56 | 200.046M | 43.5 | +16.8 +2.6 | +0.0 | -28.4 | +0.2 | +0.0 | 34.7 | 43.5 | -8.8 | Horiz |
| 57 | 500.080M | 43.9 | +0.0 +4.4 | +16.9 | -28.5 | +0.4 | +0.0 | 37.1 | 46.0 | -8.9 | Horiz |
| 58 | 665.285M | 37.6 | +0.0 +5.1 | +21.4 | -27.9 | +0.4 | +0.0 | 36.6 | 46.0 | -9.4 | Vert |
| 59 | 449.235M | 44.7 | +0.0 +4.0 | +16.2 | -28.7 | +0.4 | +0.0 | 36.6 | 46.0 | -9.4 | Vert |
| 60 | 105.047M | 48.1 | +12.5 +1.8 | +0.0 | -28.4 | +0.1 | +0.0 | 34.1 | 43.5 | -9.4 | Horiz |
| 61 | 176.289M | 42.2 | +17.4 +2.4 | +0.0 | -28.2 | +0.2 | +0.0 | 34.0 | 43.5 | -9.5 | Vert |
| 62 | 500.027M | 43.2 | +0.0 +4.4 | +16.9 | -28.5 | +0.4 | +0.0 | 36.4 | 46.0 | -9.6 | Vert |
| 63 | 200.076M | 42.7 | +16.8 +2.6 | +0.0 | -28.4 | +0.2 | +0.0 | 33.9 | 43.5 | -9.6 | Vert |
| 64 | 400.053M | 45.0 | +0.0 +3.8 | +15.5 | -28.3 | +0.3 | +0.0 | 36.3 | 46.0 | -9.7 | Vert |
| 65 | 800.052M | 36.1 | +0.0 +5.7 | +21.5 | -27.6 | +0.5 | +0.0 | 36.2 | 46.0 | -9.8 | Vert |
| 66 | 512.048M | 42.6 | +0.0 +4.4 | +17.2 | -28.5 | +0.4 | +0.0 | 36.1 | 46.0 | -9.9 | Vert |
| 67 | 256.094M | 42.6 | +18.4 +3.0 | +0.0 | -28.2 | +0.3 | +0.0 | 36.1 | 46.0 | -9.9 | Horiz |
| 68 | 272.122M | 40.9 | +19.8 +3.1 | +0.0 | -28.3 | +0.3 | +0.0 | 35.8 | 46.0 | -10.2 | Horiz |
| 69 | 512.050M | 42.2 | +0.0 +4.4 | +17.2 | -28.5 | +0.4 | +0.0 | 35.7 | 46.0 | -10.3 | Horiz |
| 70 | 65.106M | 49.1 | +7.5 +1.4 | +0.0 | -28.6 | +0.1 | +0.0 | 29.5 | 40.0 | -10.5 | Horiz |
| 71 | 200.603M | 41.7 | +16.8 +2.6 | +0.0 | -28.4 | +0.2 | +0.0 | 32.9 | 43.5 | -10.6 | Horiz |
| 72 | 100.001M | 47.6 | +11.5 +1.8 | +0.0 | -28.4 | +0.1 | +0.0 | 32.6 | 43.5 | -10.9 | Vert |
| 73 | 61.294M | 48.3 | +7.9 +1.3 | +0.0 | -28.6 | +0.1 | +0.0 | 29.0 | 40.0 | -11.0 | Vert |
| ^ | 61.242M | 54.1 | +7.9 +1.3 | +0.0 | -28.6 | +0.1 | +0.0 | 34.8 | 40.0 | -5.2 | Vert |
| 75 | 331.834M | 39.4 | +0.0 +3.4 | +20.0 | -28.2 | +0.3 | +0.0 | 34.9 | 46.0 | -11.1 | Vert |
| 76 | 384.091M | 40.8 | +0.0 +3.7 | +16.5 | -28.3 | +0.3 | +0.0 | 33.0 | 46.0 | -13.0 | Vert |
| 77 | 200.504M | 38.7 | +16.8 +2.6 | +0.0 | -28.4 | +0.2 | +0.0 | 29.9 | 43.5 | -13.6 | Vert |
| 78 | 96.095M | 45.0 | +10.6 +1.7 | +0.0 | -28.3 | +0.1 | +0.0 | 29.1 | 43.5 | -14.4 | Vert |

Test Location: CKC Laboratories, Inc. • 110 N. Olinda Place • Brea, CA 92823 • (714) 993-6112

Customer: **Motorola BCS**
 Specification: **FCC 15.209**
 Work Order #: **79346** Date: 11/15/2002
 Test Type: **Maximized emission** Time: 14:11:00
 Equipment: **Cable Modem** Sequence#: 1
 Manufacturer: Motorola BCS Tested By: Stuart Yamamoto
 Model: SBG 1000 P-7
 S/N: 00080ED30158

Equipment Under Test (* = EUT):

| Function | Manufacturer | Model # | S/N |
|--------------|---------------------------------------|--------------|--------------|
| Cable Modem* | Motorola BCS | SBG 1000 P-7 | 00080ED30158 |
| Antenna | Centurion Wireless Technologies, Inc. | CAF94333 | |

Support Devices:

| Function | Manufacturer | Model # | S/N |
|-----------------|---------------------|------------|---------------|
| Head In | Cisco | uBR-MC11C | CN1ISS0AA |
| C6U Converter | General Instruments | C6U | J5M7000101358 |
| Hub | Bay Networks | DS104 | DS14H08355155 |
| Computer | Toshiba | PA1215UV | 04694236 |
| Computer | Dolch | L-PAC 585 | DCS2016538 |
| Thermal Printer | SII | DPU-414 | 1033083A |
| Mouse | Gateway | MOSXX | |
| Keyboard | Dell | SK-1000RS | M940111179 |
| Monitor | NEC | JC-1538VMA | 5900265EA |
| Computer | Gateway | G6-366C | 0013168086 |

Test Conditions / Notes:

The EUT is a cable modem (32MB SDRAM). The EUT's USB and one of its ethernet ports is connected to a desktop computer via shielded cable. The other four ethernet ports are connected in loopback with unshielded cat. 5 cables. Connected to the parallel port of the EUT is a thermal printer. One of the HPNA ports has an unshielded terminated cable connected. The F connector port is connected to the remotely located support equipment. The desktop computer and one laptop computer are running hyperterminal and are pinging the ethernet through MS DOS. The Dolch computer is running the TFTP32 program. The EUT is transmitting on Channel 1. Temperature: 22°C, Humidity: 42%, Pressure: 100kPa. Voltage to EUT is 120 Vac 60Hz. Data sheet represents emissions from the frequency range of 1 GHz to 12.1 GHz.

Transducer Legend:

| | |
|---------------------------|--------------------------------------|
| T1=Cable Heliac 48ft | T2=Horn 6246_091003 |
| T3=HP83017A Preamp 091103 | T4=20dB Attenuator |
| T5=10dB Attenuator | T6=3.5GHz High Pass Filter A/N 01416 |

Measurement Data:

| # | Freq | Rdng | Reading listed by margin. | | | | Test Distance: 3 Meters | | | | | |
|---|-----------|------|---------------------------|-------|-------|------|-------------------------|--------|--------|--------|-------|--|
| | | | T1 | T2 | T3 | T4 | Dist | Corr | Spec | Margin | Polar | |
| | MHz | dBµV | T5 | T6 | | | | | | | | |
| | | | dB | dB | dB | dB | Table | dBµV/m | dBµV/m | dB | Ant | |
| 1 | 7235.819M | 39.5 | +10.5 | +35.5 | -35.9 | +0.0 | +0.0 | 52.7 | 54.0 | -1.3 | Vert | |
| | Ave | | +0.0 | +3.1 | | | | | | | | |
| ^ | 7235.918M | 52.1 | +10.5 | +35.5 | -35.9 | +0.0 | +0.0 | 65.3 | 54.0 | +11.3 | Vert | |
| | | | +0.0 | +3.1 | | | | | | | | |

| | | | | | | | | | | | |
|----|------------------|------|---------------|---------------|-------|-------|------|------|------|-------|-------|
| 3 | 1608.005M Ave | 47.7 | +4.5 +10.0 | +25.8 +0.0 | -37.9 | +0.0 | +0.0 | 50.1 | 54.0 | -3.9 | Horiz |
| ^ | 1607.978M | 51.5 | +4.5 +10.0 | +25.8 +0.0 | -37.9 | +0.0 | +0.0 | 53.9 | 54.0 | -0.1 | Horiz |
| 5 | 7239.588M Ave | 36.8 | +10.5 +0.0 | +35.5 +0.0 | -35.9 | +0.0 | +0.0 | 50.0 | 54.0 | -4.0 | Horiz |
| ^ | 7239.519M | 47.7 | +10.5 +0.0 | +35.5 +3.1 | -35.9 | +0.0 | +0.0 | 60.9 | 54.0 | +6.9 | Horiz |
| 7 | 1600.049M | 47.0 | +4.5 +10.0 | +25.8 +0.0 | -37.9 | +0.0 | +0.0 | 49.4 | 54.0 | -4.6 | Vert |
| 8 | 1505.310M | 48.2 | +4.4 +10.0 | +25.1 +0.0 | -38.4 | +0.0 | +0.0 | 49.3 | 54.0 | -4.7 | Vert |
| 9 | 1807.324M Ave | 35.7 | +4.8 +0.0 | +27.0 +0.0 | -38.3 | +20.0 | +0.0 | 49.2 | 54.0 | -4.8 | Vert |
| ^ | 1807.350M | 44.9 | +4.8 +0.0 | +27.0 +0.0 | -38.3 | +20.0 | +0.0 | 58.4 | 54.0 | +4.4 | Vert |
| 11 | 1599.978M | 46.3 | +4.5 +10.0 | +25.8 +0.0 | -37.9 | +0.0 | +0.0 | 48.7 | 54.0 | -5.3 | Horiz |
| 12 | 1811.460M Ave | 34.9 | +4.8 +0.0 | +27.0 +0.0 | -38.3 | +20.0 | +0.0 | 48.4 | 54.0 | -5.6 | Vert |
| ^ | 1811.421M | 43.1 | +4.8 +0.0 | +27.0 +0.0 | -38.3 | +20.0 | +0.0 | 56.6 | 54.0 | +2.6 | Vert |
| 14 | 1811.470M Ave | 34.2 | +4.8 +0.0 | +27.0 +0.0 | -38.3 | +20.0 | +0.0 | 47.7 | 54.0 | -6.3 | Horiz |
| ^ | 1811.408M | 45.3 | +4.8 +0.0 | +27.0 +0.0 | -38.3 | +20.0 | +0.0 | 58.8 | 54.0 | +4.8 | Horiz |
| 16 | 1809.180M Ave | 34.1 | +4.8 +0.0 | +27.0 +0.0 | -38.3 | +20.0 | +0.0 | 47.6 | 54.0 | -6.4 | Horiz |
| ^ | 1809.220M | 44.6 | +4.8 +0.0 | +27.0 +0.0 | -38.3 | +20.0 | +0.0 | 58.1 | 54.0 | +4.1 | Horiz |
| 18 | 1024.122M | 48.2 | +3.9 +10.0 | +25.6 +0.0 | -40.7 | +0.0 | +0.0 | 47.0 | 54.0 | -7.0 | Vert |
| 19 | 1745.089M Ave | 41.6 | +4.7 +10.0 | +26.6 +0.0 | -38.1 | +0.0 | +0.0 | 44.8 | 54.0 | -9.2 | Horiz |
| ^ | 1745.102M | 48.6 | +4.7 +10.0 | +26.6 +0.0 | -38.1 | +0.0 | +0.0 | 51.8 | 54.0 | -2.2 | Horiz |
| 21 | 4824.010M Ave | 38.0 | +8.1 +0.0 | +33.3 +2.4 | -38.7 | +0.0 | +0.0 | 43.1 | 54.0 | -10.9 | Vert |
| ^ | 4824.000M | 50.5 | +8.1 +0.0 | +33.3 +2.4 | -38.7 | +0.0 | +0.0 | 55.6 | 54.0 | +1.6 | Vert |
| 23 | 1608.072M Ave | 40.0 | +4.5 +10.0 | +25.8 +0.0 | -37.9 | +0.0 | +0.0 | 42.4 | 54.0 | -11.6 | Vert |
| ^ | 1608.096M | 48.2 | +4.5 +10.0 | +25.8 +0.0 | -37.9 | +0.0 | +0.0 | 50.6 | 54.0 | -3.4 | Vert |
| 25 | 1505.450M Ave | 38.6 | +4.4 +10.0 | +25.1 +0.0 | -38.4 | +0.0 | +0.0 | 39.7 | 54.0 | -14.3 | Vert |
| 26 | 4824.086M Ave | 33.8 | +8.1 +0.0 | +33.3 +2.4 | -38.7 | +0.0 | +0.0 | 38.9 | 54.0 | -15.1 | Horiz |
| ^ | 4824.157M | 46.6 | +8.1 +0.0 | +33.3 +2.4 | -38.7 | +0.0 | +0.0 | 51.7 | 54.0 | -2.3 | Horiz |

Test Location: CKC Laboratories, Inc. • 110 N. Olinda Place • Brea, CA 92823 • (714) 993-6112

Customer: **Motorola BCS**
 Specification: **FCC 15.209**
 Work Order #: **79346** Date: 11/15/2002
 Test Type: **Maximized emission** Time: 14:58:13
 Equipment: **Cable Modem** Sequence#: 3
 Manufacturer: Motorola BCS Tested By: Stuart Yamamoto
 Model: SBG 1000 P-7
 S/N: 00080ED30158

Equipment Under Test (* = EUT):

| Function | Manufacturer | Model # | S/N |
|--------------|---------------------------------------|--------------|--------------|
| Cable Modem* | Motorola BCS | SBG 1000 P-7 | 00080ED30158 |
| Antenna | Centurion Wireless Technologies, Inc. | CAF94333 | |

Support Devices:

| Function | Manufacturer | Model # | S/N |
|-----------------|---------------------|------------|---------------|
| Head In | Cisco | uBR-MC11C | CN1ISS0AA |
| C6U Converter | General Instruments | C6U | J5M7000101358 |
| Hub | Bay Networks | DS104 | DS14H08355155 |
| Computer | Toshiba | PA1215UV | 04694236 |
| Computer | Dolch | L-PAC 585 | DCS2016538 |
| Thermal Printer | SII | DPU-414 | 1033083A |
| Mouse | Gateway | MOSXX | |
| Keyboard | Dell | SK-1000RS | M940111179 |
| Monitor | NEC | JC-1538VMA | 5900265EA |
| Computer | Gateway | G6-366C | 0013168086 |

Test Conditions / Notes:

The EUT is a cable modem (32MB SDRAM). The EUT's USB and one of its ethernet ports is connected to a desktop computer via shielded cable. The other four ethernet ports are connected in loopback with unshielded cat. 5 cables. Connected to the parallel port of the EUT is a thermal printer. One of the HPNA ports has an unshielded terminated cable connected. The F connector port is connected to the remotely located support equipment. The desktop computer and one laptop computer are running hyperterminal and are pinging the ethernet through MS DOS. The Dolch computer is running the TFTP32 program. The EUT is transmitting on Channel 6. Temperature: 22°C, Humidity: 42%, Pressure: 100kPa. Voltage to EUT is 120 Vac 60Hz. Data sheet represents emissions from the frequency range of 1 GHz to 12.9 GHz.

Transducer Legend:

| | |
|---------------------------|--------------------------------------|
| T1=Cable Heliac 48ft | T2=Horn 6246_091003 |
| T3=HP83017A Preamp 091103 | T4=20dB Attenuator |
| T5=10dB Attenuator | T6=3.5GHz High Pass Filter A/N 01416 |

Measurement Data:

| # | Freq | Rdng | Reading listed by margin. | | | | Test Distance: 3 Meters | | | | | |
|---|-----------|------|---------------------------|-------|-------|------|-------------------------|--------|--------|--------|-------|--|
| | | | T1 | T2 | T3 | T4 | Dist | Corr | Spec | Margin | Polar | |
| | MHz | dBµV | T5 | T6 | | | Table | dBµV/m | dBµV/m | dB | Ant | |
| 1 | 7310.990M | 36.8 | +10.4 | +35.7 | -35.9 | +0.0 | +0.0 | 50.0 | 54.0 | -4.0 | Vert | |
| | Ave | | +0.0 | +0.0 | | | | | | | | |
| ^ | 7310.998M | 47.7 | +10.4 | +35.7 | -35.9 | +0.0 | +0.0 | 60.9 | 54.0 | +6.9 | Vert | |
| | | | +0.0 | +3.0 | | | | | | | | |

| | | | | | | | | | | | |
|----|------------------|------|---------------|---------------|-------|-------|------|------|------|-------|-------|
| 3 | 1624.730M | 46.4 | +4.6 +10.0 | +25.9 +0.0 | -37.9 | +0.0 | +0.0 | 49.0 | 54.0 | -5.0 | Horiz |
| 4 | 7310.614M Ave | 35.5 | +10.4 +0.0 | +35.7 +0.0 | -35.9 | +0.0 | +0.0 | 48.7 | 54.0 | -5.3 | Horiz |
| ^ | 7310.656M | 46.3 | +10.4 +0.0 | +35.7 +3.0 | -35.9 | +0.0 | +0.0 | 59.5 | 54.0 | +5.5 | Horiz |
| 6 | 1845.237M Ave | 34.9 | +4.8 +0.0 | +27.2 +0.0 | -38.4 | +20.0 | +0.0 | 48.5 | 54.0 | -5.5 | Horiz |
| ^ | 1845.240M | 43.6 | +4.8 +0.0 | +27.2 +0.0 | -38.4 | +20.0 | +0.0 | 57.2 | 54.0 | +3.2 | Horiz |
| 8 | 1845.879M Ave | 34.7 | +4.8 +0.0 | +27.2 +0.0 | -38.4 | +20.0 | +0.0 | 48.3 | 54.0 | -5.7 | Vert |
| ^ | 1845.900M | 45.5 | +4.8 +0.0 | +27.2 +0.0 | -38.4 | +20.0 | +0.0 | 59.1 | 54.0 | +5.1 | Vert |
| 10 | 4873.799M Ave | 37.5 | +8.1 +0.0 | +33.4 +2.7 | -38.5 | +0.0 | +0.0 | 43.2 | 54.0 | -10.8 | Vert |
| ^ | 4873.729M | 49.8 | +8.1 +0.0 | +33.4 +2.7 | -38.5 | +0.0 | +0.0 | 55.5 | 54.0 | +1.5 | Vert |
| 12 | 1624.721M Ave | 39.2 | +4.6 +10.0 | +25.9 +0.0 | -37.9 | +0.0 | +0.0 | 41.8 | 54.0 | -12.2 | Vert |
| ^ | 1624.720M | 47.6 | +4.6 +10.0 | +25.9 +0.0 | -37.9 | +0.0 | +0.0 | 50.2 | 54.0 | -3.8 | Vert |
| 14 | 4874.107M Ave | 35.2 | +8.1 +0.0 | +33.4 +0.0 | -38.5 | +0.0 | +0.0 | 40.9 | 54.0 | -13.1 | Horiz |
| ^ | 4874.150M | 48.0 | +8.1 +0.0 | +33.4 +2.7 | -38.5 | +0.0 | +0.0 | 53.7 | 54.0 | -0.3 | Horiz |

Test Location: CKC Laboratories, Inc. • 110 N. Olinda Place • Brea, CA 92823 • (714) 993-6112

Customer: **Motorola BCS**
 Specification: **FCC 15.209**
 Work Order #: **79346** Date: 11/15/2002
 Test Type: **Maximized emission** Time: 16:26:19
 Equipment: **Cable Modem** Sequence#: 4
 Manufacturer: Motorola BCS Tested By: Stuart Yamamoto
 Model: SBG 1000 P-7
 S/N: 00080ED30158

Equipment Under Test (* = EUT):

| Function | Manufacturer | Model # | S/N |
|--------------|---------------------------------------|--------------|--------------|
| Cable Modem* | Motorola BCS | SBG 1000 P-7 | 00080ED30158 |
| Antenna | Centurion Wireless Technologies, Inc. | CAF94333 | |

Support Devices:

| Function | Manufacturer | Model # | S/N |
|-----------------|---------------------|------------|---------------|
| Head In | Cisco | uBR-MC11C | CN1ISS0AA |
| C6U Converter | General Instruments | C6U | J5M7000101358 |
| Hub | Bay Networks | DS104 | DS14H08355155 |
| Computer | Toshiba | PA1215UV | 04694236 |
| Computer | Dolch | L-PAC 585 | DCS2016538 |
| Thermal Printer | SII | DPU-414 | 1033083A |
| Mouse | Gateway | MOSXX | |
| Keyboard | Dell | SK-1000RS | M940111179 |
| Monitor | NEC | JC-1538VMA | 5900265EA |
| Computer | Gateway | G6-366C | 0013168086 |

Test Conditions / Notes:

The EUT is a cable modem (32MB SDRAM). The EUT's USB and one of its ethernet ports is connected to a desktop computer via shielded cable. The other four ethernet ports are connected in loopback with unshielded cat. 5 cables. Connected to the parallel port of the EUT is a thermal printer. One of the HPNA ports has an unshielded terminated cable connected. The F connector port is connected to the remotely located support equipment. The desktop computer and one laptop computer are running hyperterminal and are pinging the ethernet through MS DOS. The Dolch computer is running the TFTP32 program. The EUT is transmitting on Channel 11. Temperature: 22°C, Humidity: 42%, Pressure: 100kPa. oltage to EUT is 120 Vac 60Hz. Data sheet represents emissions from the frequency range of 1 GHz to 12.9 MHz.

Transducer Legend:

| | |
|---------------------------|--------------------------------------|
| T1=Cable Heliac 48ft | T2=Horn 6246_091003 |
| T3=HP83017A Preamp 091103 | T4=20dB Attenuator |
| T5=10dB Attenuator | T6=3.5GHz High Pass Filter A/N 01416 |

Measurement Data:

| # | Freq MHz | Rdng dBµV | Reading listed by margin. | | | | Test Distance: 3 Meters | | | | | |
|---|-------------|--------------|---------------------------|----------|----------|----------|-------------------------|----------------|----------------|--------------|--------------|--|
| | | | T1 dB | T2 dB | T3 dB | T4 dB | Dist Table | Corr dBµV/m | Spec dBµV/m | Margin dB | Polar Ant | |
| 1 | 1641.412M | 50.2 | +4.6 | +26.0 | -37.9 | +0.0 | +0.0 | 52.9 | 54.0 | -1.1 | Horiz | |
| | Ave | | +10.0 | +0.0 | | | | | | | | |
| ^ | 1641.354M | 54.0 | +4.6 | +26.0 | -37.9 | +0.0 | +0.0 | 56.7 | 54.0 | +2.7 | Horiz | |
| | | | +10.0 | +0.0 | | | | | | | | |

| | | | | | | | | | | | |
|----|-----------|------|-------|-------|-------|-------|------|------|------|-------|-------|
| 3 | 1882.261M | 38.0 | +4.9 | +27.4 | -38.5 | +20.0 | +0.0 | 51.8 | 54.0 | -2.2 | Vert |
| | Ave | | +0.0 | +0.0 | | | | | | | |
| ^ | 1882.218M | 49.5 | +4.9 | +27.4 | -38.5 | +20.0 | +0.0 | 63.3 | 54.0 | +9.3 | Vert |
| | | | +0.0 | +0.0 | | | | | | | |
| 5 | 1641.454M | 45.4 | +4.6 | +26.0 | -37.9 | +0.0 | +0.0 | 48.1 | 54.0 | -5.9 | Vert |
| | Ave | | +10.0 | +0.0 | | | | | | | |
| ^ | 1641.403M | 50.7 | +4.6 | +26.0 | -37.9 | +0.0 | +0.0 | 53.4 | 54.0 | -0.6 | Vert |
| | | | +10.0 | +0.0 | | | | | | | |
| 7 | 7385.757M | 34.5 | +10.4 | +35.9 | -36.0 | +0.0 | +0.0 | 47.7 | 54.0 | -6.3 | Horiz |
| | Ave | | +0.0 | +2.9 | | | | | | | |
| ^ | 7385.769M | 45.5 | +10.4 | +35.9 | -36.0 | +0.0 | +0.0 | 58.7 | 54.0 | +4.7 | Horiz |
| | | | +0.0 | +2.9 | | | | | | | |
| 9 | 7385.679M | 34.4 | +10.4 | +35.9 | -36.0 | +0.0 | +0.0 | 47.6 | 54.0 | -6.4 | Vert |
| | Ave | | +0.0 | +2.9 | | | | | | | |
| ^ | 7385.683M | 45.7 | +10.4 | +35.9 | -36.0 | +0.0 | +0.0 | 58.9 | 54.0 | +4.9 | Vert |
| | | | +0.0 | +2.9 | | | | | | | |
| 11 | 4923.925M | 39.2 | +8.2 | +33.4 | -38.3 | +0.0 | +0.0 | 45.6 | 54.0 | -8.4 | Vert |
| | Ave | | +0.0 | +3.1 | | | | | | | |
| ^ | 4923.917M | 51.1 | +8.2 | +33.4 | -38.3 | +0.0 | +0.0 | 57.5 | 54.0 | +3.5 | Vert |
| | | | +0.0 | +3.1 | | | | | | | |
| 13 | 1882.263M | 39.9 | +4.9 | +27.4 | -38.5 | +0.0 | +0.0 | 43.7 | 54.0 | -10.3 | Horiz |
| | Ave | | +10.0 | +0.0 | | | | | | | |
| ^ | 1882.274M | 51.3 | +4.9 | +27.4 | -38.5 | +0.0 | +0.0 | 55.1 | 54.0 | +1.1 | Horiz |
| | | | +10.0 | +0.0 | | | | | | | |
| 15 | 4923.900M | 34.8 | +8.2 | +33.4 | -38.3 | +0.0 | +0.0 | 41.2 | 54.0 | -12.8 | Horiz |
| | Ave | | +0.0 | +3.1 | | | | | | | |
| ^ | 4923.914M | 48.8 | +8.2 | +33.4 | -38.3 | +0.0 | +0.0 | 55.2 | 54.0 | +1.2 | Horiz |
| | | | +0.0 | +3.1 | | | | | | | |