


ID Label/Location

Photograph showing placement of Label

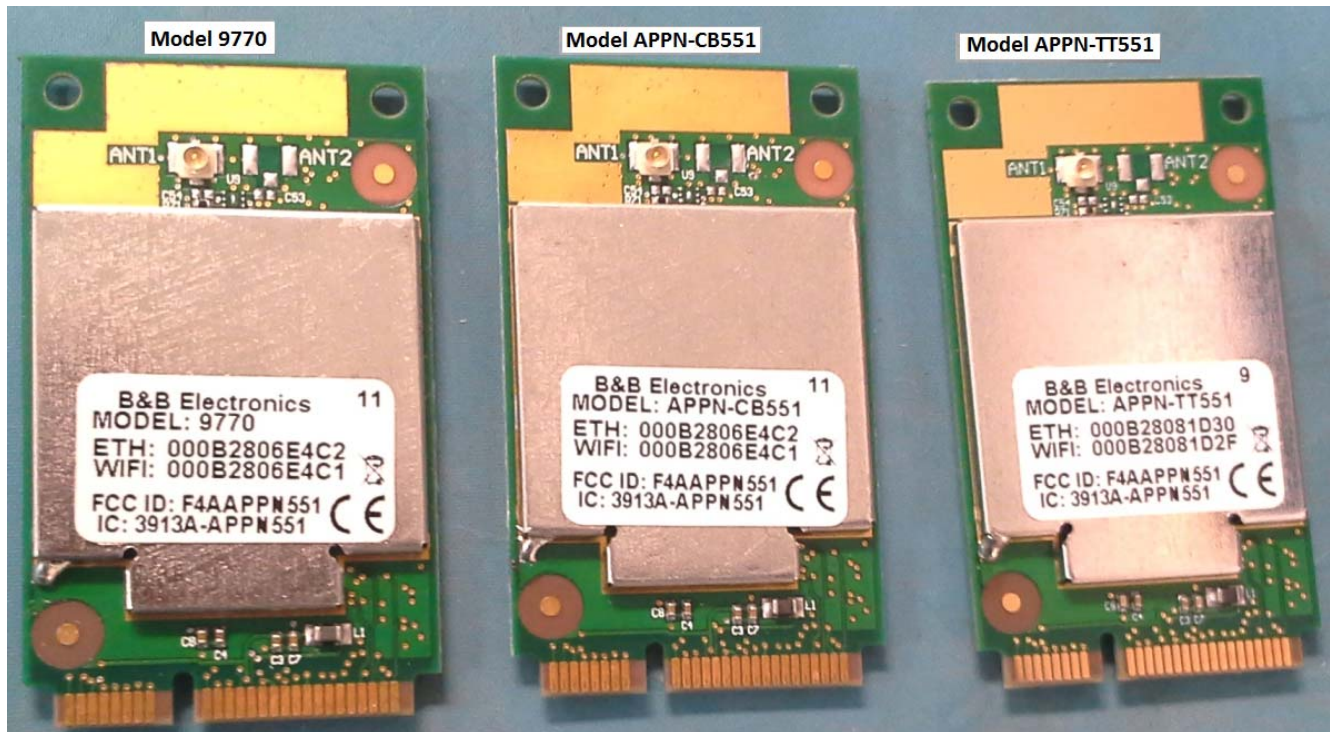

Dimensions of the label: 0.500 inches high X 0.905 inches wide

Chemical Resistant Polyester

Description: - 2 Mil, matte, white polyester with a high performance permanent acrylic adhesive designed to permanently bond to the most demanding surfaces. Has excellent durability and when used in conjunction with LMW4203 series ribbon the label is resistant to skydrol, hydraulic jet fuel, and a wide variety of chemicals.

Use: - Aviation, Automotive, chemical storage, electronic and pharmaceutical. Two year outdoor durability.

Material Specification:

Substrate:	2 Mil Polyester	Thickness of Mat'l	
		Film	2.0 Mil
Color:	Matte, White	Adhesive	1.0 Mil
		Liner	3.0 Mil
Topcoat :	Thermal Transfer	Total	6.0 Mils
Working Temperature Range: -40 deg. F to 302 deg. F (-40 deg. C to 150 deg. C)			
Liner: 50# Glassine			

Adhesive Specifications:

Type: Acrylic

Characteristics: Pressure Sensitive, Permanent

Temperature Range: -40 up to 302 deg. F (- 40 up to 149 deg. C)

Recommended Ribbon:

LMW4203 SERIES

Shelf Life: 2 years at 70 Deg. F (21 deg. C) and 50% R.H.