

Connector: Reverse Polarity SMA plug

9.30816

		I B@9GG C H: 9FK 49 GD97 = 98.	B5A 9	85H9	H#69. QUATECH, INC.	G#9 5	8K : ""BC" ACH2-AT-DP002	F9J	
			8F5K B	121409					cm ""
			7 < 97 ?98						
			9B: '5DDF"						
			A:: '5DDF"						
		BH9FDF9H: 9C A 9H7 HC@9F5B7 B: D9F. A 5H9F5@	E "5"						
			7 C A A 9B HG						
			Vendor's drawings encapsulated						
B9LH5GGM	I G98 C B	: B G<							
5D0@7 5HC B		: @9B5A 9 ACH-AT-DP002					K 9= <H"	G< 99H%C: 2	

Vendor's drawings
encapsulated

GA9	8K ; "BC "
5	ACH2-AT-DP002


F9J

$$K_9 \approx 10^{-10} < H^+$$

G< 99H%C : 2

Mechanical Specifications

Weight	0.52 oz. (15 g)
Length	4.7" (105 mm)
Diameter	0.4" (10 mm)
Finish	Matte Black
Connector	Reverse Polarity SMA Plug
Operating Temperature	-40° C to to 85° C (-40° F to 185° F)
Polarization	Vertical
RoHS Compliant	Yes

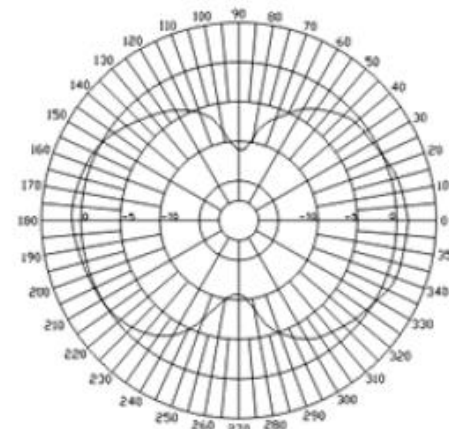

Vertical

L-COM model number HG2402RD-RSF

<div><div>DFC DF 9 5 FM 5 B 8 7 C B : 8 9 B H 5 H 9 B : C F A 5 H C B 7 C B 1 5 B 9 8 : B 1 H G 8 F 5 K B : 4 G H 9 C 9 D F C D F H M C : O B 9 F H 7 C A D 5 B M B 5 A 9 < 9 9 2 " 5 B M F 9 D F C B 1 7 H C B : B 1 5 H C F 5 G 5 K < C 9 K 4 C 1 H 4 K 9 K F 4 H 8 D 9 F A G G C B C : O B 9 F H 7 C A D 5 B M B 5 A 9 < 9 9 2 : G D F C < 4 H 8 "</div></div>			I B 9 9 G G C H : 9 F K 4 9 G D 9 7 + 9 8 .	B 5 A 9	8 5 H 9	H H 9 9 QUATECH, INC.			
				8 F 5 K B	1 2 1 4 0 9				cm " " " "
				7 < 9 7 ? 9 8					
				9 B : " 5 D D F "					
				A : : " 5 D D F "					
			B H F D F 9 H : 9 C A 9 F 7 H C 9 9 F 5 B 7 B : D 9 F : A 5 H F 5 9	7 C A A 9 B H G		G A 9 5 8 K : " " " B C " ACH2-AT-DP002 F 9 J			
	B 9 L H 5 G G M	I 9 9 8 C B	: B 4 C	Vendor's drawings encapsulated					
	5 D D 9 7 5 H C B	: 9 9 B 5 A 9	ACH-AT-DP002						
						K 9 9 < H "			G 9 9 H 2 ' C : 2 "