


CERTIFICATION


We hereby certify that:

The test data , data evaluation , test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.4 (1992) and the energy emitted by the sample EUT tested as described in this report is in compliance with CLASS B conducted and radiated emission limits of FCC Rules Part 15 , Subpart B.


Prepared by : Judy Hu

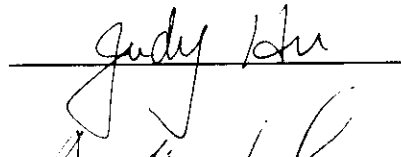

Reviewed by : Andy Chiu

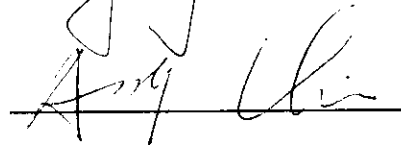


Approved by : George Yao



Issued Date : JULY 20, 1998

Report No. : NEI-FCCB-98091

Company Stamp :



NEUTRON ENGINEERING INC.

20, Alley 50, Lane 119, Dong Hwu Rd.,

P.O. Box 6-158, Nei Hwu,

Taipei, Taiwan

TEL : (02) 2633-6872 FAX : (02) 2633-4578

Table of Contents

1. General Information	4
1-1 Product Description.....	4
1-2 Related Submittal(s)/Grant(s).....	5
1-3 Tested System Details.....	6
1-4 Test Methodology.....	6
1-5 Test Facility.....	6
2. Product Labelling	
Figure 2-1 FCC ID Label.....	7
Figure 2-2 Location of Label on EUT.....	7
3. System Test Configuration	
3-1 Justification.....	8
3-2 EUT Exercise Software.....	8
3-3 Special Accessories.....	9
3-4 Equipment Modifications.....	9
3-5 Configuration of Tested System.....	12
Figure 3-1 Configuration of Tested System.....	12
4. Block Diagram(s)	13
5. Conducted and Radiated Measurement Photos	
Figure 5-1. Conducted Measurement Photos.....	14
Figure 5-2 Radiated Emission Data.....	15
6. Conducted Emission Datas	16
7. Radiated Emission Datas	
7-1 Reaiated Emission Data.....	17
7-2 Field Strength Calculation.....	18
7-3 Correction Factor Table VS Frequency.....	19
8. Attachment	
Photos of Tested EUT.....	20
User's Manual.....	21

1. GENERAL INFORMATION

1-1. Product Description

The FORWARD ELECTRONICS CO., LTD. Model: FDA-4201 (referred to as the EUT in this report) is an PS/2 Port standard compatible keyboard designed for Microsoft Win95 system with 3 additional Win95 function keys.

The summarized features of EUT are described as follow:

Oscillator Frequency : 1.8432 MHz

Power Consumption : 200mA at 5 Vdc supply, in average.

1-2. Related Submittal(s) / Grant (s)

1-2-1. Models Covered

Only the EUT model FDA-4201 is submitted for FCC ID filling.

1-2-2. Models difference

N/A

1-3. Tested System Details

The FCC IDs for all equipments, plus descriptions of all cables used in the tested system (including inserted cards, which have grants) are:

Model No.	FCC ID	Equipment	Cable
NE64	KFBNE64	Monitor	Shielded Data Cable ⁽²⁾ Non-shielded Power Cord
PRESARIO7222	EJH3326	PC	Un-Shielded Power Cable
HP2225C+	DSI6XU2225	Printer	Shielded Parallel Data Cable Un-Shielded Power Cord
AT-1200CK	E2O5OV1200CK	Modem	Shielded Parallel Data Cable Un-Shielded Power Cord
FDA-4201 ⁽¹⁾	F4ZFDA-4201	Keyboard	Shielded Data Cable
SERIES.2-7S	DZL6QBS2	Mouse	Shielded Data Cable

Notes:

- (1) EUT submitted for grant.
- (2) Monitor's attached video cable without ferrite core.

1-4. Test Methodology

Both conducted and radiated testing were performed according to the procedures in ANSI C63.4 (1992) / CISPR22(1996). Radiated testing was performed at an antenna to EUT distance 10 meters.

1-5. Test Facility

The open area test site and conducted measurement facility used to collect the radiated data is located on the address of No. 5, All 2, Lane 220, Kang Lo St., Nei Hwu, Taipei, Taiwan, R.O.C. of NEUTRON ENGINEERING INC. This site has been fully described in report dated Feb.4,1998 Submitted to your office, and accepted in a letter dated March 28, 1998 (31040/SIT-1300F2).

3. System Test Configuration

3-1. Justification

The system was configured for testing in a typical fashion (as a customer would normally use it). The Keyboard was connected to support equipment-personal computer. Peripherals of PC, such as monitor, printer, mouse and modem were contained in this system in order to comply with the ANSI 63.4 / CISPR22(1996) requirement. The PC operated in the default 640x480/31.5 KHz VGA Graphic mode. This operated condition was tested and used to collect the included data.

3-2. EUT Exercise Software

The EUT exercise program used during radiated and conducted testing was designed to exercise the various system components in a manner similar to a typical use. The software, contained on a 3-1/2 inch disk, was inserted into driver A and is auto-starting on power-up. Once loaded, the program sequentially exercises each system component in turn. The sequence used is:

1. Read(write) from(to) mass storage device(Disk).
2. Send "H" pattern to video port device(Monitor).
3. Send " H " pattern to parallel port device(Printer).
4. Send " H " pattern to serial port device (Modem).
5. Repeated from 2 to 4 continuously.

As the Keyboard and mouse are strictly input devices, no data is transmitted to (from) them during test. They are, however, continuously scanned for data input activity.

3-3. Special Accessories

No any other special accessory used for complince testing.

3-4. Equipment Modifications

Not available fo rthis EUT intended for grant.

Applicant Signature : C. K. Chen
Type/Printed Name : C. K. Chen

Date : July, 18, 1998
Position : Engineer

3.5 Configuration of Tested System

The configuration of tested system is described as the block diagram shown in next page Figure 3.1 and details information of I/O cable and power cord connection are tabulated as Table A and B. The monitor is powered from a floor mounted receptacle (referred to as the wall outlet in the previous described) was tested.

TABLE A - Test Equipment

Item	Equipment	Mfr.	Model/Type No.	I/O Port	FCC ID	Remark
E-1	Monitor	Chern-Yih	NE64	VGA Port	KFBNE64	
E-2	PC	COMPAQ	PRESARIO7222		EJH3326	
E-3	Mouse	Logitech	SERIES.2-7S	PS/2 Port	DZL6QBS2	
E-4	Printer	HP	HP2225C+	Printer Port	DSI6XU2225	
E-5	Modem	Datatronics	AT-1200CK	COM Port	E2050V1200CK	
E-6	Keyboard	Forward	FDA-4201	Keyboard Port	F4ZFDA-4201	EUT

Remark:

- (1) Unless otherwise denoted as EUT in 'Remark' column, device(s) used in tested system is a support equipment.
- (2) Unless otherwise marked as ※ in 'Remark' column, Neutron consigns the supporting equipment(s) to the tested system.


Table B. - Informations Cable Information

Item	I/O Cable	Device Connected	Shielded	Ferrite	Detachable / Permanently	Note
C-1	Video Cable	PC-Monitor	Yes	No	Permanently attached on Monitor	
C-2	Centronics Cable	PC-Printer	Yes	No	Part of Printer, Detachable	
C-3	Keyboard Cable	PC-EUT	Yes	No	Permanently attached on KB	※
C-4	RS-232 Cable	PC-Modem	Yes	No	Part of Modem, Detachable	
C-5	Mouse Cable	PC-Mouse	Yes	No	Permanently attached on Mouse	

Note:

(1) Unless otherwise marked as ※ in 「Remark」 column, Neutron consigns the supporting equipment(s) to the tested system.

Figure 3.1 Configuration of Tested System

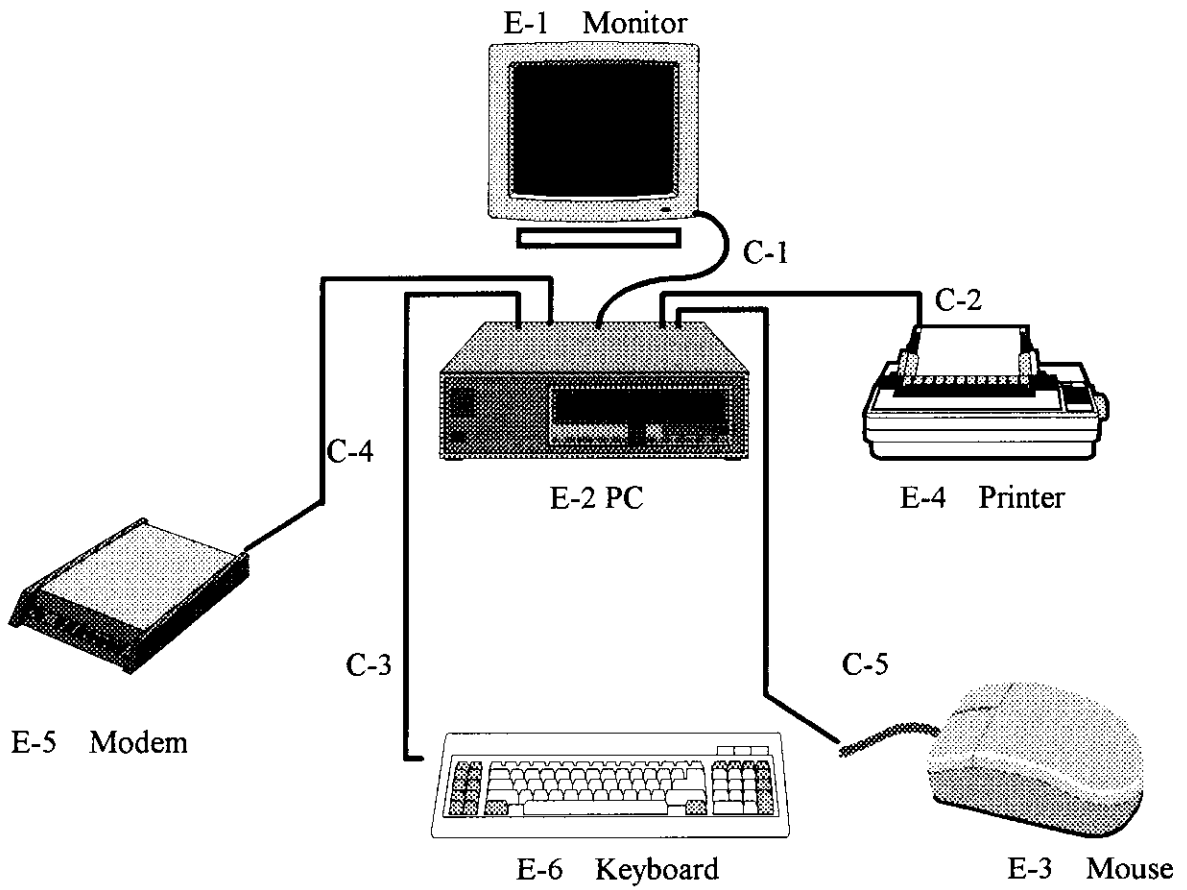


4. Block Diagram(s)

Figure 4.1 Block diagram of system, Page 13.A

KEYBOARD BLOCK DIAGRAM

MODEL NO.: FDA-4201

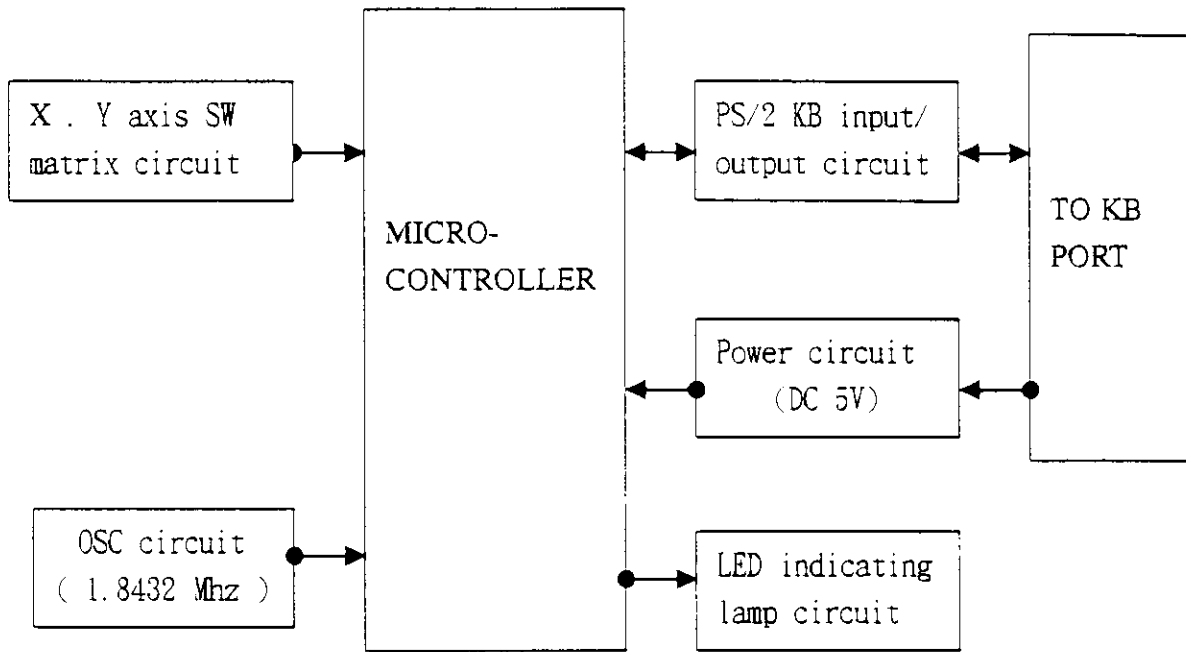

7. Radiated Emission Datas

7.1 The following data lists the significant emission frequencise, measured levels, correction factor (includes cable and antenna corrections), the corrected reading, as well as the limit. Explanation of the Correction Factor is given in paragraph 7.2.

Judgement: Passed by **-5.29 dB** in polarity of **Vertical 215.20 MHz**

Table 5-2 Radiated Emission Data

Freq. (MHz)	Polar. H/V	Reading(RA) (dBuV)	Corr.Factor. (dB)	Corrected F (dB)	Limits (QP) (dBuV/m)	Margins (dBuV/m)	Note (QP)
46.70	H	11.40	12.00	23.40	30.00	- 6.60	
65.00	V	15.00	8.90	23.90	30.00	- 6.10	
148.00	V	11.00	12.80	23.80	30.00	- 6.20	
148.20	H	11.10	12.82	23.92	30.00	- 6.08	
164.30	V	8.30	15.35	23.65	30.00	- 6.35	
171.10	H	6.50	16.63	23.13	30.00	- 6.87	
204.80	H	9.10	12.25	21.35	30.00	- 8.65	
209.60	V	9.30	12.09	21.39	30.00	- 8.61	
215.20	V	12.80	11.91	24.71	30.00	- 5.29	
224.80	V	11.20	11.61	22.81	30.00	- 7.19	
224.80	H	10.40	11.61	22.01	30.00	- 7.99	
329.60	H	11.80	16.03	27.83	37.00	- 9.17	

Remark :

- (1) Test Receiver or Spectrum Analyzer measurement condition setting are Res. BW=1 MHz , Video BW =1MHz , Sweep. Time = 0.2 sec./MHz
- (2) All readings are Peak unless otherwise stated QP in colum of 『Note』
- (3) Measuring frequency range from 30MHz to 1000MHz.
- (4) If the peak scan value lower limit more than 20dB, then this signal data does not show in table.
- (5) If the peak scan value lower limit less than 20dB, then this signal data will be listed. But if these signal datas more than 10 frequencies, then only the Top 10 be listed.

Review : Andy Ulin Test Personnel : Victor J. Lee Date: JULY 13, 1998

7-2. Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Factor and subtracting the Amplifier Gain (if any) from the measured reading. The basic equation with a sample calculation is as follows:

$$FS = RA + AF + CL - AG$$

Where FS = Field Strength

RA = Receiver Amplitude

AF = Antenna Factor (1)

CL = Cable Attenuation Factor (1)

AG = Amplifier Gain (1) (2)

Remark :

(1) The Correction Factor = AF + CL - AG, as shown in the data tables' Correction Factor column.

(2) AG is not available for Neutron's Open Site Facility

Example of Calculation:

Assume a Receiver Reading of 23.7 dBuV is obtained with an Antenna Factor of 7.2 dB and a Cable Factor of 1.1 dB Then:

1. The Correction Factor will be calculated by

$$\text{Correction Factor} = AF + CF - AG = 7.2 + 1.1 - 0 = 8.3 \text{ (dB)}$$

as shown in the data tables' Correction Factor column.

2. The Field Strength will be calculated by

$$FS = RA + \text{Correction Factor} = 23.7 + 8.3 = 32 \text{ (dB}\mu\text{V/m)}.$$

FS is the value shown in the data tables' Corrected Reading column and RA is the value shown in

the data tables' Receiver Reading column. The 32 dBuV/m value was mathematically converted to its corresponding level in uV/m as:

$$\text{Log}^{-1} \left[(32.0 \text{ dB}\mu\text{V/m}) / 20 \right] = 39.8 \text{ (uV/m)}$$

7-3. Correction Factor VS Frequency

Frequency (MHz)	Antenna Factor (dB)	Cable Loss (dB)
30.00	11.10	0.20
35.00	10.80	0.00
40.00	11.20	0.40
45.00	11.50	0.40
50.00	11.30	0.90
55.00	10.50	0.00
60.00	9.90	0.00
65.00	8.70	0.20
70.00	7.60	0.00
75.00	6.40	0.50
80.00	6.10	0.10
85.00	7.00	0.80
90.00	8.00	0.30
95.00	10.00	0.40
100.00	11.20	0.60
110.00	12.60	0.60
120.00	13.00	0.60
130.00	12.50	0.50
140.00	12.00	0.20
150.00	12.00	1.00
160.00	13.20	1.20
170.00	14.80	1.60
180.00	16.30	1.90
190.00	17.00	1.90
200.00	17.30	1.40
225.00	10.50	1.10
250.00	11.70	2.00
275.00	12.80	2.40
300.00	14.50	2.40
325.00	14.00	1.90
350.00	14.20	2.40
375.00	14.60	2.90
400.00	15.10	2.70
450.00	16.20	3.20
500.00	17.60	3.70
550.00	17.80	3.90
600.00	18.40	4.30
650.00	19.50	4.00
700.00	20.80	4.10
750.00	20.50	5.30
800.00	21.10	5.90
850.00	22.40	5.80
900.00	23.50	5.50
950.00	24.00	6.30
1000.00	24.80	5.20

8. Photos of Tested EUT:

Photo # 1 Front View

Photo # 2 Rear View

Photo # 3 Unit Partially Disassembled

Photo # 4 Unit Partially Disassembled

Photo # 5 Unit Partially Disassembled

Photo # 6 Unit Partially Disassembled