



Ready

Armed

System

Stay

Away

Chime

Exit

Status

Volume


Record

Playback

FCC # 42

DSC®



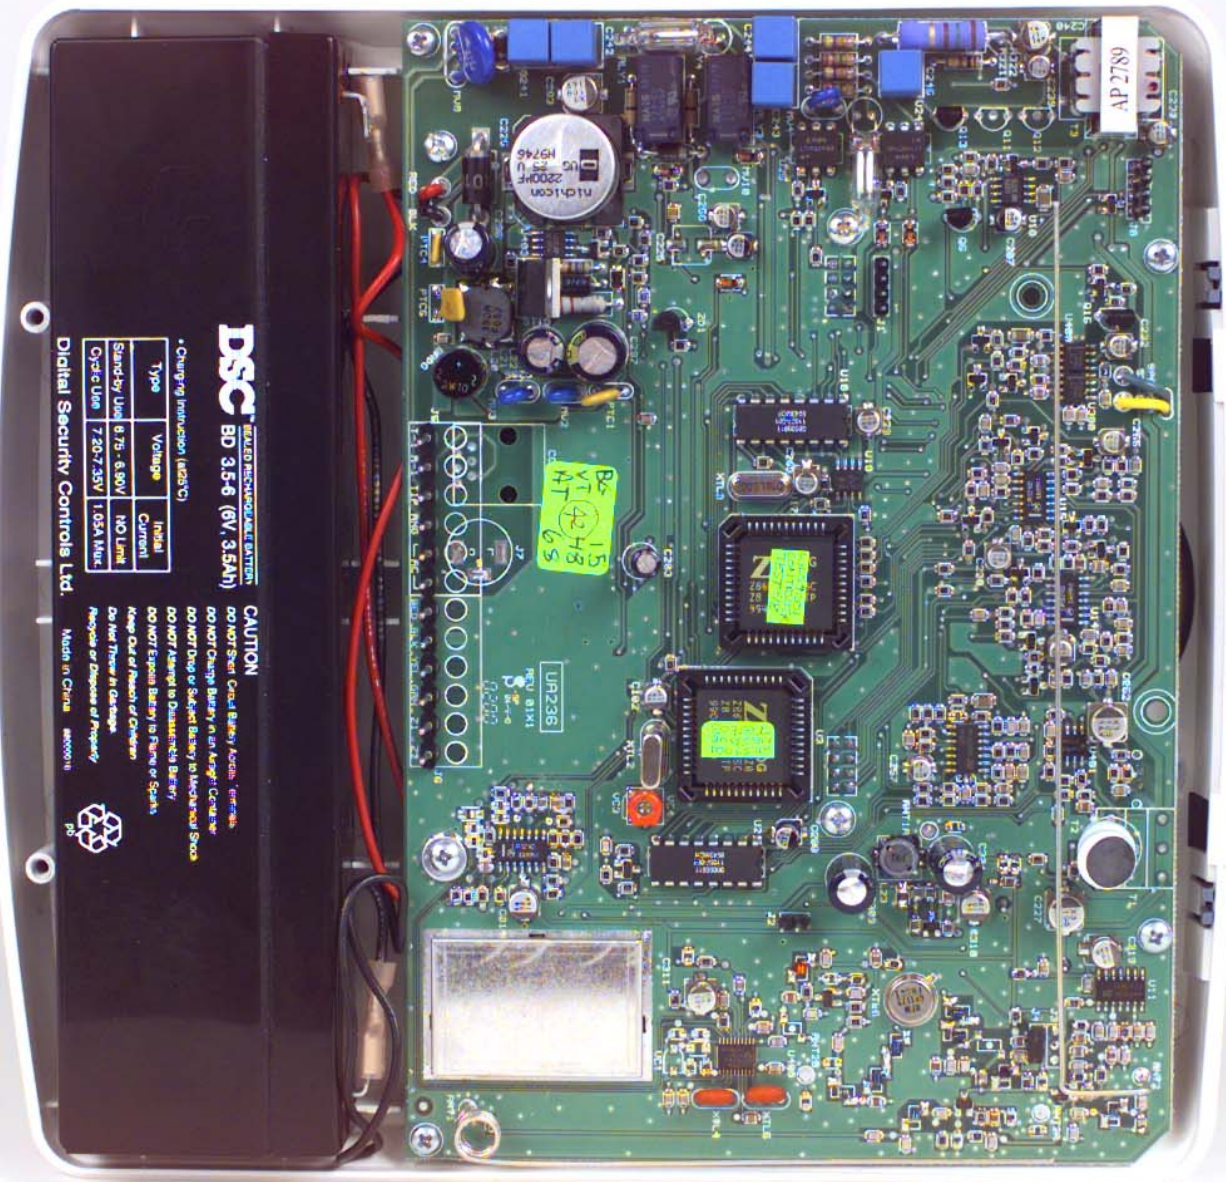

AP 2789

B2
Y1
AT
6S

Z
15
12H8
6S

UR236
REV. B1X1

MID-ICON
2200UF
H5745

Type	Voltage	Initial Current
Stand-by/Use	8.75 - 6.90V	NO Limit
Cyclic Use	7.20-7.35V	1.05A Max.

* Charging Induction (ads/C)

DSC SEALLED RECHARGEABLE BATTERY
BD 3.5-6 (9V, 3.5Ah)

CAUTION

- DO NOT Short Circuit Battery Terminals
- DO NOT Charge Battery in an Airtight Container
- DO NOT Drop or Subject Battery to Mechanical Shock
- DO NOT Attempt to Disassemble Battery
- DO NOT Expose Battery to Flame or Sparks
- Keep Out of Reach of Children
- Do Not Throw in Garbage
- Recycle or Dispose of Properly

Made in China 50000111



Digital Security Controls Ltd.

AP 2789

B6
VT
AT
15
42H8
6S

UA236

REV 01X1

-SP
94-7-0

0200

nichicon
2200µF
U5
H9745

Z
86
78
78
594

Z
86
78
78
990

