



Digital Security Controls
 ISO9001 Registered
 3301 Langstaff Road, Concord
 Ontario, Canada L4K 4L2
 Phone: 905-760-3000
 Toll Free: 1-888-888-7838
 Fax: 905-760-3020

18008284R001 WT5500-433 FCC/IC/UL/ULC Label

File: [DRAFT1_18008284R001_WT5500-433_FCC-IC-UL-ULC_LB.eps] November 24, 2008

Colour: Pantone Process Black

Material:

CLEAR UL approved self-adhesive Mylar type material

Lamination: Top gloss finish lamination
 (e.g. 1F9, or equivalent)

Adhesive: Permanent adhesive backed with protective
 liner (e.g. 60# Semigloss Tire-III / 40# Liner Code: B37, or
 equivalent)

Cutting: Tolerance +/- 0.010"

Dashed line indicates cutting - will not print




NOTE:


All UL and ULC Labels shall be printed on UL approved material. The first time the label is ordered, the artwork must be sent to UL Label Center [email: LabelCenter.USA@us.ul.com, fax: (847)509-6201] for approval.

NOTES:

1. All items must be RoHS compliant.
2. Markings on label must be PERMANENT.
3. Indelible Ink
4. Conductive inks may not be used.

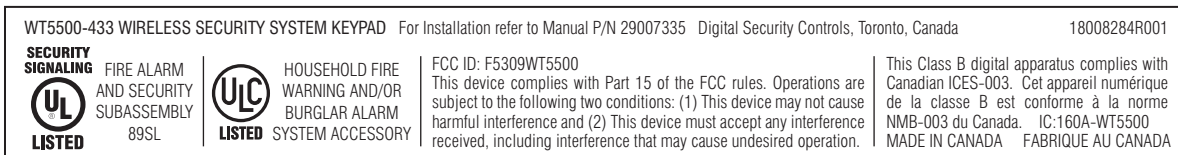

Label shown 200% of actual size

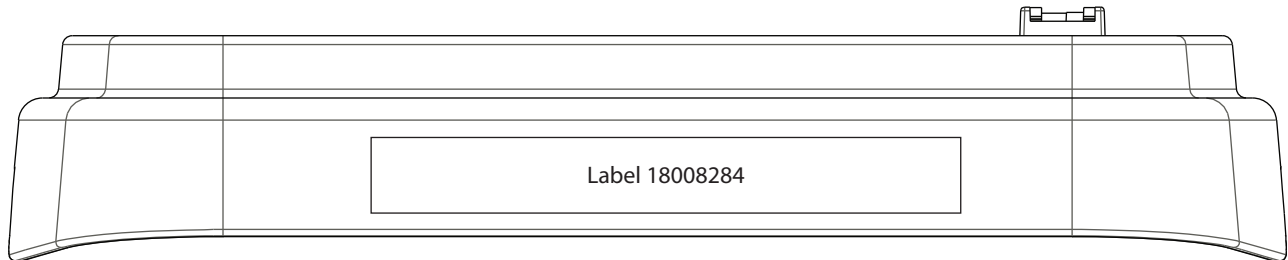

Top of the unit shows the label location (actual size)