

Digital Security Controls 3301 Langstaff Road Concord, Ontario Canada L4K 4L2 Tele: 905 760 3000

Toll Free: 888 888 7838 Fax: 905-760-3020 18008715R001 3G2060R Listing Label

(FCC/IC/UL/ULC)

April 2, 2012

Colour: Pantone Process Black

Material: WHITE UL approved self-adhesive Mylar type

material - on a roll

e.g. 2M POLY WH TC/LP50/50# (2F8), or equivalent

Lamination: Top Gloss finish lamination

e.g. 1M CL POLY NTC/P1212/50# (1F1), or equivalent Adhesive: Permanent adhesive backed with protective liner

Cutting: Tolerance +/- 0.010"

Dashed line indicates cutting - will not print

Square label corners are acceptable.

NOTES:


- 1. All items must be RoHS compliant.
- 2. Markings on label must be PERMANENT.
- 3. Indelible Ink.
- 4. Conductive inks may not be used.
- 5. Non-conductive label adhesive shall be used ONLY.

NOTES:

- All UL and ULC Labels shall be printed on UL approved material. The first time the label is ordered, the artwork must be sent to UL Label Center [email: LabelCenter.USA@us.ul.com, fax: (847)509-6201] for approval.
- All UL and ULC Labels shall be printed by a UL Listed printing facility. The issue number (when applicable) shall be requested from the same center as above by the printing facility at the time of printing.





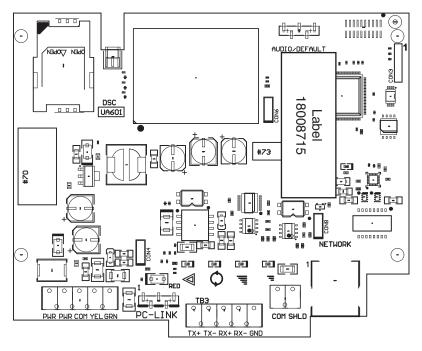

Top of the PCB showing the label location (80% of actual size)



Digital Security Controls 3301 Langstaff Road Concord, Ontario Canada L4K 4L2 Tele: 905 760 3000

Toll Free: 888 888 7838 Fax: 905-760-3020 18008736R001 3G2060 Listing Label (FCC/IC/UL/ULC)

April 2, 2012

Colour: Pantone Process Black

Material: WHITE UL approved self-adhesive Mylar type

material - on a roll

e.g. 2M POLY WH TC/LP50/50# (2F8), or equivalent

Lamination: Top Gloss finish lamination

e.g. 1M CL POLY NTC/P1212/50# (1F1), or equivalent Adhesive: Permanent adhesive backed with protective liner

Cutting: Tolerance +/- 0.010"

Dashed line indicates cutting - will not print

Square label corners are acceptable.

NOTES:


- 1. All items must be RoHS compliant.
- 2. Markings on label must be PERMANENT.
- 3. Indelible Ink.
- 4. Conductive inks may not be used.
- 5. Non-conductive label adhesive shall be used ONLY.

NOTES:

- All UL and ULC Labels shall be printed on UL approved material. The first time the label is ordered, the artwork must be sent to UL Label Center [email: LabelCenter.USA@us.ul.com, fax: (847)509-6201] for approval.
- All UL and ULC Labels shall be printed by a UL Listed printing facility. The issue number (when applicable) shall be requested from the same center as above by the printing facility at the time of printing.





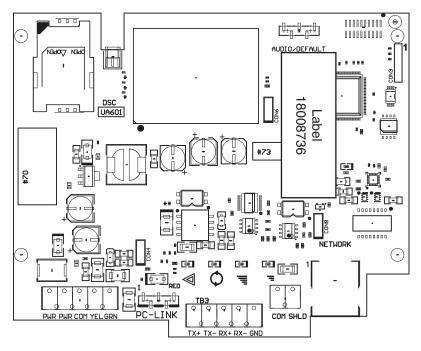

Top of the PCB showing the label location (80% of actual size)



Digital Security Controls 3301 Langstaff Road Concord, Ontario Canada L4K 4L2 Tele: 905 760 3000

Toll Free: 888 888 7838 Fax: 905-760-3020 18008714R001 TL2603GR Listing Label

(FCC/IC/UL/ULC)

April 2, 2012

Colour: Pantone Process Black

Material: WHITE UL approved self-adhesive Mylar type

material - on a roll

e.g. 2M POLY WH TC/LP50/50# (2F8), or equivalent

Lamination: Top Gloss finish lamination

e.g. 1M CL POLY NTC/P1212/50# (1F1), or equivalent Adhesive: Permanent adhesive backed with protective liner

Cutting: Tolerance +/- 0.010"

Dashed line indicates cutting - will not print

Square label corners are acceptable.

NOTES:


- 1. All items must be RoHS compliant.
- 2. Markings on label must be PERMANENT.
- 3. Indelible Ink.
- 4. Conductive inks may not be used.
- 5. Non-conductive label adhesive shall be used ONLY.

NOTES:

- All UL and ULC Labels shall be printed on UL approved material. The first time the label is ordered, the artwork must be sent to UL Label Center [email: LabelCenter.USA@us.ul.com, fax: (847)509-6201] for approval.
- All UL and ULC Labels shall be printed by a UL Listed printing facility. The issue number (when applicable) shall be requested from the same center as above by the printing facility at the time of printing.





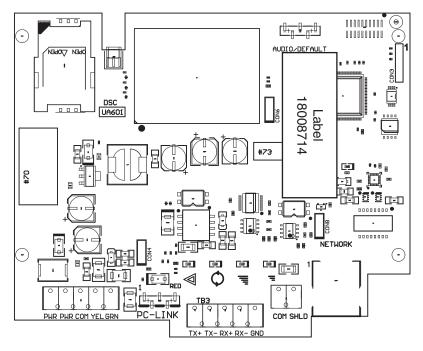

Top of the PCB showing the label location (80% of actual size)



Digital Security Controls 3301 Langstaff Road Concord, Ontario Canada L4K 4L2 Tele: 905 760 3000

Toll Free: 888 888 7838 Fax: 905-760-3020 18008735R001 TL2603G Listing Label

(FCC/IC/UL/ULC)
April 2, 2012

Colour: Pantone Process Black

Material: WHITE UL approved self-adhesive Mylar type

material - on a roll

e.g. 2M POLY WH TC/LP50/50# (2F8), or equivalent

Lamination: Top Gloss finish lamination

e.g. 1M CL POLY NTC/P1212/50# (1F1), or equivalent Adhesive: Permanent adhesive backed with protective liner

Cutting: Tolerance +/- 0.010"

Dashed line indicates cutting - will not print

Square label corners are acceptable.

NOTES:


- 1. All items must be RoHS compliant.
- 2. Markings on label must be PERMANENT.
- 3. Indelible Ink.
- 4. Conductive inks may not be used.
- 5. Non-conductive label adhesive shall be used ONLY.

NOTES:

- All UL and ULC Labels shall be printed on UL approved material. The first time the label is ordered, the artwork must be sent to UL Label Center [email: LabelCenter.USA@us.ul.com, fax: (847)509-6201] for approval.
- 2. All UL and ULC Labels shall be printed by a UL Listed printing facility. The issue number (when applicable) shall be requested from the same center as above by the printing facility at the time of printing.





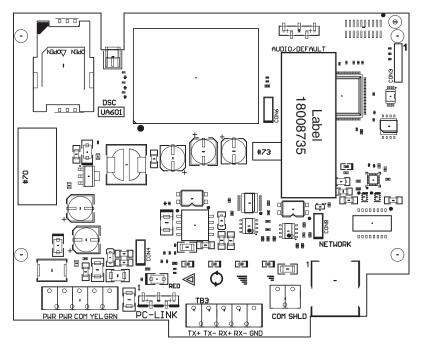

Top of the PCB showing the label location (80% of actual size)