

Digital Security Controls 3301 Langstaff Road Concord, Ontario Canada L4K 4L2 Tele: 905 760 3000

Toll Free: 888 888 7838 Fax: 905-760-3020

18008904R001 TL2803G V4.0 Multi-listing Label (FCC/IC/UL/ULC)

March 12, 2013

Colour: Pantone Process Black

Material: WHITE UL approved self-adhesive Mylar type

material - on a roll

e.g. 2M POLY WH TC/LP50/50# (2F8), or equivalent

Lamination: Top Gloss finish lamination

e.g. 1M CL POLY NTC/P1212/50# (1F1), or equivalent Adhesive: Permanent adhesive backed with protective liner

Cutting: Tolerance +/- 0.010"

Dashed line indicates cutting - will not print

Square label corners are acceptable.

NOTES:


- 1. All items must be RoHS compliant.
- 2. Markings on label must be PERMANENT.
- 3. Indelible Ink.
- 4. Conductive inks may not be used.
- 5. Non-conductive label adhesive shall be used ONLY.

NOTES:

- All UL and ULC Labels shall be printed on UL approved material. The first time the label is ordered, the artwork must be sent to UL Label Center [email: LabelCenter.USA@us.ul.com, fax: (847)509-6201] for approval.
- All UL and ULC Labels shall be printed by a UL Listed printing facility.





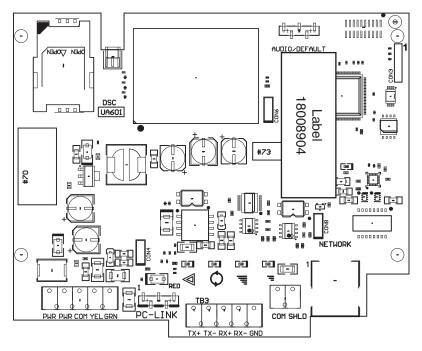

Top of the PCB showing the label location (80% of actual size)



Digital Security Controls 3301 Langstaff Road Concord, Ontario Canada L4K 4L2 Tele: 905 760 3000

Toll Free: 888 888 7838 Fax: 905-760-3020

18008875R001 TL2803GR V4.0 Multi-listing Label (FCC/IC/UL/ULC)

March 12, 2013

Colour: Pantone Process Black

Material: WHITE UL approved self-adhesive Mylar type

material - on a roll

e.g. 2M POLY WH TC/LP50/50# (2F8), or equivalent

Lamination: Top Gloss finish lamination

e.g. 1M CL POLY NTC/P1212/50# (1F1), or equivalent Adhesive: Permanent adhesive backed with protective liner

Cutting: Tolerance +/- 0.010"

Dashed line indicates cutting - will not print

Square label corners are acceptable.

NOTES:

- 1. All items must be RoHS compliant.
- 2. Markings on label must be PERMANENT.
- 3. Indelible Ink.
- 4. Conductive inks may not be used.
- 5. Non-conductive label adhesive shall be used ONLY.


NOTES:

- All UL and ULC Labels shall be printed on UL approved material. The first time the label is ordered, the artwork must be sent to UL Label Center [email: LabelCenter.USA@us.ul.com, fax: (847)509-6201] for approval.
- All UL and ULC Labels shall be printed by a UL Listed printing facility.





Label shown 150% of actual size

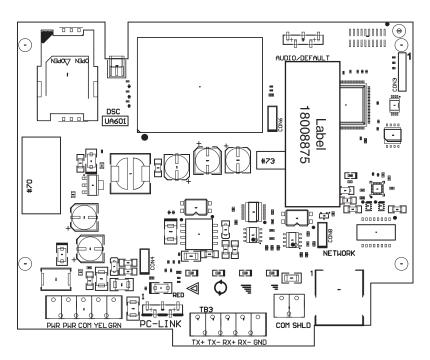

Top of the PCB showing the label location (80% of actual size)



Digital Security Controls 3301 Langstaff Road Concord, Ontario Canada L4K 4L2

Tele: 905 760 3000 Toll Free: 888 888 7838 Fax: 905-760-3020

18008905R001 TL2803G(R) Module Label for HS2 Control Panel Enclosure (FCC/IC)

March 12, 2013

Colour: Pantone Process Black

Material:

WHITE Durable Semi-gloss Self-adhesive Material

(e.g. PL 38 Q, or equivalent)

Lamination: Top lamination (e.g. 1F9, or equivalent)

Adhesive: Permanent adhesive backed with protective liner (e.g. 60# Semigloss Tire-III / 40#

Liner Code: B37, or equivalent)
Cutting: Tolerance +/- 0.010"

Dashed line indicates cutting - will not print

Delivered in single label only, 100 labels per bundle.

NOTES:

- 1. All items must be RoHS compliant.
- 2. Markings on label must be PERMANENT.
- 3. Indelible Ink.




This product contains

M/N: TL2803G/TL2803GR with

FCC ID: F53123G260R and

IC:160A-3G260R

DIGITAL SECURITY CONTROLS, TORONTO, CANADA 18008905R001

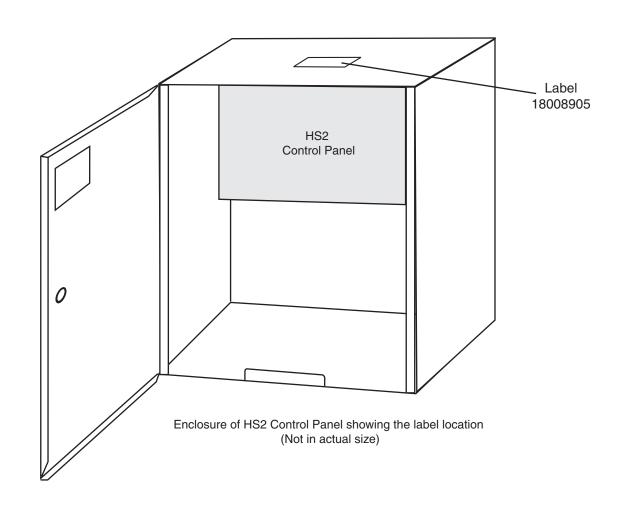



Digital Security Controls 3301 Langstaff Road Concord, Ontario Canada L4K 4L2 Tele: 905 760 3000

Toll Free: 888 888 7838 Fax: 905-760-3020 18008903R001 3G2080 V4.0 Multi-listing Label (FCC/IC/UL/ULC)

March 12, 2013

Colour: Pantone Process Black

Material: WHITE UL approved self-adhesive Mylar type

material - on a roll

e.g. 2M POLY WH TC/LP50/50# (2F8), or equivalent

Lamination: Top Gloss finish lamination

e.g. 1M CL POLY NTC/P1212/50# (1F1), or equivalent Adhesive: Permanent adhesive backed with protective liner

Cutting: Tolerance +/- 0.010"

Dashed line indicates cutting - will not print

Square label corners are acceptable.

NOTES:


- 1. All items must be RoHS compliant.
- 2. Markings on label must be PERMANENT.
- 3. Indelible Ink.
- 4. Conductive inks may not be used.
- 5. Non-conductive label adhesive shall be used ONLY.

NOTES:

- All UL and ULC Labels shall be printed on UL approved material. The first time the label is ordered, the artwork must be sent to UL Label Center [email: LabelCenter.USA@us.ul.com, fax: (847)509-6201] for approval.
- All UL and ULC Labels shall be printed by a UL Listed printing facility.





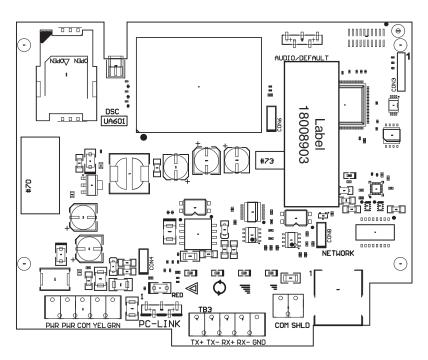

Top of the PCB showing the label location (80% of actual size)



Digital Security Controls 3301 Langstaff Road Concord, Ontario Canada L4K 4L2 Tele: 905 760 3000

Toll Free: 888 888 7838 Fax: 905-760-3020

18008876R001 3G2080R V4.0 Multi-listing Label (FCC/IC/UL/ULC)

March 12, 2013

Colour: Pantone Process Black

Material: WHITE UL approved self-adhesive Mylar type

material - on a roll

e.g. 2M POLY WH TC/LP50/50# (2F8), or equivalent

Lamination: Top Gloss finish lamination

e.g. 1M CL POLY NTC/P1212/50# (1F1), or equivalent Adhesive: Permanent adhesive backed with protective liner

Cutting: Tolerance +/- 0.010"

Dashed line indicates cutting - will not print

Square label corners are acceptable.

NOTES:

- 1. All items must be RoHS compliant.
- 2. Markings on label must be PERMANENT.
- 3. Indelible Ink.
- 4. Conductive inks may not be used.
- 5. Non-conductive label adhesive shall be used ONLY.

NOTES:

- All UL and ULC Labels shall be printed on UL approved material. The first time the label is ordered, the artwork must be sent to UL Label Center [email: LabelCenter.USA@us.ul.com, fax: (847)509-6201] for approval.
- All UL and ULC Labels shall be printed by a UL Listed printing facility.



M/N: 3G2080R Res Fire and Com/Res Burg 3G Alarm Communicator
STANDARD/FNCRYPTFD LINE SECURITY This Class R digital apparatus

STANDARD/ENCRYPTED LINE SECURITY
Type of signalling: PSDN
This device compiles with Part 15 Class B of the FCC
rules. Operation is subject to the following two conditions:
(1) This device may not cause harmly interference and (2)
this device must accept any interference received,
including interference that may cause undesired operation.
FCC ID: F331236260R

Foc ID: F03120200N

For installation refer to Installation Manual 29008436.
IC:160A-3G260R


IC:160A-3G260R
DIGITAL SECURITY CONTROLS, TORONTO, CANADA

This Class B digital apparatus meets all requirements of the ICES-003.
Cet appareil numérique de la classe B respecte toutes les exigences du ICES-003.

SECURITY
SIGNALING

FIRE ALARM AND SECURIT SUBASSEMBLE 89SL

MADE IN CANADA FABRIQUE AU CANAD

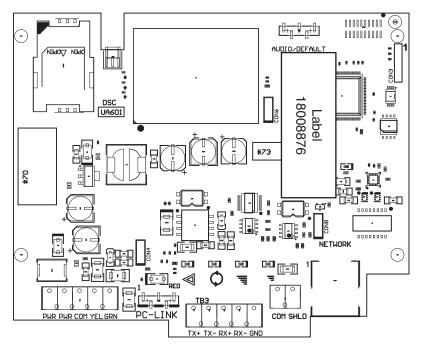

Top of the PCB showing the label location (80% of actual size)



Digital Security Controls 3301 Langstaff Road Concord, Ontario Canada L4K 4L2

Tele: 905 760 3000 Toll Free: 888 888 7838 Fax: 905-760-3020

18008906R001 3G2080(R) Module Label for HS2 Control Panel Enclosure (FCC/IC)

March 12, 2013

Colour: Pantone Process Black

Material:

WHITE Durable Semi-gloss Self-adhesive Material (e.g. PL 38 Q, or equivalent)

Lamination: Top lamination (e.g. 1F9, or equivalent)

Adhesive: Permanent adhesive backed with protective liner (e.g. 60# Semigloss Tire-III / 40#


Liner Code: B37, or equivalent)
Cutting: Tolerance +/- 0.010"

Dashed line indicates cutting - will not print

Delivered in single label only, 100 labels per bundle.

NOTES:

- 1. All items must be RoHS compliant.
- 2. Markings on label must be PERMANENT.
- 3. Indelible Ink.

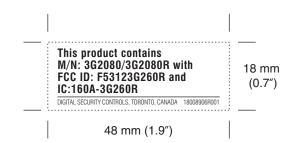

This product contains

M/N: 3G2080/3G2080R with FCC ID: F53123G260R and

IC:160A-3G260R

DIGITAL SECURITY CONTROLS, TORONTO, CANADA 18008906R001

