



A Tyco International Company

Digital Security Controls
3301 Langstaff Road
Concord, Ontario Canada L4K 4L2
Tele: 905 760 3000
Toll Free: 888 888 7838
Fax: 905-760-3020

18008885R001
HS2LCDRFP9 NA Listing Label
915MHz FCC/IC/UL/ULC

March 12, 2013

Colour: Pantone Process Black

Material:

CLEAR UL approved self-adhesive Mylar type material - on a roll

Lamination: Top gloss finish lamination (e.g. 1F9, or equivalent)

Adhesive: Permanent adhesive backed with protective liner

Cutting: Tolerance +/- 0.010"

Dashed line indicates cutting - will not print



Square label corners are acceptable.

NOTES:


1. All items must be RoHS compliant.
2. Markings on label must be PERMANENT.
3. Indelible Ink.
4. Conductive inks may not be used.
5. Non-conductive label adhesive shall be used ONLY.

NOTES:

1. All UL and ULC Labels shall be printed on UL approved material. The first time the label is ordered, the artwork must be sent to UL Label Center [email: LabelCenter.USA@us.ul.com, fax: (847)509-6201] for approval.
2. All UL and ULC Labels shall be printed by a UL Listed printing facility.

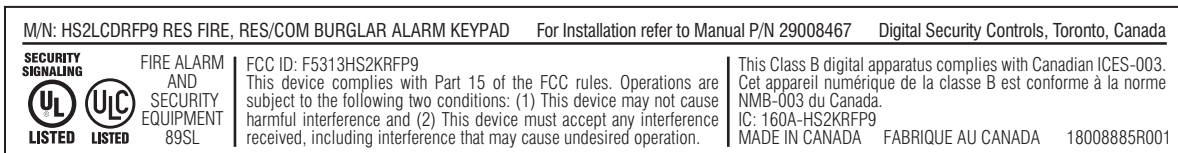

Label shown 200% of actual size

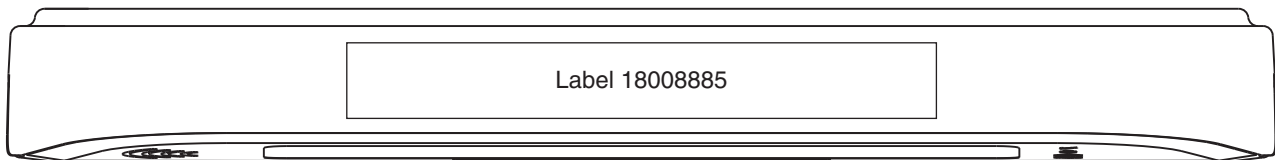

Top of the unit shows the label location (actual size)



A Tyco International Company

Digital Security Controls
3301 Langstaff Road
Concord, Ontario Canada L4K 4L2
Tele: 905 760 3000
Toll Free: 888 888 7838
Fax: 905-760-3020

18008886R001
HS2ICNRF9 NA Listing Label
915MHz FCC/IC/UL/ULC

March 12, 2013

Colour: Pantone Process Black

Material:

CLEAR UL approved self-adhesive Mylar type material - on a roll

Lamination: Top gloss finish lamination (e.g. 1F9, or equivalent)

Adhesive: Permanent adhesive backed with protective liner

Cutting: Tolerance +/- 0.010"

Dashed line indicates cutting - will not print



Square label corners are acceptable.

NOTES:


1. All items must be RoHS compliant.
2. Markings on label must be PERMANENT.
3. Indelible Ink.
4. Conductive inks may not be used.
5. Non-conductive label adhesive shall be used ONLY.

NOTES:

1. All UL and ULC Labels shall be printed on UL approved material. The first time the label is ordered, the artwork must be sent to UL Label Center [email: LabelCenter.USA@us.ul.com, fax: (847)509-6201] for approval.
2. All UL and ULC Labels shall be printed by a UL Listed printing facility.

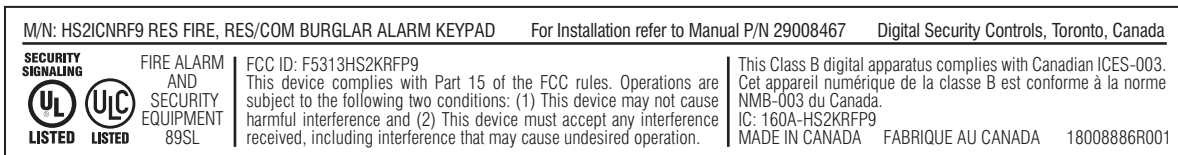

Label shown 200% of actual size

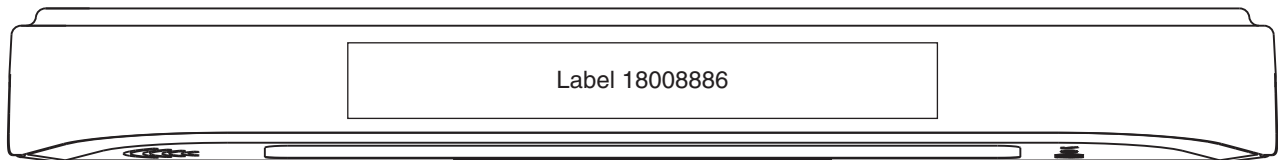

Top of the unit shows the label location (actual size)



A Tyco International Company

Digital Security Controls
3301 Langstaff Road
Concord, Ontario Canada L4K 4L2
Tele: 905 760 3000
Toll Free: 888 888 7838
Fax: 905-760-3020

18008884R001
HS2LCDRF9 NA Listing Label
915MHz FCC/IC/UL/ULC

March 12, 2013

Colour: Pantone Process Black

Material:

CLEAR UL approved self-adhesive Mylar type material - on a roll

Lamination: Top gloss finish lamination (e.g. 1F9, or equivalent)

Adhesive: Permanent adhesive backed with protective liner

Cutting: Tolerance +/- 0.010"

Dashed line indicates cutting - will not print



Square label corners are acceptable.

NOTES:


1. All items must be RoHS compliant.
2. Markings on label must be PERMANENT.
3. Indelible Ink.
4. Conductive inks may not be used.
5. Non-conductive label adhesive shall be used ONLY.

NOTES:

1. All UL and ULC Labels shall be printed on UL approved material. The first time the label is ordered, the artwork must be sent to UL Label Center [email: LabelCenter.USA@us.ul.com, fax: (847)509-6201] for approval.
2. All UL and ULC Labels shall be printed by a UL Listed printing facility.

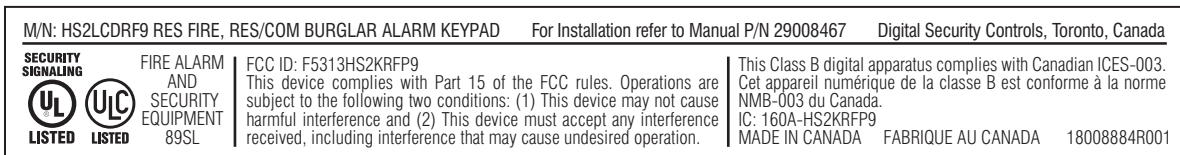

Label shown 200% of actual size

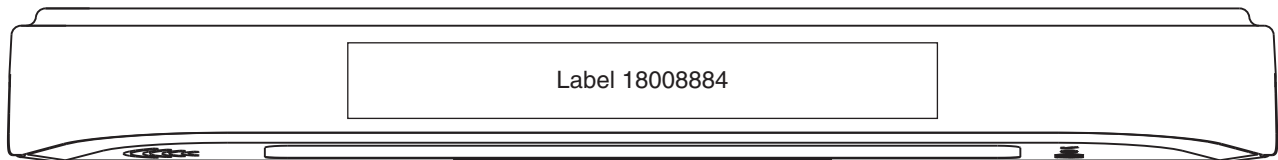

Top of the unit shows the label location (actual size)



A Tyco International Company

Digital Security Controls
3301 Langstaff Road
Concord, Ontario Canada L4K 4L2
Tele: 905 760 3000
Toll Free: 888 888 7838
Fax: 905-760-3020

18008887R001
HS2ICNRF9 NA Listing Label
915MHz FCC/IC/UL/ULC

March 12, 2013

Colour: Pantone Process Black

Material:

CLEAR UL approved self-adhesive Mylar type material - on a roll

Lamination: Top gloss finish lamination (e.g. 1F9, or equivalent)

Adhesive: Permanent adhesive backed with protective liner

Cutting: Tolerance +/- 0.010"

Dashed line indicates cutting - will not print



Square label corners are acceptable.

NOTES:


1. All items must be RoHS compliant.
2. Markings on label must be PERMANENT.
3. Indelible Ink.
4. Conductive inks may not be used.
5. Non-conductive label adhesive shall be used ONLY.

NOTES:

1. All UL and ULC Labels shall be printed on UL approved material. The first time the label is ordered, the artwork must be sent to UL Label Center [email: LabelCenter.USA@us.ul.com, fax: (847)509-6201] for approval.
2. All UL and ULC Labels shall be printed by a UL Listed printing facility.

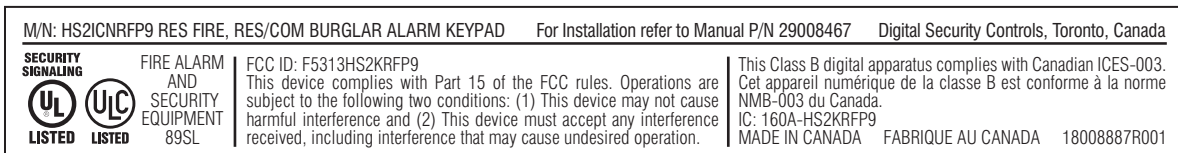

Label shown 200% of actual size

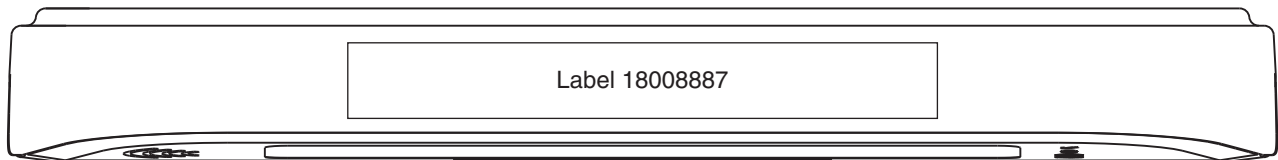

Top of the unit shows the label location (actual size)