


Continuous Conducted Emission: CC0102L1

Project: 43009rem001
 Company: TYCO
 Sample: S/01
 Operation mode: OM#02
 Description: EUT ON. TCH Mode. 115 Vac. L1 wire noise.

EC FCC Class B ESPI CC

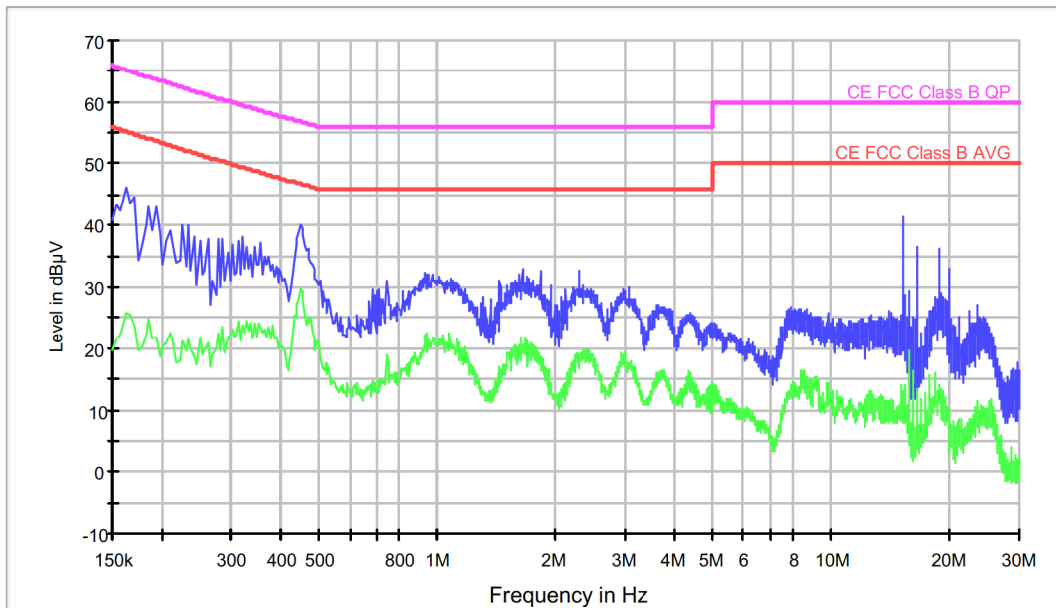

— MaxPeak Scan — Average Scan — CE FCC Class B AVG — CE FCC Class B QP


Subrange Maxima

Frequency (MHz)	MaxPeak-ClearWrite (dBµV)	Average-ClearWrite (dBµV)
0.162000	46.1	25.8
0.322000	38.1	24.0
0.450000	39.9	29.6
0.934000	32.2	22.1
1.642000	33.0	20.2
2.294000	32.6	18.8
3.650000	27.1	15.7
7.922000	26.6	13.3
15.290000	41.4	13.2
18.822000	36.3	12.9

Continuous Conducted Emission: CC01020N

Project: 43009rem001
 Company: TYCO
 Sample: S/01
 Operation mode: OM#02
 Description: EUT ON. TCH Mode. 115 Vac. Neutral wire noise.

EC FCC Class B ESPI CC

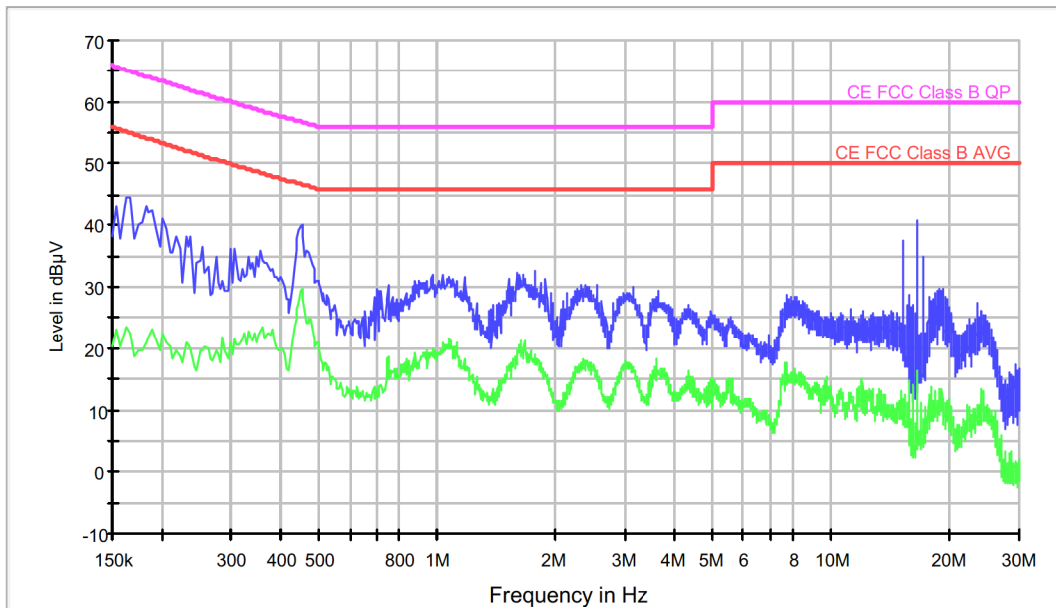

— MaxPeak Scan — Average Scan — CE FCC Class B AVG — CE FCC Class B QP

Subrange Maxima

Frequency (MHz)	MaxPeak-ClearWrite (dBµV)	Average-ClearWrite (dBµV)
0.166000	44.8	22.7
0.306000	36.3	21.7
0.454000	40.0	29.6
0.970000	32.1	19.4
1.774000	32.6	19.1
2.382000	30.3	17.7
3.646000	29.2	16.3
7.730000	28.6	16.5
16.470000	40.8	14.0
18.814000	29.6	12.3



RADIATED EMISSION. ELECTROMAGNETIC FIELD MEASURE.

LIMITS:	Product standard :	FCC 15.B (10.01.12 Edition)
	Test standard :	FCC 15.B (10.01.12 Edition)

LIMITS OF INTERFERENCE CLASS B

The applied limit for radiated emissions, 3 m distance, according with the requirements of FCC Rules and Regulations 47 CFR Part 15.109, Subpart B (10-01-12 Edition); ICES-003 ISSUE 5 & ANSI C63.10-2009 in the frequency range 30 MHz to 26 GHz, for Class B equipment, which is a transmitter in a band over 500 MHz, was:

Frequency range (MHz)	Limit for 3 m ($\mu\text{V/m}$)	Limit for 3 m ($\text{dB}\mu\text{V/m}$)
30 to 88	100	40
88 to 216	150	43,52
216 to 960	200	46,02
Above 960	500	53,98

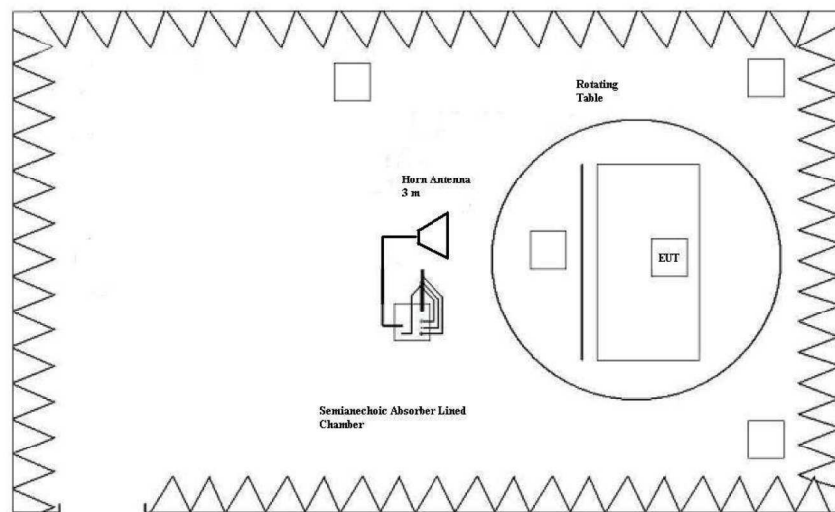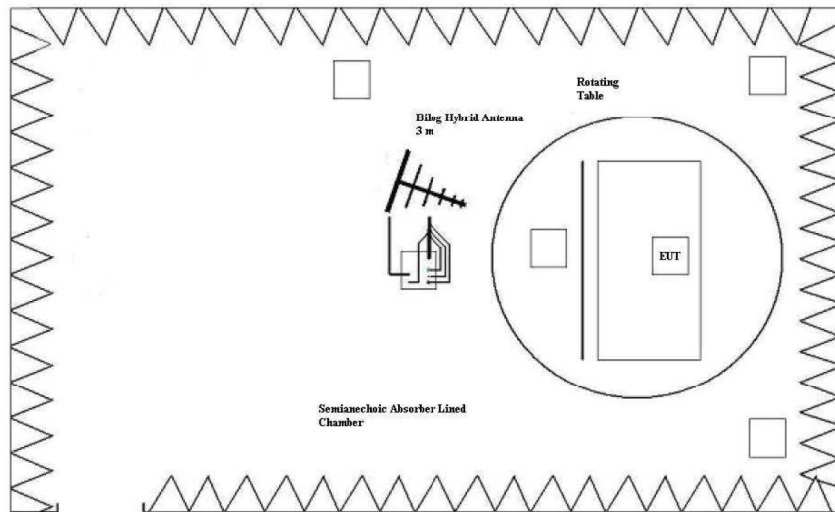


TESTED SAMPLES:	S/01
TESTED OPERATION MODES:	OM#01
TEST RESULTS :	CRmmnn: CR, Condición de Radiación; mm: Sample number; nn: Operation mode.

CRmmnn	Description	Result
CR0101	Pass.	P
CR0101_RA	Pass (Horizontal & Vertical Polarization)	P
CR0101_RA2	Pass (Horizontal & Vertical Polarization)	P

Radiated Emission: CR0101

Project: 43009rem001
 Company: TYCO
 Sample: S/01
 Operation mode: OM#01
 Description: EUT ON. IDLE Mode. 115Vac

FCC class B Bilog Hybrid

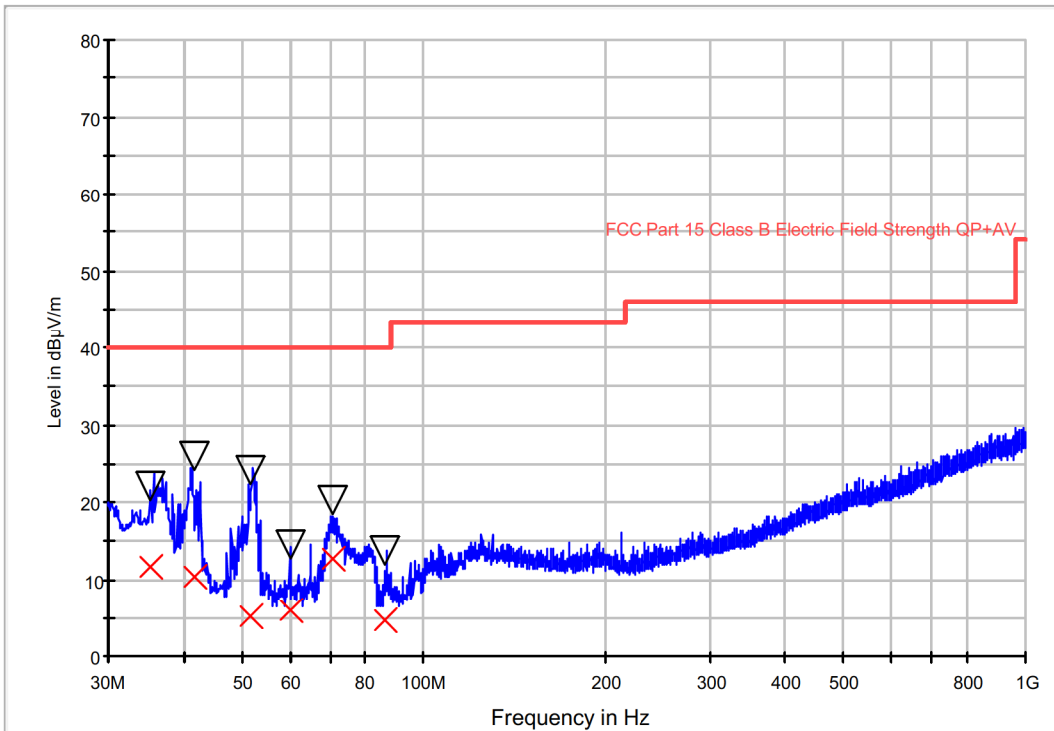

— FCC Part 15 Class B Electric Field Strength QP+AV
— Peak Preview
▽ MaxPeak
× QuasiPeak

Maximizations

Frequency (MHz)	MaxPeak (dBµV/m)	QuasiPeak (dBµV/m)	Height (cm)	Polarization	Azimuth (deg)
35.224048	22.2	11.8	104.0	H	259.0
41.635471	25.9	10.3	98.0	V	324.0
51.854309	24.1	5.1	154.0	V	41.0
59.992986	14.7	6.1	187.0	V	6.0
70.524248	20.1	12.6	99.0	V	315.0
86.582565	13.7	4.8	164.0	V	2.0

Appendix B - Photographs



