

**FCC LISTED, REGISTRATION  
 NUMBER: 720267**

Test report No:

**IC LISTED REGISTRATION  
 NUMBER IC 4621A-1**

**NIE: 46930RRF.001**

**Test report  
 REFERENCE STANDARD:  
 USA FCC Part 22 & Part 24  
 CANADA IC RSS-132, RSS-133**

<b>Identificación del objeto ensayado.....:</b> Identification of item tested	3G CELLULAR ALARM COMMUNICATOR
<b>Marca .....</b> Trademark	DSC
<b>Modelo y/o referencia tipo .....</b> Model and /or type reference	TL2553GR-E, TL2553G-E, 3G2055R-E, 3G2055-E
<b>Other identification of the product .....</b>	Commercial name: 3G CELLULAR ALARM COMMUNICATOR FCC ID: F5315TL2553GRE IC ID: 160A-TL2553GRE
<b>Final HW version .....</b>	UA684 Rev. 01
<b>Final SW version .....</b>	Ver. 5.0
<b>Características .....</b> Features	3G Cellular interface used for connection to DSC Alarm System IMPASSA in order to send events to monitoring station. Use integrated Telit radio model UE910-NAR. Module uses internal antenna.
<b>Fabricante .....</b> Manufacturer	DIGITAL SECURITY CONTROLS,A DIV. OF TYCO SAFTEY PRODUCTS CANADA LTD. 95BRIDGELAND AVE., TORONTO, ON M6A1Y7 CANADA
<b>Método de ensayo solicitado, norma.....:</b> Test method requested, standard	USA FCC Part 22 10-1-14 Edition: 22.917. Radiated emissions USA FCC Part 24 10-1-14 Edition: 24.238. Radiated emissions CANADA IC RSS-132 Issue 3, Jan. 2013. CANADA IC RSS-133 Issue 6, Jan. 2013. Measurement Guidance 971168 D01 v02r01 for certification of Licensed Digital Transmitters
<b>Resultado.....:</b> Summary	IN COMPLIANCE
<b>Aprobado por (nombre / cargo y firma) .....</b> Approved by (name / position & signature)	A. Llamas RF Lab. Manager <span style="float: right;">p.p.</span>
<b>Fecha de realización .....</b> Date of issue	2015-08-20
<b>Formato de informe No. ....:</b> Report template No	FDT08_17

# Index

Competences and guarantees.....	3
General conditions.....	3
Uncertainty .....	3
Usage of samples.....	3
Test sample description .....	4
Identification of the client .....	4
Testing period.....	4
Environmental conditions.....	4
Remarks and comments.....	5
Testing verdicts .....	6
Appendix A – Test result for FCC Part 22/IC RSS-132 & FCC Part 24/IC RSS-133 .....	7

## Competences and guarantees

AT4 wireless is a laboratory with a measurement facility in compliance with the requirements of Section 2.948 of the FCC rules and has been added to the list of facilities whose measurements data will be accepted in conjunction with applications for Certification under Parts 15 or 18 of the Commission's Rules. Registration Number: 720267.

AT4 wireless is a laboratory with a measurement site in compliance with the requirements of RSS 212, Issue 1 (Provisional) and has been added to the list of filed sites of the Canadian Certification and Engineering Bureau. Reference File Number: IC 4621A-1.

In order to assure the traceability to other national and international laboratories, AT4 wireless has a calibration and maintenance program for its measurement equipment.

AT4 wireless guarantees the reliability of the data presented in this report, which is the result of the measurements and the tests performed to the item under test on the date and under the conditions stated on the report and, it is based on the knowledge and technical facilities available at AT4 wireless at the time of performance of the test.

AT4 wireless is liable to the client for the maintenance of the confidentiality of all information related to the item under test and the results of the test.

The results presented in this Test Report apply only to the particular item under test established in this document.

**IMPORTANT:** No parts of this report may be reproduced or quoted out of context, in any form or by any means, except in full, without the previous written permission of AT4 wireless.

## General conditions

1. This report is only referred to the item that has undergone the test.
2. This report does not constitute or imply on its own an approval of the product by the Certification Bodies or competent Authorities.
3. This document is only valid if complete; no partial reproduction can be made without previous written permission of AT4 wireless.
4. This test report cannot be used partially or in full for publicity and/or promotional purposes without previous written permission of AT4 wireless and the Accreditation Bodies.

## Uncertainty

Uncertainty (factor  $k=2$ ) was calculated according to the AT4 wireless internal document PODT000.

## Usage of samples

Samples undergoing test have been selected by: **the client**.

Sample M/01 is composed of the following elements:

Control N°	Description	Model	Serial N°	Date of reception
46930/001	3G Cellular Alarm Communicatoor	TL2553GR-E, TL2553G-E, 3G2055R-E, 3G2055-E	78000426	2015-08-03
46930/02	Power Supply	PTD1620U	---	2015-08-03

1. Sample M/01 has undergone the test(s).  
All radiated tests indicated in appendix A.

## Test sample description

The test sample consists of 3 production ready samples provided for FCC/IC and PTCRB testing. Auto-answer and pass through mode available on the test samples to facilitate necessary testing.

## Identification of the client

DIGITAL SECURITY CONTROLS, A DIV. OF TYCO SAFTEY PRODUCTS CANADA LTD.  
3301 LANGSTAFF ROAD, CONCORD, ON L4K4L2 CANADA

## Testing period

The performed test started on 2015-08-05 and finished on 2015-08-06.

The tests have been performed at AT4 wireless.

## Environmental conditions

In the control chamber, the following limits were not exceeded during the test:

<b>Temperature</b>	Min. = 15 °C Max. = 35 °C
<b>Relative humidity</b>	Min. = 20 % Max. = 75 %
<b>Shielding effectiveness</b>	> 100 dB
<b>Electric insulation</b>	> 10 kΩ
<b>Reference resistance to earth</b>	< 0,5 Ω

In the semianechoic chamber the following limits were not exceeded during the test.

<b>Temperature</b>	Min. = 15 °C Max. = 35 °C
<b>Relative humidity</b>	Min. = 20 % Max. = 75 %
<b>Air pressure</b>	Min. = 860 mbar Max. = 1060 mbar
<b>Shielding effectiveness</b>	> 100 dB
<b>Electric insulation</b>	> 10 kΩ
<b>Reference resistance to earth</b>	< 0,5 Ω
<b>Normal site attenuation (NSA)</b>	< ±4 dB at 10 m distance between item under test and receiver antenna, (30 MHz to 1000 MHz)
<b>Field homogeneity</b>	More than 75% of illuminated surface is between 0 and 6 dB (26 MHz to 1000 MHz).

## Remarks and comments

1: Used instrumentation.

### Radiated Measurements

		Last Cal. date	Cal. due date
1.	Semianechoic Absorber Lined Chamber ETS FACT3 200STP	N.A.	N.A.
2.	BiconicalLog antenna ETS LINDGREN 3142E	2014/03	2017/03
3.	Multi Device Controller EMCO 2090	N.A.	N.A.
4.	Double-ridge Guide Horn antenna 1-18 GHz SCHWARZBECK BBHA 9120 D	2013/11	2016/11
5.	SHF-EHF Horn antenna 15-40 GHz Schwarbeck BBHA 9170	2014/03	2017/03
6.	EMI Test Receiver R&S ESU 40	2014/02	2016/02
7.	Spectrum analyser Rohde & Schwarz FSW50	2013/10	2015/10
8.	RF pre-amplifier 10 MHz-6 GHz SCHWARZBECK BBV9743	2015/03	2016/03
9.	RF pre-amplifier 1-18 GHz BONN ELEKTRONIK BLMA 0118-3A	2015/05	2016/05
10.	Universal Radio communication Tester R&S CMW500	2014/07	2017/07
11.	AC power supply CHROMA 6490	2013/11	2015/11

2. GSM mode has not been tested to prove USA FCC Part 22 and Canada RSS-133 compliance because the modulation scheme and the power maximum levels are the same as for GPRS mode.

Taking into account the above comments, testing in GSM mode is redundant for FCC Parts 22 and IC RSS-132 as it is the same as GPRS mode. GPRS mode has been tested as indicated on the present test report.

3. HSDPA modulation mode has not been tested to prove USA FCC Part 22 and Canada IC RSS-132 compliance because it is an improved mode of operation only for Downlink (UE reception), but using the normal WCDMA mode for UL (Up Link, UE transmission). Therefore HSDPA has no associated a Power class or modulation scheme different than WCDMA mode for the UL transmission.

Taking into account the above comments, testing in HSDPA modulation mode is redundant for FCC Parts 22 and IC RSS-132 as it is the same as WCDMA mode as long as UE transmission is concerned. WCDMA modulation mode has been tested as indicated on the present test report.

4. Test not requested. The device is based on previous certified equipment.

## Testing verdicts

Not applicable .....	N/A
Pass .....	P
Fail .....	F
Not measured .....	N/M

FCC PART 22/IC RSS-132 PARAGRAPH	VERDICT			
	NA	P	F	NM
Clause 22.913/RSS-132 Clause 5.4: RF output power				NM <sup>4</sup>
Clause 2.1047/RSS-132 Clause 5.2: Modulation characteristics				NM <sup>4</sup>
Clause 22.355/RSS-132 Clause 5.3: Frequency stability				NM <sup>4</sup>
Clause 2.1049: Occupied Bandwidth				NM <sup>4</sup>
Clause 22.917/RSS-132 Clause 5.5: Spurious emissions at antenna terminals				NM <sup>4</sup>
Clause 22.917/RSS-132 Clause 5.5: Radiated emissions		P		

4: See section "Remarks and comments".

FCC PART 24/IC RSS-133 PARAGRAPH	VERDICT			
	NA	P	F	NM
Clause 24.232/RSS-133 Clause 6.4: RF output power				NM <sup>4</sup>
Clause 2.1047/RSS-133 Clause 6.2: Modulation characteristics				NM <sup>4</sup>
Clause 24.235/RSS-133 Clause 6.3: Frequency stability				NM <sup>4</sup>
Clause 2.1049: Occupied Bandwidth				NM <sup>4</sup>
Clause 24.238/RSS-133 Clause 6.5: Spurious emissions at antenna terminals				NM <sup>4</sup>
Clause 24.238/RSS-133 Clause 6.5: Radiated emissions		P		

4: See section "Remarks and comments".

## Appendix A – Test result for FCC Part 22/IC RSS-132 & FCC Part 24/IC RSS-133

## INDEX

TEST RESULTS FOR FCC PART 22 AND IC RSS-132.....	9
TEST CONDITIONS .....	9
Radiated emissions .....	10
TEST RESULTS FOR FCC PART 24 AND IC RSS-133.....	22
TEST CONDITIONS .....	22
Radiated emissions .....	23



## TEST RESULTS FOR FCC PART 22 AND IC RSS-132

### TEST CONDITIONS

Power supply (V):

$$V_{\text{nom}} = 120 \text{ Vac}$$

$$V_{\text{max}} = \text{N/A}$$

$$V_{\text{min}} = \text{N/A}$$

The subscripts nom, min and max indicate voltage test conditions (nominal, minimum and maximum respectively, as declared by the applicant).

(\*): Declared by applicant

Type of power supply = AC Voltage from external power supply

Type of antenna = Integral antenna

### TEST FREQUENCIES:

#### GPRS AND EDGE MODULATION

Lowest channel (128): 824.2 MHz

Middle channel (190): 836.6 MHz

Highest channel (251): 848.8 MHz

#### WCDMA AND HSUPA MODULATION

Lowest channel (4132): 826.4 MHz

Middle channel (4182): 836.4 MHz

Highest channel (4233): 846.6 MHz

## Radiated emissions

### SPECIFICATION

FCC § 22.917

RSS-132. Clause 5.5.

### METHOD

The measurement was performed with the EUT inside an anechoic chamber. The spectrum was scanned from 30 MHz to at least the 10th harmonic of the highest frequency generated within the equipment.

The EUT was placed on a 1 meter high non-conductive stand at a 3 meter distance from the measuring antenna for measurements below 1 GHz and at 1 m distance for measurements above 1 GHz.

Detected emissions were maximized at each frequency by rotating the EUT and adjusting the measuring antenna height and polarization. The maximum meter reading was recorded. The radiated emissions were measured with peak detector and 1 MHz bandwidth.

Each detected emission is substituted by the Substitution method, in accordance with the ANSI/TIA/EIA-603-C: 2004.

#### Measurement Limit:

According to specification, the power of emissions shall be attenuated below the transmitter power (P) by a factor of at least  $43 + 10 \log (P)$  dB. P in watts.

At  $P_o$  transmitting power, the specified minimum attenuation becomes  $43 + 10 \log (P_o)$ , and the level in dBm relative  $P_o$  becomes:

$$P_o \text{ (dBm)} - [43 + 10 \log (P_o \text{ in mwatts}) - 30] = - 13 \text{ dBm}$$

**RESULTS**

**GPRS AND EDGE MODULATION**

A preliminary scan determined the GPRS modulation as the worst case. The following tables and plots show the results for GPRS modulation.

**1. CHANNEL: LOWEST**

**Frequency range 30 MHz-1000 MHz.**

No radiated spurious signals were detected at less than 20 dB respect to the limit.

**Frequency range 1 GHz-12.75 GHz.**

Substitution method data

Frequency (MHz)	Instrument reading (dBm)	Polarization	(1) Generator output (dBm)	(2) Cable loss (dB)	(3) Substitution antenna gain Gi (respect to isotropic radiator) (dB)	E.I.R.P. (dBm) = (1) – (2) + (3)
1648.43	-58.51	Vertical	-32.69	2.96	8.20	-27.44

**2. CHANNEL: MIDDLE**

**Frequency range 30 MHz-1000 MHz.**

No radiated spurious signals were detected at less than 20 dB respect to the limit.

**Frequency range 1 GHz-12.75 GHz.**

Substitution method data

Frequency (MHz)	Instrument reading (dBm)	Polarization	(1) Generator output (dBm)	(2) Cable loss (dB)	(3) Substitution antenna gain Gi (respect to isotropic radiator) (dB)	E.I.R.P. (dBm) = (1) – (2) + (3)
1673.10	-56.05	Vertical	-30.23	2.96	8.20	-24.98

**3. CHANNEL: HIGHEST**

**Frequency range 30 MHz-1000 MHz.**

No radiated spurious signals were detected at less than 20 dB respect to the limit.

**Frequency range 1 GHz-12.75 GHz.**

Substitution method data

Frequency (MHz)	Instrument reading (dBm)	Polarization	(1) Generator output (dBm)	(2) Cable loss (dB)	(3) Substitution antenna gain Gi (respect to isotropic radiator) (dB)	E.I.R.P. (dBm) = (1) – (2) + (3)
1697.63	-60.60	Vertical	-34.78	2.96	8.20	-29.53

## WCDMA AND HSUPA MODULATION

A preliminary scan determined the WCDMA modulation as the worst case. The following tables and plots show the results for WCDMA modulation.

### 1. CHANNEL: LOWEST

**Frequency range 30 MHz-1000 MHz.**

No radiated spurious signals were detected at less than 20 dB respect to the limit.

**Frequency range 1 GHz-12.75 GHz.**

No radiated spurious signals were detected at less than 20 dB respect to the limit.

### 2. CHANNEL: MIDDLE

**Frequency range 30 MHz-1000 MHz.**

No radiated spurious signals were detected at less than 20 dB respect to the limit.

**Frequency range 1 GHz-12.75 GHz.**

No radiated spurious signals were detected at less than 20 dB respect to the limit.

### 3. CHANNEL: HIGHEST

**Frequency range 30 MHz-1000 MHz.**

No radiated spurious signals were detected at less than 20 dB respect to the limit.

**Frequency range 1 GHz-12.75 GHz.**


No radiated spurious signals were detected at less than 20 dB respect to the limit.

Verdict: PASS

FREQUENCY RANGE 30 MHz-1000 MHz.


**GPRS MODULATION**

CHANNEL: LOWEST

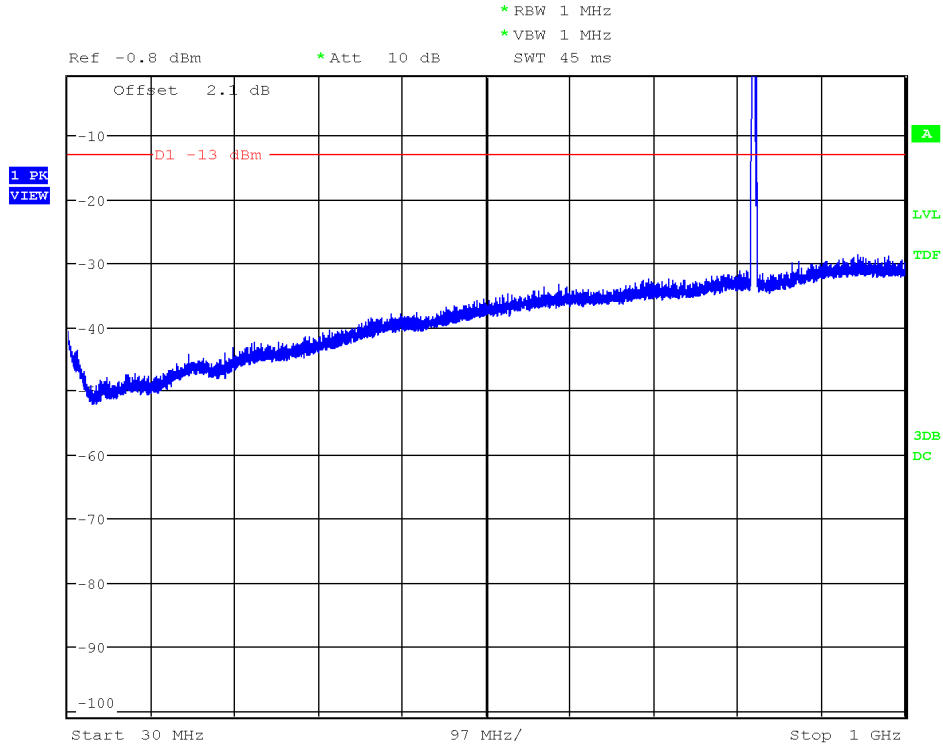


Note: The peak above the limit is the carrier frequency.

CHANNEL: MIDDLE

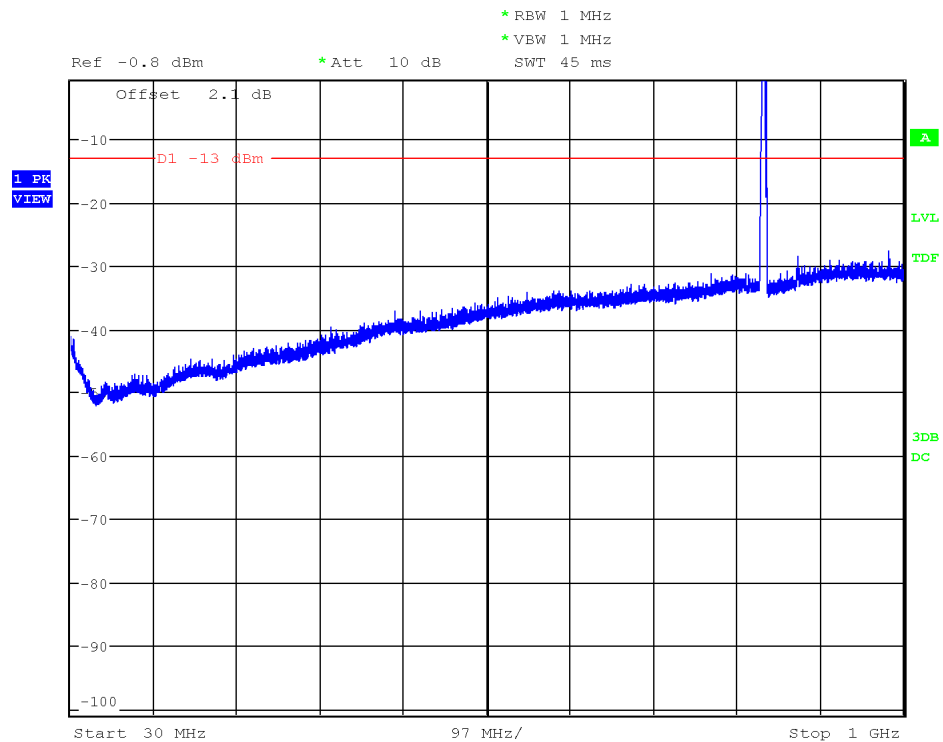

Note: The peak above the limit is the carrier frequency.


CHANNEL: HIGHEST

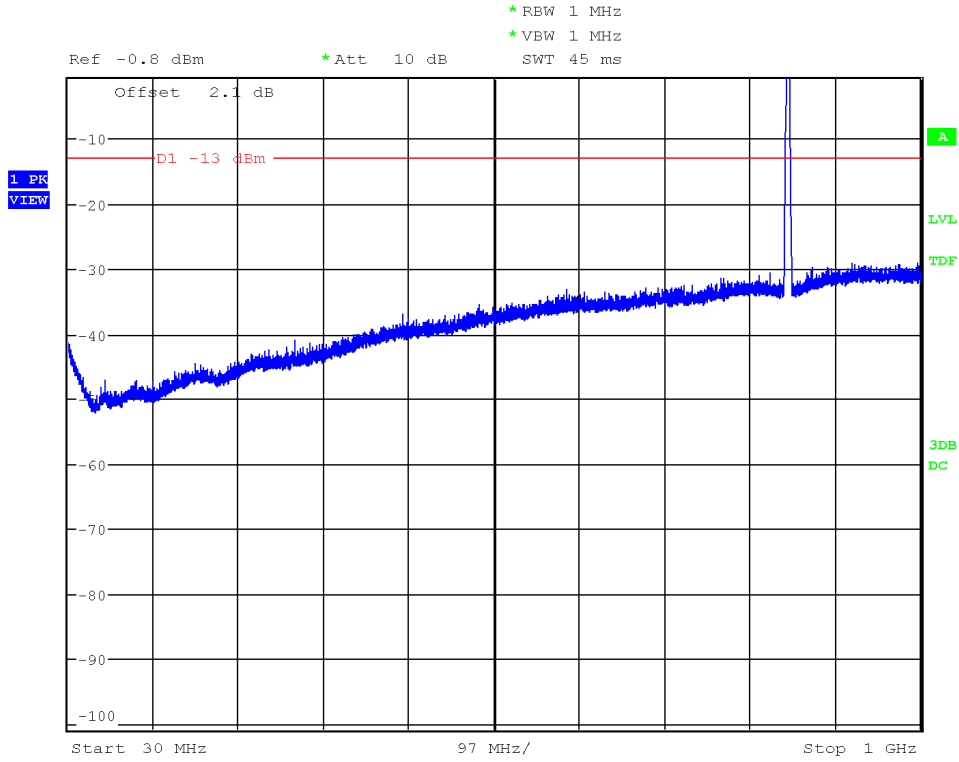

Note: The peak above the limit is the carrier frequency.


WCDMA MODULATION

CHANNEL: LOWEST

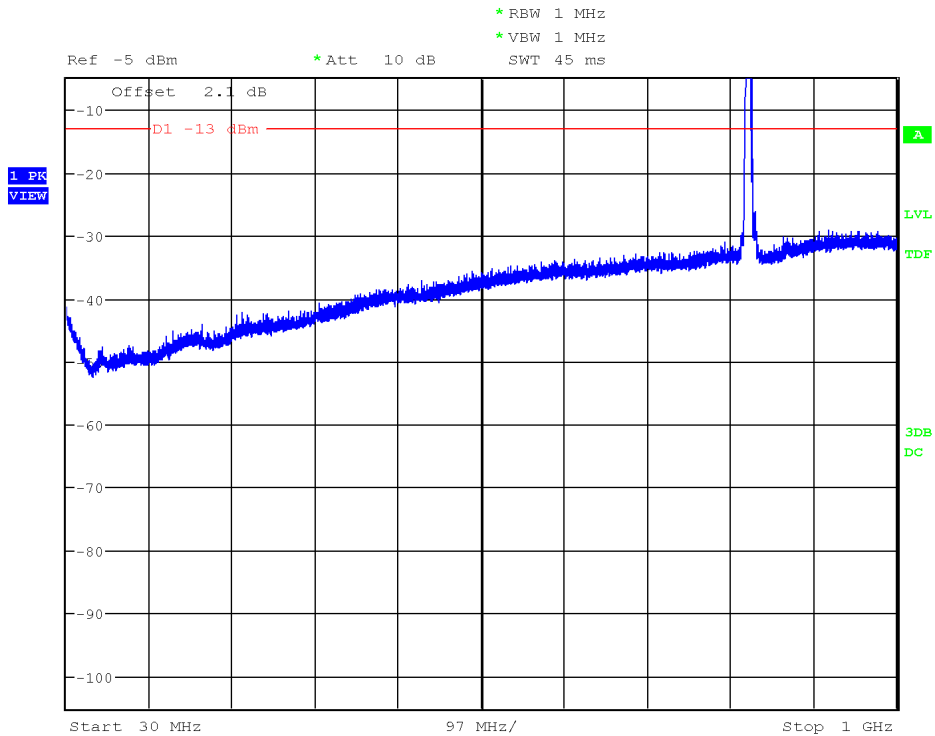


Note: The peak above the limit is the carrier frequency.

CHANNEL: MIDDLE

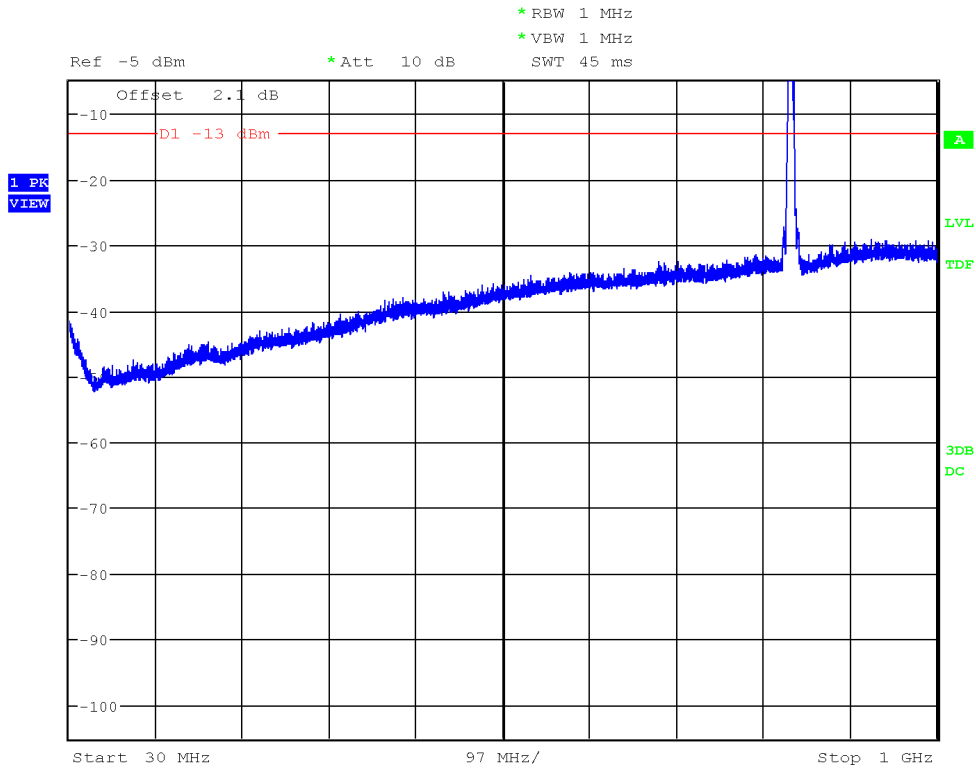

Note: The peak above the limit is the carrier frequency.

CHANNEL: HIGHEST

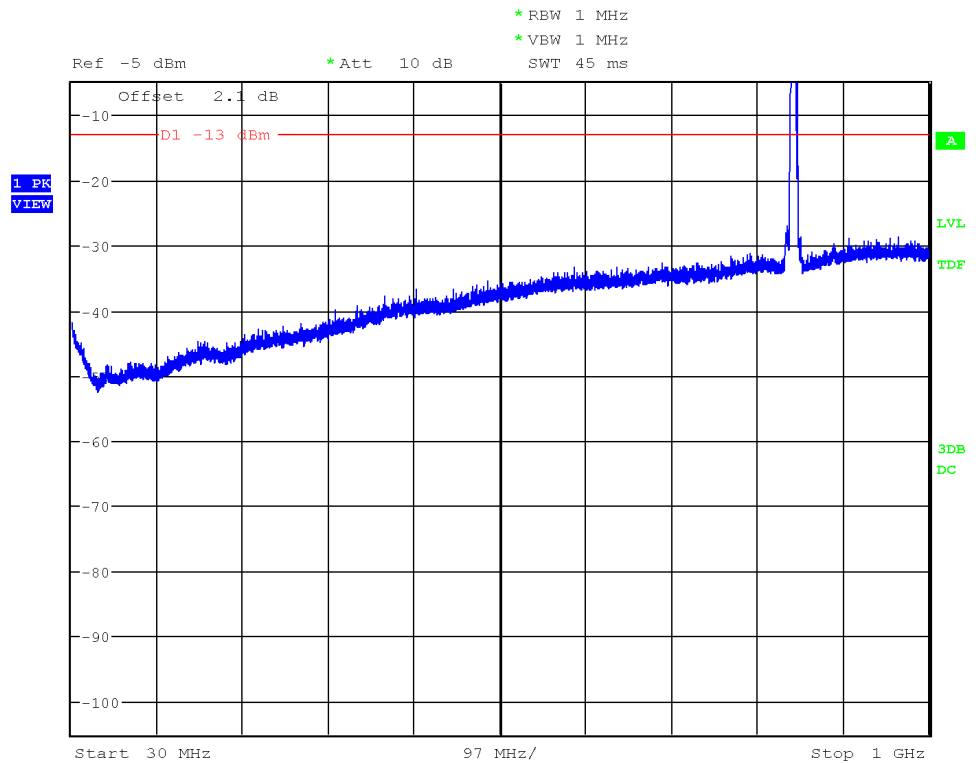


Note: The peak above the limit is the carrier frequency.


FREQUENCY RANGE 1 GHz to 3 GHz.

**GPRS MODULATION**

**CHANNEL: LOWEST**

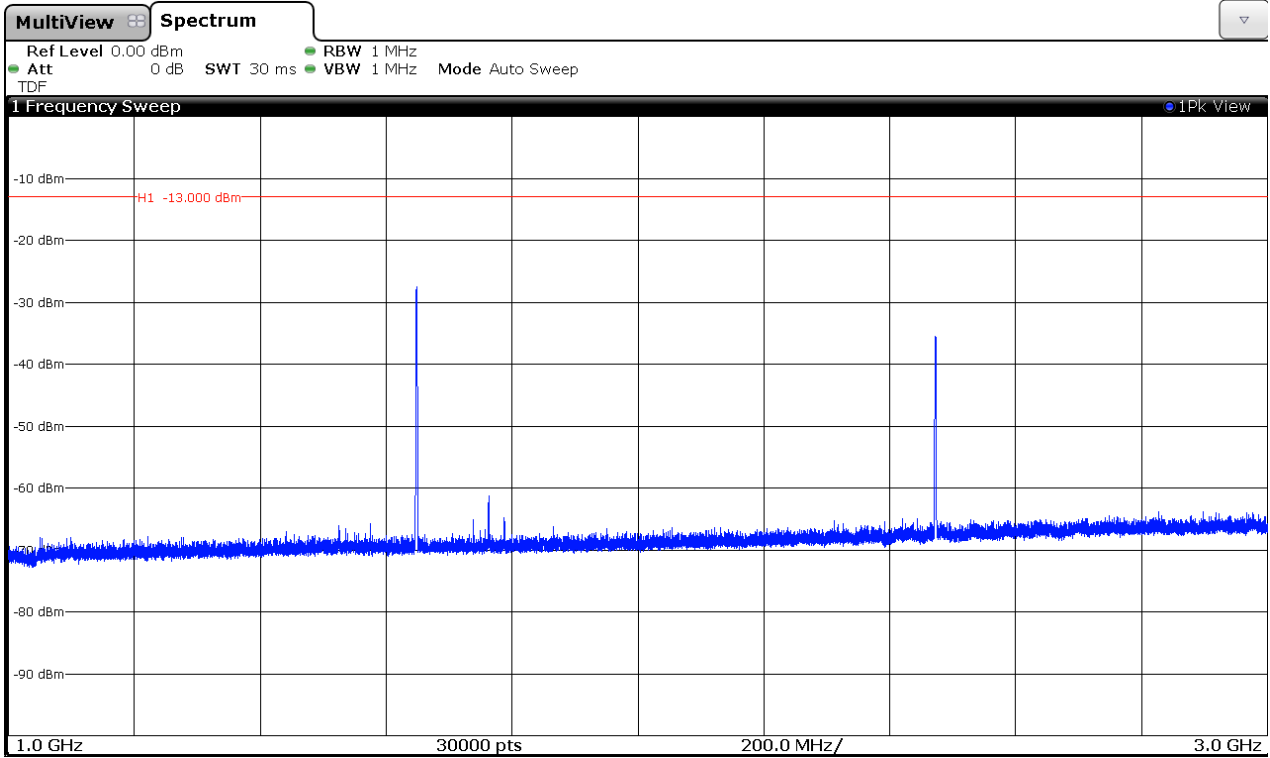


**CHANNEL: MIDDLE**

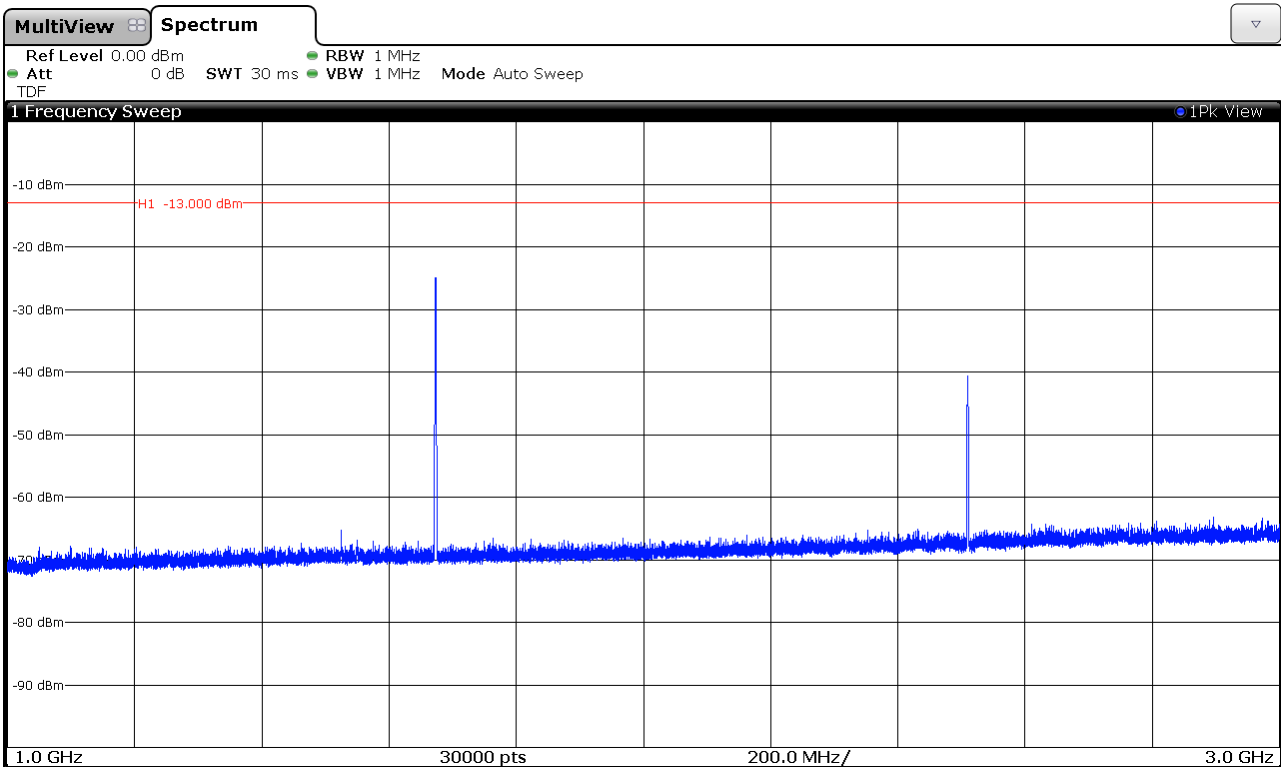




CHANNEL: HIGHEST

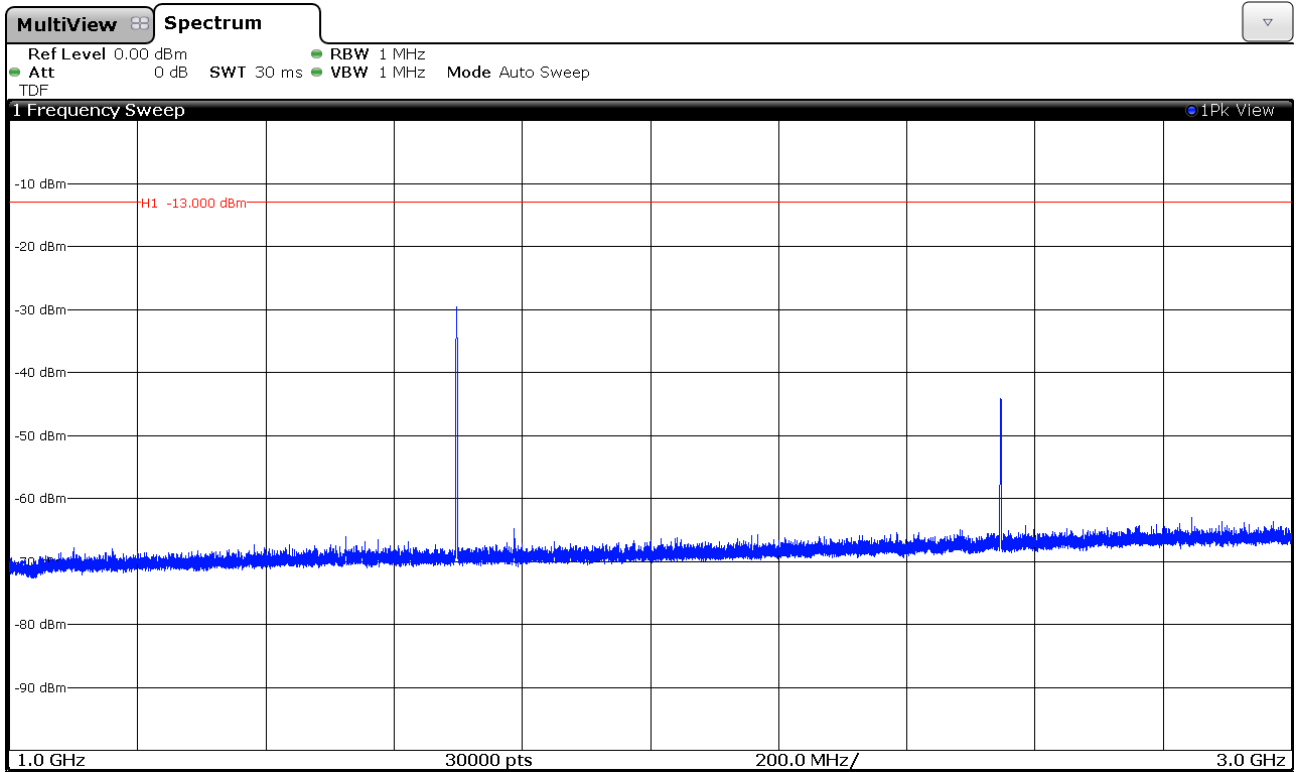


WCDMA MODULATION


CHANNEL: LOWEST

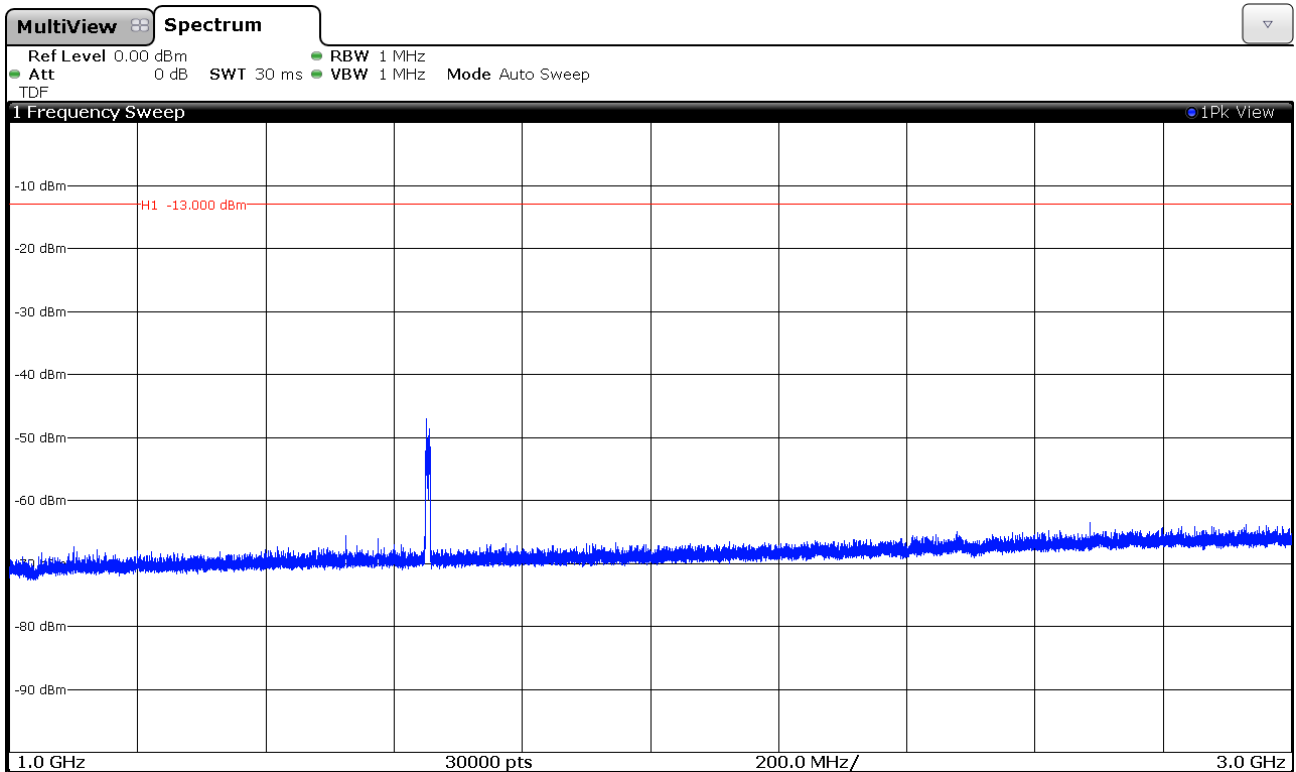

### CHANNEL: MIDDLE

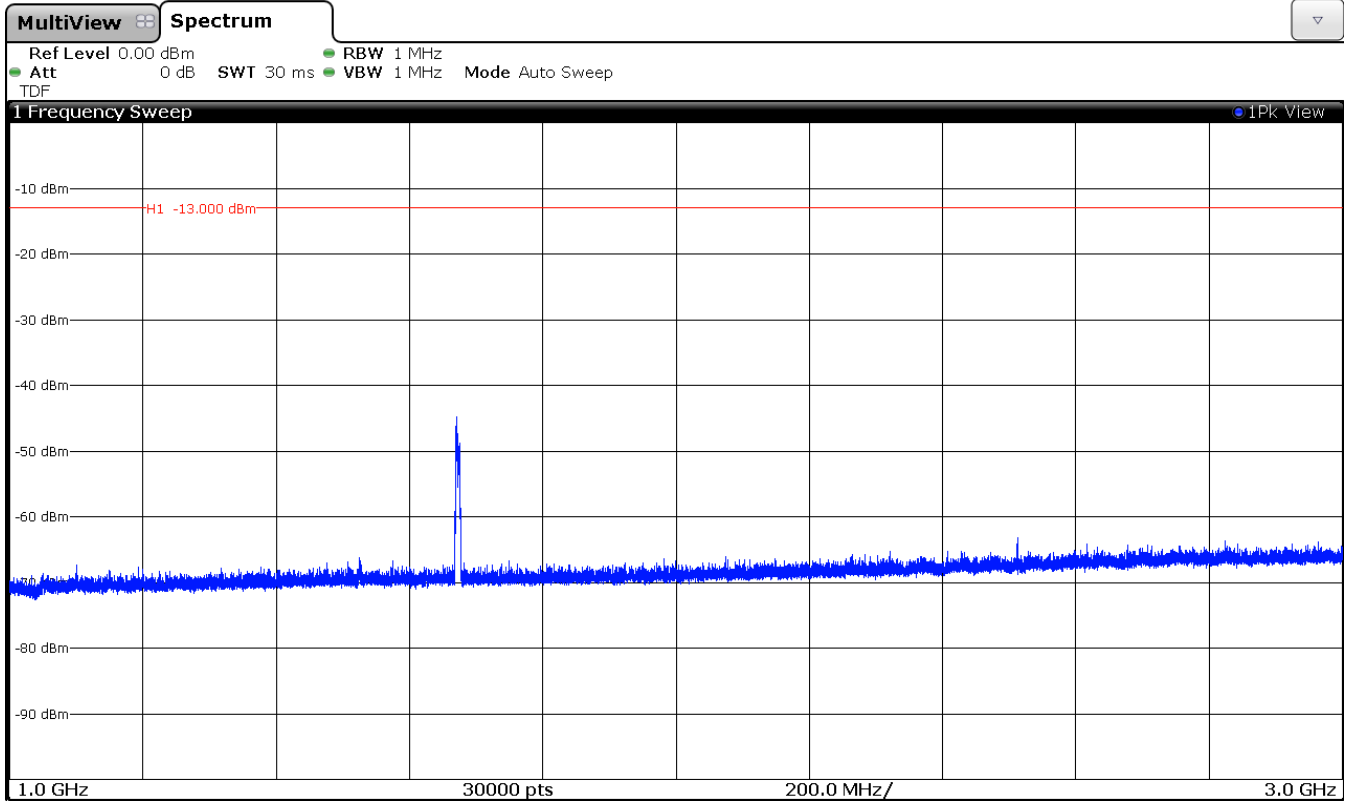


### CHANNEL: HIGHEST

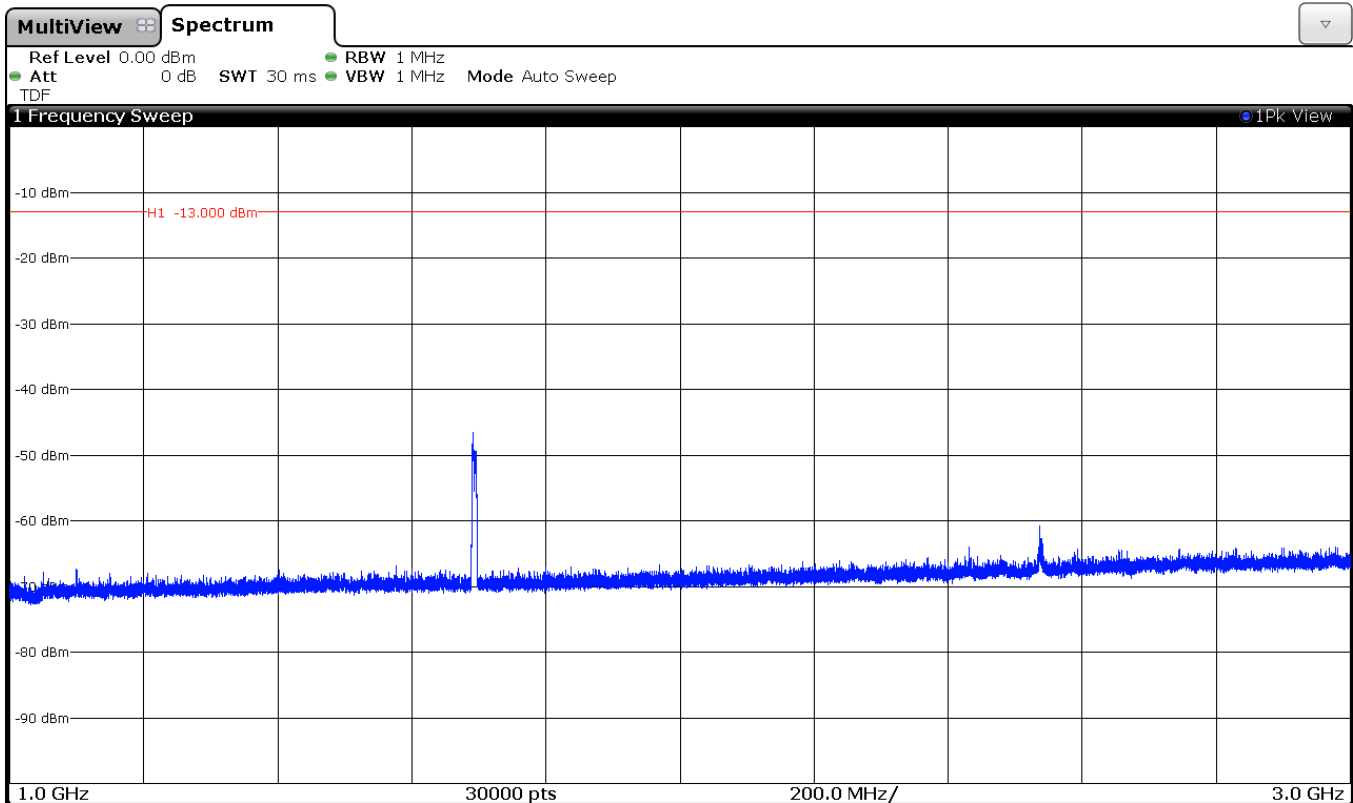


FREQUENCY RANGE 3 GHz to 12.75 GHz.

**GPRS MODULATION**


CHANNEL: LOWEST

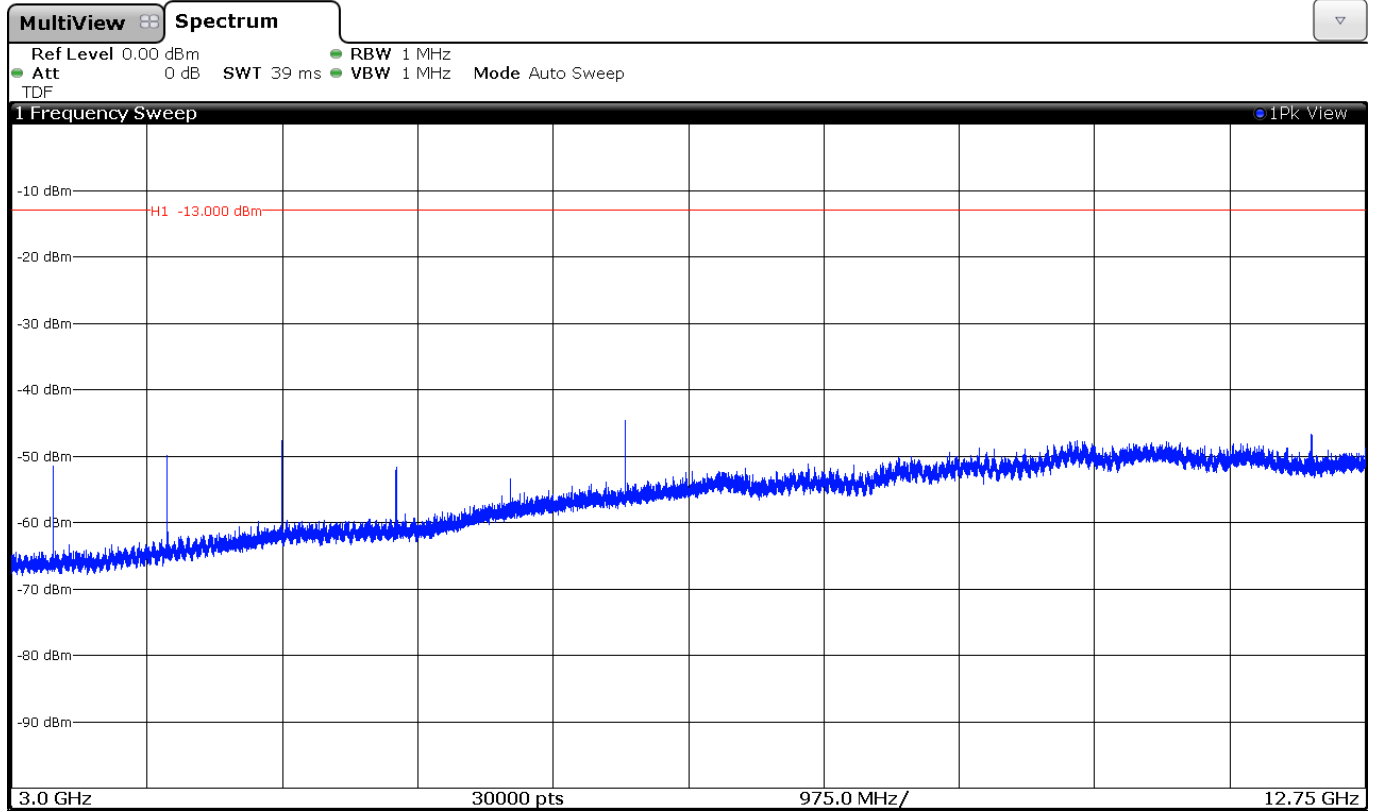

CHANNEL: MIDDLE

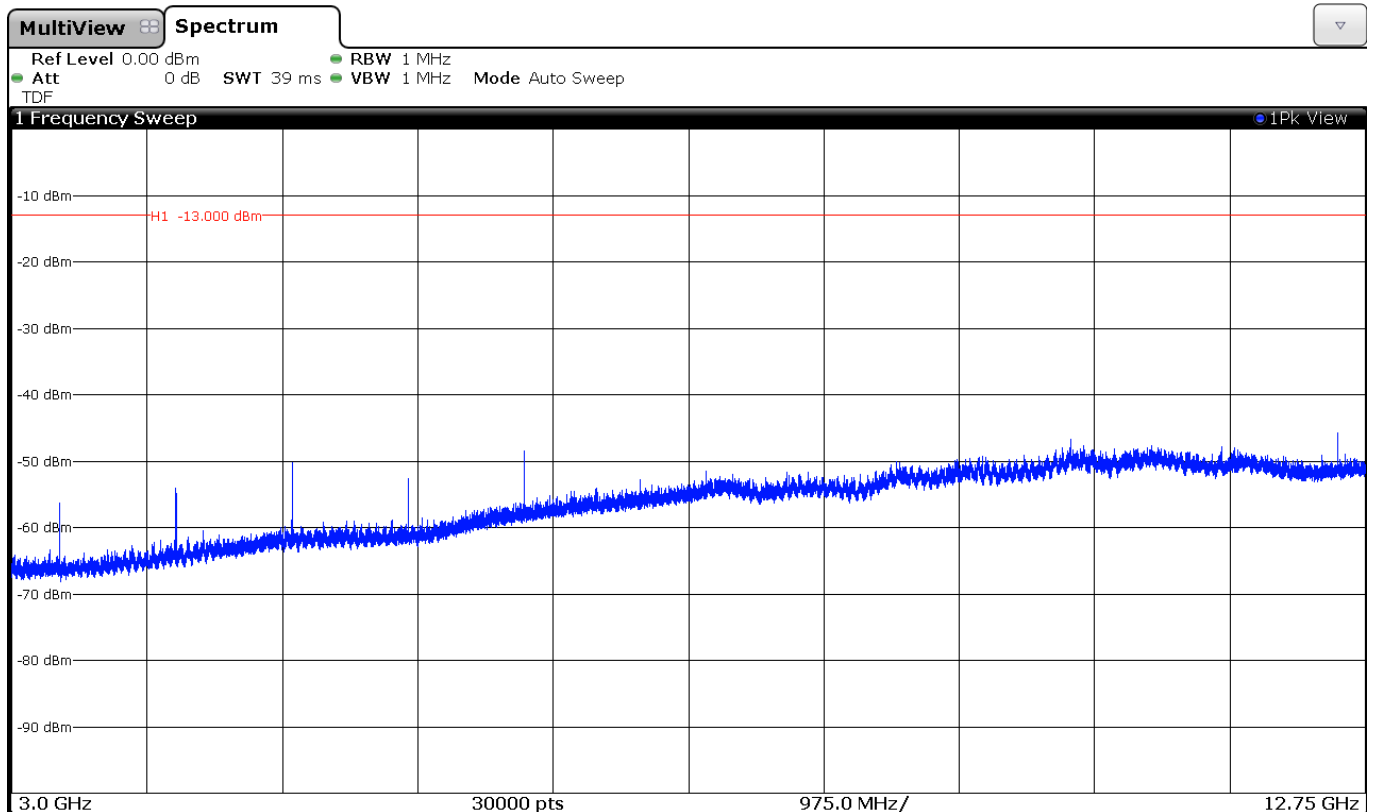


CHANNEL: HIGHEST

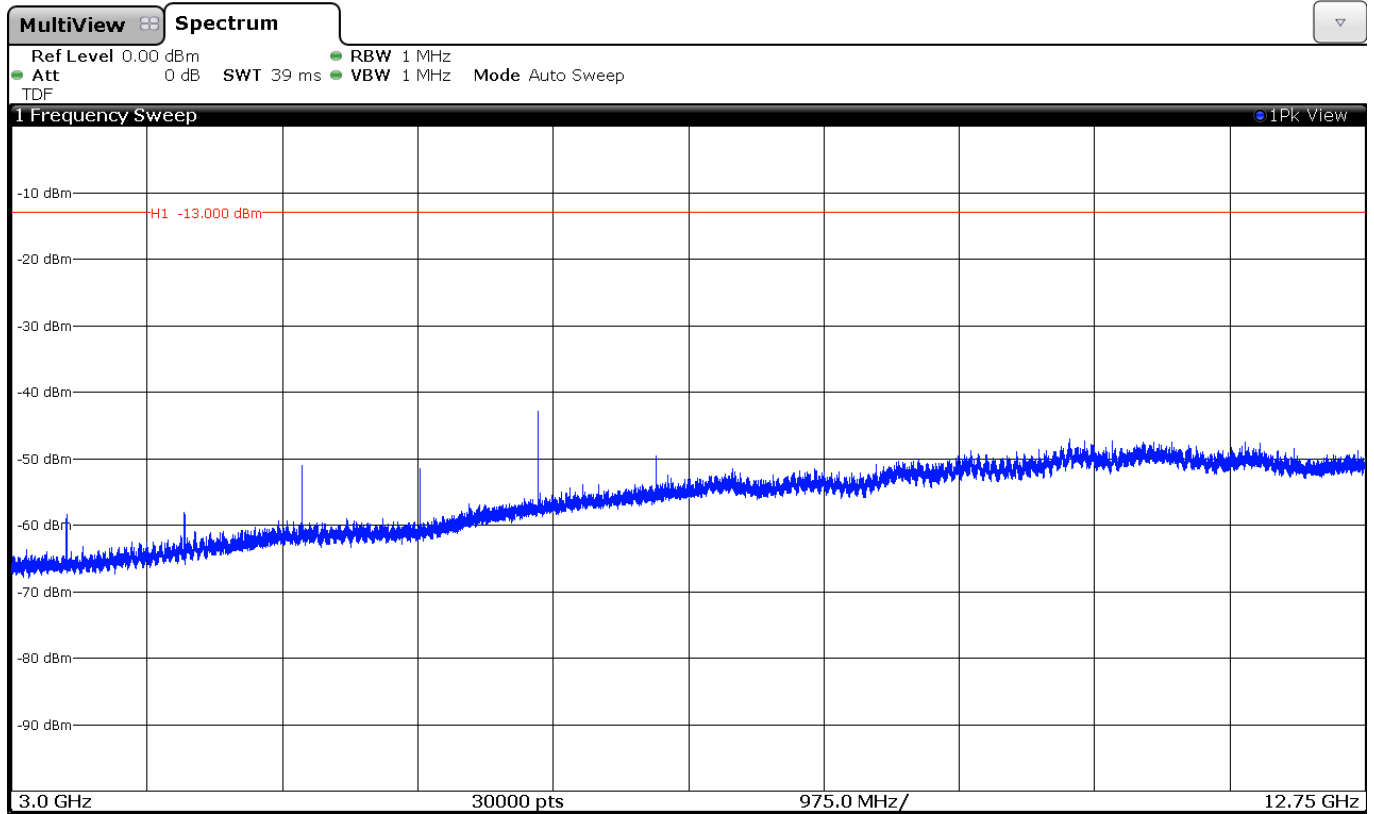

WCDMA MODULATION

CHANNEL: LOWEST

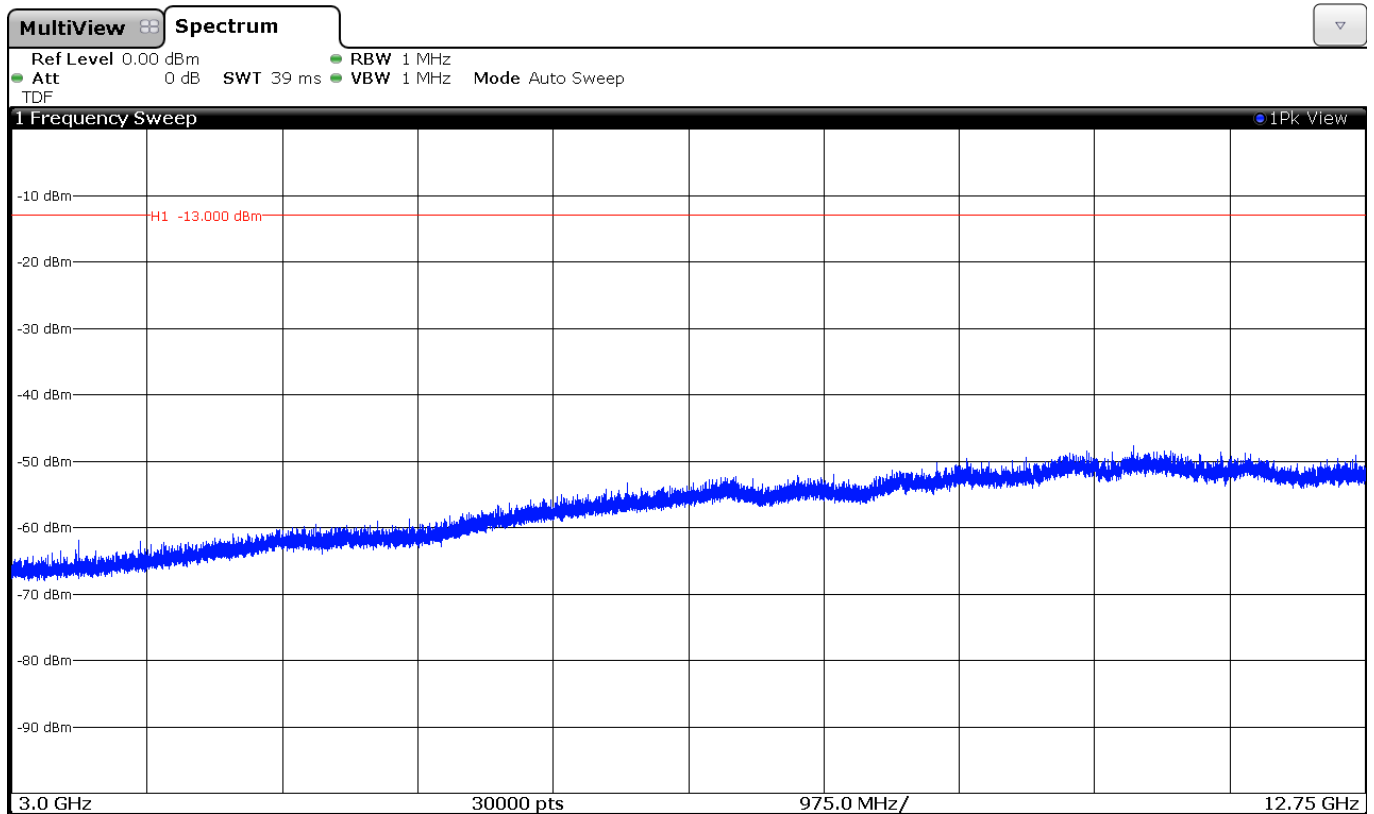



## TEST RESULTS FOR FCC PART 24 AND IC RSS-133

### TEST CONDITIONS

Power supply (V):

$$V_{\text{nom}} = 120 \text{ Vac}$$

$$V_{\text{max}} = \text{N/A}$$

$$V_{\text{min}} = \text{N/A}$$

The subscripts nom, min and max indicate voltage test conditions (nominal, minimum and maximum respectively, as declared by the applicant).

(\*): Declared by applicant

Type of power supply = AC Voltage from external power supply

Type of antenna = Integral antenna

### TEST FREQUENCIES:

#### GPRS AND EDGE MODULATION

Lowest channel (512): 1850.2 MHz

Middle channel (662): 1880.2 MHz

Highest channel (810): 1909.8 MHz

#### WCDMA AND HSUPA MODULATION

Lowest channel (9262): 1852.4 MHz

Middle channel (9400): 1880.0 MHz

Highest channel (9538): 1907.6 MHz

## Radiated emissions

### SPECIFICATION

FCC § 24.238

RSS-133. Clause 6.5.

### METHOD

The measurement was performed with the EUT inside an anechoic chamber. The spectrum was scanned from 30 MHz to the 10th harmonic of the highest frequency generated within the equipment.

The EUT was placed on a 1 meter high non-conductive stand at a 3 meter distance from the measuring antenna for measurements below 1 GHz and at 1 m distance for measurements above 1 GHz.

Detected emissions were maximized at each frequency by rotating the EUT and adjusting the measuring antenna height and polarization. The maximum meter reading was recorded. The radiated emissions were measured with peak detector and 1 MHz bandwidth.

Each detected emissions were substituted by the Substitution method, in accordance with the ANSI/TIA/EIA-603-C: 2004.

### Measurement Limit:

According to specification. the power of emissions shall be attenuated below the transmitter power (P) by a factor of at least  $43 + 10 \log (P)$  dB. P in watts.

At  $P_o$  transmitting power. the specified minimum attenuation becomes  $43+10\log (P_o)$ . and the level in dBm relative  $P_o$  becomes:

$$P_o \text{ (dBm)} - [43 + 10 \log (P_o \text{ in mwatts}) - 30] = - 13 \text{ dBm}$$

**RESULTS**

**GPRS AND EDGE MODULATION**

A preliminary scan determined the GPRS modulation as the worst case. The following plots show the results for GPRS modulation.

**1. CHANNEL: LOWEST**

**Frequency range 30 MHz-1000 MHz.**

No spurious signals were found in all the range.

**Frequency range 1 GHz-20 GHz.**

No radiated spurious signals were detected at less than 20 dB respect to the limit.

**2. CHANNEL: MIDDLE**

**Frequency range 30 MHz-1000 MHz.**

No spurious signals were found in all the range.

**Frequency range 1 GHz-20 GHz.**

**Substitution method data**

Frequency (MHz)	Instrument reading (dBm)	Polarization	(1) Generator output (dBm)	(2) Cable loss (dB)	(3) Substitution antenna gain Gi (respect to isotropic radiator) (dB)	E.I.R.P. (dBm) = (1) – (2) + (3)
11280.75	-49.42	Vertical	-33.14	9.02	10.70	-31.46

**3. CHANNEL: HIGHEST**

**Frequency range 30 MHz-1000 MHz.**

No spurious signals were found in all the range.

**Frequency range 1 GHz-20 GHz.**

No radiated spurious signals were detected at less than 20 dB respect to the limit.



## WCDMA AND HSUPA MODULATION

A preliminary scan determined the WCDMA modulation as the worst case. The following plots show the results for WCDMA modulation.

### 1. CHANNEL: LOWEST

**Frequency range 30 MHz-1000 MHz.**

No spurious signals were found in all the range.

**Frequency range 1 GHz-20 GHz.**

No radiated spurious signals were detected at less than 20 dB respect to the limit.

### 2. CHANNEL: MIDDLE

**Frequency range 30 MHz-1000 MHz.**

No spurious signals were found in all the range.

**Frequency range 1 GHz-20 GHz.**

No radiated spurious signals were detected at less than 20 dB respect to the limit.

### 3. CHANNEL: HIGHEST

**Frequency range 30 MHz-1000 MHz.**

No spurious signals were found in all the range.


**Frequency range 1 GHz-20 GHz.**

No radiated spurious signals were detected at less than 20 dB respect to the limit.

Verdict: PASS


FREQUENCY RANGE 30 MHz-1000 MHz.

**GPRS MODULATION**

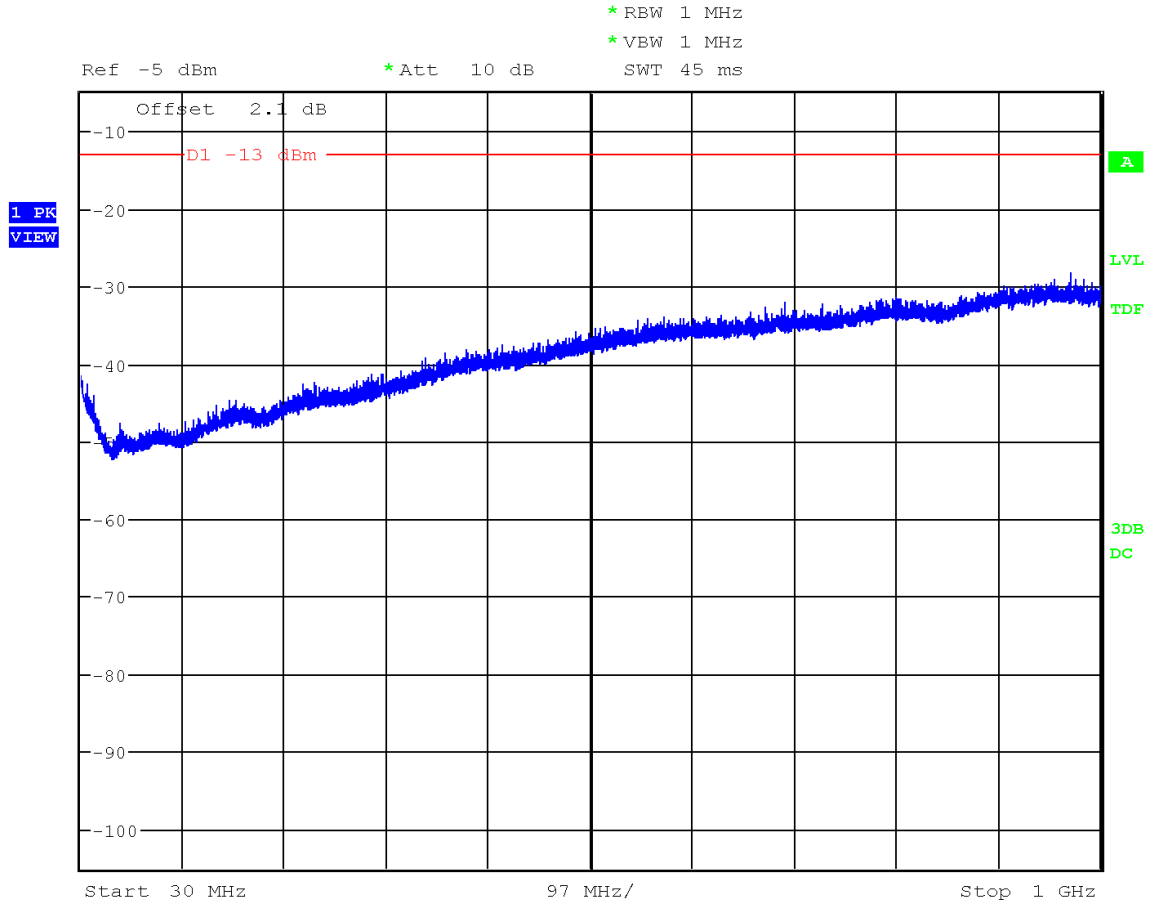

(This plot is valid for all three channels)

## WCDMA MODULATION

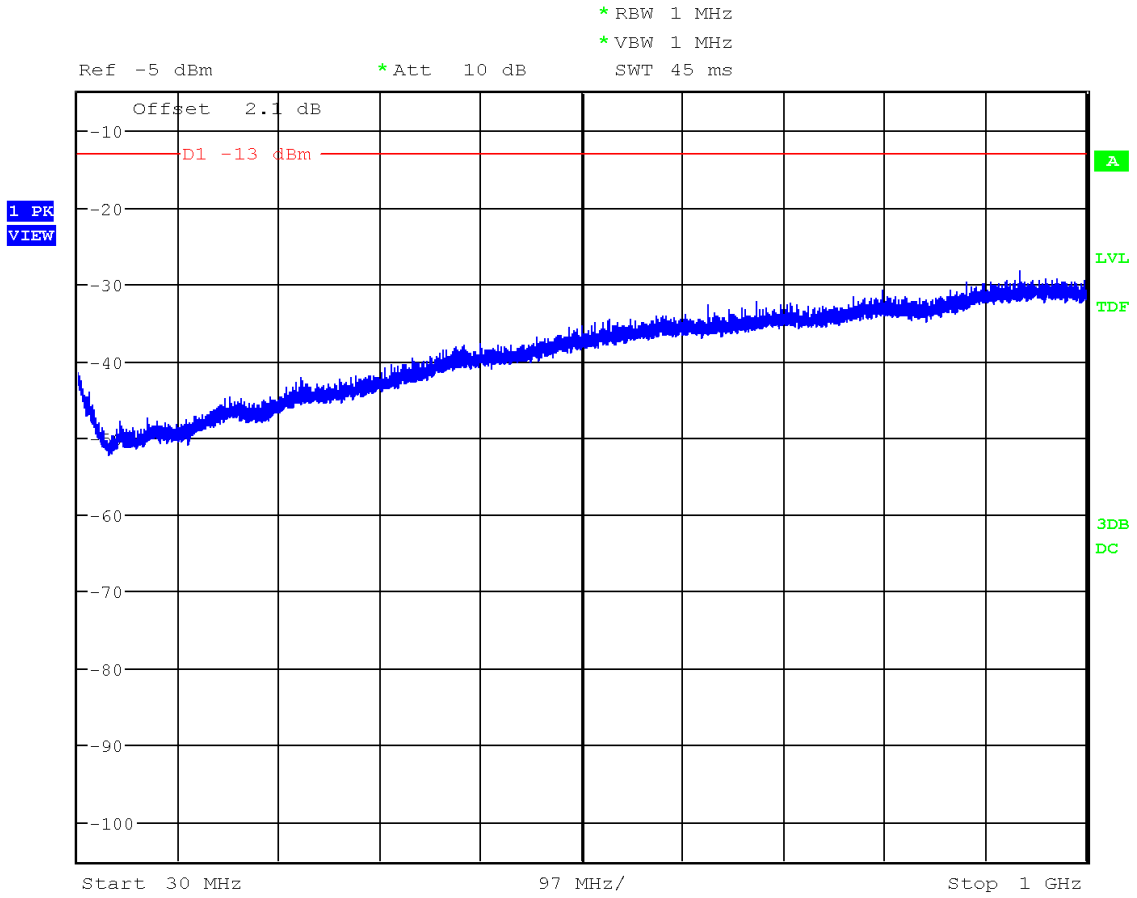


(This plot is valid for all three channels)

FREQUENCY RANGE 1 GHz to 3 GHz.


**GPRS MODULATION**

CHANNEL: LOWEST

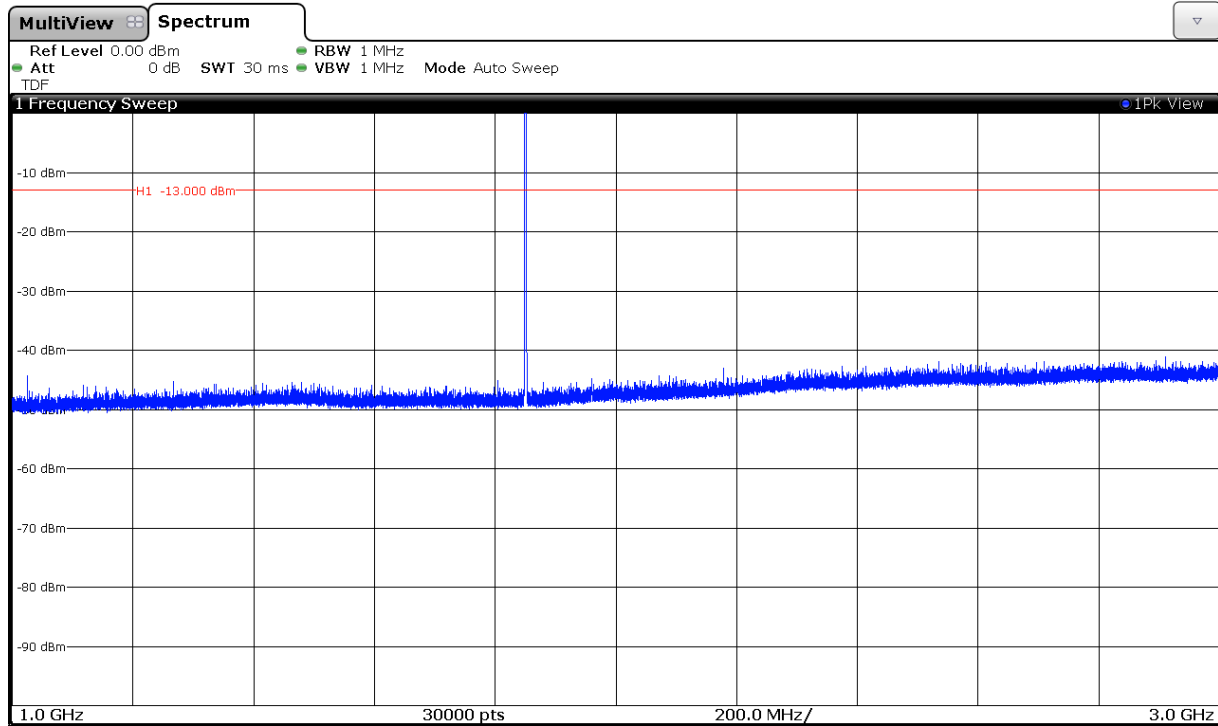


Note: The peak above the limit is the carrier frequency.

CHANNEL: MIDDLE

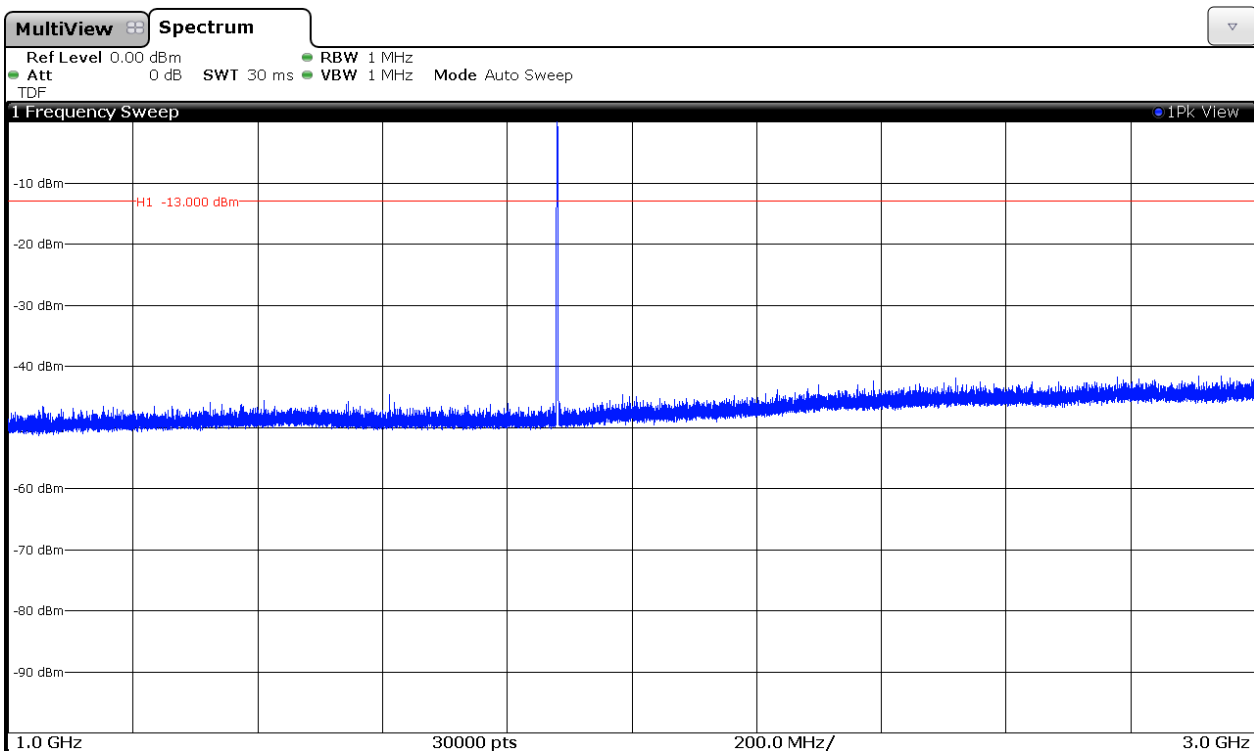

Note: The peak above the limit is the carrier frequency.


CHANNEL: HIGHEST

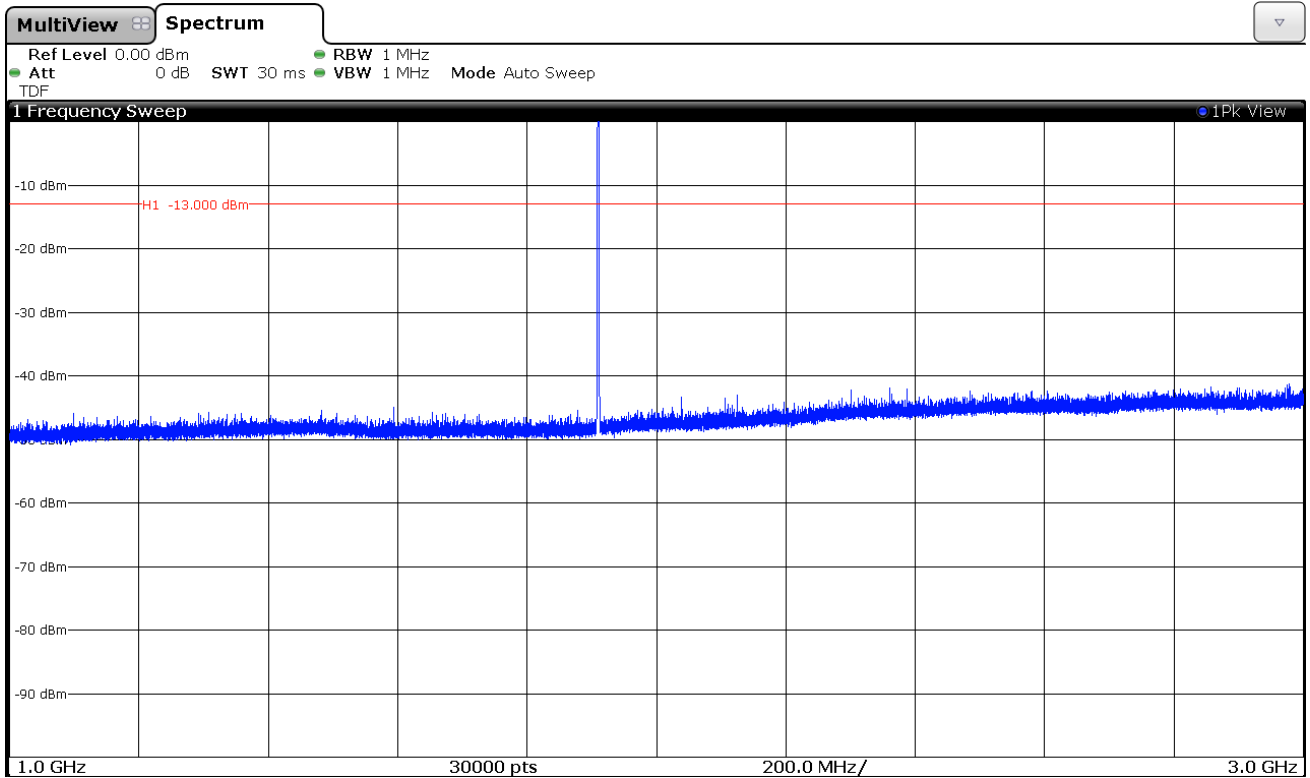

Note: The peak above the limit is the carrier frequency.


WCDMA MODULATION

CHANNEL: LOWEST

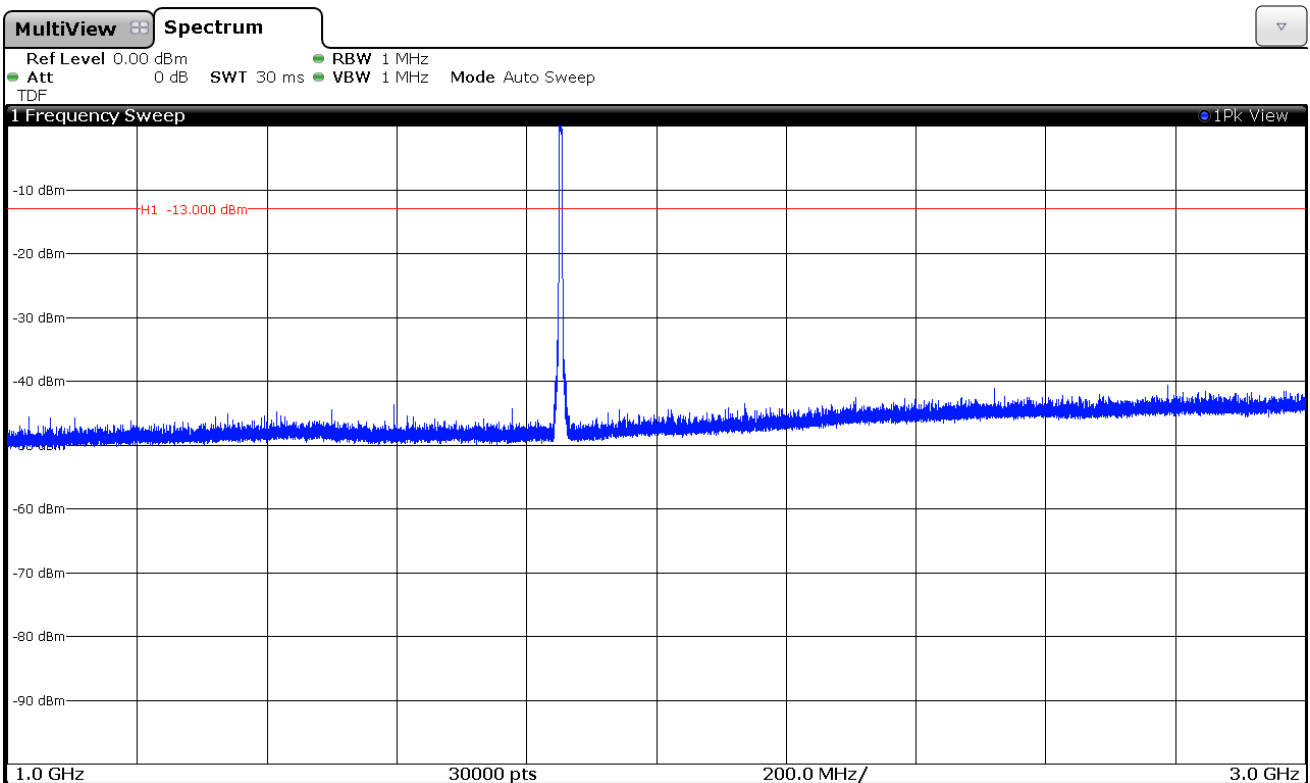


Note: The peak above the limit is the carrier frequency.

CHANNEL: MIDDLE

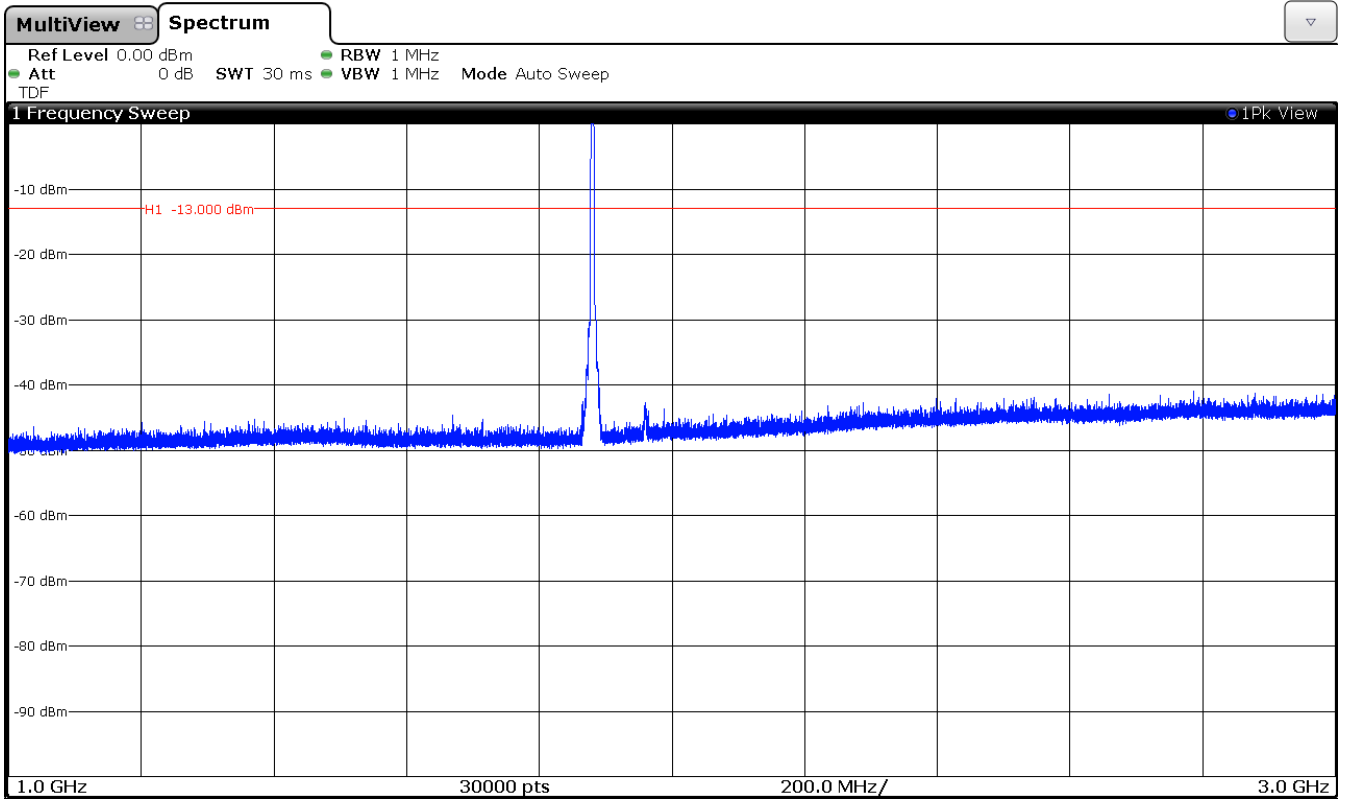

Note: The peak above the limit is the carrier frequency.

CHANNEL: HIGHEST

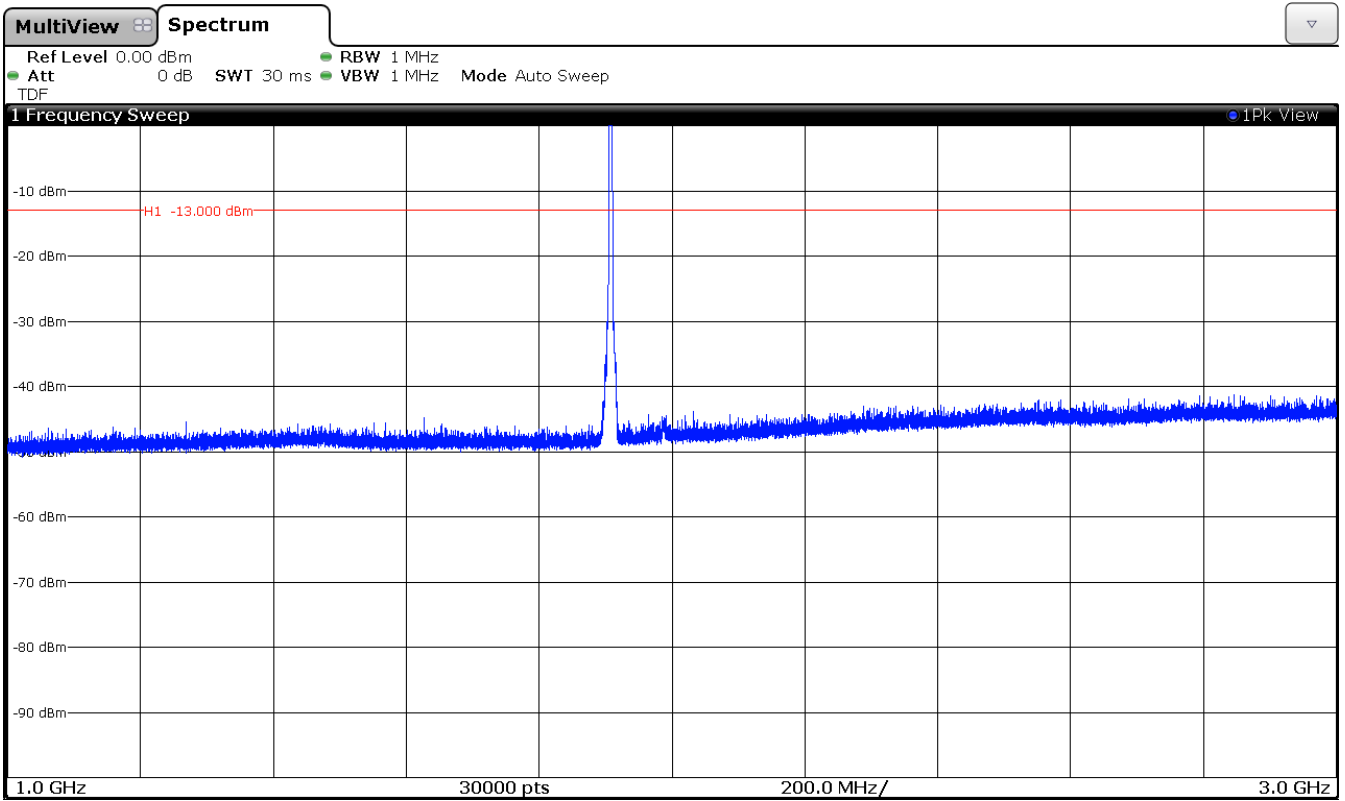


Note: The peak above the limit is the carrier frequency.


FREQUENCY RANGE 3 GHz to 18 GHz.

**GPRS MODULATION**


CHANNEL: LOWEST

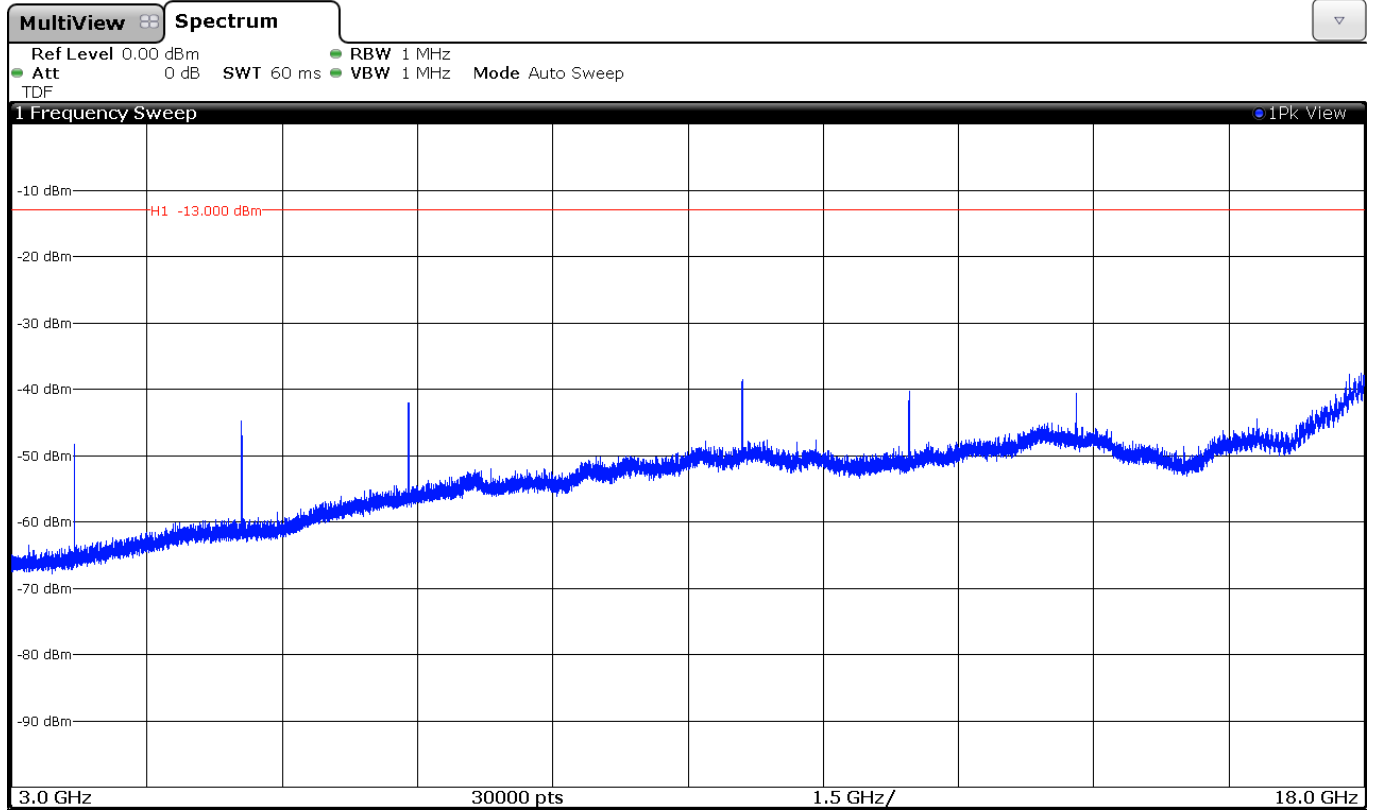

CHANNEL: MIDDLE

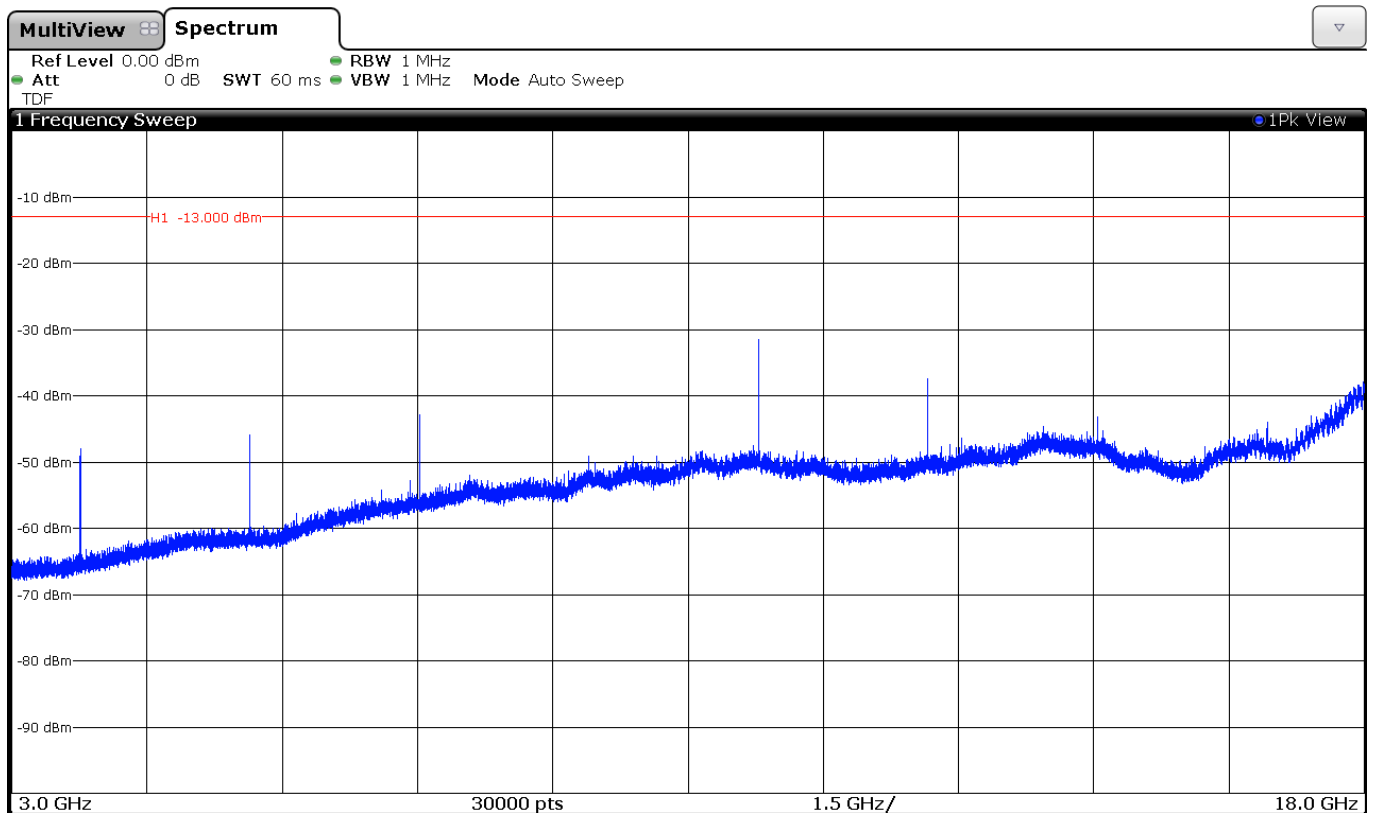


CHANNEL: HIGHEST

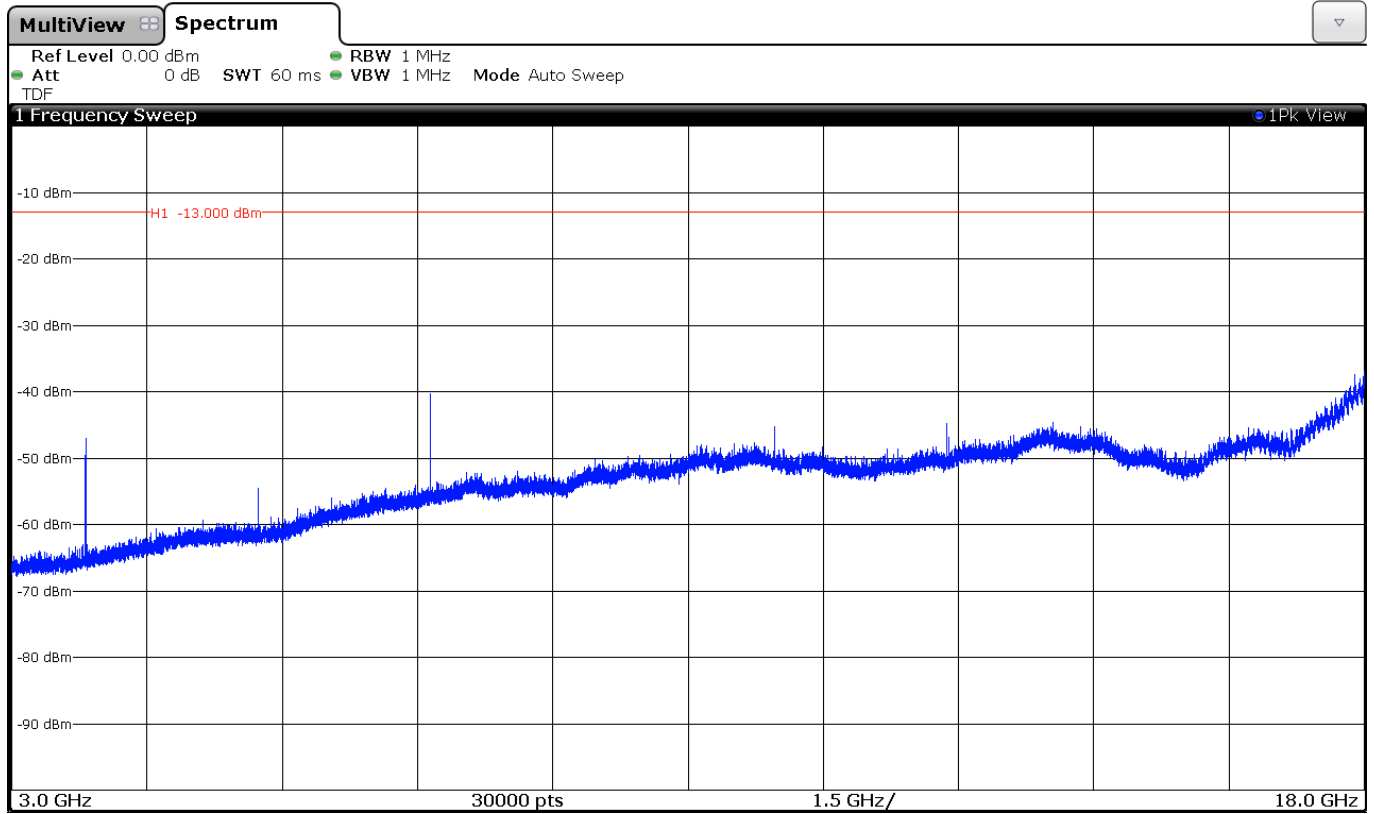


WCDMA MODULATION

CHANNEL: LOWEST

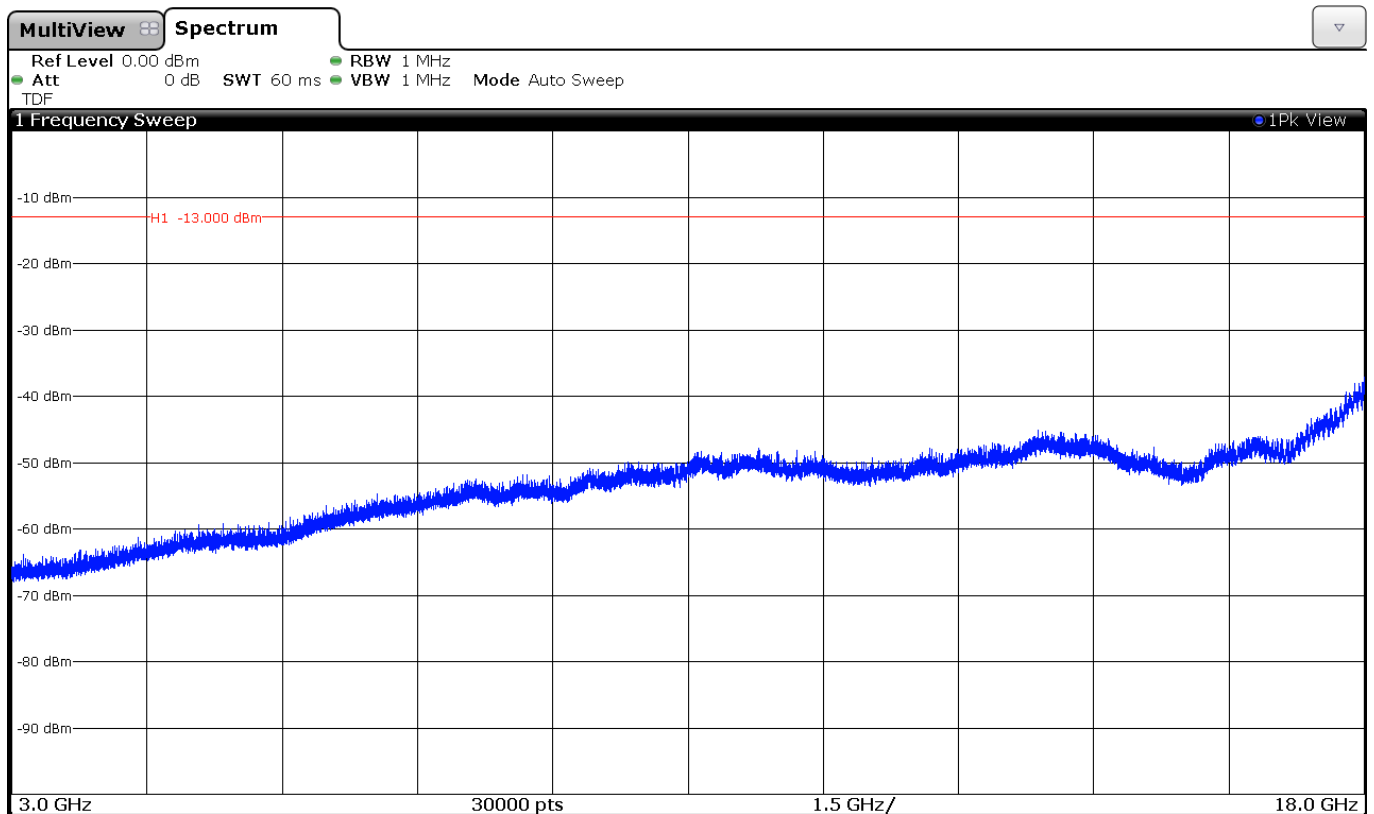




CHANNEL: MIDDLE

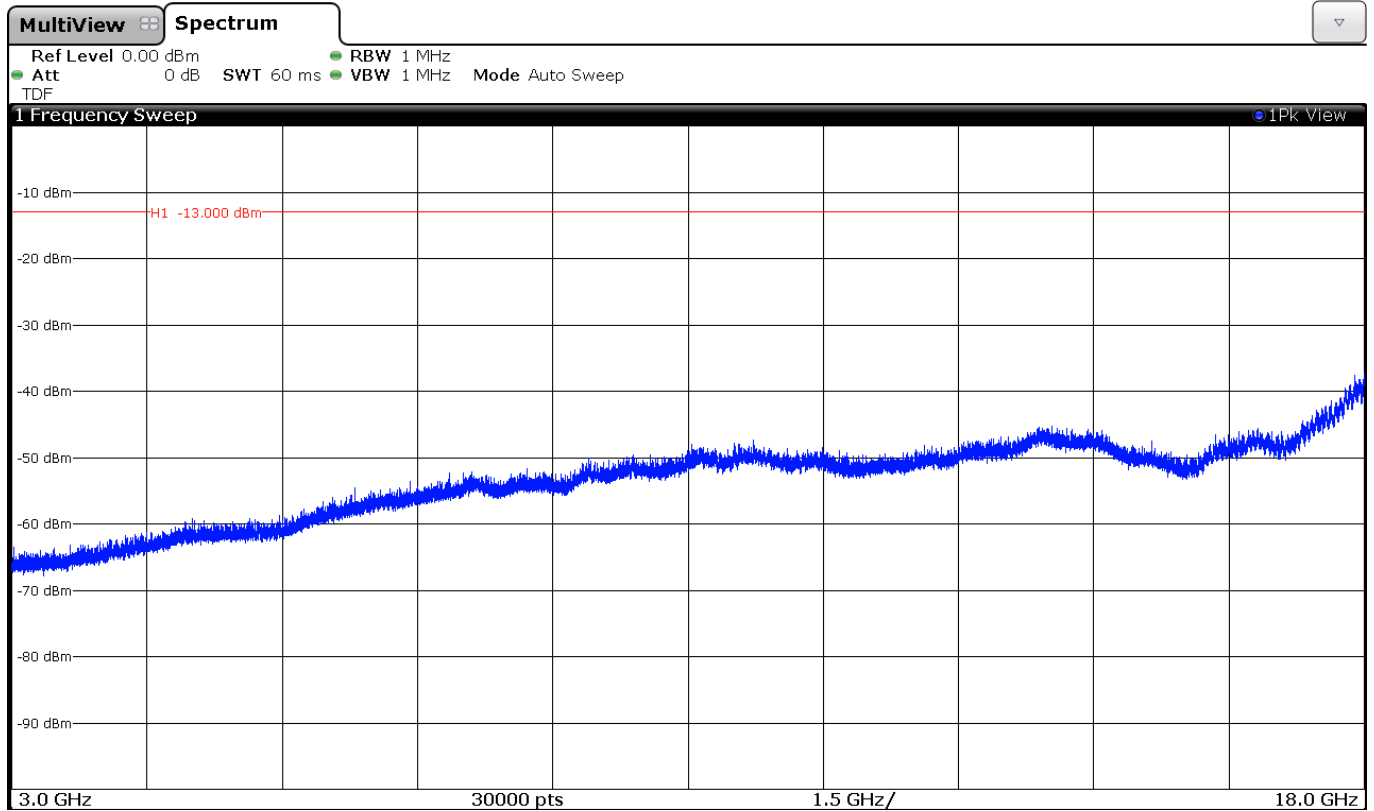


CHANNEL: HIGHEST

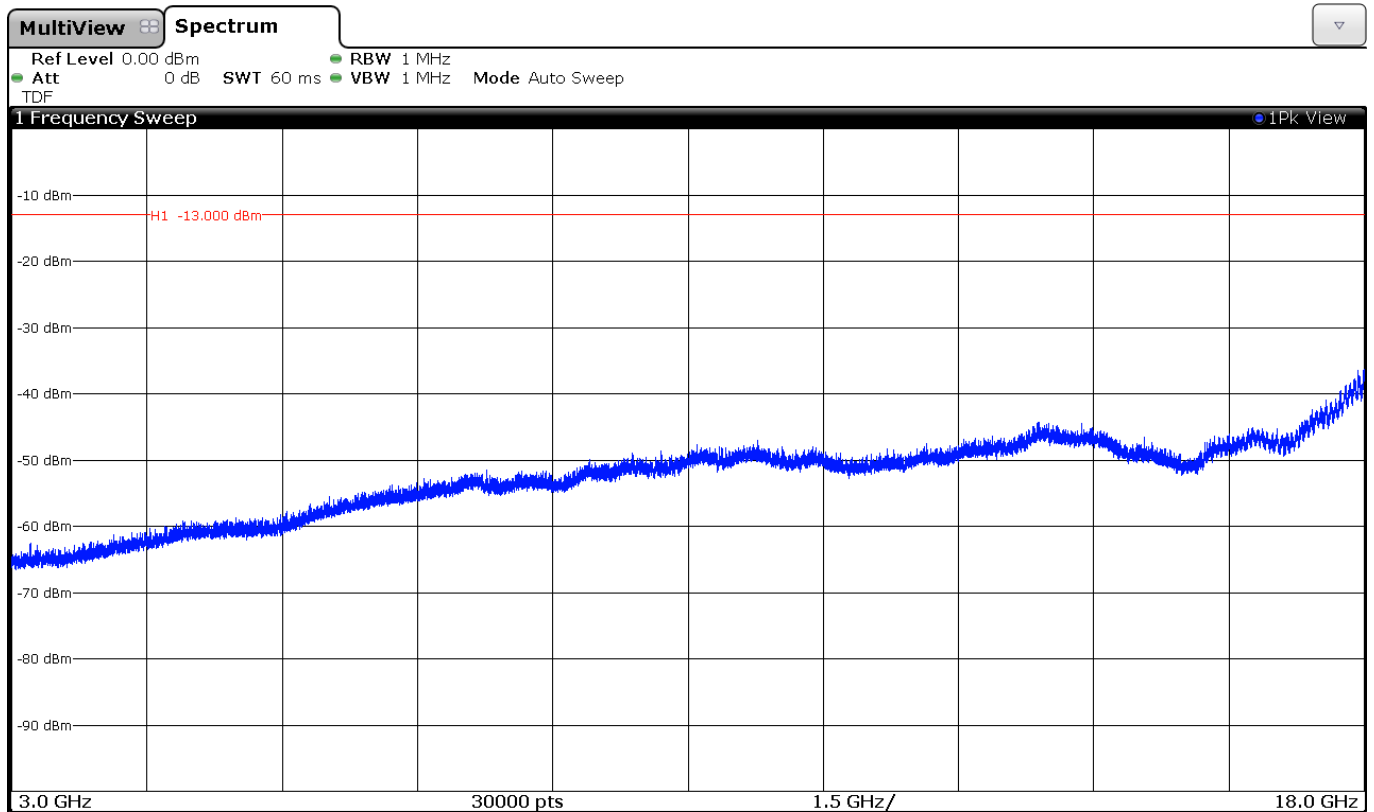


FREQUENCY RANGE 18 GHz TO 20 GHz.

**GPRS MODULATION**


CHANNEL: LOWEST

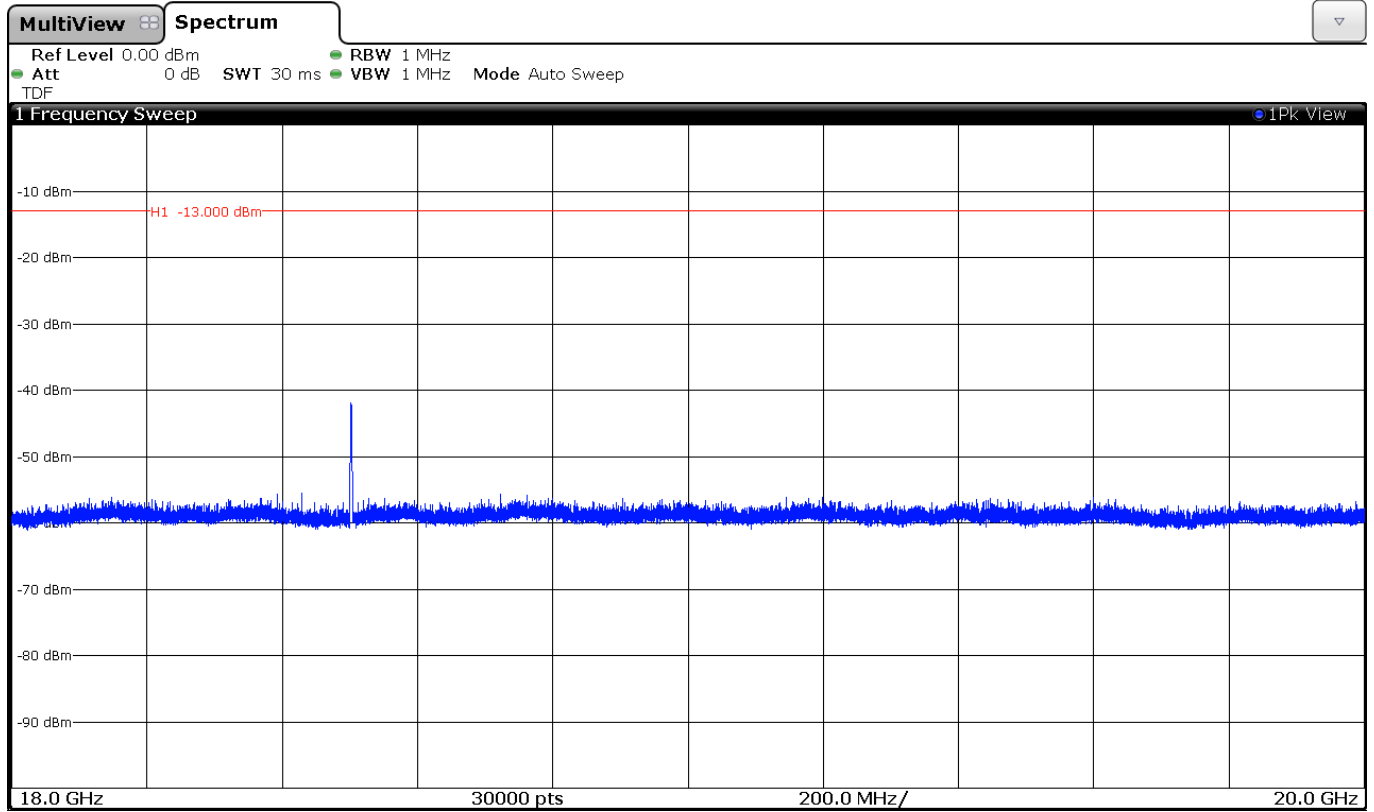

CHANNEL: MIDDLE

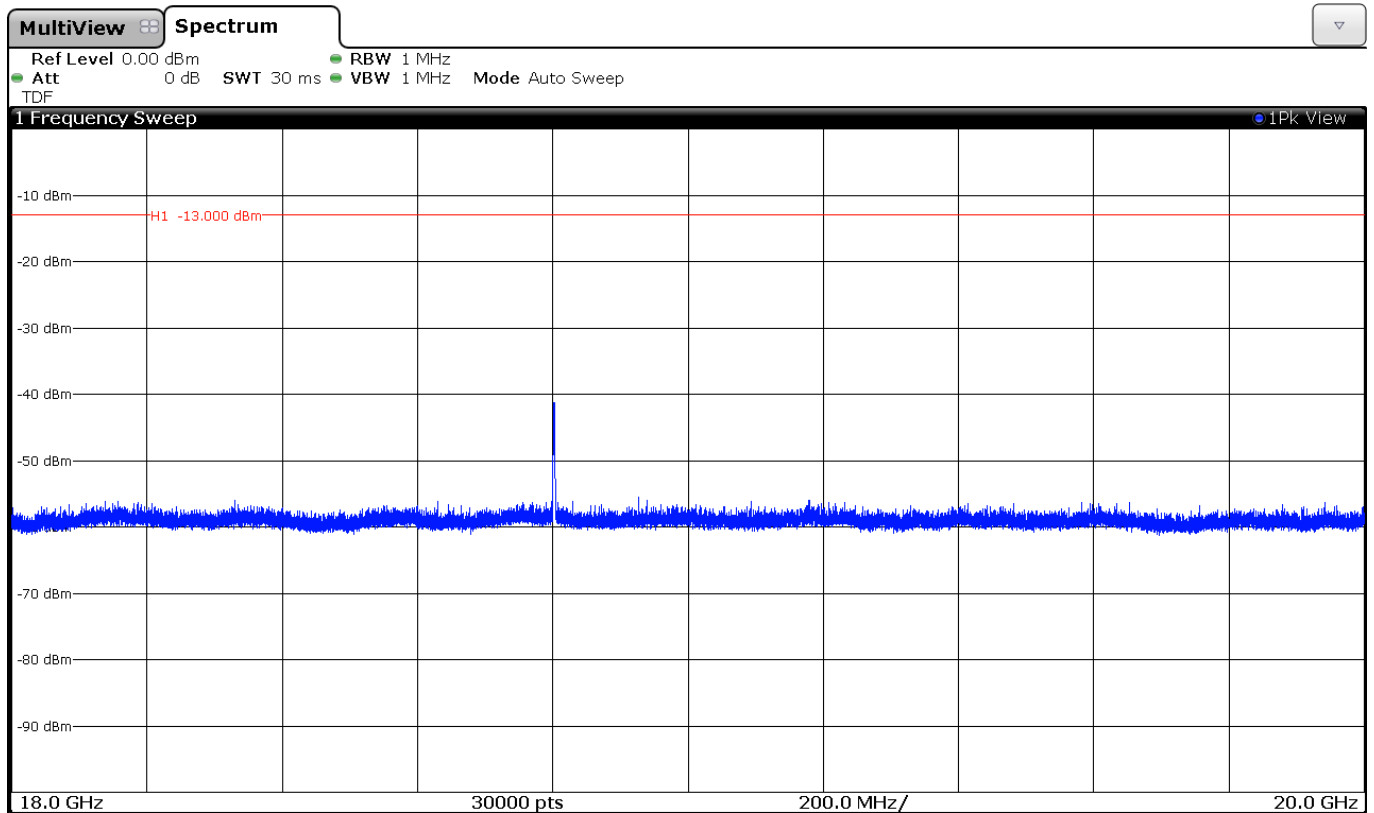


### CHANNEL: HIGHEST

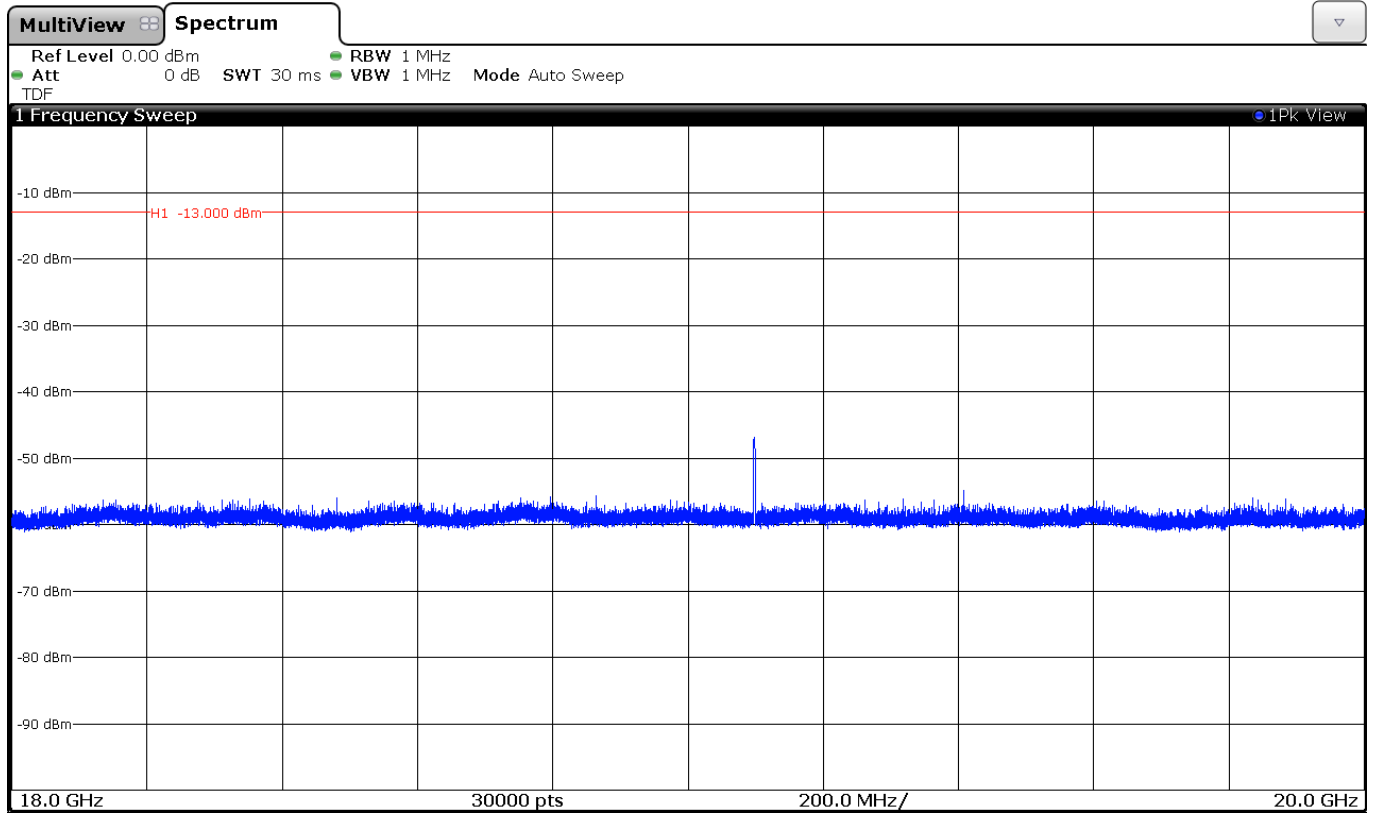


### WCDMA MODULATION

#### CHANNEL: LOWEST

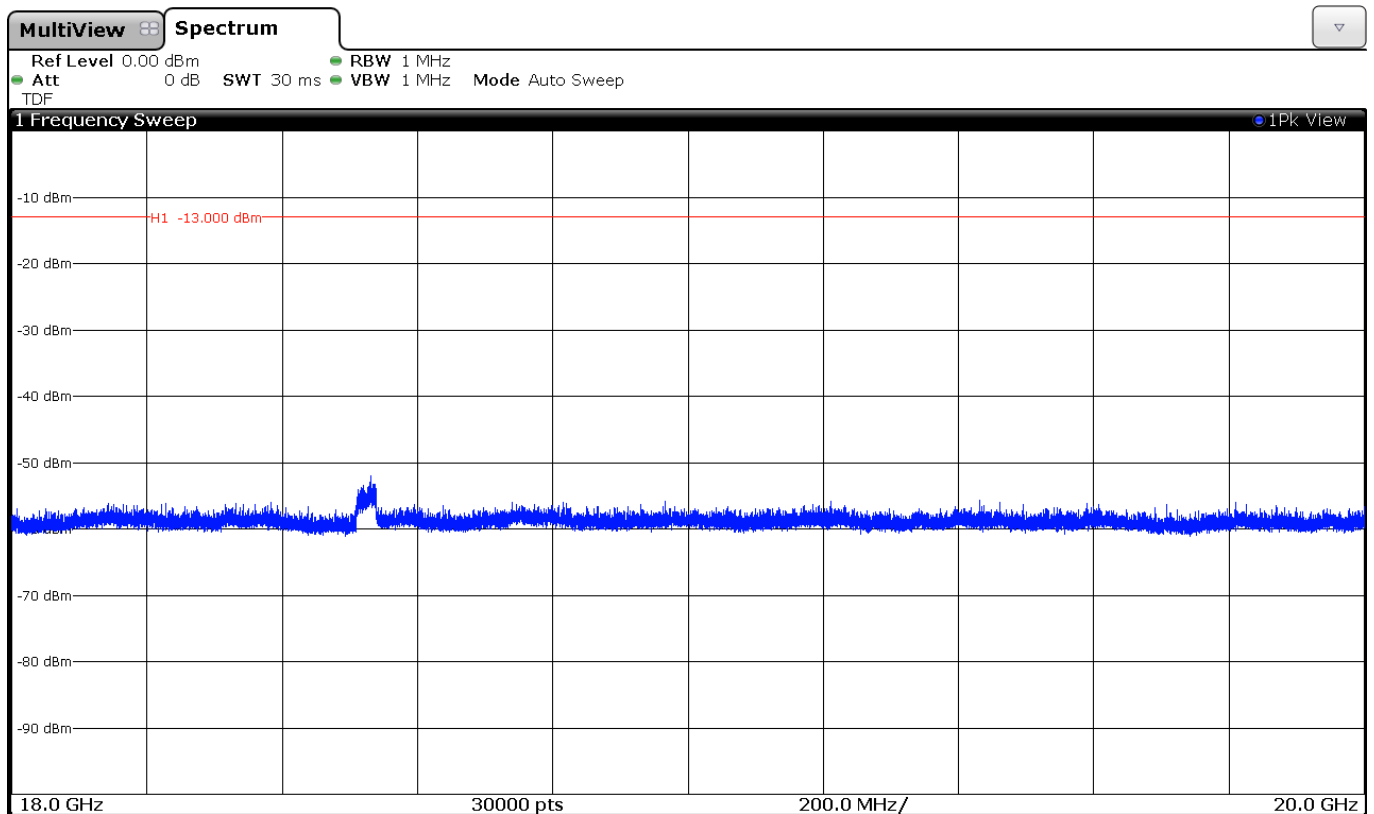

CHANNEL: MIDDLE

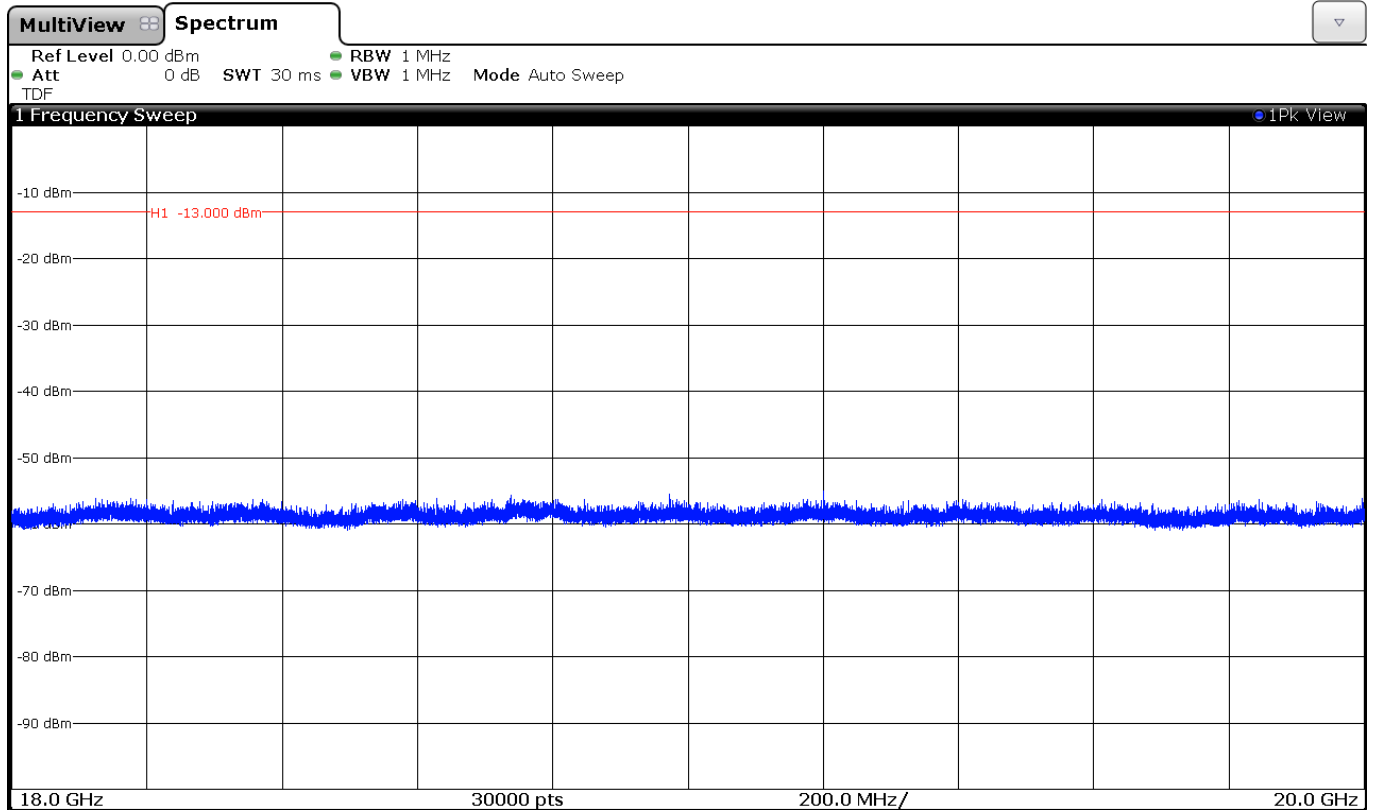

CHANNEL: HIGHEST

