



Internal Photos



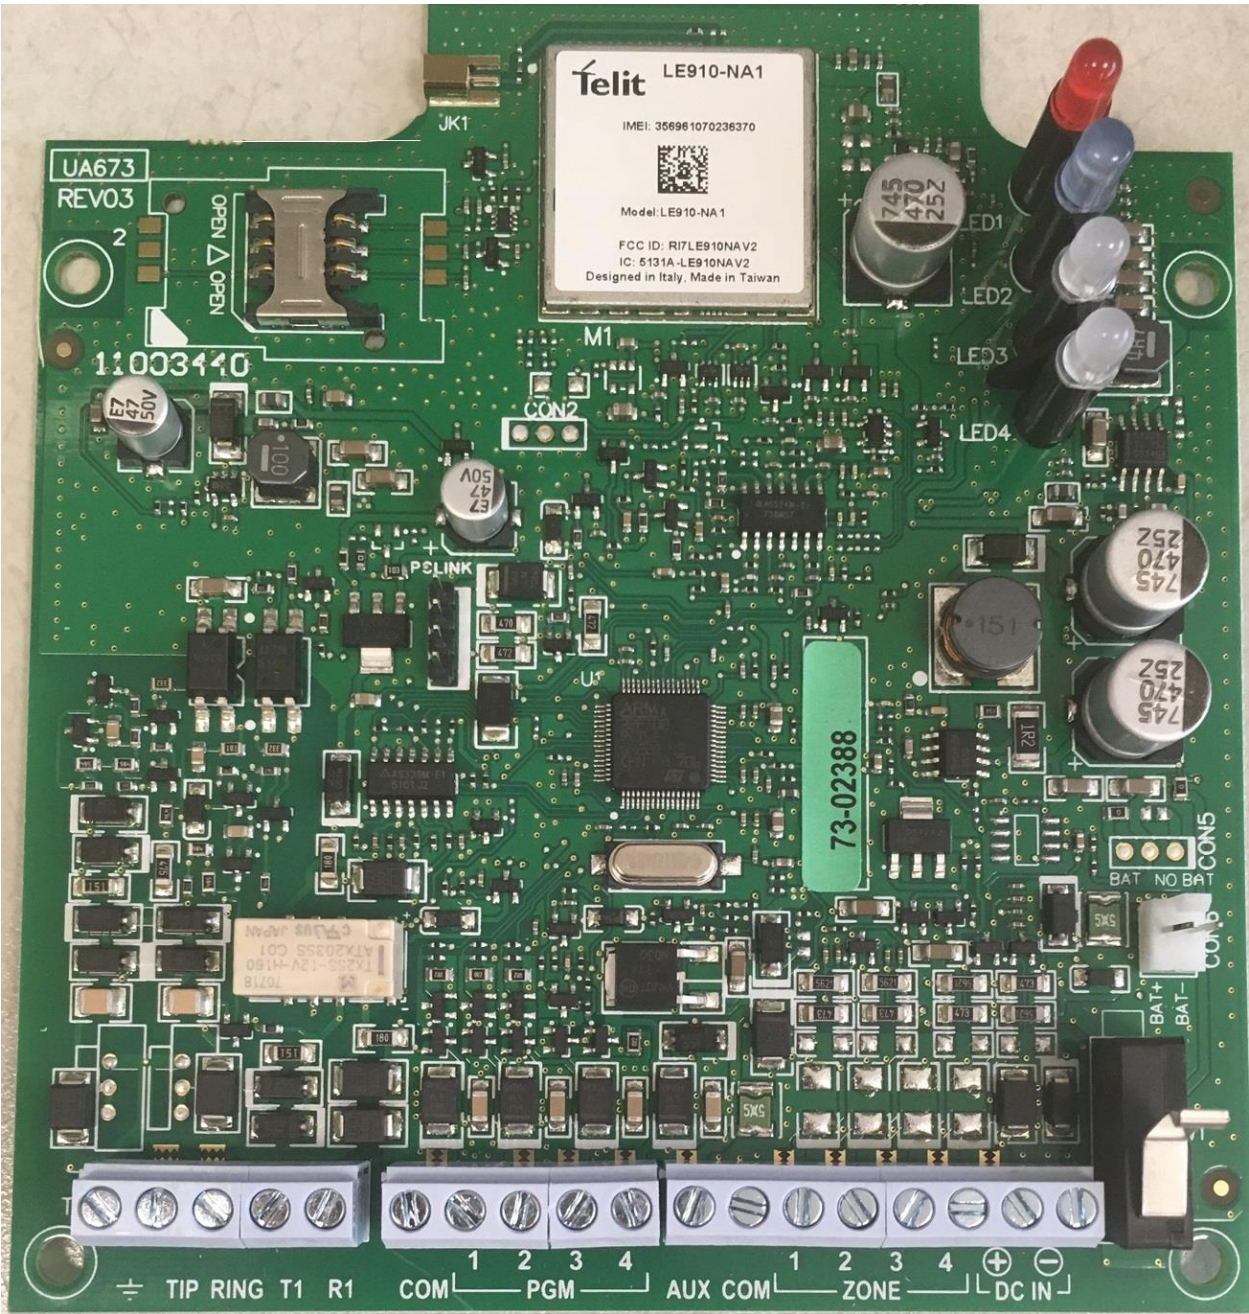


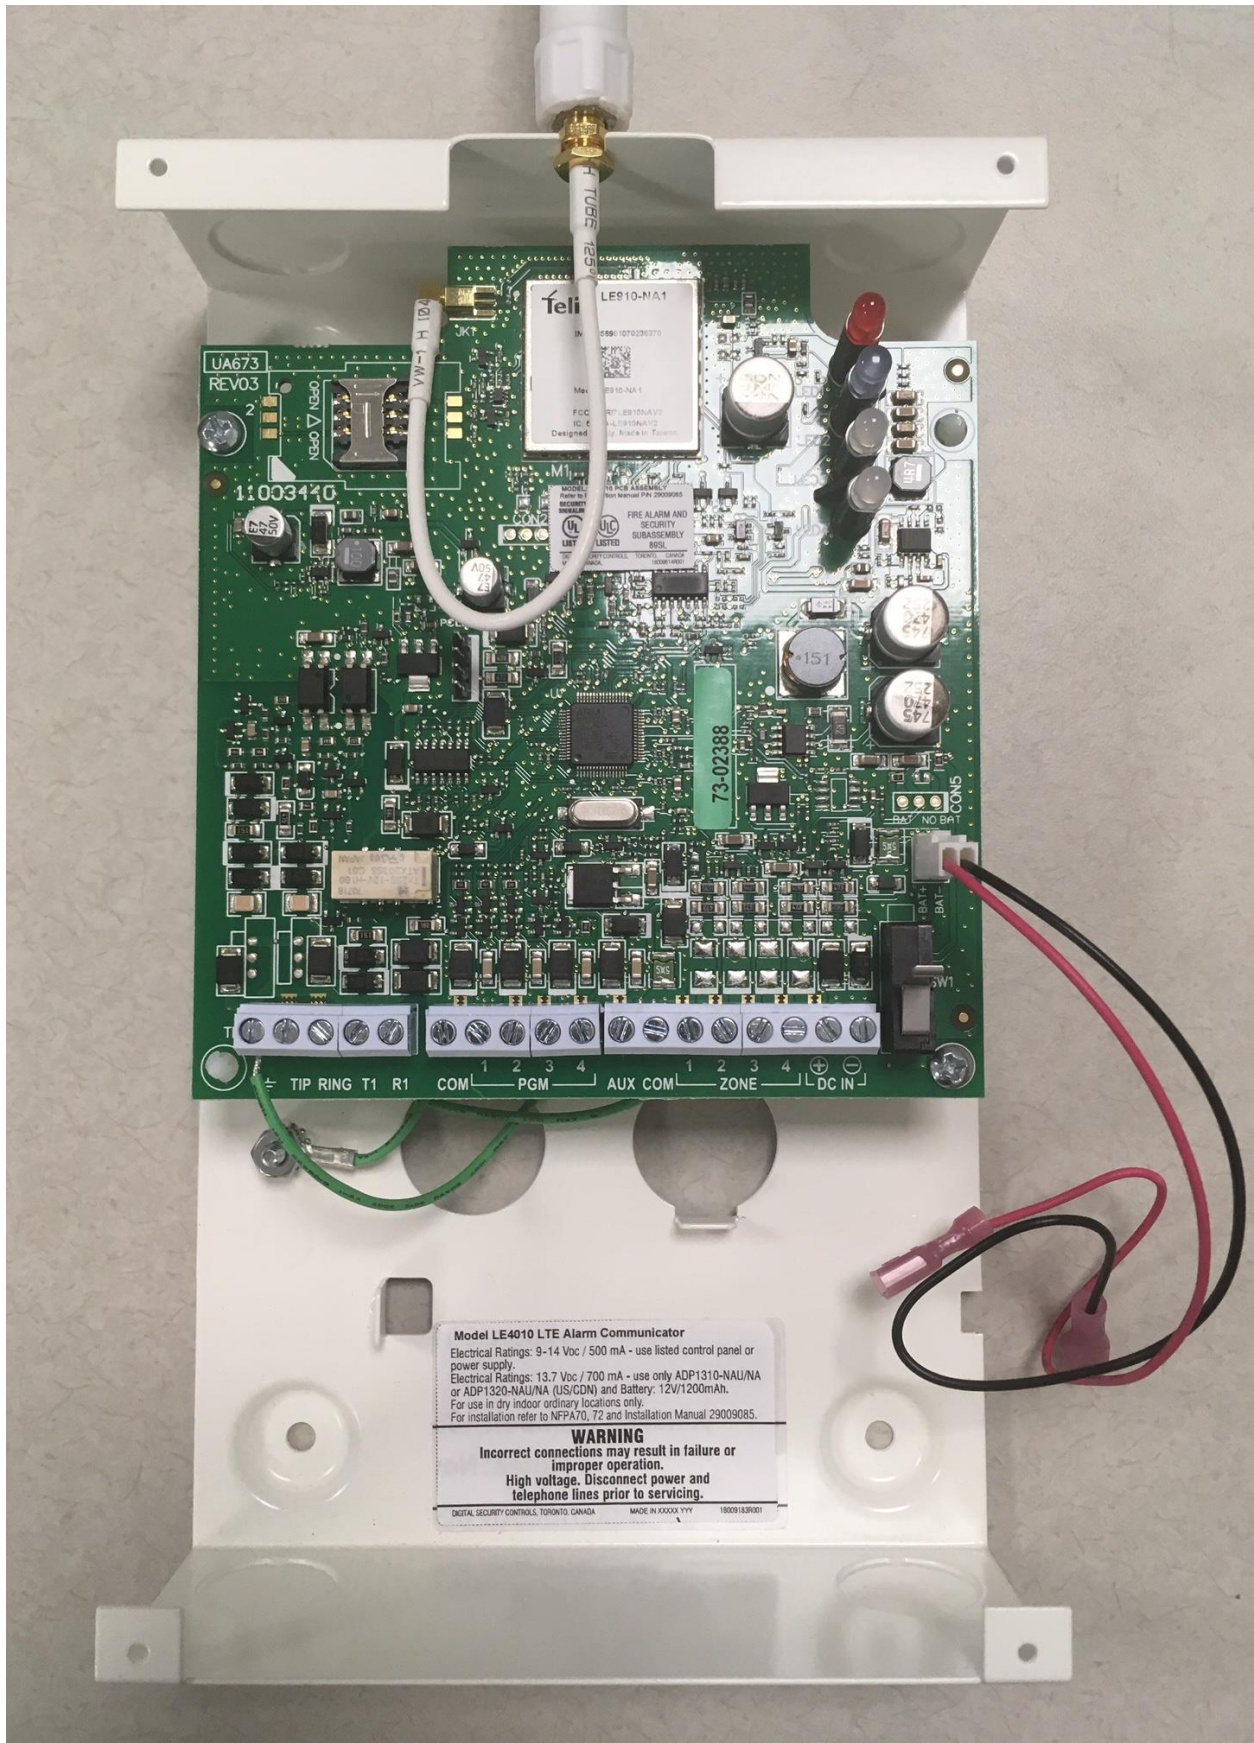

Model LE4010 LTE Alarm Communicator
Electrical Ratings: 9-14 Vdc / 500 mA - use listed control panel or power supply.
Electrical Ratings: 13.7 Vdc / 700 mA - use only ADP1310-NAU/NA or ADP1320-NAU/NA (US/CON) and Battery: 12V/1200mAh.
For use in dry indoor ordinary locations only.
For installation refer to NFPA70, 72 and Installation Manual 29009085.

WARNING
Incorrect connections may result in failure or improper operation.
High voltage. Disconnect power and telephone lines prior to servicing.

DIGITAL SECURITY CONTROLS, TORONTO, CANADA MADE IN KOREA 18009183001

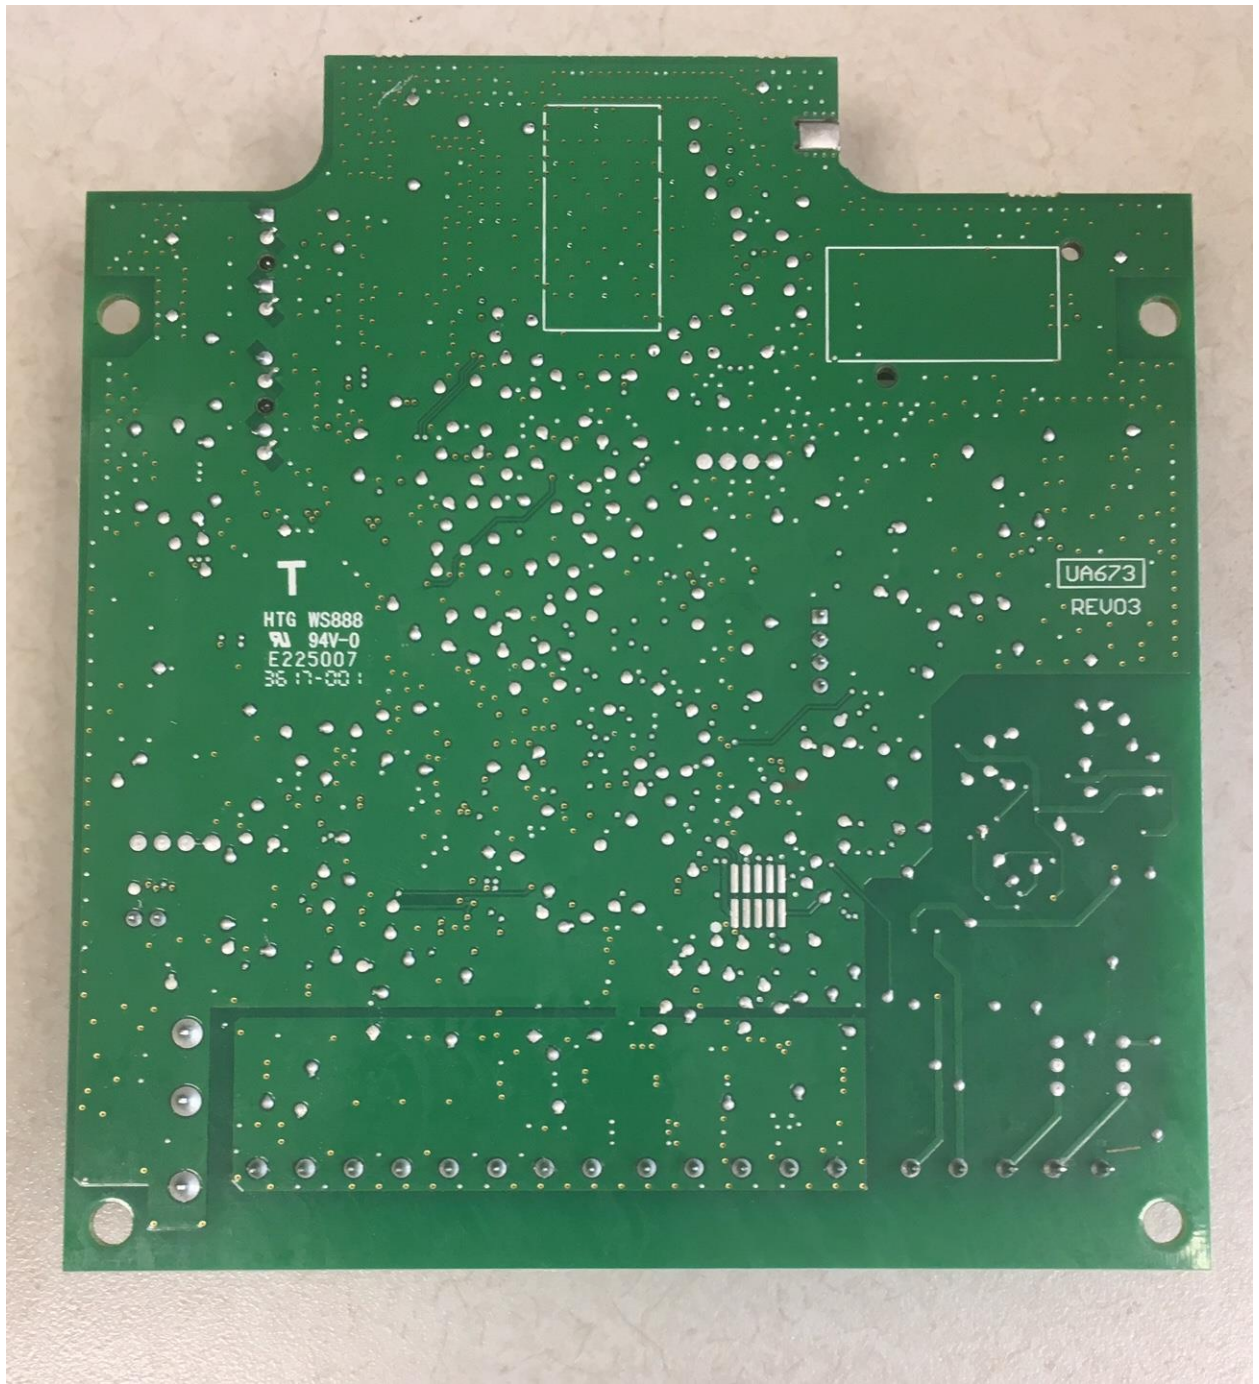

T
HTG WS888
94V-0
E225007
36 17-001

UA673
REV03