

PG9933 (915MHz) Wireless Carbon Monoxide Detector

Installation and Operating Instructions

Read these instructions thoroughly before installation and use of the PG9933

The PG9933 is designed to monitor the CO gas level in residential dwellings and give early warning before dangerous levels are detected. This device is intended to be used with a compatible wireless alarm system. The detector consists of an electrochemical carbon monoxide sensor assembly coupled to a wireless transmitter.

The Wireless Carbon Monoxide Alarm communicates with the control panel and can send alarm, tamper and battery condition messages to the system receiver.

CAUTION: The detector expiry date is stamped on the detector. After the expiry date, the detector should not be used - do not wait for end-of-life indication!

CAUTION: Unauthorized removal of the unit from the mounting bracket will initiate a tamper alert.

Warnings:

The PG9933 wireless Carbon Monoxide detector shall be installed and used within an environment that provides the pollution degree max 2 and overvoltages category II in NON HAZARDOUS LOCATIONS, indoor only. The equipment is designed to be installed by SERVICE PERSONS only; (SERVICE PERSON is defined as a person having the appropriate technical training and experience necessary to be aware of hazards to which that person may be exposed in performing a task and of measures to minimize the risks to that person or other persons.)

Failure to properly install, test and maintain a CO detector may cause it to fail, resulting in loss of life. Installation of the CO detector should not be used as a substitute for proper installation, use and maintenance of fuel burning appliances, including appropriate ventilation and exhaust systems.


This carbon monoxide detector is designed for indoor use only. Do not expose it to rain or moisture. Do not knock or drop the detector. Do not open or tamper with the detector as this could cause malfunction. The detector will not protect against the risk of carbon monoxide poisoning if not properly installed.

CAUTION: This device will only indicate the presence of carbon monoxide gas at the sensor. Carbon monoxide gas may be present in other areas. This carbon monoxide alarming device is designed to detect carbon monoxide gas from ANY source of

combustion. It is NOT designed to detect smoke, fire or other gases unless the product has been investigated and determined to comply with applicable requirements.

WARNING! To comply with FCC and IC RF exposure compliance requirements, the device should be located at a distance of at least 20 cm from all persons during normal operation. The antennas used for this product must not be co-located or operated in conjunction with any other antenna or transmitter.

Figure 1: Wireless CO Detector

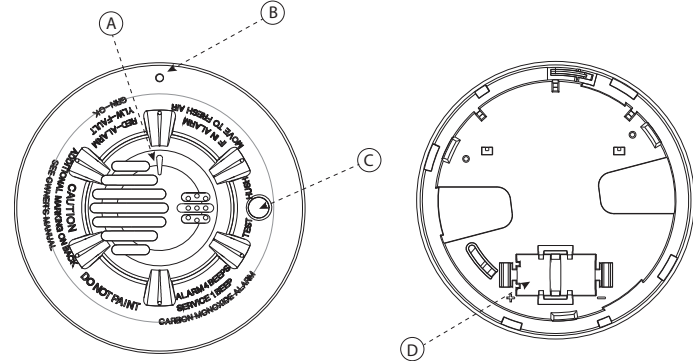

Legend

- A. Alarm LED (see Table 1 for LED indications)
- B. Tamper release opening
- C. Test/Hush button
- D. Battery compartment
- E. Breakaway tab (see Figure 3)

Installation Instructions

Battery Installation

To replace the battery:

1. Remove the detector from its mounting base by twisting it counterclockwise. Remove and dispose of the battery according to your local regulations.
2. To ensure proper power-down sequence, wait a minimum of 20 seconds before installing the new battery.
3. Install a new, 3-volt CR123A Panasonic lithium battery in the battery compartment observing correct polarity. If the battery is incorrectly inserted, remove gently with a flathead screwdriver and correctly reinsert.
4. Reinstall the detector onto the mounting bracket by turning it clockwise.
5. After the power-up sequence, the green LED blinks once every 12 seconds to indicate normal operation. If the battery is not installed correctly, the detector will not operate and the battery may be damaged.

Enrollment

The 7-digit serial number located on the back of the CO detector housing must be enrolled on the alarm systems control panel. See the Receiver Installation Manual and follow the enrollment procedure. For placement tests remove the detector from its backplate for one second (tamper) and then reattach. Wait at least 30 seconds for the test result before activating again.

A general description of the procedure is provided in the following flow chart:

Step Procedure


1. See the Installation Manual for the alarm system that the device is being enrolled on to ensure that the proper steps are used.
2. Enter the Device Enrollment option through the specified method and select the appropriate option to add the new device.
3. Enroll the device by inserting the batteries to power up the device and enter the Device ID. For example, ID No. 222-XXXX.
4. Select the desired Zone Number.
5. Configure any device parameters that are required. Enter the DEV SETTINGS menu and select the required options to configure the detector.

6. Mount and test the detector. See Testing the CO detector for information on testing the device. In addition, see the alarm systems Installation Manual that the device is enrolled on for other test procedures that are required.

Selecting a Location

Selecting a suitable location is critical for the CO detector. The Consumer Product Safety Commission (CPSC) recommends to use at least one CO detector per household, located as near as possible to sleeping areas of the home, because the human body is most vulnerable to the effects of CO gas during sleeping hours.

Figure 2: CO Detector Placement



Legend

- A: Bedroom
- B: Living Room
- C: Kitchen
- D: Basement
- E: Garage

For added protection, install additional CO detectors in every bedroom and on every level of your home. If your bedroom hallway is longer than 14 meters (40 feet), install a CO detector at BOTH ends of the hallway. Install an additional detector 6 meters (20 feet) away from the furnace or fuel burning heat source. For maximum protection, the detector should also be located outside primary sleeping areas or at each level of your home. Mount the detector on a firm wall or ceiling.

DO NOT install CO detectors:

- In locations where temperature may be below 0 °C (14 °F) or above 40 °C (104 °F).
- In locations where humidity is below 10% or above 93% RH non-condensing.
- Near paint thinner fumes.
- Near air conditioners, furnaces, stoves, fireplaces and any other ventilation source that may interfere with CO gas entering the detector.
- In locations where furniture or draperies may obstruct the air flow.
- In exhaust streams from gas engines, vents, flues or chimneys.
- Where dirt or dust could collect and block the sensor and prevent it from working.
- In locations that can be reached by children.
- In turbulent air from ceiling fans.
- In close proximity to an automobile exhaust pipe - this will damage the detector.


Mounting

The detector can be mounted on a wall or ceiling. For EN approved sites, only ceiling installation is allowed.

The CO detector must be mounted with its bracket (when it is attached to its bracket the tamper switch is pressed and the detector automatic reset is performed).

1. Refer to Figure 3 and install using screw locations as required. Maneuver the mounting bracket so the screws are at the elbow of the screw slots and secure.
2. Fit the detector inside the mounting bracket by aligning it as shown in Figure 3 (detector's alignment notch should be slightly offset from the mounting bracket tamper release tab), then turn the detector in a clockwise direction until it clicks into place.
3. Test the detector after completing the installation (as described in the Testing the Detector section of this manual) and refer to the alarm control panel installation manual for additional information concerning the use of wireless devices.

Figure 3: Mounting the Detector

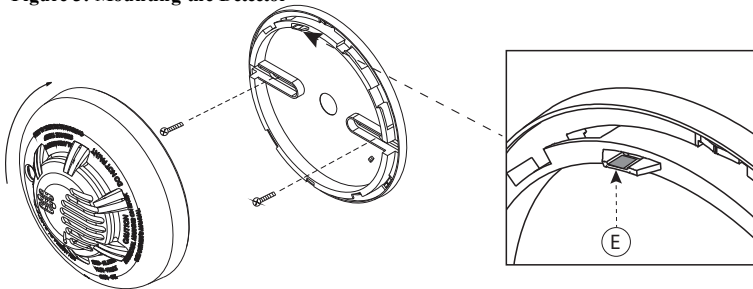

Tamper Protection

The PG9933 includes a tamper resistant feature that prevents removal from the mounting bracket without the use of a tool. To engage the tamper resistant feature, cut the small breakaway tab (marked E in Figure 3) located on the mounting bracket and then install the detector. To remove the detector from the mounting bracket once it has been made tamper resistant, insert an appropriate tool into the tamper release opening located on the detector housing (marked B in Figure 1). Press and hold while simultaneously turning the detector counterclockwise.

Owner's Instructions

Testing the CO Detector

NOTE: Performing a CO detector system test will generate an alarm transmission. Notify the central station before testing.

Perform a CO detector system test by pressing the Test/Hush button for a minimum of 6 seconds, the red LED flashes and the sounder emits a temporal 4 pattern.

Perform a CO detector local test by pressing the Test/Hush button for a minimum of 2 seconds, the sounder will emit 2 short beeps.

The following table indicates received signal strength indication.

LED Response	Reception
Green LED blinks	Strong
Orange LED blinks	Good
Red LED blinks	Poor
No blinks	Paired, no communication

IMPORTANT! Reliable reception must be confirmed. Therefore, "poor" signal strength is not acceptable. If you receive a "poor" signal from the device, re-locate it and re-test until a "good" or "strong" signal strength is received. For UL/UL installations, the test results must be "strong". See the alarm systems installation guide for detailed diagnostic tests.

Maintenance

Test the detector weekly to ensure proper operation of the detector. When low battery is indicated (see Table 1 and Specifications) immediately replace the battery. Once a month, use a vacuum cleaner to keep the air vents free of dust.

Audible and Visual Indications

The tri-colored LED (green, yellow, red) and a sounder on the detector provide local visual and audible indication of the detector's status as listed in Table 1.

NOTE: The sounder and LED are not synchronized.

Table 1: Detector Status and Indication

Status	LEDs	Sounder	Radio Signalling
Normal	Green flash every 12 seconds	Off	Normal (none)
Alarm/Test	Red flash every 12 seconds	ANSI S3.41 temporal 4 (press button to hush for 5 minutes)	Alarm
Detector Trouble	Yellow flash every 6 seconds	One 100 ms chirp every 45 seconds	Fault
Low Battery	Yellow flash every 12 seconds	One 100 ms chirp every 45 seconds (press button to hush for 12 hours)	Low battery
Detector End of Life	Yellow flash every 23 seconds	One 100 ms chirp every 45 seconds	Fault
Power up	Green, yellow, red flash sequence every 12 seconds	One 100 ms chirp at end of power-up sequence	None
Tamper	Green, yellow, red flash sequence every 12 seconds	Off	Tamper

Specifications

End of life:	5 years (see date stamped on back of detector)
Operating frequency:	915 MHz
Audible signal (temporal 4 tone):	85 dBA min. in alarm (at 10 ft (3 m))
Operating current:	10 μ A
Temperature range:	4.4 °C to 37.8 °C (40 °F to 100 °F)
Operating humidity range:	15% to 95% Relative Humidity, non-condensing
Transmitted messages:	CO gas alarm, low battery, tamper, trouble message as a result of sensor end of life or sensor trouble, supervision.
Power source:	One 3-volt CR123A Panasonic lithium battery (included)
Battery supervision:	Automatic transmission of battery status data as part of any transmitted message.
Battery life expectancy:	5 years (under typical use). NOTE: Constant exposure to temperature or humidity extremes may reduce battery life.
Low battery threshold:	2.85 V

You should know about Carbon Monoxide.

Carbon monoxide, also known as "CO" by the chemical form, is considered to be a highly dangerous poisonous gas, because it is colorless, odorless, tasteless and very toxic. In general, biochemistry phenomena have shown that the presence of CO gas inhibits the blood's capacity to transport oxygen throughout the body, which can eventually lead to brain damage. In any enclosed space (home, office), even a small accumulation of CO gas can be quite dangerous. Although many products of combustion can

cause discomfort and adverse health effects, it is CO gas which presents the greatest threat to life.

Carbon monoxide is produced by the incomplete combustion of fuels such as natural gas, propane, heating oil, kerosene, coal, charcoal, gasoline, or wood. The incomplete combustion of fuel can occur in any device which depends on burning for energy or heat such as furnaces, boilers, room heaters, hot water heaters, stoves, grills, and in any gasoline powered vehicle or engine (e.g., generator set, lawnmower). Tobacco smoke also adds CO to the air you breathe. When properly installed and maintained, your natural gas furnace and hot water heater do not pollute your air space with CO. Natural gas is known as a "clean burning" fuel because under correct operating conditions, the combustion products are water vapor and carbon dioxide (CO₂), which is not toxic. The products of combustion are exhausted from furnaces and water heaters to the outside by means of a fuel duct or chimney. Correct operation of any burning equipment requires two key conditions:

- a. An adequate supply of air for complete combustion.
- b. Proper ventilation of the products of combustion from the furnace through the chimney, vent or duct to the outside.

Typical carbon monoxide gas problems are summarized here:

- a. Equipment problems, due to defects, poor maintenance, damaged and cracked heat exchangers.
- b. Collapsed or blocked chimneys/flues, dislodged, disconnected or damaged vents.
- c. Downdraft in chimneys or flues. This can be caused by very long or circuitous flue runs, improper location of flue exhaust or wind conditions.
- d. Improper installation or operation of equipment, chimney or vents.
- e. Airtight homes with inadequate flow of fresh air for the combustion process.
- f. Inadequate exhaust of space heaters or appliances.
- g. Exhaust ventilation/fireplace competing for air supply.

Potential sources of carbon monoxide in your home or office include clogged chimney, wood stove, wood or gas fireplace, automobile and garage, gas water heater, gas appliance, gas or kerosene heater, gas or oil furnace, and cigarette smoke.

More information about conditions which result in transient CO situations:

1. Excessive spillage or reverse venting of fuel burning appliances caused by:
 - a. Outdoor ambient conditions such as wind direction and or velocity, including high gusts of wind; heavy air in the vent pipes (cold humid air with extended periods between cycles).
 - b. Negative pressure differential resulting from the use of exhaust fans.

- c. Simultaneous operation of several fuel burning appliances competing for limited internal air.
 - d. Vent pipe connection vibrating loose from clothes dryers, furnaces, or water heaters.
 - e. Obstructions in unconventional vent pipe designs which amplify the above situation.
2. Extended operation of unventilated fuel burning devices (oven, fireplace, etc).
 3. Temperature inversions which can trap exhaust gases near the ground.
 4. Car idling in an open or closed attached garage, or near a home.

Possible Symptoms of Carbon Monoxide Poisoning

Carbon monoxide is colorless, odorless, tasteless, and very toxic. When inhaled, it produces an effect known as chemical asphyxiation. Injury is due to the combining of CO with the available hemoglobin in the blood, lowering the oxygen-carrying capacity of the blood. In the presence of CO gas, the body is quickly affected by oxygen starvation. The following symptoms are related to CO poisoning and should be discussed with all members of the household:

- a. Mild exposure: slight headache, nausea, vomiting, fatigue (often described as "flu-like" symptoms).
- b. Medium exposure: severe throbbing headache, drowsiness, confusion, fast heart rate
- c. Extreme exposure: unconsciousness, convulsions, cardiorespiratory failure, death.
- d. Many cases of reported CARBON MONOXIDE POISONING indicate that while victims are aware they are not well, they become so disoriented they are unable to save themselves by either exiting the building or calling for assistance. Young children and household pets are typically the first affected.

Action to Take When Alarm Sounds

In case harmful levels of CO gas are detected, your detector will go into continuous full alarm. Try to take the following necessary actions immediately:

1. Push the detector Test/Hush switch to silence the alarm. Warning: Never remove the battery to silence the alarm. Removing the battery removes your protection! Pushing the Test/Hush button mutes the alarm for 5 minutes. After 5 minutes, the alarm resumes if CO levels remain high. Call your emergency service. Please write down the telephone numbers:

Emergency Services:

Tel. No. Tel. No.

2. Immediately move to fresh air - outdoors or by opening door/window. Do a head count to check that all persons are accounted for. Do not reenter the premises nor move away from the open door/window until the emergency services responders have arrived, the premises have been aired out, and your alarm remains in normal condition.
3. After following steps 1 - 3, if your alarm reactivates within a 24-hour period, repeat steps 1 - 3 and call a qualified technician (Tel. No.) to investigate for sources of CO gas from fuel burning equipment and appliances, and inspect for proper operation of this equipment. If problems are identified during this inspection, have the equipment serviced immediately. Note any combustion equipment not inspected by the technician and consult the manufacturer instructions, or contact the manufacturers directly, for more information about CO safety and this equipment. Make sure that motor vehicles are not, and have not been, operating in an attached garage or adjacent to the residence.

WARNING: CO gas can be extremely fatal and can come from several possible sources. This detector only indicates the presence of CO gas near the sensor. CO gas may be present in other areas of the premises.

Action to be Taken After the Problem has been Corrected

Once the CO gas presence in the premises has been corrected, the detector's alarm should be off. After waiting for 10 minutes, push the Test/Hush button to verify that the detector is functioning properly.

Warnings and Limitations

This product is intended for use in ordinary indoor locations of family living units. It is not designed to measure compliance with Occupational Safety and Health Administration (OSHA) commercial or industrial standards.

CAUTION: The detector will only indicate the presence of carbon monoxide gas at the sensor. Carbon monoxide gas may be present in other areas.

- Individuals with medical problems may consider using warning devices that provide audible and visual signals for carbon monoxide concentrations under 30 ppm.
- The alarm, including the sensor, is not to be located within 1.5m (5 feet) of any cooking appliance.
- The detector may not emit an alarm at low carbon monoxide levels. The Occupational Safety and Health Association (OSHA) has established that continuous exposure levels of 50 ppm should not be exceeded in an 8 hour period. Individuals with medical conditions may consider more sensitive detection devices.

- The CO gas detector is not suitable as a smoke detector or fire detector. This detector is not suitable to install in hazardous locations as defined in the National Electrical Code.
- Carbon monoxide must reach the detector for proper performance of CO gas detection. The detector may not protect people who are at special risk from carbon monoxide exposure by reason of age, pregnancy or medical condition. If in doubt, consult your medical practitioner.
- CO detectors may wear out because they contain electronic parts that fail over time. Test your detector at least every week.
- Instruct children never to play with the detector.
- Never use detergents or other solvents to clean the detector.
- Avoid spraying air fresheners, hair spray, paint or other aerosols near the detector.
- Do not paint the detector. Paint will seal the detectors vents and interfere with detecting CO gas.

Detailed information on conditions which can result in transient CO situations:

1. Excessive spillage or reverse venting of fuel burning appliances caused by:
 - a. Outdoor ambient conditions such as wind direction and/or velocity, including high gusts of wind; heavy air in the vent pipes (cold/humid air with extended periods between cycles).
 - b. Negative pressure differential resulting from the use of exhaust fans.
 - c. Simultaneous operation of several fuel burning appliances competing for limited internal air.
 - d. Vent pipe connection vibrating loose from clothes dryers, furnaces, or water heaters.
 - e. Obstructions in or unconventional vent pipe designs which amplify the above situations.
2. Extended operation of unvented fuel burning devices (range, oven, fireplace, etc.).
3. Temperature inversions which can trap exhaust gases near the ground.
4. Car idling in an open or closed attached garage, or near a home.

Never disassemble the CO Alarm; there are no user serviceable parts inside the unit. You may only remove the CO Alarm from the mounting bracket to replace the battery if not serviced by an installer. When replacing the battery, follow the directions specified within the Installation Instructions, Installing/Replacing battery.

CAUTION: This product uses a lithium battery. Improper handling may result in HEAT, EXPLOSION or FIRE causing personal injury. DO NOT recharge

batteries. Follow the battery manufacturer's safety instructions. Dispose of used batteries in accordance with the regulations in your area.

Never paint the unit. Paint may prevent CO gas from entering the unit.

The PG9933 Wireless Carbon Monoxide Alarm has been designed to provide an alarm based on various exposure times at different levels of carbon monoxide concentrations as per UL 2034 standard: This CO alarm PG9933 meets the following mentioned response times: At 70ppm, the unit must alarm within 60-240 minutes. At 150ppm, the unit must alarm within 10- 50 minutes. At 400ppm, the unit must alarm within 4- 15 minutes.

Limited Warranty

Digital Security Controls warrants that for a period of twelve months from the date of purchase, the product shall be free of defects in materials and workmanship under normal use and that in fulfillment of any breach of such warranty, Digital Security Controls shall, at its option, repair or replace the defective equipment upon return of the equipment to its repair depot. This warranty applies only to defects in parts and workmanship and not to damage incurred in shipping or handling, or damage due to causes beyond the control of Digital Security Controls such as lightning, excessive voltage, mechanical shock, water damage, or damage arising out of abuse, alteration or improper application of the equipment.

The foregoing warranty shall apply only to the original buyer, and is and shall be in lieu of any and all other warranties, whether expressed or implied and of all other obligations or liabilities on the part of Digital Security Controls. Digital Security Controls neither assumes responsibility nor authorizes any other person purporting to act on its behalf to modify or to change this warranty, nor to assume for it any other warranty or liability concerning this product.

In no event shall Digital Security Controls be liable for any direct, indirect or consequential damages, loss of anticipated profits, loss of time or any other losses incurred by the buyer in connection with the purchase, installation, operation or failure of this product.

Warning: *Digital Security Controls recommends that the entire system be completely tested on a regular basis. However, despite frequent testing, and due to, but not limited to, criminal tampering or electrical disruption, it is possible for this product to fail to perform as expected.*

Important Information: *Changes or modifications not expressly approved by Digital Security Controls could void the user's authority to operate this equipment.*

EULA

IMPORTANT - READ CAREFULLY: DSC Software purchased with or without Products and Components is copyrighted and is purchased under the following license terms:

This End-User License Agreement ("EULA") is a legal agreement between You (the company, individual or entity who acquired the Software and any related Hardware) and Digital Security Controls, a division of Tyco Safety Products Canada Ltd. ("DSC"), the manufacturer of the integrated security systems and the developer of the software and any related products or components ("HARDWARE") which You acquired.

If the DSC software product ("SOFTWARE PRODUCT" or "SOFTWARE") is intended to be accompanied by HARDWARE, and is NOT accompanied by new HARDWARE, You may not use, copy or install the SOFTWARE PRODUCT. The SOFTWARE PRODUCT includes computer software, and may include associated media, printed materials, and "online" or electronic documentation.

Any software provided along with the SOFTWARE PRODUCT that is associated with a separate end-user license agreement is licensed to You under the terms of that license agreement.

By installing, copying, downloading, storing, accessing or otherwise using the SOFTWARE PRODUCT, You agree unconditionally to be bound by the terms of this EULA, even if this EULA is deemed to be a modification of any previous arrangement or contract. If You do not agree to the terms of this EULA, DSC is unwilling to license the SOFTWARE PRODUCT to You, and You have no right to use it.

SOFTWARE PRODUCT LICENSE

The SOFTWARE PRODUCT is protected by copyright laws and international copyright treaties, as well as other intellectual property laws and treaties. The SOFTWARE PRODUCT is licensed, not sold.

1. GRANT OF LICENSE This EULA grants You the following rights:

Software Installation and Use - For each license You acquire, You may have only one copy of the SOFTWARE PRODUCT installed.

Storage/Network Use - The SOFTWARE PRODUCT may not be installed, accessed, displayed, run, shared or used concurrently on or from different computers, including a workstation, terminal or other digital electronic device ("Device"). In other words, if You have several workstations, You will have to acquire a license for each workstation where the SOFTWARE will be used.

Backup Copy - You may make back-up copies of the SOFTWARE PRODUCT, but You may only have one copy per license installed at any given time. You may use the back-up copy solely for archival purposes. Except as expressly provided in this EULA, You may not otherwise make copies of the SOFTWARE PRODUCT, including the printed materials accompanying the SOFTWARE.

2. DESCRIPTION OF OTHER RIGHTS AND LIMITATIONS

Limitations on Reverse Engineering, Decompilation and Disassembly - You may not reverse engineer, decompile, or disassemble the SOFTWARE PRODUCT, except and only to the extent that such activity is expressly permitted by applicable law notwithstanding this limitation. You may not make any changes or modifications to the Software, without the written permission of an officer of DSC. You may not remove any proprietary notices, marks or labels from the Software Product. You shall institute reasonable measures to ensure compliance with the terms and conditions of this EULA.

Separation of Components - The SOFTWARE PRODUCT is licensed as a single product. Its component parts may not be separated for use on more than one HARDWARE unit.

Single INTEGRATED PRODUCT - If You acquired this SOFTWARE with HARDWARE, then the SOFTWARE PRODUCT is licensed with the HARDWARE as a single integrated product. In this case, the SOFTWARE PRODUCT may only be used with the HARDWARE as set forth in this EULA.

Rental - You may not rent, lease or lend the SOFTWARE PRODUCT. You may not make it available to others or post it on a server or web site.

Software Product Transfer - You may transfer all of Your rights under this EULA only as part of a permanent sale or transfer of the HARDWARE, provided You retain no copies, You transfer all of the SOFTWARE PRODUCT (including all component parts, the media and printed materials, any upgrades and this EULA), and provided the recipient agrees to the terms of this EULA. If the SOFTWARE PRODUCT is an upgrade, any transfer must also include all prior versions of the SOFTWARE PRODUCT.

Termination - Without prejudice to any other rights, DSC may terminate this EULA if You fail to comply with the terms and conditions of this EULA. In such event, You must destroy all copies of the SOFTWARE PRODUCT and all of its component parts.

Trademarks - This EULA does not grant You any rights in connection with any trademarks or service marks of DSC or its suppliers.

3. COPYRIGHT

All title and intellectual property rights in and to the SOFTWARE PRODUCT (including but not limited to any images, photographs, and text incorporated into the SOFTWARE PRODUCT), the accompanying printed materials, and any copies of the SOFTWARE PRODUCT, are owned by DSC or its suppliers. You may not copy the printed materials accompanying the SOFTWARE PRODUCT. All title and intellectual property rights in and to the content which may be accessed through use of the SOFTWARE PRODUCT are the property of the respective

content owner and may be protected by applicable copyright or other intellectual property laws and treaties. This EULA grants You no rights to use such content. All rights not expressly granted under this EULA are reserved by DSC and its suppliers.

EXPORT RESTRICTIONS - You agree that You will not export or re-export the SOFTWARE PRODUCT to any country, person, or entity subject to Canadian export restrictions.

CHOICE OF LAW - This Software License Agreement is governed by the laws of the Province of Ontario, Canada.

ARBITRATION - All disputes arising in connection with this Agreement shall be determined by final and binding arbitration in accordance with the Arbitration Act, and the parties agree to be bound by the arbitrator's decision. The place of arbitration shall be Toronto, Canada, and the language of the arbitration shall be English.

LIMITED WARRANTY

NO WARRANTY - DSC PROVIDES THE SOFTWARE "AS IS" WITHOUT WARRANTY. DSC DOES NOT WARRANT THAT THE SOFTWARE WILL MEET YOUR REQUIREMENTS OR THAT OPERATION OF THE SOFTWARE WILL BE UNINTERRUPTED OR ERROR-FREE.

CHANGES IN OPERATING ENVIRONMENT - DSC shall not be responsible for problems caused by changes in the operating characteristics of the HARDWARE, or for problems in the interaction of the SOFTWARE PRODUCT with non-DSC-SOFTWARE or HARDWARE PRODUCTS.

LIMITATION OF LIABILITY; WARRANTY REFLECTS ALLOCATION OF RISK - IN ANY EVENT, IF ANY STATUTE IMPLIES WARRANTIES OR CONDITIONS NOT STATED IN THIS LICENSE AGREEMENT, DSC'S ENTIRE LIABILITY UNDER ANY PROVISION OF THIS LICENSE AGREEMENT SHALL BE LIMITED TO THE GREATER OF THE AMOUNT ACTUALLY PAID BY YOU TO LICENSE THE SOFTWARE PRODUCT AND FIVE CANADIAN DOLLARS (CAD\$5.00). BECAUSE SOME JURISDICTIONS DO NOT ALLOW THE EXCLUSION OR LIMITATION OF LIABILITY FOR CONSEQUENTIAL OR INCIDENTAL DAMAGES, THE ABOVE LIMITATION MAY NOT APPLY TO YOU.

DISCLAIMER OF WARRANTIES - THIS WARRANTY CONTAINS THE ENTIRE WARRANTY AND SHALL BE IN LIEU OF ANY AND ALL OTHER WARRANTIES, WHETHER EXPRESSED OR IMPLIED (INCLUDING ALL IMPLIED WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE) AND OF ALL OTHER OBLIGATIONS OR LIABILITIES ON THE PART OF DSC. DSC MAKES NO OTHER WARRANTIES. DSC NEITHER ASSUMES NOR AUTHORIZES ANY OTHER PERSON PURPORTING TO ACT ON ITS BEHALF TO MODIFY OR TO CHANGE THIS WARRANTY, NOR TO ASSUME FOR IT ANY OTHER WARRANTY OR LIABILITY CONCERNING THIS SOFTWARE PRODUCT.

EXCLUSIVE REMEDY AND LIMITATION OF WARRANTY - UNDER NO CIRCUMSTANCES SHALL DSC BE LIABLE FOR ANY SPECIAL, INCIDENTAL, CONSEQUENTIAL OR INDIRECT DAMAGES BASED UPON BREACH OF WARRANTY, BREACH OF CONTRACT, NEGLIGENCE, STRICT LIABILITY, OR ANY OTHER LEGAL THEORY. SUCH DAMAGES INCLUDE, BUT ARE NOT LIMITED TO, LOSS OF PROFITS, LOSS OF THE SOFTWARE PRODUCT OR ANY ASSOCIATED EQUIPMENT, COST OF CAPITAL, COST OF SUBSTITUTE OR REPLACEMENT EQUIPMENT, FACILITIES OR SERVICES, DOWN TIME, PURCHASERS TIME, THE CLAIMS OF THIRD PARTIES, INCLUDING CUSTOMERS, AND INJURY TO PROPERTY.

DSC recommends that the entire system be completely tested on a regular basis. However, despite frequent testing, and due to, but not limited to, criminal tampering or electrical disruption, it is possible for this SOFTWARE PRODUCT to fail to perform as expected.

Regulatory Information

UL Notes

For UL installations use this device only in conjunction with compatible DSC wireless receivers: HSM2HOST9, HS2LCDRF(P)9, HS2ICNRF(P)9, PG9920, WS900-19, and WS900-29. After installation verify the product

functionality in conjunction with the compatible receiver used.

FCC Compliance Statement

CAUTION: Changes or modifications to this equipment not expressly approved by DSC could void your authority to operate this equipment.

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Re-orient or relocate the receiving antenna.
- Increase the separation between the equipment and the receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

FCC ID: F5317PG9933

Innovation, Science and Economic Development Canada Statement:

IC: 160A-PG9933

The letters "IC:" indicate that this is an Innovation, Science and Economic Development Canada's certification number.

This device complies with FCC Rules Part 15 and with ISED Canada licence-exempt RSS standard(s). Operation is subject to the following two conditions: (1) this device may not cause interference, and (2) this device must accept any interference, including interference that may cause undesired operation of the device.

Le présent appareil est conforme aux CNR d'ISED Canada applicables aux appareils radio exempts de licence.

L'exploitation est autorisée aux deux conditions suivantes : (1) l'appareil ne doit pas produire de brouillage, et (2) l'utilisateur de l'appareil doit accepter tout brouillage radioélectrique subi, même si le brouillage est susceptible d'en compromettre le fonctionnement.

This Class B digital apparatus complies with Canadian ICES-003.

Cet appareil numérique de la classe B est conforme à la norme NMB-003 du Canada.

CAN ICES-3 (B)/NMB-3(B)

WARNING! To comply with FCC and IC RF exposure compliance requirements, the device should be located at a distance of at least 20 cm from all persons during normal operation. The antennas used for this product must not be co-located or operated in conjunction with any other antenna or transmitter.

Le dispositif doit être placé à une distance d'au moins 20 cm à partir de toutes les personnes au cours de son fonctionnement normal. Les antennes utilisées pour ce produit ne doivent pas être situées ou exploitées conjointement avec une autre antenne ou transmetteur.



DSC

From Tyco Security Products

© 2017 Tyco Security Products. All Rights Reserved.
Tech Support: 1-800-387-3630 (Canada & U.S.)



29010012R001