

TDK EMC CENTER CHIKUMAGAWA OPEN SITE

543 OTAI SAKU-CITY NAGANO JAPAN

REPORT OF MEASUREMENTS ON DIGITAL DEVICE

Date : June 19, 2001


Issued in : Saku-city, JAPAN

TDK APPLICATION No.: TDC-01-0605

1. Applicant : FUJI PHOTO FILM CO., LTD.
13-45, SENZUI 3 - CHOME, ASAKA - SHI, SAITAMA
351 - 8585 JAPAN
2. Factory : FUJIFILM PHOTONIX CO., LTD.
1 - 6, MATSUZAKADAIRA TAIWA - CHO,
KUROKAWA - GUN, MIYAGI - KEN, 981 - 3492 JAPAN
FUJIFILM IMAGING SYSTEMS(SUZHOU) CO., LTD.
138 Chang Jiang Road, New District, Jiangsu
16 Lingyan Road, New District, Jiangsu
3. Description of Equipment Under Test (EUT)
- 3-1. EUT : DIGITAL CAMERA
- 3-2. Category : FCC Class B Digital Device
- 3-3. FCC ID No. : F5GFP - 2600
- 3-4. Trade Name : FUJIFILM
- 3-5. Model No. : Fine Pix 2600 ZOOM
- 3-6. Serial No. : U000506
- 3-7. Date of Manufacture : May, 2001
- 3-8. Power Supply : 120 V AC, 60Hz
4. Regulation Applied : FCC Part 15 Subpart B CLASS B 3m
5. Measurement Procedure Used : ANSI C63.4 - 1992
6. Place of Measurement : TDK EMC CENTER CHIKUMAGAWA OPEN SITE
7. Date of Measurement : June 19, 2001
8. Measurement Results : The test results show that EUT conform to regulations
applied as shown in the attached sheets.

Note : (1) The test results relate only to items tested.

(2) This report shall not be reproduced except in full without the written approval of testing
laboratory.


Fumio Suga

Chief of TDK CHIKUMAGAWA OPEN SITE

Phone : 047-378-9470

FAX : 047-378-9780

MEASUREMENT RESULTS OF RADIATED RADIO NOISE at 3m

Date : June 19, 2001

Temp. : 20 °C ; Humi. : 62 %

Test Receiver :	Rohde & Schwarz ESCS 30		
Operation Mode :	Detector function : CISPR Quasi-Peak		
	6dB Band width : 120kHz	External Attenuator : none	

Description of Equipment DIGITAL CAMERA

Model No. : Fine Pix 2600 ZOOM

Test Condition of Equipment Under Test (EUT)

1) Configuration of EUT : Refer to sheet No.5, 6 and 7.

2) EUT Grounding : None.


3) Operating Condition : CAMERA Mode .

Frequency (MHz)	Correction Factor (dB)	Meter Reading (dB μ V/m)		Limit (dB μ V/m)	Emission Level (dB μ V/m)		Margin (dB)
		Hor.	Ver.		Hor.	Ver.	
62.770	8.6	---	25.6	40.0	---	25.6	14.4
67.900	7.8	24.3	---	40.0	24.3	---	15.7
110.460	13.4	36.4	35.2	43.5	36.4	35.2	7.1
128.860	15.7	25.6	23.7	43.5	25.6	23.7	17.9
184.090	18.3	---	27.8	43.5	---	27.8	15.7
220.030	20.0	34.2	---	46.0	34.2	---	11.8
240.030	20.4	32.3	27.1	46.0	32.3	27.1	13.7
254.150	20.4	31.3	---	46.0	31.3	---	14.7
304.260	19.2	33.8	28.2	46.0	33.8	28.2	12.2
311.420	19.4	36.7	29.4	46.0	36.7	29.4	9.3
320.050	19.6	35.5	29.0	46.0	35.5	29.0	10.5
331.370	19.8	33.8	25.2	46.0	33.8	25.2	12.2
499.810	22.8	35.0	38.3	46.0	35.0	38.3	7.7
529.770	23.5	34.3	26.9	46.0	34.3	26.9	11.7
551.250	24.0	33.7	---	46.0	33.7	---	12.3
558.400	24.2	38.0	---	46.0	38.0	---	8.0
598.790	25.2	---	27.6	46.0	---	27.6	18.4
899.700	31.0	36.0	39.0	46.0	36.0	39.0	7.0

Note : 1) Meter Readings include Correction Factor (Antenna factor , Cable loss).
2) Margin = Limit — Emission Level.

Tested by : *Fumihiko Goi*
Engineer of TDK Chikumagawa Open Site

FCC 15B CLASS B RADIATED 3m
EUT : Fine Pix 2600 ZOOM 120V/60Hz
MODE : CAMERA Mode
Frequency : 30 ~ 1000 MHz

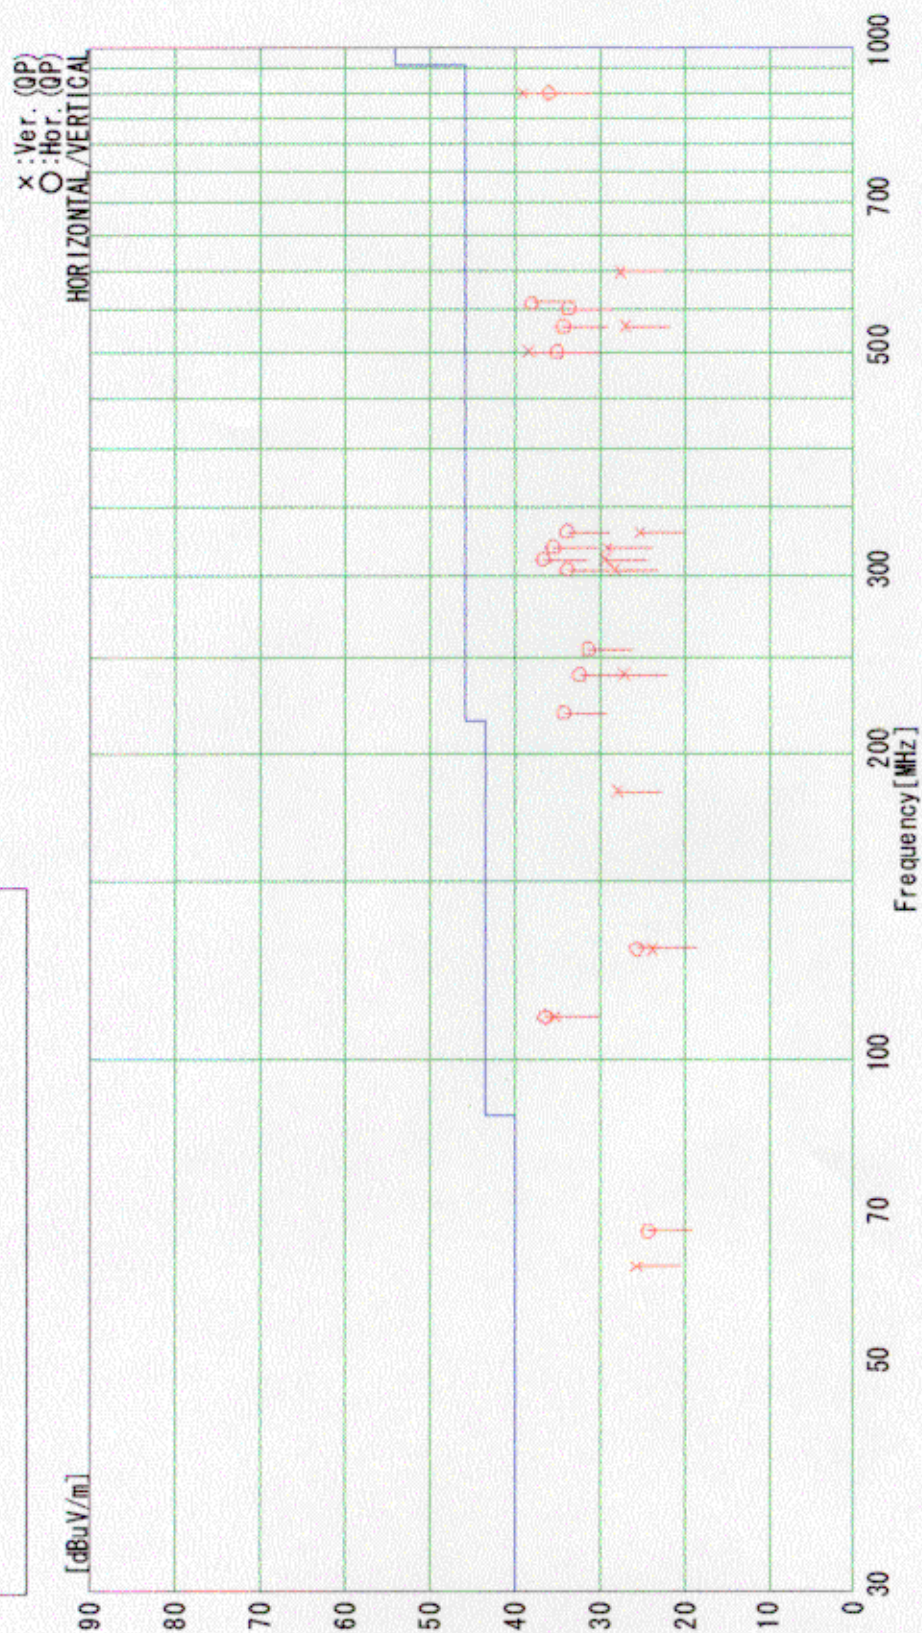

MEASUREMENT RESULTS OF RADIATED RADIO NOISE at 3m

Date : June 19, 2001

Temp. : 20 °C ; Humi. : 62 %

Test Receiver : Rohde & Schwarz ESCS 30

Operation Mode : Detector function : CISPR Quasi-Peak

6dB Band width : 120kHz

External Attenuator : none

Description of Equipment DIGITAL CAMERA

Model No. : Fine Pix 2600 ZOOM

Test Condition of Equipment Under Test (EUT)

1) Configuration of EUT : Refer to sheet No.5, 6 and 7.


2) EUT Grounding : None.

3) Operating Condition : USB PC CAMERA Mode .


Frequency (MHz)	Correction Factor (dB)	Meter Reading (dB μ V/m)		Limit (dB μ V/m)	Emission Level (dB μ V/m)		Margin (dB)
		Hor.	Ver.		Hor.	Ver.	
62.770	8.6	---	25.6	40.0	---	25.6	14.4
67.900	7.8	24.3	---	40.0	24.3	---	15.7
110.460	13.4	27.9	26.6	43.5	27.9	26.6	15.6
128.860	15.7	26.4	22.0	43.5	26.4	22.0	17.1
220.030	20.0	34.6	---	46.0	34.6	---	11.4
240.030	20.4	33.2	28.5	46.0	33.2	28.5	12.8
254.150	20.4	31.8	---	46.0	31.8	---	14.2
304.260	19.2	33.7	28.2	46.0	33.7	28.2	12.3
311.420	19.4	36.9	29.4	46.0	36.9	29.4	9.1
320.050	19.6	35.0	29.0	46.0	35.0	29.0	11.0
331.370	19.8	39.0	33.6	46.0	39.0	33.6	7.0
345.180	20.1	31.3	31.4	46.0	31.3	31.4	14.6
499.810	22.8	35.8	38.6	46.0	35.8	38.6	7.4
529.770	23.5	34.4	---	46.0	34.4	---	11.6
551.250	24.0	33.3	---	46.0	33.3	---	12.7
558.400	24.2	36.5	---	46.0	36.5	---	9.5
595.800	25.1	36.2	37.4	46.0	36.2	37.4	8.6
899.700	31.0	36.2	40.2	46.0	36.2	40.2	5.8

Note : 1) Meter Readings include Correction Factor (Antenna factor , Cable loss).

2) Margin = Limit - Emission Level.


Tested by : 
Engineer of TDK Chikumagawa Open Site

FCC 15B CLASS B RADIATED 3m
EUT : Fine Pix 2600 ZOOM 120V/60Hz
MODE : USB PC CAMERA Mode
Frequency : 30 ~ 1000 MHz

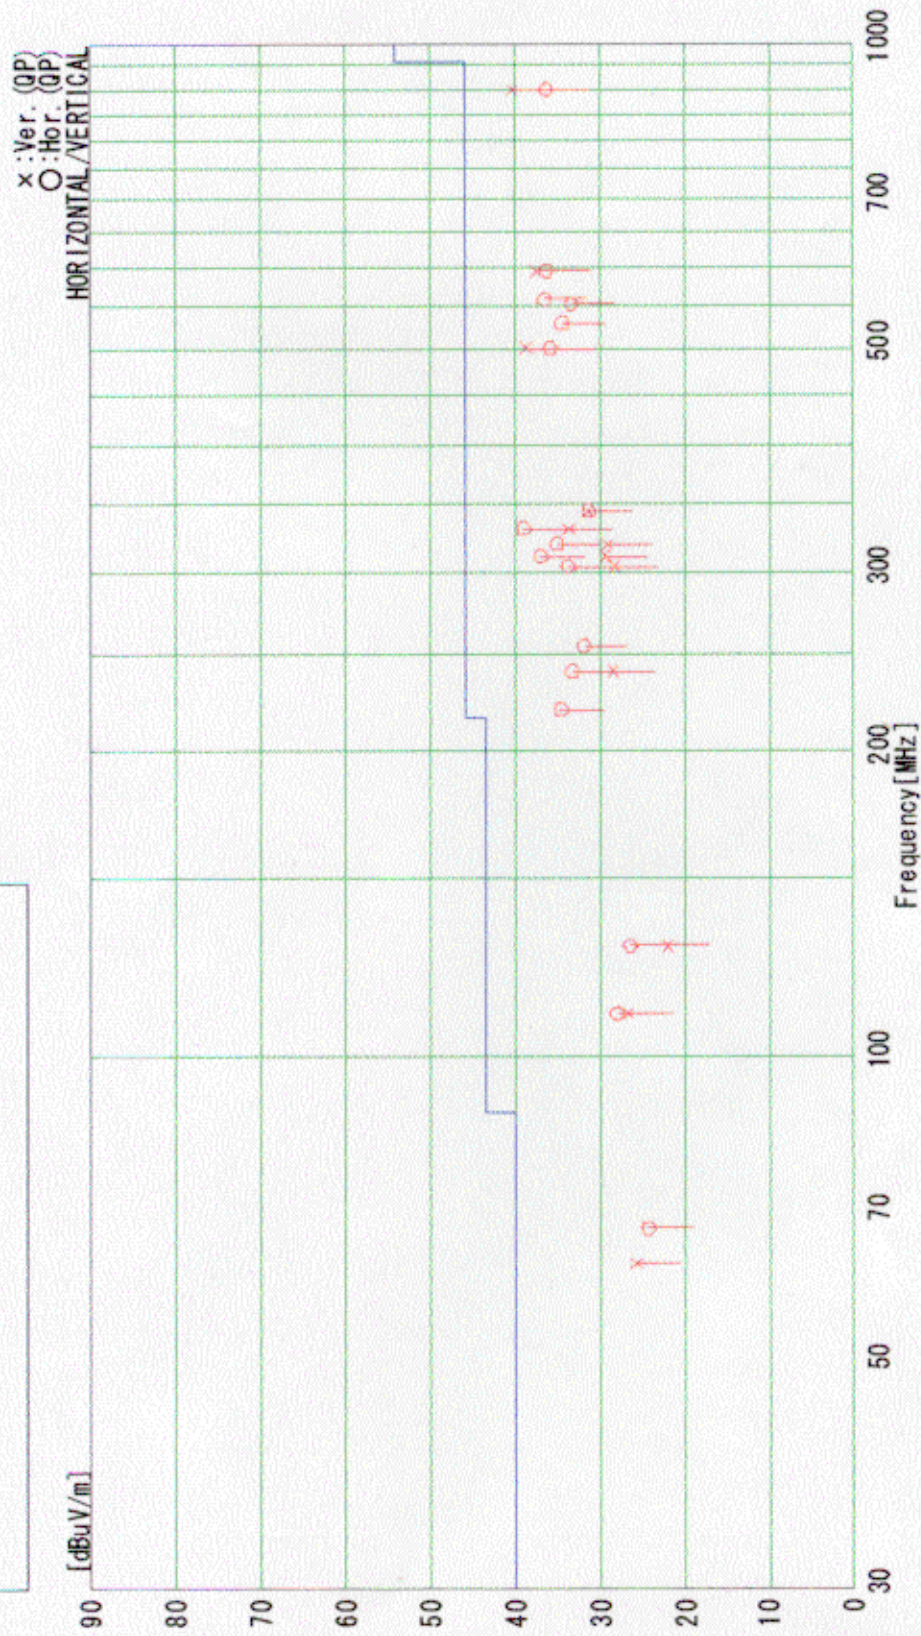

EUT's Test Arrangement of Radiation

Non Metallic (F. R. P.) Dome (W 8.0m × D 6.3m × H 5.5m)

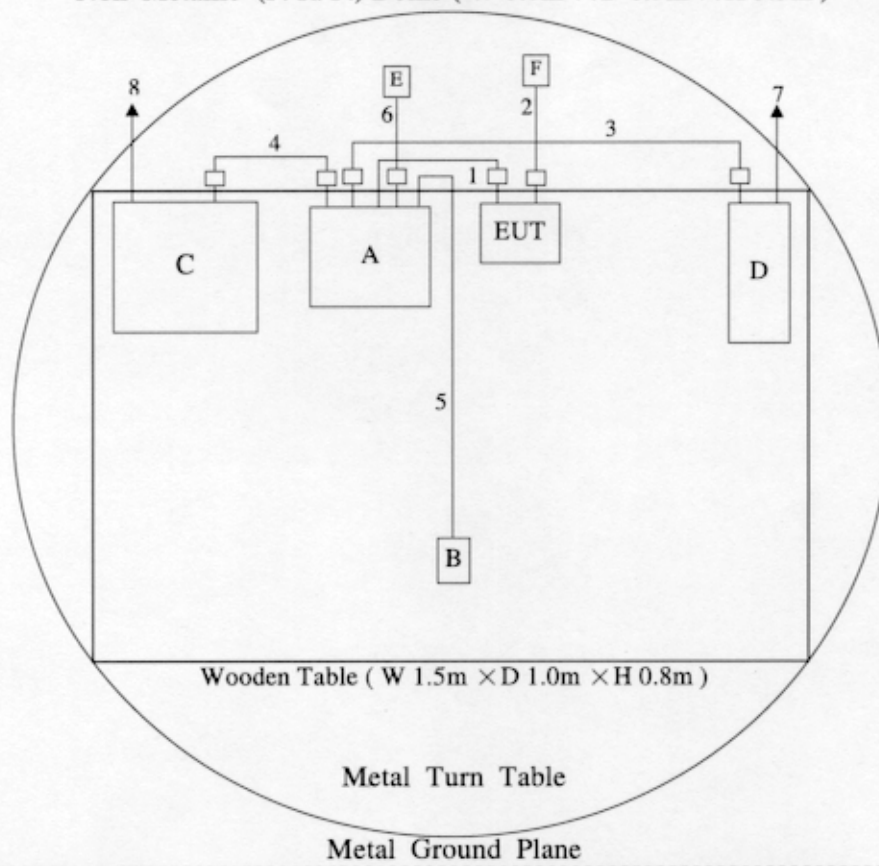

Test Configuration

No.	Device	MODEL No.	FCC ID	S/N	Manufacturer
EUT	DIGITAL CAMERA	Fine Pix 2600 ZOOM	F5GFP-2600	U000506	FUJI PHOTO FILM CO. , LTD.
A	PC NOTE BOOK COMPUTER	12XL212	DOC	1V08FHNJE1N	COMPAQ COMPUTER COR.
B	MOUSE	M-BB48	DOC	LZE01271677	Logitech
C	PC MONITOR	M2978	BEJCA500	CY5430HF3CV	LG ELECTRONICS
D	SCANNER	AS1	F5GAS-1	0009	FUJI PHOTO FILM CO. , LTD.
E	AC ADAPTER	LE-9702B-01	-----	177625-001	COMPAQ COMPUTER COR.
F	AC ADAPTER	AC-3V	-----	0044	FUJI PHOTO FILM CO. , LTD.

TDK Application No : TDC-01-0605

Connection Cables

No.	I/F & Power Cable	Model No.	Cable Length	Feraite Core	Manufacturer
1	USB CABLE	-----	1.20 m	YES	SHIELD YES
2	AC ADAPTOR CABLE	-----	1.90 m	YES	
3	SCSI CABLE	-----	1.50 m	YES	SHIELD YES
4	PC MONITOR CABLE	-----	1.65 m	YES	SHIELD YES
5	MOUSE CABLE	-----	1.90 m		SHIELD YES
6	AC ADAPTOR CABLE(PC)	-----	1.55 m	YES	
7	AC CABLE(SCANNER)	-----	1.80 m		
8	PC MONITOR POWER CABLE	-----	1.70 m		

RADIATION MEASUREMENT

EUT : DIGITAL CAMERA

MODEL No. Fine Pix 2600 ZOOM

CONFIGURATION FRONT VIEW



CONFIGURATION REAR VIEW



EUT's Test Arrangement of Radiation

Fig 1

Non metallic (F. R. P.) Dome (W 8.0m × D 6.3m × H 5.5m)

