

Temp. : 17 °C ; Humi. : 62 %


External Attenuator : none

; Type : Desk Top

3) Operating Condition : PC CAMERA Mode .

Engineer of TDK Chikumagawa Open Site

FCC 15B CLASS B CONDUCTED
 EUT : Fine Pix A200 120V/60Hz
 MODE : PC CAMERA Mode
 Frequency : 0.45 ~ 30 MHz

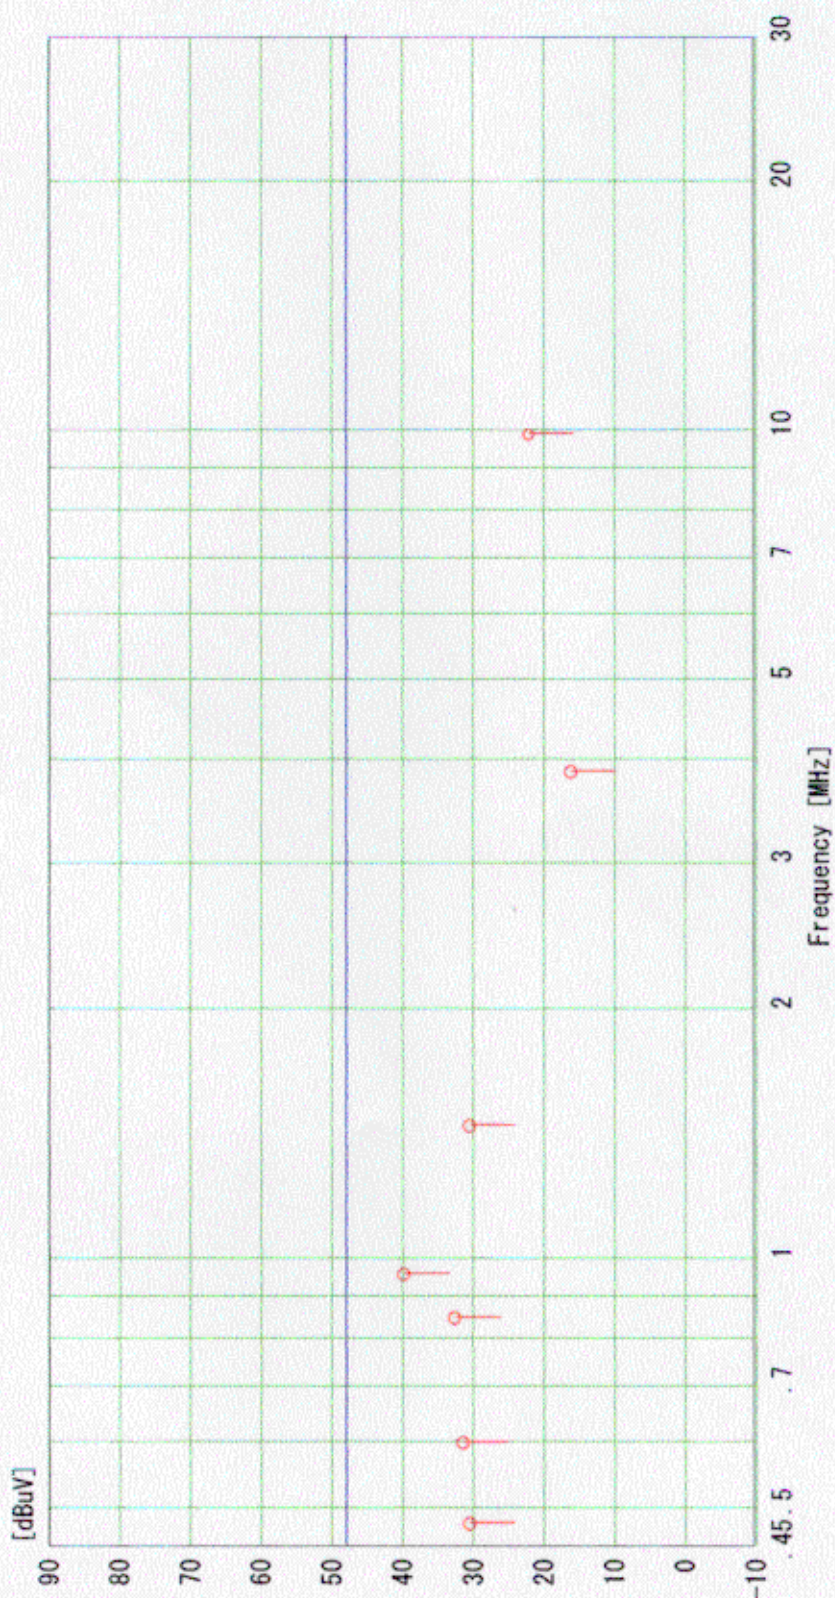

Temp. : 17 °C ; Humi. : 62 %

External Attenuator : none

Model No. : Fine Pix A200 ; Type : Desk Top


3) Operating Condition : PLAY Mode .

Note :

- 1) Correction Factor include LISN Factor and cable loss for 7 meters.
Meter Readings include Correction Factor.
- 2) VA : Between one end of the power cable and the grounded.
VB : Between the other end of the power cable and the grounded.
- 3) Margin = Limit — Emission Level.


Engineer of TDK Chikumagawa Open Site

FCC 15B CLASS B CONDUCTED
EUT : Fine Pix A200 120V/60Hz
MODE : PLAY Mode
Frequency : 0.45 ~ 30 MHz

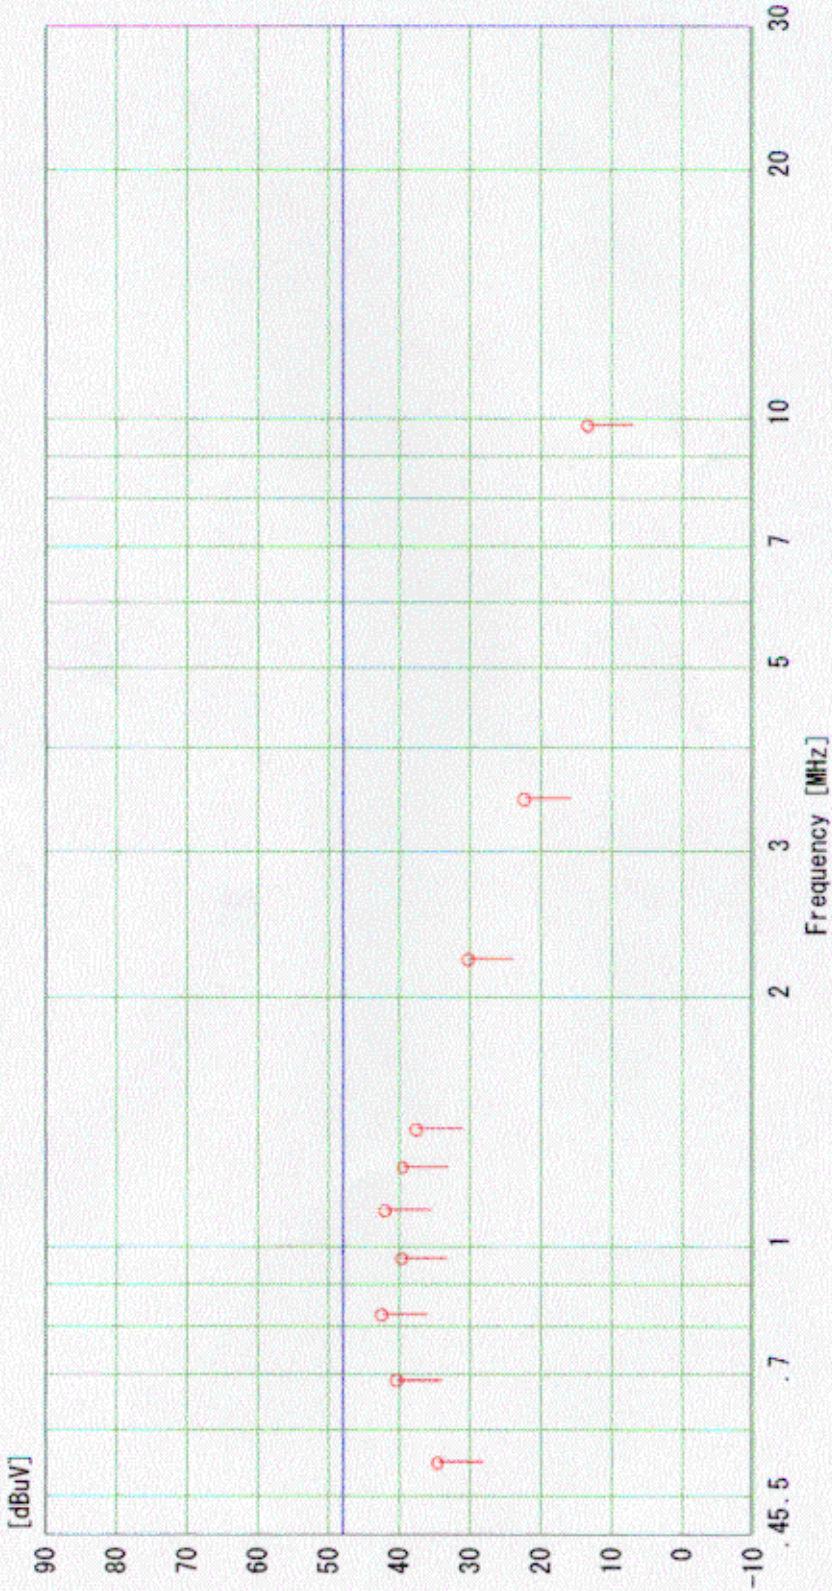

EUT's Test Arrangement of Conduction

Compact Anechoic Chamber (W 3.0m × D 7.0m × H 3.0m)

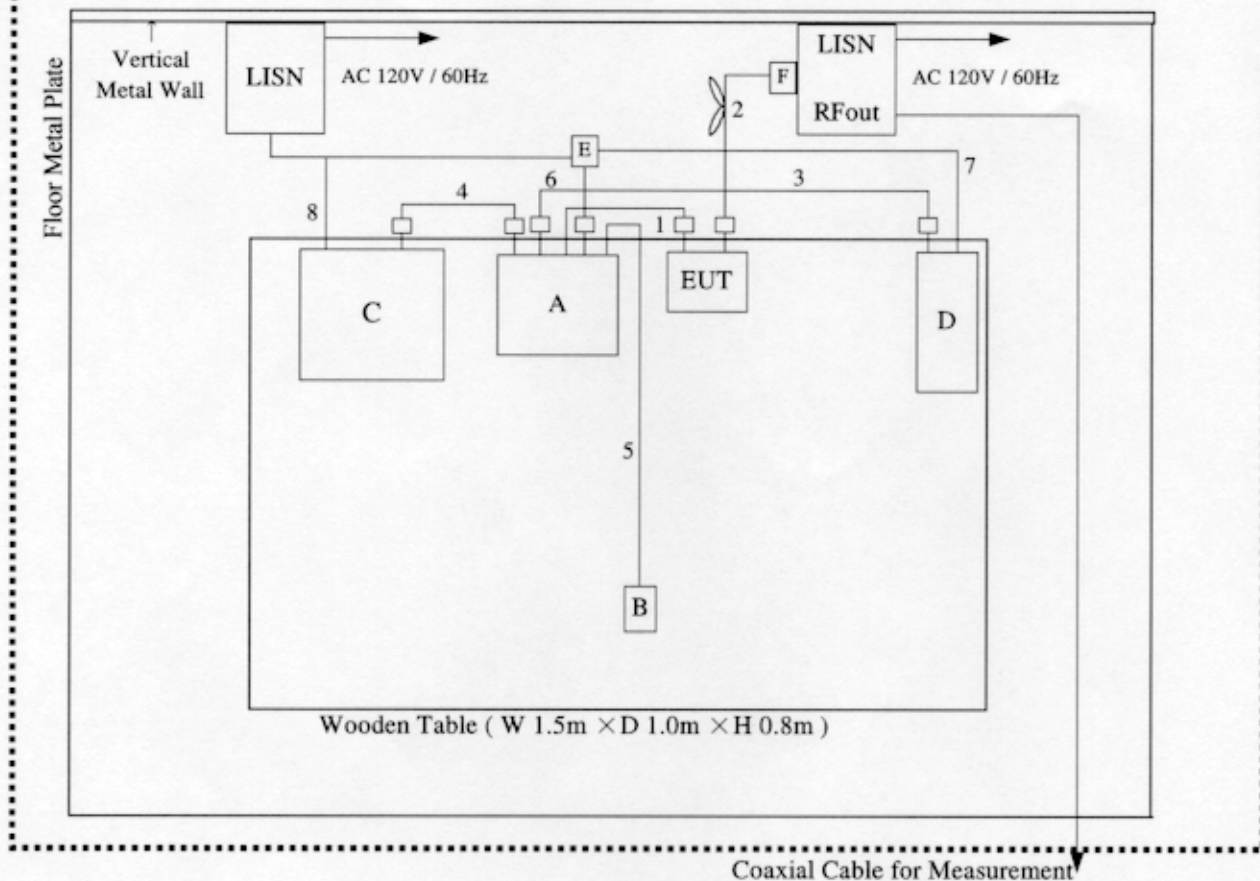

Test Configuration

No.	Device	MODEL No.	FCC ID	S/N	Manufacturer
EUT	DIGITAL CAMERA	Fine Pix A200	F5GFP-A200	RU-00313	FUJI PHOTO FILM CO. , LTD.
A	PC NOTE BOOK COMPUTER	12XL212	DOC	1V08FHNJE1N5	COMPAQ COMPUTER COR.
B	MOUSE	M-BB48	DOC	LZE01271677	Logitech
C	PC MONITOR	M2978	BEJCA500	CY5430HF3CV	LG ELECTRONICS
D	SCANNER	AS1	F5GAS-1	0009	FUJI PHOTO FILM CO. , LTD.
E	AC ADAPTER	LE-9702B-01	-----	177625-001	COMPAQ COMPUTER COR.
F	AC ADAPTER	AC-3V	-----	0044	FUJI PHOTO FILM CO. , LTD.

TDK Application No : TDC-02-0602(1)

Connection Cables

No.	I/F & Power Cable	Model No.	Cable Length	Feraite Core	Manufacturer
1	USB CABLE	-----	1.20 m	YES	SHIELD YES
2	AC ADAPTOR CABLE	-----	1.90 m	YES	
3	SCSI CABLE	-----	1.50 m	YES	SHIELD YES
4	PC MONITOR CABLE	-----	1.65 m	YES	SHIELD YES
5	MOUSE CABLE	-----	1.90 m		SHIELD YES
6	AC ADAPTOR CABLE(PC)	-----	1.55 m	YES	
7	AC CABLE(SCANNER)	-----	1.80 m		
8	PC MONITOR POWER CABLE	-----	1.70 m		

CONDUCTION MEASUREMENT


EUT : DIGITAL CAMERA

MODEL No. Fine Pix A200

CONFIGURATION FRONT VIEW




CONFIGURATION SIDE VIEW

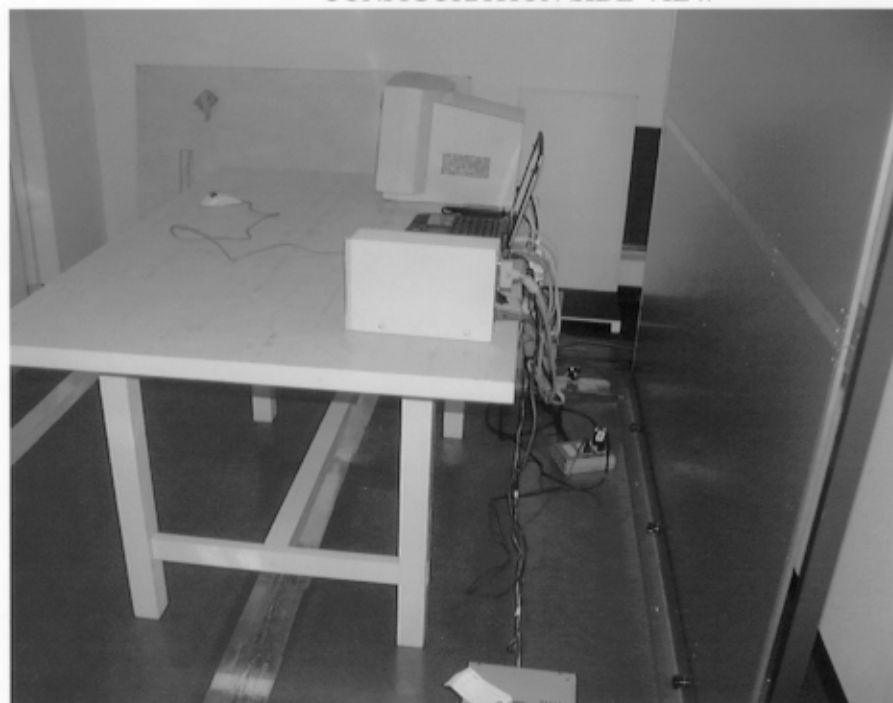

EUT's Test Arrangement of Conduction

Fig 2

Compact Anechoic Chamber (W 3.0m × D 7.0m × H 3.0m)

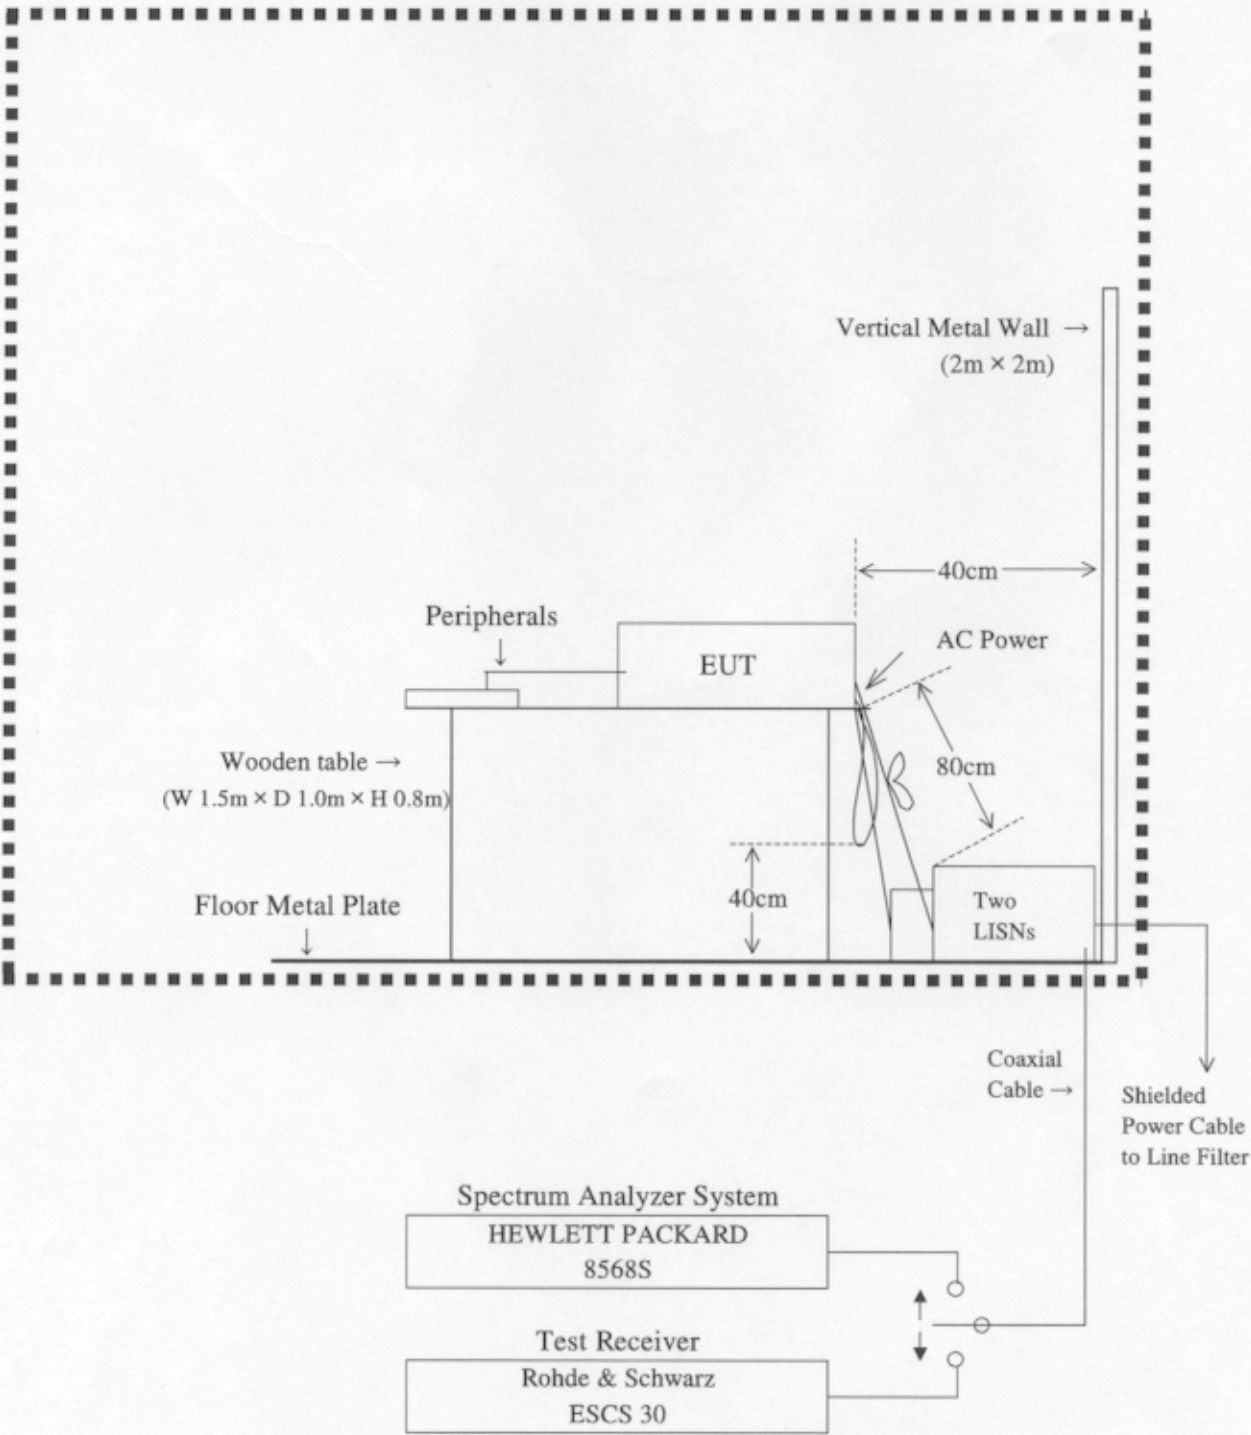

TDK Application No. : TDC-02-0602(1)

MEASURING INSTRUMENT USED

TDK APPLICATION No. : TDC-02-0602(1)

<u>Instrument</u>	<u>Model No.</u>	<u>Manufacturer</u>	<u>ID No.</u>	<u>Last Calibration Date</u>	<u>Period</u>
☒ Spectrum Analyzer	8568B	Hewlett-Packard	2445A00924	Mar. 2002	1 year
☒ RF-Preselector	85685A	Hewlett-Packard	2648A00481	Mar. 2002	1 year
☒ Field Strength Meter	ESCS 30	Rohde & Schwarz	825788/007	Mar. 2002	1 year
☒ Field Strength Meter	ESCS 30	Rohde & Schwarz	834115/020	Mar. 2002	1 year
☐ Field Strength Meter	ESMI	Rohde & Schwarz	61360008	Oct. 2001	1 year
☒ Pre - Amplifier	8447D	Hewlett-Packard	2443A04539	Mar. 2002	1 year
☐ Pre - Amplifier	8449B	Hewlett-Packard	3008A01391	Mar. 2002	1 year
☒ Biconical Antenna	BBA9106	Schwarzbeck	D-6901 No.2	Mar. 2002	1 year
☒ Log-Periodic Antenna	UHALP9107	Schwarzbeck	424/517	Mar. 2002	1 year
☐ Dipole Antenna	VHA9103	Schwarzbeck	D-6901 No.3	Mar. 2002	1 year
☐ Dipole Antenna	UHA9105	Schwarzbeck	29-14066	Mar. 2002	1 year
☒ Horn Antenna	BBHA9120-B	Schwarzbeck	126	Apr. 2002	1 year
☒ LISN (50 μ H/50 Ω)	KNW-407	Kyoritsu Electrical Work	8-680-7	Mar. 2002	1 year
☒ LISN (50 μ H/50 Ω)	KNW-407	Kyoritsu Electrical Work	8-823-10	Mar. 2002	1 year
☐ LISN (50 μ H/50 Ω)	KNW-408	Kyoritsu Electrical Work	8-652-35	Mar. 2002	1 year
☐ LISN (50 μ H/50 Ω)	ESH2-Z5	Rohde & Schwarz	881 362/011	Mar. 2002	1 year
☒ Open Test Site	TCO-10	TDK Corporattion	GD-0043-5	May. 2002	1 year
☒ Co-axial Cable	AK9513	Schwarzbeck	N-C007	Mar. 2002	1 year
☐ Co-axial Cable	8D-2V	Shinagawa Densen	N-C012	Mar. 2002	1 year
☐ Co-axial Cable	8D-2V	Shinagawa Densen	N-C013	Mar. 2002	1 year
☒ Co-axial Cable	8D-2V	Shinagawa Densen	N-C014	Mar. 2002	1 year
☒ Co-axial Cable	8D-2V	Shinagawa Densen	N-C016	Mar. 2002	1 year
☒ Co-axial Cable	5D-2W	Shinagawa Densen	N-C017	Mar. 2002	1 year
☒ RF Switch (EMI Interface) MP59B		Anritsu	N-C025	Mar. 2002	1 year