

ELECTROMAGNETIC EMISSION COMPLIANCE REPORT FOR LOW-POWER, NON-LICENSED TRANSMITTER

Test Report No. : OT-214-RWD-085

Reception No. : 2104001724

Applicant : InBody Co., Ltd.

Address : InBody Bldg., 625, Eonju-ro, Gangnam-gu, Seoul, 06106, South Korea

Manufacturer : InBody Co., Ltd.

Address : 15, Heugam-gil, Ipjang-myeon, Seobuk-gu, Cheonan-si, Chungcheongnam-do 31025
KOREA

Type of Equipment : Body Composition Analyzer

FCC ID. : F6OH30NWI

Model Name : H30NWi

Serial number : N/A

Total page of Report : 32 pages (including this page)

Date of Incoming : April 19, 2021

Date of issue : April 28, 2021


SUMMARY

The equipment complies with the regulation; *FCC PART 15 SUBPART C Section 15.247*

This test report only contains the result of a single test of the sample supplied for the examination.

It is not a generally valid assessment of the features of the respective products of the mass-production.





Tested by
Hyung-Kwon, Oh / Manager
ONETECH Corp.

Reviewed by
Tae-Ho, Kim / Senior Manager
ONETECH Corp.

Approved by
Ki-Hong, Nam / General Manager
ONETECH Corp.

CONTENTS**PAGE**


1. VERIFICATION OF COMPLIANCE	5
2. TEST SUMMARY.....	6
2.1 TEST ITEMS AND RESULTS FOR BLUETOOTH LE	6
2.2 ADDITIONS, DEVIATIONS, EXCLUSIONS FROM STANDARDS.....	6
2.3 RELATED SUBMITTAL(S) / GRANT(S)	6
2.4 PURPOSE OF THE TEST	6
2.5 TEST METHODOLOGY.....	6
2.6 TEST FACILITY.....	6
3. GENERAL INFORMATION.....	7
3.1 PRODUCT DESCRIPTION.....	7
3.2 ALTERNATIVE TYPE(S)/MODEL(S); ALSO COVERED BY THIS TEST REPORT.....	7
4. EUT MODIFICATIONS.....	7
5. SYSTEM TEST CONFIGURATION.....	8
5.1 JUSTIFICATION.....	8
5.2 PERIPHERAL EQUIPMENT	8
5.3 MODE OF OPERATION DURING THE TEST	8
5.4 CONFIGURATION OF TEST SYSTEM.....	10
6. PRELIMINARY TEST	10
6.1 AC POWER LINE CONDUCTED EMISSIONS TESTS.....	10
6.2 GENERAL RADIATED EMISSIONS TESTS	10
7. MINIMUM 6 DB BANDWIDTH.....	11
7.1 OPERATING ENVIRONMENT	11
7.2 TEST SET-UP	11
7.3 TEST DATE	11
7.4 TEST DATA FOR 1 MBPS.....	12
8. MAXIMUM PEAK OUTPUT POWER.....	14
8.1 OPERATING ENVIRONMENT	14
8.2 TEST SET-UP	14
8.3 TEST DATE	14
8.4 TEST DATA FOR 1 MBPS.....	15
9. 100 KHZ BANDWIDTH OUTSIDE THE FREQUENCY BAND.....	17
9.1 OPERATING ENVIRONMENT	17

9.2 TEST SET-UP FOR CONDUCTED MEASUREMENT	17
9.3 TEST SET-UP FOR RADIATED MEASUREMENT	17
9.4 TEST DATE	17
9.5 TEST DATA FOR CONDUCTED EMISSION	18
<i>9.5.1 Test data for 1 Mbps</i>	18
9.6 TEST DATA FOR RADIATED EMISSION	23
<i>9.6.1 Radiated Emission which fall in the Restricted Band</i>	23
<i>9.6.2 Spurious & Harmonic Radiated Emission</i>	24
10. PEAK POWER SPECTRAL DENSITY	25
10.1 OPERATING ENVIRONMENT	25
10.2 TEST SET-UP	25
10.3 TEST DATE	25
10.4 TEST DATA FOR 1 MBPS	26
11. RADIATED EMISSION TEST	28
11.1 OPERATING ENVIRONMENT	28
11.2 TEST SET-UP	28
11.3 TEST DATE	29
11.4 TEST DATA FOR 30 MHZ ~ 1 GHZ	30
<i>11.4.1 Test data for Bluetooth LE</i>	30
<i>11.5 Test data for Below 30 MHz</i>	31
11.6 TEST DATA FOR ABOVE 1 GHZ	31
12. LIST OF TEST EQUIPMENT	32

Revision History

Rev. No.	Issue Report No.	Issued Date	Revisions	Section Affected
0	OT-214-RWD-085	April 28, 2021	Initial Release	All

1. VERIFICATION OF COMPLIANCE

Applicant : InBody Co., Ltd.
 Address : InBody Bldg., 625, Eonju-ro, Gangnam-gu, Seoul, 06106, South Korea
 Contact Person : Kyung Keun, Kim / Manager
 Telephone No. : +82-2-300-2241
 FCC ID : F6OH30NWI
 Model Name : H30NWi
 Brand Name : 
 Serial Number : N/A
 Date : April 28, 2021

EQUIPMENT CLASS	DTS – DIGITAL TRNSMISSION SYSTEM
E.U.T. DESCRIPTION	Body Composition Analyzer
THIS REPORT CONCERNS	Original Grant
MEASUREMENT PROCEDURES	ANSI C63.10: 2020
TYPE OF EQUIPMENT TESTED	Pre-Production
KIND OF EQUIPMENT AUTHORIZATION REQUESTED	Certification
EQUIPMENT WILL BE OPERATED UNDER FCC RULES PART(S)	FCC PART 15 SUBPART C Section 15.247 KDB 558074 D01 15.247 Meas Guidance v05r02
Modifications on the Equipment to Achieve Compliance	None
Final Test was Conducted On	3 m, Semi Anechoic Chamber

-. The above equipment was tested by ONETECH Corp. for compliance with the requirement set forth in the FCC Rules and Regulations. This said equipment in the configuration described in this report, shows the maximum emission levels emanating from equipment are within the compliance requirements.

2. TEST SUMMARY

2.1 Test items and results for Bluetooth LE

SECTION	TEST ITEMS	RESULTS
15.247 (a) (2)	Minimum 6 dB Bandwidth	Met the Limit / PASS
15.247 (b) (3)	Maximum Peak Conducted Output Power	Met the Limit / PASS
15.247 (d)	100 kHz Bandwidth Outside the Frequency Band	Met the Limit / PASS
15.247 (d)	Radiated Emission which fall in the Restricted Band	Met the Limit / PASS
15.247 (e)	Peak Power Spectral Density	Met the Limit / PASS
15.209	Radiated Emission Limits	Met the Limit / PASS
15.207	Conducted Limits	N/A (See Note)
15.203	Antenna Requirement	Met requirement / PASS

Note: This test is not performed because the EUT is operated by DC Power.

2.2 Additions, deviations, exclusions from standards

No additions, deviations or exclusions have been made from standard.

2.3 Related Submittal(s) / Grant(s)

Original submittal only

2.4 Purpose of the test

To determine whether the equipment under test fulfills the requirements of the regulation stated in FCC PART 15 SUBPART C Section 15.247.

2.5 Test Methodology

Both conducted and radiated testing was performed according to the procedures in ANSI C63.10: 2020. Radiated testing was performed at a distance of 3 m from EUT to the antenna.

2.6 Test Facility

The Onetech Corp. has been designated to perform equipment testing in compliance with ISO/IEC 17025.

The Electromagnetic compatibility measurement facilities are located at 43-14, Jinsaegol-gil, Chowol-eup, Gwangju-si, Gyeonggi-do, 12735, Korea.

-. Site Filing:

VCCI (Voluntary Control Council for Interference) – Registration No. R-20122/ C-14617/ G-10666/ T-11842

ISED (Innovation, Science and Economic Development Canada) – Registration No. Site# 3736A-3

KOLAS (Korea Laboratory Accreditation Scheme) - Accreditation NO. KT085

FCC (Federal Communications Commission) - Accreditation No. KR0013

RRA (Radio Research Agency) – Designation No. KR0013

3. GENERAL INFORMATION

3.1 Product Description

The InBody Co., Ltd., Model H30NWi (referred to as the EUT in this report) is a Body Composition Analyzer. The product specification described herein was obtained from product data sheet or user's manual.

DEVICE TYPE	Body Composition Analyzer
OPERATING FREQUENCY	2 402 MHz ~ 2 480 MHz
MODULATION TYPE	GFSK
RF OUTPUT POWER	-4.60 dBm
ANTENNA TYPE	Chip Antenna
ANTENNA GAIN	3.70 dBi
List of each Osc. or crystal Freq.(Freq. >= 1 MHz)	32.768 kHz, 38.4 MHz

3.2 Alternative type(s)/model(s); also covered by this test report.

-. None

4. EUT MODIFICATIONS

-. None

5. SYSTEM TEST CONFIGURATION

5.1 Justification

This device was configured for testing in a typical way as a normal customer is supposed to be used. During the test, the following components were installed inside of the EUT.

DEVICE TYPE	MANUFACTURER	MODEL/PART NUMBER	FCC ID
Main Board	InBody Co., Ltd.	INBODY_BOARD_MAIN_H60(H30)_B0821	N/A
Sub Board	InBody Co., Ltd.	INBODY_BOARD_WIFI_H60(H30)_B1621	N/A
WIFI Module	I&C Technology Co., Ltd.	N/A	2ADXS-WFM60-SFP2501

5.2 Peripheral equipment

-. None

5.3 Mode of operation during the test

For the testing, software used to control the EUT for staying in continuous transmitting is programmed.

For final testing, the EUT was set at 2 402 MHz, 2 440 MHz, and 2 480 MHz to get a maximum emission levels from the EUT. The EUT was moved throughout the XY, XZ, and YZ planes and the worst case is “XY” axis, but the worst data was recorded in this report.

-. Channel List (Bluetooth LE)

Channel	Frequency[MHz]	Channel	Frequency[MHz]	Channel	Frequency[MHz]
0	2 402.00	14	2 430.00	28	2 458.00
1	2 404.00	15	2 432.00	29	2 460.00
2	2 406.00	16	2 434.00	30	2 462.00
3	2 408.00	17	2 436.00	31	2 464.00
4	2 410.00	18	2 438.00	32	2 466.00
5	2 412.00	19	2 440.00	33	2 468.00
6	2 414.00	20	2 442.00	34	2 470.00
7	2 416.00	21	2 444.00	35	2 472.00
8	2 418.00	22	2 446.00	36	2 474.00
9	2 420.00	23	2 448.00	37	2 476.00
10	2 422.00	24	2 450.00	38	2 478.00
11	2 424.00	25	2 452.00	39	2 480.00
12	2 426.00	26	2 454.00		
13	2 428.00	27	2 456.00		


- Duty Cycle

Mode	Tx On Time [ms]	Tx Off Time [ms]	Duty Cycle [%]	Correction Factor [dB]
Bluetooth LE	2.13	0.38	84.86	0.71

Note – Duty Cycle : (Tx On Time / (Tx On Time + Tx Off Time)) * 100

Correction Factor : 10 * Log(1 / (Duty Cycle / 100))

- Test Plot

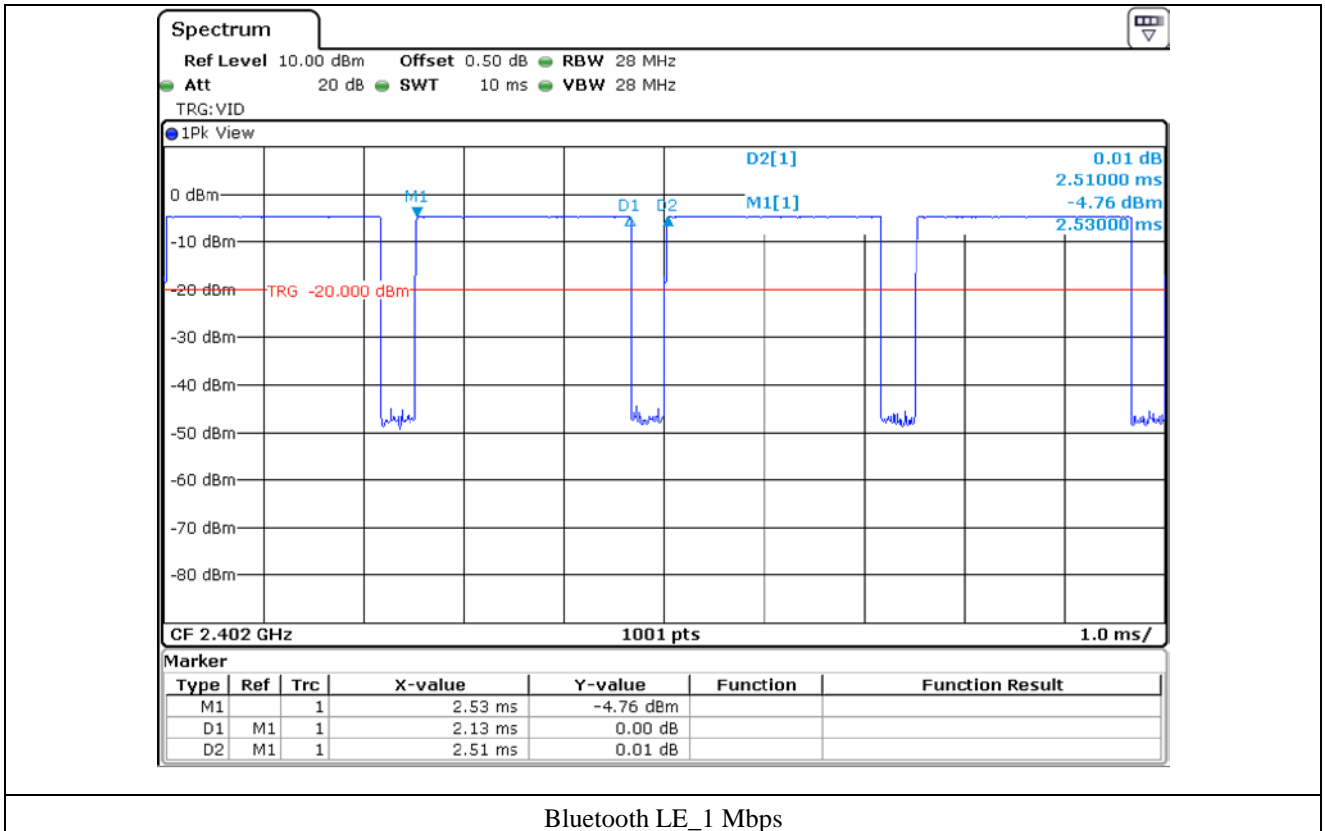

5.4 Configuration of Test System

Line Conducted Test: It is not need to test this requirement, because the EUT shall be operated by DC Power.

Radiated Emission Test: Preliminary radiated emissions test were conducted using the procedure in ANSI C63.10: 2020 to determine the worse operating conditions. Final radiated emission tests were conducted at 3 meter Semi Anechoic Chamber.

The turntable was rotated through 360 degrees and the EUT was tested by positioned three orthogonal planes to obtain the highest reading on the field strength meter. Once maximum reading was determined, the search antenna was raised and lowered in both vertical and horizontal polarization.

5.5 Antenna Requirement

For intentional device, according to section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

Antenna Construction:

The antenna of the EUT is a Chip Antenna on the main board in the EUT, so no consideration of replacement by the user.

6. PRELIMINARY TEST

6.1 AC Power line Conducted Emissions Tests

During Preliminary Test, the following operating mode was investigated.

Operation Mode	The Worse operating condition (Please check one only)
It is not need to test this requirement, because the power of the EUT is supplied by DC Power.	

6.2 General Radiated Emissions Tests

During Preliminary Test, the following operating mode was investigated.

Operation Mode	The Worse operating condition (Please check one only)
Transmitting Mode	X

7. MINIMUM 6 dB BANDWIDTH


7.1 Operating environment

Temperature : 23 °C

Relative humidity : 45 % R.H.

7.2 Test set-up

The antenna output of the EUT was connected to the spectrum analyzer. The resolution bandwidth is set to 100 kHz, and peak detection was used. The 6 dB bandwidth is defined as the total spectrum over which the power is higher than the peak power minus 6 dB.

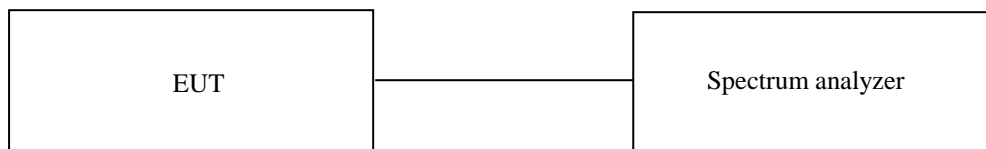


7.3 Test Date

April 19, 2021 ~ April 26, 2021


7.4 Test data for 1 Mbps

CHANNEL	FREQUENCY(MHz)	MEASURED VALUE (kHz)	LIMIT (kHz)	MARGIN (kHz)
Low	2 402.00	679.30	500.00	179.30
Middle	2 440.00	649.40	500.00	149.40
High	2 480.00	654.30	500.00	154.30


Remark. Margin = Measured Value - Limit

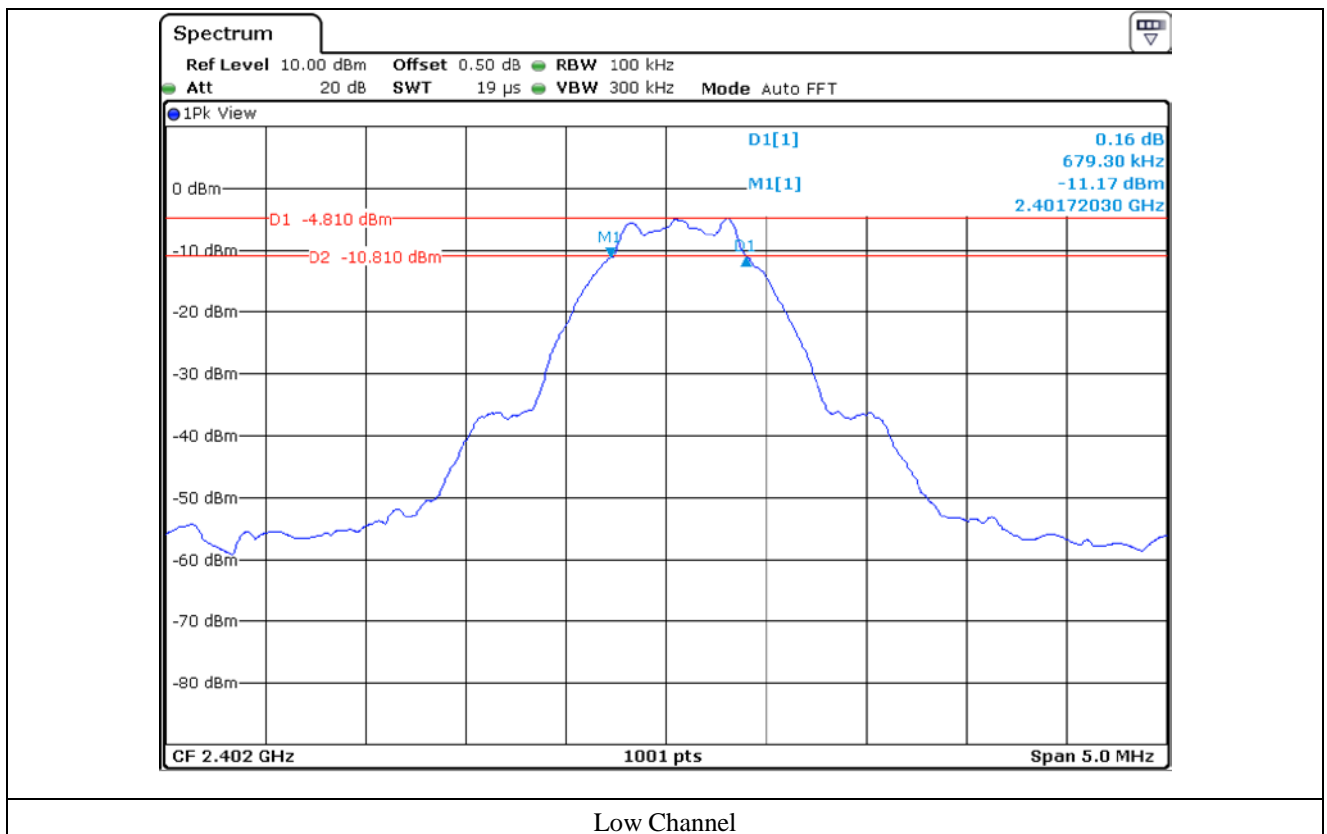

Low Channel

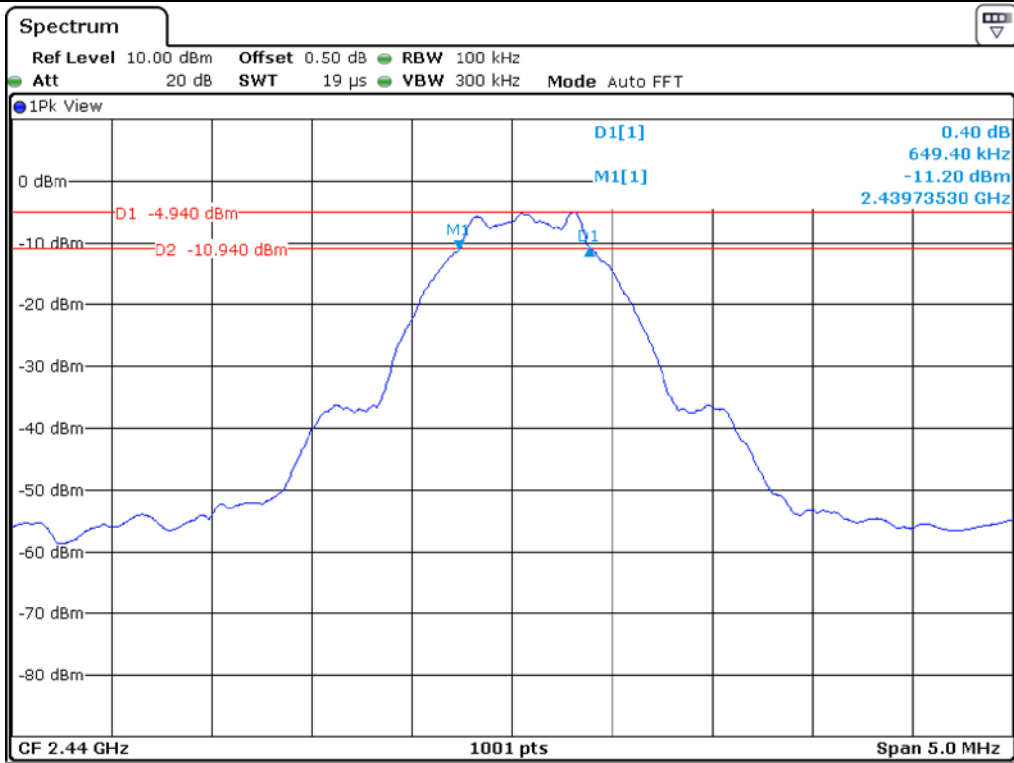

Middle Channel

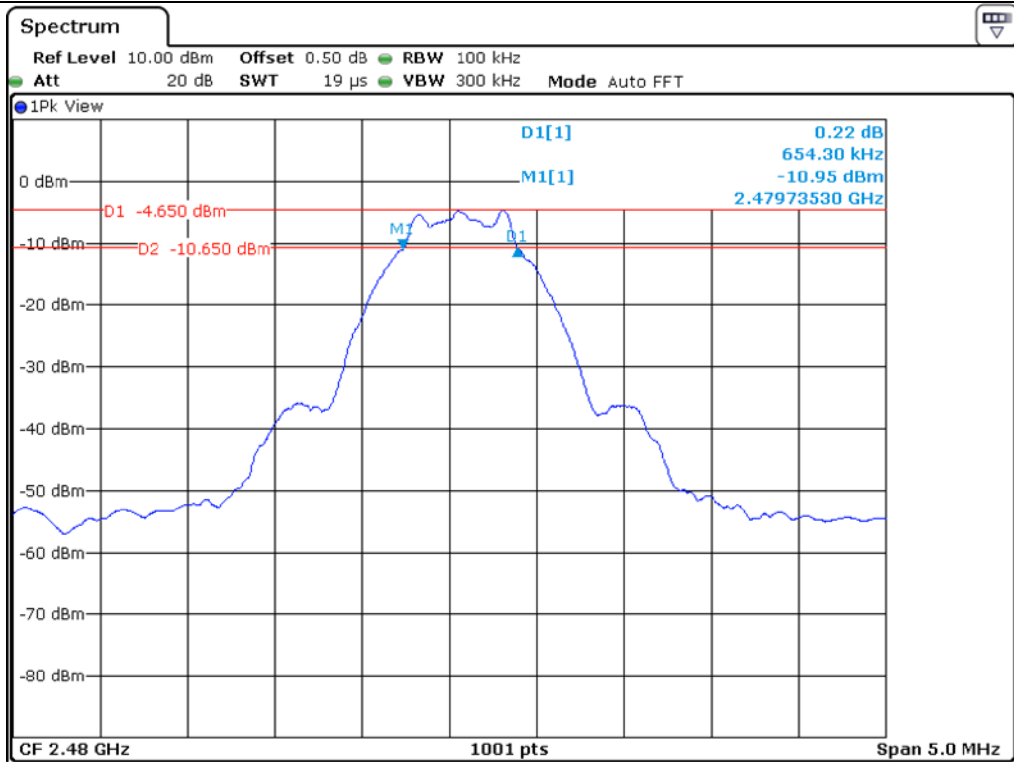

High Channel

8. MAXIMUM PEAK OUTPUT POWER


8.1 Operating environment

Temperature : 23 °C
 Relative humidity : 45 % R.H.

8.2 Test set-up

The antenna output of the EUT was connected to the spectrum analyzer.

The resolution bandwidth is set to \geq DTS Bandwidth, the video bandwidth is set to 3 times the resolution bandwidth.

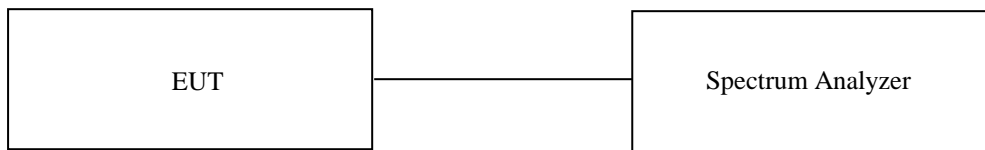

8.3 Test Date


April 19, 2021 ~ April 26, 2021


8.4 Test data for 1 Mbps

-. Test Result : Pass


CHANNEL	FREQUENCY (MHz)	MEASURED VALUE (dBm)	LIMIT (dBm)	MARGIN (dB)
LOW	2 402.00	-4.75	30.00	34.75
MIDDLE	2 440.00	-4.90	30.00	34.90
HIGH	2 480.00	-4.60	30.00	34.60

Remark. Margin = Limit – Measured Value (=Receiver Reading + Cable Loss)

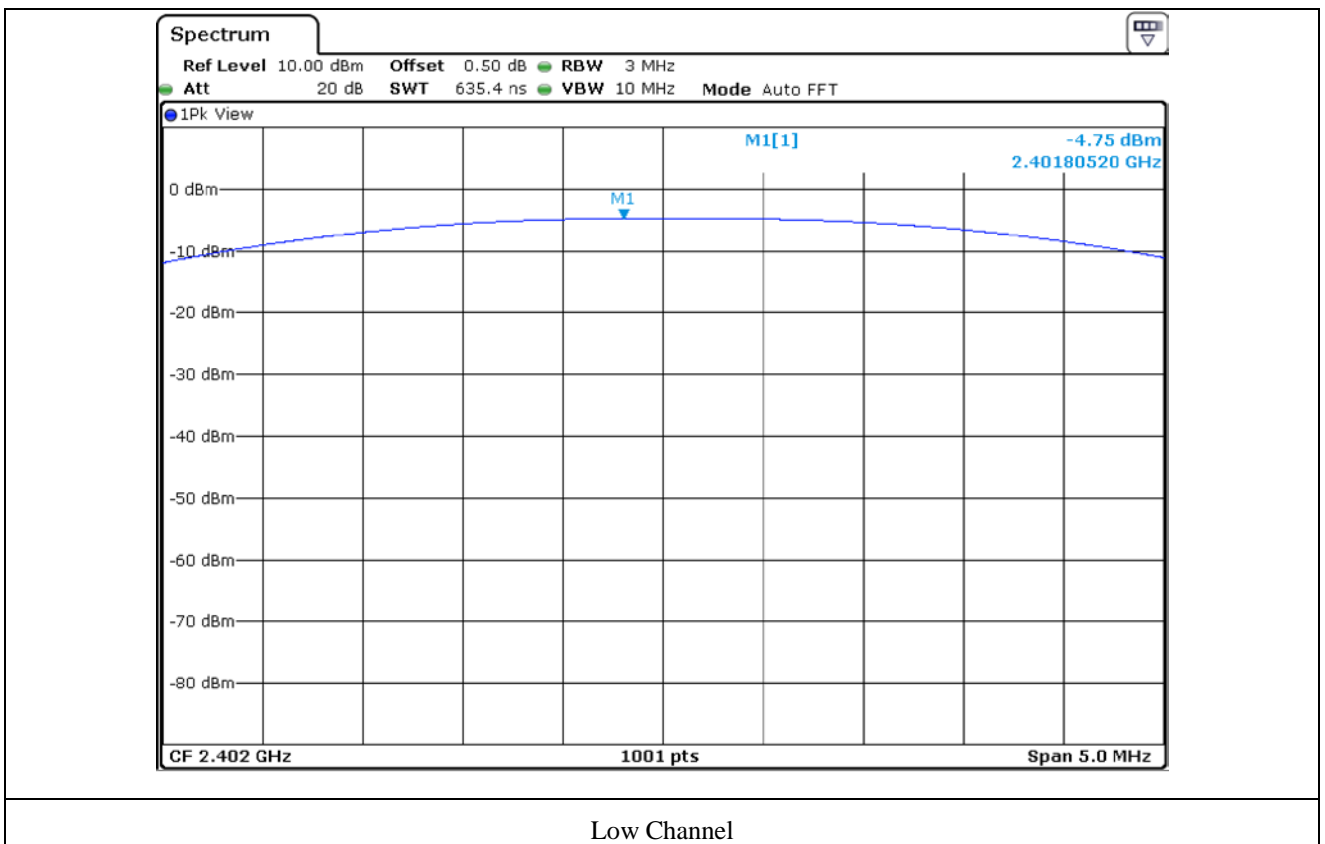

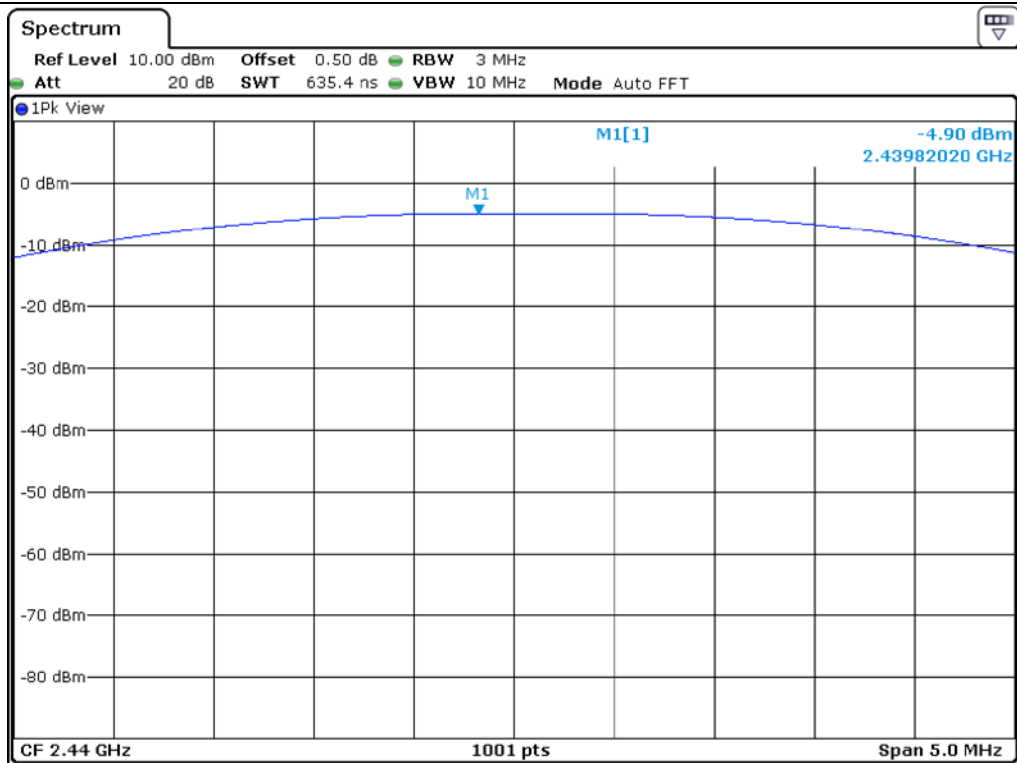

Middle Channel

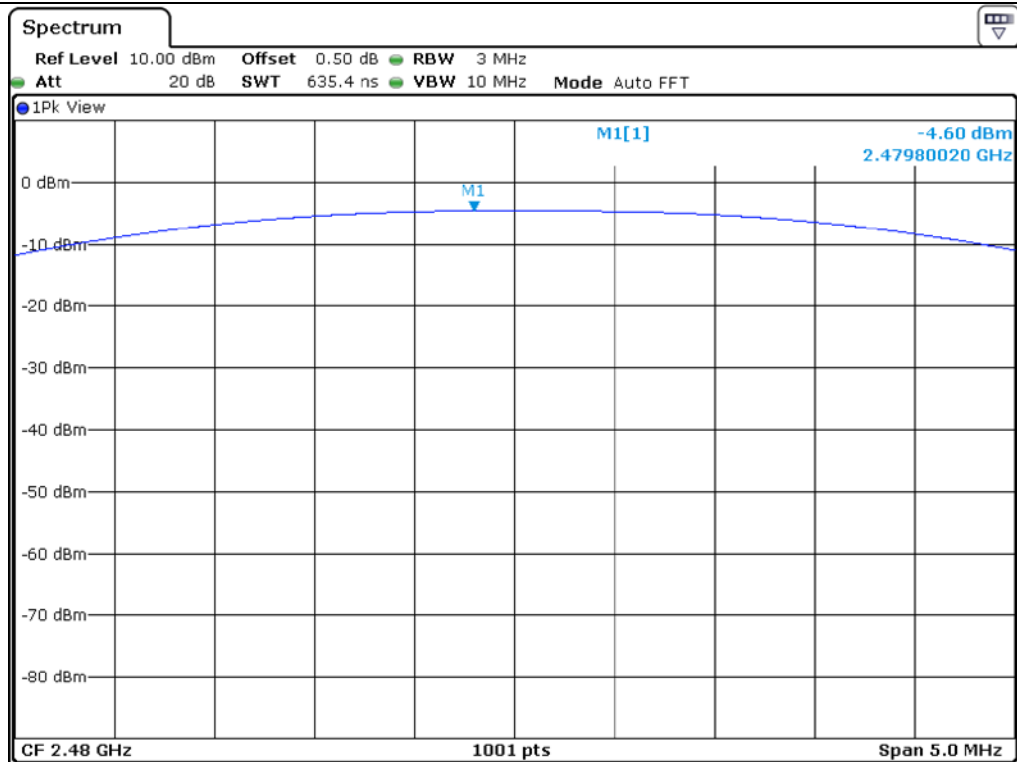

High Channel


9. 100 kHz BANDWIDTH OUTSIDE THE FREQUENCY BAND

9.1 Operating environment

Temperature : 23 °C
 Relative humidity : 45 % R.H.

9.2 Test set-up for conducted measurement

The antenna output of the EUT was connected to the spectrum analyzer. The resolution bandwidth is set to 100 kHz, the video bandwidth is set to 3 times the resolution bandwidth and peak detection was used.

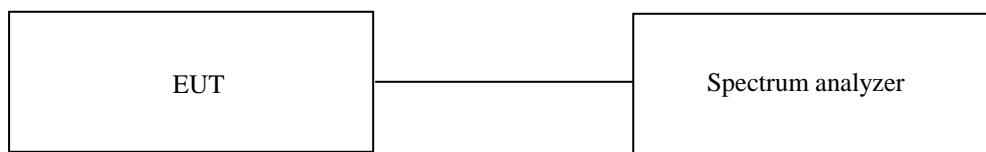

9.3 Test set-up for radiated measurement

The radiated emissions measurements were performed on the 3 m semi anechoic chamber. The EUT was placed on turntable approximately 1.5 m above the ground plane.


The frequency spectrum from 30 MHz to 26.5 GHz was scanned and maximum emission levels at each frequency recorded. The system was rotated 360°, and the antenna was varied in the height between 1.0 m and 4.0 m in order to determine the maximum emission levels. This procedure was performed for horizontal and vertical polarization of the receiving antenna.

9.4 Test Date


April 19, 2021 ~ April 26, 2021

9.5 Test data for conducted emission


9.5.1 Test data for 1 Mbps

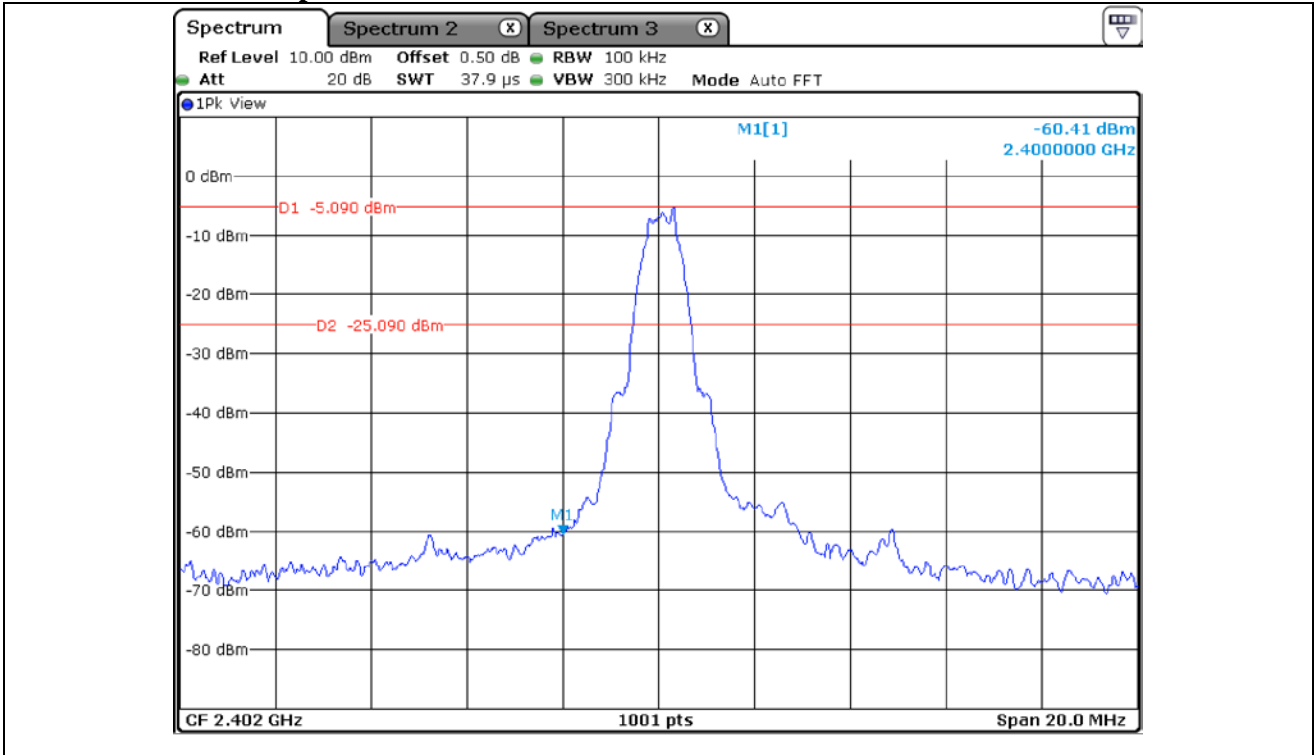


Low Channel

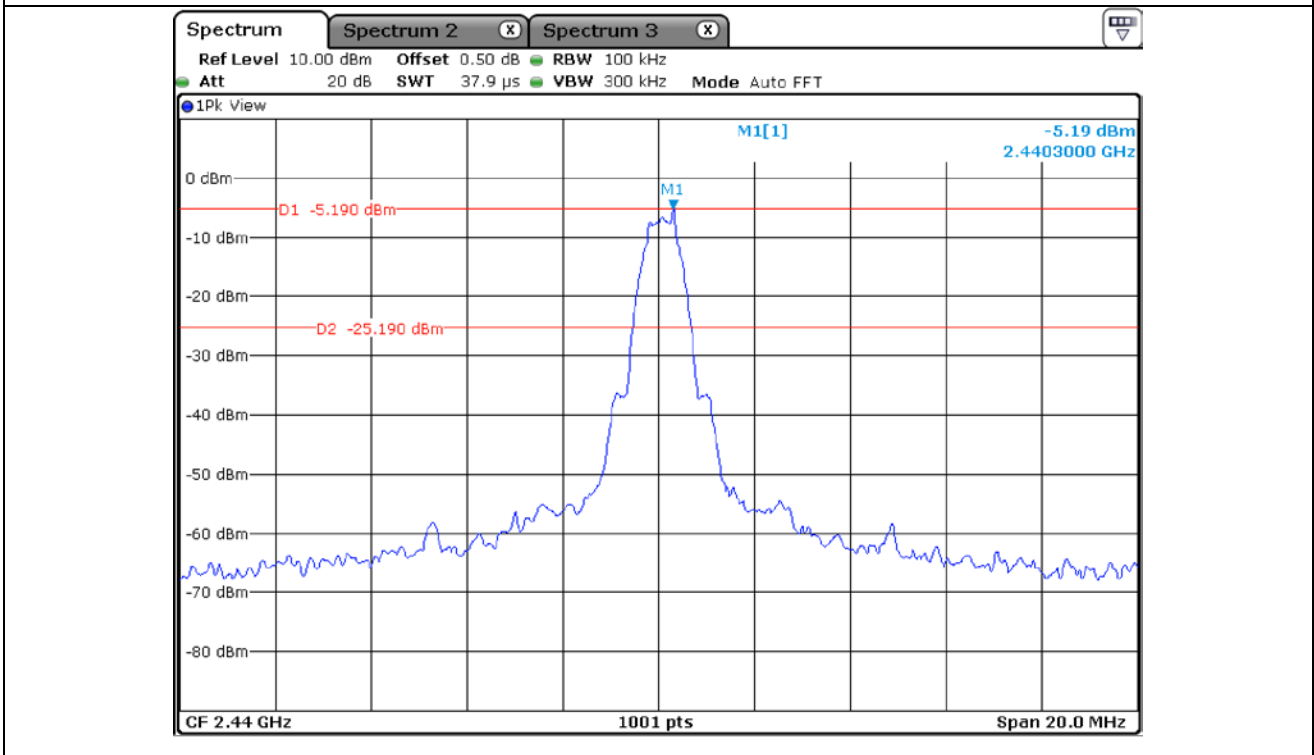


Middle Channel

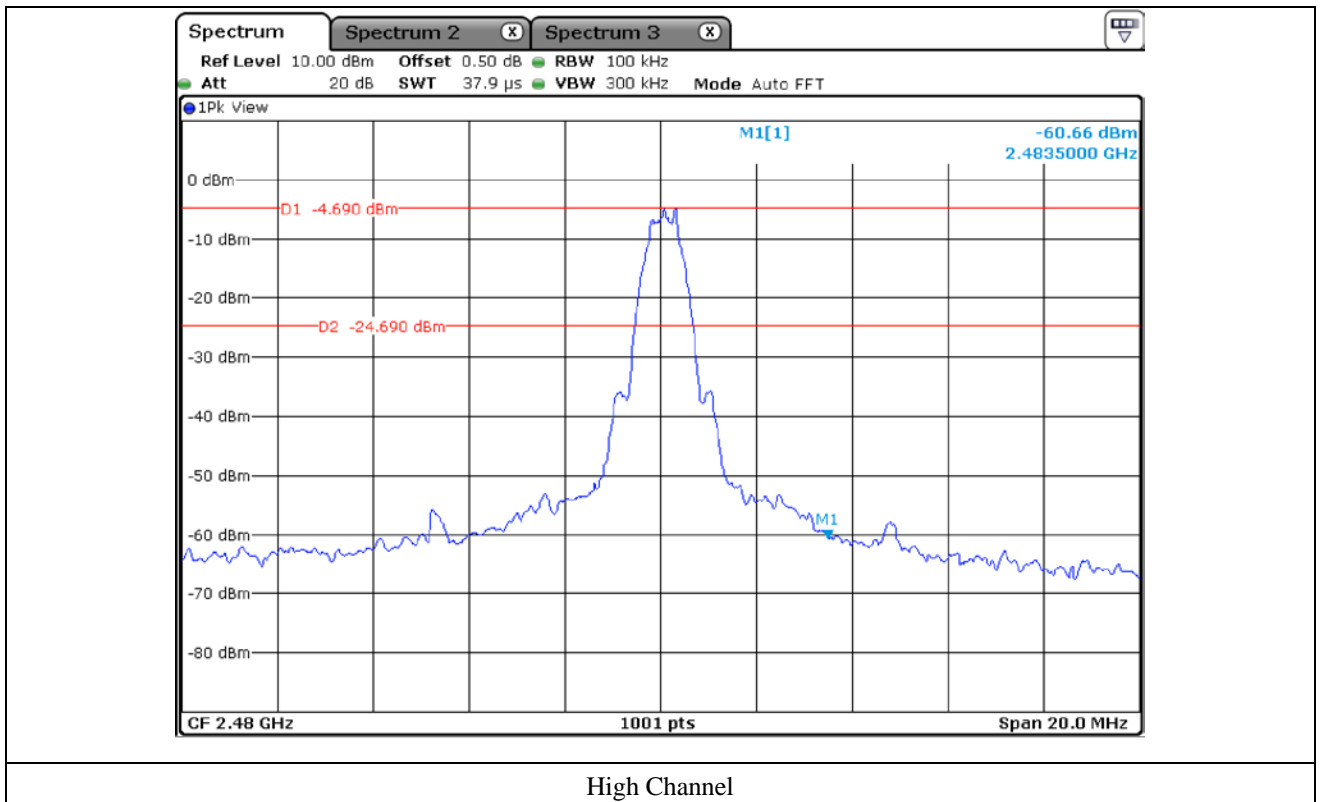


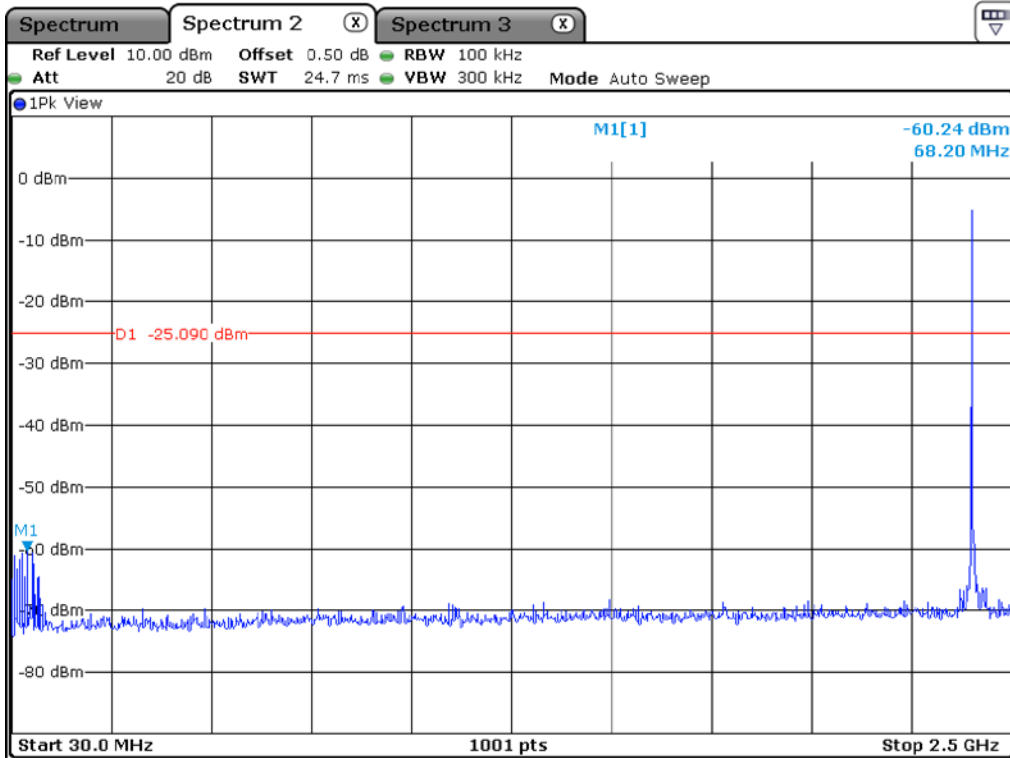


Low Channel

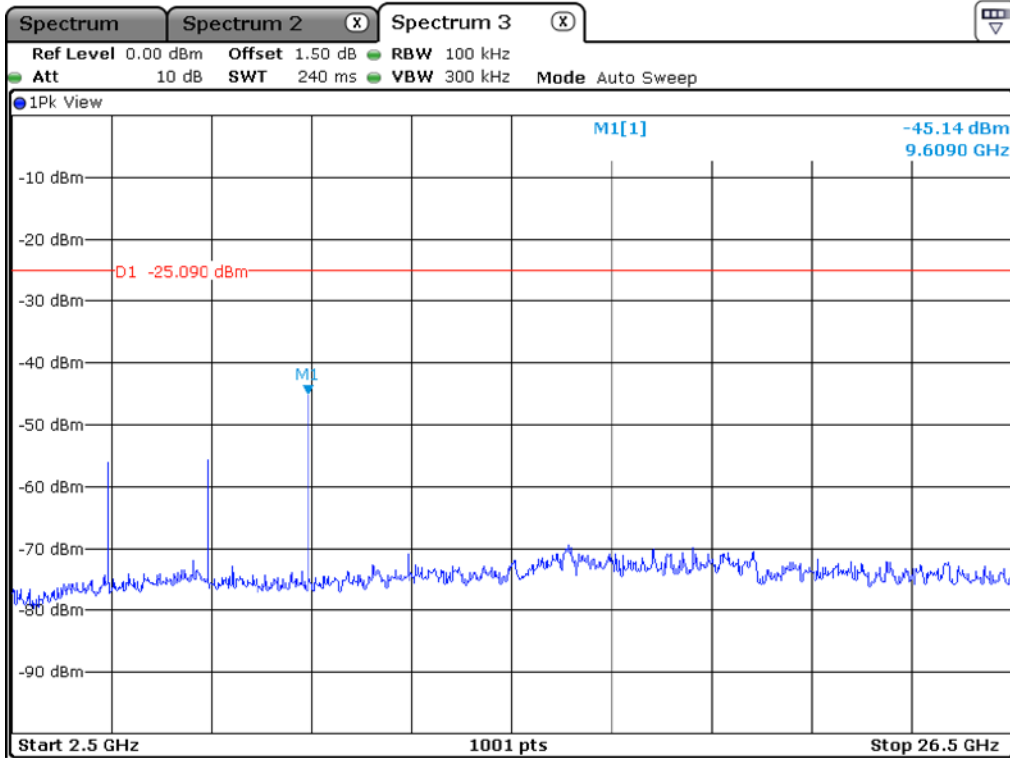


Low Channel

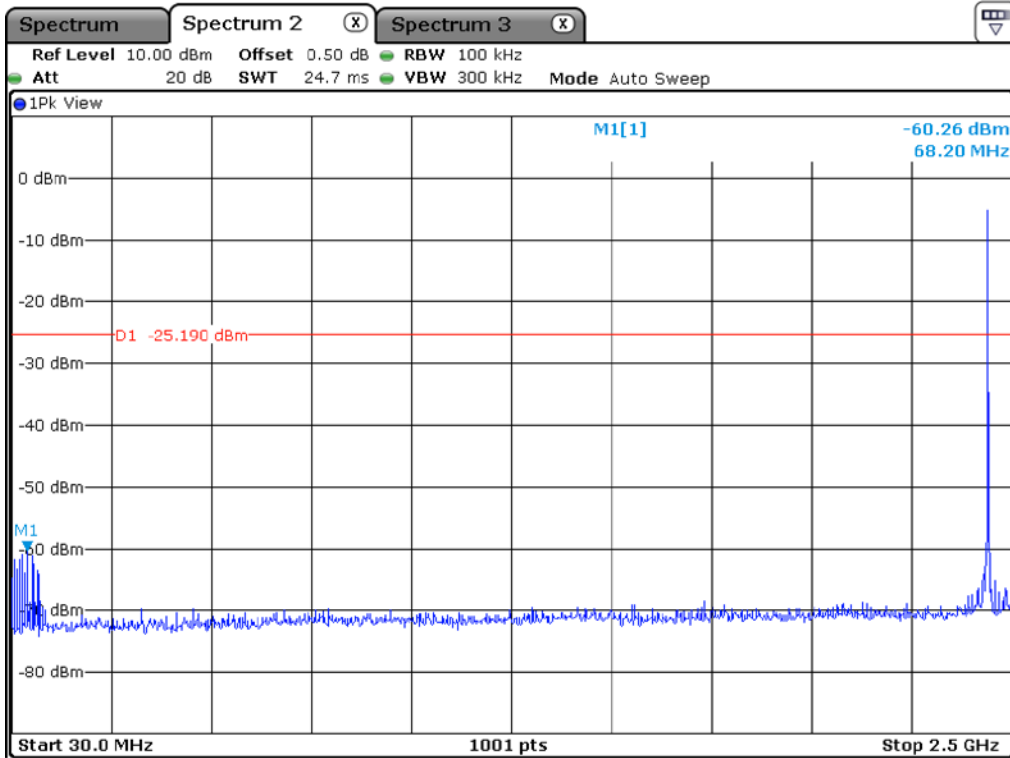


Middle Channel

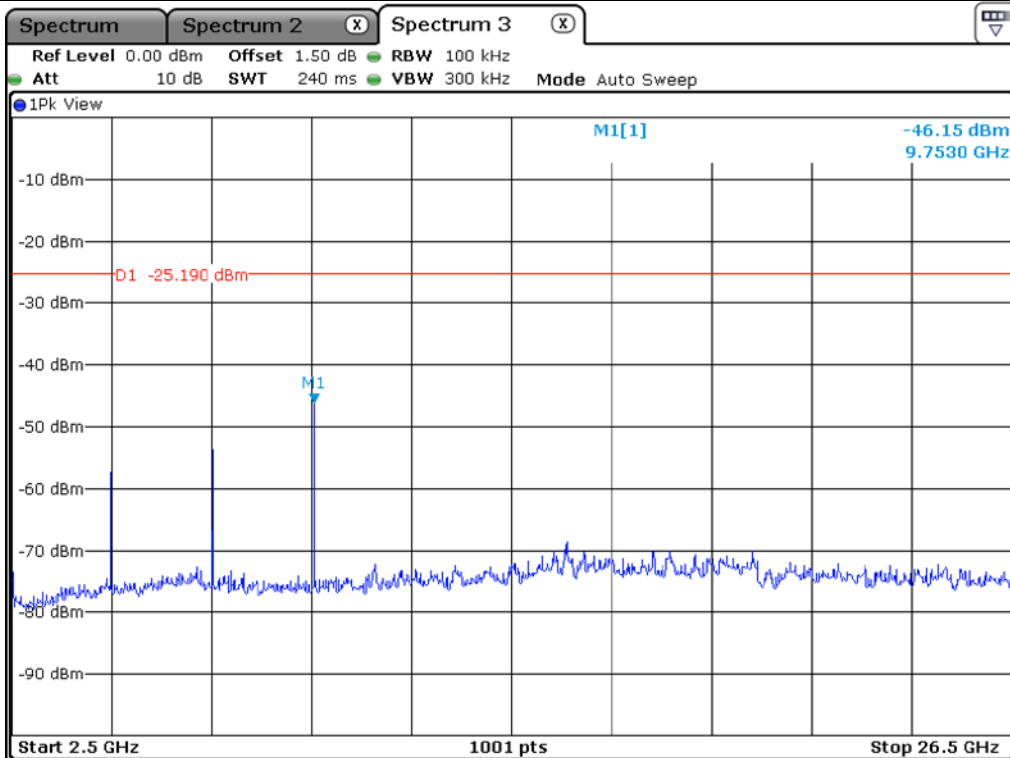

Middle Channel

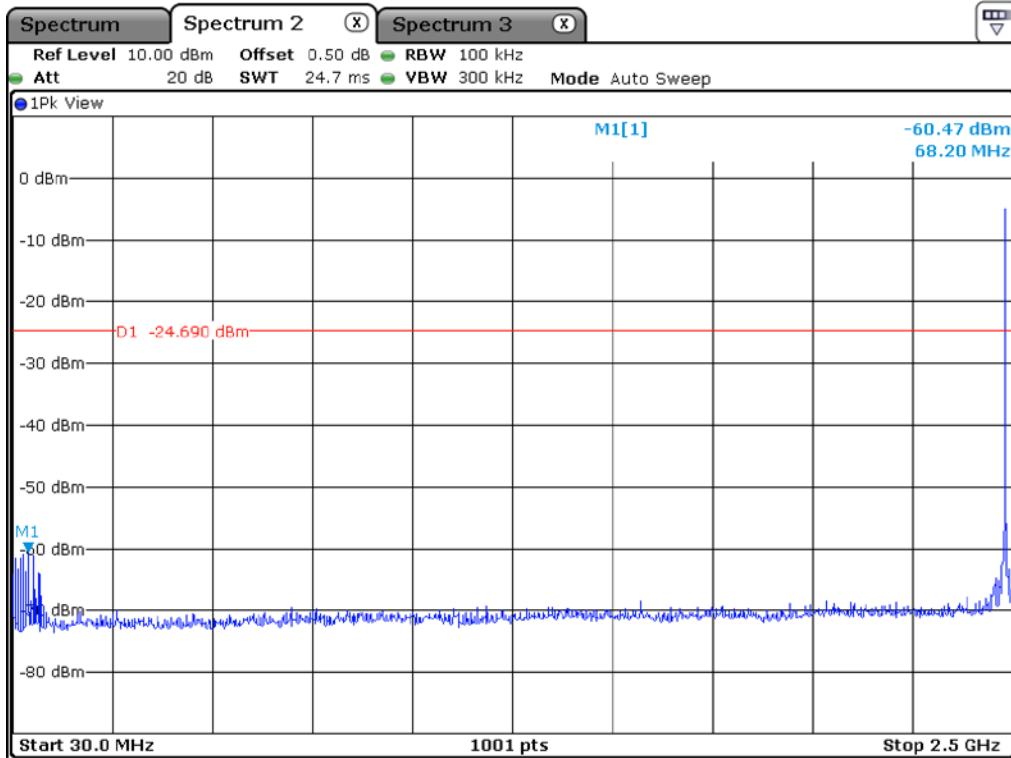

High Channel

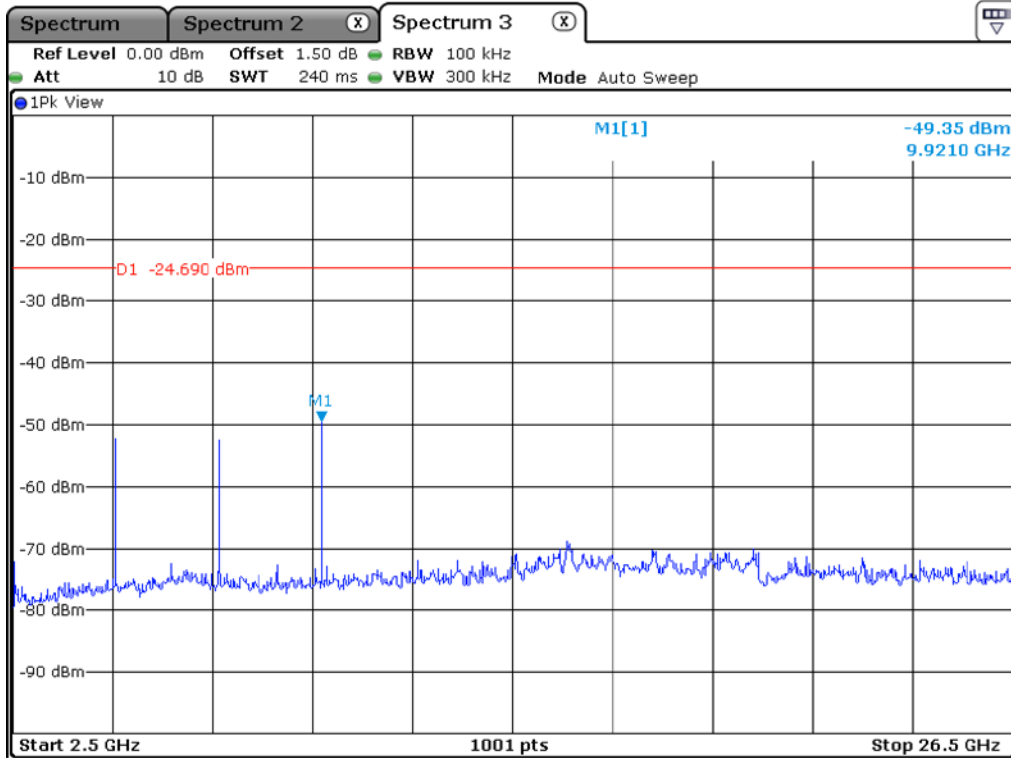

High Channel

9.6 Test data for radiated emission

9.6.1 Radiated Emission which fall in the Restricted Band

- Resolution bandwidth : 1 MHz and Peak Detector for Peak Mode
1 MHz and RMS Detector for Average Mode
- Video bandwidth : 3 MHz for Peak and Average Mode
- Measurement distance : 3 m
- Duty Cycle : 84.86 %
- Result : PASSED

Frequency (MHz)	Reading (dBμV)	Detector Mode	Ant. Pol. (H/V)	Ant. Factor	Cable Loss	AMP Factor	C.F (dB)	Total (dBμV/m)	Limits (dBμV/m)	Margin (dB)
Test Data for Low Channel										
2 333.776	48.84	Peak	H	28.30	8.20	45.30	-	40.04	74.00	33.96
2 323.866	38.15	Average	H				0.71	30.06	54.00	23.94
2 387.562	50.21	Peak	V				-	41.41	74.00	32.59
2 323.866	41.55	Average	V				0.71	33.46	54.00	20.54
Test Data for High Channel										
2 483.508	57.21	Peak	H	28.70	8.35	45.50	-	48.76	74.00	25.24
2 484.382	50.32	Average	H				0.71	42.58	54.00	11.42
2 483.508	60.42	Peak	V				-	51.97	74.00	22.03
2 484.365	52.10	Average	V				0.71	44.36	54.00	9.64

Tabulated test data for Restricted Band

Remark: “H”: Horizontal, “V”: Vertical

$$\text{Margin (dB)} = \text{Limits (dB}\mu\text{V/m)} - \text{Total Level (dB}\mu\text{V/m)}$$

$$\text{Total Level} = \text{Reading} + \text{Antenna Factor} + \text{Cable Loss} + \text{Correction Factor} - \text{AMP Factor}$$

9.6.2 Spurious & Harmonic Radiated Emission

- Resolution bandwidth : 1 MHz for Peak and Average Mode for the emissions fall in restricted band,
1 MHz for Peak Mode for the emissions outside restricted band
- Video bandwidth : 3 MHz for Peak and Average Mode
- Frequency range : 1 GHz ~ 26.5 GHz
- Measurement distance : 3 m
- Duty Cycle : 84.86 %
- Result : PASSED

Frequency (MHz)	Reading (dBμV)	Detector Mode	Ant. Pol. (H/V)	Ant. Factor	Cable Loss	AMP Factor	C.F (dB)	Total (dBμV/m)	Limits (dBμV/m)	Margin (dB)
Test Data for Low Channel										
4 804.00	51.28	Peak	H	33.40	11.21	46.30	-	49.59	74.00	24.41
	43.88	Average	H				0.71	42.90	54.00	11.10
	51.99	Peak	V				-	50.30	74.00	23.70
	43.70	Average	V				0.71	42.72	54.00	11.28
Test Data for Middle Channel										
4 880.00	51.37	Peak	H	33.50	11.23	46.33	-	49.77	74.00	24.23
	43.51	Average	H				0.71	42.62	54.00	11.38
	50.70	Peak	V				-	49.10	74.00	24.90
	42.76	Average	V				0.71	41.87	54.00	12.13
Test Data for High Channel										
4 960.00	51.80	Peak	H	33.40	11.31	46.35	-	50.16	74.00	23.84
	42.63	Average	H				0.71	41.70	54.00	12.30
	51.56	Peak	V				-	49.92	74.00	24.08
	43.23	Average	V				0.71	42.30	54.00	11.70

Remark: "H": Horizontal, "V": Vertical

$$\text{Margin (dB)} = \text{Limits (dB}\mu\text{V/m)} - \text{Total Level (dB}\mu\text{V/m)}$$

$$\text{Total Level} = \text{Reading} + \text{Antenna Factor} + \text{Cable Loss} + \text{Correction Factor} - \text{AMP Factor}$$

10. PEAK POWER SPECTRAL DENSITY


10.1 Operating environment

Temperature : 23 °C
Relative humidity : 45 % R.H.

10.2 Test set-up

The antenna output of the EUT was connected to the spectrum analyzer.

The resolution bandwidth is set to $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$, the video bandwidth is set to 3 times the resolution bandwidth.

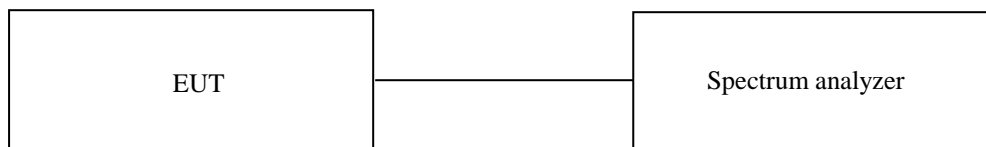

10.3 Test Date

April 19, 2021 ~ April 26, 2021


10.4 Test data for 1 Mbps

-. Test Result : Pass


-. Operating Condition : Continuous transmitting mode

CHANNEL	FREQUENCY(MHz)	MEASURED VALUE (dBm)	LIMIT (dBm)	MARGIN (dB)
Low	2 402.00	-21.23	8.00	29.23
Middle	2 440.00	-20.97	8.00	28.97
High	2 480.00	-21.06	8.00	29.06


Remark. Margin = Limit – Measured value

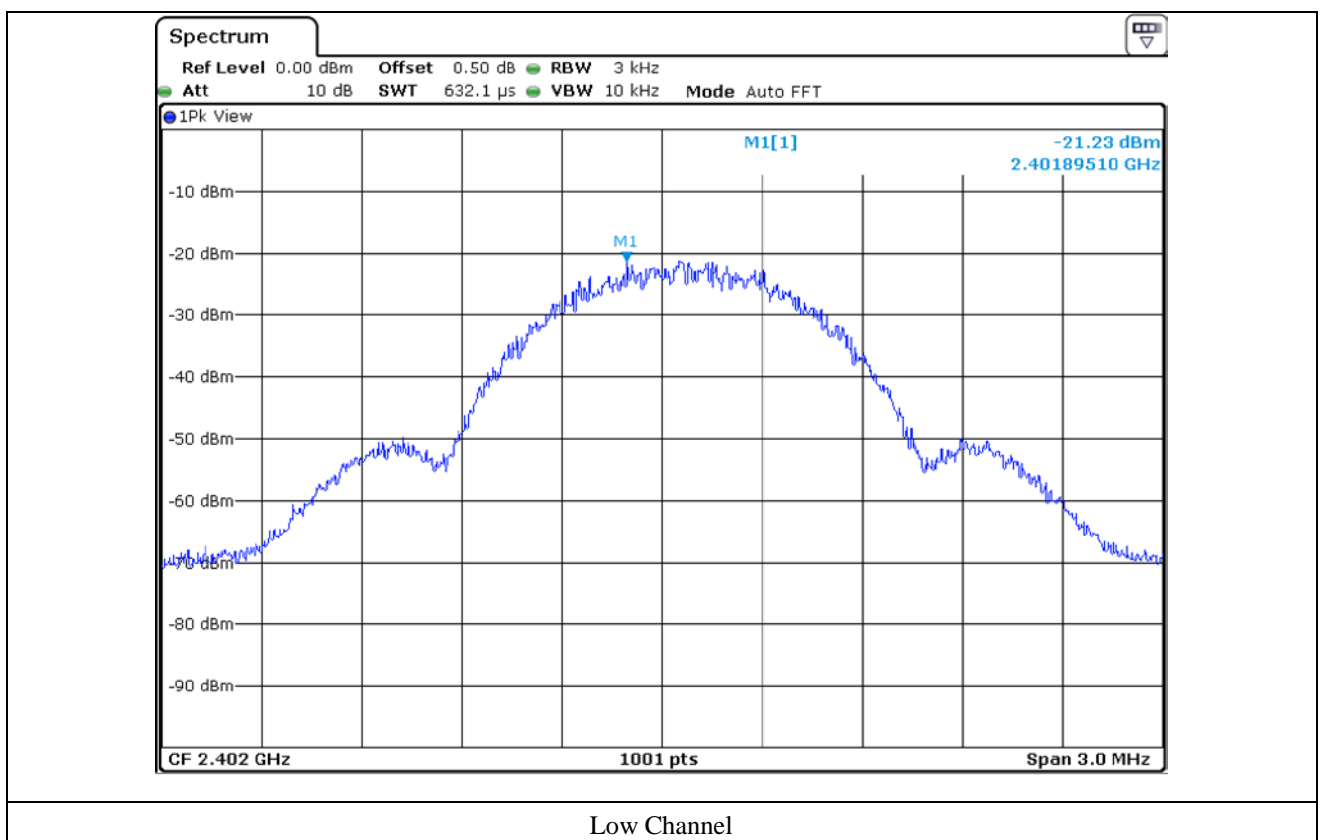

Low Channel

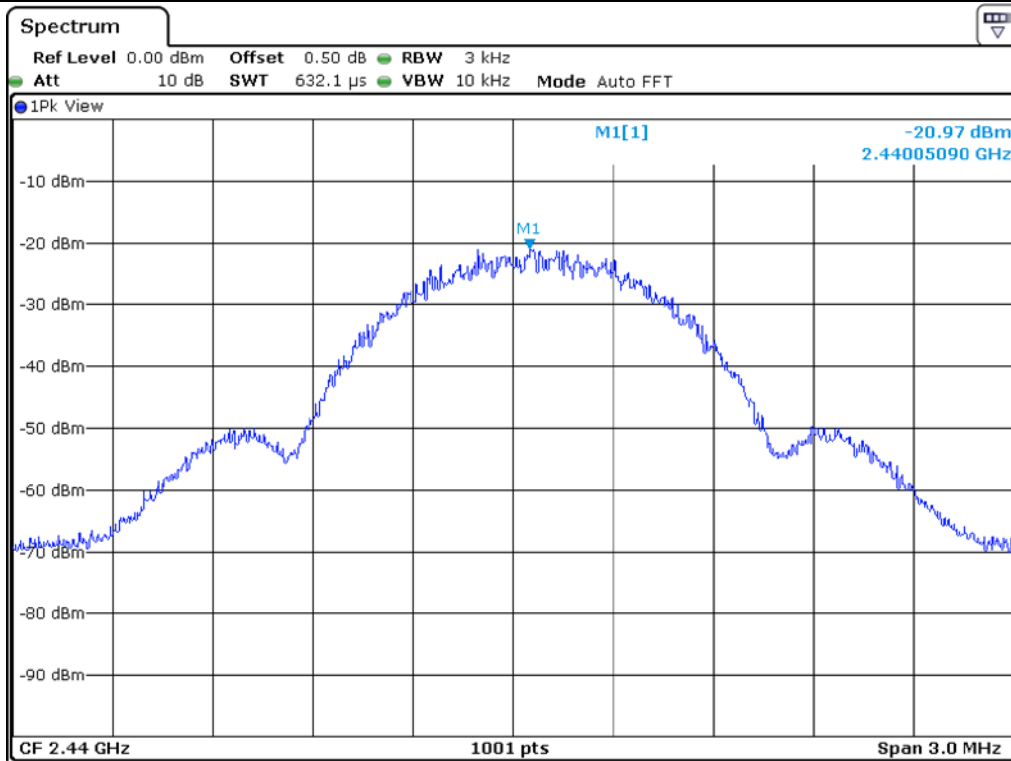

Middle Channel

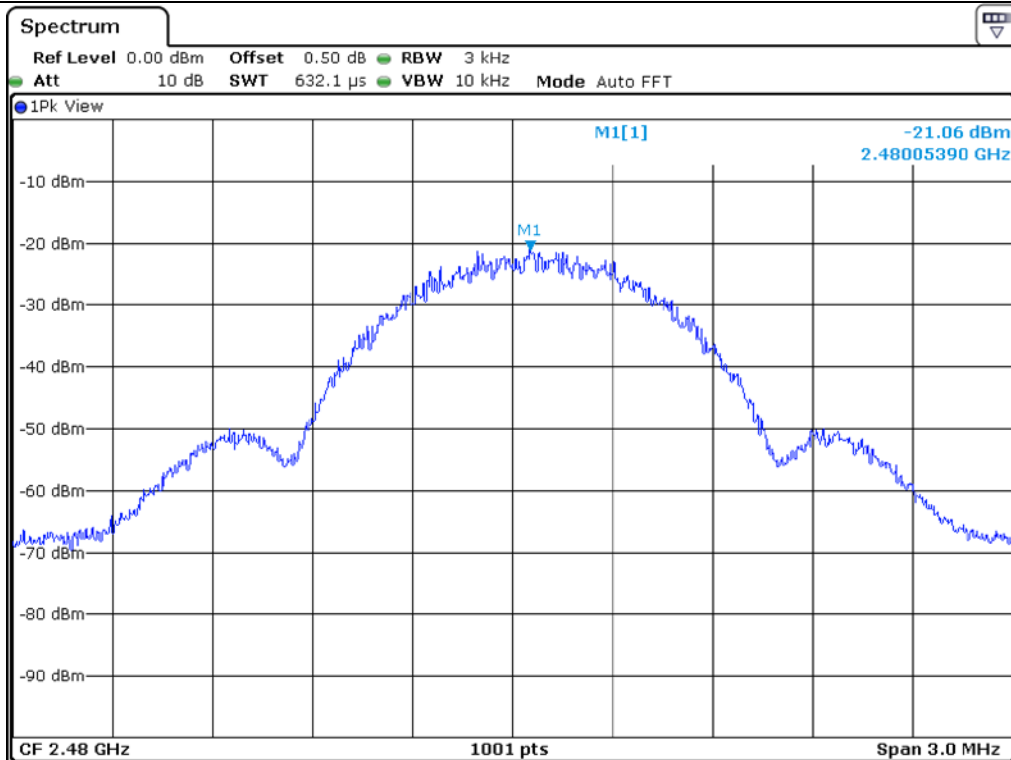

High Channel

11. RADIATED EMISSION TEST

11.1 Operating environment

Temperature : 23 °C
 Relative humidity : 45 % R.H.


11.2 Test set-up

The radiated emissions measurements were on the 3 m semi anechoic chamber. The EUT and other support equipment were placed on a non-conductive turntable above the ground plane. The interconnecting cables from outside test site were inserted into ferrite clamps at the point where the cables reach the turntable.


The frequency spectrum from 30 MHz to 26.5 GHz was scanned and emission levels maximized at each frequency recorded. The system was rotated 360°, and the antenna was varied in height between 1.0 m and 4.0 m in order to determine the maximum emission levels. This procedure was performed for both horizontal and vertical polarization of the receiving antenna.

- Test Configuration


1. Below 30 MHz

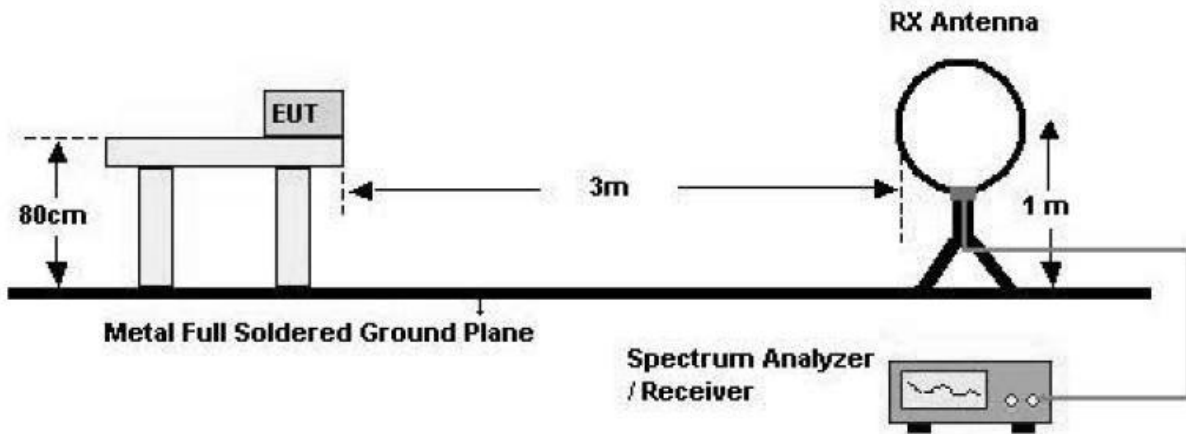

2. 30 MHz - 1 GHz

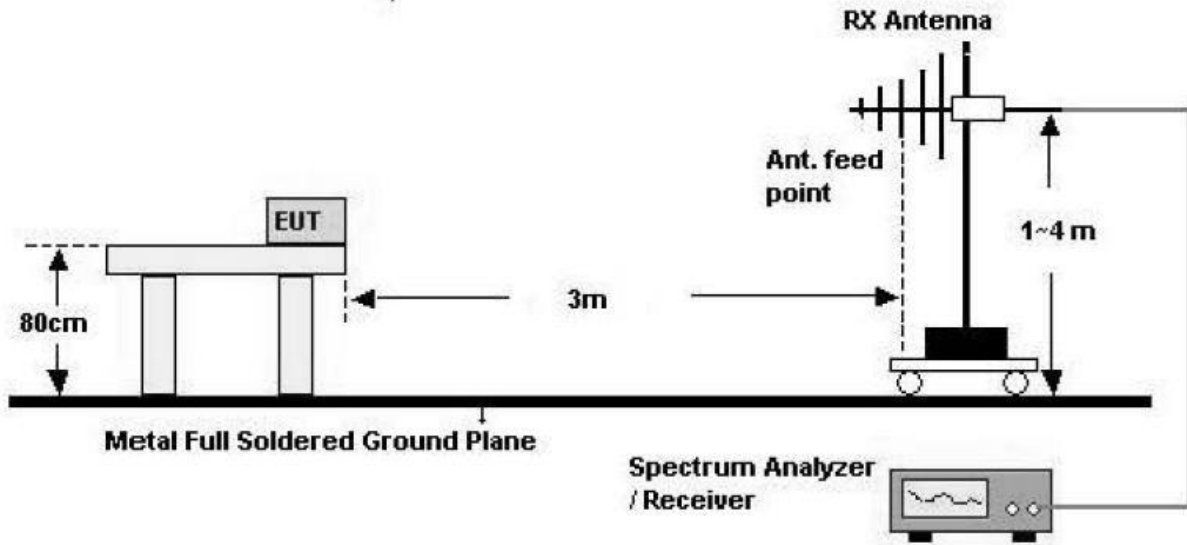

3. Above 1 GHz

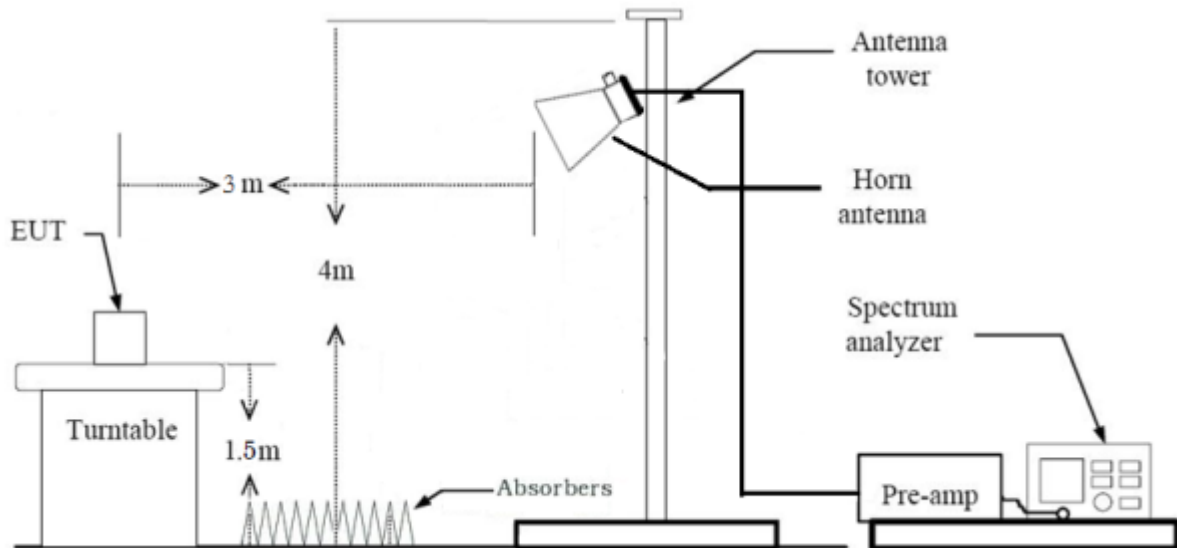

11.3 Test Date

April 19, 2021 ~ April 26, 2021

11.4 Test data for 30 MHz ~ 1 GHz


11.4.1 Test data for Bluetooth LE

Limits apply to : FCC CFR 47, PART 15, SUBPART C, SECTION 15.247

Result : PASSED

EUT : Body Composition Analyzer

Detector : CISPR Quasi-Peak (6 dB Bandwidth: 120 kHz)

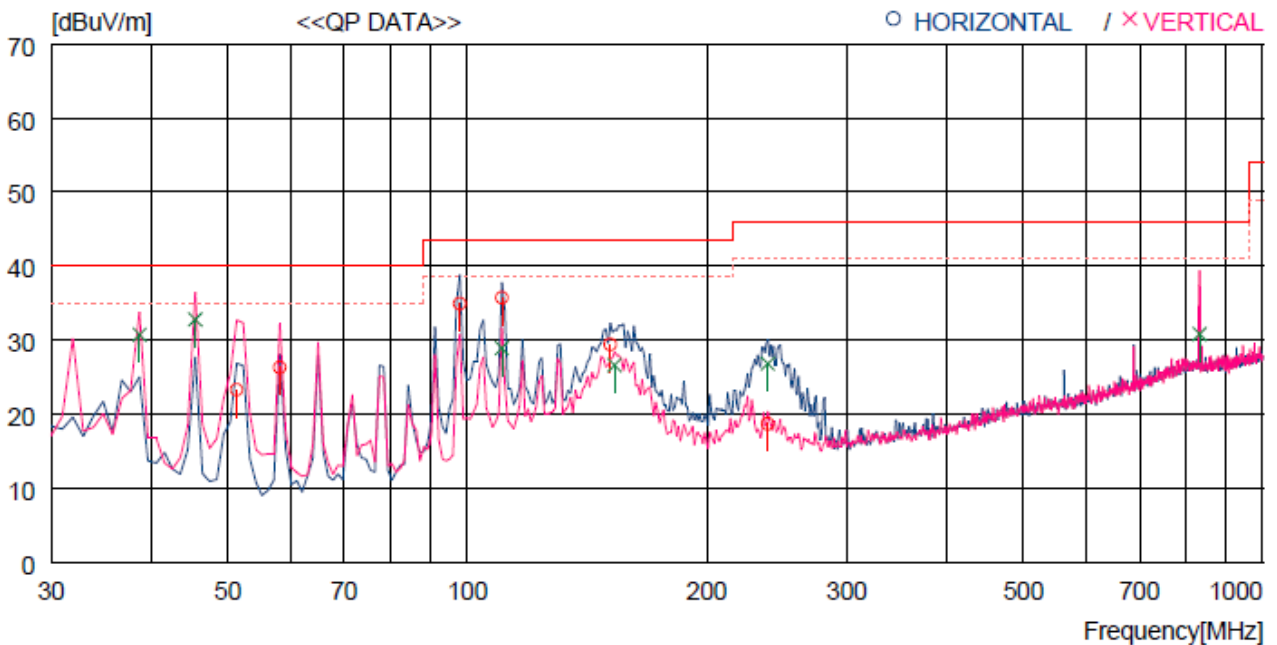

No.	FREQ [MHz]	READING QP [dBuV]	ANT FACTOR [dB]	LOSS [dB]	GAIN [dB]	RESULT [dBuV/m]	LIMIT [dBuV/m]	MARGIN [dB]	ANTENNA [cm]	TABLE [DEG]
---- Horizontal ----										
1	51.340	41.6	13.0	0.8	32.1	23.3	40.0	16.7	400	41
2	58.130	45.3	12.3	0.8	32.1	26.3	40.0	13.7	300	155
3	97.900	50.9	14.9	1.1	32.0	34.9	43.5	8.6	300	0
4	110.510	49.5	17.0	1.2	32.0	35.7	43.5	7.8	300	120
5	151.250	41.4	18.6	1.4	32.0	29.4	43.5	14.1	300	81
6	238.550	31.5	17.3	1.9	32.0	18.7	46.0	27.3	200	359
---- Vertical ----										
7	38.730	44.2	17.8	0.7	32.0	30.7	40.0	9.3	100	359
8	45.520	49.2	15.0	0.7	32.1	32.8	40.0	7.2	100	359
9	110.510	42.7	17.0	1.2	32.0	28.9	43.5	14.6	100	359
10	153.190	38.8	18.4	1.4	32.0	26.6	43.5	16.9	300	359
11	238.550	39.6	17.3	1.9	32.0	26.8	46.0	19.2	300	359
12	832.181	31.4	27.2	4.1	31.9	30.8	46.0	15.2	200	0

11.5 Test data for Below 30 MHz

- Resolution bandwidth : 200 Hz (from 9 kHz to 0.15 MHz), 9 kHz (from 0.15 MHz to 30 MHz)
- Frequency range : 9 kHz ~ 30 MHz
- Measurement distance : 3 m
- Operating mode : Transmitting mode

Frequency (MHz)	Reading (dBμV)	Ant. Pol. (H/V)	Ant. Height (m)	Angle (°)	Ant. Factor (dB/m)	Cable Loss	Emission Level(dBμV/m)	Limits (dBμV/m)	Margin (dB)
Emission from the EUT more than 20 dB below the limit in each frequency range.									

11.6 Test data for above 1 GHz

- Resolution bandwidth : 1 MHz for Peak and Average Mode for the emissions fall in restricted band,
1 MHz for Peak Mode for the emissions outside restricted band
- Video bandwidth : 3 MHz for Peak and Average Mode
- Frequency range : 1 GHz ~ 26.5 GHz
- Measurement distance : 3 m
- Operating mode : Transmitting mode

Frequency (MHz)	Reading (dBμV)	Ant. Pol. (H/V)	Ant. Height (m)	Angle (°)	Ant. Factor (dB/m)	Cable Loss	Emission Level(dBμV/m)	Limits (dBμV/m)	Margin (dB)
Emission from the EUT more than 20 dB below the limit in each frequency range.									

12. LIST OF TEST EQUIPMENT

Model Number	Manufacturer	Description	Serial Number	Last Cal.(Interval)
FSV40-N	Rohde & Schwarz	Signal Analyzer	101457	Apr. 16, 2021 (1Y)
ESR7	Rohde & Schwarz	EMI Test Receiver	102190	Oct. 14, 2020 (1Y)
310N	Sonoma Instrument	AMPLIFIER	392756	Oct. 16, 2020 (1Y)
PAM-840A	Com-Power	Pre-Amplifer	461339	Oct. 16, 2020 (1Y)
PAM-118A	Com-Power	Pre-Amplifer	18040081	Oct. 12, 2020 (1Y)
DT2000-2t	Innco Systems GmbH	Turn Table	N/A	N/A
CO3000	Innco Systems GmbH	Controller	1026/40960617/P	N/A
MA-4640-XPET	Innco Systems GmbH	Antenna Master	MA4640/652/43100318/P	N/A
HLP-2008	TDK RF Solutions	Hybrid Antenna	131316	Feb. 27, 2020 (2Y)
BBHA9170	Schwarzbeck	Horn Antenna	BBHA9170178	Jan. 07, 2021(1Y)
AH-118	Com-Power	Horn Antenna	10050061	Oct. 15, 2020 (1Y)
FMZB 1513	Schwarzbeck	Loop Antenna	1513-235	Mar. 24, 2020(2Y)
HPF 3GHz	Rohde & Schwarz	High Pass Filter (1-3 GHz)	N/A	Feb. 08, 2021 (1Y)
GP-4303D	LG Precision Co.,Ltd	DC POWER SUPPLY	5071069	Jan. 06, 2021 (1Y)