


Inter-Modulation Test for ADC Inc
Digivance CXD
Model Number DGVF-05000000XXCRN


The inter-modulation products test was performed for the EUT. Three tests were performed with the modulation type. Test 1 was with 2 signals input to the EUT at lower end channels. Test 2 was with 2 signals input to the EUT at upper end channels. Test 3 was with 2 signals, one at a lower end channel and one at a higher end channel. The modulation type tested was GSM, CDMA, and CDMA2000. An investigation was made from 30 MHz to the 10th Harmonic of the highest fundamental frequency (~20 GHz). The following plots show the results.

Results:
(See Plots)

Center: 1967.5 MHz
Span: 25 MHz
RBW/VBW: 30 kHz

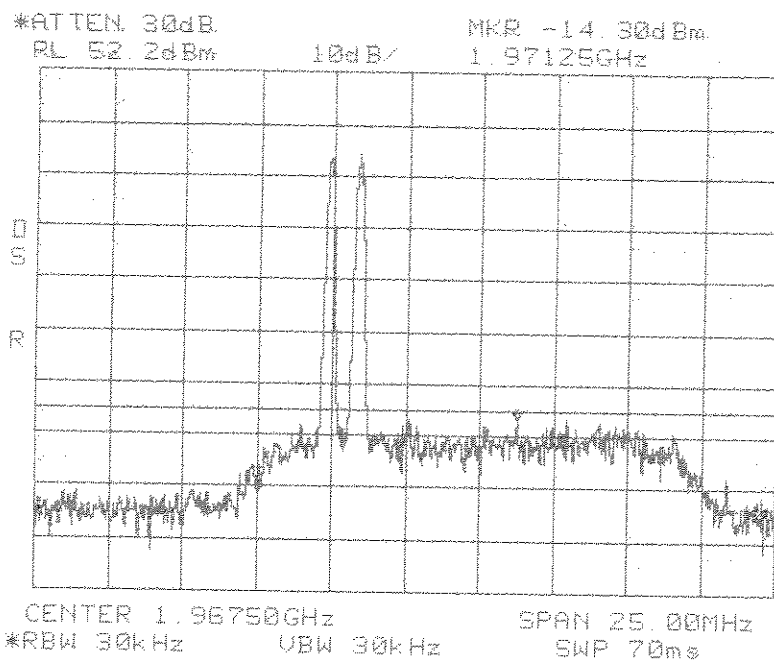


**Intermodulation
Close
Lower
GSM
PCS 1900 MHz
E Band**

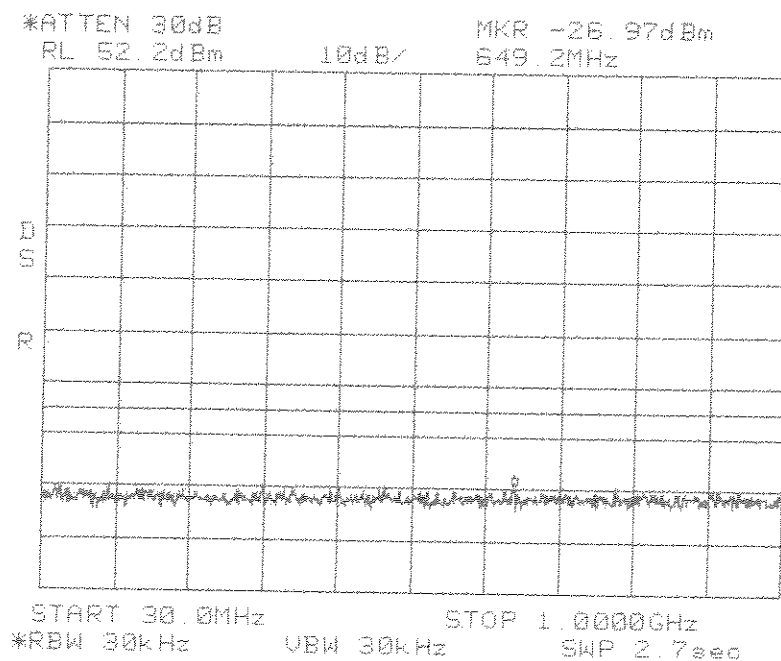

**Intermodulation
Close
Lower
GSM
PCS 1900 MHz
E Band**


Span: 30 MHz to 1 GHz
RBW/VBW: 30 kHz

Span: 1 GHz to 20 GHz
RBW/VBW: 300 kHz

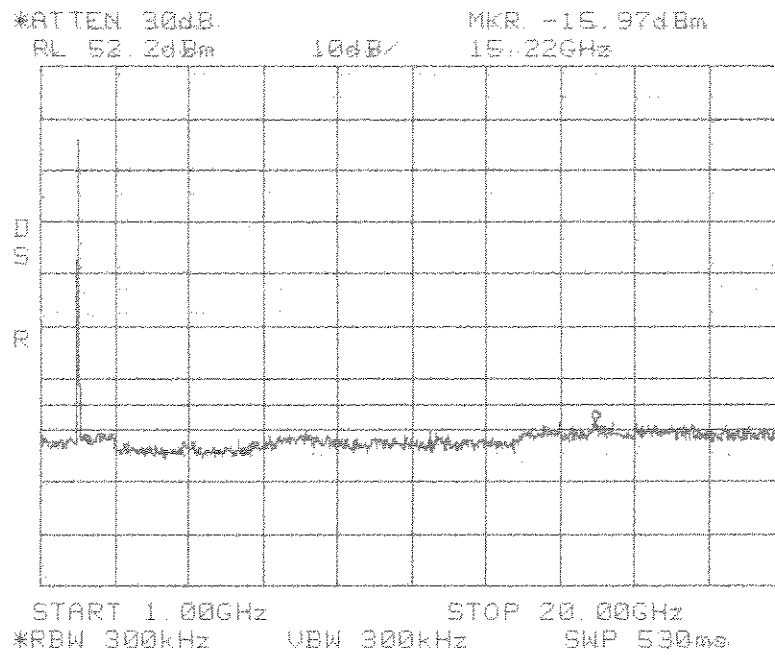


**Intermodulation
Close
Lower
GSM
PCS 1900 MHz
E Band**

Center: 1967.5 MHz
Span: 25 MHz
RBW/VBW: 30 kHz

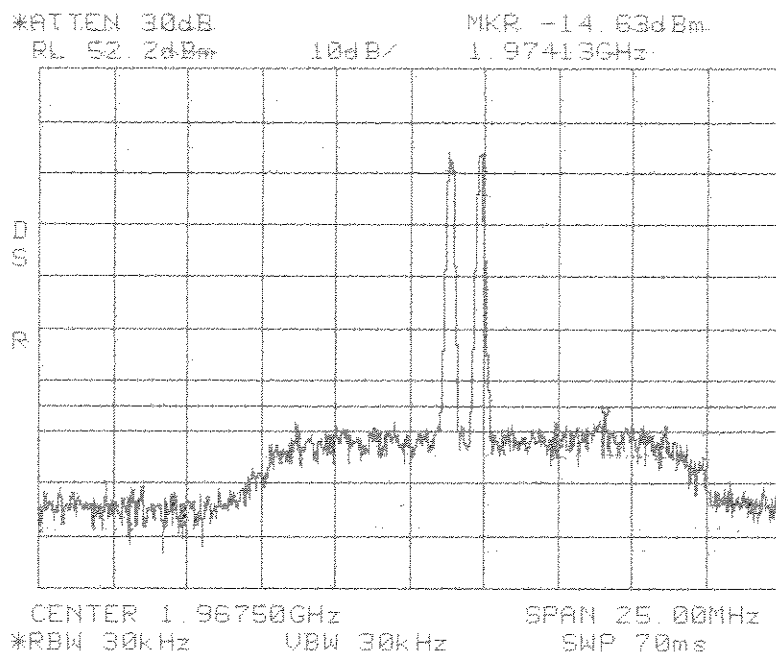


**Intermodulation
Close
Upper
GSM
PCS 1900 MHz
E Band**

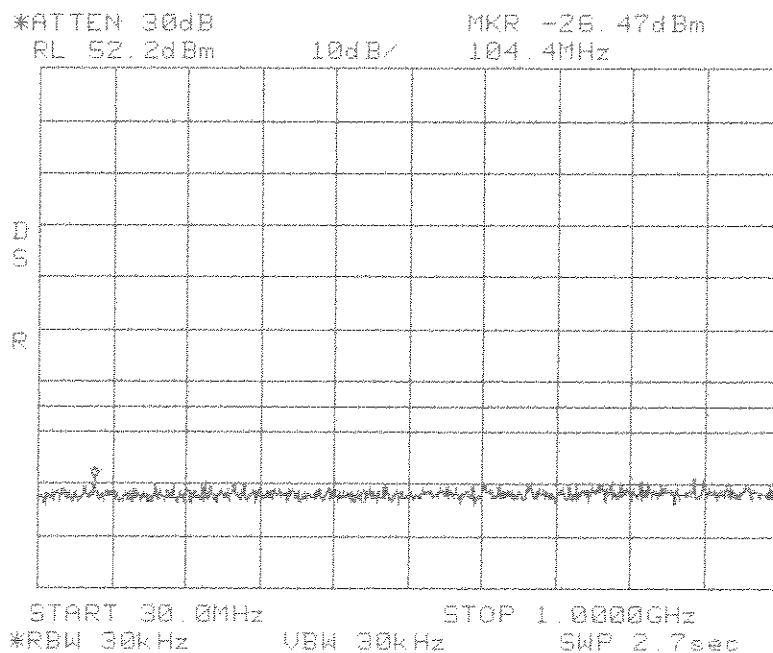

**Intermodulation
Close
Upper
GSM
PCS 1900 MHz
E Band**


Span: 30 MHz to 1 GHz
RBW/VBW: 30 kHz

Span: 1 GHz to 20 GHz
RBW/VBW: 300 kHz

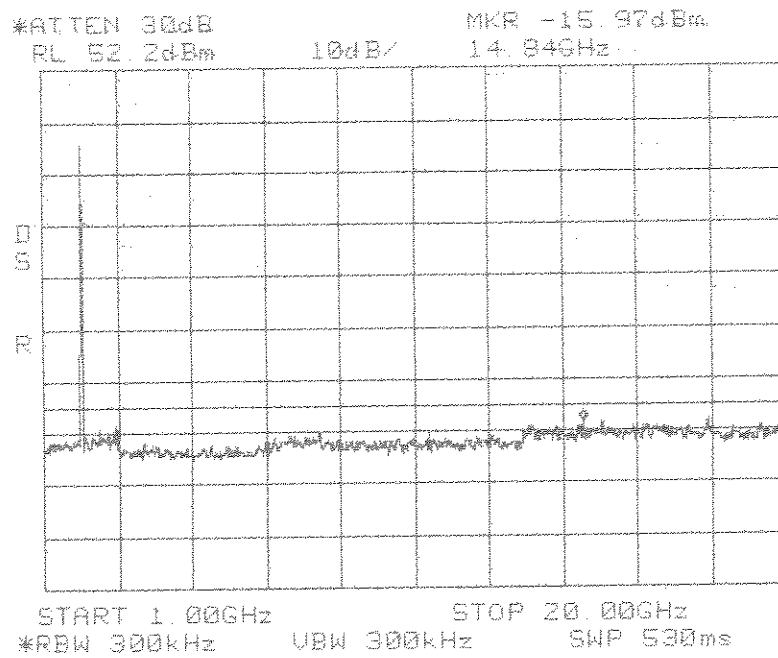


**Intermodulation
Close
Upper
GSM
PCS 1900 MHz
E Band**

Center: 1967.5 MHz
Span: 25 MHz
RBW/VBW: 30 kHz

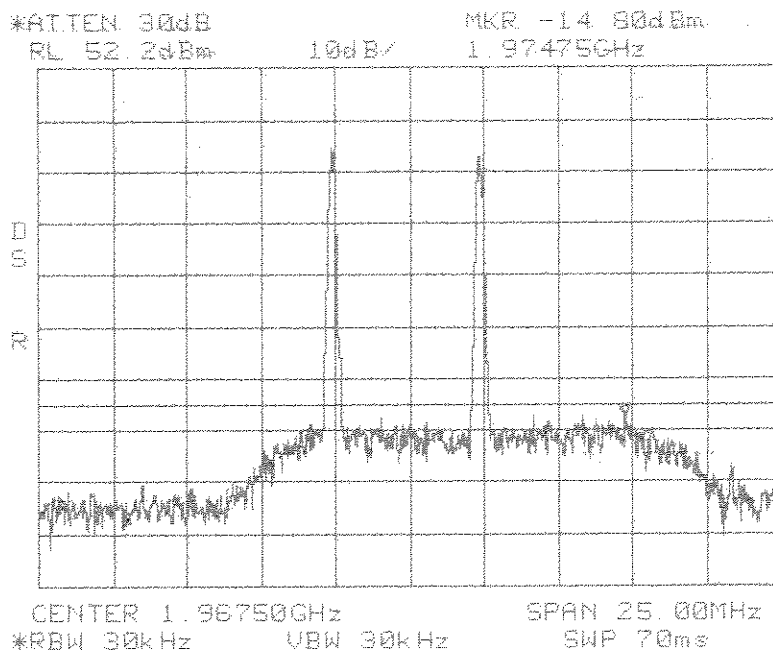


**Intermodulation
Apart
GSM
PCS 1900 MHz
E Band**

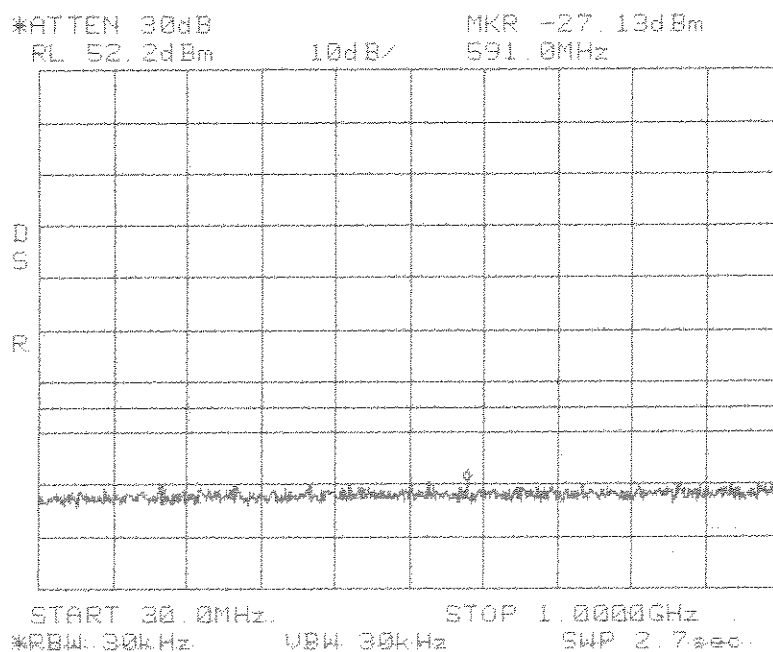

**Intermodulation
Apart
GSM
PCS 1900 MHz
E Band**


Span: 30 MHz to 1 GHz
RBW/VBW: 30 kHz

Span: 1 GHz to 20 GHz
RBW/VBW: 300 kHz

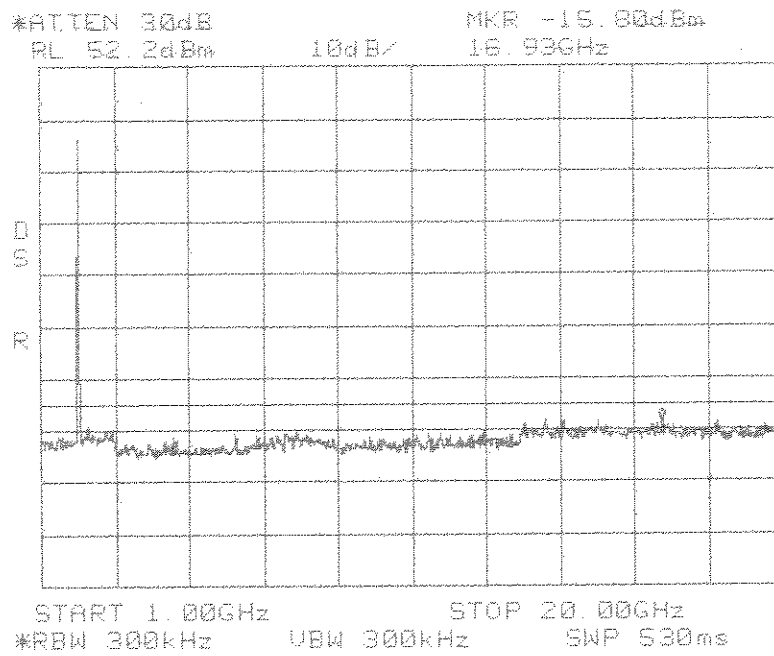


**Intermodulation
Apart
GSM
PCS 1900 MHz
E Band**

Center: 1967.5 MHz
Span: 25 MHz
RBW/VBW: 30 kHz

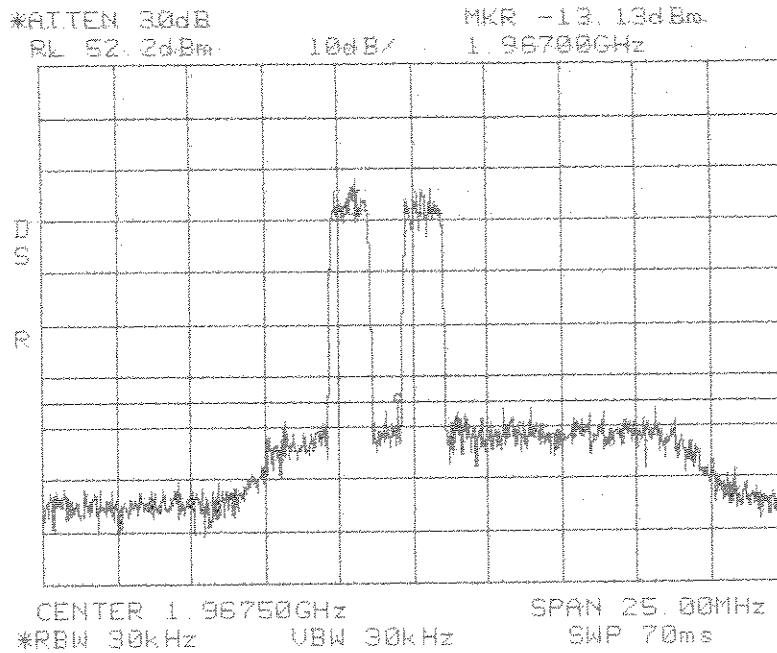


Intermodulation
Close
Lower
CDMA
PCS 1900 MHz
E Band

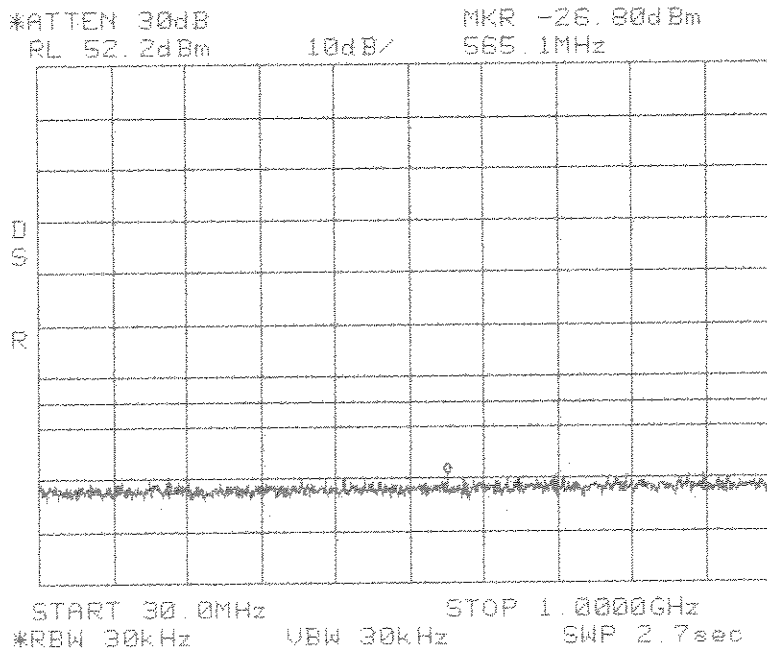

Intermodulation
Close
Lower
CDMA
PCS 1900 MHz
E Band


Span: 30 MHz to 1 GHz
RBW/VBW: 30 kHz

Span: 1 GHz to 20 GHz
RBW/VBW: 300 kHz

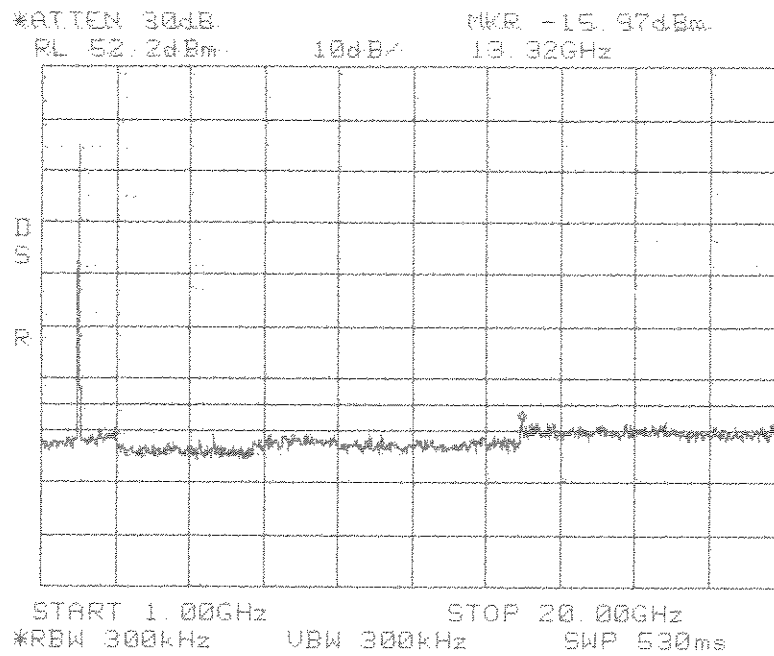


**Intermodulation
Close
Lower
CDMA
PCS 1900 MHz
E Band**

Center: 1967.5 MHz
 Span: 25 MHz
 RBW/VBW: 30 kHz

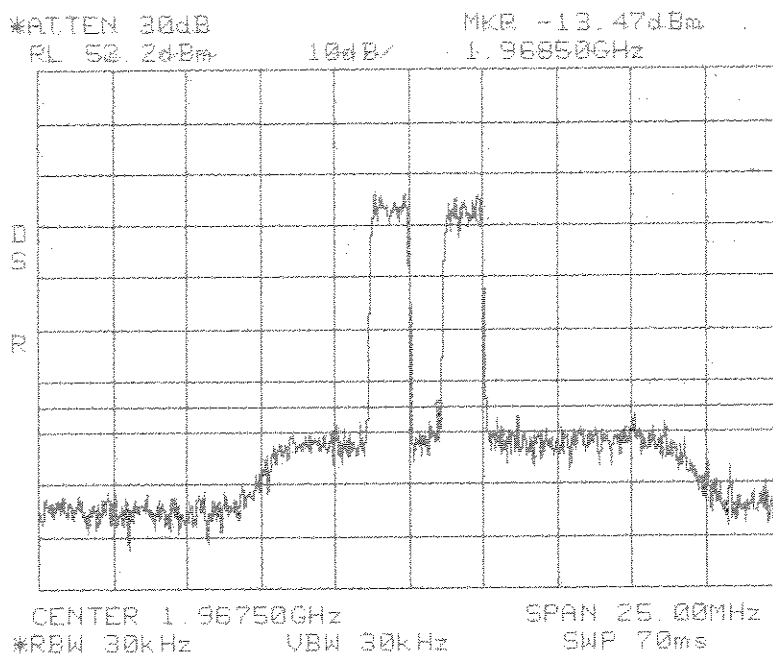


**Intermodulation
 Close
 Upper
 CDMA
 PCS 1900 MHz
 E Band**

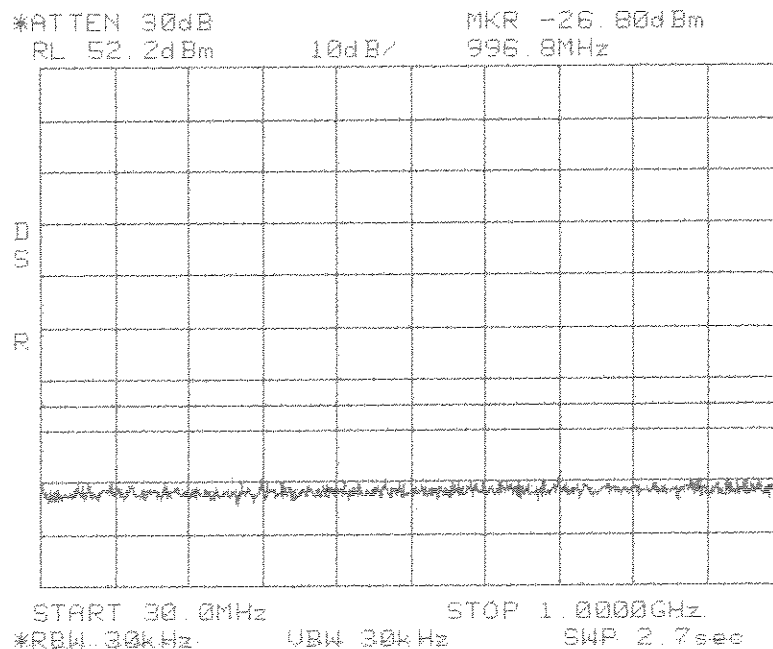

**Intermodulation
 Close
 Upper
 CDMA
 PCS 1900 MHz
 E Band**


Span: 30 MHz to 1 GHz
 RBW/VBW: 30 kHz

Span: 1 GHz to 20 GHz
RBW/VBW: 300 kHz

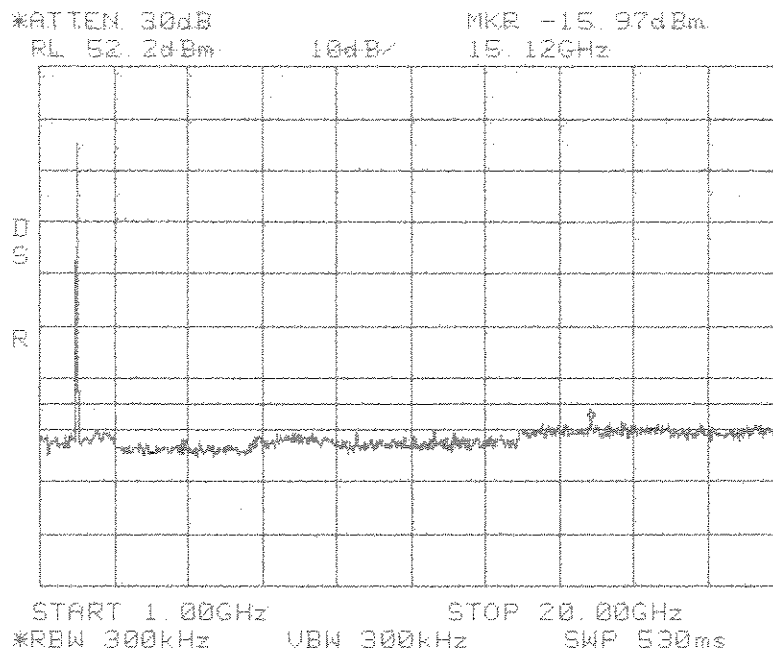


**Intermodulation
Close
Upper
CDMA
PCS 1900 MHz
E Band**

Center: 1967.5 MHz
Span: 25 MHz
RBW/VBW: 30 kHz

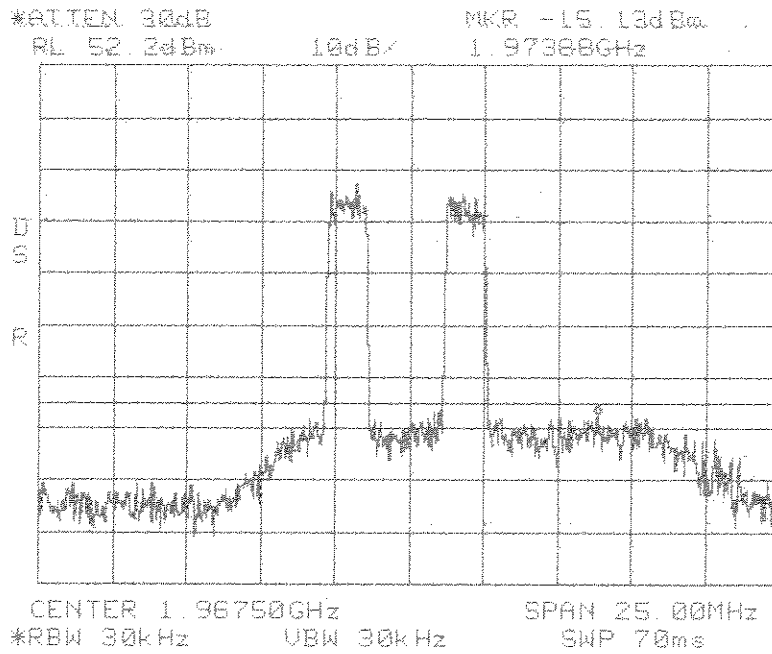


**Intermodulation
Apart
CDMA
PCS 1900 MHz
E Band**

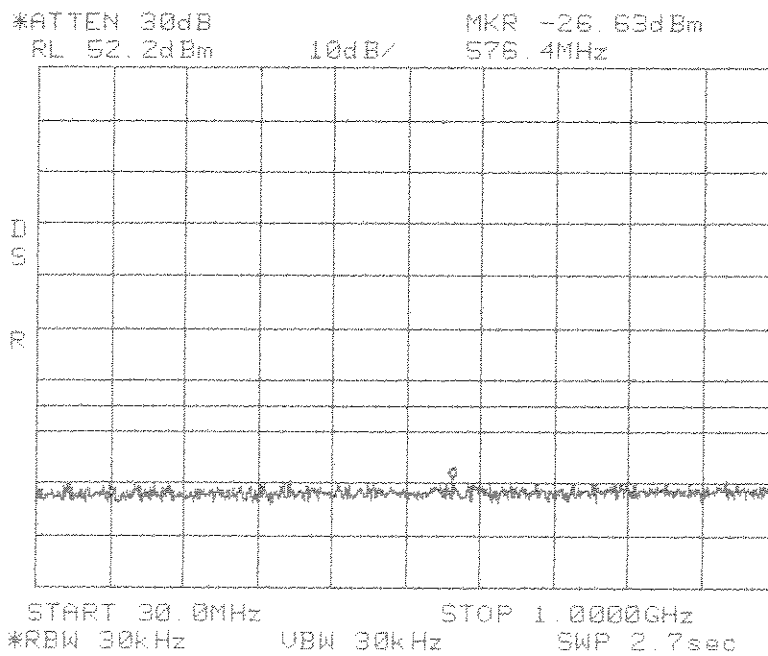

**Intermodulation
Apart
CDMA
PCS 1900 MHz
E Band**


Span: 30 MHz to 1 GHz
RBW/VBW: 30 kHz

Span: 1 GHz to 20 GHz
RBW/VBW: 300 kHz

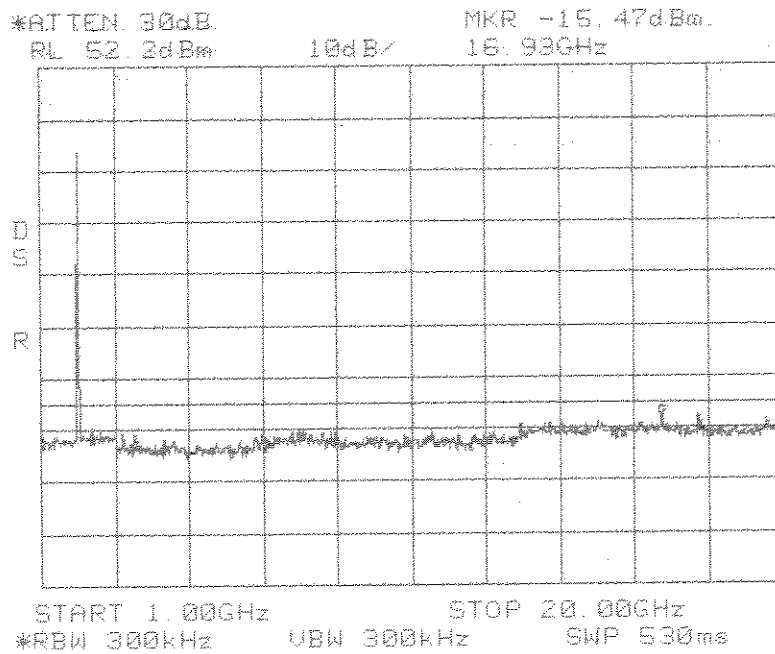


**Intermodulation
Apart
CDMA
PCS 1900 MHz
E Band**

Center: 1967.5 MHz
Span: 25 MHz
RBW/VBW: 30 kHz

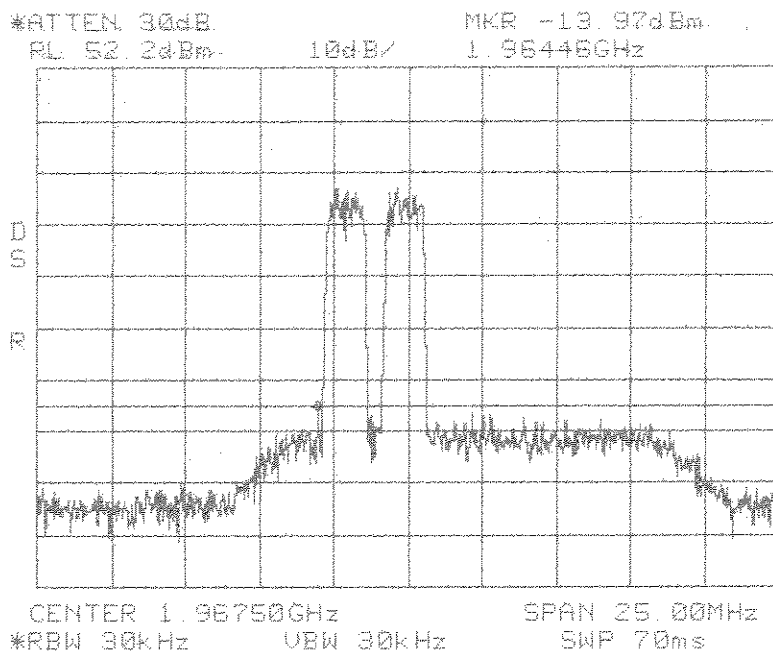


Intermodulation
Close
Lower
CDMA2000
PCS 1900 MHz
E Band
1xRTT

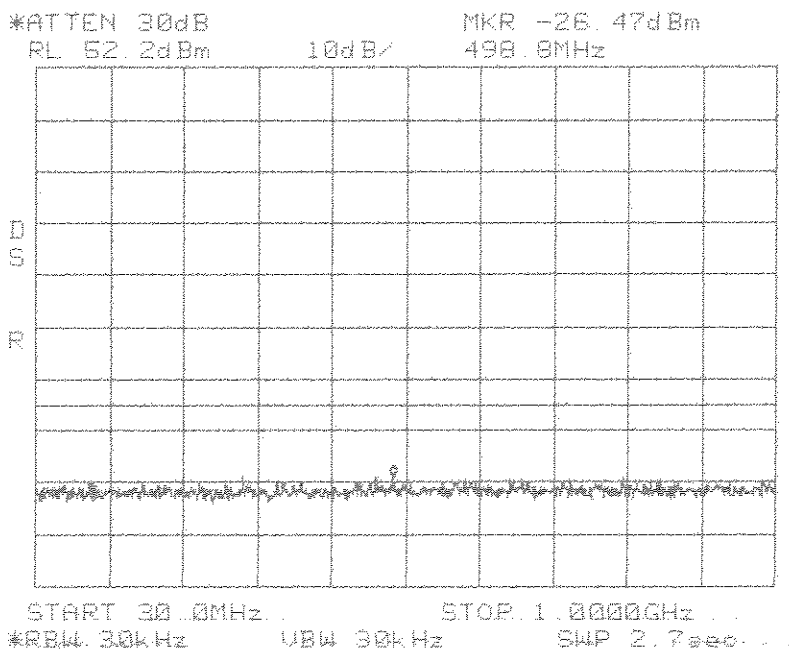

Intermodulation
Close
Lower
CDMA2000
PCS 1900 MHz
E Band
1xRTT


Span: 30 MHz to 1 GHz
RBW/VBW: 30 kHz

Span: 1 GHz to 20 GHz
RBW/VBW: 300 kHz

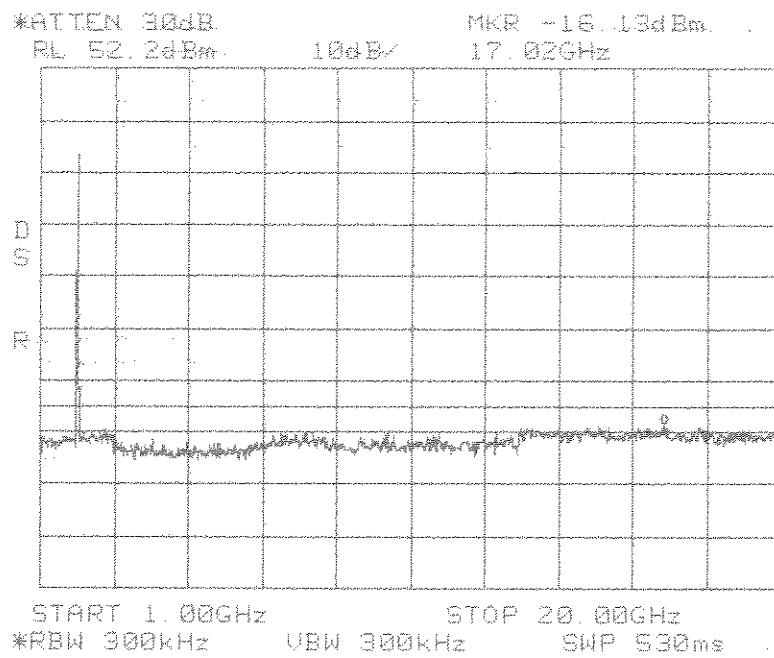


Intermodulation
Close
Lower
CDMA2000
PCS 1900 MHz
E Band
1xRTT

Center: 1967.5 MHz
Span: 25 MHz
RBW/VBW: 30 kHz

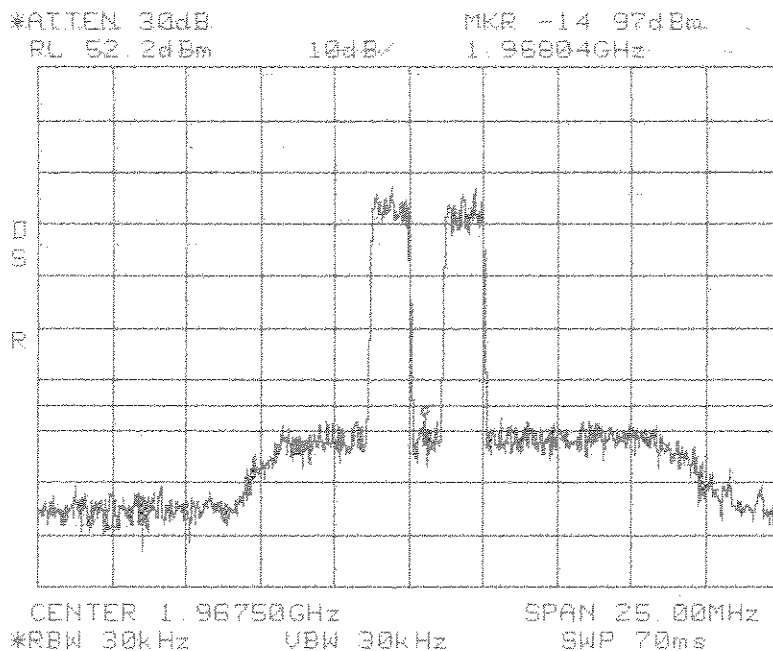


Intermodulation
Close
Upper
CDMA2000
PCS 1900 MHz
E Band
1xRTT

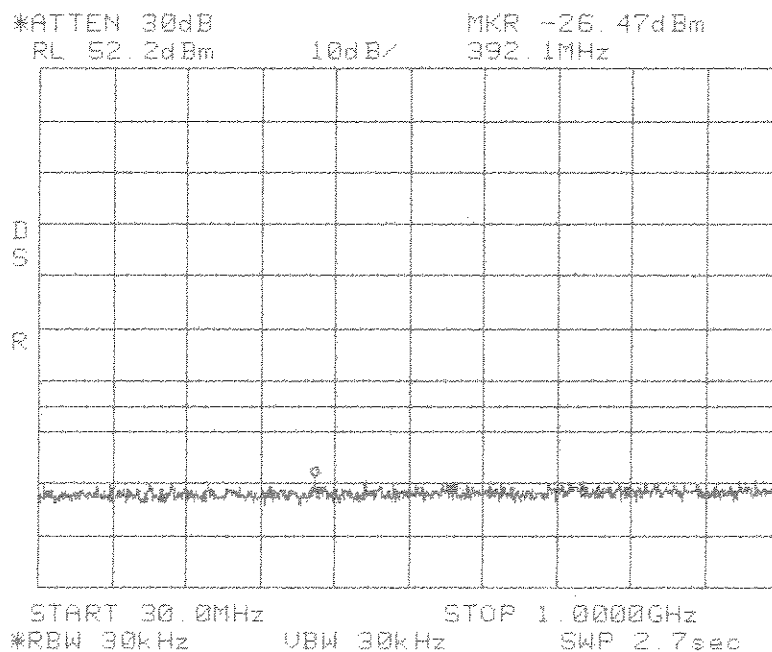

Intermodulation
Close
Upper
CDMA2000
PCS 1900 MHz
E Band
1xRTT


Span: 30 MHz to 1 GHz
RBW/VBW: 30 kHz

Span: 1 GHz to 20 GHz
RBW/VBW: 300 kHz

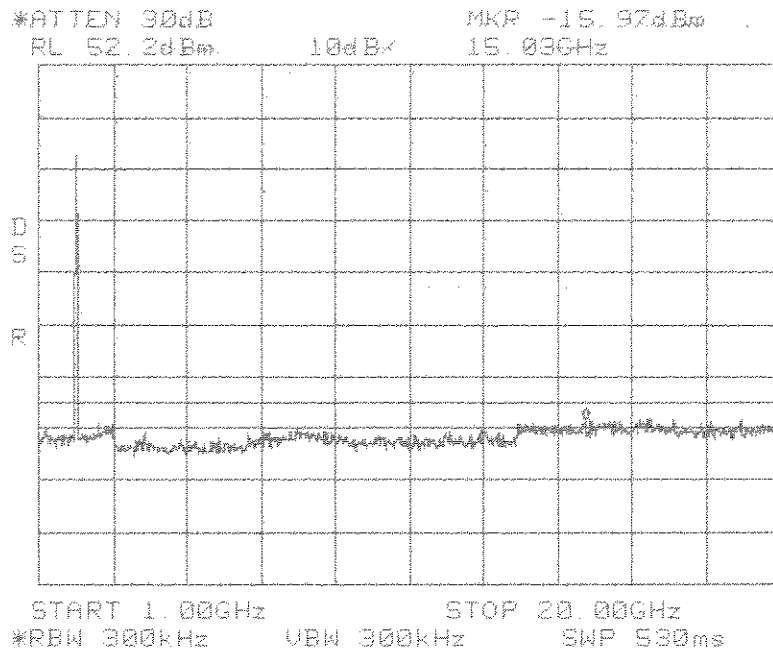


Intermodulation
Close
Upper
CDMA2000
PCS 1900 MHz
E Band
1xRTT

Center: 1967.5 MHz
 Span: 25 MHz
 RBW/VBW: 30 kHz

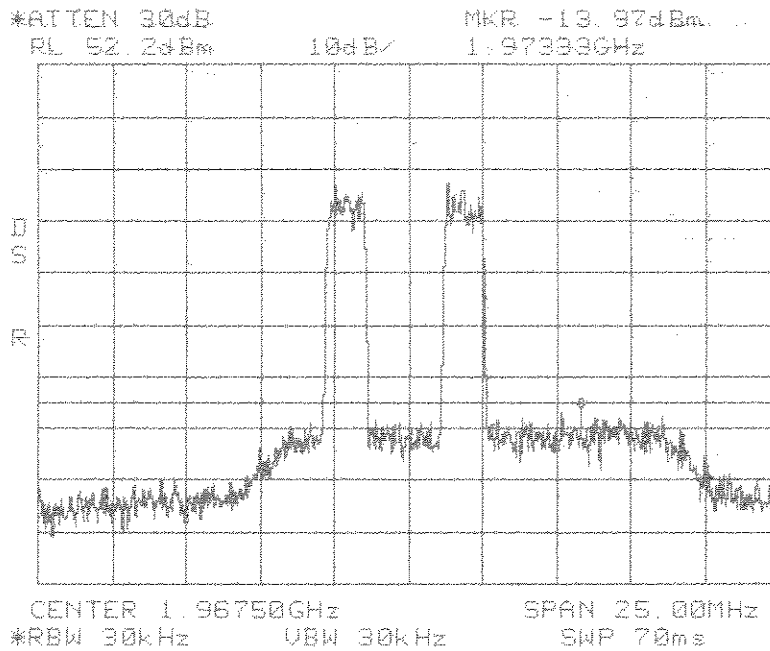


**Intermodulation
 Apart
 CDMA2000
 PCS 1900 MHz
 E Band
 1xRTT**

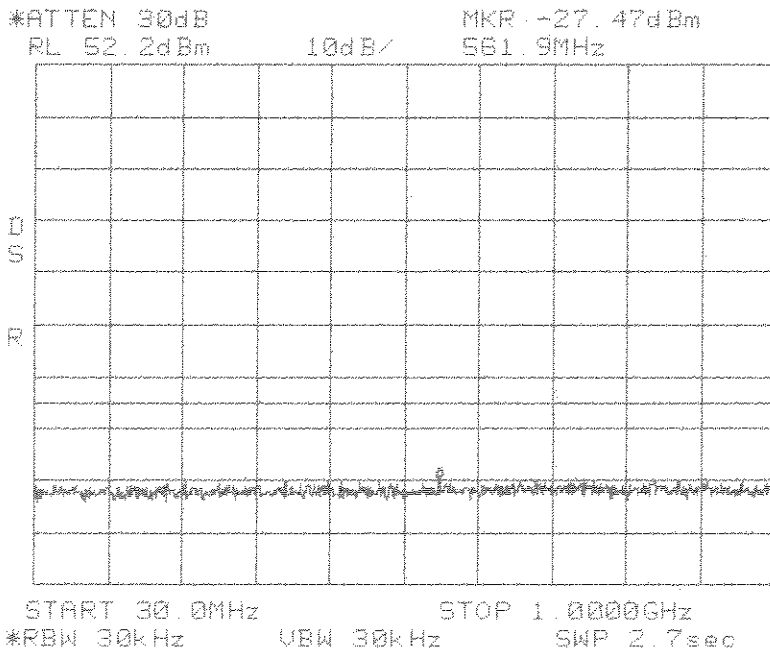

**Intermodulation
 Apart
 CDMA2000
 PCS 1900 MHz
 E Band
 1xRTT**


Span: 30 MHz to 1 GHz
 RBW/VBW: 30 kHz

Span: 1 GHz to 20 GHz
RBW/VBW: 300 kHz

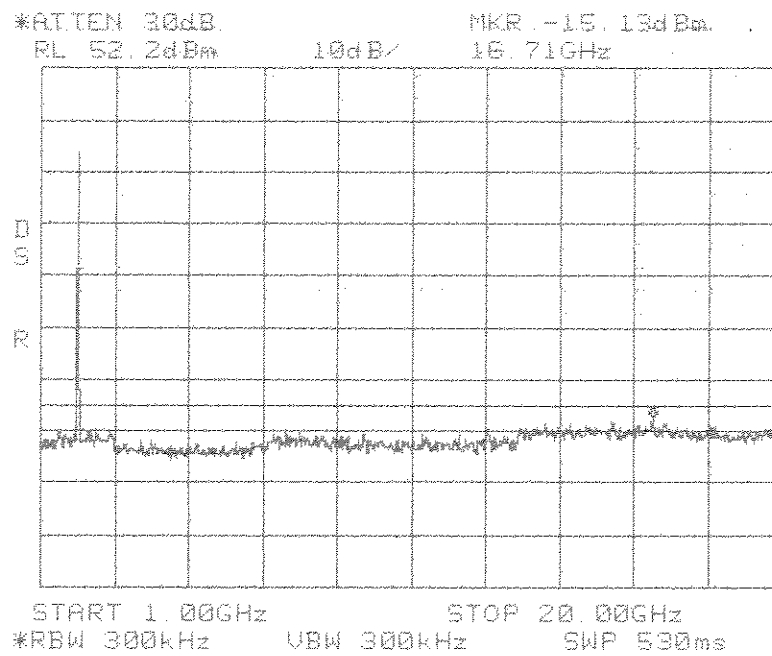


**Intermodulation
Apart
CDMA2000
PCS 1900 MHz
E Band
1xRTT**

Center: 1972.5 MHz
Span: 25 MHz
RBW/VBW: 30 kHz

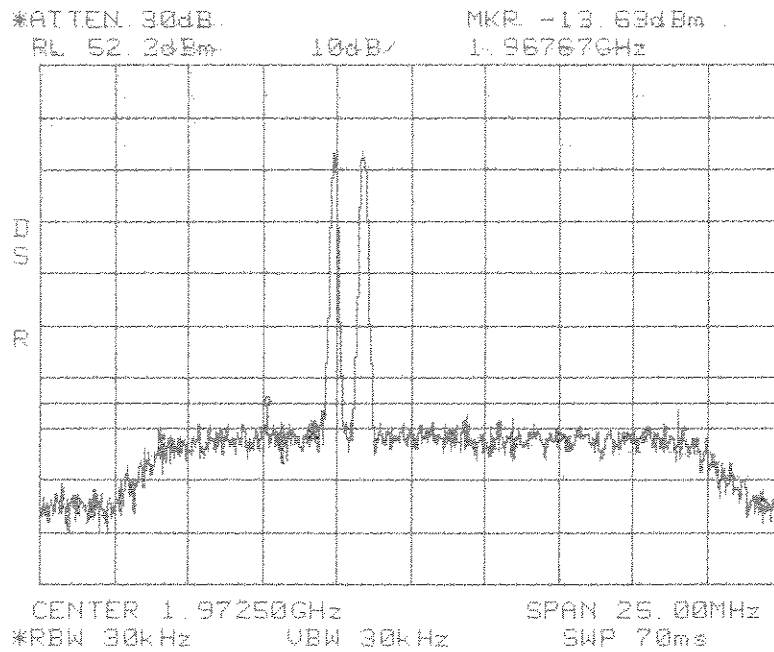


Intermodulation
Close
Lower
GSM
PCS 1900 MHz
F Band

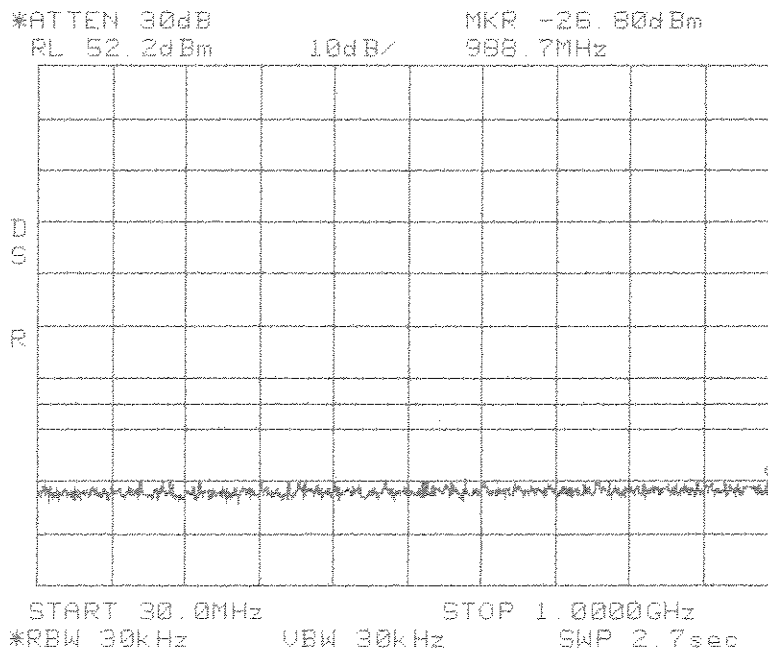

Intermodulation
Close
Lower
GSM
PCS 1900 MHz
F Band


Span: 30 MHz to 1 GHz
RBW/VBW: 30 kHz

Span: 1 GHz to 20 GHz
RBW/VBW: 300 kHz

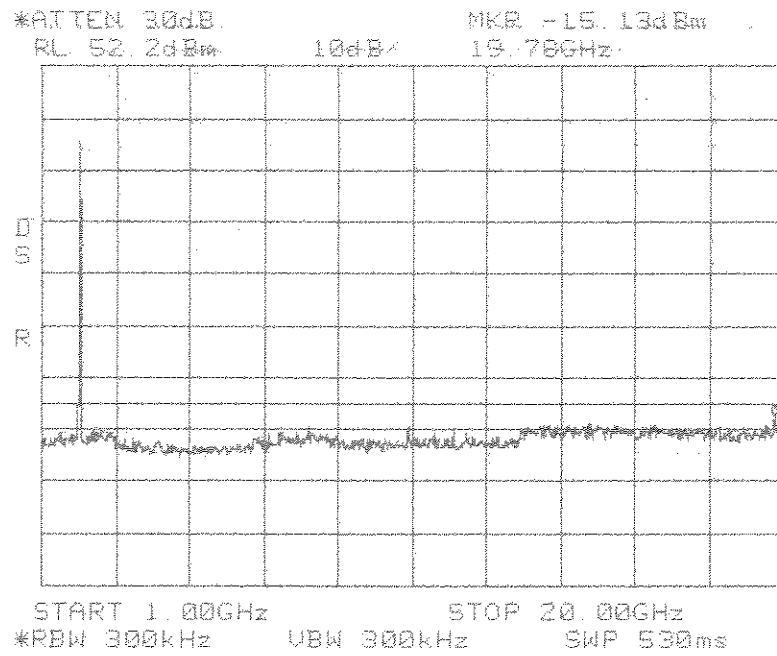


**Intermodulation
Close
Lower
GSM
PCS 1900 MHz
F Band**

Center: 1972.5 MHz
Span: 25 MHz
RBW/VBW: 30 kHz

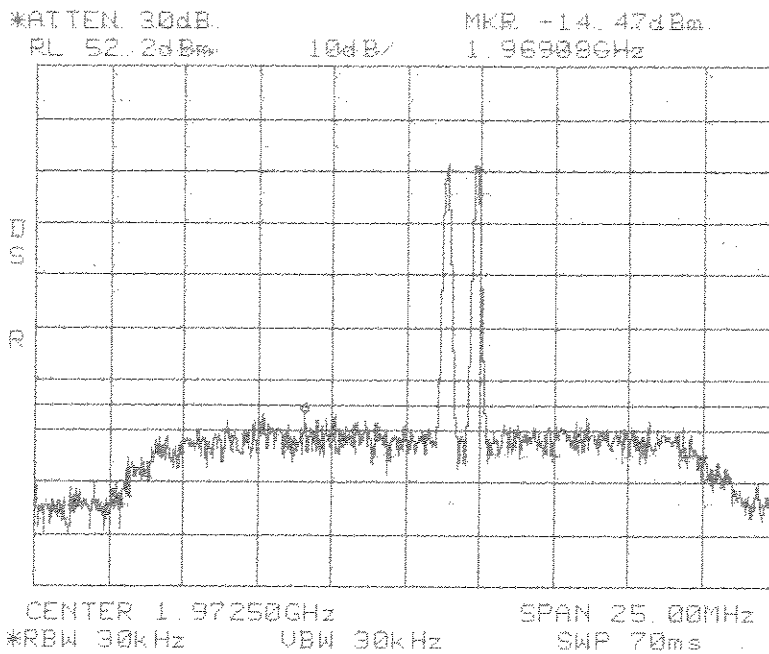


**Intermodulation
Close
Upper
GSM
PCS 1900 MHz
F Band**

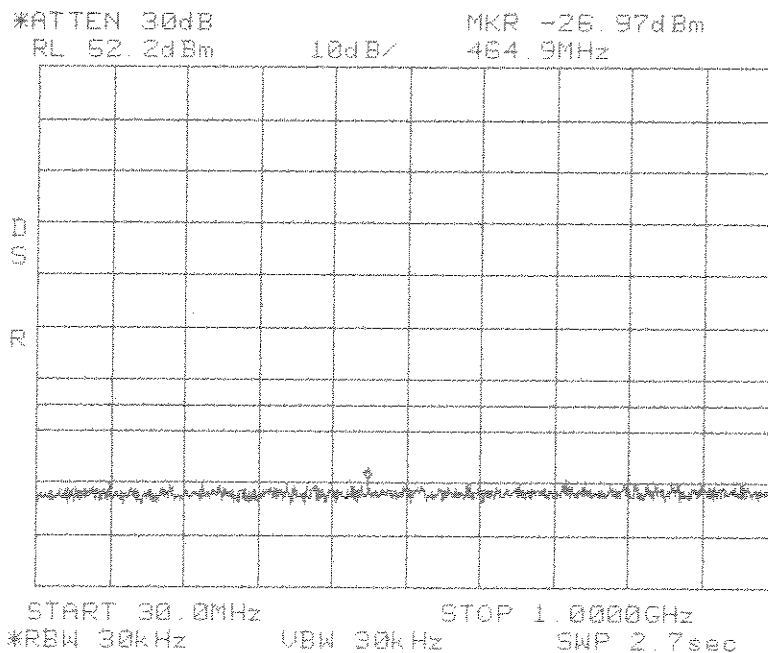

**Intermodulation
Close
Upper
GSM
PCS 1900 MHz
F Band**


Span: 30 MHz to 1 GHz
RBW/VBW: 30 kHz

Span: 1 GHz to 20 GHz
RBW/VBW: 300 kHz

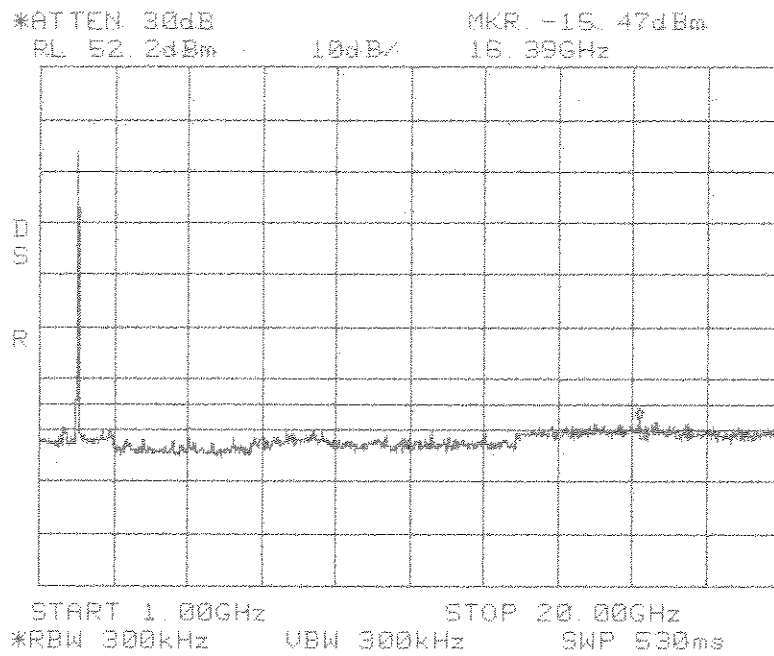


Intermodulation
Close
Upper
GSM
PCS 1900 MHz
F Band

Center: 1972.5 MHz
Span: 25 MHz
RBW/VBW: 30 kHz

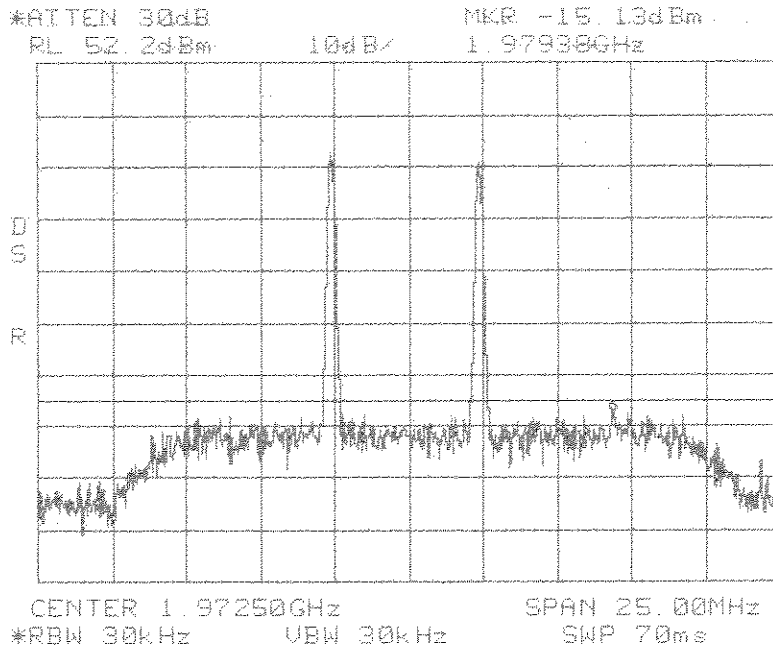


**Intermodulation
Apart
GSM
PCS 1900 MHz
F Band**

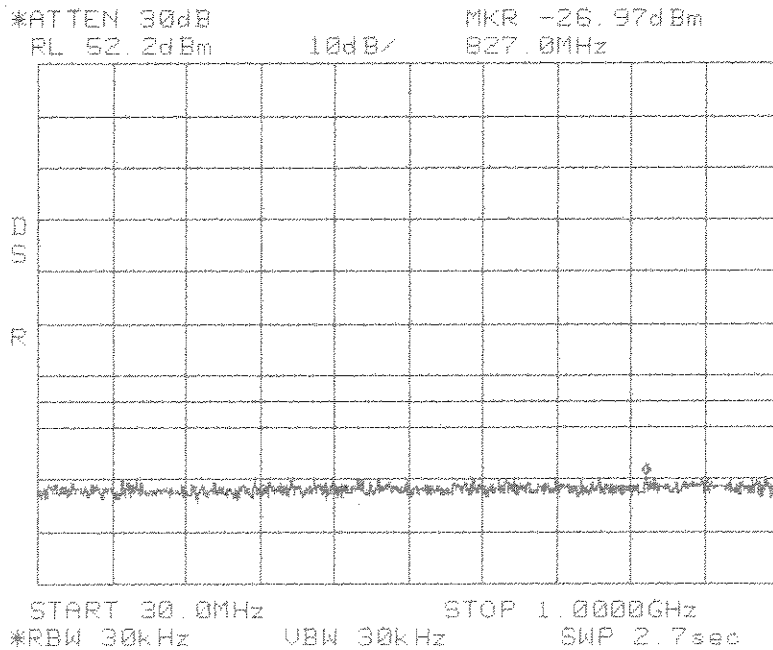

**Intermodulation
Apart
GSM
PCS 1900 MHz
F Band**


Span: 30 MHz to 1 GHz
RBW/VBW: 30 kHz

Span: 1 GHz to 20 GHz
RBW/VBW: 300 kHz

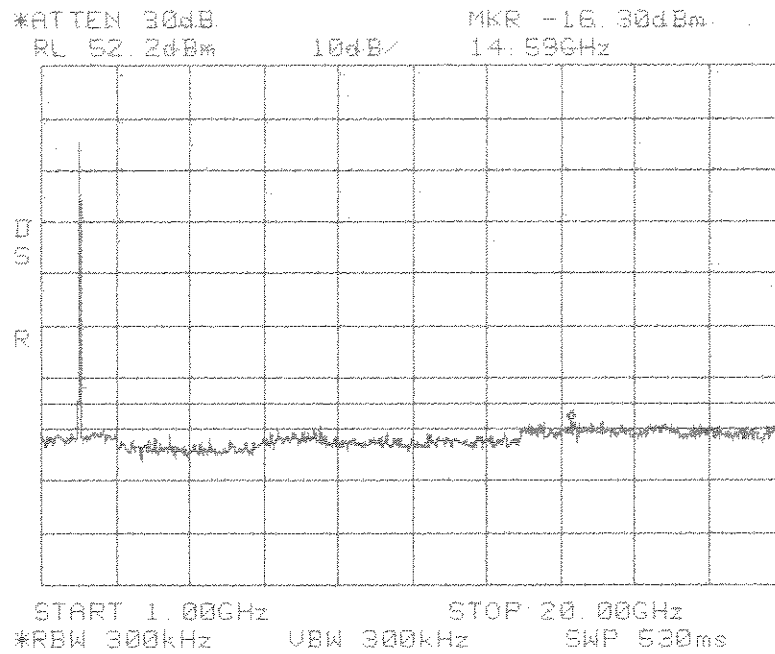


**Intermodulation
Apart
GSM
PCS 1900 MHz
F Band**

Center: 1972.5 MHz
Span: 25 MHz
RBW/VBW: 30 kHz

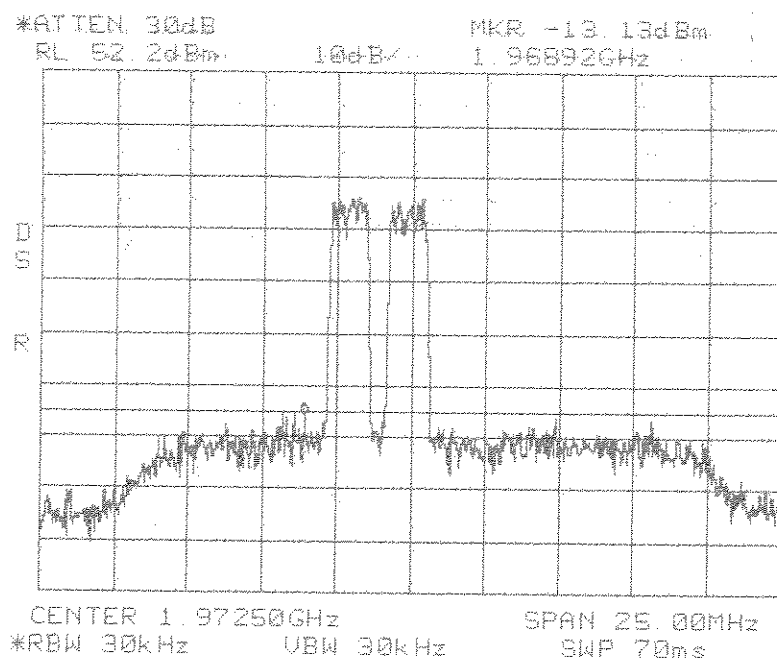


**Intermodulation
Close
Lower
CDMA
PCS 1900 MHz
F Band**

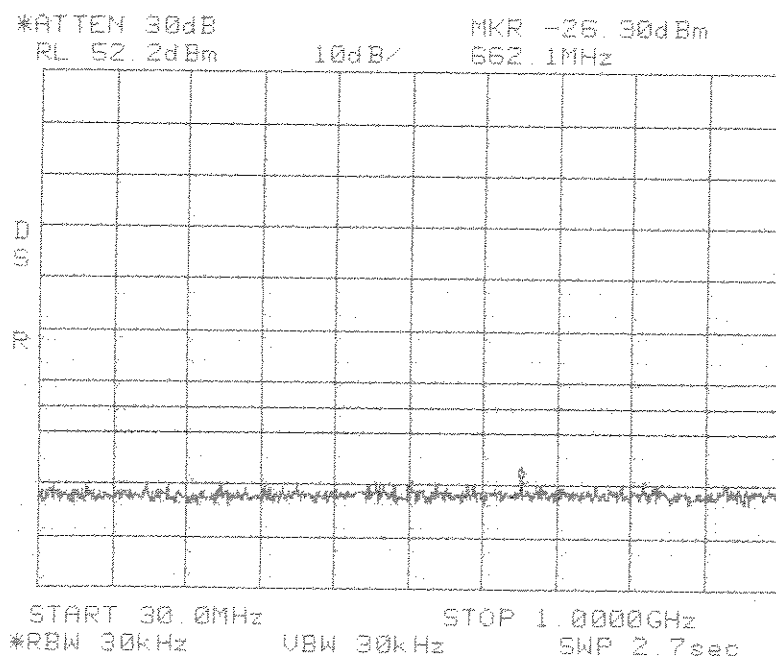

**Intermodulation
Close
Lower
CDMA
PCS 1900 MHz
F Band**

Span: 30 MHz to 1 GHz
RBW/VBW: 30 kHz


Span: 1 GHz to 20 GHz
RBW/VBW: 300 kHz

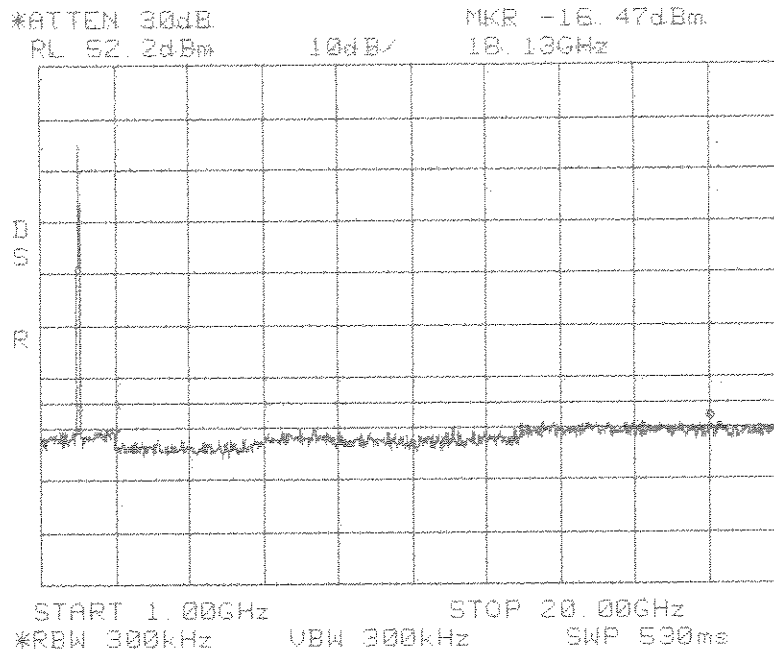


**Intermodulation
Close
Lower
CDMA
PCS 1900 MHz
F Band**

100

Center: 1972.5 MHz
 Span: 25 MHz
 RBW/VBW: 30 kHz

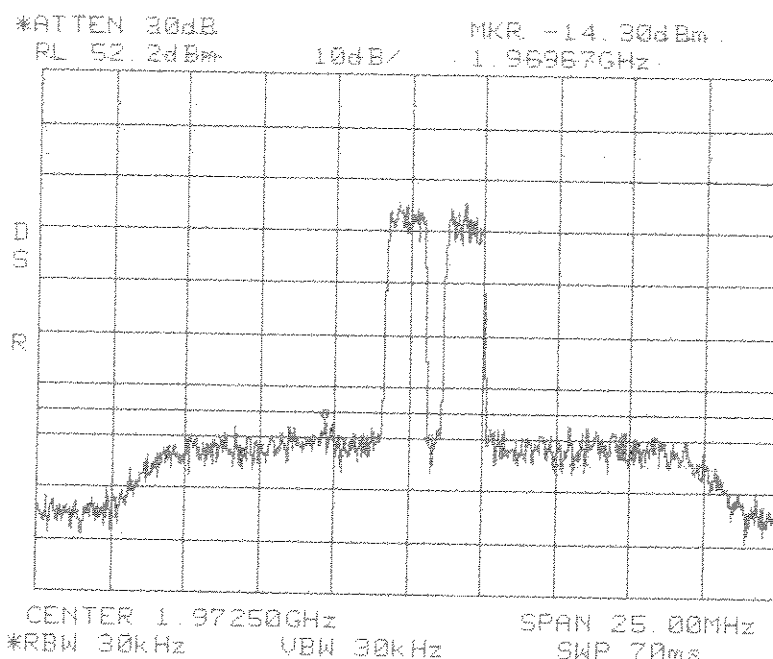


**Intermodulation
 Close
 Upper
 CDMA
 PCS 1900 MHz
 F Band**

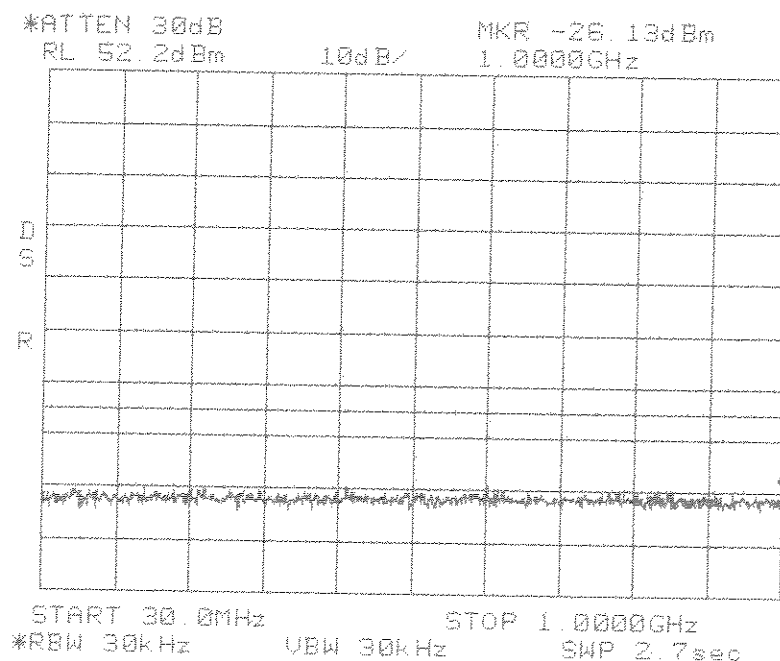

**Intermodulation
 Close
 Upper
 CDMA
 PCS 1900 MHz
 F Band**


Span: 30 MHz to 1 GHz
 RBW/VBW: 30 kHz

Span: 1 GHz to 20 GHz
RBW/VBW: 300 kHz

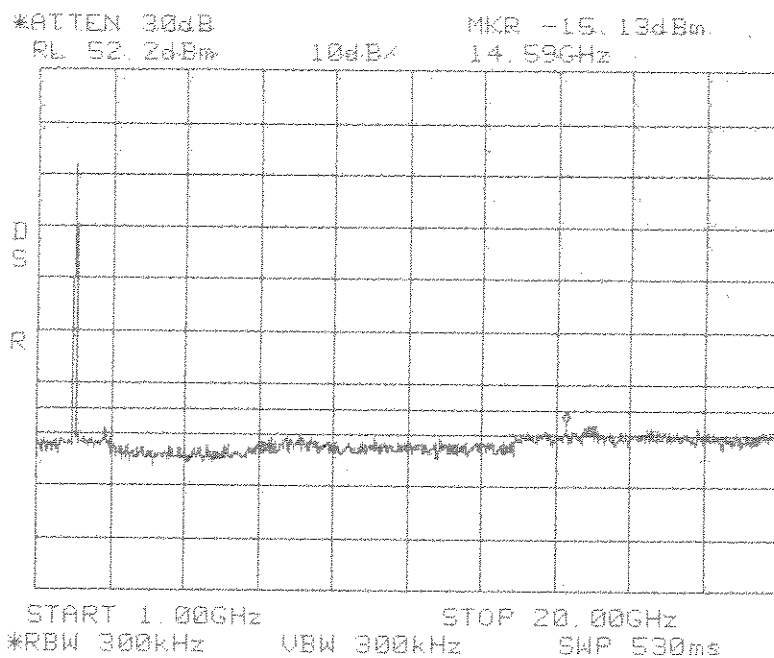


**Intermodulation
Close
Upper
CDMA
PCS 1900 MHz
F Band**

Center: 1972.5 MHz
Span: 25 MHz
RBW/VBW: 30 kHz

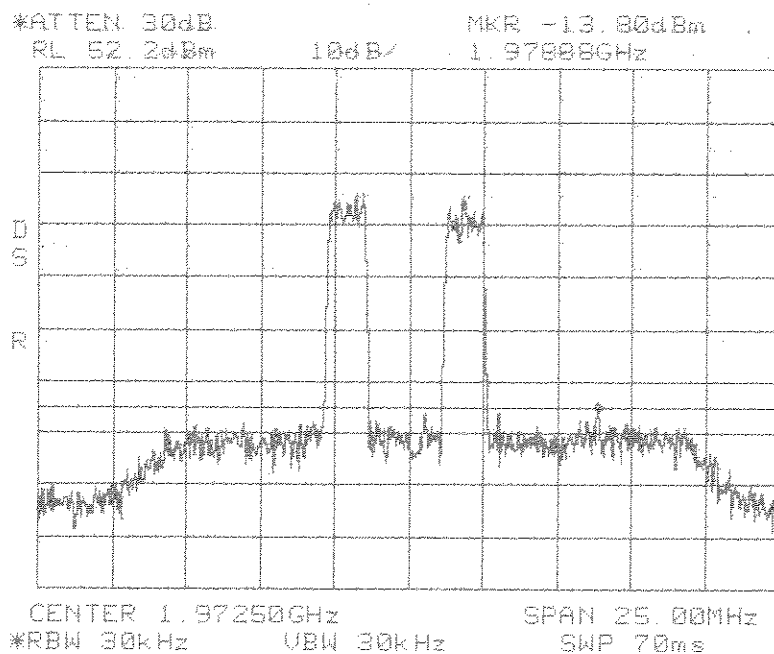


**Intermodulation
Apart
CDMA
PCS 1900 MHz
F Band**

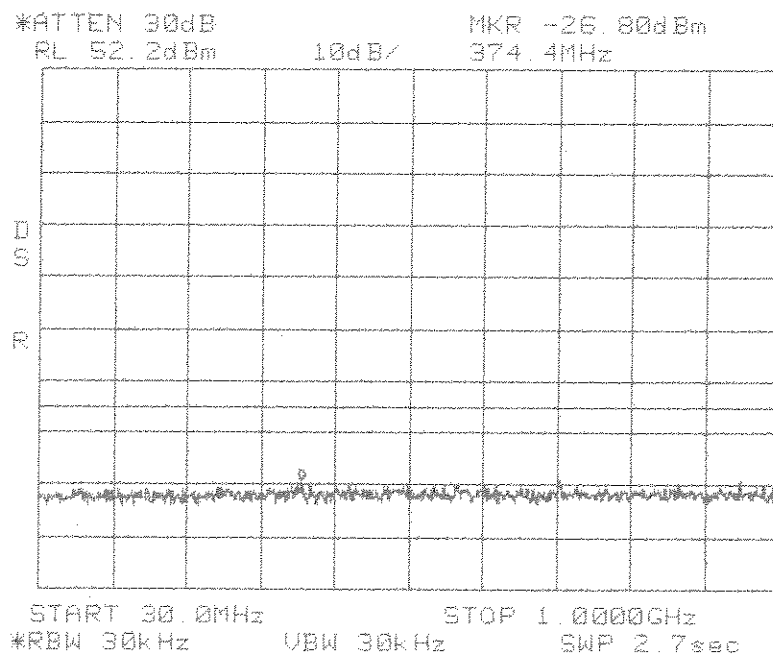

**Intermodulation
Apart
CDMA
PCS 1900 MHz
F Band**


Span: 30 MHz to 1 GHz
RBW/VBW: 30 kHz

Span: 1 GHz to 20 GHz
RBW/VBW: 300 kHz

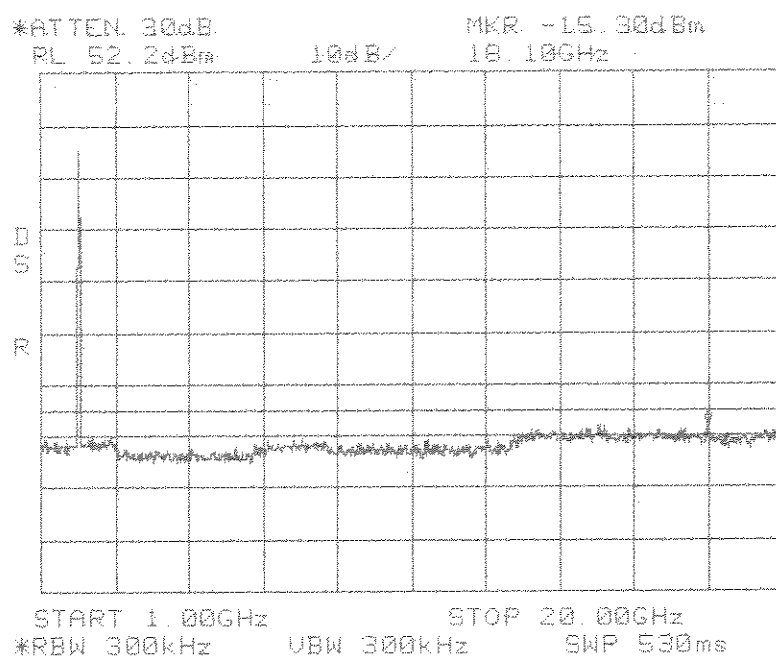


**Intermodulation
Apart
CDMA
PCS 1900 MHz
F Band**

Center: 1972.5 MHz
Span: 25 MHz
RBW/VBW: 30 kHz

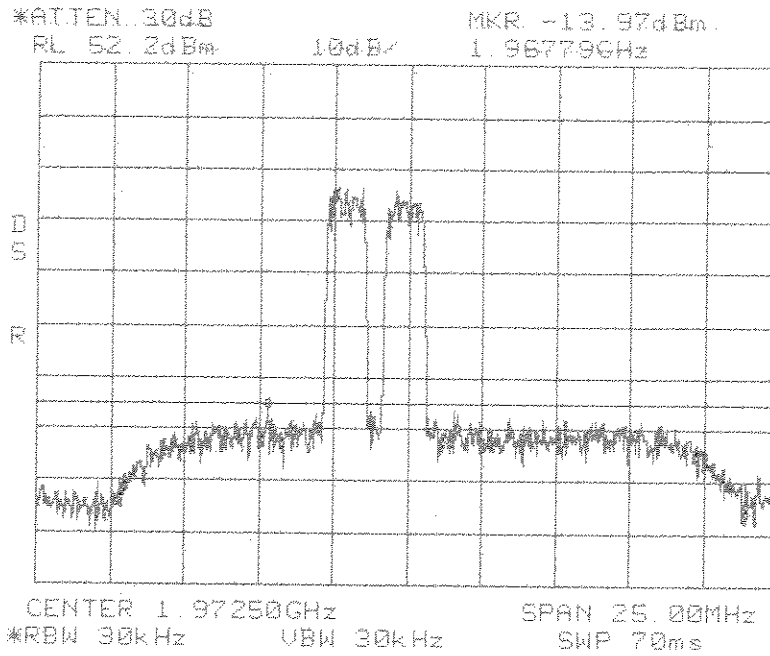


Intermodulation
Close
Lower
CDMA2000
PCS 1900 MHz
F Band
1xRTT

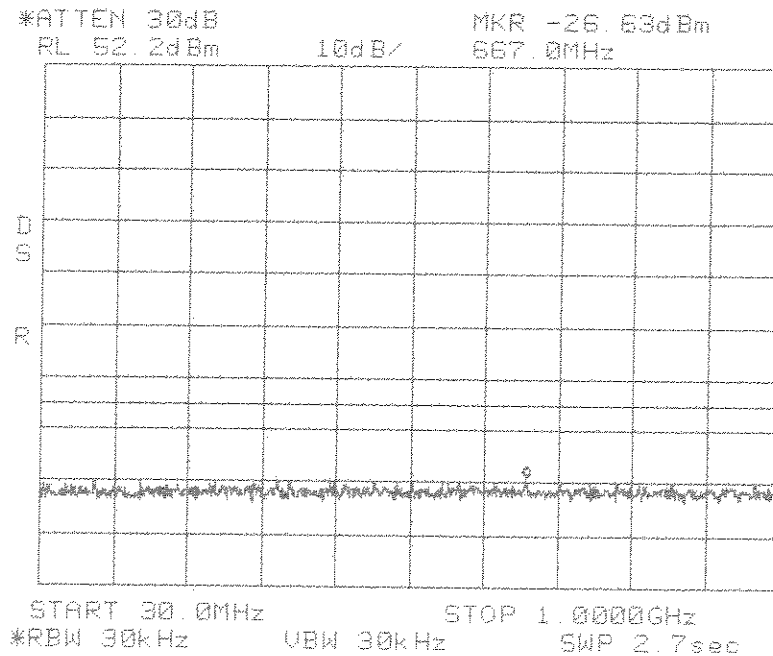

Intermodulation
Close
Lower
CDMA2000
PCS 1900 MHz
F Band
1xRTT


Span: 30 MHz to 1 GHz
RBW/VBW: 30 kHz

Span: 1 GHz to 20 GHz
RBW/VBW: 300 kHz

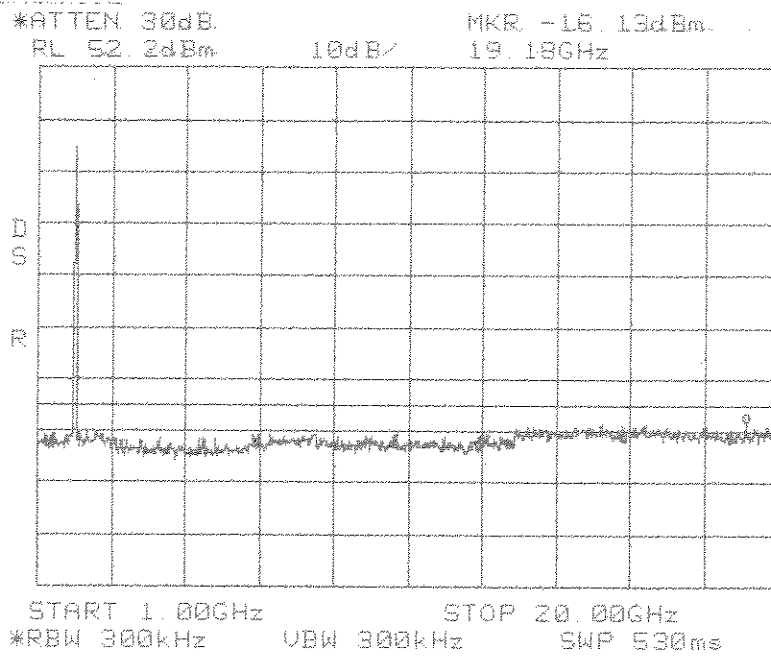


**Intermodulation
Close
Lower
CDMA2000
PCS 1900 MHz
F Band
1xRTT**

Center: 1972.5 MHz
Span: 25 MHz
RBW/VBW: 30 kHz

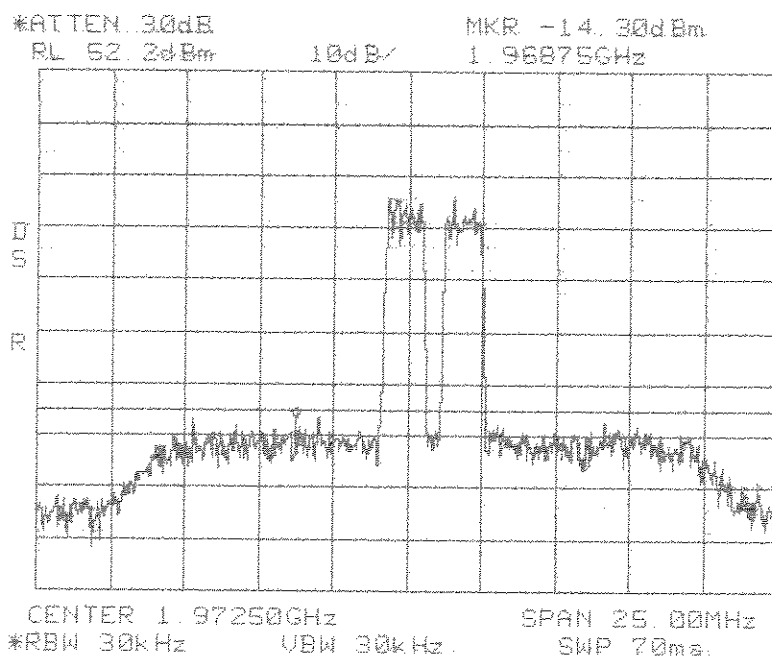


Intermodulation
Close
Upper
CDMA2000
PCS 1900 MHz
F Band
1xRTT

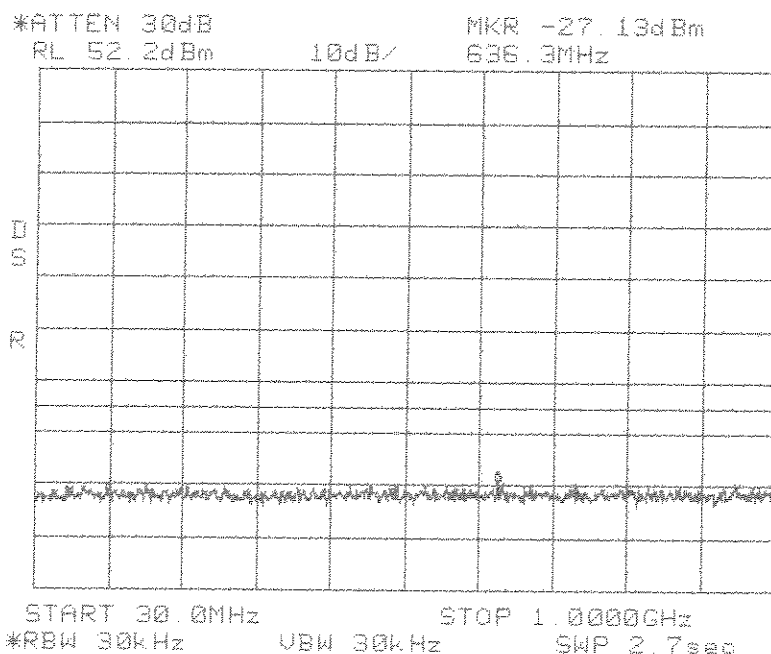

Intermodulation
Close
Upper
CDMA2000
PCS 1900 MHz
F Band
1xRTT


Span: 30 MHz to 1 GHz
RBW/VBW: 30 kHz

Span: 1 GHz to 20 GHz
RBW/VBW: 300 kHz

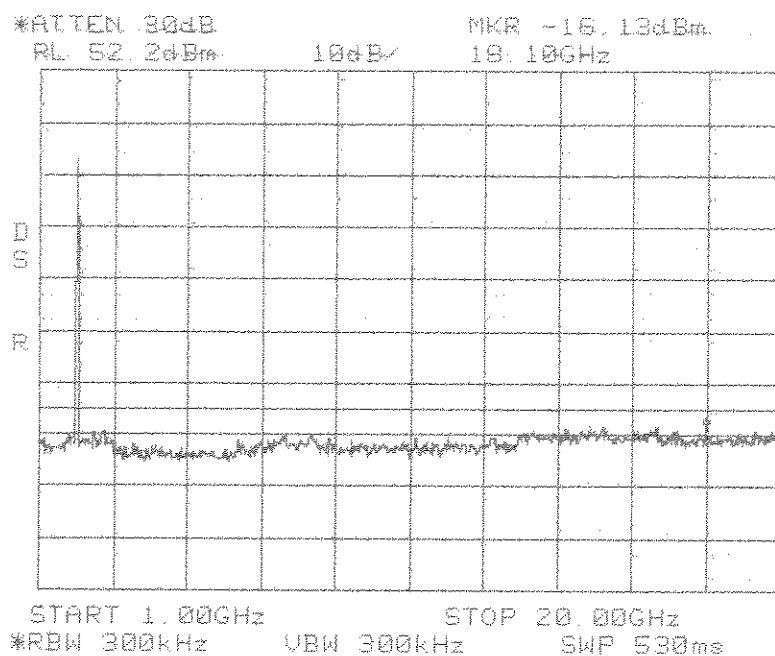


Intermodulation
Close
Upper
CDMA2000
PCS 1900 MHz
F Band
1xRTT

Center: 1972.5 MHz
Span: 25 MHz
RBW/VBW: 30 kHz

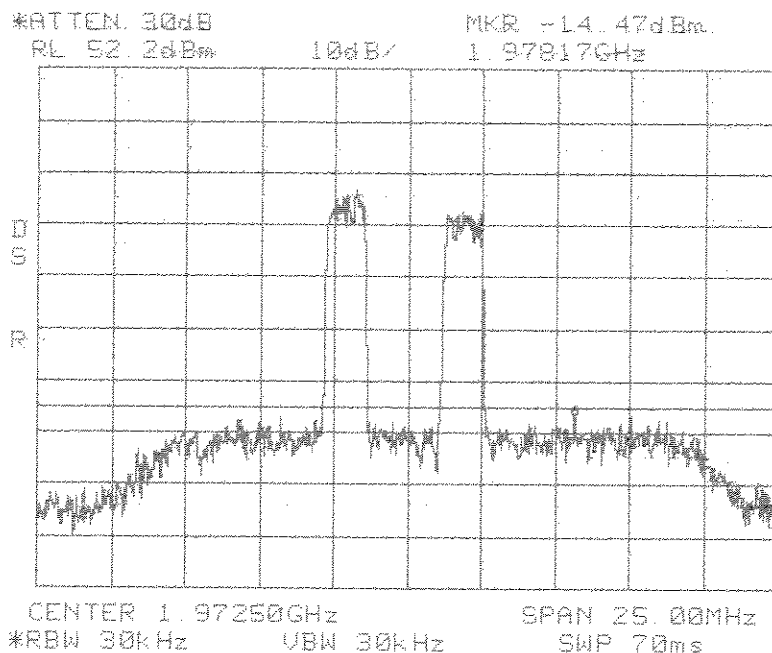


**Intermodulation
Apart
CDMA2000
PCS 1900 MHz
F Band
1xRTT**

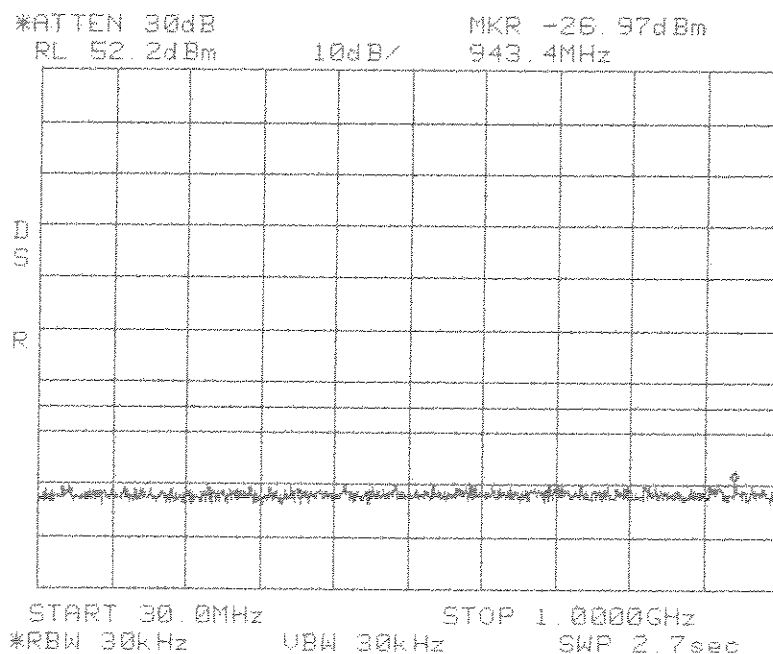

**Intermodulation
Apart
CDMA2000
PCS 1900 MHz
F Band
1xRTT**


Span: 30 MHz to 1 GHz
RBW/VBW: 30 kHz

Span: 1 GHz to 20 GHz
RBW/VBW: 300 kHz

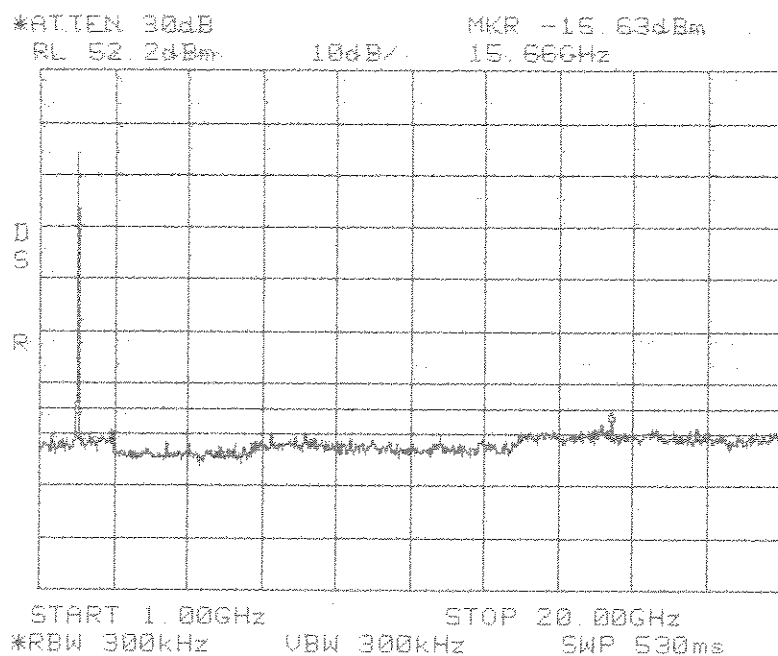


**Intermodulation
Apart
CDMA2000
PCS 1900 MHz
F Band
1xRTT**

Center: 1982.5 MHz
Span: 25 MHz
RBW/VBW: 30 kHz

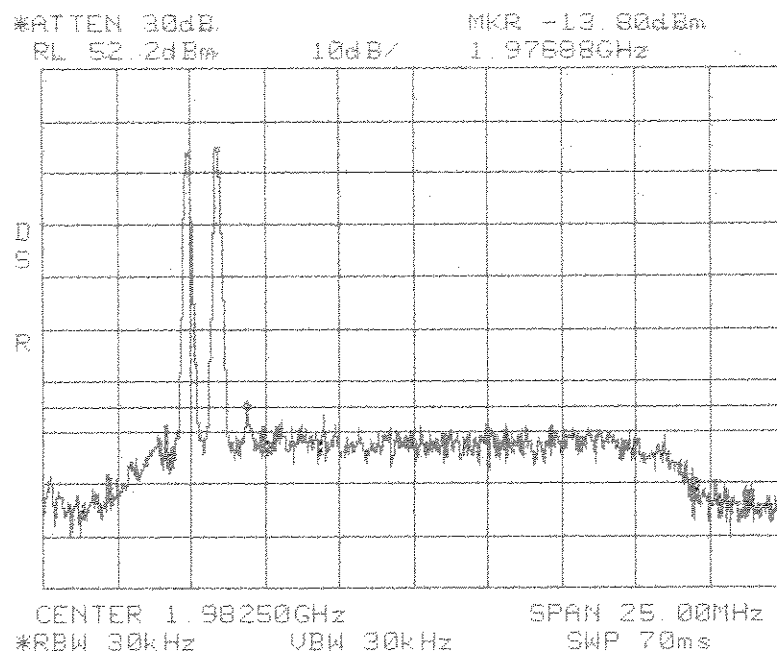


**Intermodulation
Close
Lower
GSM
PCS 1900 MHz
C Band**

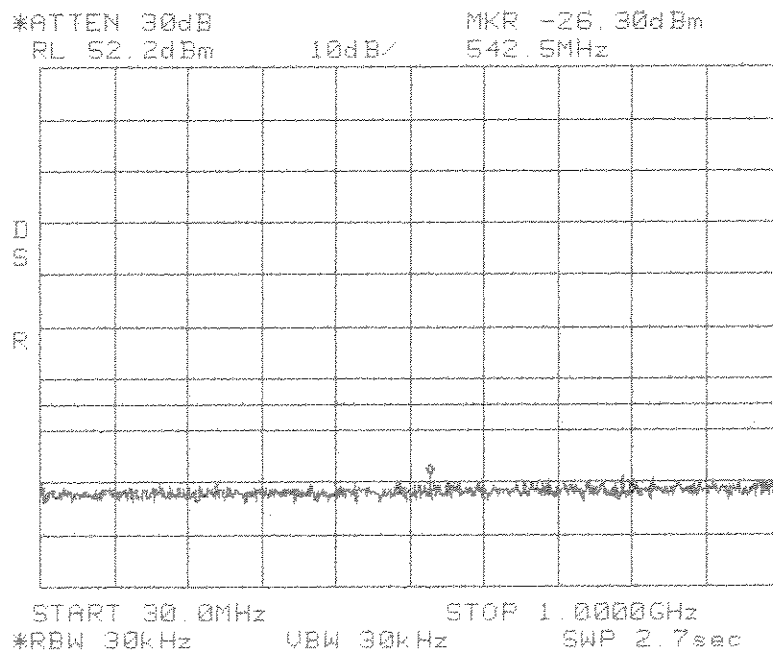

**Intermodulation
Close
Lower
GSM
PCS 1900 MHz
C Band**


Span: 30 MHz to 1 GHz
RBW/VBW: 30 kHz

Span: 1 GHz to 20 GHz
RBW/VBW: 300 kHz

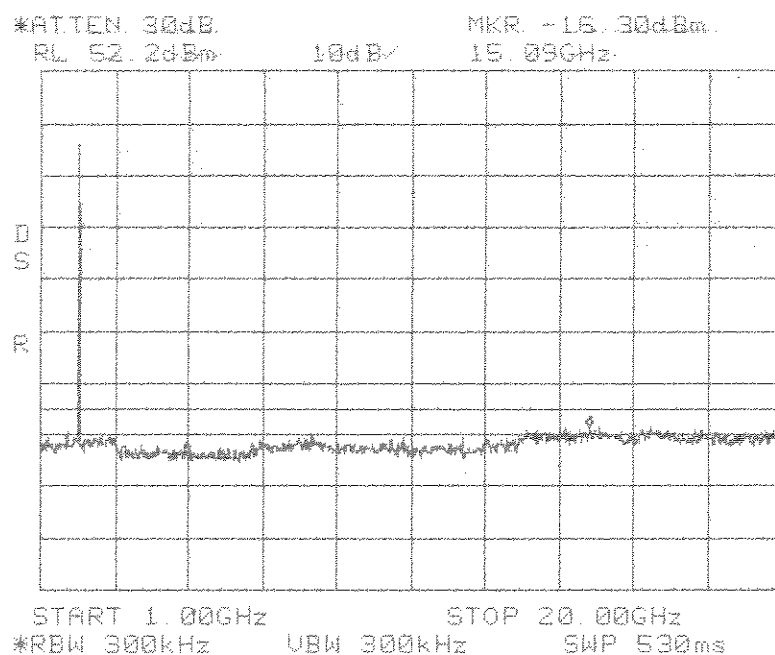


**Intermodulation
Close
Lower
GSM
PCS 1900 MHz
C Band**

Center: 1982.5 MHz
Span: 25 MHz
RBW/VBW: 30 kHz

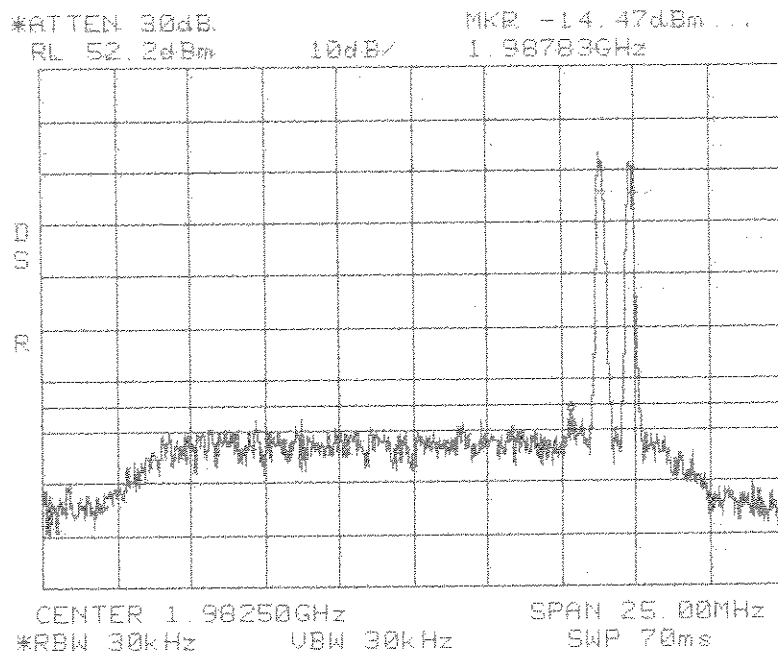


Intermodulation
Close
Upper
GSM
PCS 1900 MHz
C Band

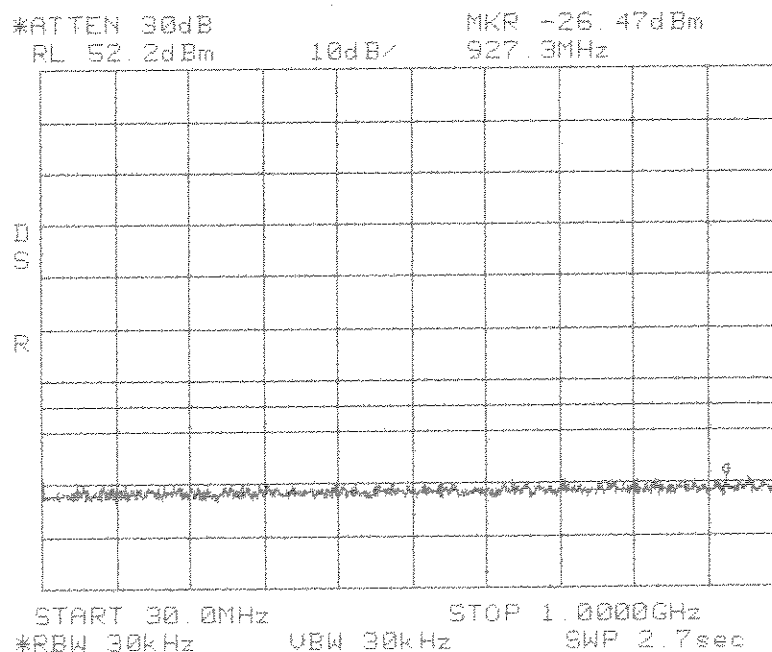

Intermodulation
Close
Upper
GSM
PCS 1900 MHz
C Band


Span: 30 MHz to 1 GHz
RBW/VBW: 30 kHz

Span: 1 GHz to 20 GHz
RBW/VBW: 300 kHz

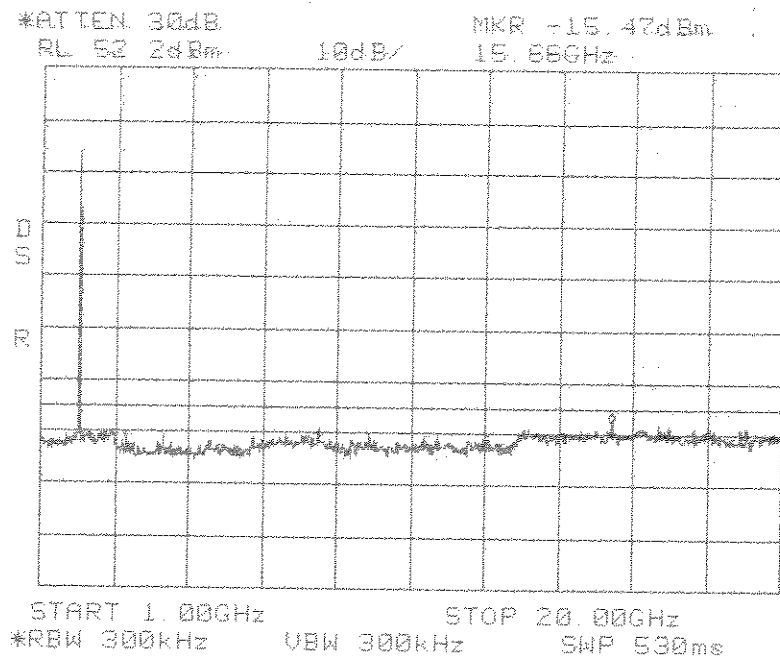


**Intermodulation
Close
Upper
GSM
PCS 1900 MHz
C Band**

Center: 1982.5 MHz
Span: 25 MHz
RBW/VBW: 30 kHz

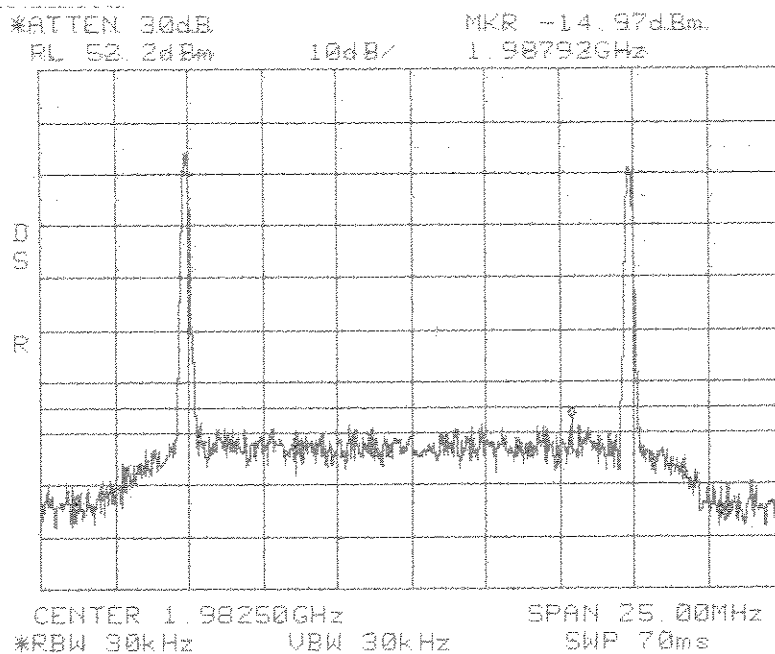

**Intermodulation
Apart
GSM
PCS 1900 MHz
C Band**

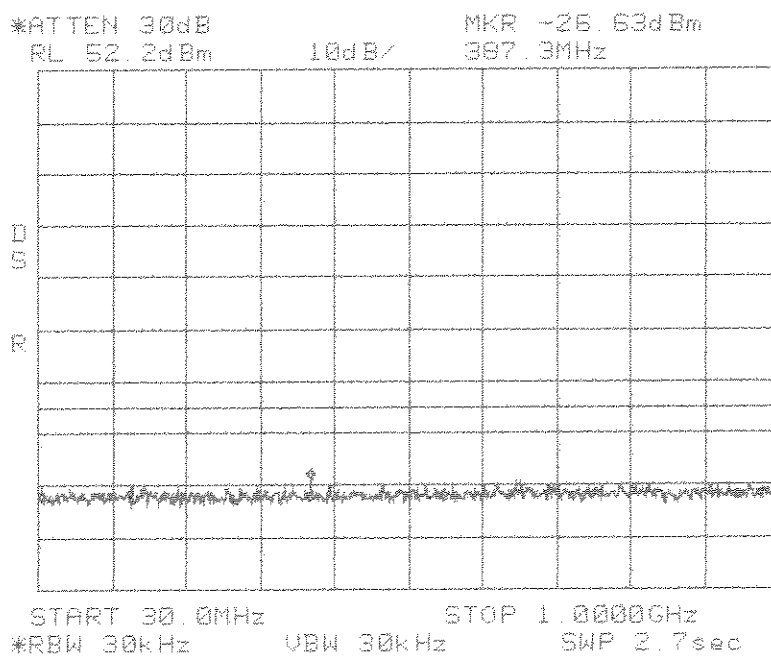


**Intermodulation
Apart
GSM
PCS 1900 MHz
C Band**

Span: 30 MHz to 1 GHz
RBW/VBW: 30 kHz

Span: 1 GHz to 20 GHz
RBW/VBW: 300 kHz


*ATTEN 30dB
RL 52.2dBm 10dB/ MKR -15.30dBm
13.63GHz

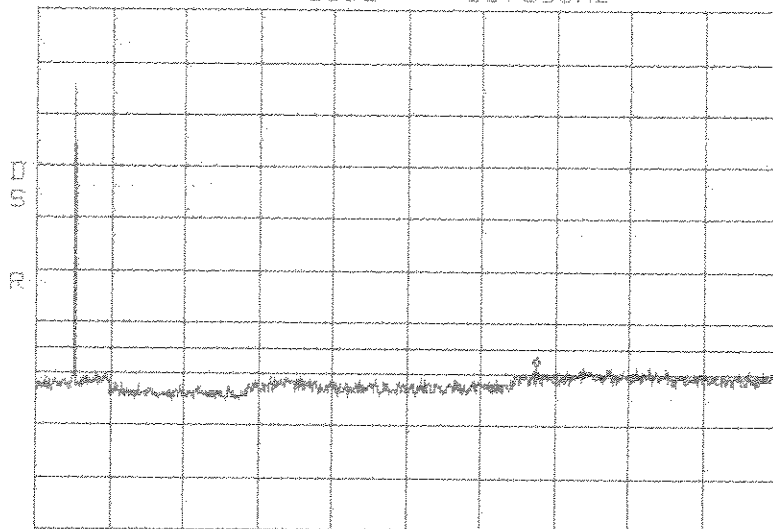


START 1.00GHz STOP 20.00GHz
*RBW 300kHz VBW 300kHz SWP 500ms

**Intermodulation
Apart
GSM
PCS 1900 MHz
C Band**

Center: 1982.5 MHz
Span: 25 MHz
RBW/VBW: 30 kHz

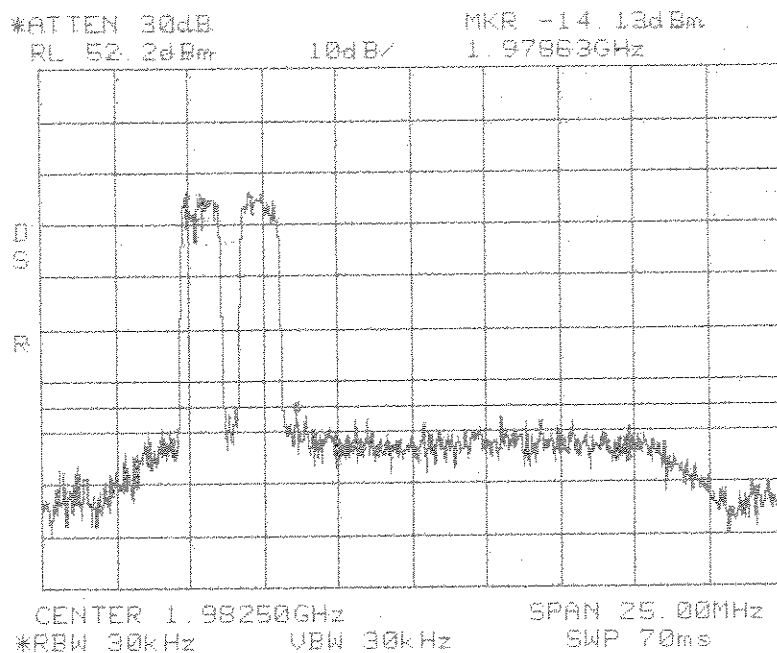


**Intermodulation
Close
Lower
CDMA
PCS 1900 MHz
C Band**

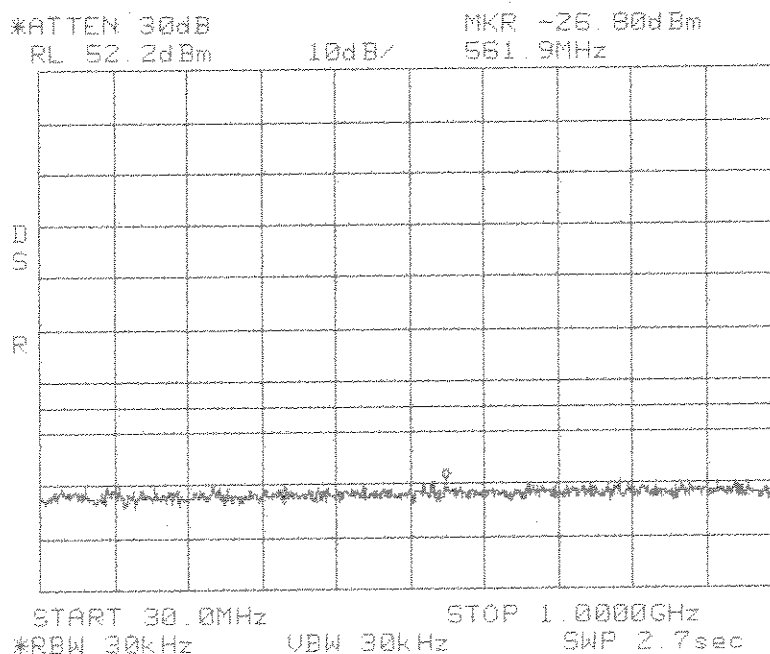

**Intermodulation
Close
Lower
CDMA
PCS 1900 MHz
C Band**


Span: 30 MHz to 1 GHz
RBW/VBW: 30 kHz

Span: 1 GHz to 20 GHz
RBW/VBW: 300 kHz

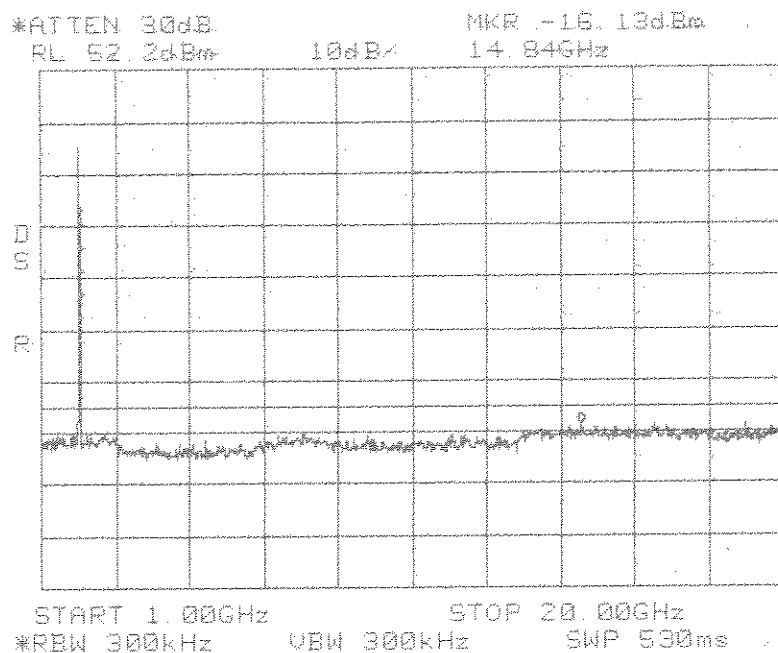


**Intermodulation
Close
Lower
CDMA
PCS 1900 MHz
C Band**

Center: 1982.5 MHz
Span: 25 MHz
RBW/VBW: 30 kHz

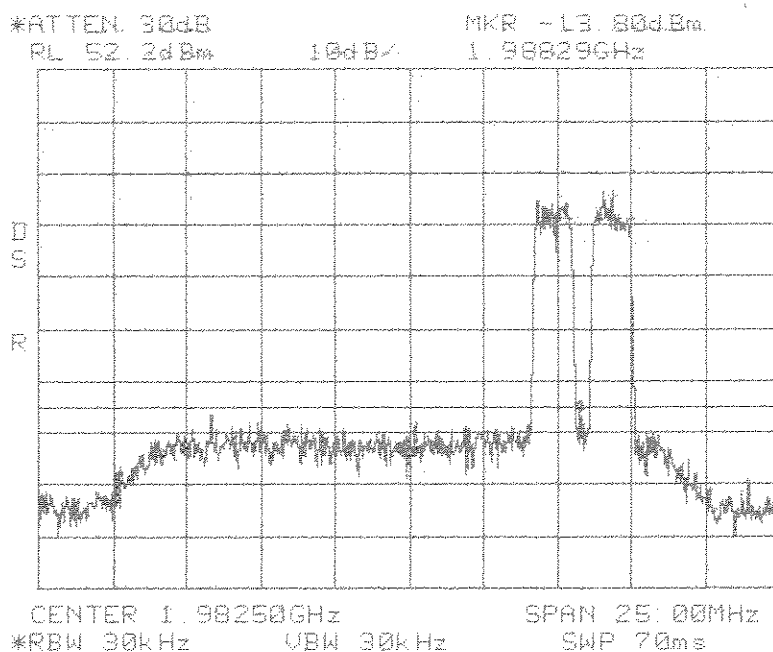


**Intermodulation
Close
Upper
CDMA
PCS 1900 MHz
C Band**

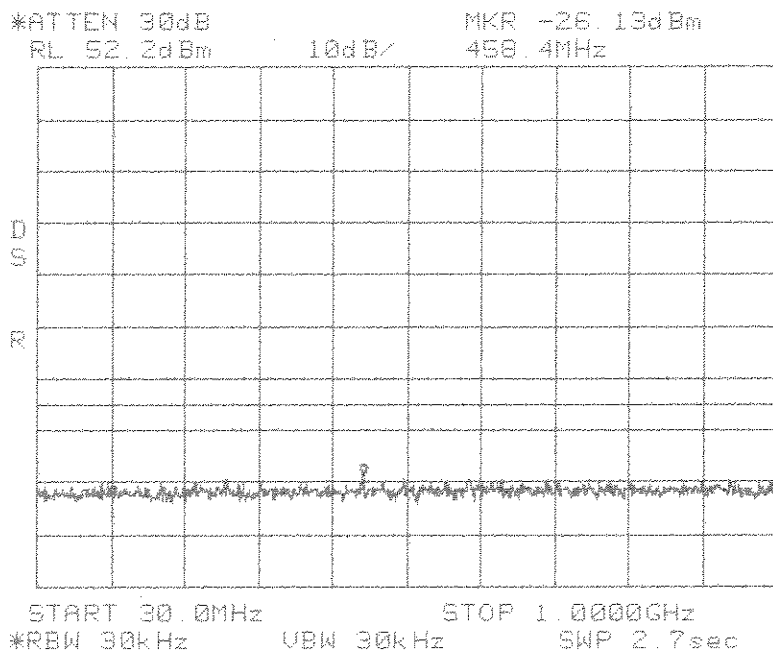

**Intermodulation
Close
Upper
CDMA
PCS 1900 MHz
C Band**


Span: 30 MHz to 1 GHz
RBW/VBW: 30 kHz

Span: 1 GHz to 20 GHz
RBW/VBW: 300 kHz

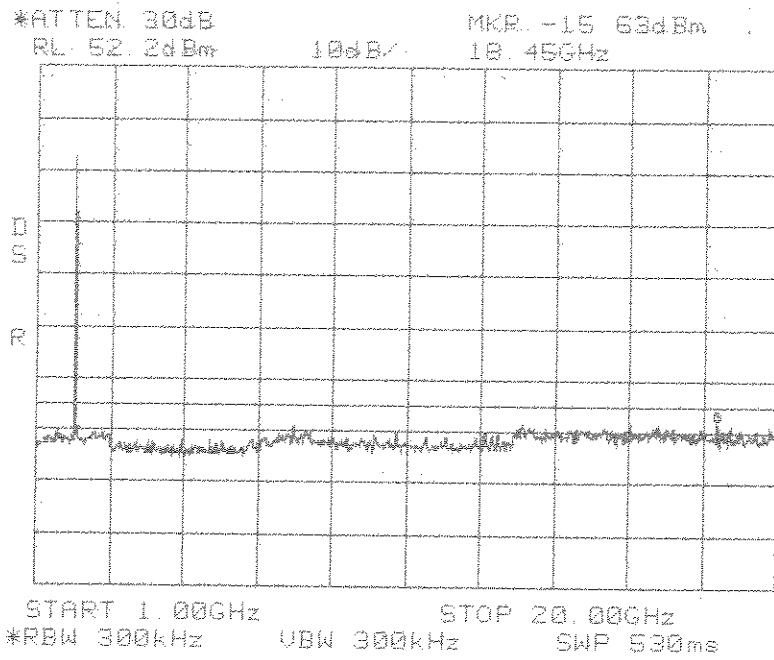


**Intermodulation
Close
Upper
CDMA
PCS 1900 MHz
C Band**

Center: 1982.5 MHz
Span: 25 MHz
RBW/VBW: 30 kHz

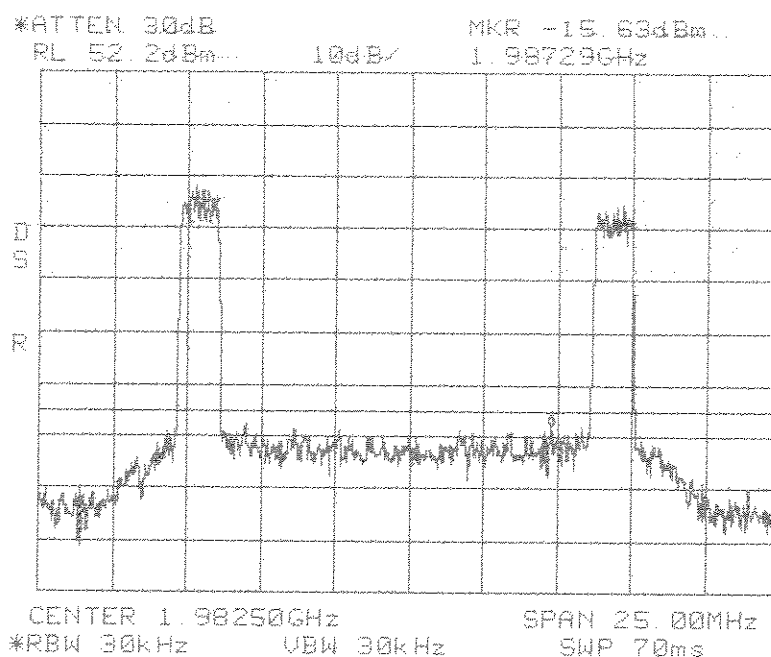


**Intermodulation
Apart
CDMA
PCS 1900 MHz
C Band**

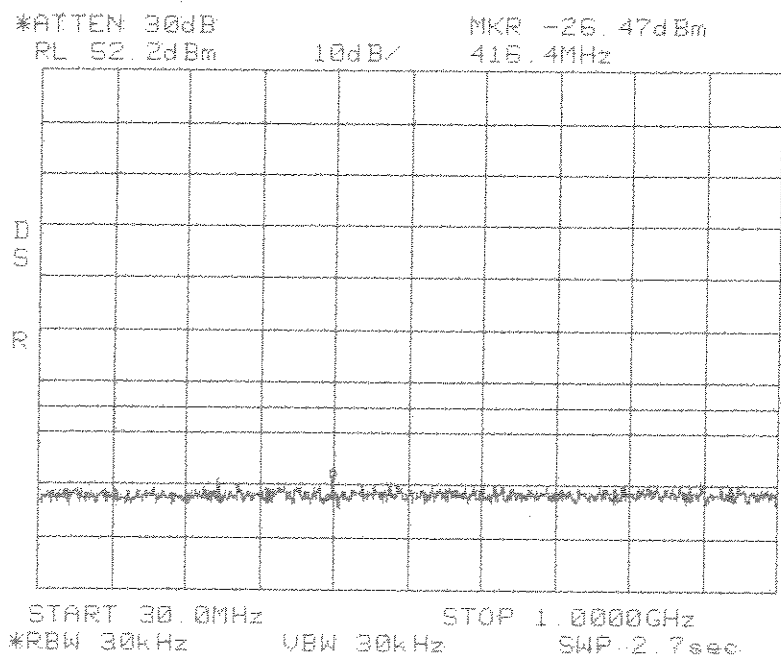

**Intermodulation
Apart
CDMA
PCS 1900 MHz
C Band**


Span: 30 MHz to 1 GHz
RBW/VBW: 30 kHz

Span: 1 GHz to 20 GHz
RBW/VBW: 300 kHz

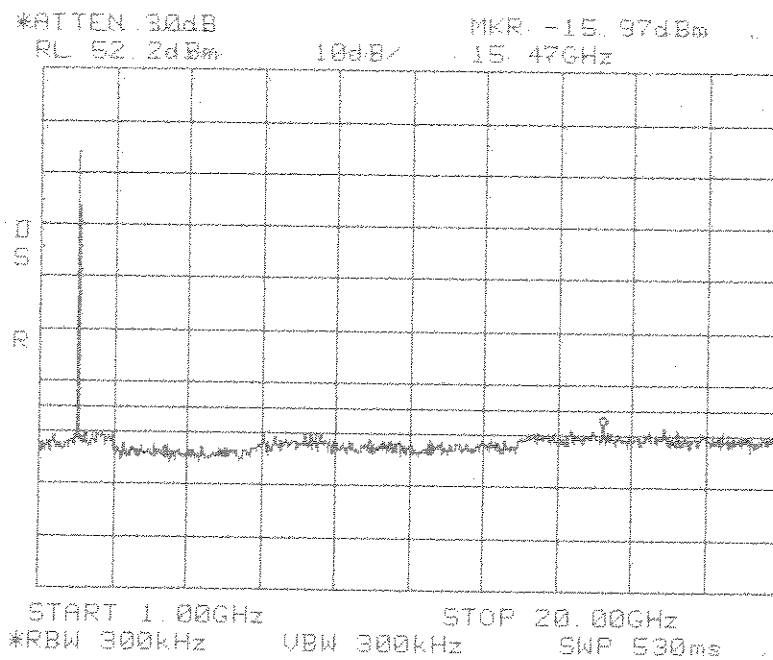


**Intermodulation
Apert
CDMA
PCS 1900 MHz
C Band**

Center: 1982.5 MHz
Span: 25 MHz
RBW/VBW: 30 kHz

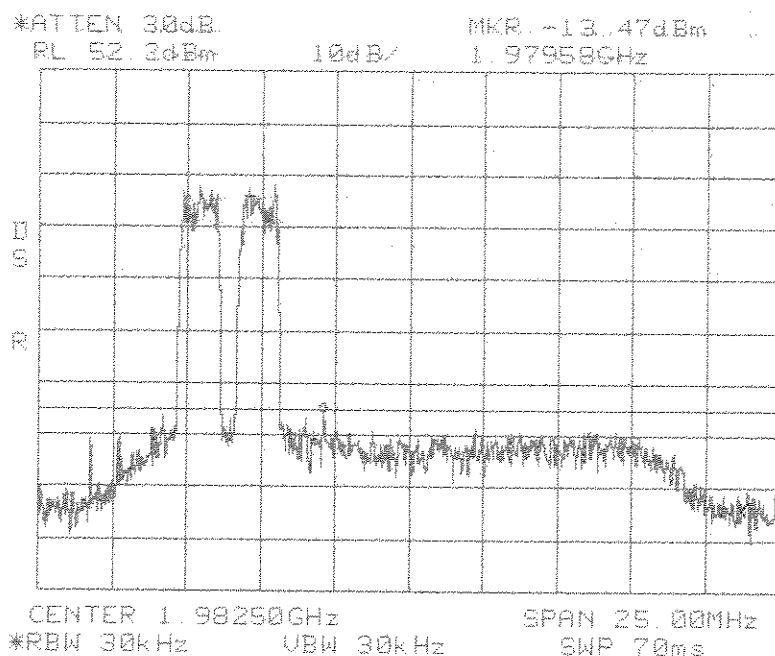


Intermodulation
Close
Lower
CDMA2000
PCS 1900 MHz
C Band
1xRTT

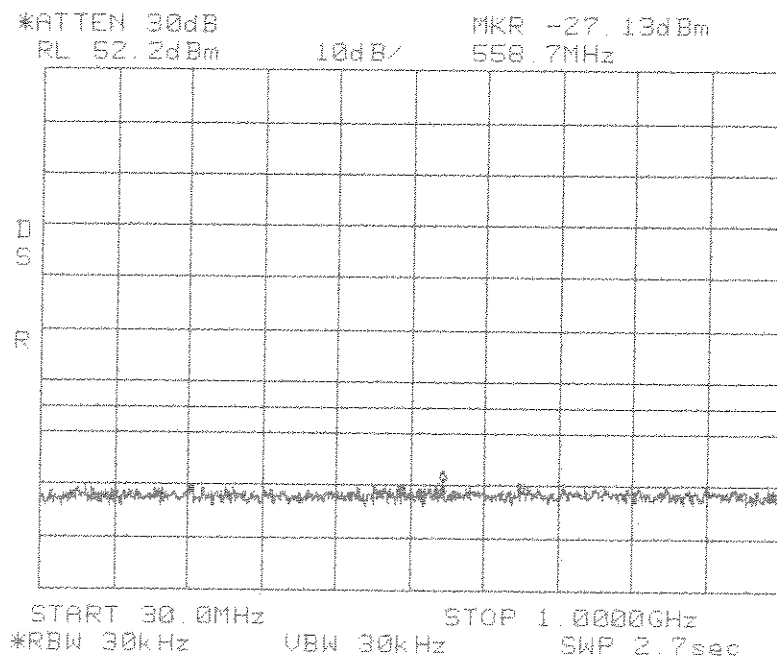

Intermodulation
Close
Lower
CDMA2000
PCS 1900 MHz
C Band
1xRTT


Span: 30 MHz to 1 GHz
RBW/VBW: 30 kHz

Span: 1 GHz to 20 GHz
RBW/VBW: 300 kHz

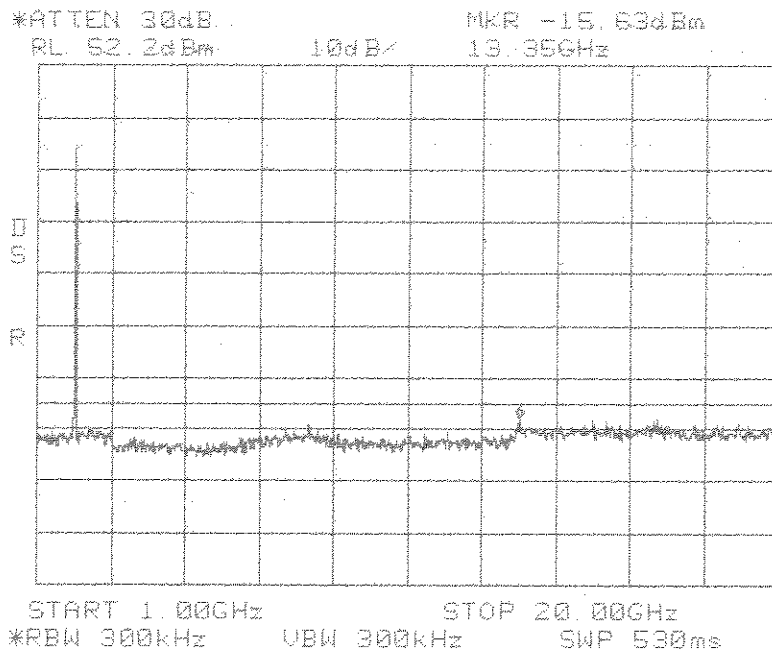


**Intermodulation
Close
Lower
CDMA2000
PCS 1900 MHz
C Band
1xRTT**

Center: 1982.5 MHz
Span: 25 MHz
RBW/VBW: 30 kHz

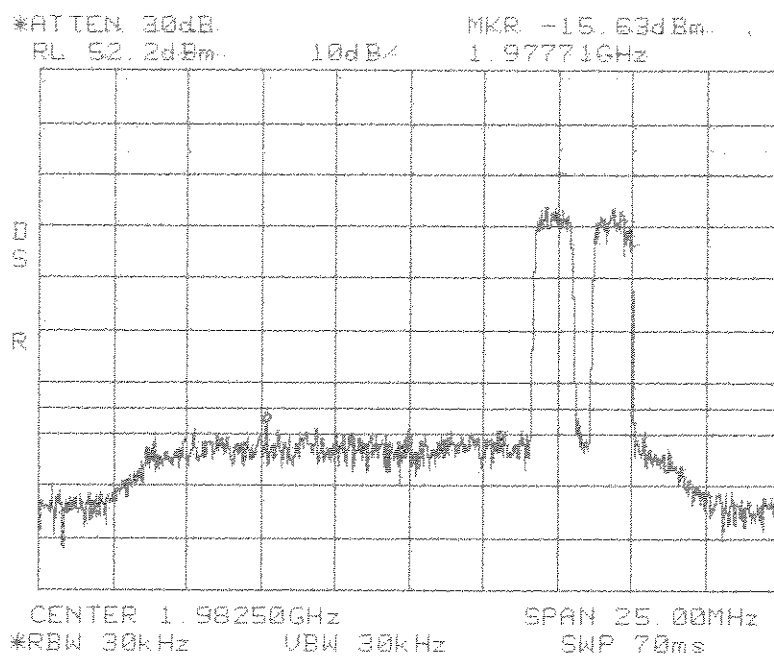


**Intermodulation
Close
Upper
CDMA2000
PCS 1900 MHz
C Band
1xRTT**

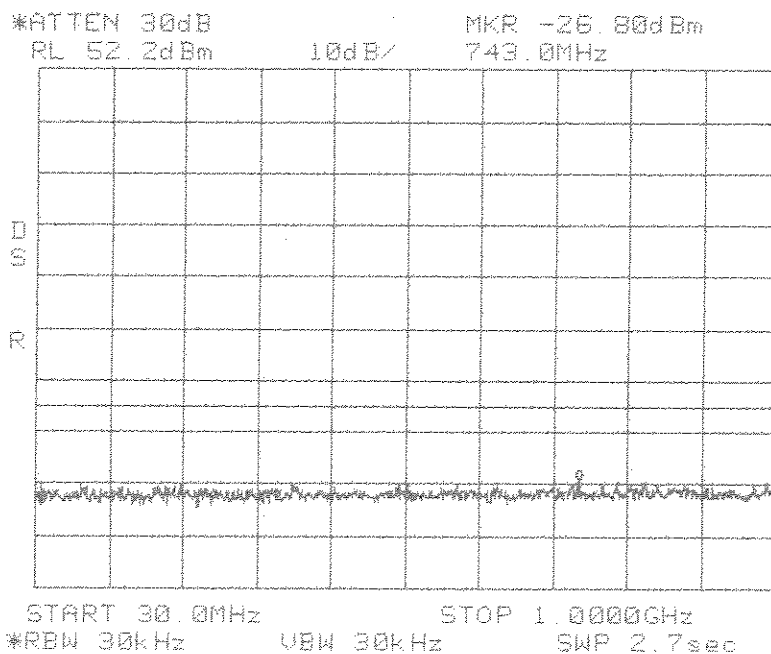

**Intermodulation
Close
Upper
CDMA2000
PCS 1900 MHz
C Band
1xRTT**


Span: 30 MHz to 1 GHz
RBW/VBW: 30 kHz

Span: 1 GHz to 20 GHz
RBW/VBW: 300 kHz

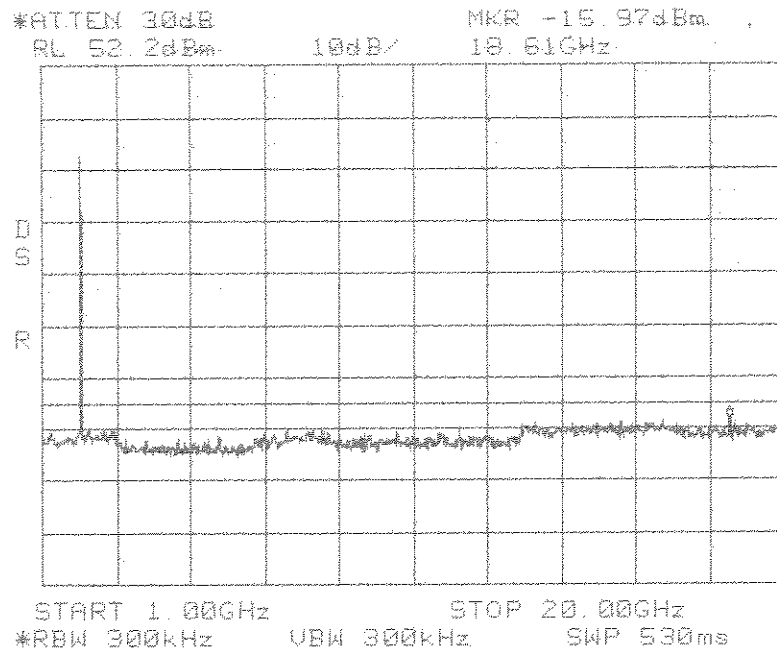


Intermodulation
Close
Upper
CDMA2000
PCS 1900 MHz
C Band
1xRTT

Center: 1982.5 MHz
Span: 25 MHz
RBW/VBW: 30 kHz

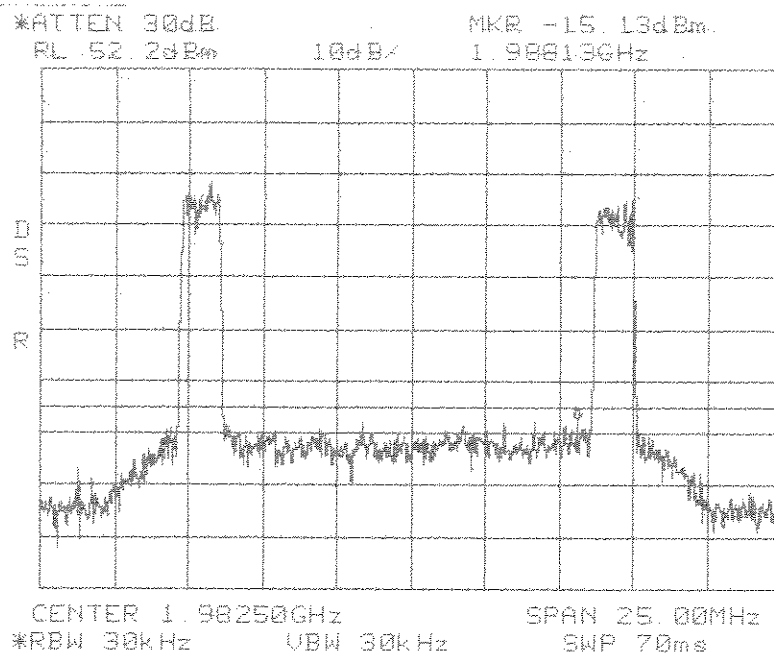


**Intermodulation
Apart
CDMA2000
PCS 1900 MHz
C Band**
1xRTT

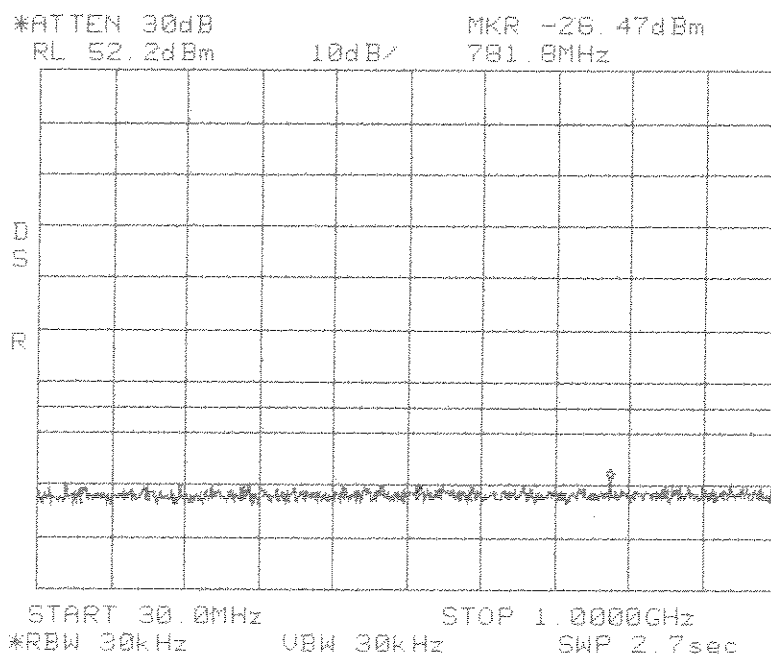

**Intermodulation
Apart
CDMA2000
PCS 1900 MHz
C Band**
1xRTT

Span: 30 MHz to 1 GHz
RBW/VBW: 30 kHz

Span: 1 GHz to 20 GHz
RBW/VBW: 300 kHz

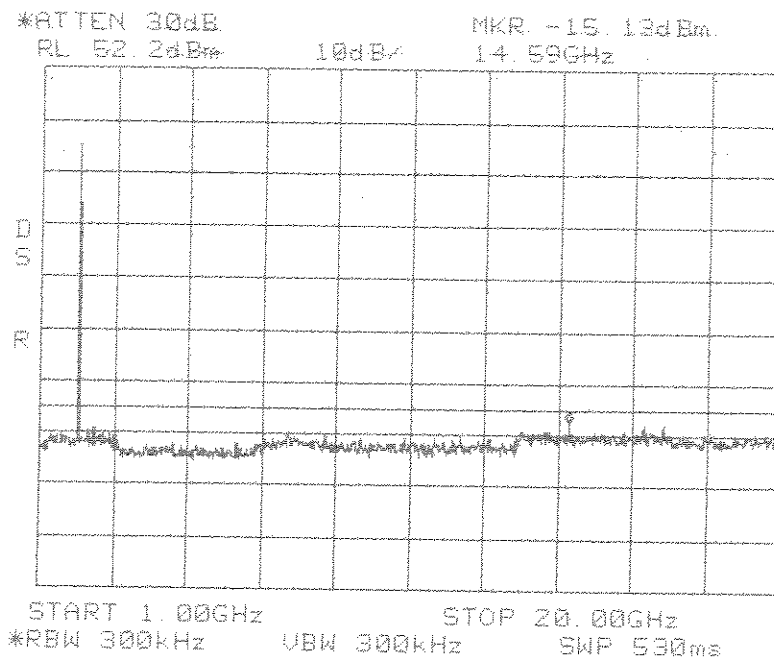

Intermodulation
Apart
CDMA2000
PCS 1900 MHz
C Band
1xRTT

Appendix B

Constructional Data Form



EMC Test Plan and Constructional Data Form



PLEASE COMPLETE THIS DOCUMENT IN FULL, ENTERING N/A IF THE FIELD IS NOT APPLICABLE.

Applicant -- NOTE: This information will be input into your test report as shown below.
Press the F1 key at any time to get HELP for the current field selected.

Company: ADC Inc.

Address: P.O. Box 1101
Minneapolis, MN 55440-1101

Contact: Mark F. Miska Position: Compliance Engineer

Phone: 952-403-8340 Fax: 952-403-8858

E-mail Address: mark.miska@adc.com

General Equipment Description -- NOTE: This information will be input into your test report as shown below.

EUT Description Transports RF between a remote antenna and base station.

EUT Name Digivance® CXD 1900 MHz EFC Band

Model No.: DGVF-05000000XXCRN Serial No.: None

Product Options: Receive Diversity

Configurations to be tested: PCS 1900 MHz E, F, and C Band

Test Objective

- | | |
|--|---|
| ☐ EMC Directive 89/336/EEC (EMC) | ☒ FCC: Class ☐ A ☐ B Part <u>24</u> |
| Std: _____ | ☐ VCCI: Class ☐ A ☐ B |
| ☐ Machinery Directive 89/392/EEC (EMC) | ☐ BCIC: Class ☐ A ☐ B |
| Std: _____ | ☐ Canada: Class ☐ A ☐ B |
| ☐ Medical Device Directive 93/42/EEC (EMC) | ☐ Australia: Class ☐ A ☐ B |
| Std: _____ | ☐ Other: _____ |
| ☐ Vehicle Directive 72/245/EEC (EMC) | |
| Std: _____ | |
| ☐ FDA Reviewers Guidance for Premarket Notification Submissions (EMC) | |

TÜV Product Service Certification Requested

- | | |
|--|---|
| ☐ Attestation of Conformity (AoC) | ☐ International EMC Mark (IEM) |
| ☐ Certificate of Conformity (CoC) | ☐ Compliance Document |
| Protection Class (N/A for vehicles) | ☐ Class I ☐ Class II ☐ Class III |

EMC Test Plan and Constructional Data Form



(Press **F1** when field is selected to show additional information on Protection Class.)

Attendance

Test will be: ☒ Attended by the customer ☐ Unattended by the customer

Failure - Complete this section if testing will not be attended by the customer.

If a failure occurs, TÜV Product Service should:

- ☐ Call contact listed above, if not available then stop testing. (After hrs phone): _____
- ☐ Continue testing to complete test series.
- ☐ Continue testing to define corrective action.
- ☐ Stop testing.

EUT Specifications and Requirements

Length: 18" Width: 11" Height: 23" Weight: 95 LBS

Power Requirements

Regulations require testing to be performed at typical power ratings in the countries of intended use. (i.e., European power is typically 230 VAC 50 Hz or 400 VAC 50 Hz, single and three phase, respectively)

Voltage: 176-238 VAC (If battery powered, make sure battery life is sufficient to complete testing.)

of Phases: 1

Current (Amps/phase(max)): 6/4 Current (Amps/phase(nominal)): 4

Other _____

Other Special Requirements

none

Typical Installation and/or Operating Environment

(ie. Hospital, Small Business, Industrial/Factory, etc.)

Host indoor only with Remote Unit indoor or outdoor. System is typically employed as a Microcell.

EMC Test Plan and Constructional Data Form



EUT Power Cable

☐ Permanent	OR	☒ Removable	Length (in meters): <u>1</u>
☐ Shielded	OR	☒ Unshielded	
☐ Not Applicable			

EMC Test Plan and Constructional Data Form

EUT Interface Ports and Cables												
Interface			Shielding									
Type	Analog	Digital	Qty	Yes	No	Type	Termination	Connector Type	Port Termination	Length (in meters)	Removable	Permanent
EXAMPLE:												
RS232	☐	☒	2	☒	☐	Foil over braid	Coaxial	Metallized 9-pin D-Sub	Characteristic Impedance	6	☒	☐
RF "N" type	☒	☐	2	☒	☐	Braid	Coaxial	N	50 Ohms	2	☒	☐
RF "SMA" type	☒	☐	63	☐	☒	Braid	Coaxial	SMA	50 Ohms	3	☒	☐
12V DC	☒	☐	5	☐	☒	N/A	N/A	3 Pin Standoff		3	☒	☐
Fiber	☐	☒	4	☐	☒	N/A	N/A	SC	N/A	3	☒	☐
PA CNTRL	☐	☒	2	☒	☐	N/A	N/A	8 Pin Standoff		3	☒	☐
AC power	☒	☐	3	☐	☒	N/A				3	☒	☐
Battery Connection	☒	☐	9	☐	☒	N/A	N/A	2 Pin Standoff		1	☒	☐
RJ-45	☒	☐	117	☐	☒	N/A	N/A	RJ-45		1	☒	☐
RS-232	☒	☐	4	☐	☒	N/A	N/A	9 Pin D-Sub		1	☒	☐
Fan Power	☒	☐	2	☐	☒	N/A	N/A	18 Pin Standoff		1	☒	☐
USB	☒	☐	1	☐	☒	N/A	N/A	USB		1	☒	☐
	☐	☐		☐	☐						☐	☐

EMC Test Plan and Constructional Data Form

EUT Software.

Revision Level: SNMP v1 & v2

Description: Digivance Element Management System (DEMS). System Management and Interface Matching Software.

EUT Operating Modes to be Tested -- list the operating modes to be used during test. It is recommended the equipment be tested while operating in a typical operation mode. FCC testing of personal computers and/or peripherals requires that a simple program generate a complete line of upper case H's. Provide a general description of all software, firmware, and PLD algorithms used in the equipment. List all code modules as described above, with the revision level used during testing. Consult with your TÜV Product Service Representative if additional assistance is required.

1. Max composite out
- 2.
- 3.

EUT System Components -- List and describe all components which are part of the EUT. For FCC testing a minimum configuration is required. (ie. Mouse, Printer, Monitor, External Disk Drive, Motherboard, etc.)

Description	Model #	Serial #	FCC ID #
HUB	OP-DC-DIGCH2	None	
RAN	DGVF-0204000023CRN	None	
Digivance CXD System consist of the HUB and RAN.		None	

EMC Test Plan and Constructional Data Form

Support Equipment -- List and describe all support equipment which is not part of the EUT. (i.e. peripherals, simulators, etc)			
<i>Description</i>	<i>Model #</i>	<i>Serial #</i>	<i>FCC ID #</i>
Power Supply	Xantrex HPD 60-5	MC 27764	
Signal Generator	Agilent E4436B	963739	
Ethernet Switch	Netgear	N/A	

Oscillator Frequencies			
<i>Frequency</i>	<i>Derived Frequency</i>	<i>Component # / Location</i>	<i>Description of Use</i>

Power Supply			
<i>Manufacturer</i>	<i>Model #</i>	<i>Serial #</i>	<i>Type</i>
			☐ Switched-mode: (Frequency) _____ ☐ Linear ☐ Other: _____
			☐ Switched-mode: (Frequency) _____ ☐ Linear ☐ Other: _____

Power Line Filters		
<i>Manufacturer</i>	<i>Model #</i>	<i>Location in EUT</i>
None		

EMC Test Plan and Constructional Data Form**Critical EMI Components (Capacitors, ferrites, etc.)**

<i>Description</i>	<i>Manufacturer</i>	<i>Part # or Value</i>	<i>Qty</i>	<i>Component # / Location</i>
None				

EMC Critical Detail -- Describe other EMC Design details used to reduce high frequency noise.

None

(PLEASE INSERT "ELECTRONIC SIGNATURE" BELOW IF POSSIBLE)

Authorization Signatures

Customer authorization to perform tests
according to this test plan.

Date

Test Plan/CDF Prepared By (please print)

Date

Reviewed by TÜV Product Service Associate

Date

Appendix C

Measurement Protocol



MEASUREMENT PROTOCOL

Environmental conditions in the lab, (TUV)

Temperature: 22 °C
Relative Humidity: 22 %
Atmospheric pressure: 98.0 kPa

Test Methodology

Emissions testing is performed according to the procedures in ANSI C63.4-2003.

Measurement Uncertainty

The test system for conducted emissions is defined as the LISN, tuned receiver or spectrum analyzer, and coaxial cable. The test system has a measurement uncertainty of ± 1.8 dB. The test system for radiated emissions is defined as the antenna, the pre-amplifier, the spectrum analyzer and the coaxial cable. The test system has a measurement uncertainty of ± 4.8 dB. The equipment comprising the test systems is calibrated on an annual basis.

Justification

The Equipment Under Test (EUT) is configured in a typical user arrangement in accordance with the manufacturer's instructions. A cable is connected to each available port and either terminated with a peripheral into its characteristic impedance or left unterminated. When appropriate, the cables are manually manipulated with respect to each other to obtain maximum emissions from the unit.

Radiated Emissions

The final level, in dB μ V/m, equals the reading from the spectrum analyzer (Level dB μ V), adding the antenna correction factor and cable loss factor (Factor dB) to it, and subtracting the preamp gain (and duty cycle correction factor, if applicable). This result then has the limit subtracted from it to provide the Delta, which gives the tabular data as shown in the data sheets in Attachment A.

Example:

FREQ (MHz)	LEVEL (dB μ V)	CABLE/ANT/PREAMP (dB) (dB/m) (dB)	FINAL (dB μ V/m)	POL/HGT/AZ (m) (deg)	DELTA1
60.80	42.5Qp +	1.2 + 10.9 - 25.5 =	29.1	V 1.0 0.0	-10.9

Substitution Method

A radiated emission scan was also made, at TUV America's Wild River Lab Large Test Site, with the EUT's antenna replaced with a termination to demonstrate case radiation compliance to the -13 dBm requirement. Radiated emissions from the EUT are measured in the frequency range of 30 to 10000 MHz using a spectrum analyzer and appropriate broadband linearly polarized antennas. Table top equipment is placed on a 1.0 X 1.5 meter non-conducting table 80 centimeters above the ground plane. Floor standing equipment is placed directly on the turntable/ground plane. Interface cables that are closer than 40 centimeters to the ground plane are bundled in the center in a serpentine fashion so they are at least 40 centimeters from the ground plane. Cables to simulators/testers (if used in this test) are routed through the center of the table and to a screen room located outside the test area. The antenna is positioned 3 meters horizontally from the EUT. To locate maximum emissions from the test sample the antenna is varied in height from 1 to 4 meters, measurement scans are made with both horizontal and vertical antenna polarizations and the EUT are rotated 360 degrees. The field strength levels were measured per ANSI C63.4. The EUT is then replaced with a tuned dipole antenna (below 1 GHz) or horn antenna (above 1 GHz). The substitute antenna was placed in the same polarization as the test antenna. A signal generator was used to generate a signal level that matched the highest level measured from the EUT. The signal generator level minus the cable loss from the signal generator to the substitute antenna plus the substitute antenna gain equals the spurious power level.

Test Equipment

All measurement instrumentation is traceable to the National Institute of Standards and Technology and is calibrated according to internal procedure.