

TEST RESULT SUMMARY

FCC PART 24 SUBPART E

MANUFACTURER'S NAME	ADC, Inc.
NAME OF EQUIPMENT	Digivance 1900 MHz 20 Watt System (A, B, C, D, E, and F Band)
MODEL NUMBER	DGVL-436100SYS DGVL-446100SYS DGVL-456100SYS DGVL-466100SYS
MANUFACTURER'S ADDRESS	PO Box 1101 Minneapolis MN 55440
TEST REPORT NUMBER	NC303065
TEST DATE	01 & 05 July 2003

According to testing performed at TÜV Product Service Inc, the above-mentioned unit is in compliance with the electromagnetic compatibility requirements defined in FCC Part 24 Subpart E.

It is the manufacturer's responsibility to assure that additional production units of this model are manufactured with identical electrical and mechanical characteristics. Any modifications necessary for compliance made during testing on the above mentioned date(s) must be implemented in all production units for compliance to be maintained.


TÜV Product Service Inc, as an independent testing laboratory, declares that the equipment tested as specified above conforms to the requirements of FCC Part 24 Subpart E.

Date: 13 August 2003

Location: Taylors Falls MN
USA



K. T. H. Rose
Test Engineer



T. K. Swanson
Test Technician

Not Transferable

EMC EMISSION - TEST REPORT

Test Report File No. : **NC303065** Date of issue: 13 August 2003Model No. : **DGVL-436100SYS**
DGVL-446100SYS
DGVL-456100SYS
DGVL-466100SYS

Product Type : Digivance 1900 MHz 20 Watt System (A, B, C, D, E, and F Band)

Applicant : ADC, Inc.

Manufacturer : ADC, Inc.

License holder : ADC, Inc.

Address : PO Box 1101
: Minneapolis MN 55440Test Result : Positive NegativeTest Project Number :
Reference(s) : **NC303065**Total pages including
Appendices : **239**

TÜV Product Service Inc is a subcontractor to TÜV Product Service, GmbH according to the principles outlined in ISO/IEC Guide 25 and EN 45001. TÜV Product Service Inc reports apply only to the specific samples tested under stated test conditions. It is the manufacturer's responsibility to assure that additional production units of this model are manufactured with identical electrical and mechanical components. TÜV Product Service Inc shall have no liability for any deductions, inferences or generalizations drawn by the client or others from TÜV Product Service Inc issued reports. This report is the confidential property of the client. As a mutual protection to our clients, the public and ourselves, extracts from the test report shall not be reproduced except in full without our written approval. This report shall not be used by the client to claim product endorsement by NVLAP or any agency of the US government.

TÜV Product Service Inc and its professional staff hold government and professional organization certifications and are members of AAMI, ACIL, AEA, ANSI, IEEE, NVLAP, and VCCI

D I R E C T O R Y - E M I S S I O N S

	Page(s)
A) Documentation	
Test report	1 – 232
Directory	2
Test Regulations	3
B) Test data	
Conducted emissions per 15.207	N/A
24.232 Power and Antenna Height Limits	4 - 5
24.235 Frequency Stability	6 - 35
24.238 Emission Limits	36 - 142
Intermodulation Data	143 - 228
Test Setup Photo(s) & Drawings	See Test Setup Exhibit
Product Information Form	A1 – A7

Sign Explanations:

- not applicable
- applicable

EMISSIONS TEST REGULATIONS :

The emissions tests were performed according to following regulations:

- | | | |
|---|---|------------------------------------|
| <input type="checkbox"/> - EN 50081-1 / 1991 | <input type="checkbox"/> - Group 1 | <input type="checkbox"/> - Group 2 |
| <input type="checkbox"/> - EN 55011 / 1991 | <input type="checkbox"/> - Class A | <input type="checkbox"/> - Class B |
| <input type="checkbox"/> - EN 55013 / 1990 | <input type="checkbox"/> - Household appliances and similar | |
| <input type="checkbox"/> - EN 55014 / 1987 | <input type="checkbox"/> - Portable tools | |
| | <input type="checkbox"/> - Semiconductor devices | |
| <input type="checkbox"/> - EN 55014 / A2:1990 | <input type="checkbox"/> - Household appliances and similar | |
| <input type="checkbox"/> - EN 55014 / 1993 | <input type="checkbox"/> - Portable tools | |
| | <input type="checkbox"/> - Semiconductor devices | |
| <input type="checkbox"/> - EN 55015 / 1987 | <input type="checkbox"/> - Class A | <input type="checkbox"/> - Class B |
| <input type="checkbox"/> - EN 55015 / A1:1990 | | |
| <input type="checkbox"/> - EN 55015 / 1993 | | |
| <input type="checkbox"/> - EN 55022 / 1987 | | |
| <input checked="" type="checkbox"/> - FCC Part 24 Subpart E | | |
| <input type="checkbox"/> - BS | <input type="checkbox"/> - Class A | <input type="checkbox"/> - Class B |
| <input type="checkbox"/> - VCCI | <input type="checkbox"/> - Class A | <input type="checkbox"/> - Class B |
| <input type="checkbox"/> - FCC | <input type="checkbox"/> - Class A | <input type="checkbox"/> - Class B |
| <input type="checkbox"/> - AS 3548 (1992) | <input type="checkbox"/> - Class A | <input type="checkbox"/> - Class B |
| <input type="checkbox"/> - CISPR 11 (1990) | <input type="checkbox"/> - Group 1 | <input type="checkbox"/> - Group 2 |
| | <input type="checkbox"/> - Class A | <input type="checkbox"/> - Class B |
| <input type="checkbox"/> - CISPR 22 (1993) | <input type="checkbox"/> - Class A | <input type="checkbox"/> - Class B |

Emissions Test Conditions: CONDUCTED EMISSIONS (Interference Voltage) per 15.207

The **CONDUCTED EMISSIONS (INTERFERENCE VOLTAGE)** measurements were performed at the following test location:

- Test not applicable

- Wild River Lab Large Test Site (Open Area Test Site)
- Wild River Lab Small Test Site (Open Area Test Site)
- Oakwood Lab (Open Area Test Site)
- Wild River Lab Screen Room
- New Brighton Lab Shielded Room

24.232 Effective Radiated Power Limit

The **Effective Radiated Power Limit** measurements were tested at the following test location:

- Test not applicable

- ADC facility

Test equipment used:

Model Number	Manufacturer	Description	Serial Number	Cal Due
■ - E4437B	HP	Signal Generator	39260515	Sept 04
■ - ZAPD-21	Mini-Circuits	Combiner	N/A	CNR
■ - 50FH-030-300		Attenuator	N/A	CNR
■ - HPD60-5	Xantrex	DC Power Supply	MC27841	CNR
■ - 8594E	HP	Spectrum Analyzer	MC27761	April 04

All measurement instrumentation is traceable to the National Institute of Standards and Technology (NIST) and is calibrated annually. Equipment labeled CNR (Calibration Not Required) is verified and compensated for with NIST traceable calibrated equipment.

This measurement was made as a direct conducted emission measurement. The output from the EUT antenna connector was connected directly to the spectrum analyzer, which was set up with a 1 MHz resolution bandwidth. The spectrum analyzer level was offset by -35 dB to compensate for the attenuator placed between the EUT and the analyzer, and by 2 dB for the measured cable loss between the EUT and the analyzer.

ERP data on next page

**Effective Isotropic Radiated Power Limit Test for ADC Inc.
 Digivance 1900 MHz 20 Watt System
 Model Numbers DGVL-436100SYS, DGVL-446100SYS,
 DGVL-456100SYS and DGVL-466100SYS.**

*Note: The EUT is a fixed repeater and not a base station.

This measurement was made as a direct conducted emission measurement. The output from the EUT antenna connector was connected to the spectrum analyzer. The Carrier Output, below, was conducted using a single CW signal generator. The spectrum analyzer level was offset to compensate for attenuators and cable loss between the EUT and the analyzer.

A CW signal was used at the low, mid and high parts of the selected band. The spectrum analyzer level was offset by 51.3 dB to compensate for attenuators and cable loss between the EUT and the analyzer.

Band A	
Carrier Frequency	Carrier Output
1930.0 MHz	+ 40.97 dBm
1937.0 MHz	+ 40.67 dBm
1945.0 MHz	+ 41.30 dBm

Band D	
Carrier Frequency	Carrier Output
1945.0 MHz	+ 4.097 dBm
1947.0 MHz	+ 42.13 dBm
1950.0 MHz	+ 42.63 dBm

Band B	
Carrier Frequency	Carrier Output
1950.0 MHz	+ 41.63 dBm
1957.0 MHz	+ 41.47 dBm
1965.0 MHz	+ 41.47 dBm

Band E	
Carrier Frequency	Carrier Output
1965.0 MHz	+ 40.67 dBm
1967.0 MHz	+ 40.83 dBm
1970.0 MHz	+ 40.67 dBm

Band C	
Carrier Frequency	Carrier Output
1975.0 MHz	+ 40.97 dBm
1982.0 MHz	+ 41.30 dBm
1990.0 MHz	+ 40.97 dBm

Band F	
Carrier Frequency	Carrier Output
1970.0 MHz	+ 40.67 dBm
1972.0 MHz	+ 40.17 dBm
1975.0 MHz	+ 40.67 dBm

24.235 Frequency Stability

The Frequency Stability measurements were tested at the following test location:

- Test not applicable

■ - ADC facility

Test equipment used:

Model Number	Manufacturer	Description	Serial Number	Cal Due
■ - E4437B	HP	Signal Generator	39260515	Sept 04
■ - ZAPD-21	Mini-Circuits	Combiner	N/A	CNR
■ - 50FH-030-300		Attenuator	N/A	CNR
■ - HPD60-5	Xantrex	DC Power Supply	MC27841	CNR
■ - 1520CT	Staco	Variable AutoTransformer	MC44655	CNR
■ - 5347A	HP	Freq. Counter	MC27569	Jan 04
■ -	Thermotron	Temp Chamber	MC27885	CNR

All measurement instrumentation is traceable to the National Institute of Standards and Technology (NIST) and is calibrated annually. Equipment labeled CNR (Calibration Not Required) is verified and compensated for with NIST traceable calibrated equipment.

Frequency Stability measurements on following pages:

**Frequency Tolerance Test for ADC Inc
Digivance 1900 MHz 20 Watt System
Model Numbers DGVL-436100SYS, DGVL-446100SYS,
DGVL-456100SYS and DGVL-466100SYS.**

EUT Band A and D Selected

Input Voltage	Carrier Frequency	Measured Frequency	Meets requirement?
102 VAC	1930.000000 MHz	1930.000000 MHz	YES
120 VAC	1930.000000 MHz	1930.000000 MHz	YES
138 VAC	1930.000000 MHz	1930.000000 MHz	YES
102 VAC	1940.000000 MHz	1940.000000 MHz	YES
120 VAC	1940.000000 MHz	1940.000000 MHz	YES
138 VAC	1940.000000 MHz	1940.000000 MHz	YES
102 VAC	1950.000000 MHz	1950.000000 MHz	YES
120 VAC	1950.000000 MHz	1950.000000 MHz	YES
138 VAC	1950.000000 MHz	1950.000000 MHz	YES
Temperature	Carrier Frequency	Measured Frequency	Meets requirement?
-30 Deg C	1930.000000 MHz	1930.000000 MHz	YES
-20 Deg C	1930.000000 MHz	1930.000000 MHz	YES
-10 Deg C	1930.000000 MHz	1930.000000 MHz	YES
0 Deg. C	1930.000000 MHz	1930.000000 MHz	YES
10 Deg C	1930.000000 MHz	1930.000000 MHz	YES
20 Deg C	1930.000000 MHz	1930.000000 MHz	YES
30 Deg C	1930.000000 MHz	1930.000000 MHz	YES
40 Deg C	1930.000000 MHz	1930.000000 MHz	YES
50 Deg C	1930.000000 MHz	1930.000000 MHz	YES
-30 Deg C	1940.000000 MHz	1940.000000 MHz	YES
-20 Deg C	1940.000000 MHz	1940.000000 MHz	YES
-10 Deg C	1940.000000 MHz	1940.000000 MHz	YES
0 Deg. C	1940.000000 MHz	1940.000000 MHz	YES
10 Deg C	1940.000000 MHz	1940.000000 MHz	YES
20 Deg C	1940.000000 MHz	1940.000000 MHz	YES
30 Deg C	1940.000000 MHz	1940.000000 MHz	YES
40 Deg C	1940.000000 MHz	1940.000000 MHz	YES
50 Deg C	1940.000000 MHz	1940.000000 MHz	YES
-30 Deg C	1950.000000 MHz	1950.000000 MHz	YES
-20 Deg C	1950.000000 MHz	1950.000000 MHz	YES
-10 Deg C	1950.000000 MHz	1950.000000 MHz	YES
0 Deg. C	1950.000000 MHz	1950.000000 MHz	YES
10 Deg C	1950.000000 MHz	1950.000000 MHz	YES
20 Deg C	1950.000000 MHz	1950.000000 MHz	YES
30 Deg C	1950.000000 MHz	1950.000000 MHz	YES
40 Deg C	1950.000000 MHz	1950.000000 MHz	YES
50 Deg C	1950.000000 MHz	1950.000000 MHz	YES

EUT Band D, B, and E Selected

Input Voltage	Carrier Frequency	Measured Frequency	Meets requirement?
102 VAC	1945.000000 MHz	1945.000000 MHz	YES
120 VAC	1945.000000 MHz	1945.000000 MHz	YES
138 VAC	1945.000000 MHz	1945.000000 MHz	YES
102 VAC	1960.000000 MHz	1960.000000 MHz	YES
120 VAC	1960.000000 MHz	1960.000000 MHz	YES
138 VAC	1960.000000 MHz	1960.000000 MHz	YES
102 VAC	1970.000000 MHz	1970.000000 MHz	YES
120 VAC	1970.000000 MHz	1970.000000 MHz	YES
138 VAC	1970.000000 MHz	1970.000000 MHz	YES
Temperature	Carrier Frequency	Measured Frequency	Meets requirement?
-30 Deg C	1945.000000 MHz	1945.000000 MHz	YES
-20 Deg C	1945.000000 MHz	1945.000000 MHz	YES
-10 Deg C	1945.000000 MHz	1945.000000 MHz	YES
0 Deg. C	1945.000000 MHz	1945.000000 MHz	YES
10 Deg C	1945.000000 MHz	1945.000000 MHz	YES
20 Deg C	1945.000000 MHz	1945.000000 MHz	YES
30 Deg C	1945.000000 MHz	1945.000000 MHz	YES
40 Deg C	1945.000000 MHz	1945.000000 MHz	YES
50 Deg C	1945.000000 MHz	1945.000000 MHz	YES
-30 Deg C	1960.000000 MHz	1960.000000 MHz	YES
-20 Deg C	1960.000000 MHz	1960.000000 MHz	YES
-10 Deg C	1960.000000 MHz	1960.000000 MHz	YES
0 Deg. C	1960.000000 MHz	1960.000000 MHz	YES
10 Deg C	1960.000000 MHz	1960.000000 MHz	YES
20 Deg C	1960.000000 MHz	1960.000000 MHz	YES
30 Deg C	1960.000000 MHz	1960.000000 MHz	YES
40 Deg C	1960.000000 MHz	1960.000000 MHz	YES
50 Deg C	1960.000000 MHz	1960.000000 MHz	YES
-30 Deg C	1970.000000 MHz	1970.000000 MHz	YES
-20 Deg C	1970.000000 MHz	1970.000000 MHz	YES
-10 Deg C	1970.000000 MHz	1970.000000 MHz	YES
0 Deg. C	1970.000000 MHz	1970.000000 MHz	YES
10 Deg C	1970.000000 MHz	1970.000000 MHz	YES
20 Deg C	1970.000000 MHz	1970.000000 MHz	YES
30 Deg C	1970.000000 MHz	1970.000000 MHz	YES
40 Deg C	1970.000000 MHz	1970.000000 MHz	YES
50 Deg C	1970.000000 MHz	1970.000000 MHz	YES

EUT Band B, E, and F Selected

Input Voltage	Carrier Frequency	Measured Frequency	Meets requirement?
102 VAC	1950.000000 MHz	1950.000000 MHz	YES
120 VAC	1950.000000 MHz	1950.000000 MHz	YES
138 VAC	1950.000000 MHz	1950.000000 MHz	YES
102 VAC	1965.000000 MHz	1965.000000 MHz	YES
120 VAC	1965.000000 MHz	1965.000000 MHz	YES
138 VAC	1965.000000 MHz	1965.000000 MHz	YES
102 VAC	1975.000000 MHz	1975.000000 MHz	YES
120 VAC	1975.000000 MHz	1975.000000 MHz	YES
138 VAC	1975.000000 MHz	1975.000000 MHz	YES
Temperature	Carrier Frequency	Measured Frequency	Meets requirement?
-30 Deg C	1950.000000 MHz	1950.000000 MHz	YES
-20 Deg C	1950.000000 MHz	1950.000000 MHz	YES
-10 Deg C	1950.000000 MHz	1950.000000 MHz	YES
0 Deg. C	1950.000000 MHz	1950.000000 MHz	YES
10 Deg C	1950.000000 MHz	1950.000000 MHz	YES
20 Deg C	1950.000000 MHz	1950.000000 MHz	YES
30 Deg C	1950.000000 MHz	1950.000000 MHz	YES
40 Deg C	1950.000000 MHz	1950.000000 MHz	YES
50 Deg C	1950.000000 MHz	1950.000000 MHz	YES
-30 Deg C	1965.000000 MHz	1965.000000 MHz	YES
-20 Deg C	1965.000000 MHz	1965.000000 MHz	YES
-10 Deg C	1965.000000 MHz	1965.000000 MHz	YES
0 Deg. C	1965.000000 MHz	1965.000000 MHz	YES
10 Deg C	1965.000000 MHz	1965.000000 MHz	YES
20 Deg C	1965.000000 MHz	1965.000000 MHz	YES
30 Deg C	1965.000000 MHz	1965.000000 MHz	YES
40 Deg C	1965.000000 MHz	1965.000000 MHz	YES
50 Deg C	1965.000000 MHz	1965.000000 MHz	YES
-30 Deg C	1975.000000 MHz	1975.000000 MHz	YES
-20 Deg C	1975.000000 MHz	1975.000000 MHz	YES
-10 Deg C	1975.000000 MHz	1975.000000 MHz	YES
0 Deg. C	1975.000000 MHz	1975.000000 MHz	YES
10 Deg C	1975.000000 MHz	1975.000000 MHz	YES
20 Deg C	1975.000000 MHz	1975.000000 MHz	YES
30 Deg C	1975.000000 MHz	1975.000000 MHz	YES
40 Deg C	1975.000000 MHz	1975.000000 MHz	YES
50 Deg C	1975.000000 MHz	1975.000000 MHz	YES

EUT Band E, F, and C Selected

Input Voltage	Carrier Frequency	Measured Frequency	Meets requirement?
102 VAC	1965.000000 MHz	1965.000000 MHz	YES
120 VAC	1965.000000 MHz	1965.000000 MHz	YES
138 VAC	1965.000000 MHz	1965.000000 MHz	YES
102 VAC	1980.000000 MHz	1980.000000 MHz	YES
120 VAC	1980.000000 MHz	1980.000000 MHz	YES
138 VAC	1980.000000 MHz	1980.000000 MHz	YES
102 VAC	1990.000000 MHz	1990.000000 MHz	YES
120 VAC	1990.000000 MHz	1990.000000 MHz	YES
138 VAC	1990.000000 MHz	1990.000000 MHz	YES
Temperature	Carrier Frequency	Measured Frequency	Meets requirement?
-30 Deg C	1965.000000 MHz	1965.000000 MHz	YES
-20 Deg C	1965.000000 MHz	1965.000000 MHz	YES
-10 Deg C	1965.000000 MHz	1965.000000 MHz	YES
0 Deg. C	1965.000000 MHz	1965.000000 MHz	YES
10 Deg C	1965.000000 MHz	1965.000000 MHz	YES
20 Deg C	1965.000000 MHz	1965.000000 MHz	YES
30 Deg C	1965.000000 MHz	1965.000000 MHz	YES
40 Deg C	1965.000000 MHz	1965.000000 MHz	YES
50 Deg C	1965.000000 MHz	1965.000000 MHz	YES
-30 Deg C	1980.000000 MHz	1980.000000 MHz	YES
-20 Deg C	1980.000000 MHz	1980.000000 MHz	YES
-10 Deg C	1980.000000 MHz	1980.000000 MHz	YES
0 Deg. C	1980.000000 MHz	1980.000000 MHz	YES
10 Deg C	1980.000000 MHz	1980.000000 MHz	YES
20 Deg C	1980.000000 MHz	1980.000000 MHz	YES
30 Deg C	1980.000000 MHz	1980.000000 MHz	YES
40 Deg C	1980.000000 MHz	1980.000000 MHz	YES
50 Deg C	1980.000000 MHz	1980.000000 MHz	YES
-30 Deg C	1990.000000 MHz	1990.000000 MHz	YES
-20 Deg C	1990.000000 MHz	1990.000000 MHz	YES
-10 Deg C	1990.000000 MHz	1990.000000 MHz	YES
0 Deg. C	1990.000000 MHz	1990.000000 MHz	YES
10 Deg C	1990.000000 MHz	1990.000000 MHz	YES
20 Deg C	1990.000000 MHz	1990.000000 MHz	YES
30 Deg C	1990.000000 MHz	1990.000000 MHz	YES
40 Deg C	1990.000000 MHz	1990.000000 MHz	YES
50 Deg C	1990.000000 MHz	1990.000000 MHz	YES

Note: EUT Host is specified for indoor use only with temperature range of 0 to +50° C and was tested within its range.

Note: EUT STM and LPA are specified with a temperature range of -30 to +50° C and were tested with their range.

**Occupied Bandwidth Modulation Test for ADC Inc.
Digivance 1900 MHz 20 Watt System
Model Numbers DGVL-436100SYS, DGVL-446100SYS,
DGVL-456100SYS and DGVL-466100SYS.**

An input/output Occupied Bandwidth test was done with three different modulation types: FM (1 kHz @ 8 kHz deviation) TDMA, and CDMA. The purpose was to determine the amount of distortion added to different types of modulation schemes by the EUT. The following plots show input signals vs. output signals.

Results:

Pass (see plots)


Occupied Band Width
Fm IN

BAND A,D

*ATTEN 10dB
RL -.7dBm

10dB/

ΔMKR -.17dB
21.15kHz

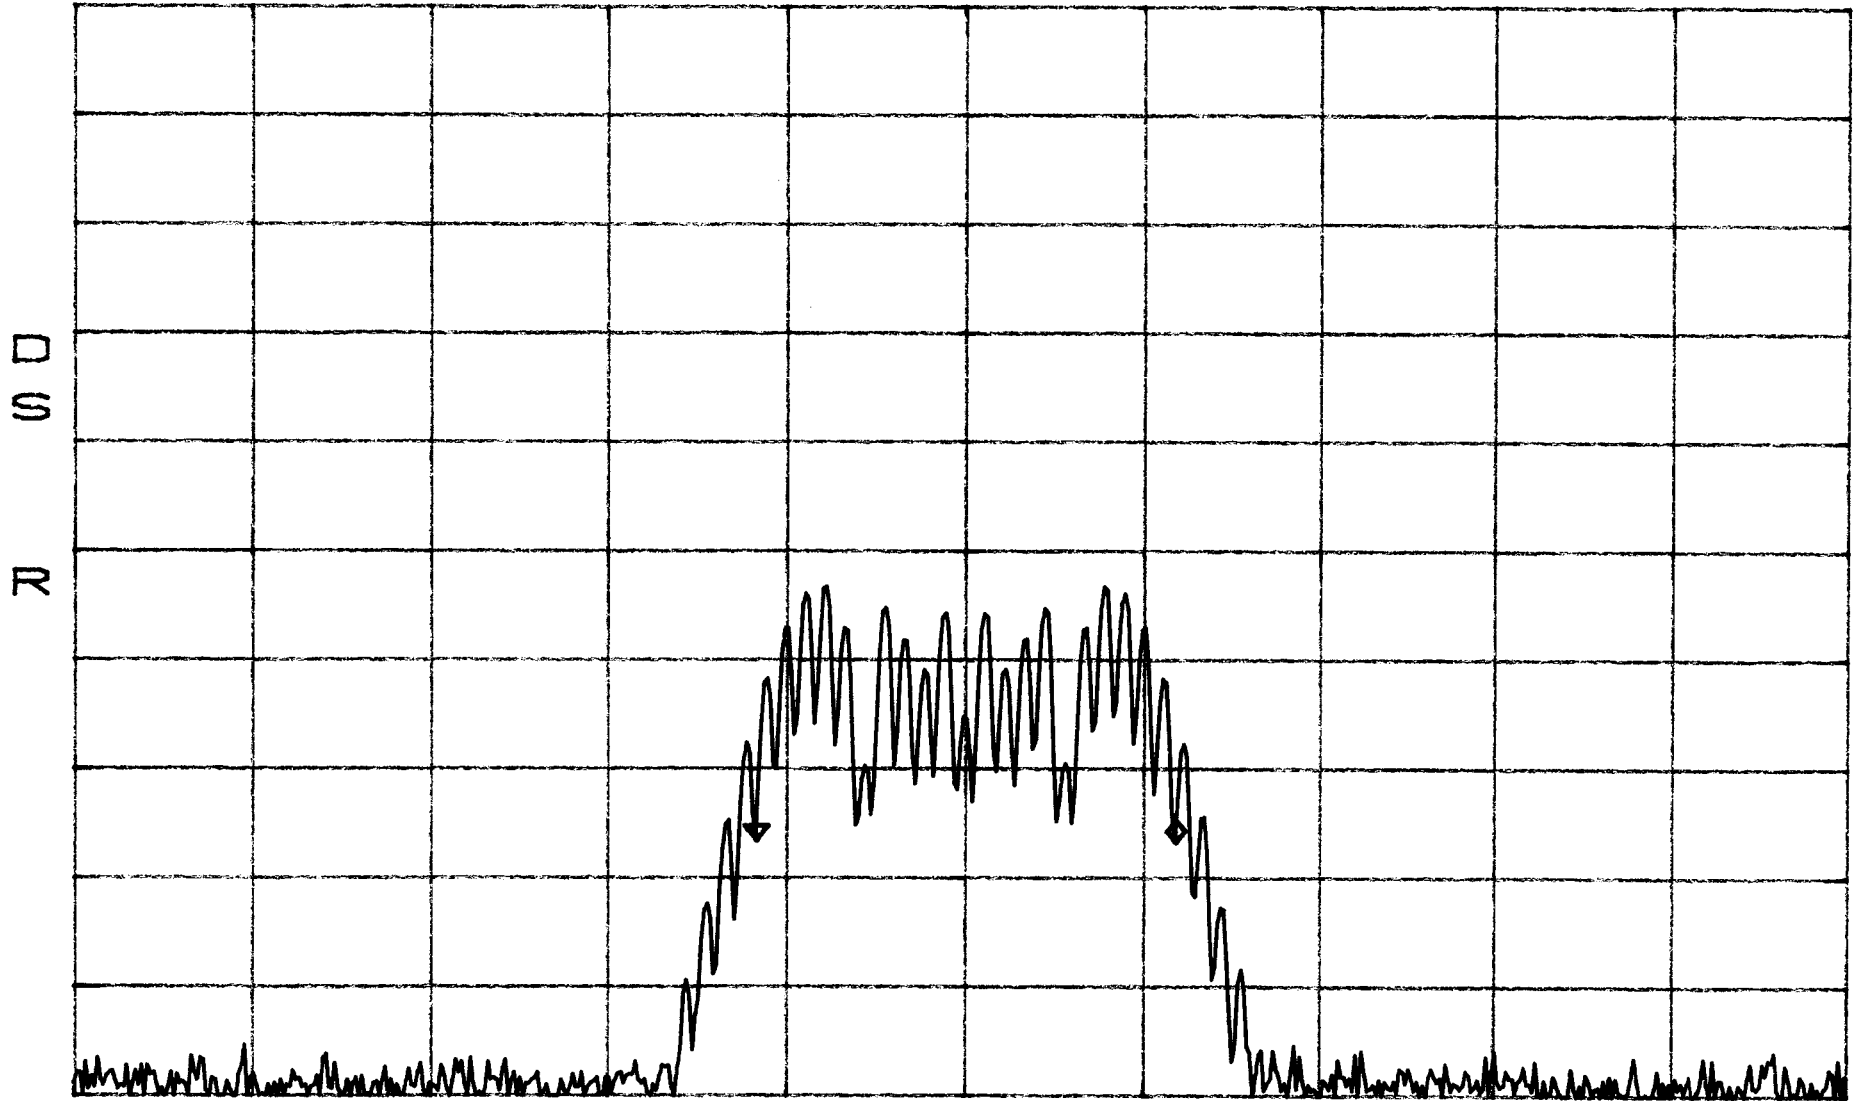

CENTER 1.94000000GHz
*RBW 300Hz *VBW 3.0kHz

SPAN 90.00kHz
SWP 2.5sec


Occupied Band Width
FM OUT

BAND A,D

*ATTEN 30dB
RL 51.3dBm

Δ MKR -3.83dB
21.30kHz

10dB/

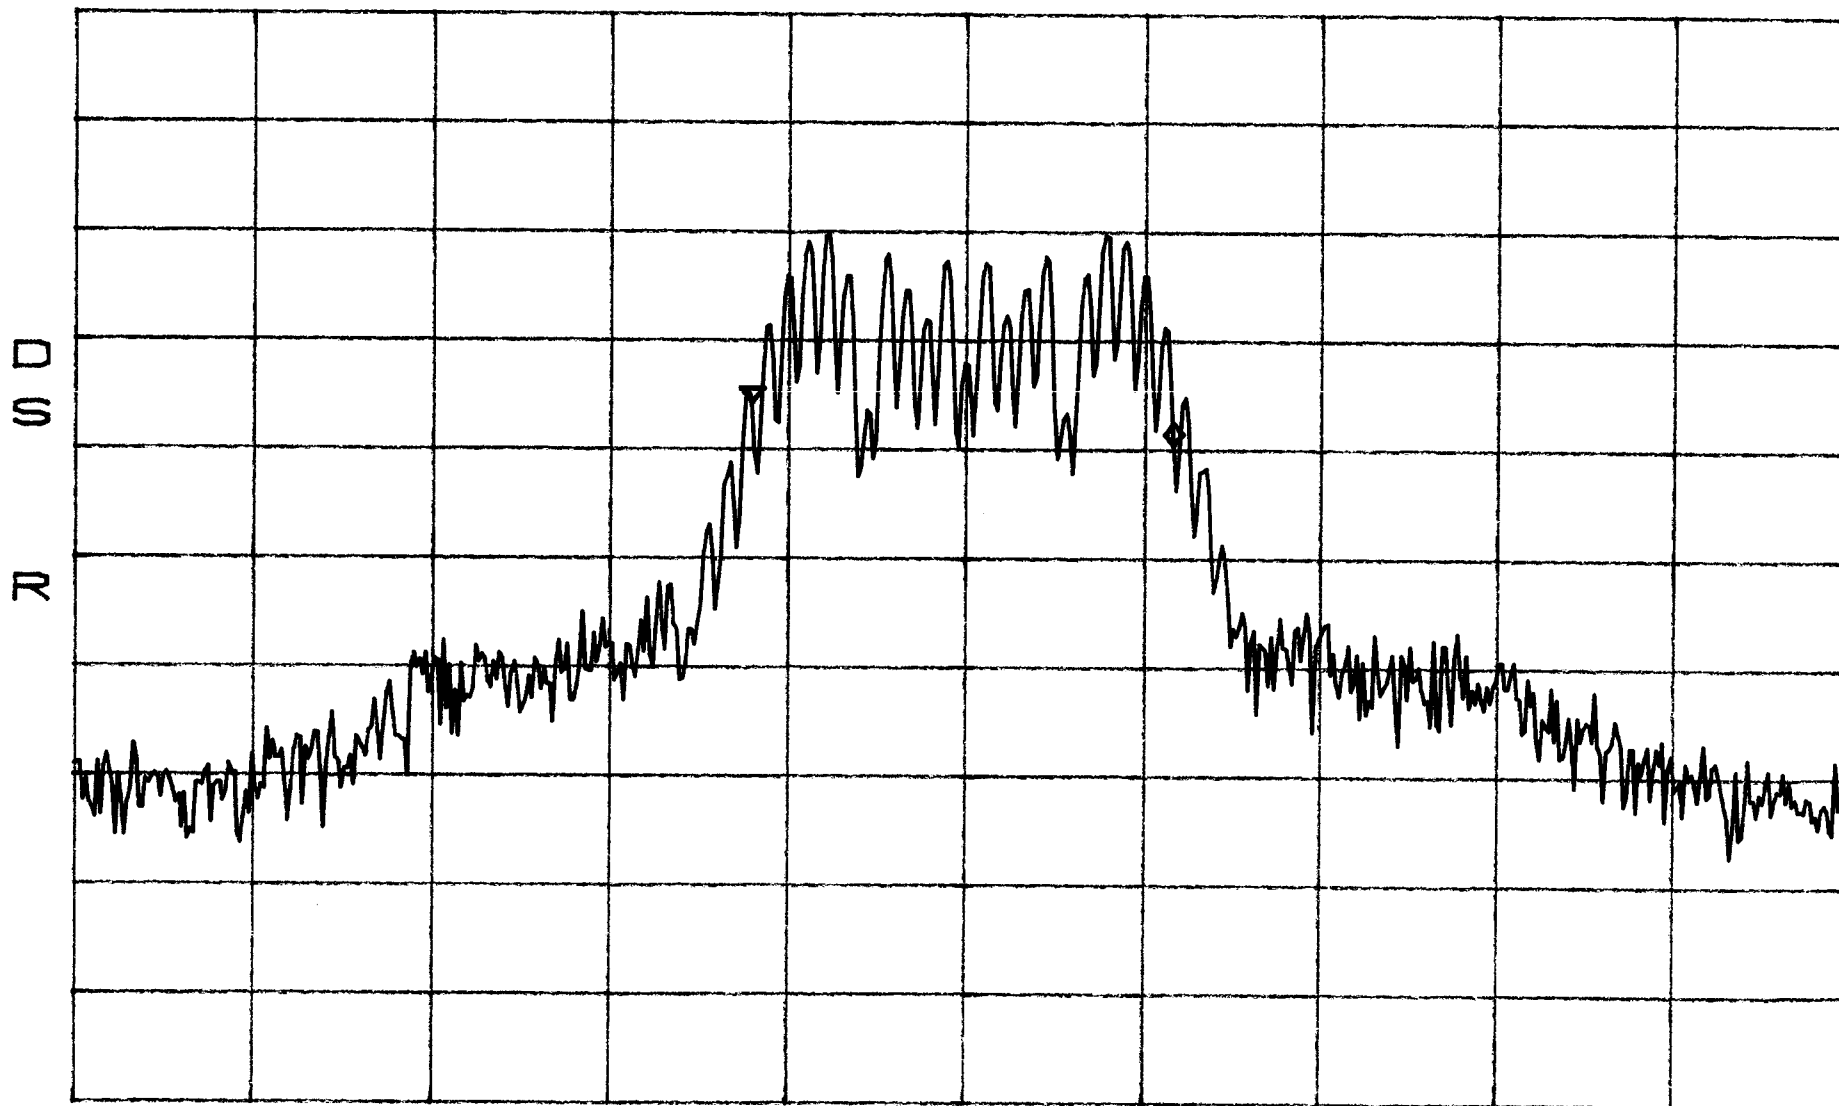

CENTER 1.94000000GHz

SPAN 90.00kHz

*RBW 300Hz


*VBW 3.0kHz

SWP 2.5sec

Occupied Band Width BAND A,D
TDMA IN

*ATTEN 10dB
RL -.7dBm

ΔMKR -.66dB
27.90kHz

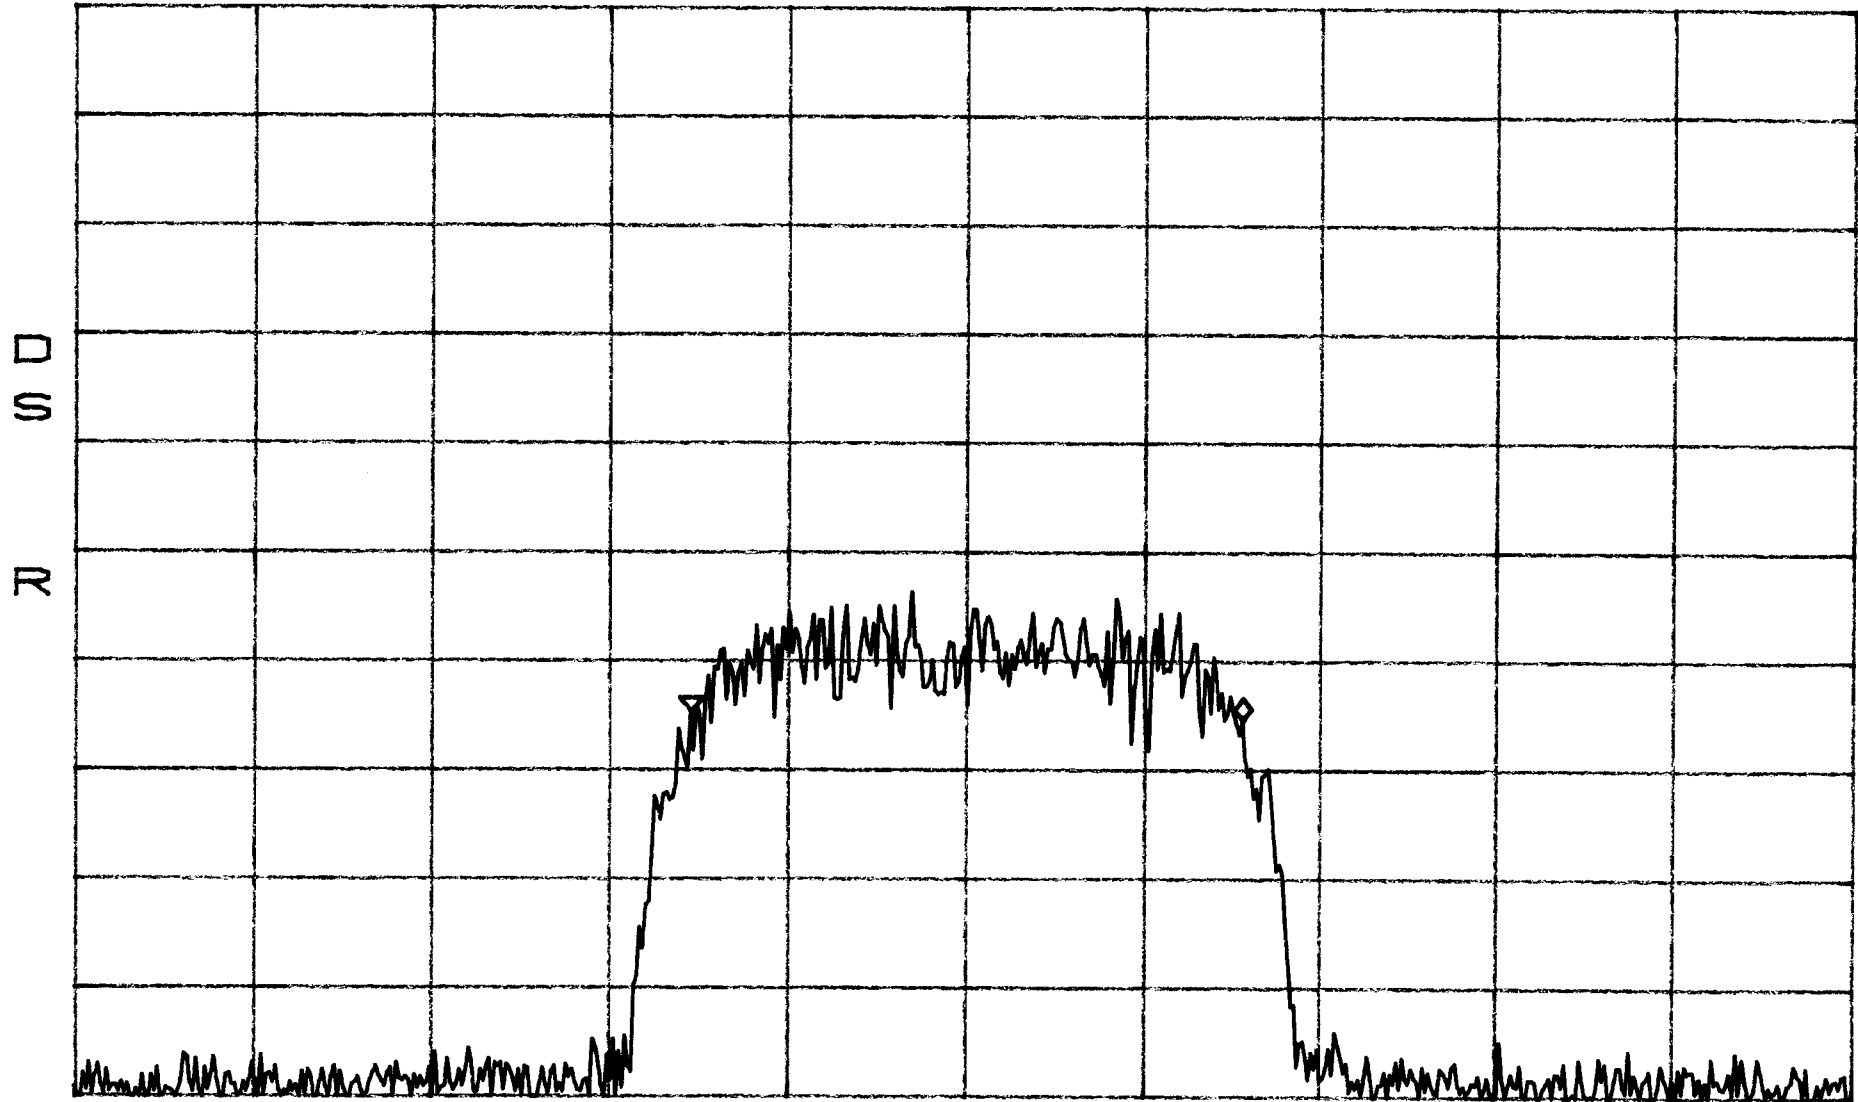


CENTER 1.94000000GHz SPAN 90.00kHz
*RBW 300Hz *VBW 3.0kHz SWP 2.5sec

Occupied Band Width BAND A,D
TDMA OUT

*ATTEN 30dB
RL 51.3dBm

Δ MKR -4.17dB
28.65kHz

10dB/

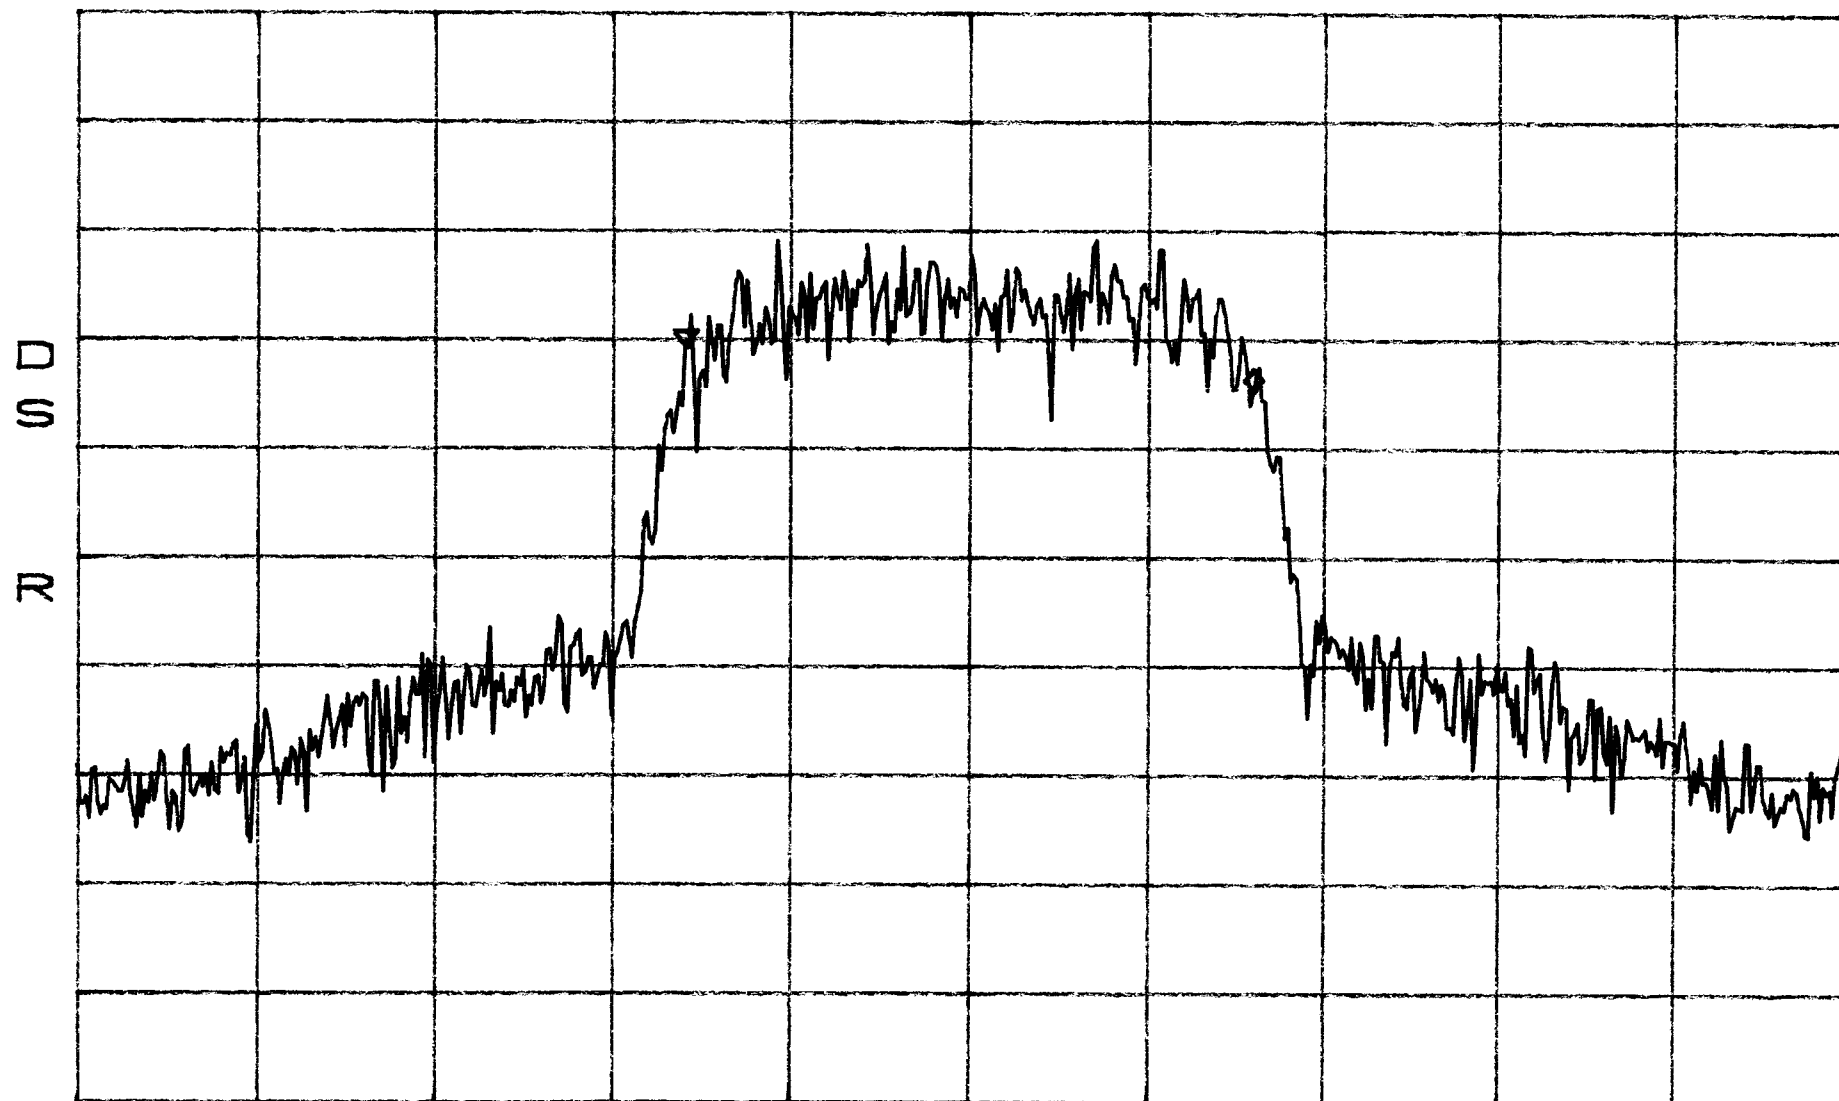

CENTER 1.94000000GHZ

SPAN 90.00kHz

*RBW 300Hz


*VBW 3.0kHz

SWP 2.5sec

Occupied BAND width BAND A,D
CDMA IN

*ATTEN 10dB
RL -.7dBm

Δ MKR -1.33B
1.292MHz

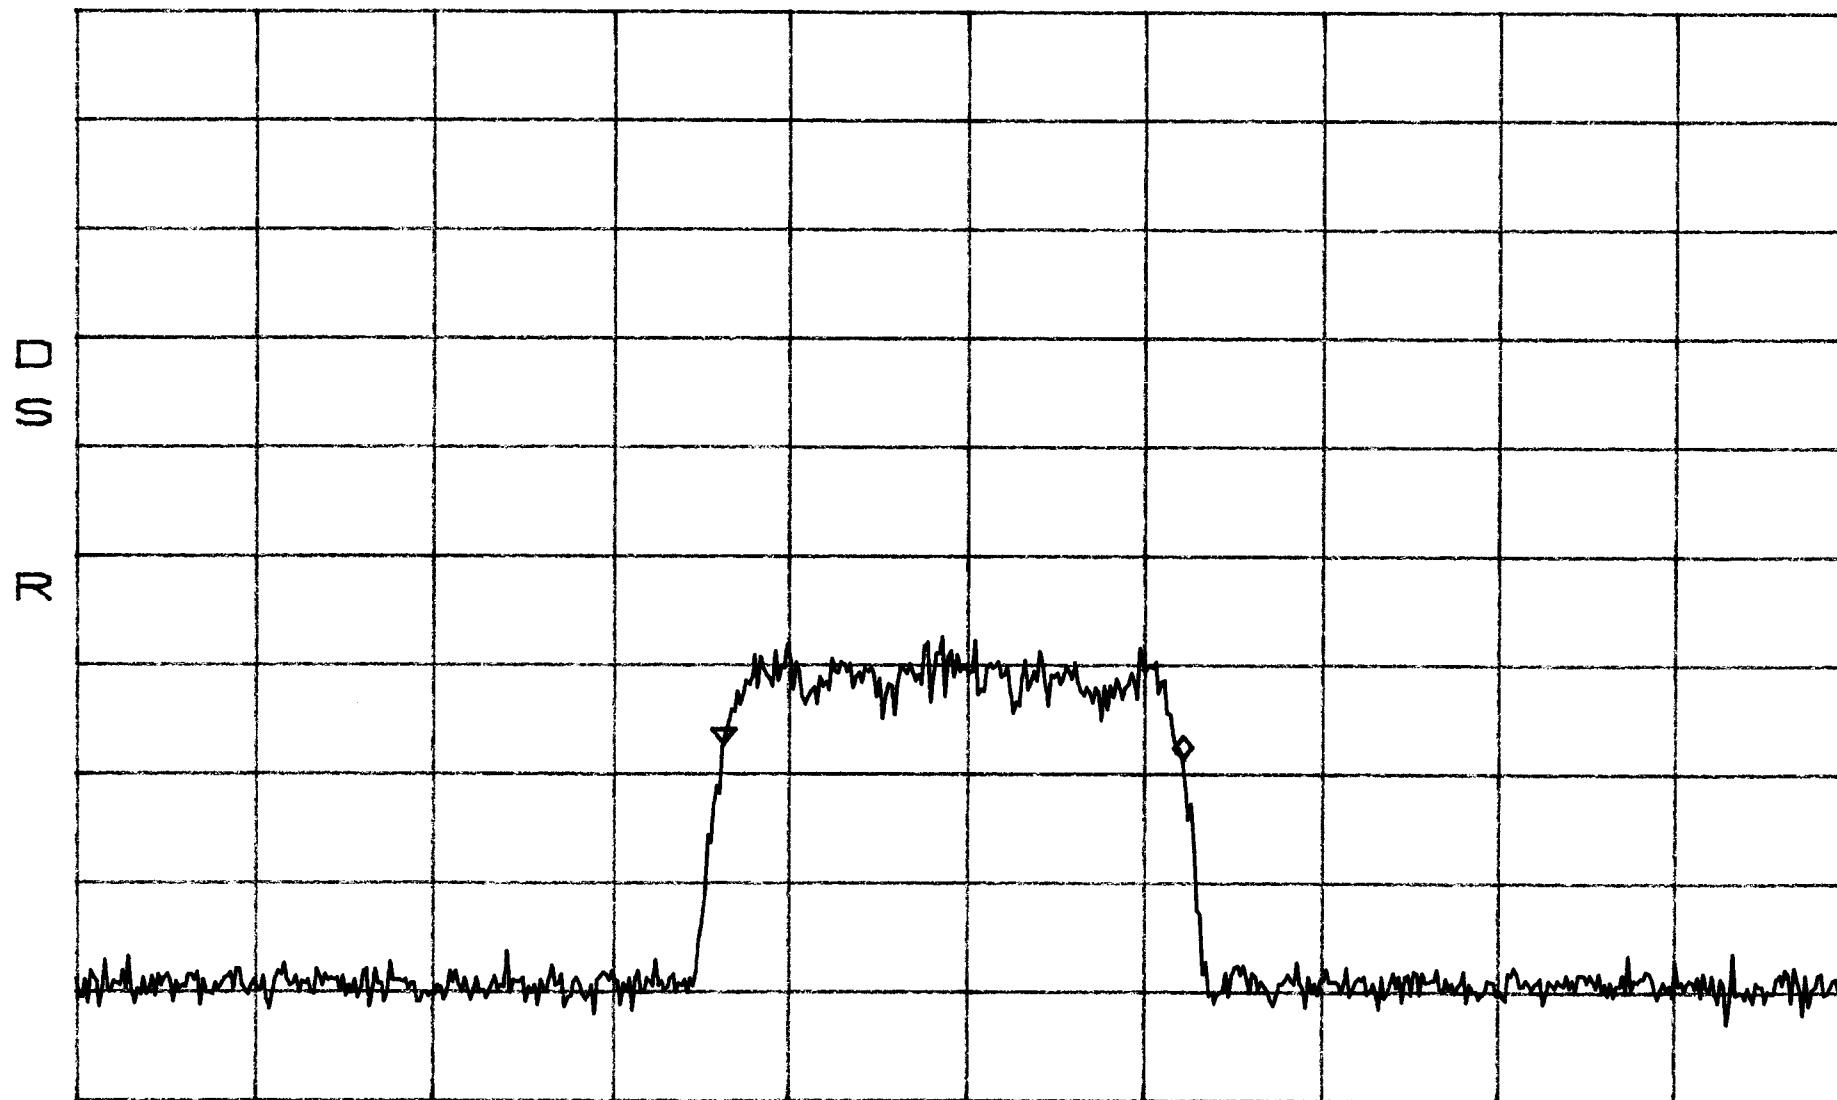


CENTER 1.940000GHZ SPAN 5.000MHZ
*RBW 10KHZ *VBW 3.0KHZ SWP 420ms

Occupied Band width BAND A,D
CDMA OUT

*ATTN 30dB
BPOE
RL 51.3dBm

Δ MKR -1.83dB
1.25MHz

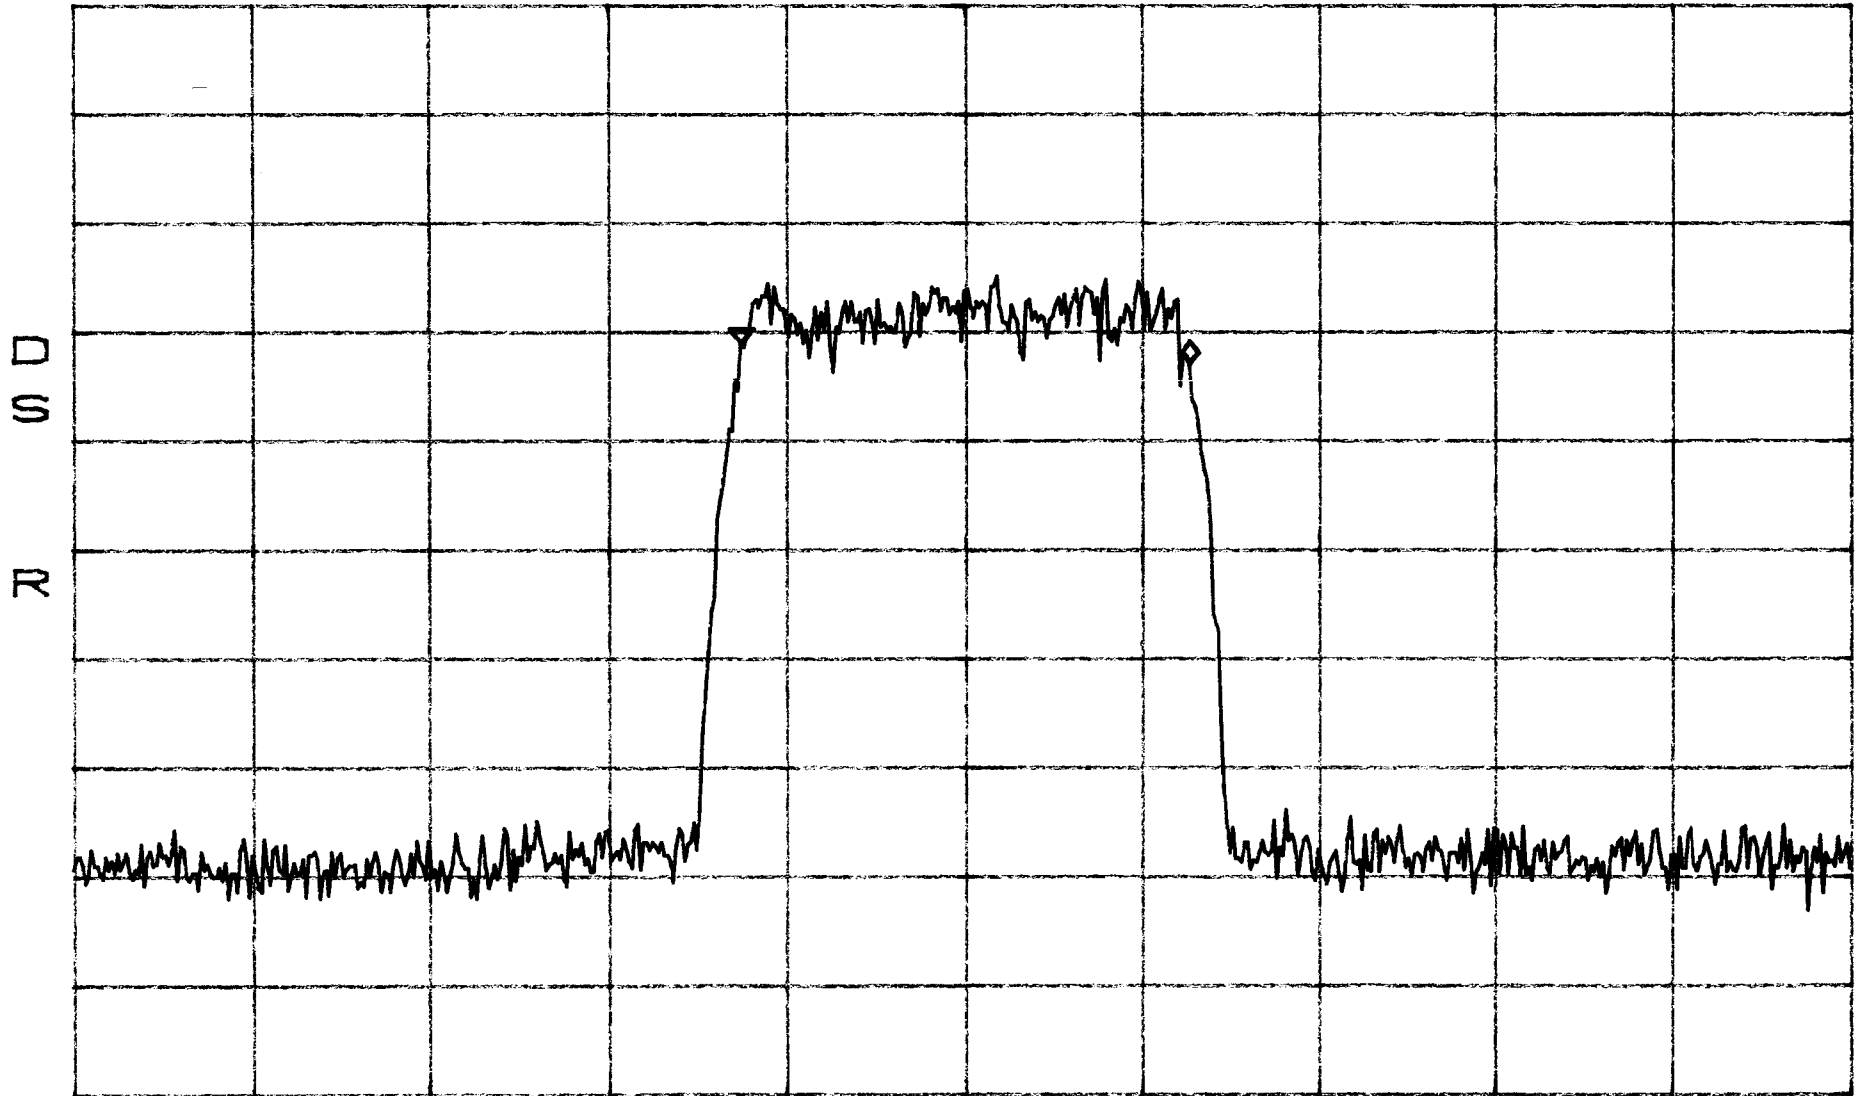


CENTER 1.940000GHz SPAN 5.000MHz
*RBW 10kHz *VBW 3.0kHz SWP 420ms

Occupied Band Width
FM IN

BAND D,B,E

*ATTEN 10dB
BPO
RL -.7dBm

ΔMKR 0dB
BPO
21.15kHz

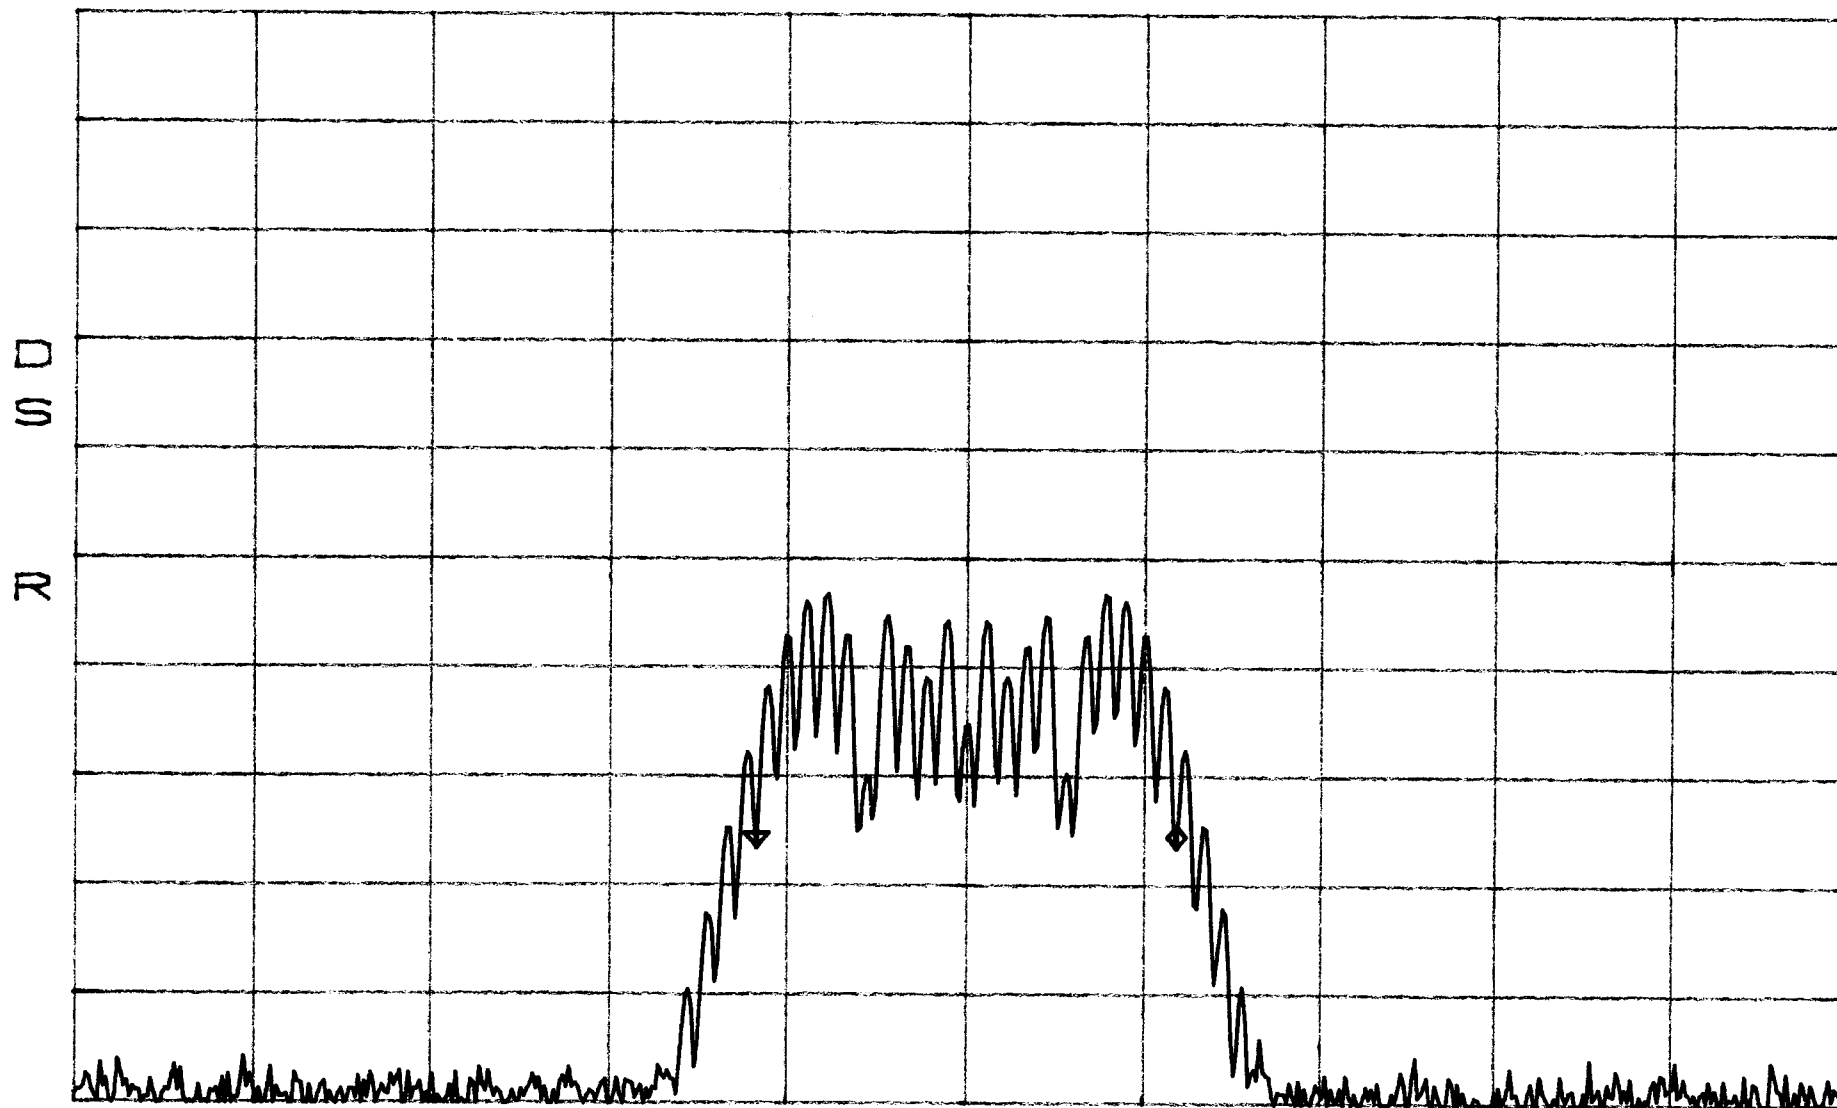

CENTER 1.95750000GHz

SPAN 90.00kHz

*RBW 300Hz

*VBW 3.0kHz


SWP 2.5sec

Occupied Band Width
FM OUT

BAND D,B,E

*ATTEN 30dB
RL 51.3dBm

ΔMKR 3.50dB
21.30kHz

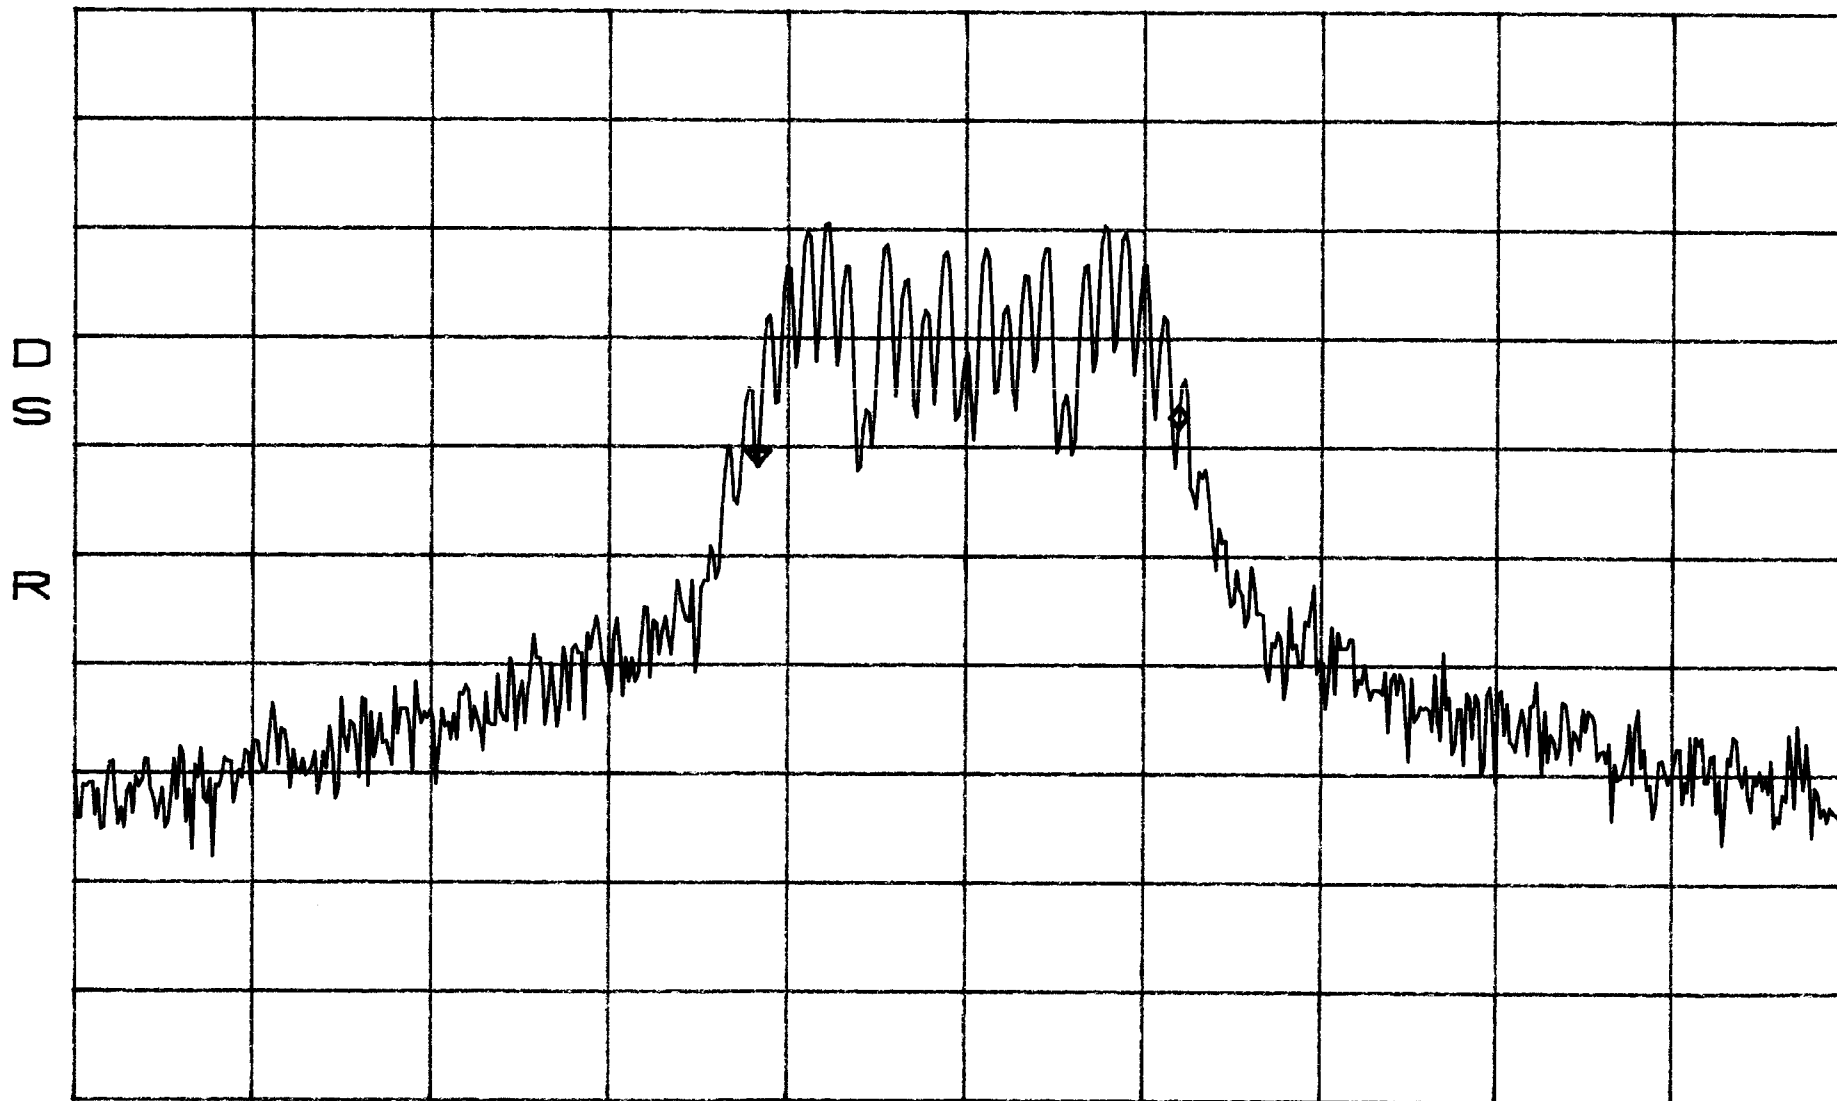

CENTER 1.9575000GHz

SPAN 90.00kHz

*RBW 300Hz


*VBW 3.0kHz

SWP 2.5sec

Occupied Band width BAND D,B,E
TDMA IN

*ATTEN 10dB
RL -.7dBm

Δ MKR -4.16dB
28.35kHz

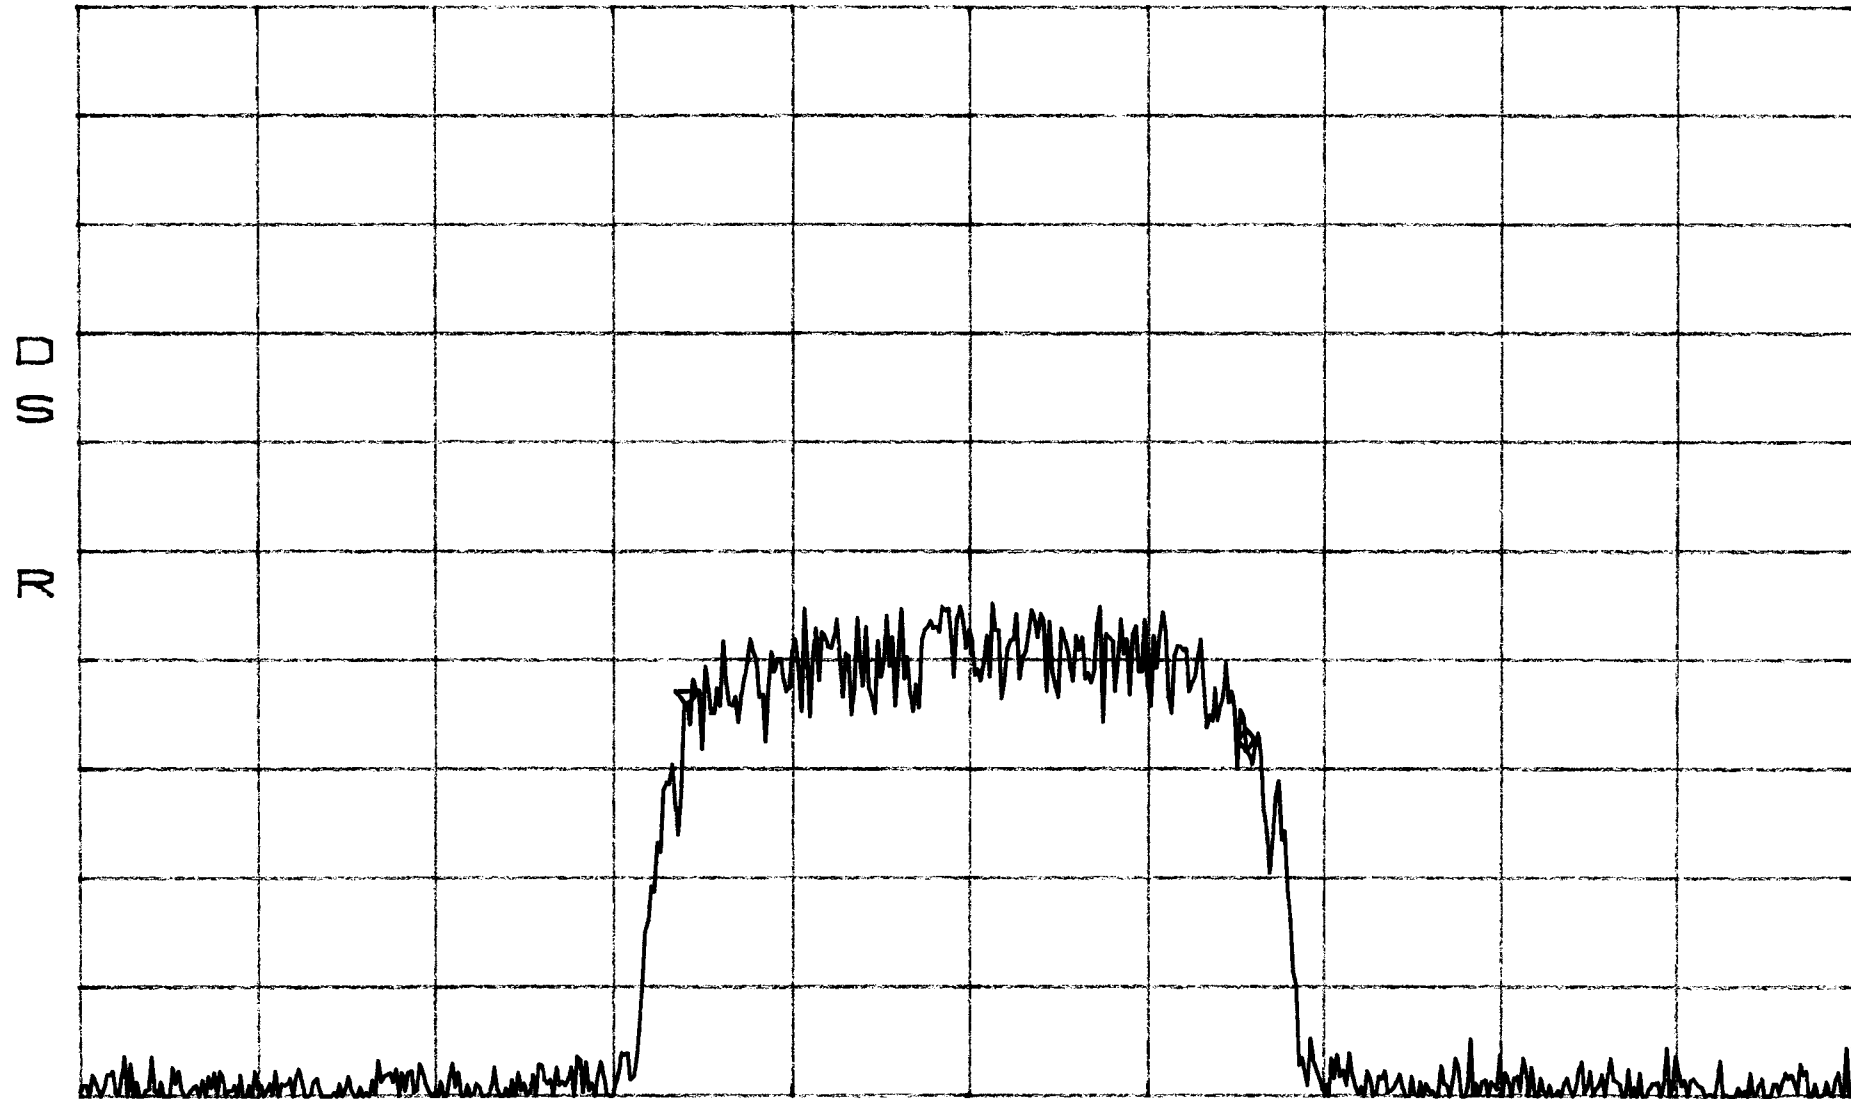


CENTER 1.95750000GHz SPAN 90.00kHz
*RBW 300Hz *VBW 3.0kHz SWP 2.5sec

Occupied Band Width BAND D,B,E
TDMA OUT

*ATTEN 30dB
RL 51.3dBm

ΔMKR 4.00dB
28.35kHz

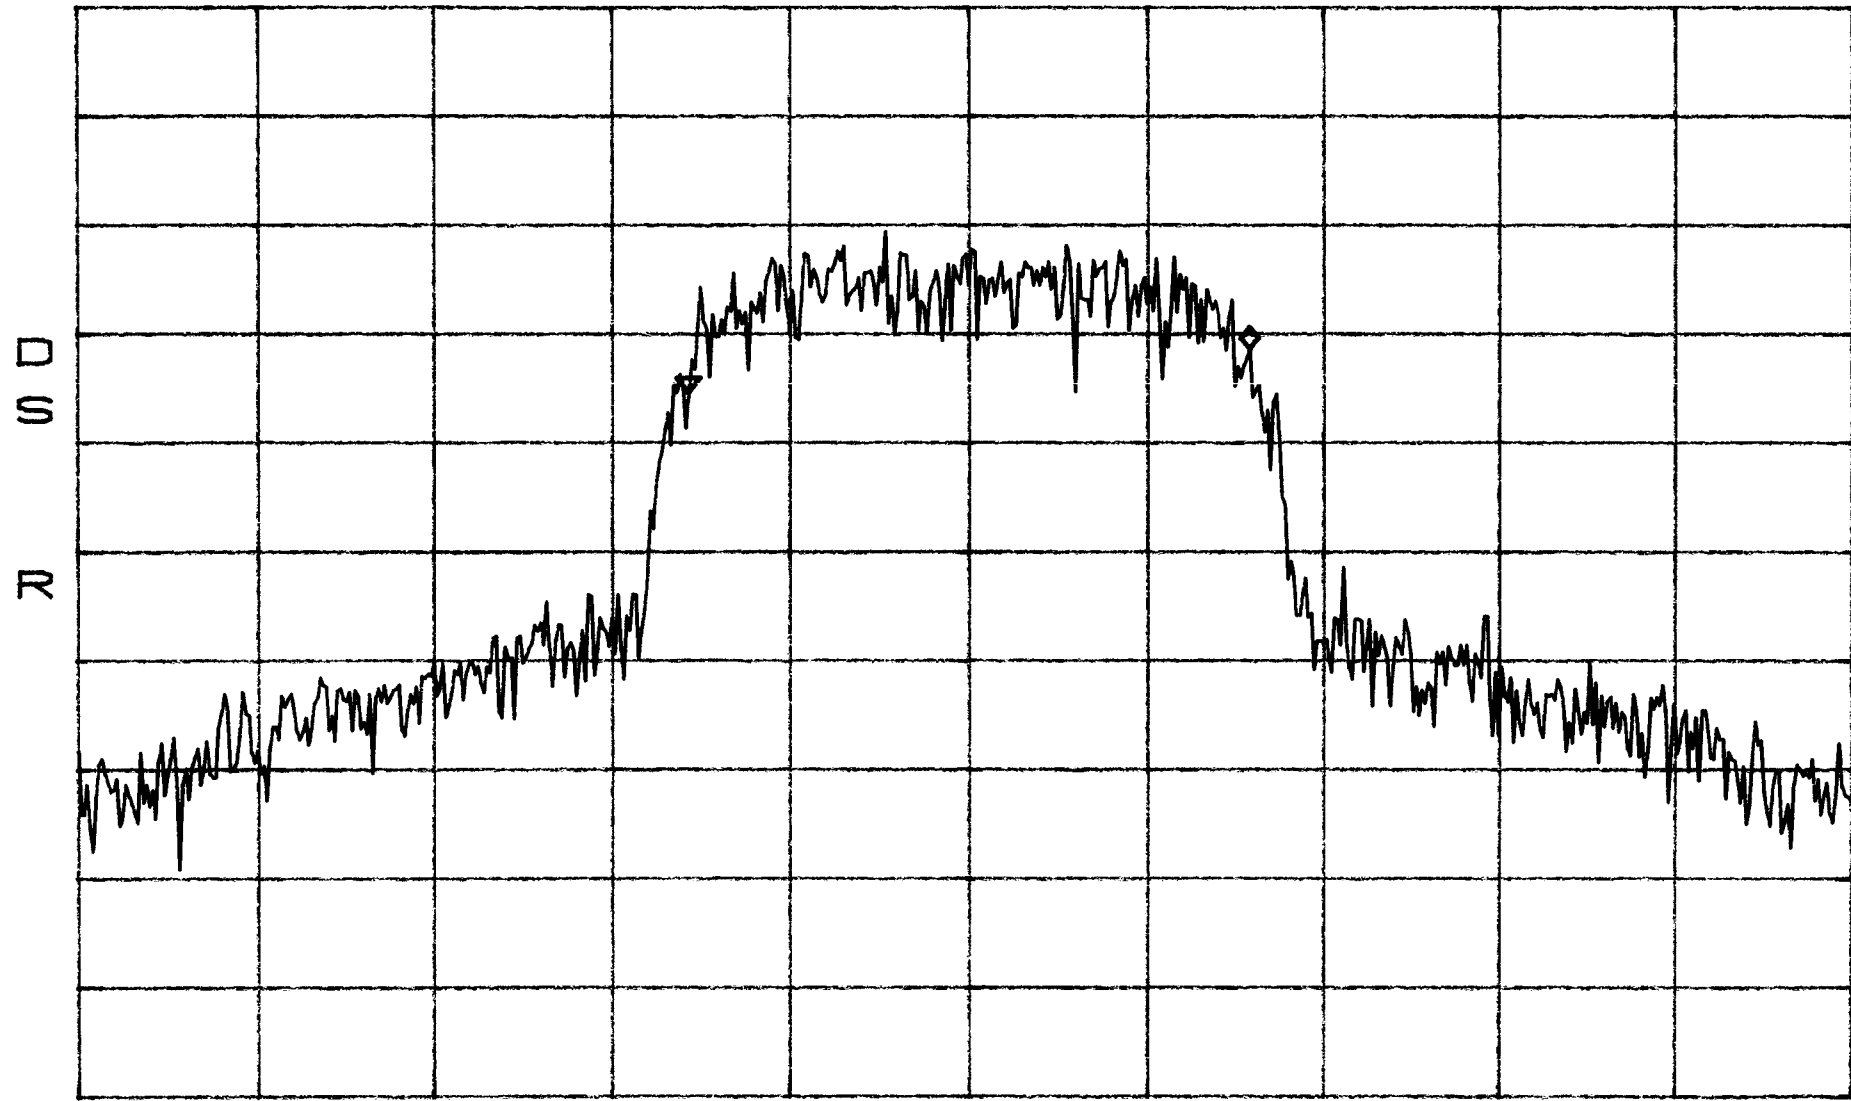


CENTER 1.95750000GHz SPAN 90.00kHz
*RBW 300Hz *VBW 3.0kHz SWP 2.5sec

Occupied BAND width BAND D,B,E
CDMA IN

*ATTEN 10dB
RL -.7dBm

Δ MKR -2.17B
1.292MHz

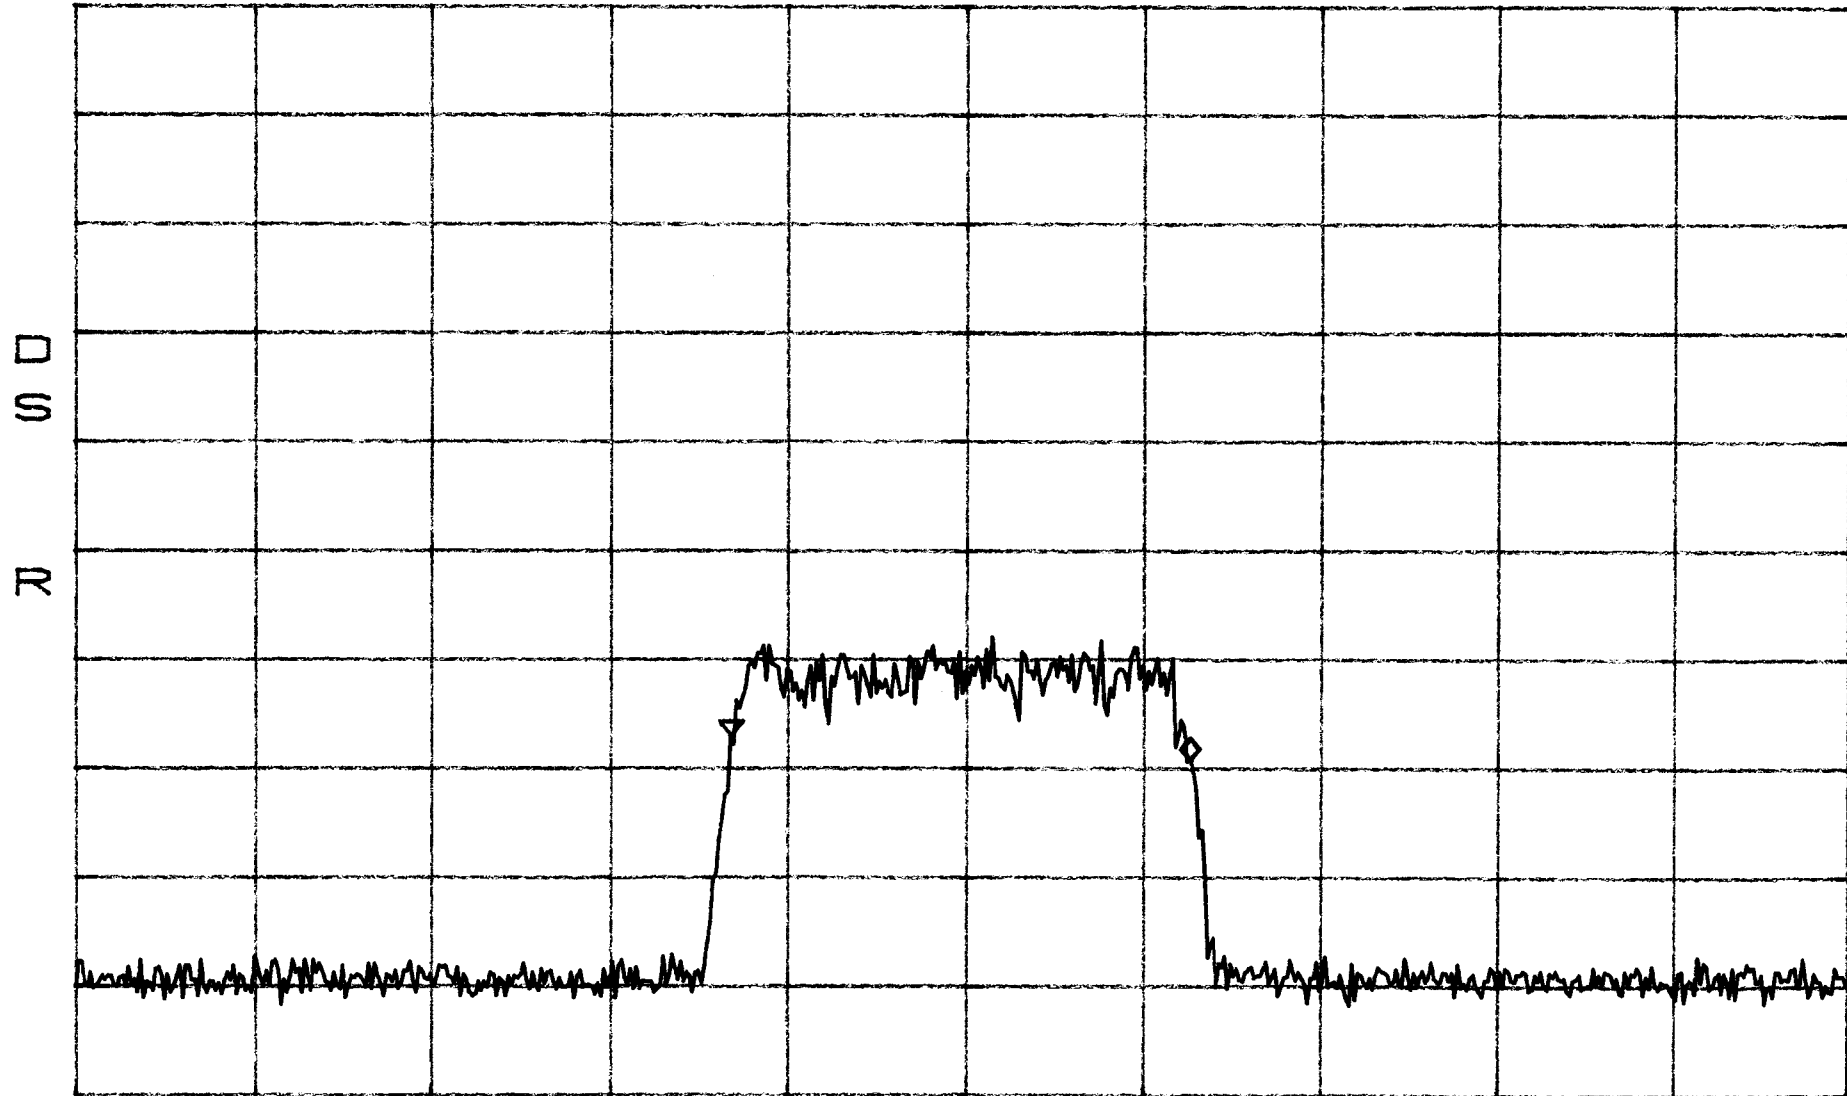


CENTER 1.957500GHz SPAN 5.000MHz
*RBW 10kHz *VBW 3.0kHz SWP 420ms

Occupied Band width BAND D,B,E
CDMA OUT

*ATTEN 30dB
RL 51.3dBm

Δ MKR 1.50dB
1.267MHz

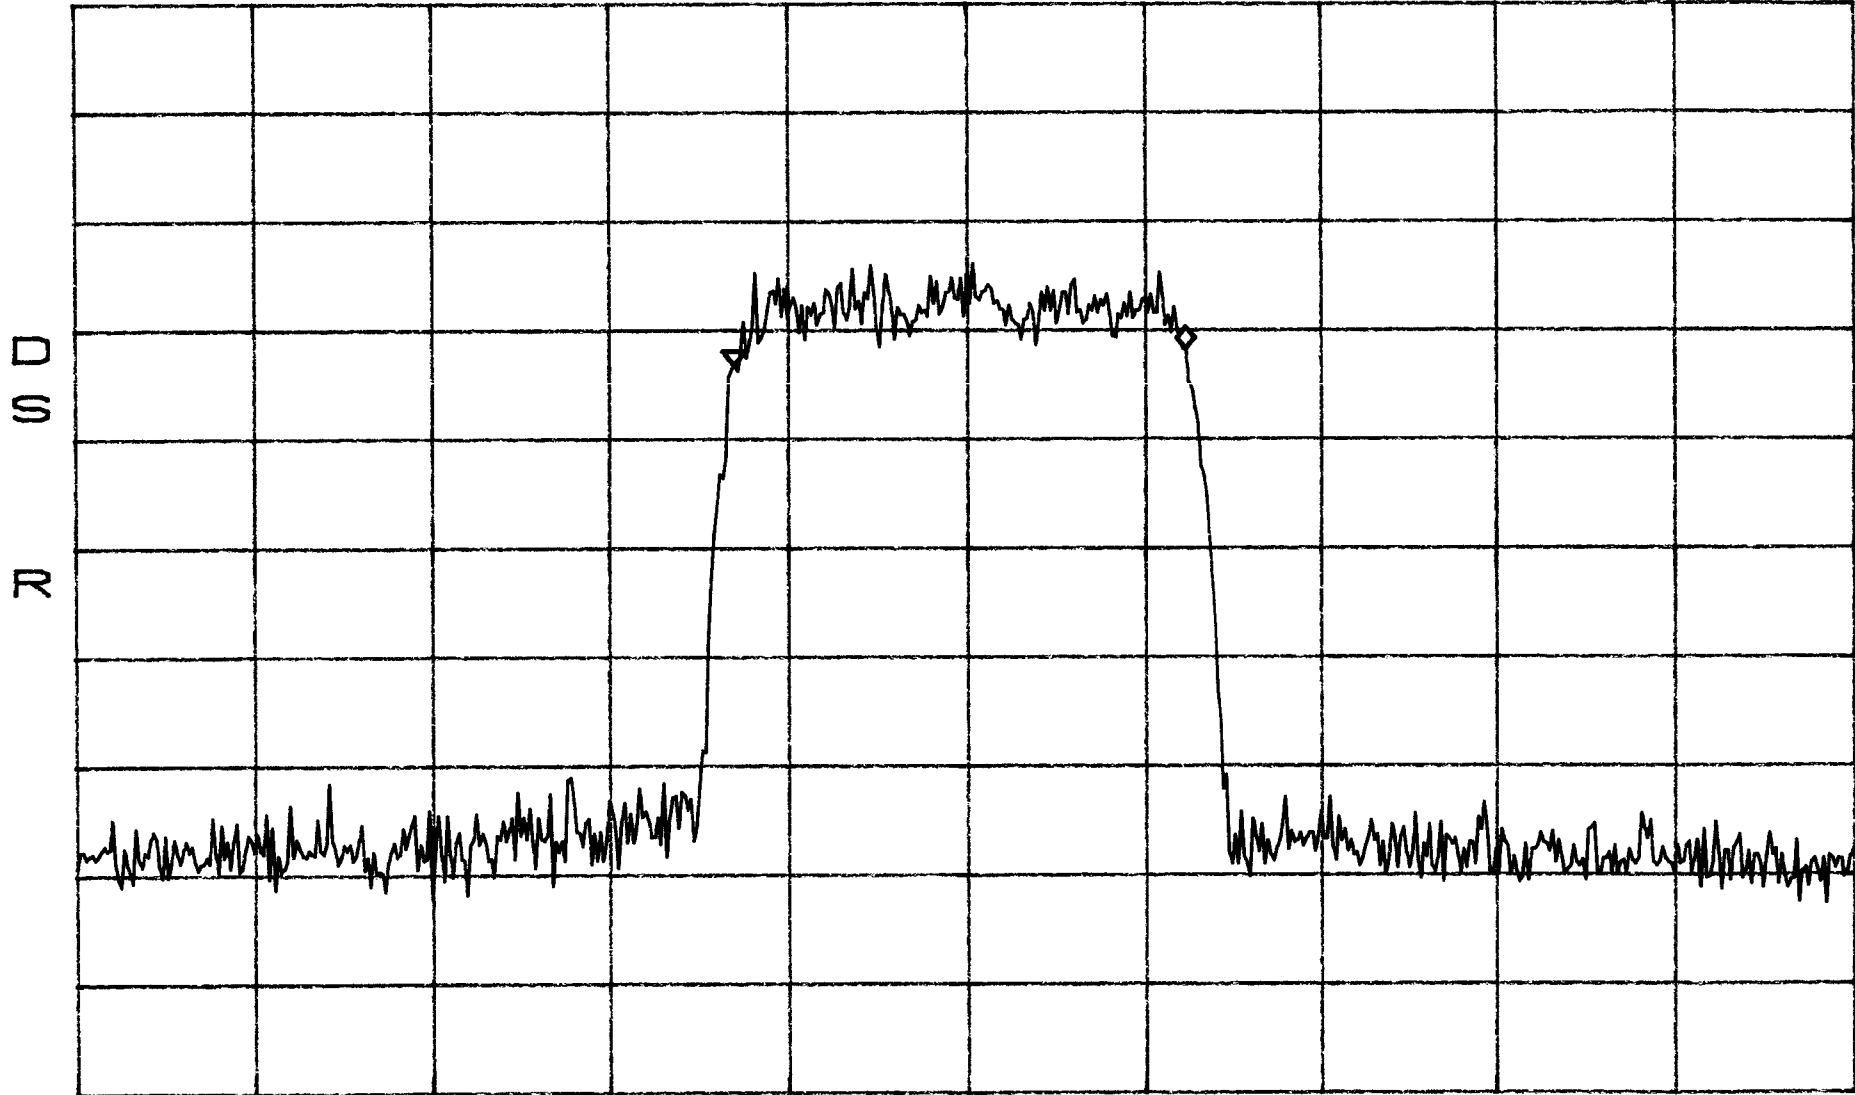

CENTER 1.957500GHz

SPAN 5.000MHz

*RBW 10kHz

*VBW 3.0kHz

SWP 420ms


Occupied Band Width
FM JN

BAND B, E, F

*ATTEN 10dB
BPO1
RL -.7dBm

1/BPO1

Δ MKR -5.33dB
21.00kHz

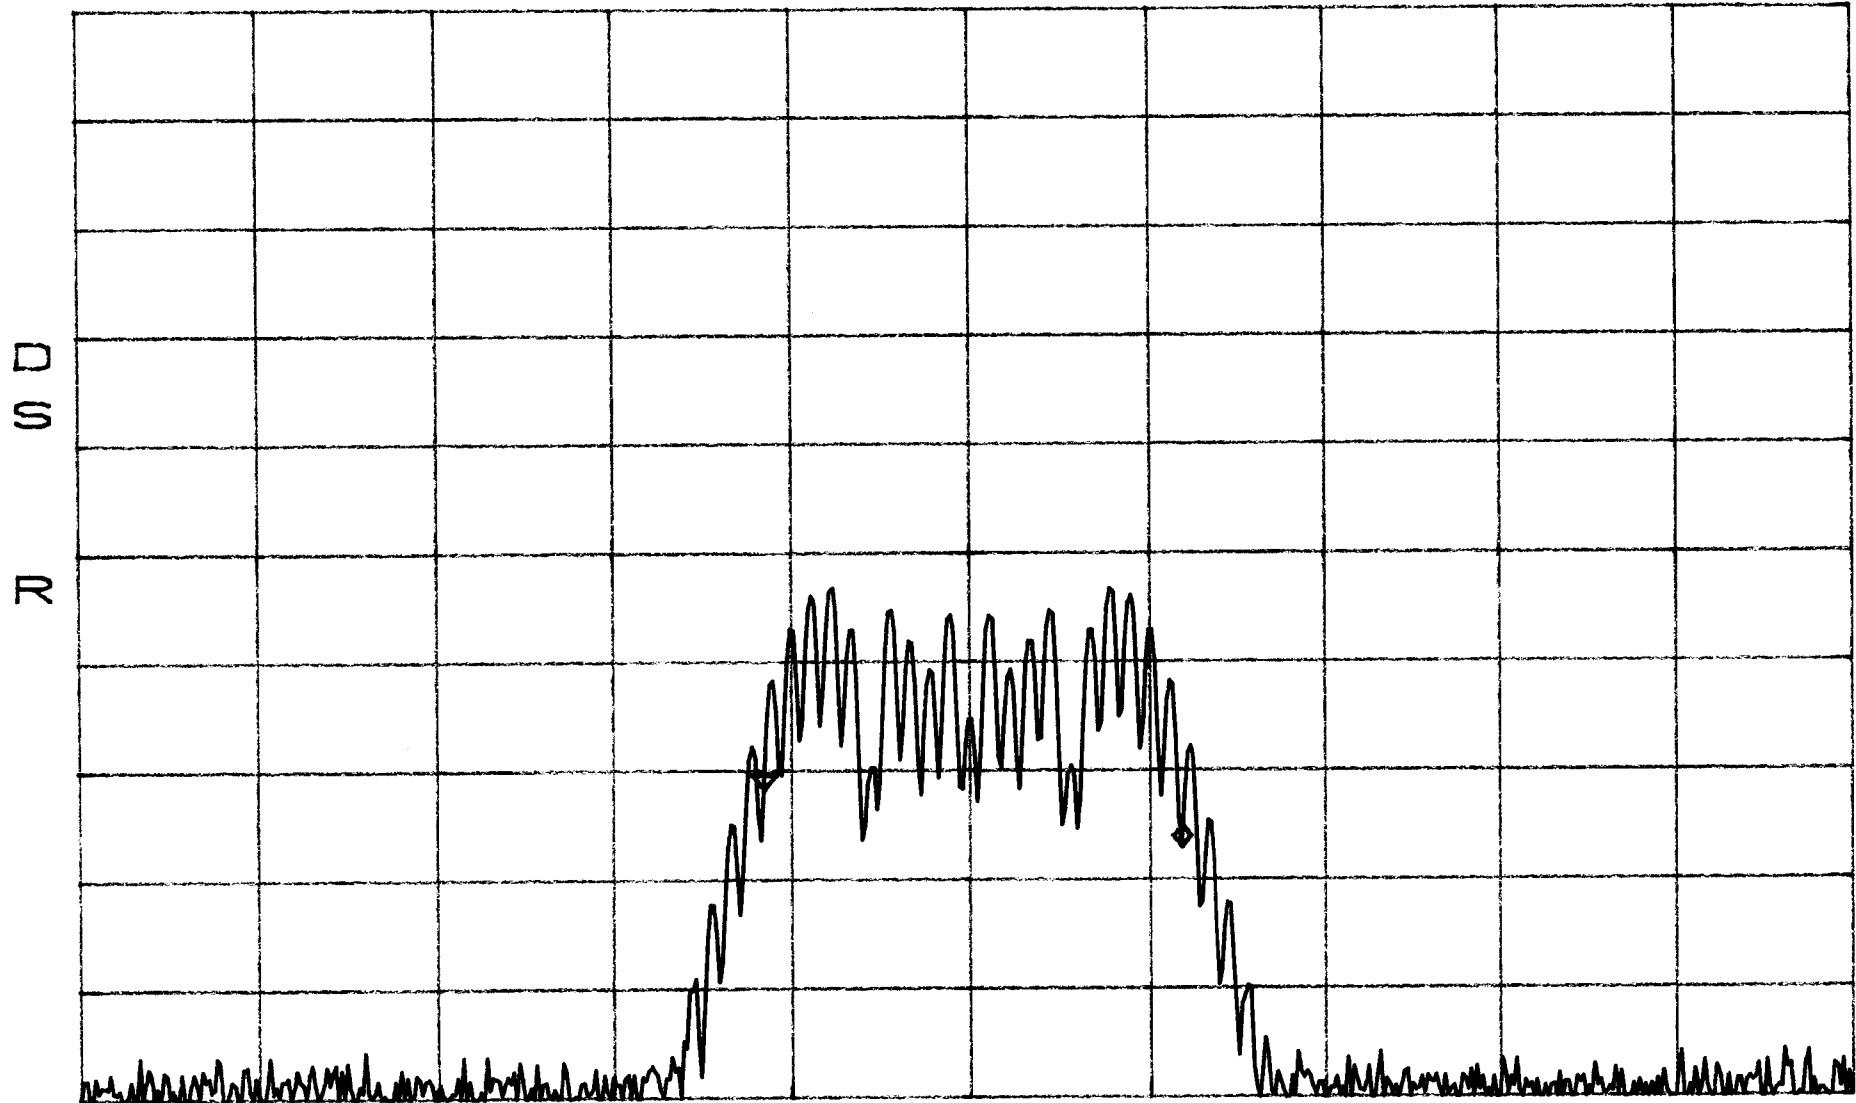

CENTER 1.96250000GHz

SPAN 90.00kHz

*RBW 300Hz

*VBW 3.0kHz

SWP 2.5sec


Occupied Band Width
FM OUT

BAND B,E,F

*ATTN 30dB
BPO5
RL 51.3dBm

10dB/

ΔMKR 2.50dB
21.75kHz

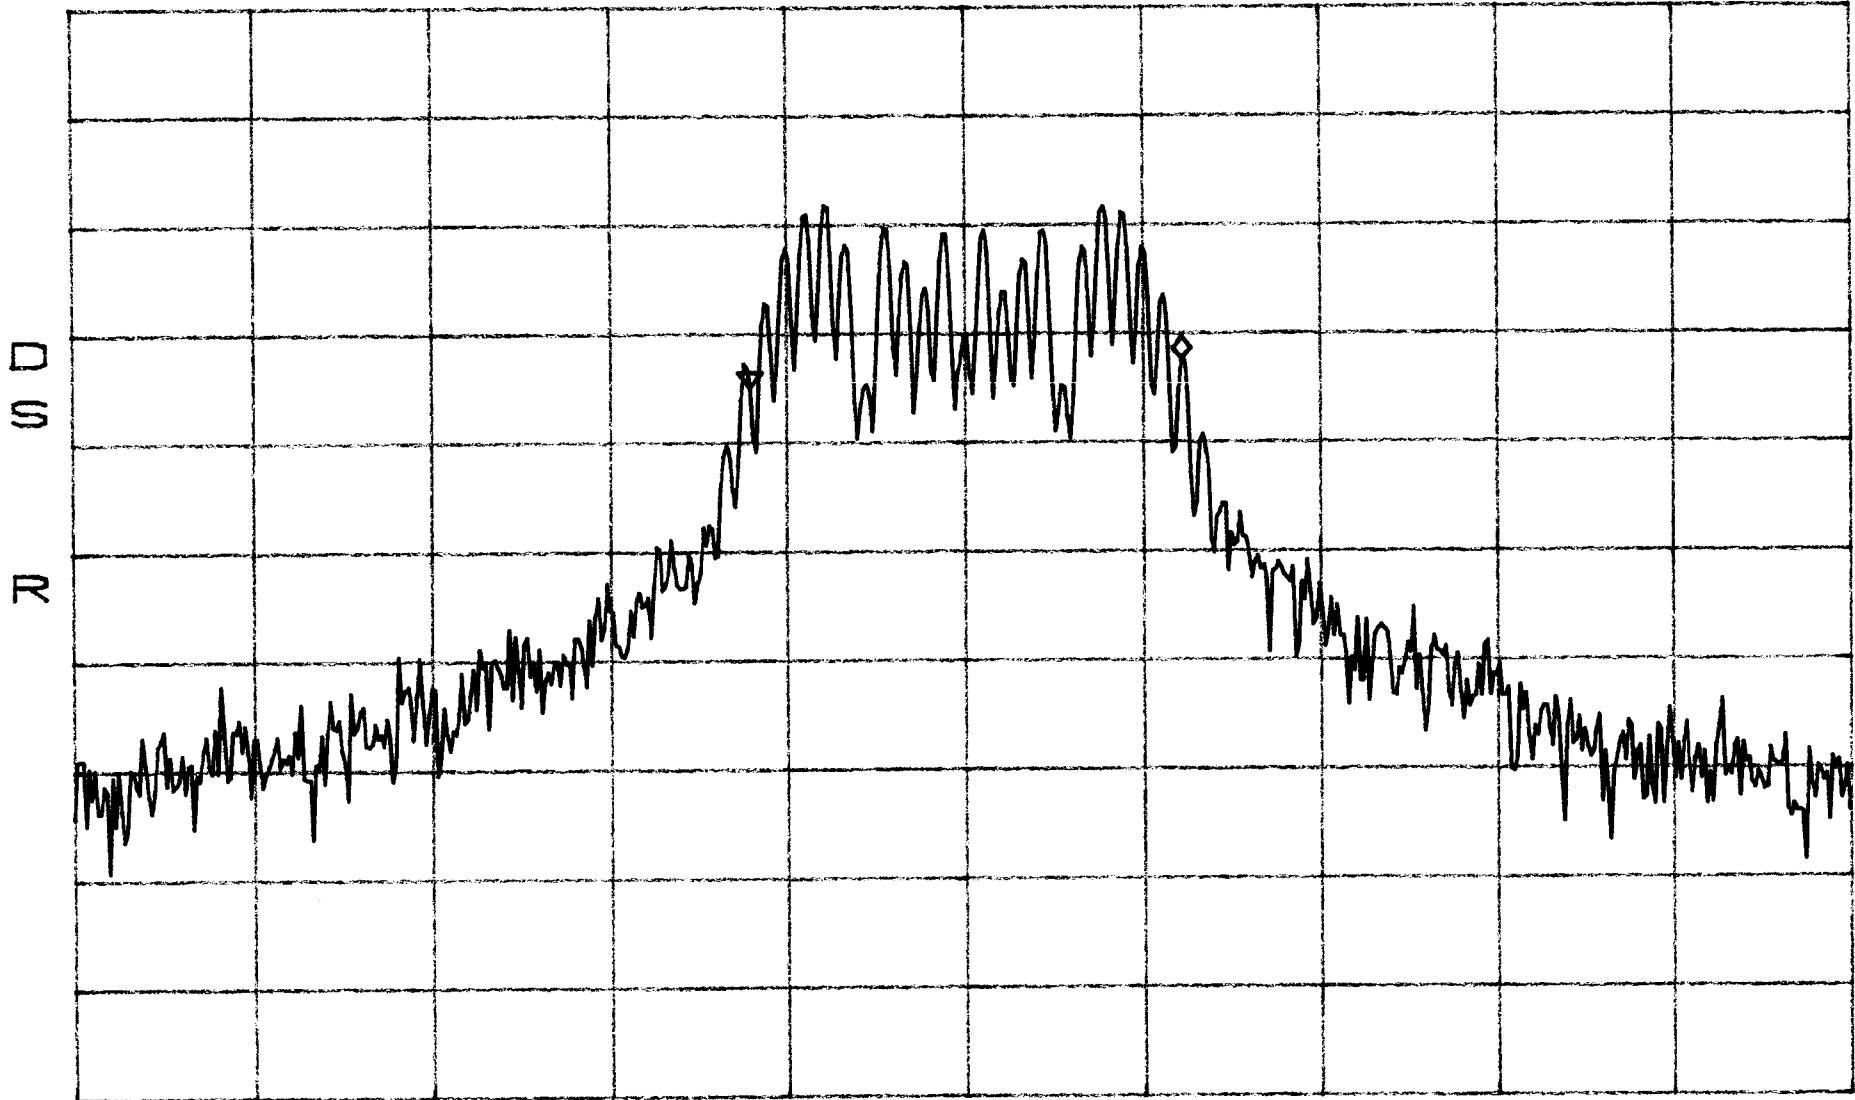

CENTER 1.96250005GHz

SPAN 90.00kHz

*RBW 300Hz


*VBW 3.0kHz

SWP 2.5sec

Occupied Band Width BAND B,E,F
TDMA IN

*ATTEN 10dB
RL -.7dBm

Δ MKR 1.50dB
28.65kHz

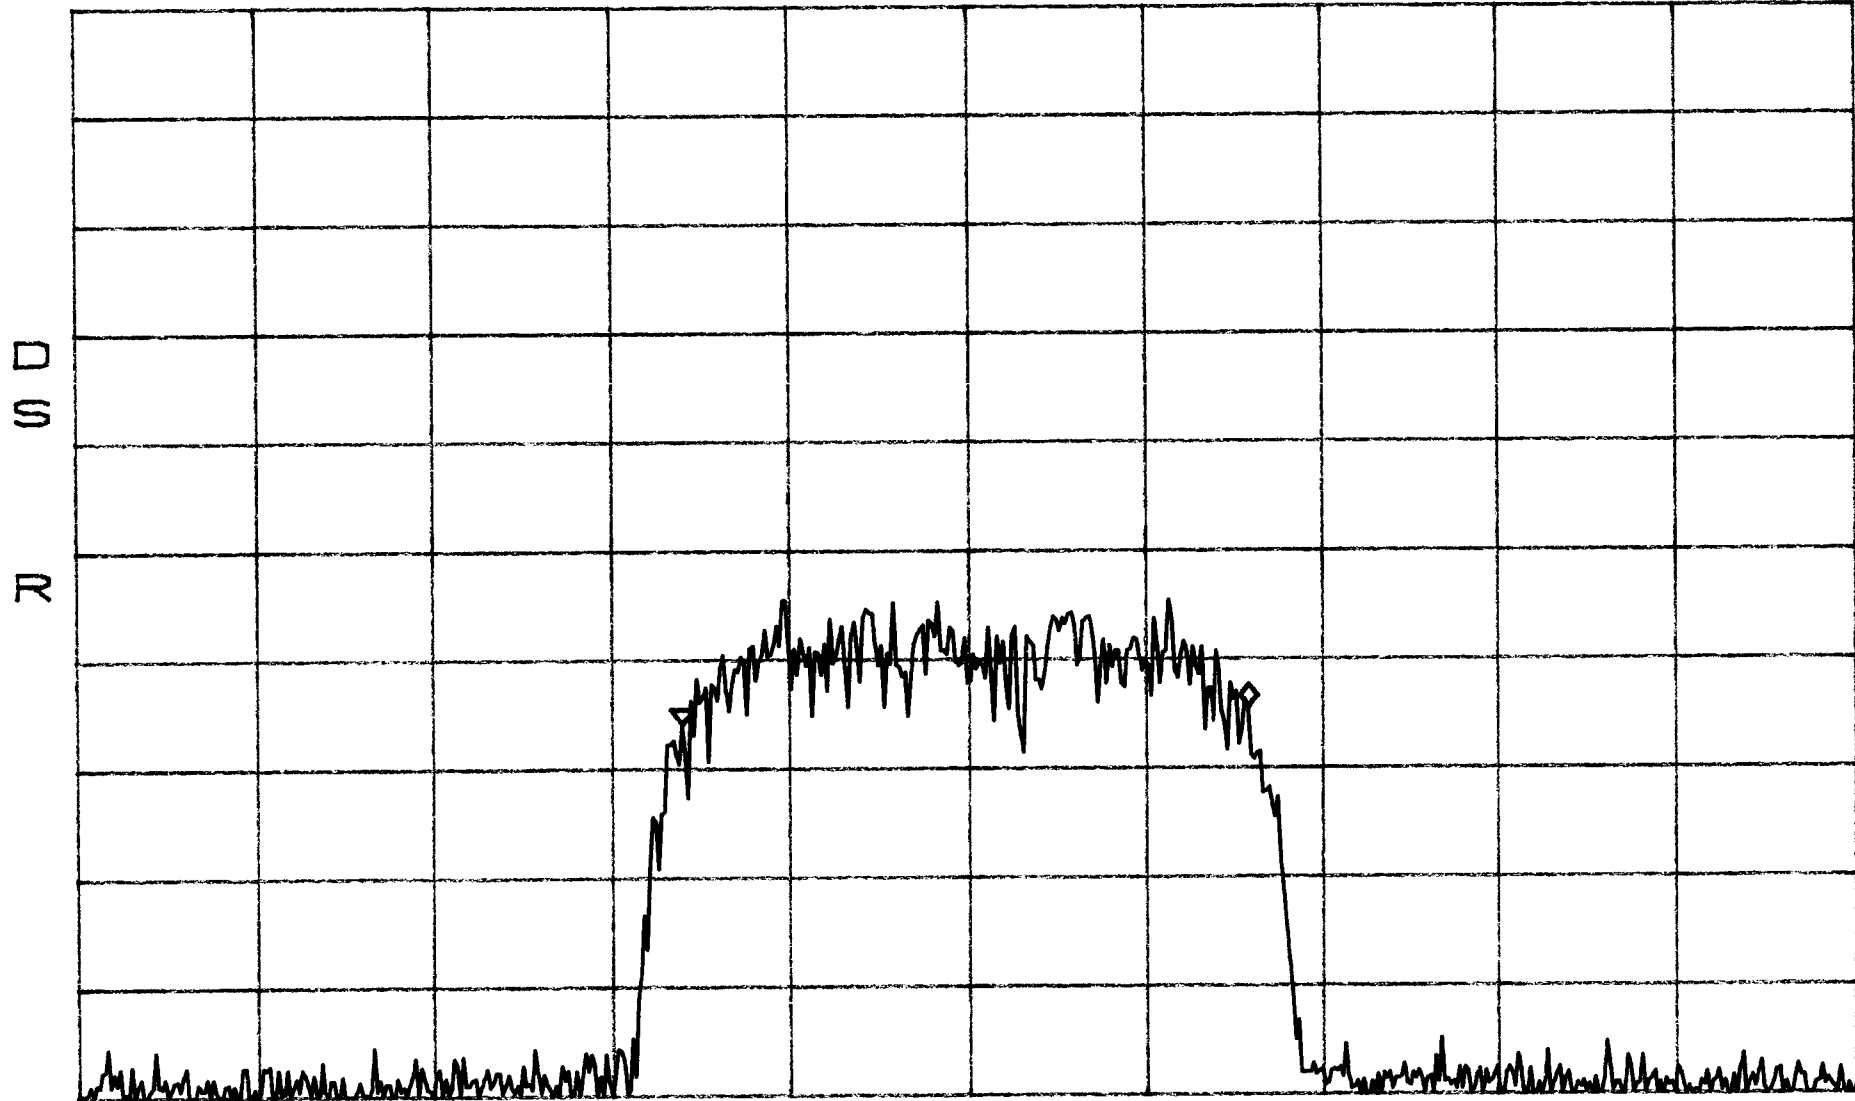


CENTER 1.96250000GHz
*RBW 300Hz *VBW 3.0kHz

SPAN 90.00kHz
SWP 2.5sec

Occupied Band Width BAND B, E, F
TDMA OUT

*ATTEN 30dB
RL 51.3dB

Δ MKR 3.66dB
28.80kHz

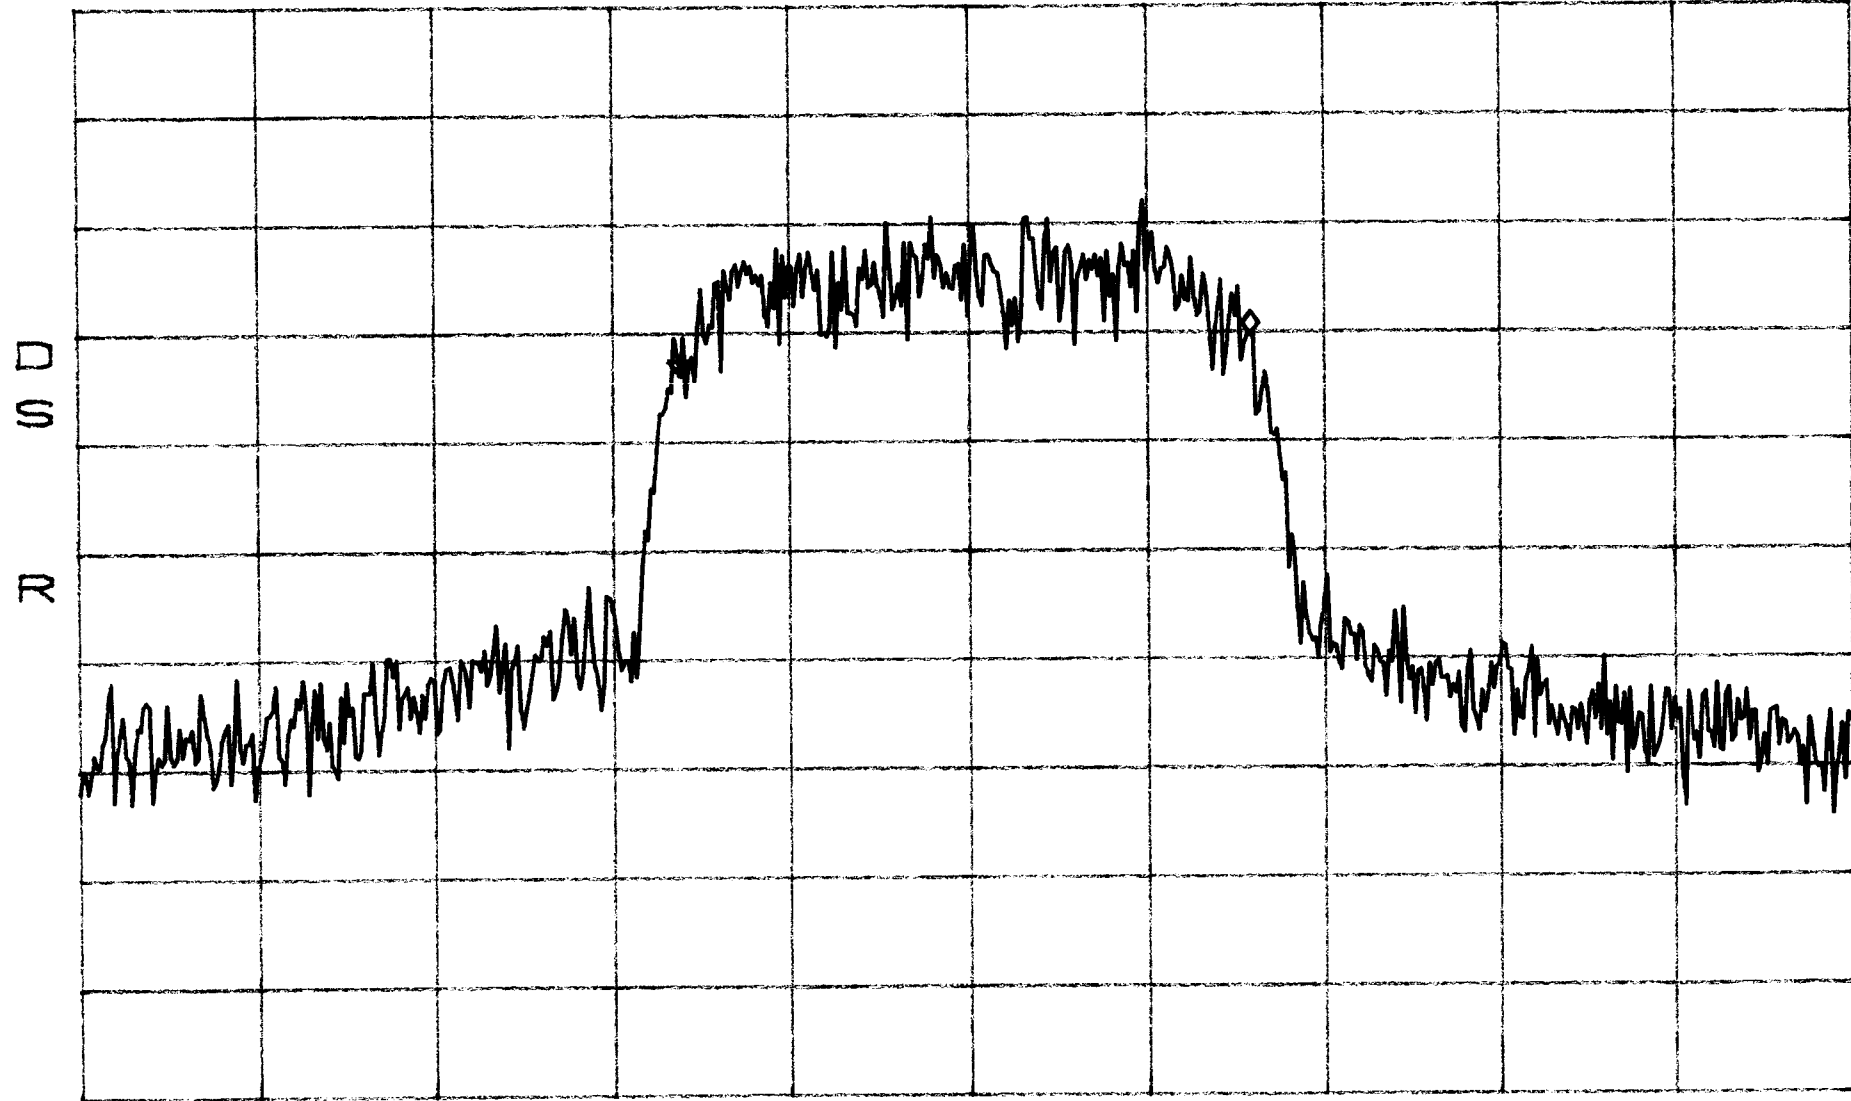


CENTER 1.96250005GHz
*RBW 300Hz *VBW 3.0kHz

SPAN 90.00kHz
SWP 2.5sec

Occupied BAND width BAND B,E,F
CDMA IN

*ATTN 10dB
BPO1
RL -.7dB

ΔMKR -1.50dB
1.292MHz

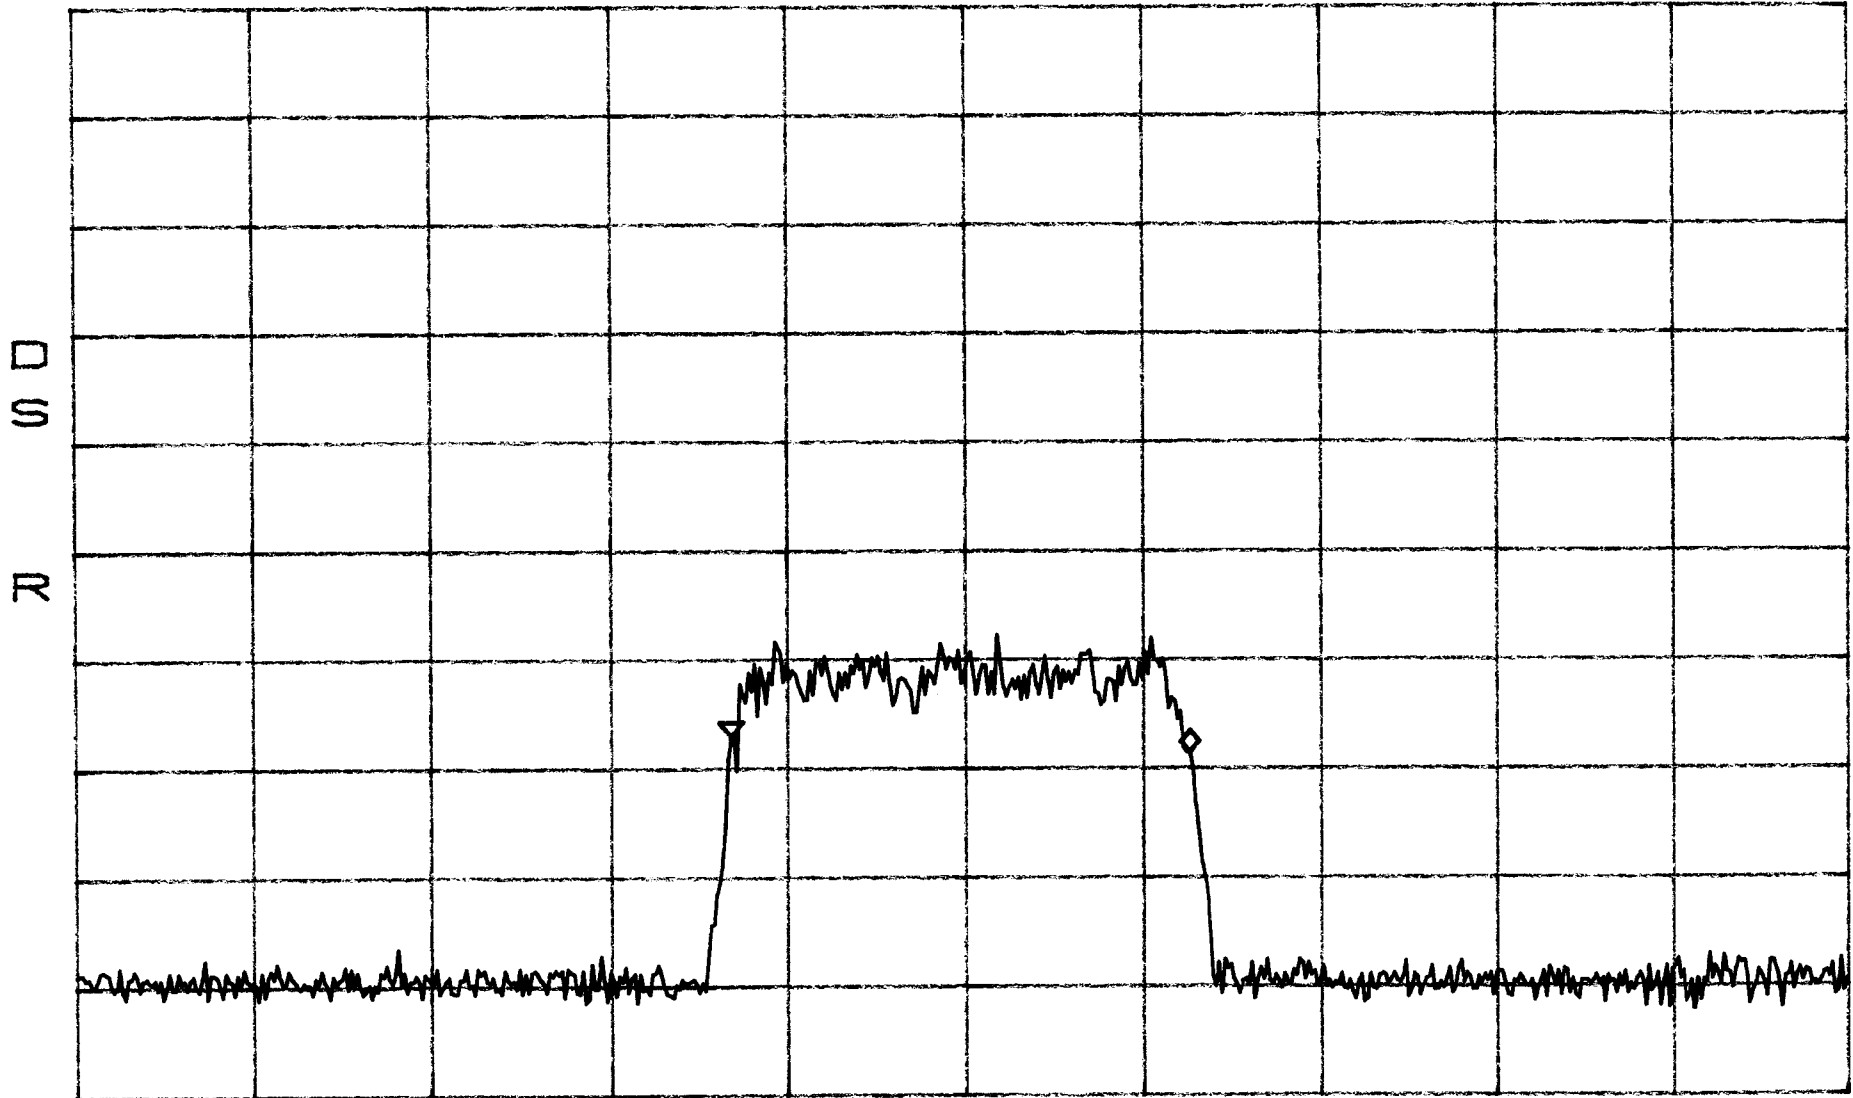

CENTER 1.962500GHz

SPAN 5.000MHz

*RBW 10kHz


*VBW 3.0kHz

SWP 420ms

Occupied Band width BAND B,E,F
CDMA OUT

*ATTEN 30dB
RL 51.3dBm

Δ MKR 1.17dB
1.250MHz

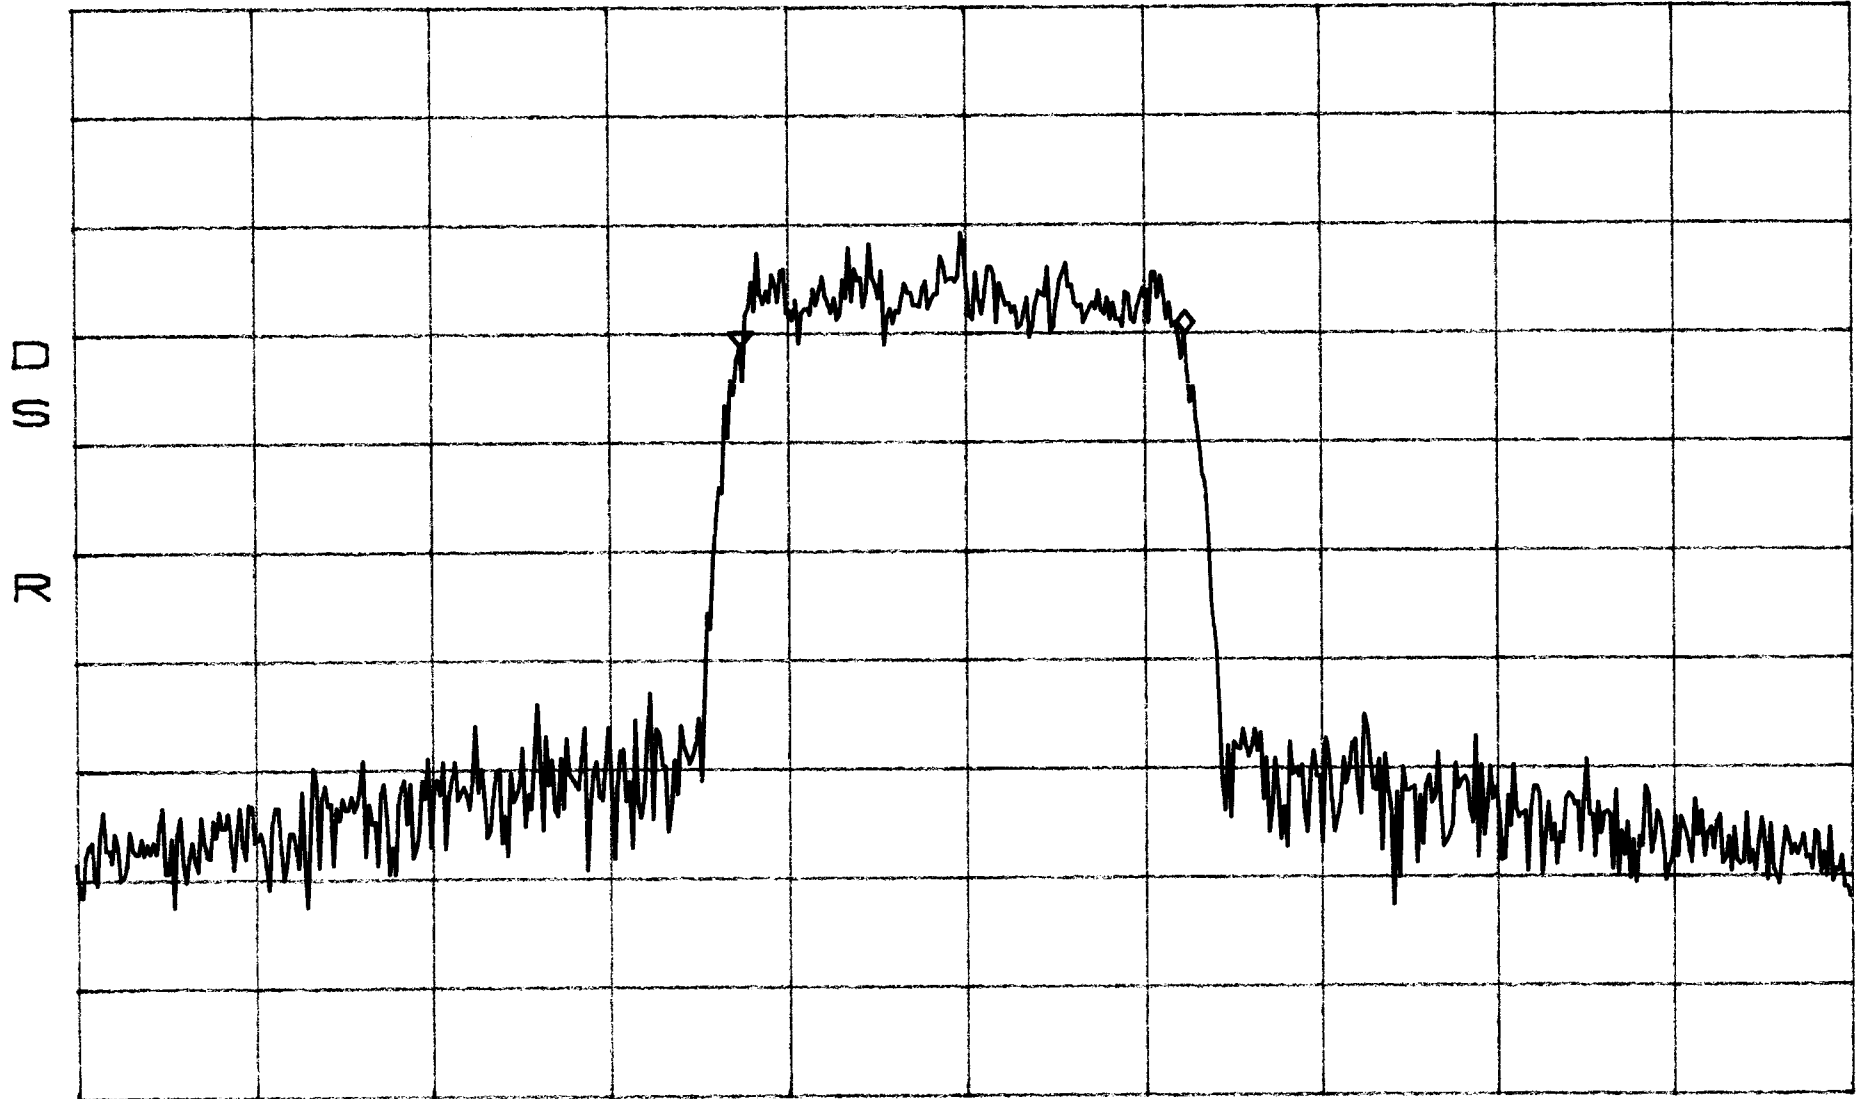

CENTER 1.962500GHz

SPAN 5.000MHz

*RBW 10kHz

*VBW 3.0kHz

SWP 420ms


Occupied Band Width
FM IN

BAND E,F,C

*ATTEN 10dB
BPO1
RL -.7dBm

1/BPO1

ΔMKR -.67dB
21.15kHz

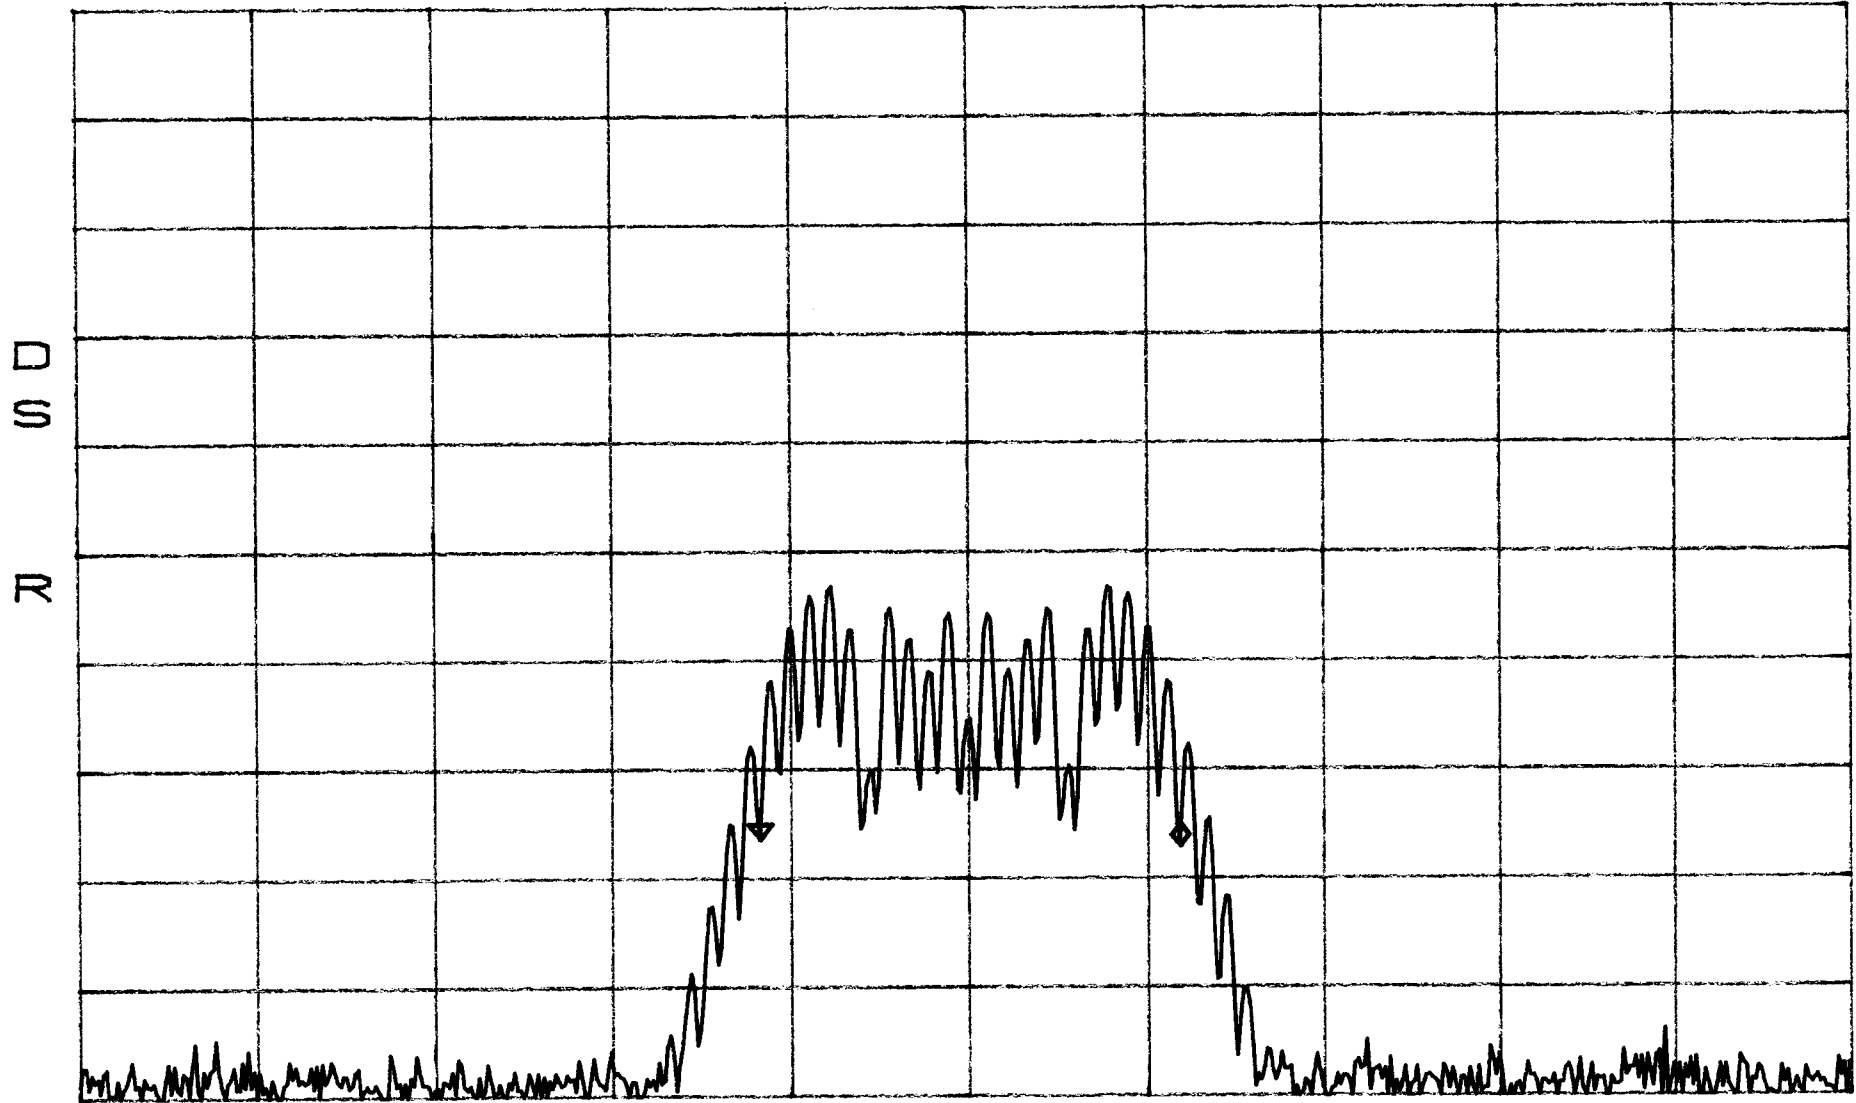

CENTER 1.97750000GHz

SPAN 90.00kHz

*RBW 300Hz

*VBW 3.0kHz

SWP 2.5sec


Occupied Band Width
FM OUT

BAND E,F,C

*ATTEN 30dB
BPO3
RL 51.3dBm

10dB/

Δ MKR -5.17dB
21.30kHz

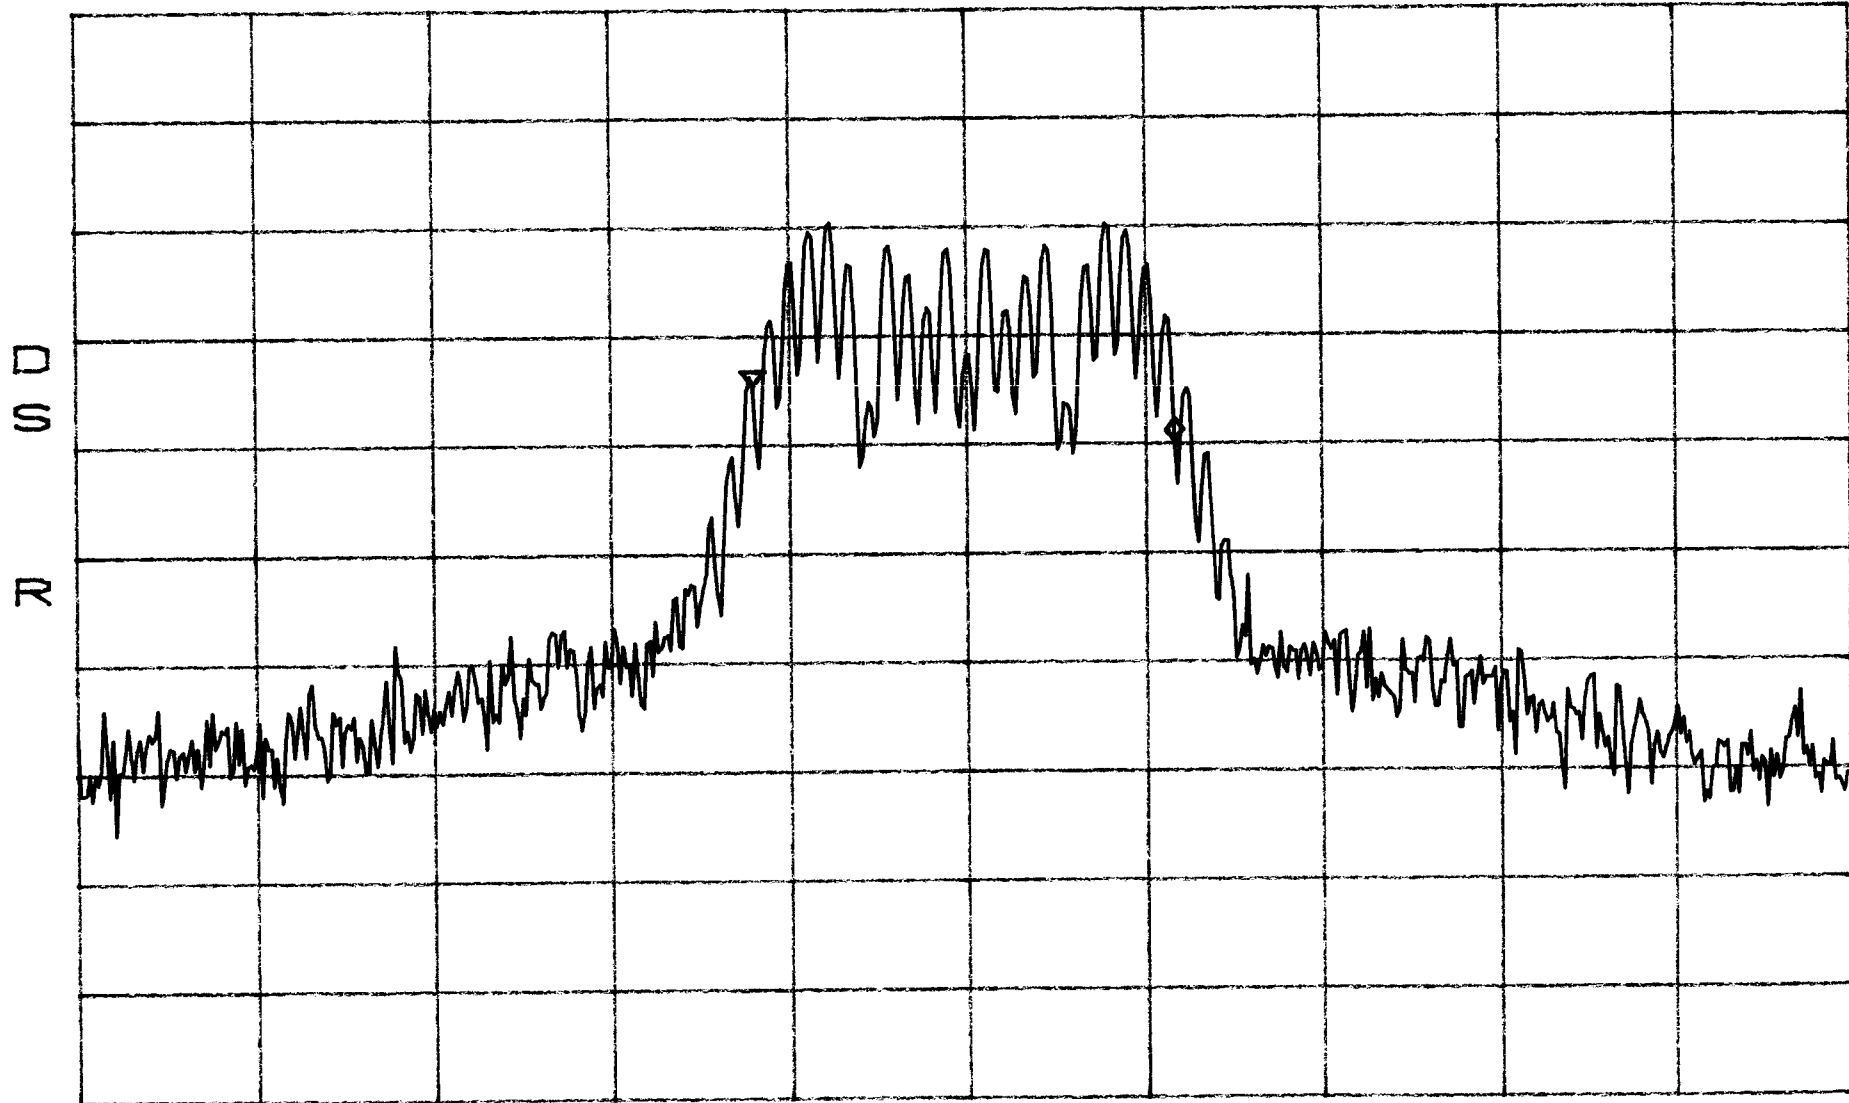


CENTER 1.97750000GHz
*RBW 300Hz *VBW 3.0kHz

SPAN 90.00kHz
SWP 2.5sec

Occupied Band Width BAND E,F,C
TDMA IN

*ATTEN 10dB
RL -0.7dBm

Δ MKR -3.33dB
28.50kHz

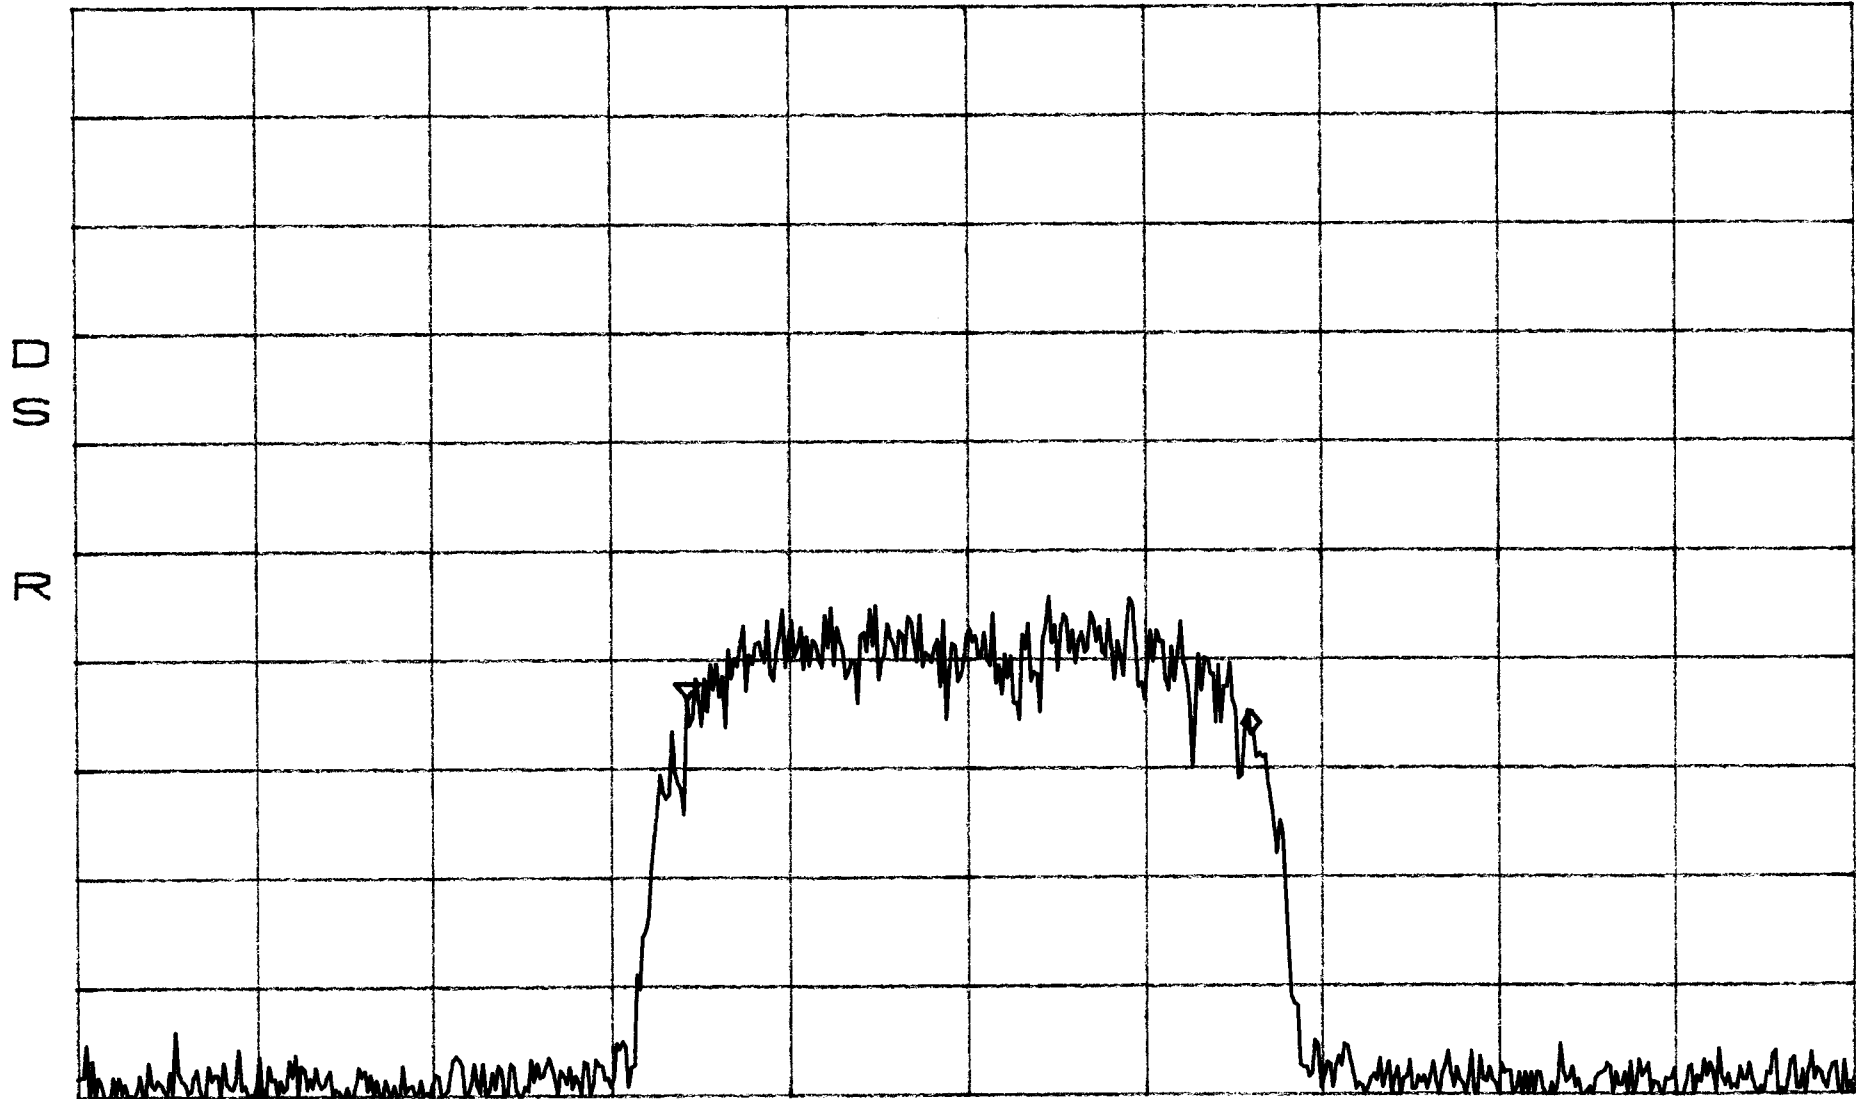

CENTER 1.97750000GHz
*RBW 300Hz *VBW 3.0kHz


SPAN 90.00kHz
SWP 2.5sec

Occupied Band Width BAND E,F,C
TDMA OUT

*ATTEN 30dB
BPO3
RL 51.3dBm

10dB/

Δ MKR -2.17dB
28.35kHz

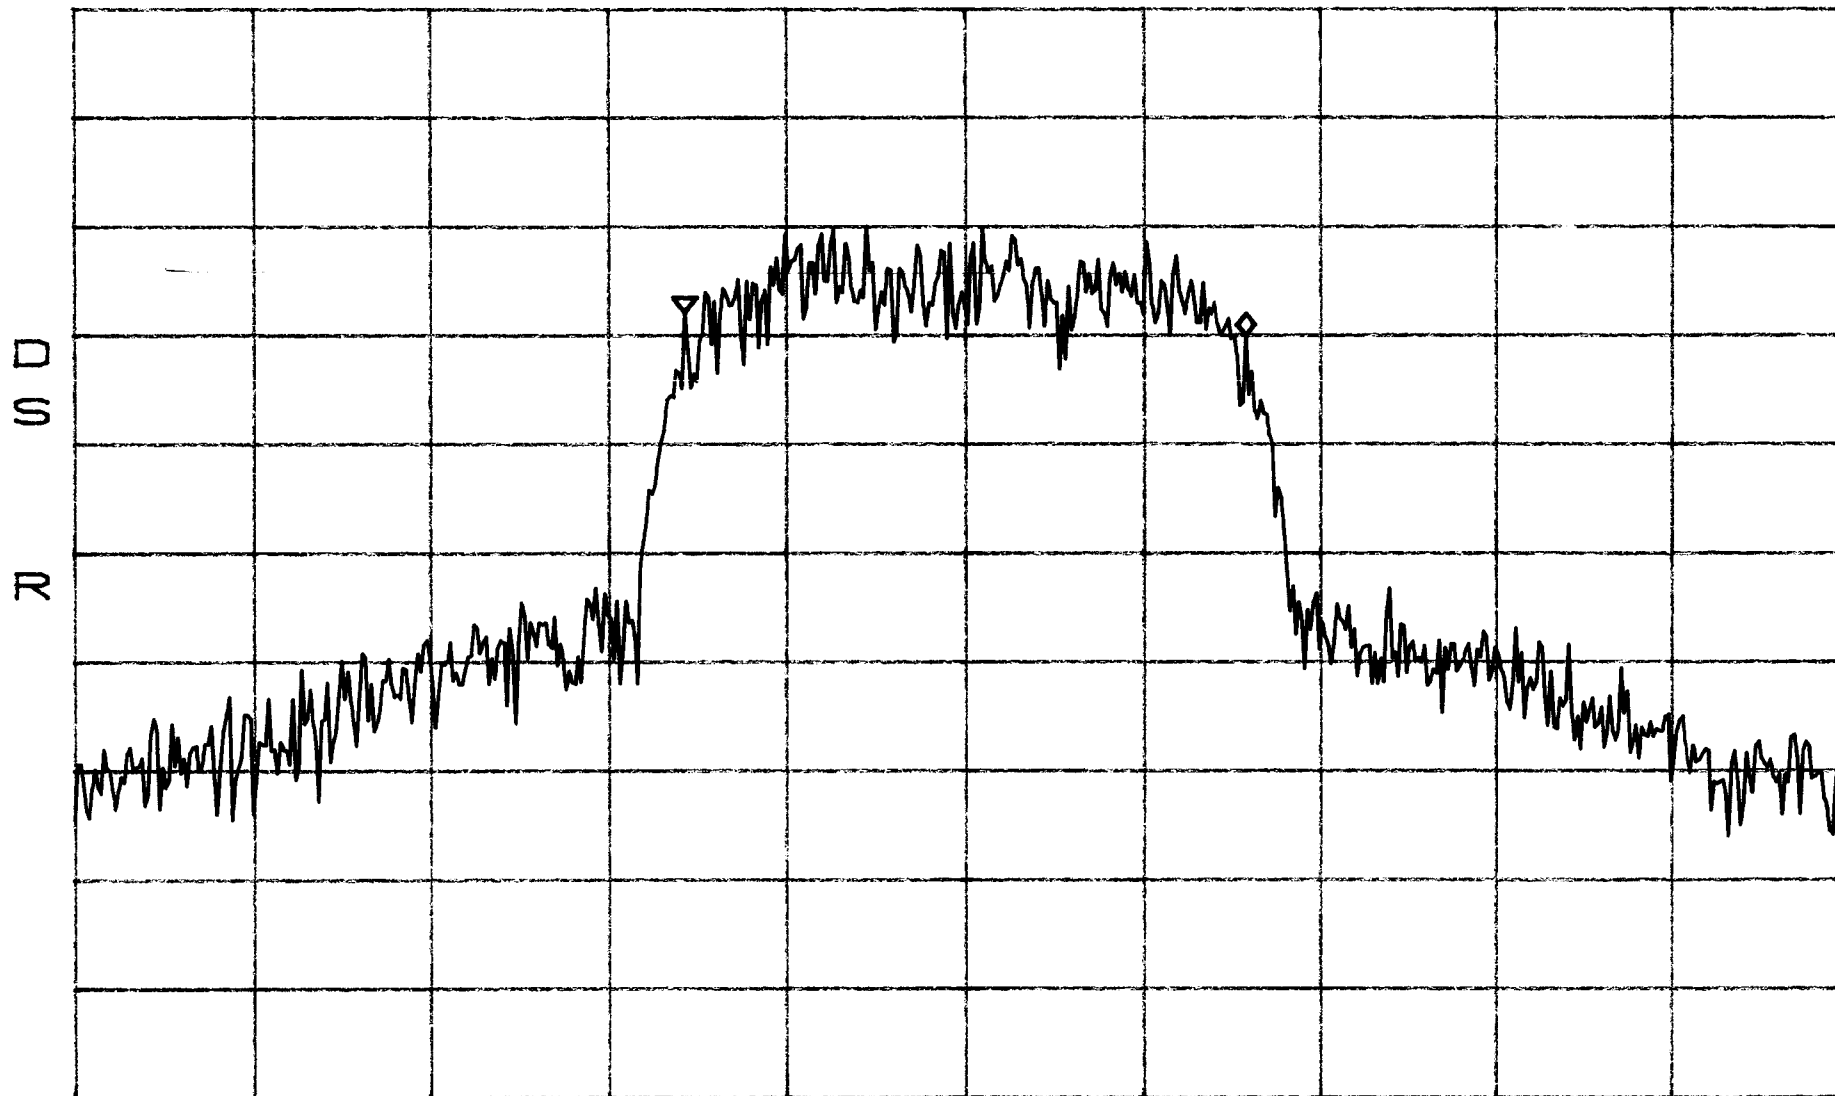


CENTER 1.97750000GHz
*RBW 300Hz *VBW 3.0kHz

SPAN 90.00kHz
SWP 2.5sec

Occupied BAND width BAND E,F,C
CDMA IN

*ATTEN 10dB
BPO1
RL -.7dBm

ΔMKR -1.33dB
1.283MHz

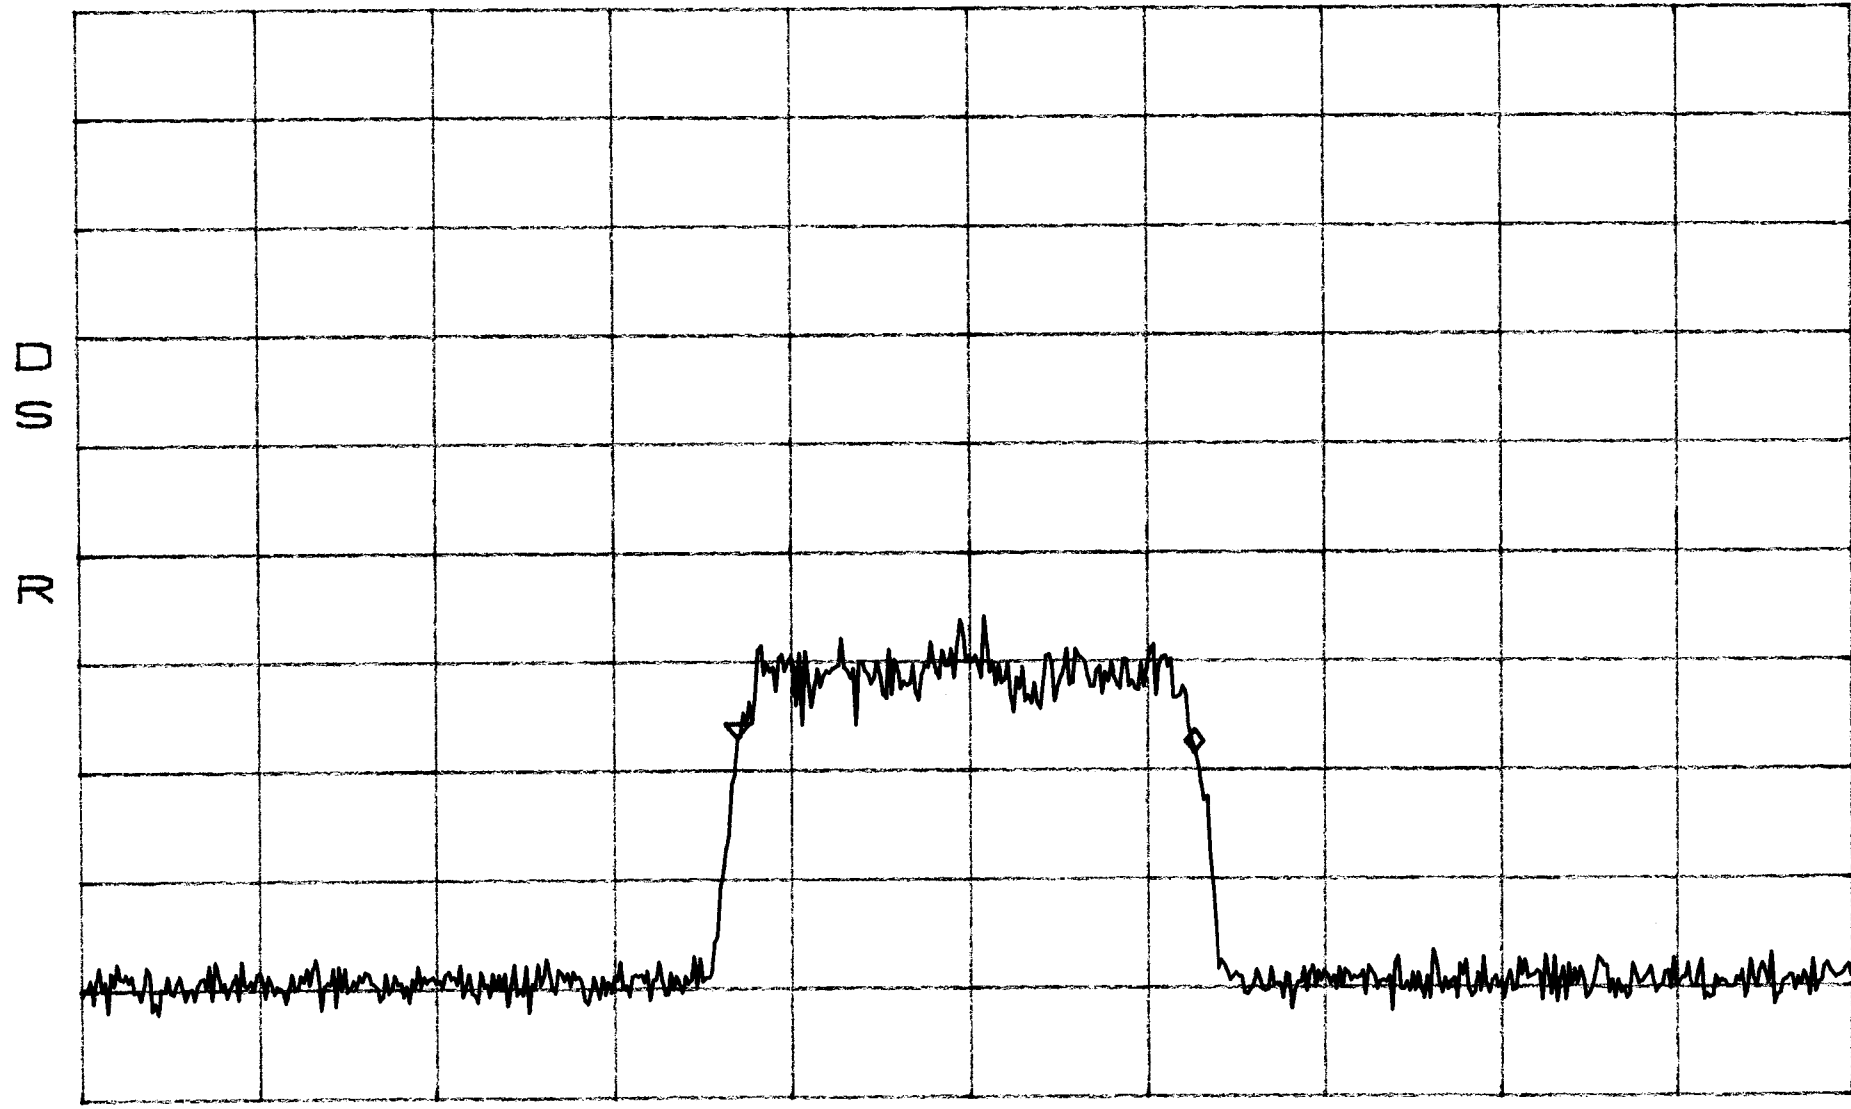

CENTER 1.977500GHZ

SPAN 5.000MHZ

*RBW 10KHZ


*VBW 3.0KHZ

SWP 420ms

Occupied Band width BAND E,F,c
CDMA OUT

*ATTEN 30dB
RL 51.3dBm

$\Delta MKR -1.84dB$
1.267MHz

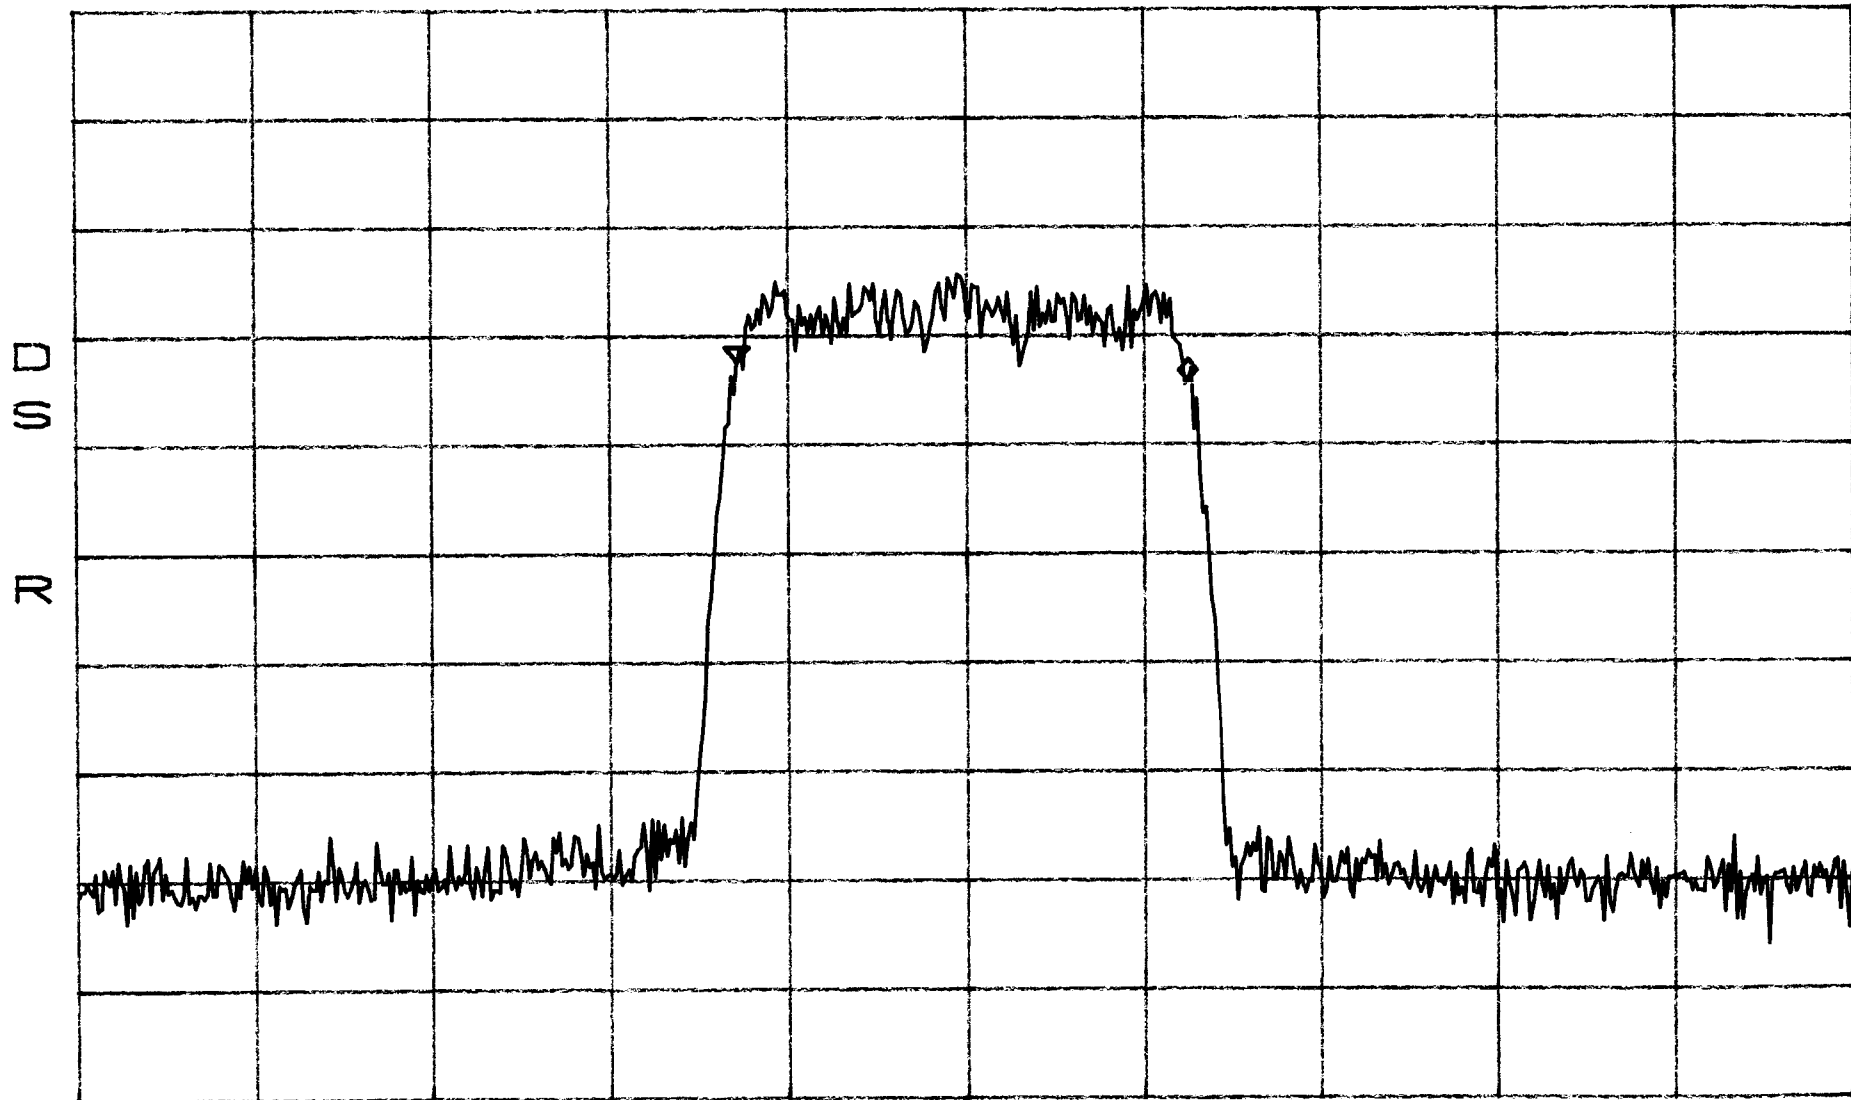

CENTER 1.977500GHz SPAN 5.000MHz
*RBW 10kHz *VBW 3.0kHz SWP 420ms

24.238 Emission Limits

The Emission limitations for cellular measurements were performed at the following test location:

- - ADC facility

Test equipment used:

Model Number	Manufacturer	Description	Serial Number	Cal Due
■ - E4437B	HP	Signal Generator	39260515	Sept 04
■ - ZAPD-21	Mini-Circuits	Combiner	N/A	CNR
■ - 50FH-030-300		Attenuator	N/A	CNR
■ - HPD60-5	Xantrex	DC Power Supply	MC27841	CNR
■ - 8594E	HP	Spectrum Analyzer	MC27761	April 04

All measurement instrumentation is traceable to the National Institute of Standards and Technology (NIST) and is calibrated annually. Equipment labeled CNR (Calibration Not Required) is verified and compensated for with NIST traceable calibrated equipment.

- - Wild River Lab Large Test Site (Case Emissions Test)

TÜV Product Service Test equipment used for Case Emissions Test:

TUV ID	Model Number	Manufacturer	Description	Serial Number	Cal Due
■ - 3932	8566B	Hewlett-Packard	Spectrum Analyzer	2115A00853	9-03-03
■ - 3931	85662A	Hewlett-Packard	Analyzer Display	2112A02220	9-03-03
■ - 2682	85650A	Hewlett-Packard	Quasi-Peak Adapter	2811A01127	2-08-04
■ - 3203	EM-6917B	Electro-Metrics	Biconicalog Periodic	101	3-04-04
■ - 2074	3115	Electro-Mechanics (EMCO)	Ridge Guide Antenna	2504	10-15-03
■ - 2665	ZHL-1042J	Mini-Circuits	Preamplifier 1-4 GHz	32296	10-15-03
■ - 2478	AWT-18037	Avantek	Preamplifier 8-18 GHz	1001-9226	4-17-04
■ - 2477	AFT-8434	Avantek	Preamplifier 4-8 GHz	2613A92801	4-17-04

All measurement instrumentation is traceable to the National Institute of Standards and Technology (NIST) and is calibrated annually. Equipment labeled CNR (Calibration Not Required) is verified and compensated for with NIST traceable calibrated equipment.

Environmental conditions – Wild River Lab:

	<u>Actual</u>
Temperature	: 22 °C
Relative Humidity	: 27 %
Atmospheric pressure	: 99.3 kPa
Power supply system	: 60 Hz - 115 V - 1-phase

Emissions Limits Data on following pages

**Conducted Emission Limits Test for ADC Inc.
Digivance 1900 MHz 20 Watt System
Model Numbers DGVL-436100SYS, DGVL-446100SYS,
DGVL-456100SYS and DGVL-466100SYS.**

The out of band emissions were measured directly from the EUT antenna output with a spectrum analyzer from 30 MHz to the 10th harmonic of the highest carrier frequency. Test signals used: CW, FM (1 kHz @ 8 kHz deviation), TDMA, and CDMA. The different signals were input one at a time to the EUT. In all cases, the out of band emissions were less than -13dBm from the equation
$$(19\text{dBm} - [43 + 10\log(0.08\text{W})])$$

Band edge compliance is also demonstrated using a FM signal at the upper and lower limits of the band and a resolution bandwidth of 300 Hz.

Results:


Pass (see plots)

Conducted Emissions Band A,D
Low

*ATTEN 30dB
RL 51.3dBm

MKR -15.70dBm
1.9478GHz

10dB/

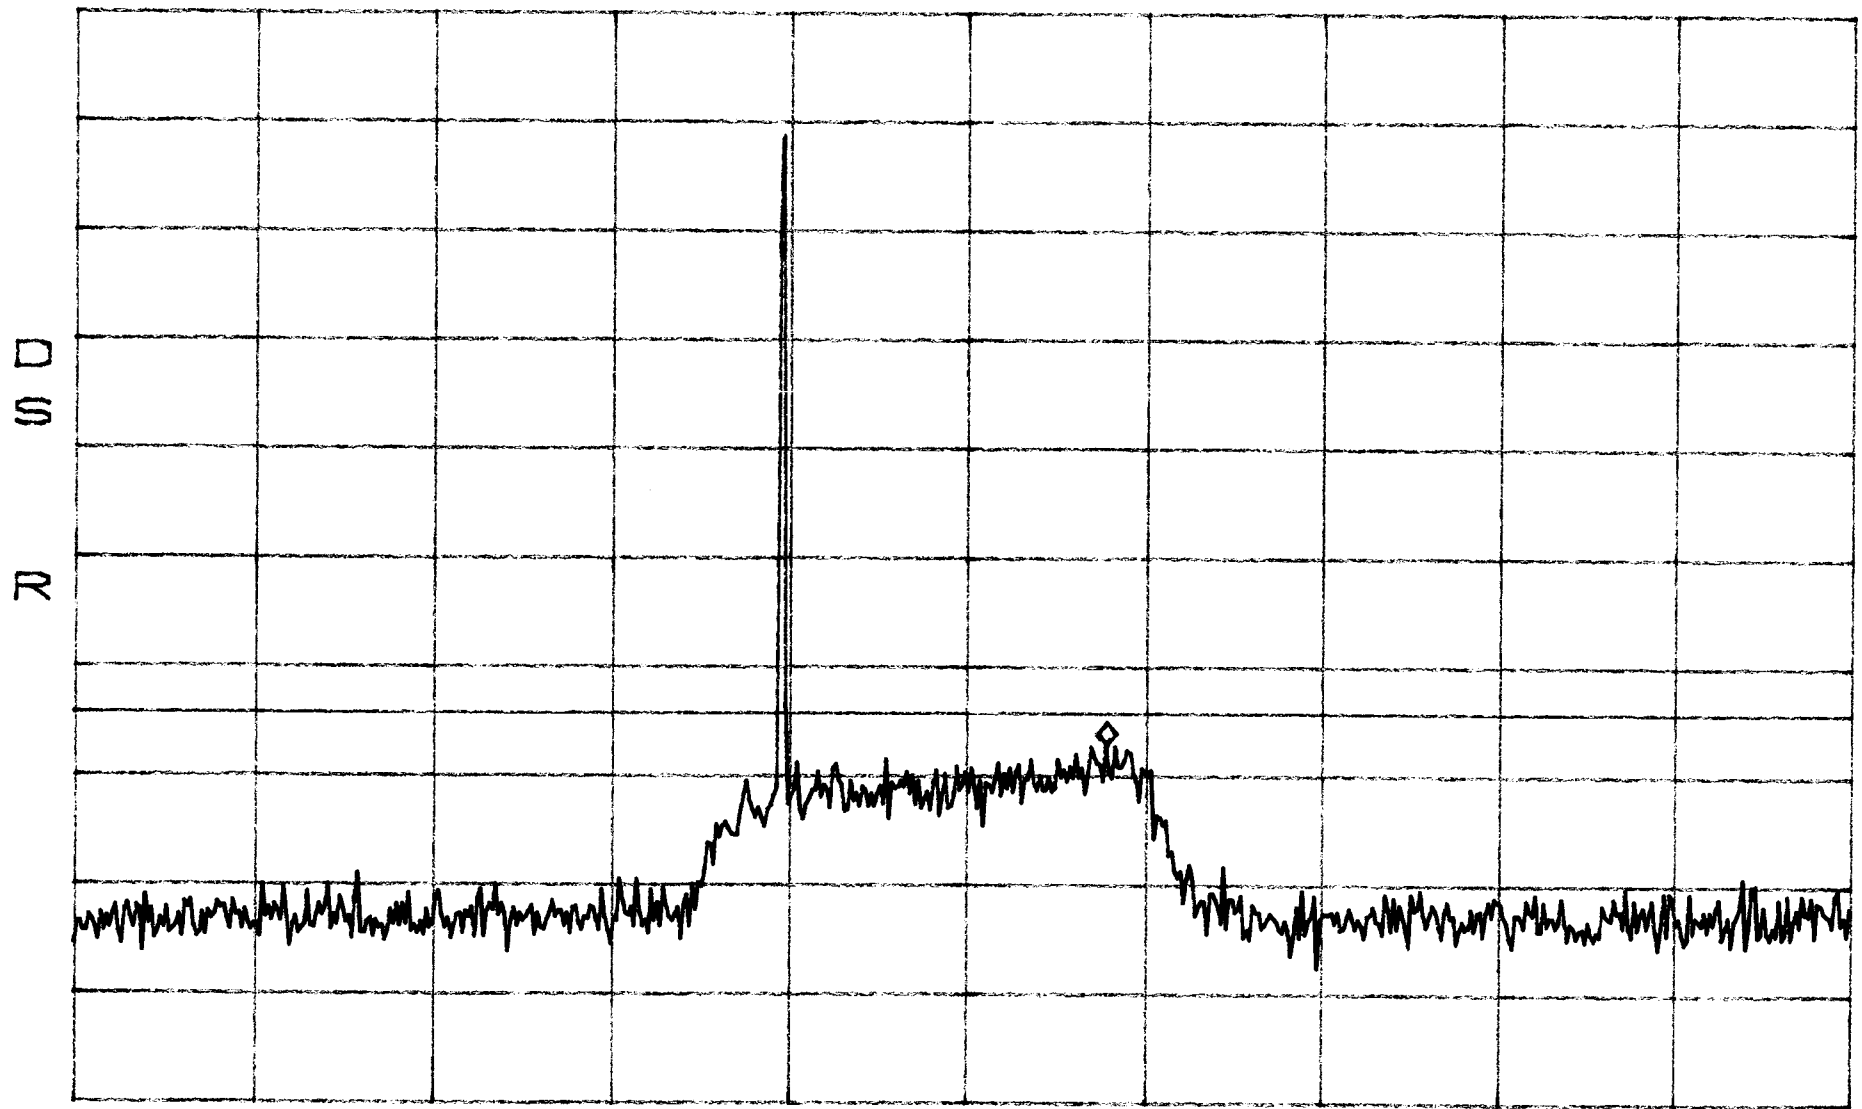

CENTER 1.9400GHz
*RBW 30kHz VBW 30kHz


SPAN 100.0MHz
SWP 280ms

Conducted Emissions Band A,D
Low

*ATTEN 30dB
RL 51.3dBm

MKR -16.20dBm
13.24GHz

10dB/

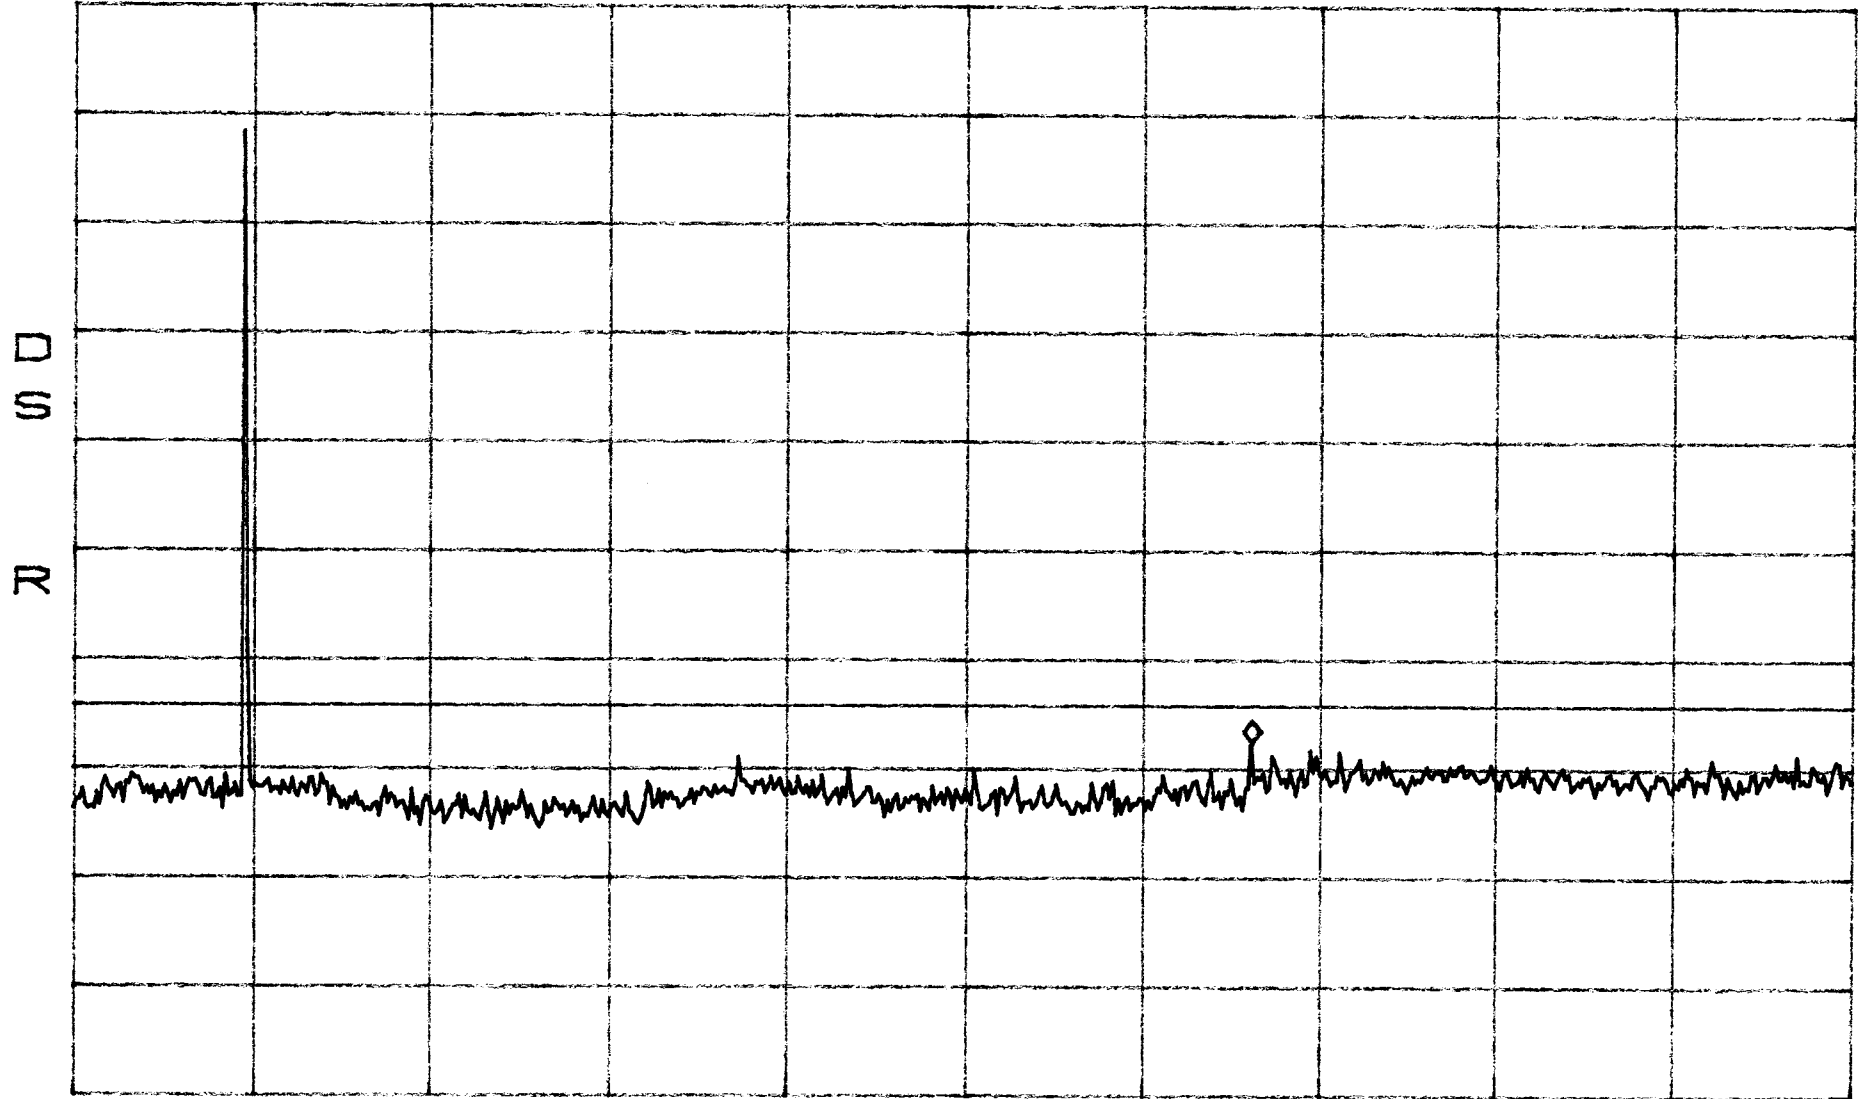

START 30MHz
*RBW 300kHz

VBW 300kHz


STOP 20.00GHz
SWP 560ms

Conducted Emissions Band A,D
Mid

*ATTEN 30dB
RL 51.3dBm

MKR -15.03dBm
1.9487GHz

10dB/

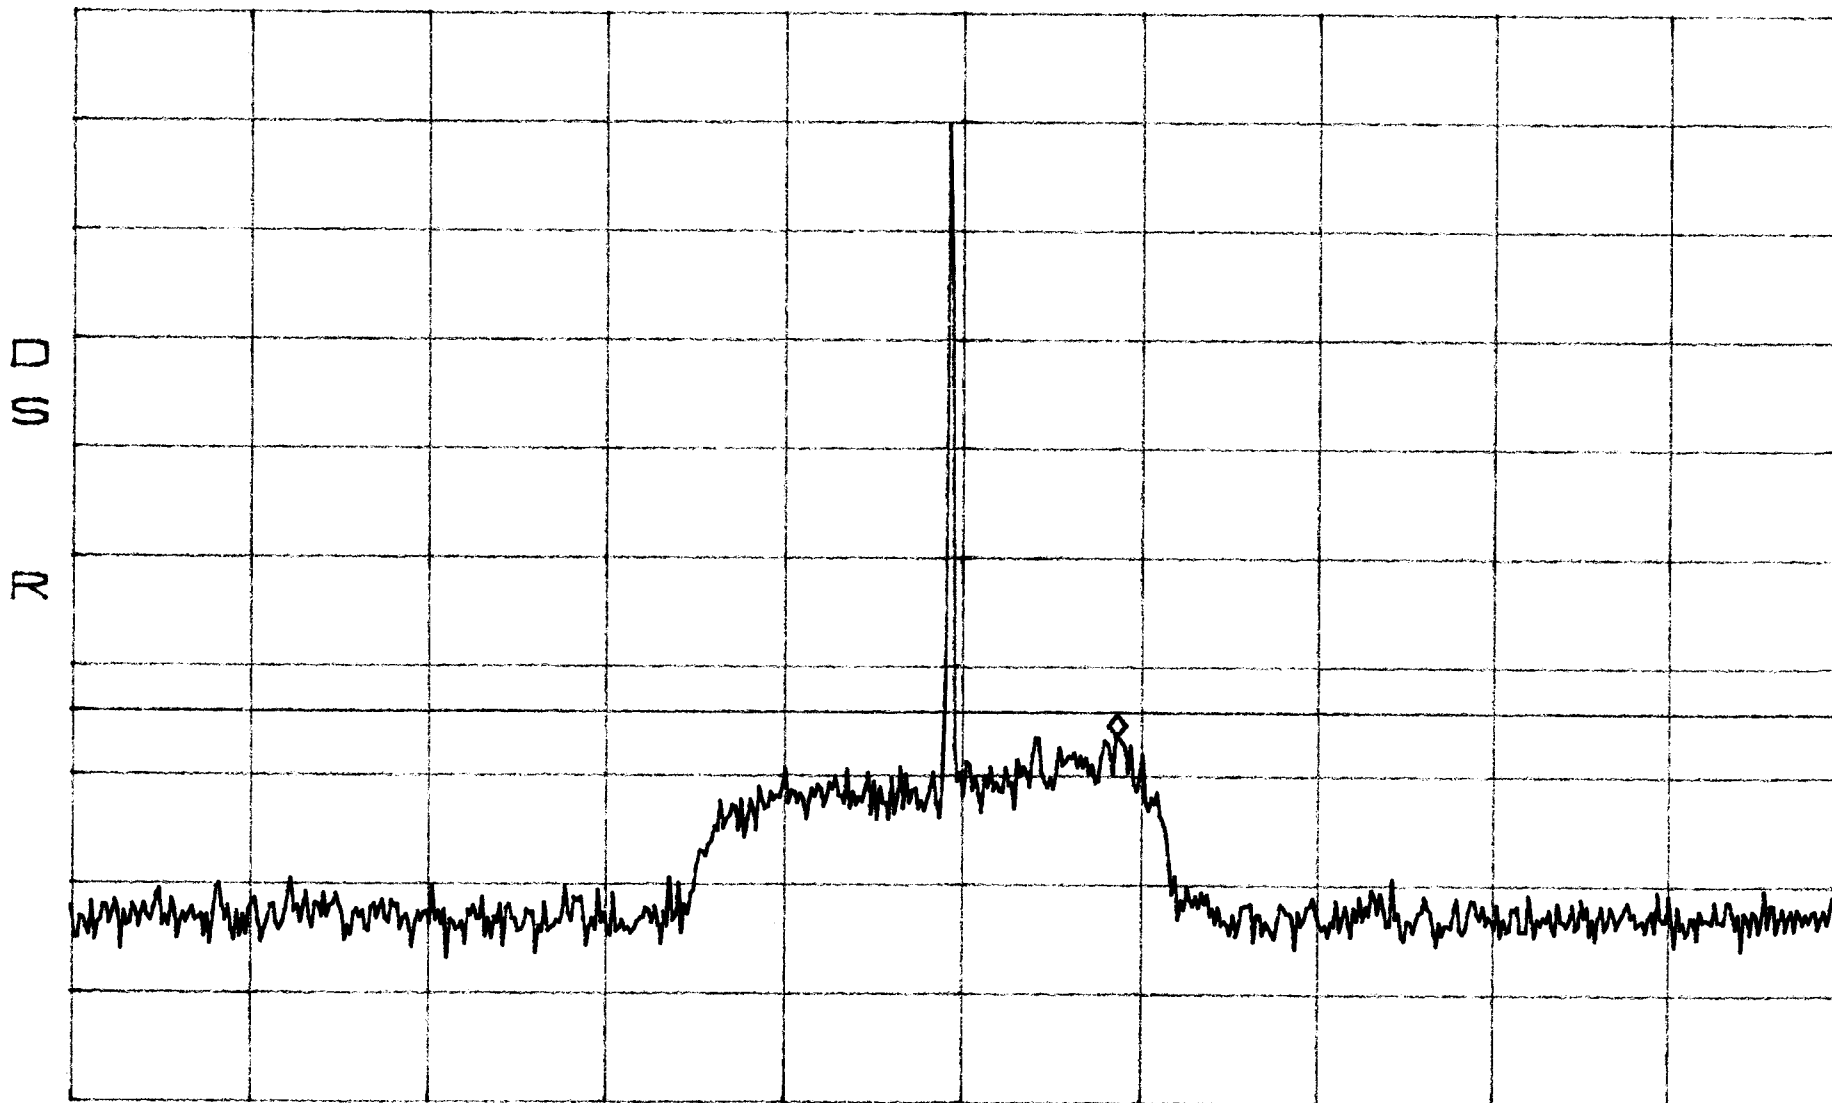

CENTER 1.9400GHz
*RBW 30kHz VBW 30kHz


SPAN 100.0MHz
SWP 280ms

Conducted Emissions Band A,D
Mid

*ATTN 30dB
RL 51.3dBm

MKR -17.20dBm
19.20GHz

10dB/

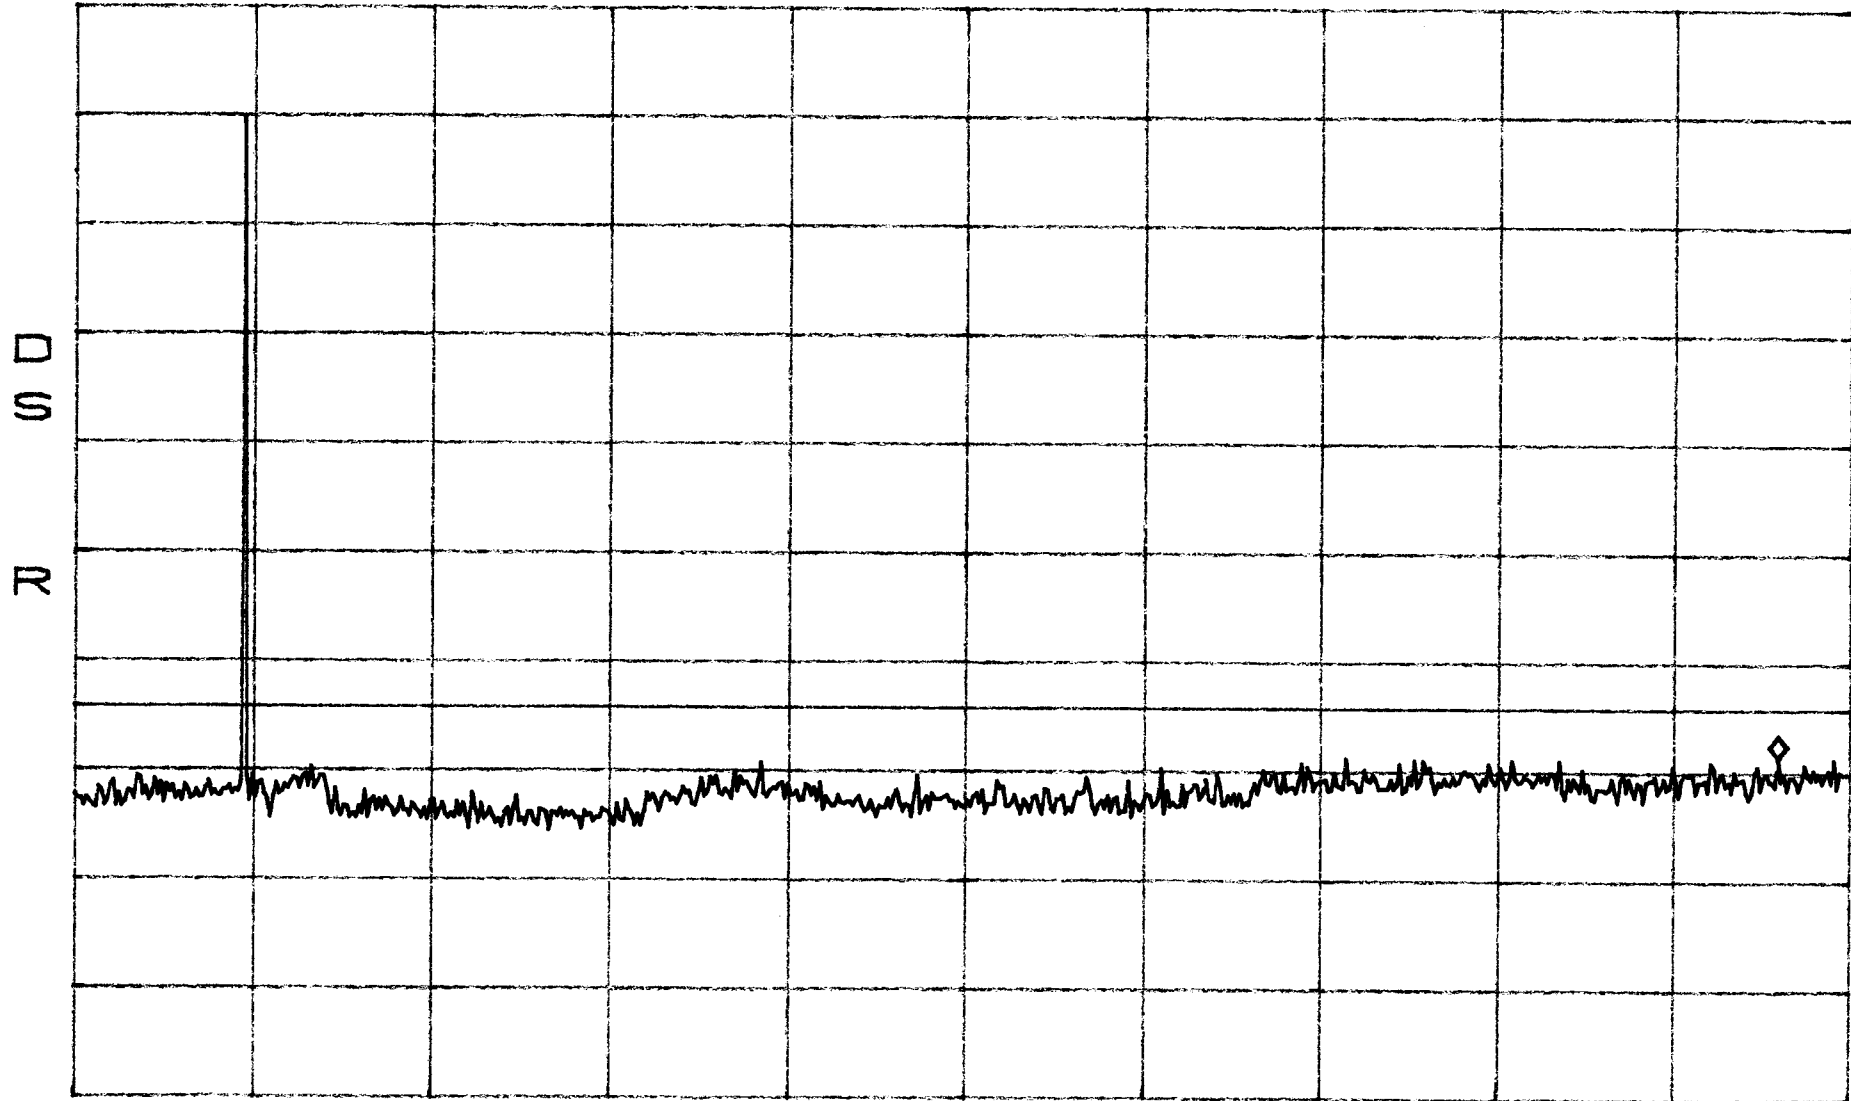

START 30MHz
*RBW 300kHz

VBW 300kHz


STOP 20.00GHz
SWP 560ms

Conducted Emissions Band A,D
High

*ATTEN 30dB
RL 51.3dBm

MKR -27.53dBm
1.9607GHz

10dB/

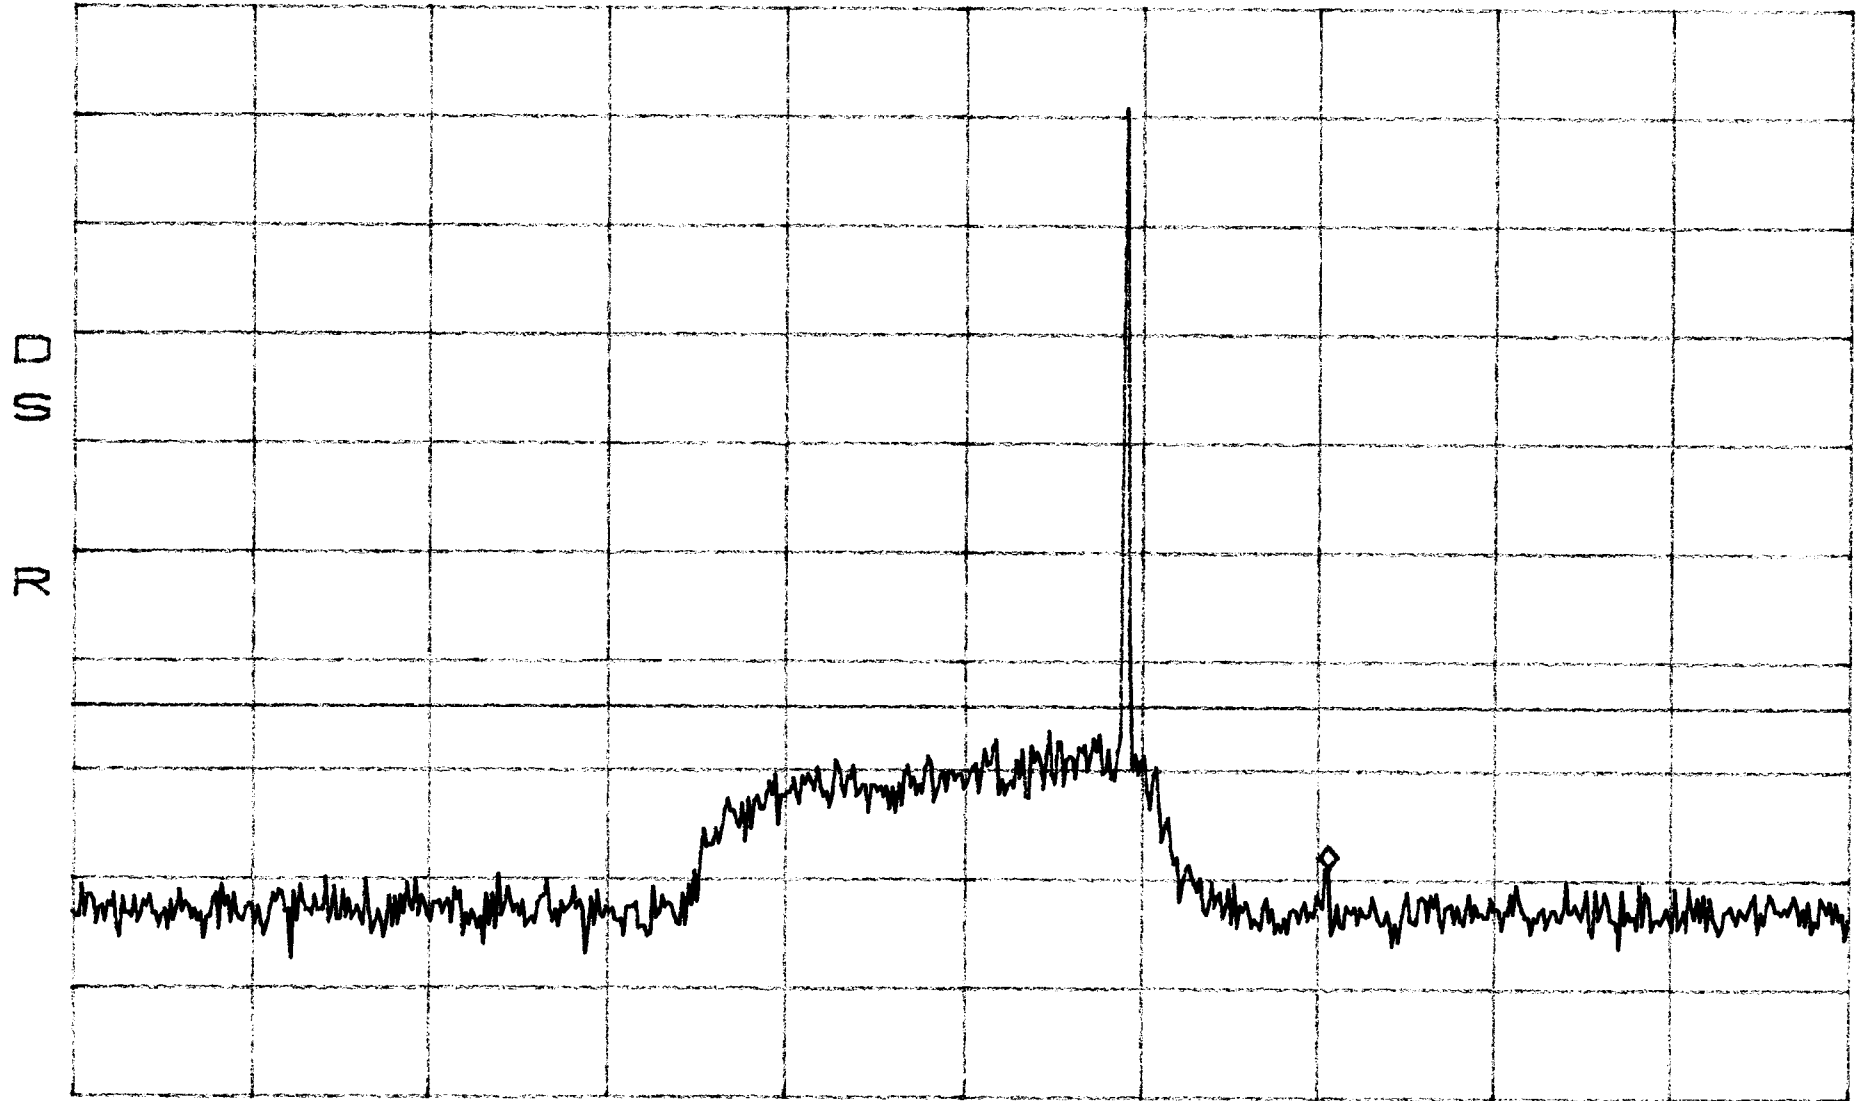

CENTER 1.9400GHz
*RBW 30kHz

VBW 30kHz


SPAN 100.0MHz
SWP 280ms

Conducted Emissions Band A,D
High

*ATTEN 30dB
RL 51.3dBm

MKR -16.87dBm
16.31GHz

10dB/

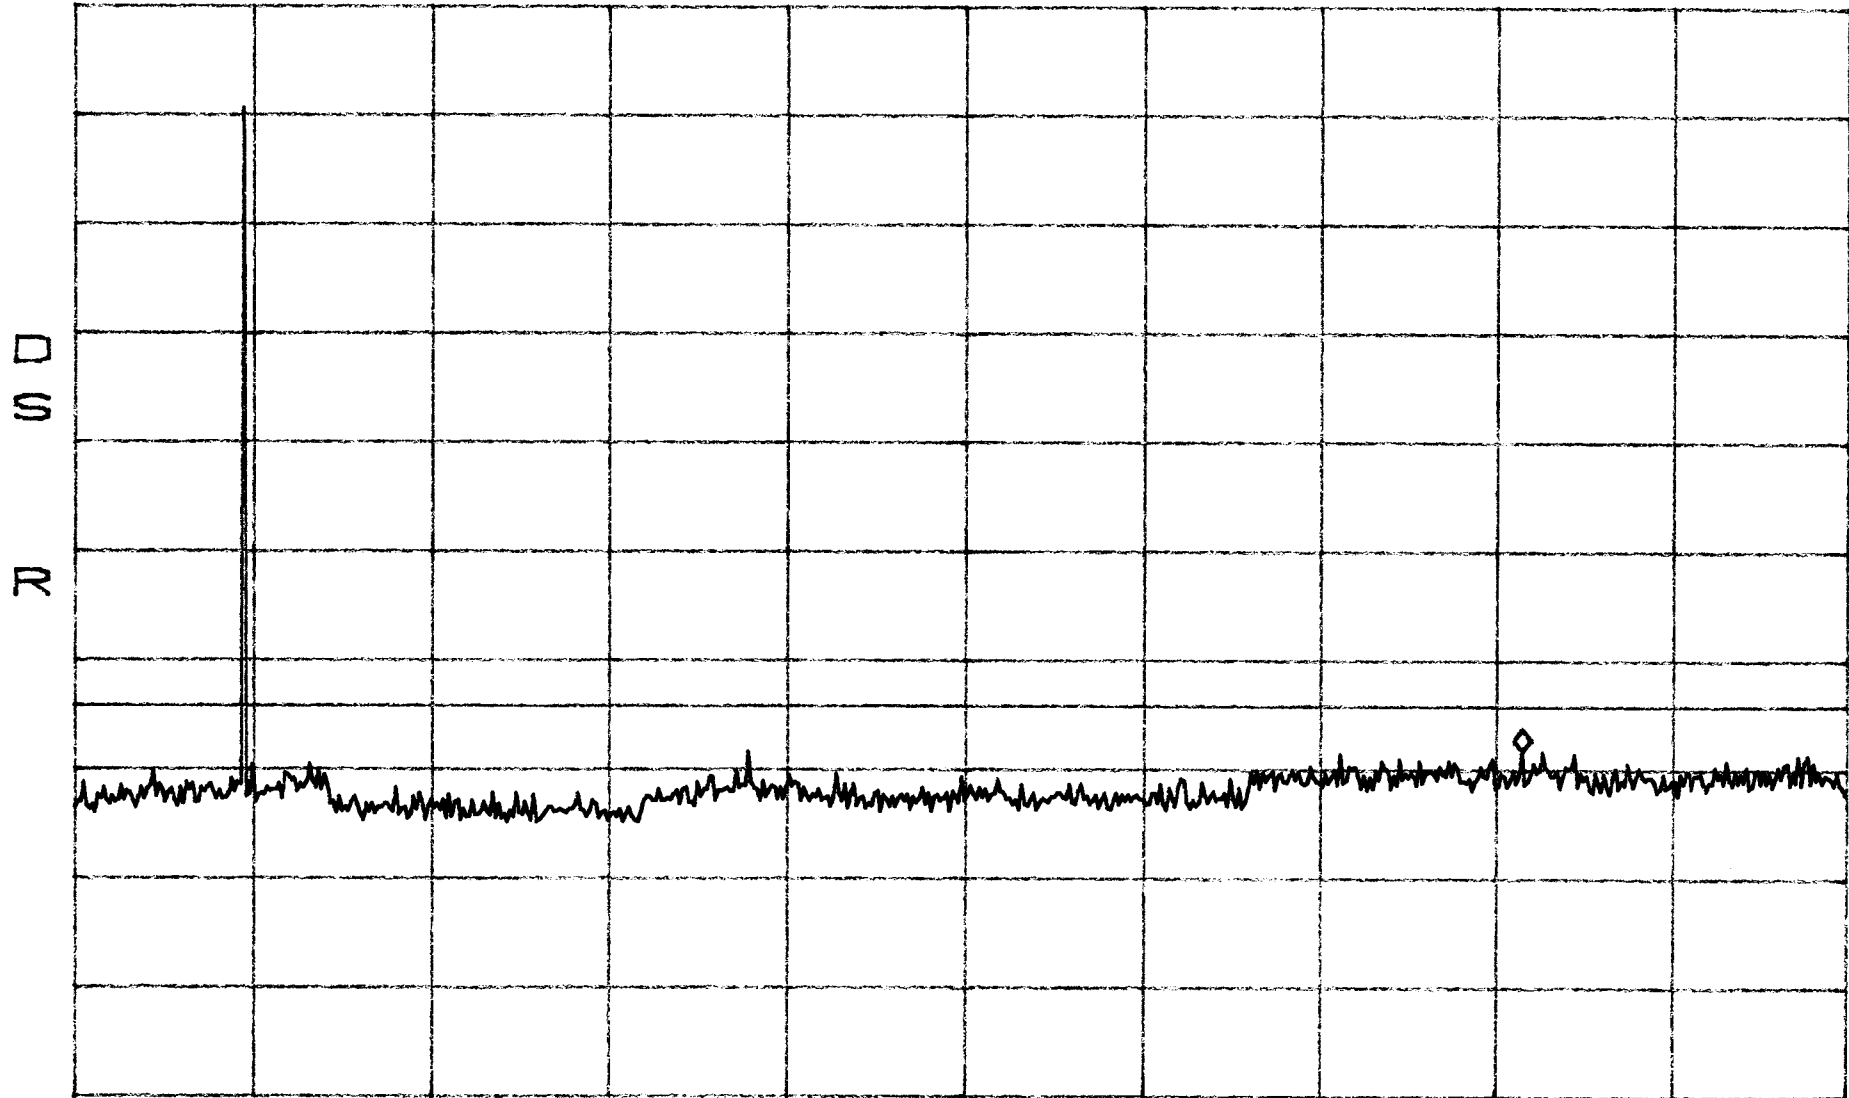


START 30MHz STOP 20.00GHz
*RBW 300kHz VBW 300kHz SWP 560ms

Conducted Emissions Band D,B,E
Low

*ATTEN 30dB
RL 51.3dBm

MKR -16.37dBm
1.95706GHz

10dB/

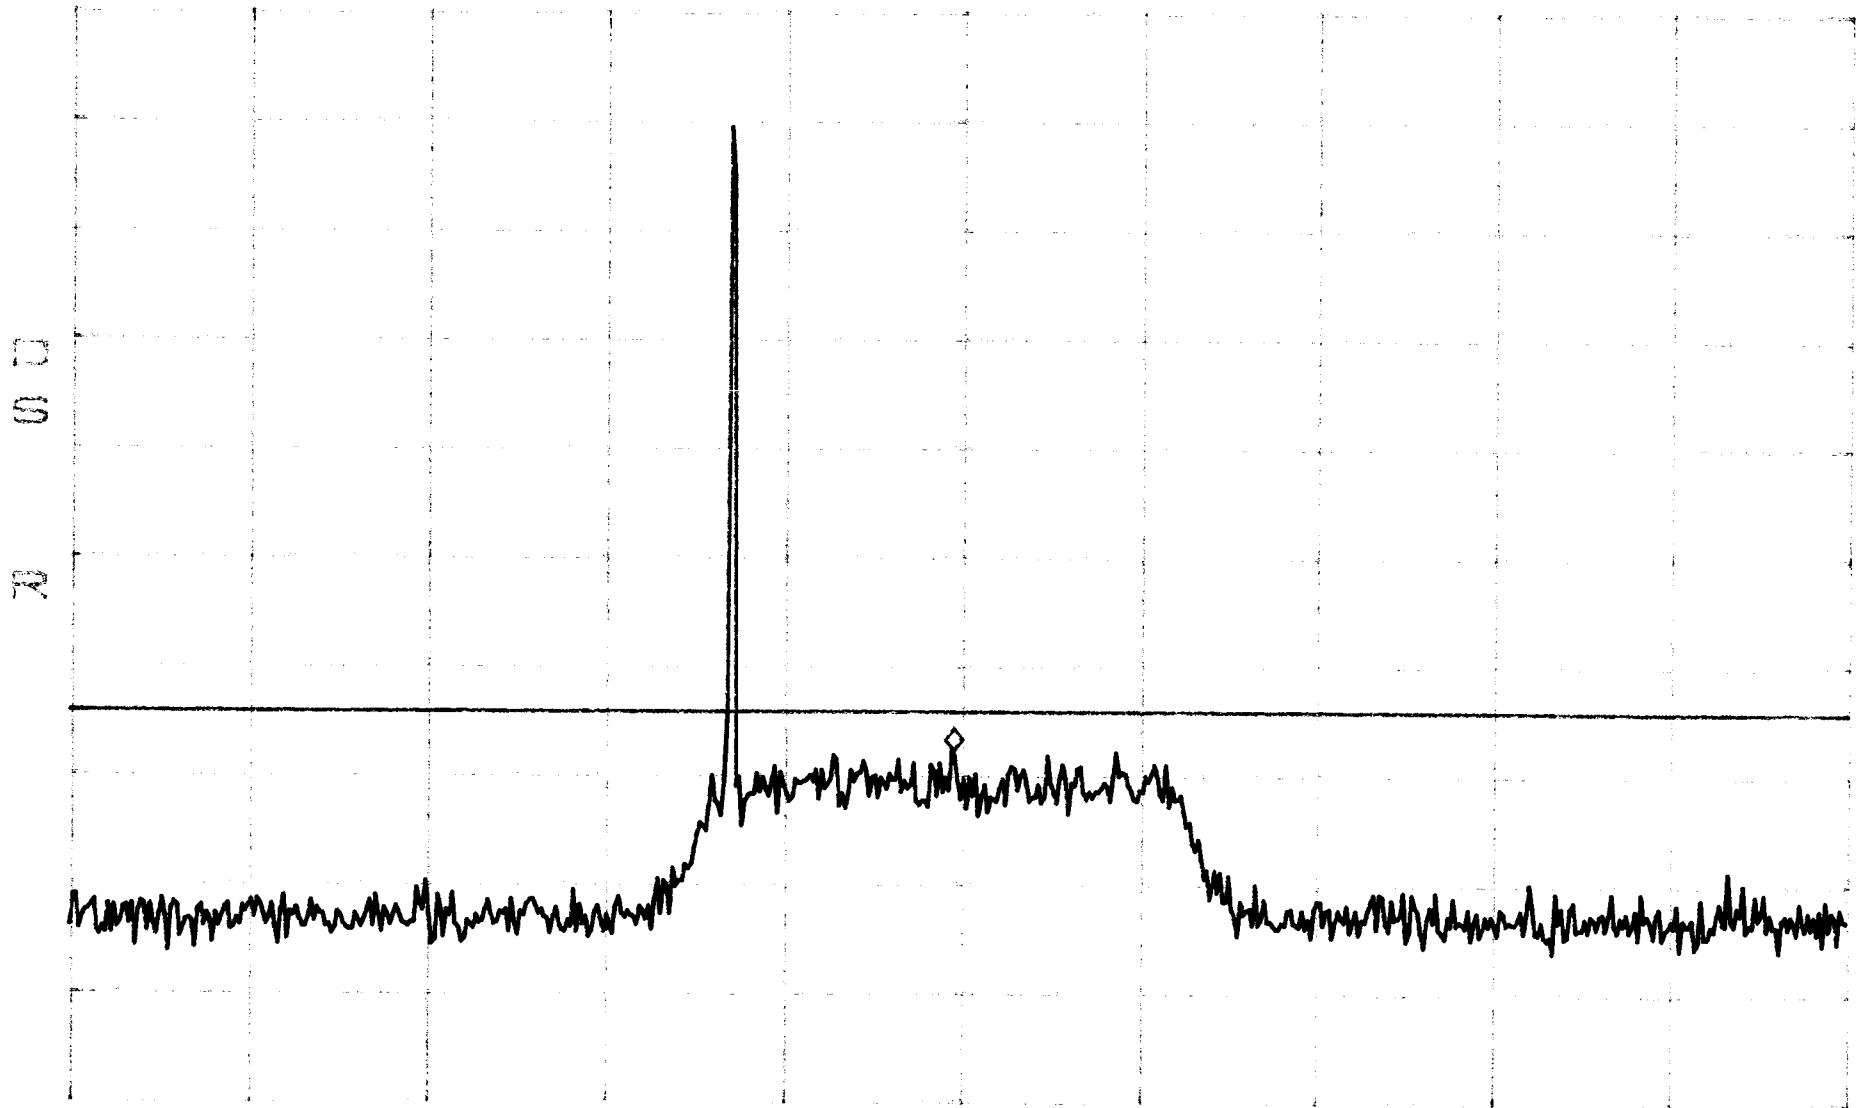

CENTER 1.95750GHz
*RBW 30kHz VBW 30kHz


SPAN 100.0MHz
SWP 280ms

Conducted Emissions Band D, B, E
Low

*ATTEN 30dB
RL 51.3dBm

MKR -16.70dBm
15.91GHz

10dB/

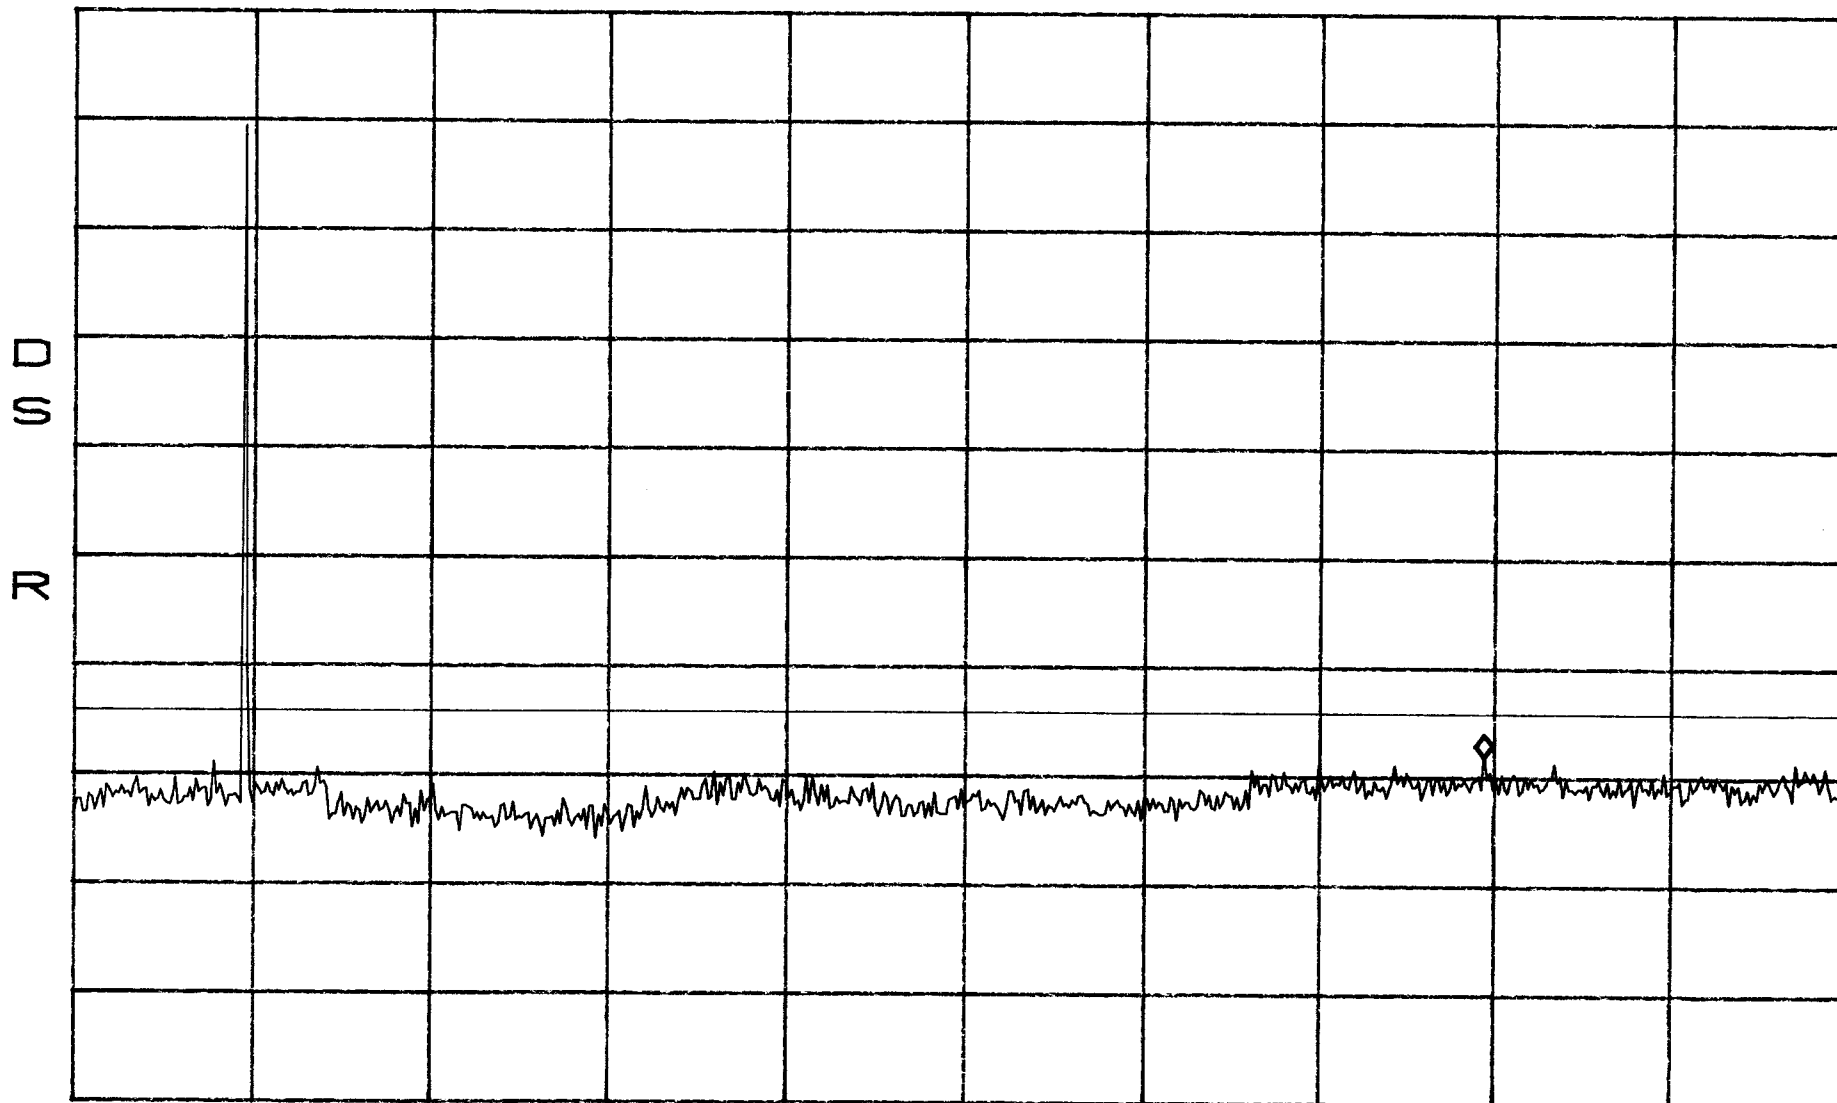

START 30MHz
*RBW 300kHz

VBW 300kHz


STOP 20.00GHz
SWP 560ms

Conducted Emissions Band D,B,E
Mid

*ATTEN 30dB
RL 51.3dBm

MKR -16.70dBm
1.9483GHz

10dB/

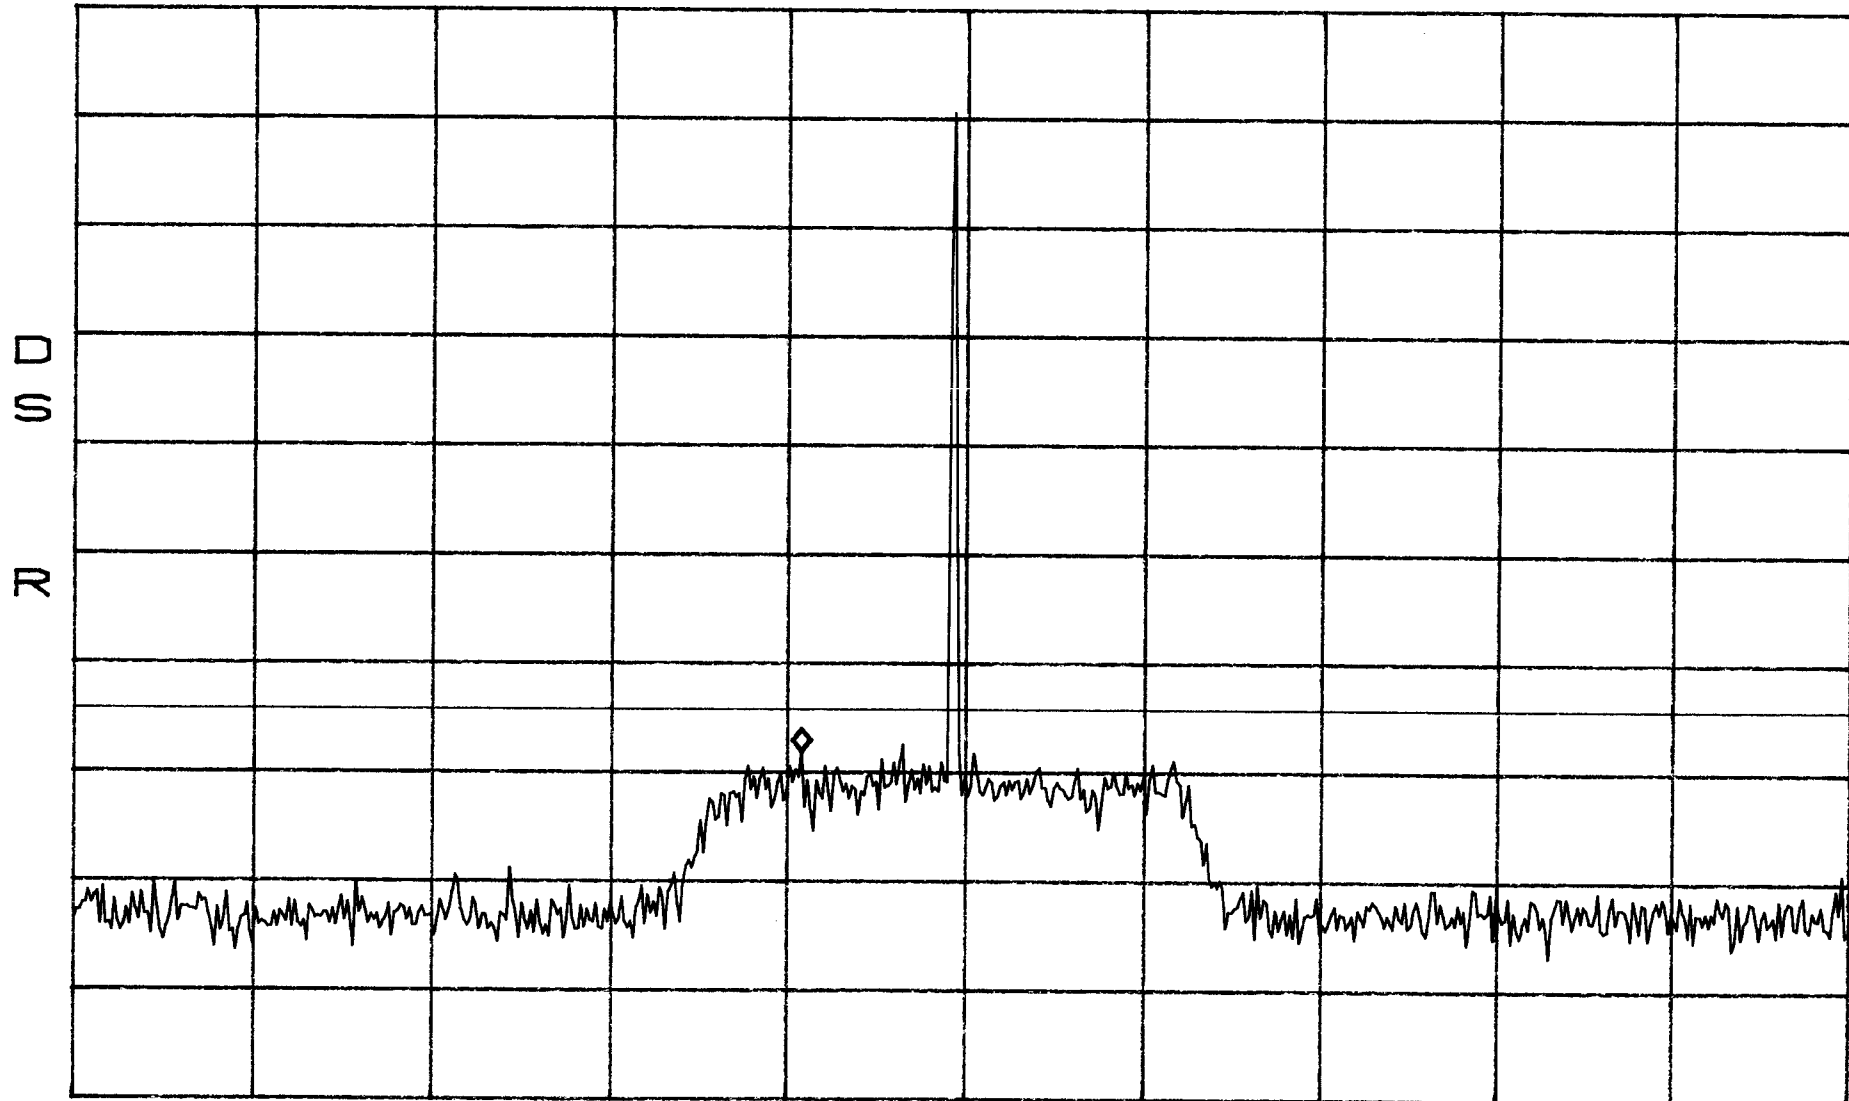

CENTER 1.9575GHz
*RBW 30kHz VBW 30kHz


SPAN 100.0MHz
SWP 280ms

Conducted Emissions Band D,B,E
Mid

*ATTEN 30dB
RL 51.3dBm

MKR -17.20dBm
14.28GHz

1dB/

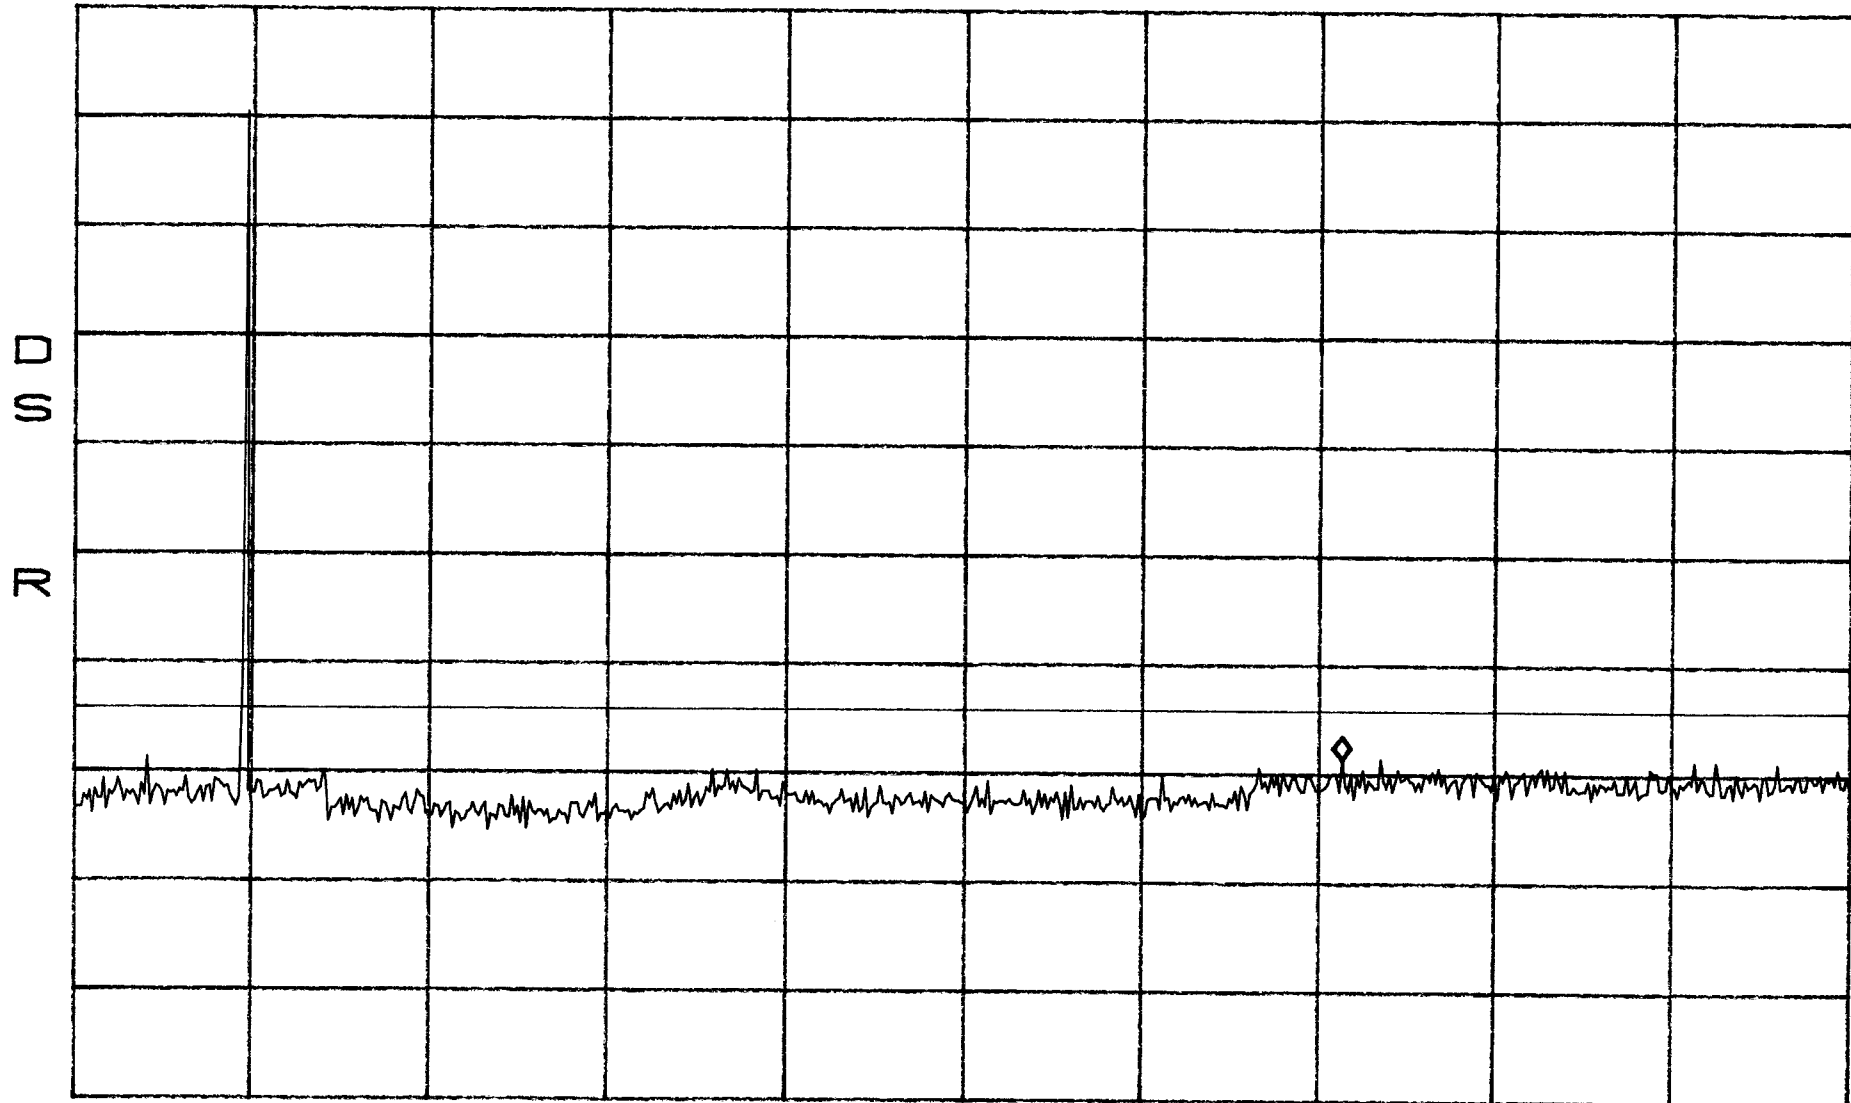

START 30MHz
*RBW 300kHz

VBW 300kHz


STOP 20.00GHz
SWP 560ms

Conducted Emissions Band D,B,E
High

*ATTEN 30dB
RL 51.3dBm

MKR -15.87dBm
1.9677GHz

10dB/

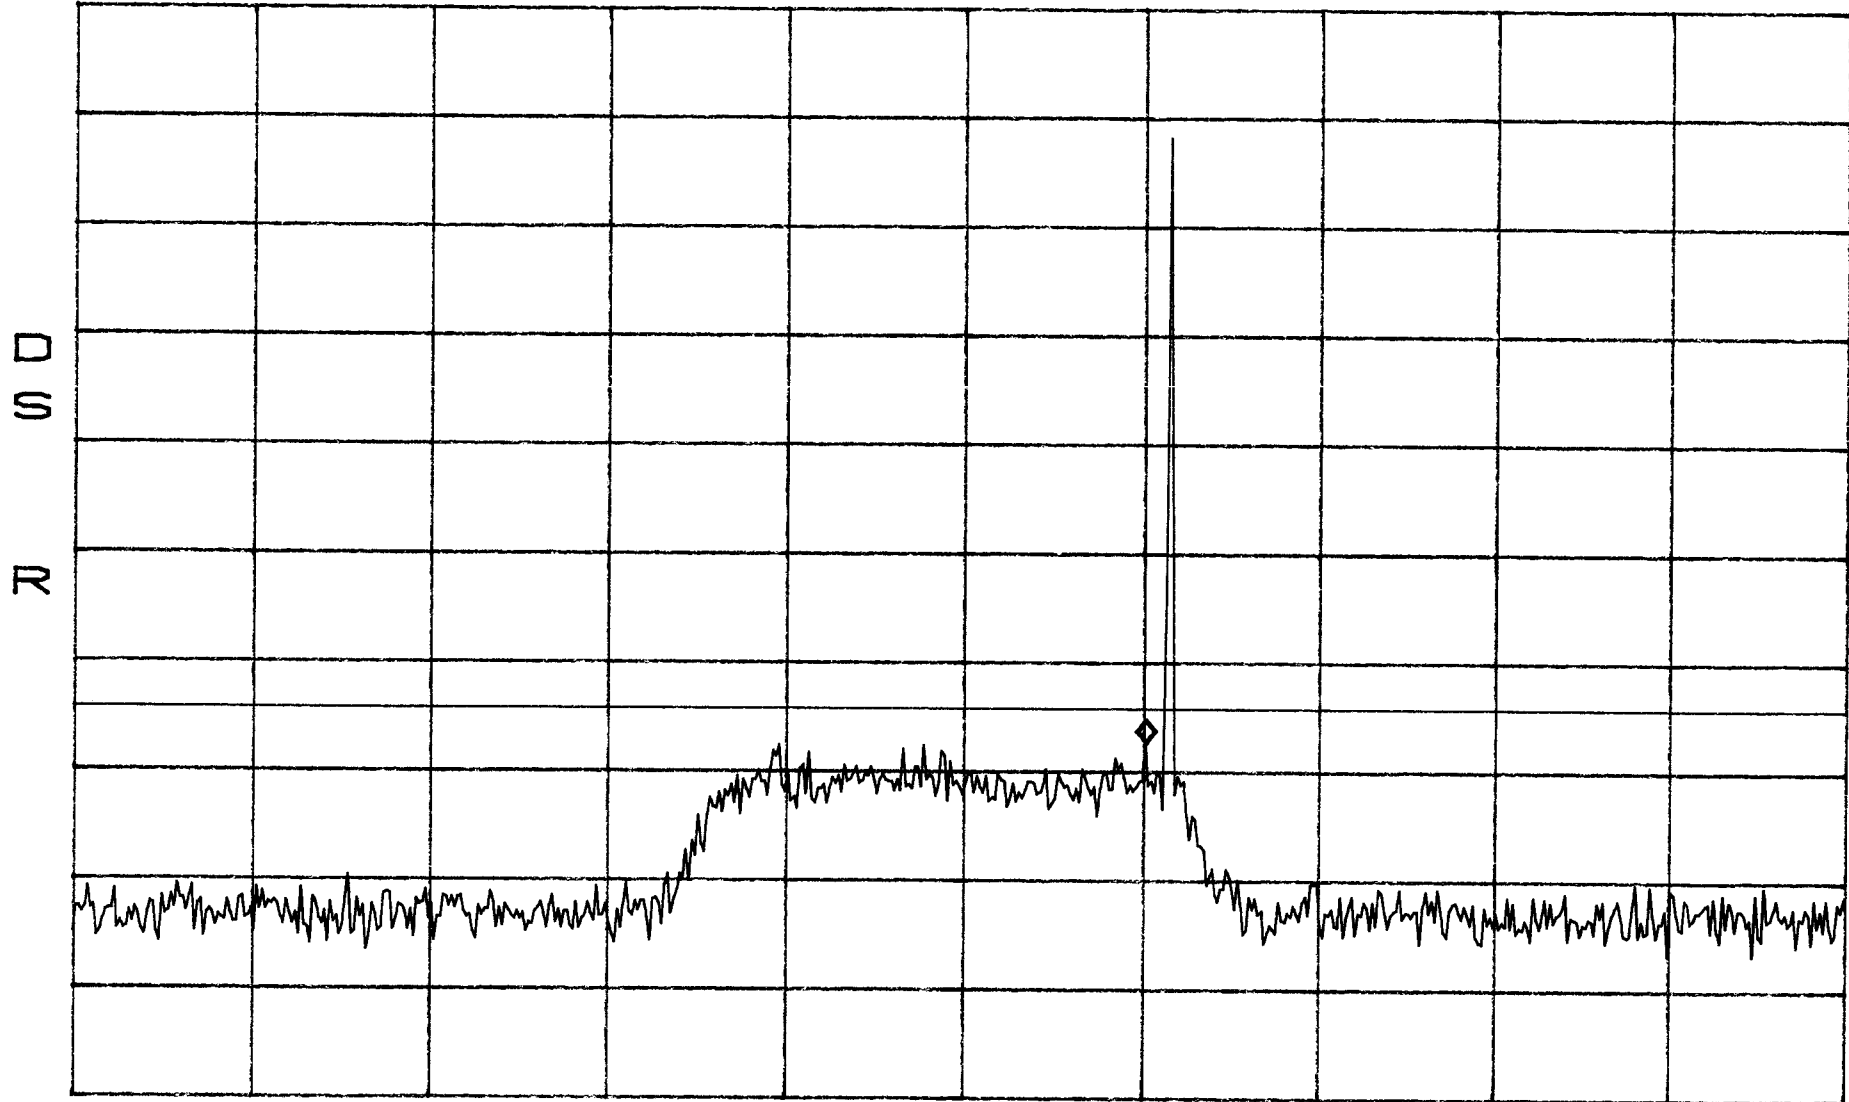

CENTER 1.9575GHz
*RBW 30kHz

VBW 30kHz


SPAN 100.0MHz
SWP 280ms

Conducted Emissions Band D,B,E
High

*ATTN 30dB
RL 51.3dBm

MKR -16.70dBm
19.80GHz

10dB/

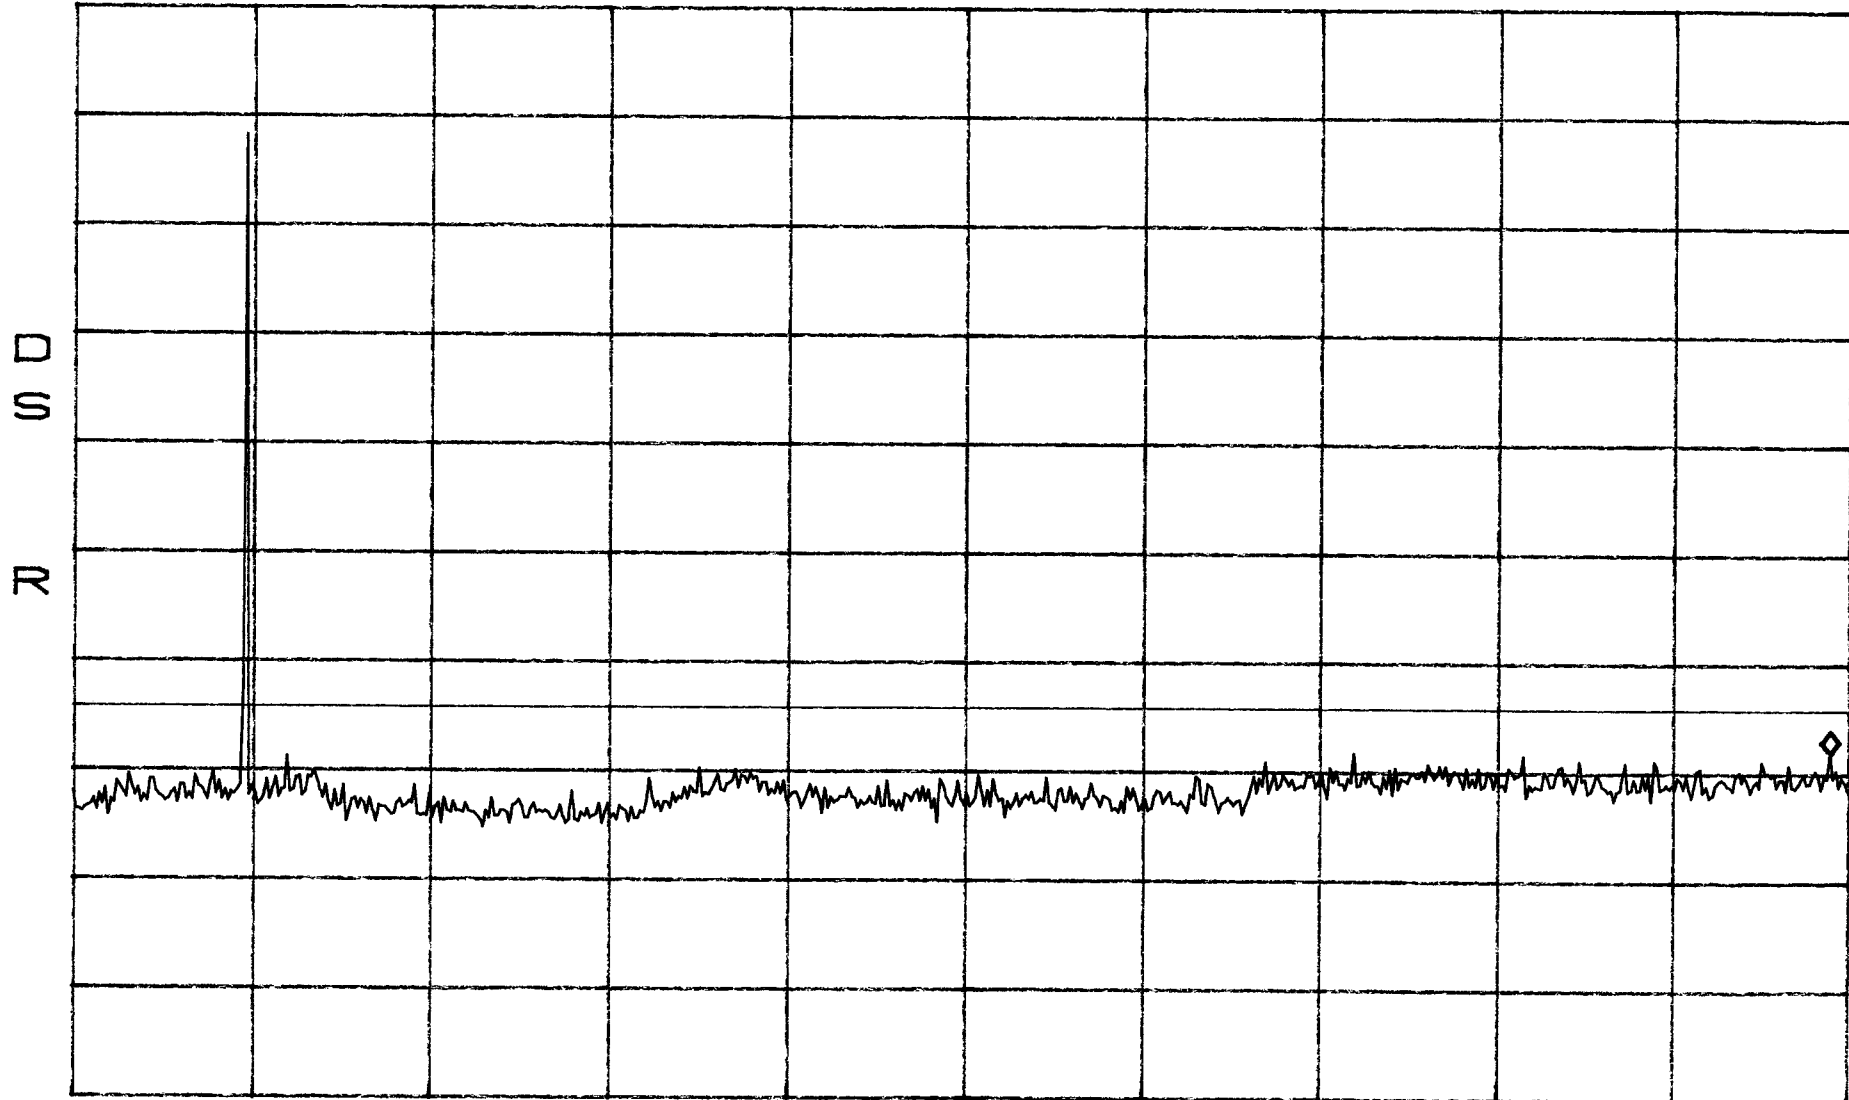

START 30MHz
*RBW 300kHz

VBW 300kHz


STOP 20.00GHz
SWP 560ms

Conducted Emissions Band B,E,F

Low

*ATTEN 30dB
RL 51.3dBm

MKR -16.37dBm
1.9532GHz

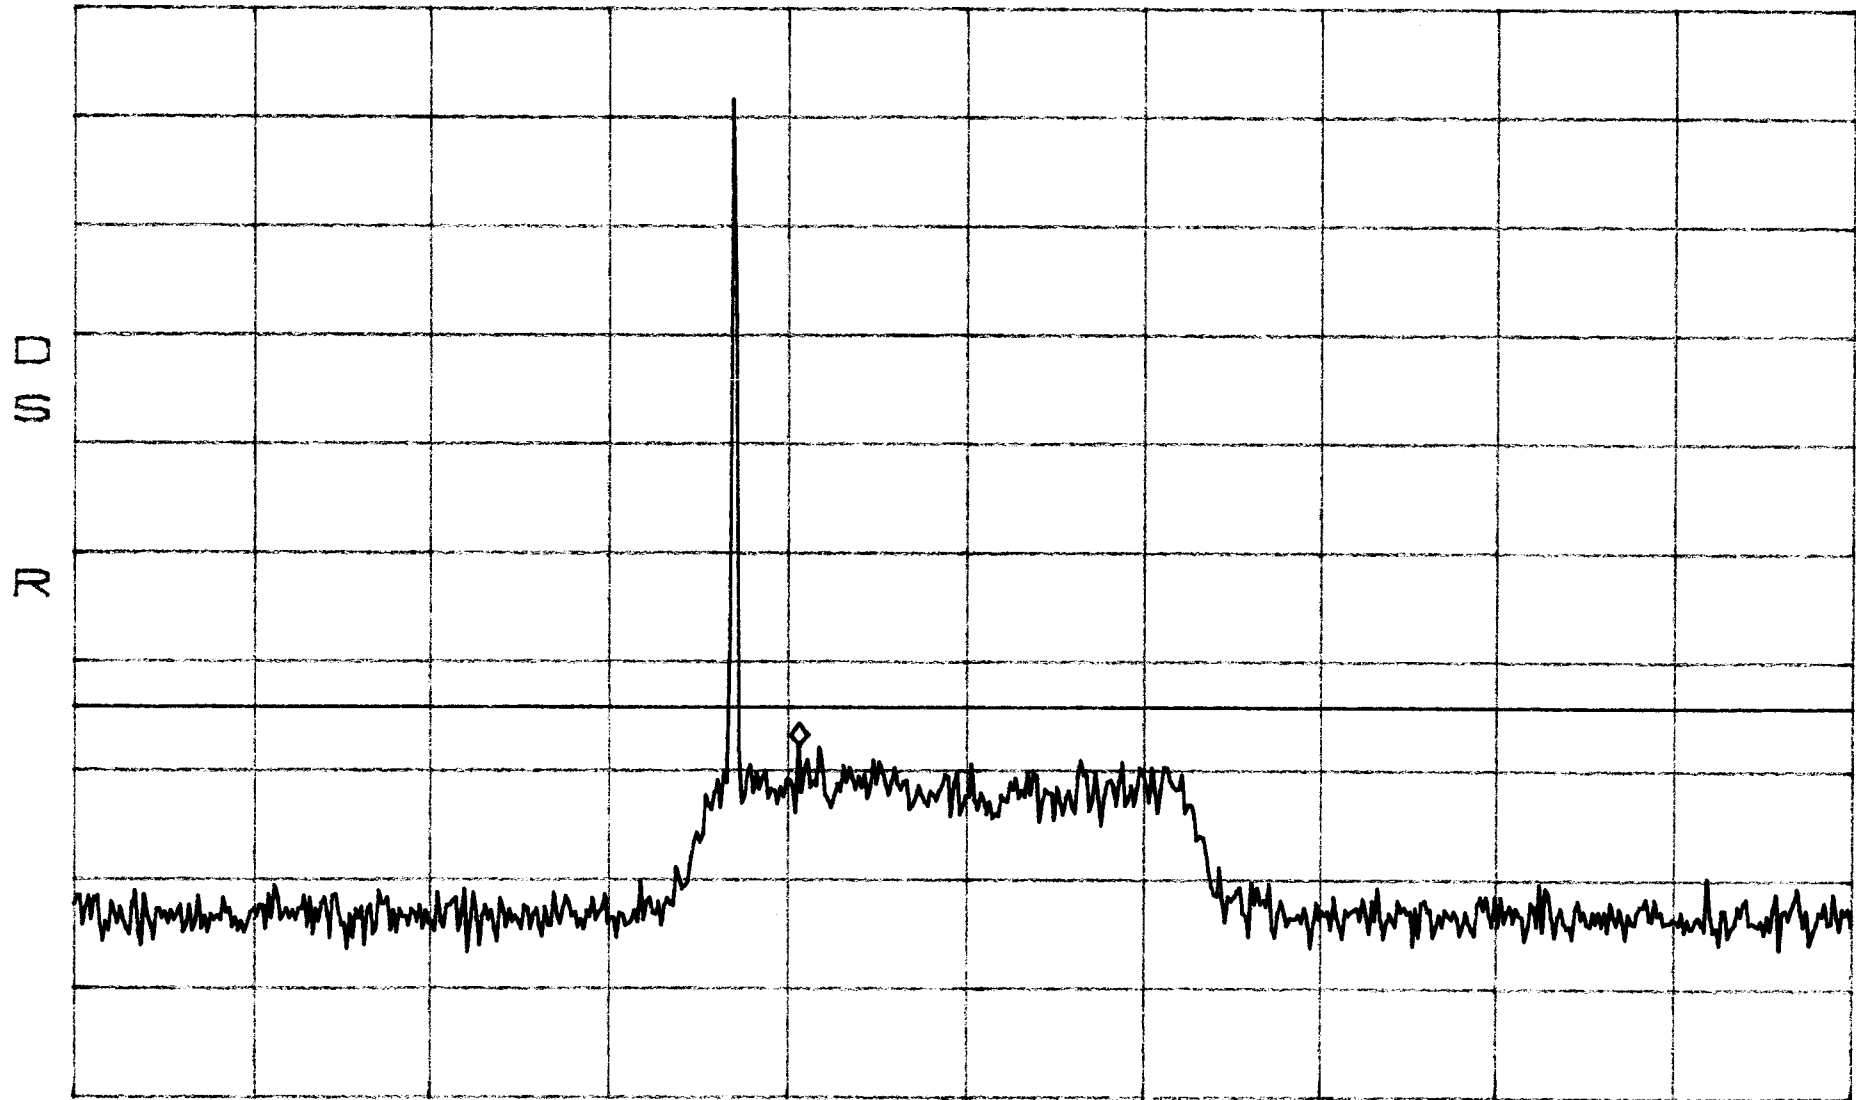


CENTER 1.9625GHz
*RBW 30kHz VBW 30kHz

SPAN 100.0MHz
SWP 280ms

Conducted Emissions Band B,E,F
Low

*ATTN 30dB
RL 51.3dBm

MKR -16.53dBm
13.44GHz

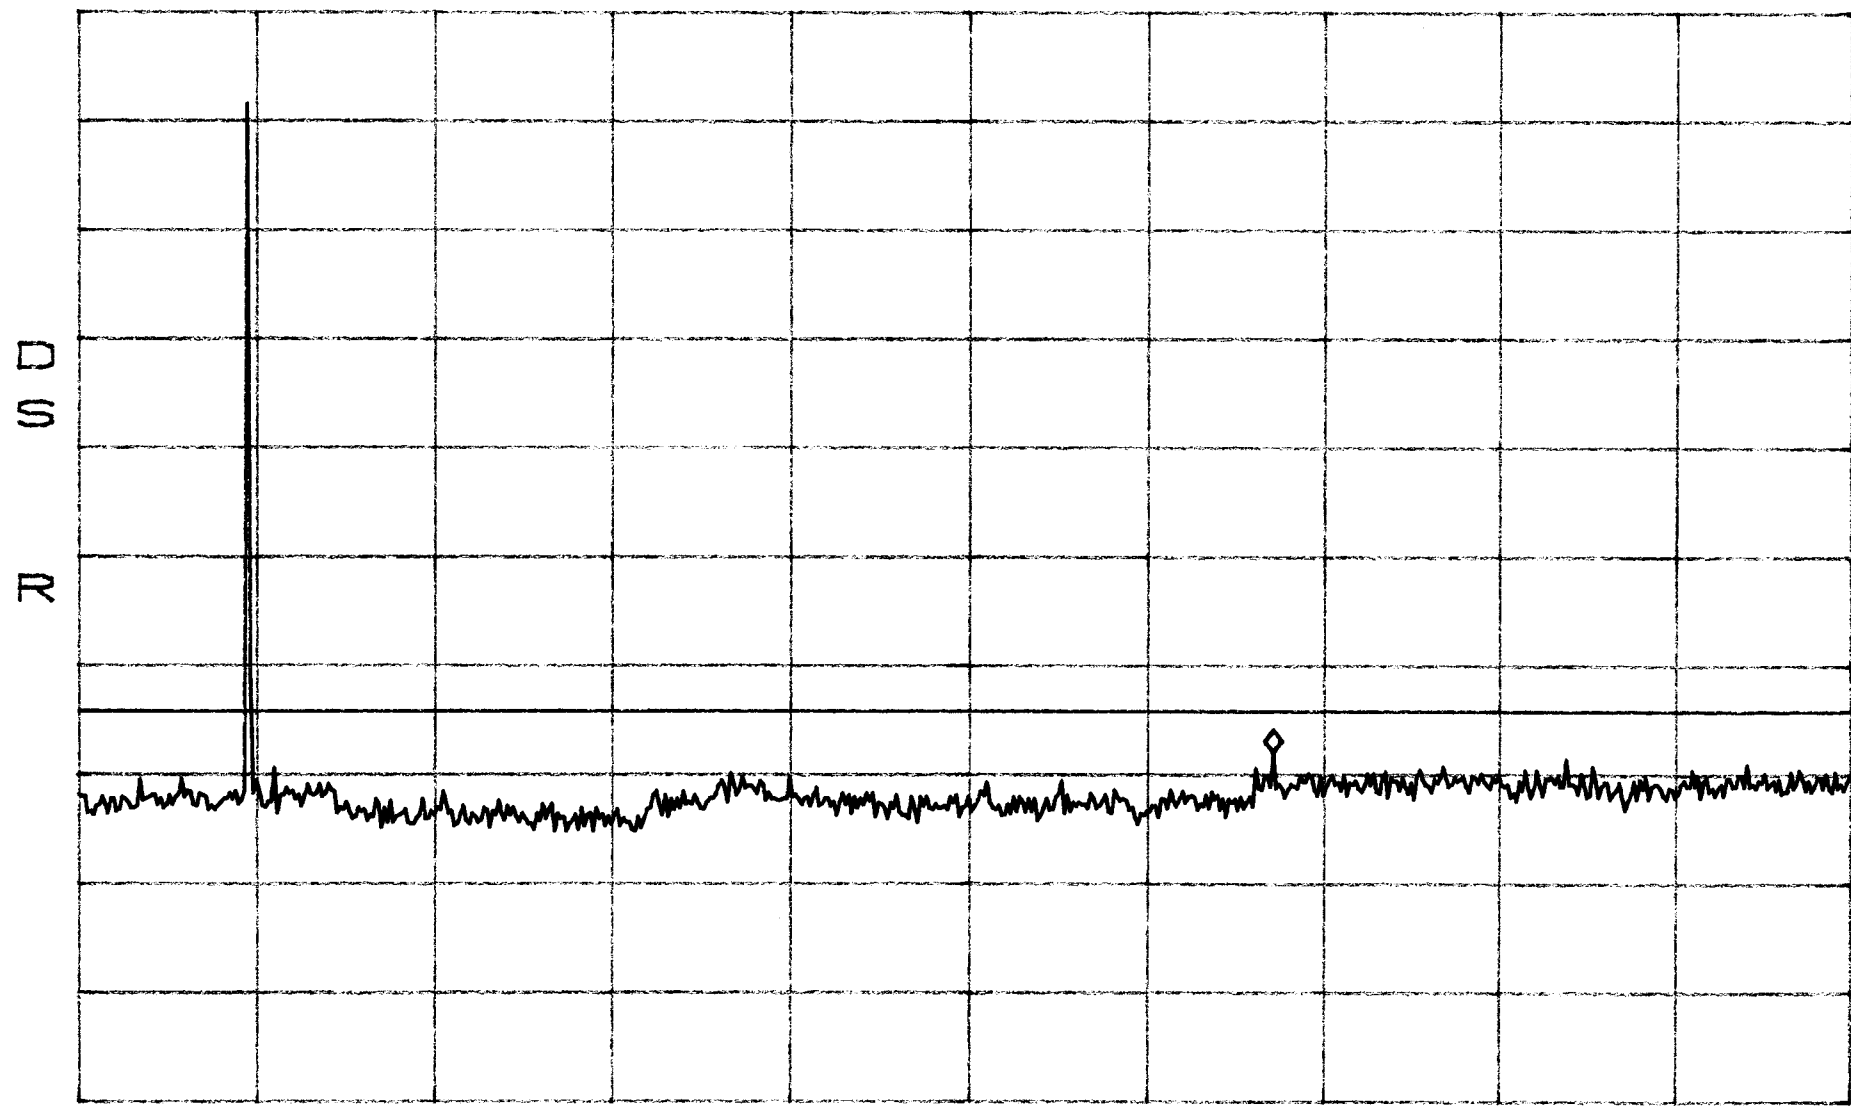

START 30MHz STOP 20.00GHz
*RBW 300kHz VBW 300kHz SWP 560ms


Conducted Emissions
mid

Band B,E,F

*ATTN 30dB
RL 51.3dBm

10dB/

MKR -28.20dBm
2.0120GHz

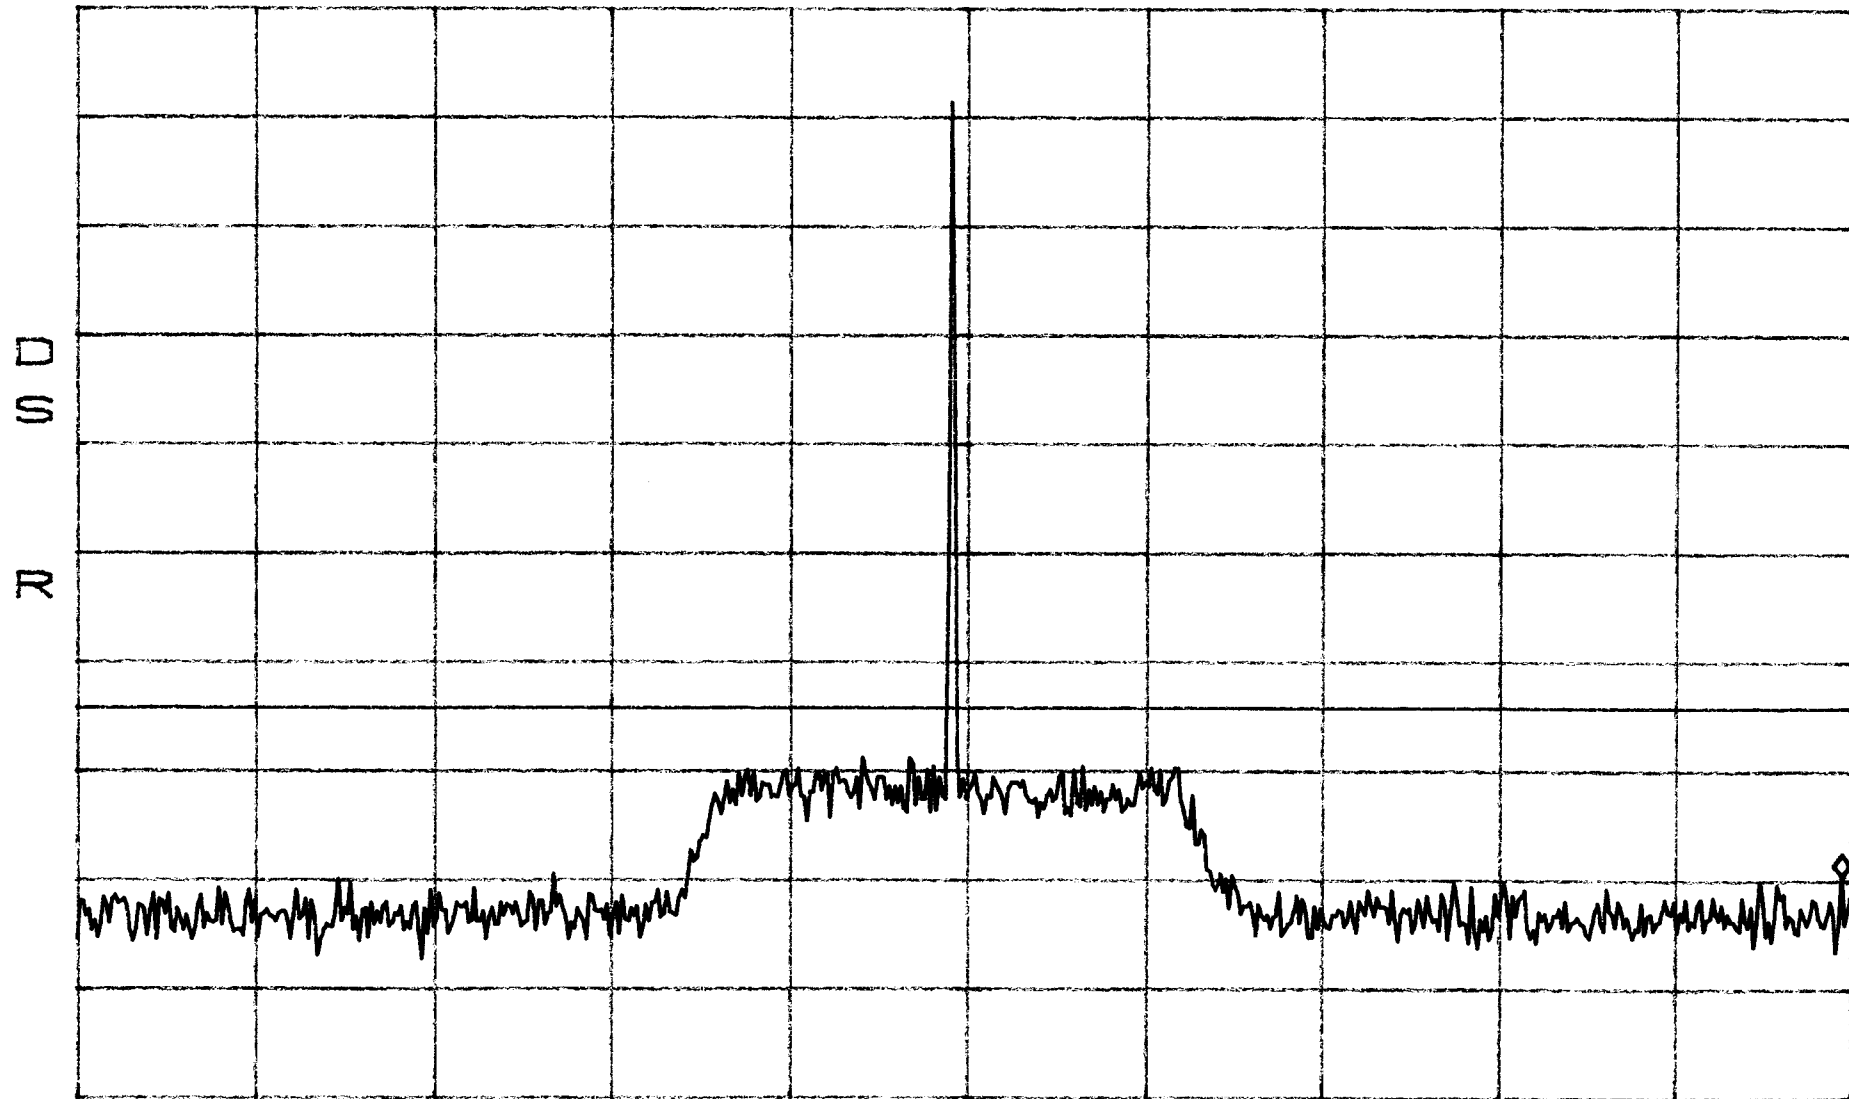

CENTER 1.9625GHz
*RBW 30kHz *VBW 30kHz


SPAN 100.0MHz
SWP 280ms

Conducted Emissions Band B,E,F
Mid

*ATTEN 30dB
RL 51.3dBm

MKR -22.37dBm
13.74GHz

10dB/

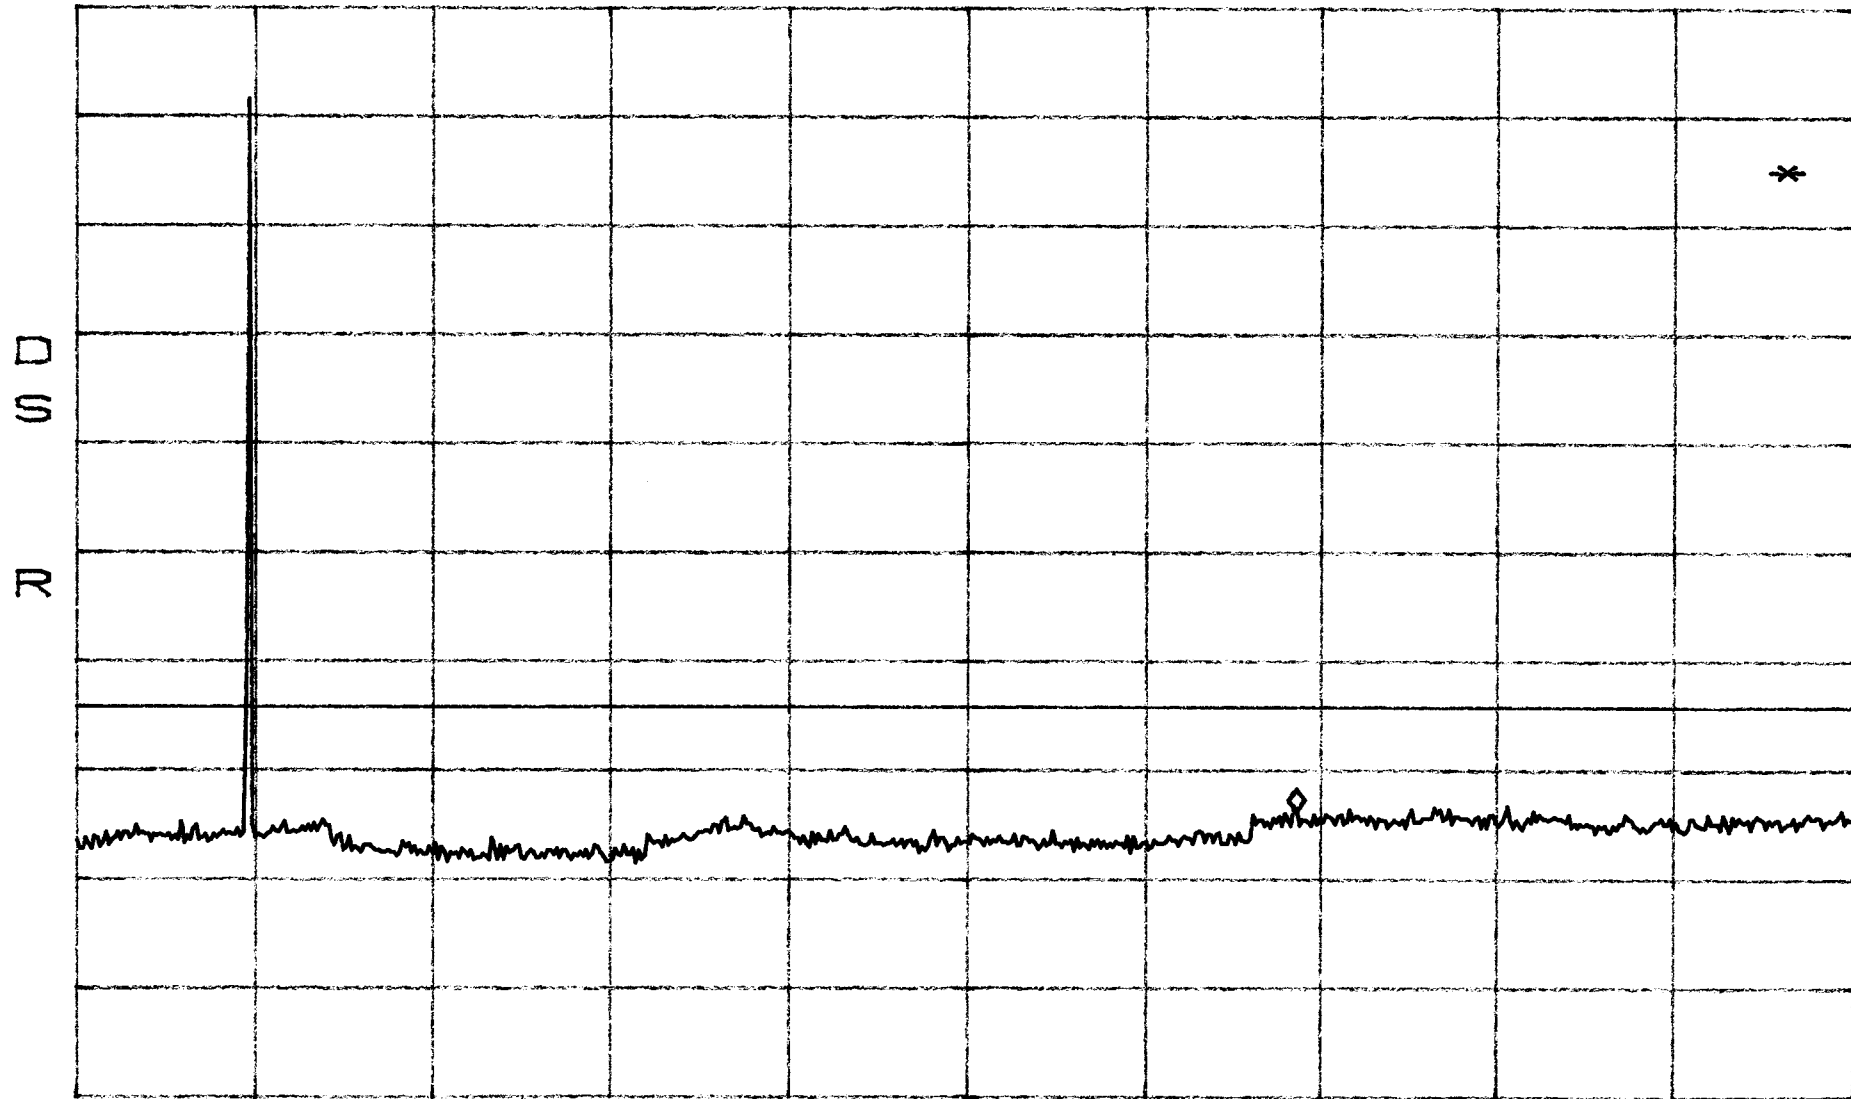

START 30MHz
*RBW 300kHz

VBW 300kHz


STOP 20.00GHz
SWP 560ms

Conducted Emissions Band B,E,F
High

*ATTEN 30dB
RL 51.3dBm

MKR -16.37dBm
1.9543GHz

10dB/

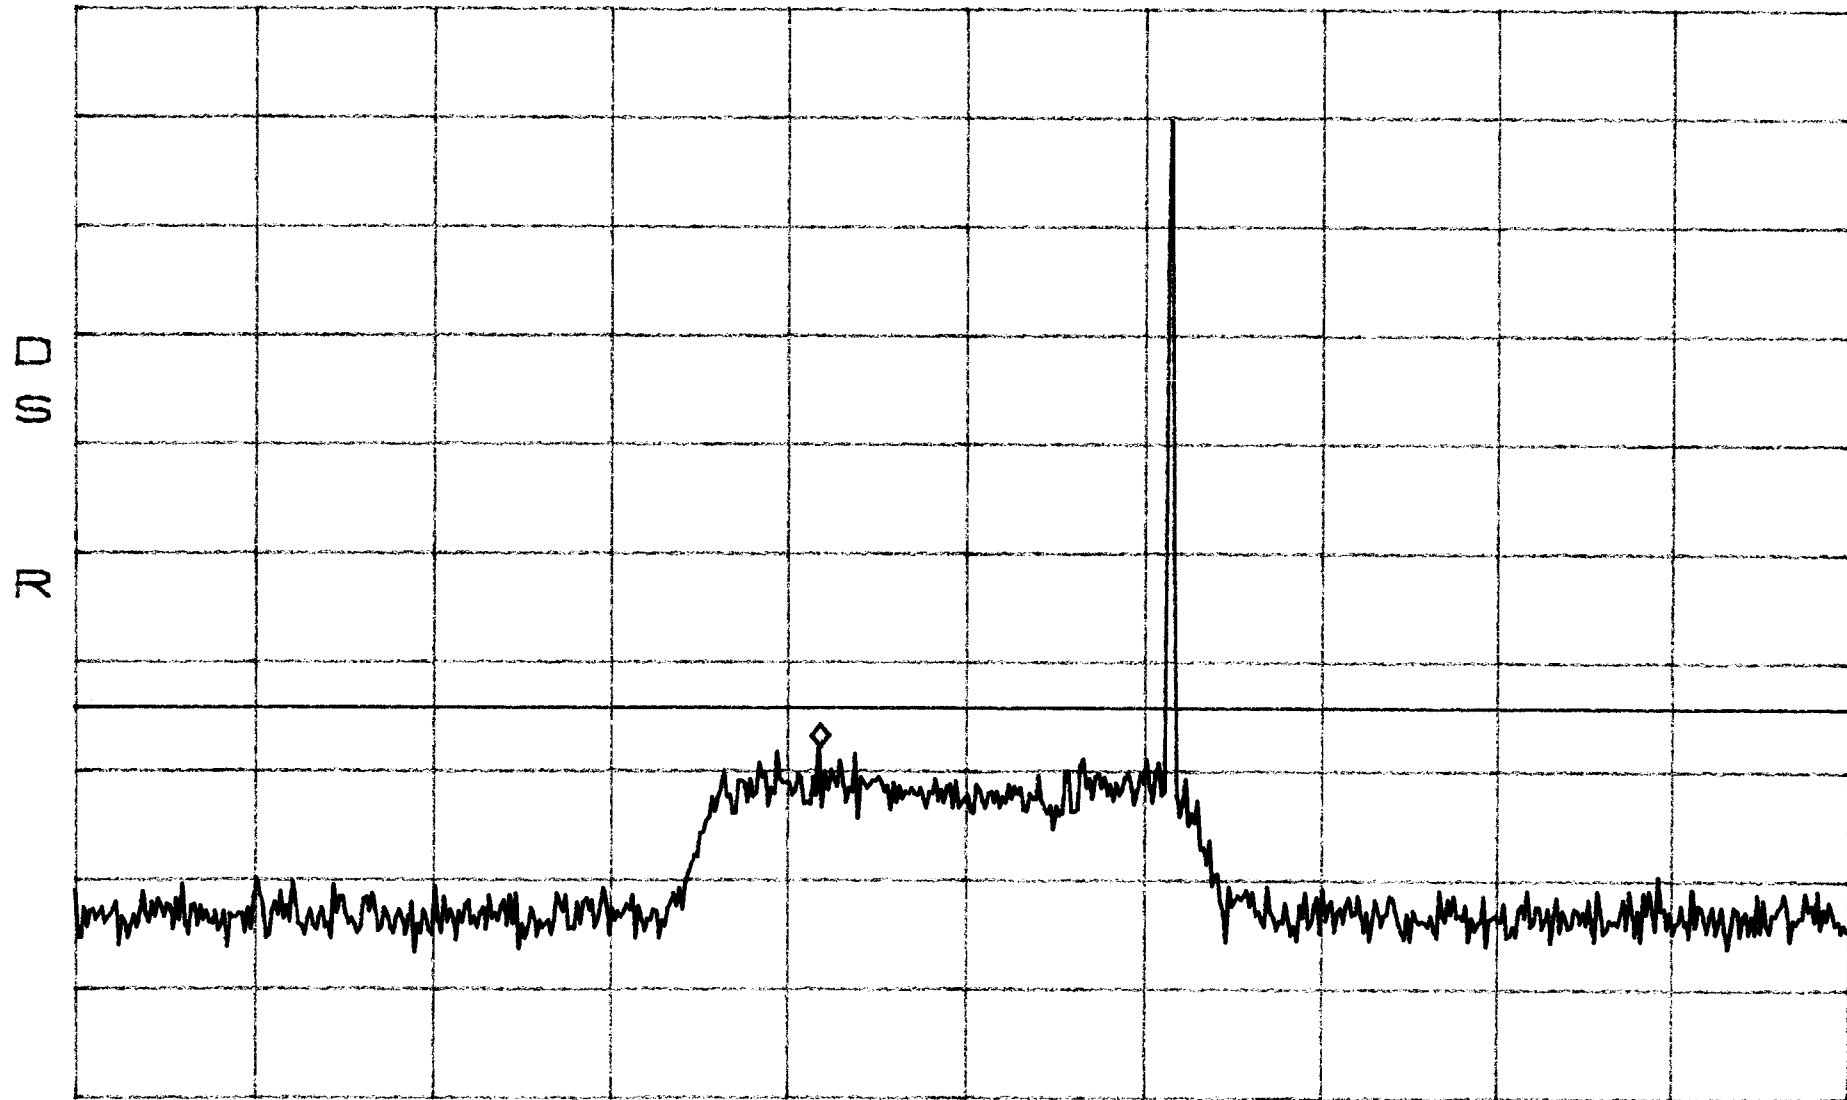


CENTER 1.9625GHz
*RBW 30kHz VBW 30kHz

SPAN 100.0MHz
SWP 280ms

Conducted Emissions Band B,E,F
High

*ATTN 30dB
RL 51.3dBm

MKR -17.20dBm
13.98GHz

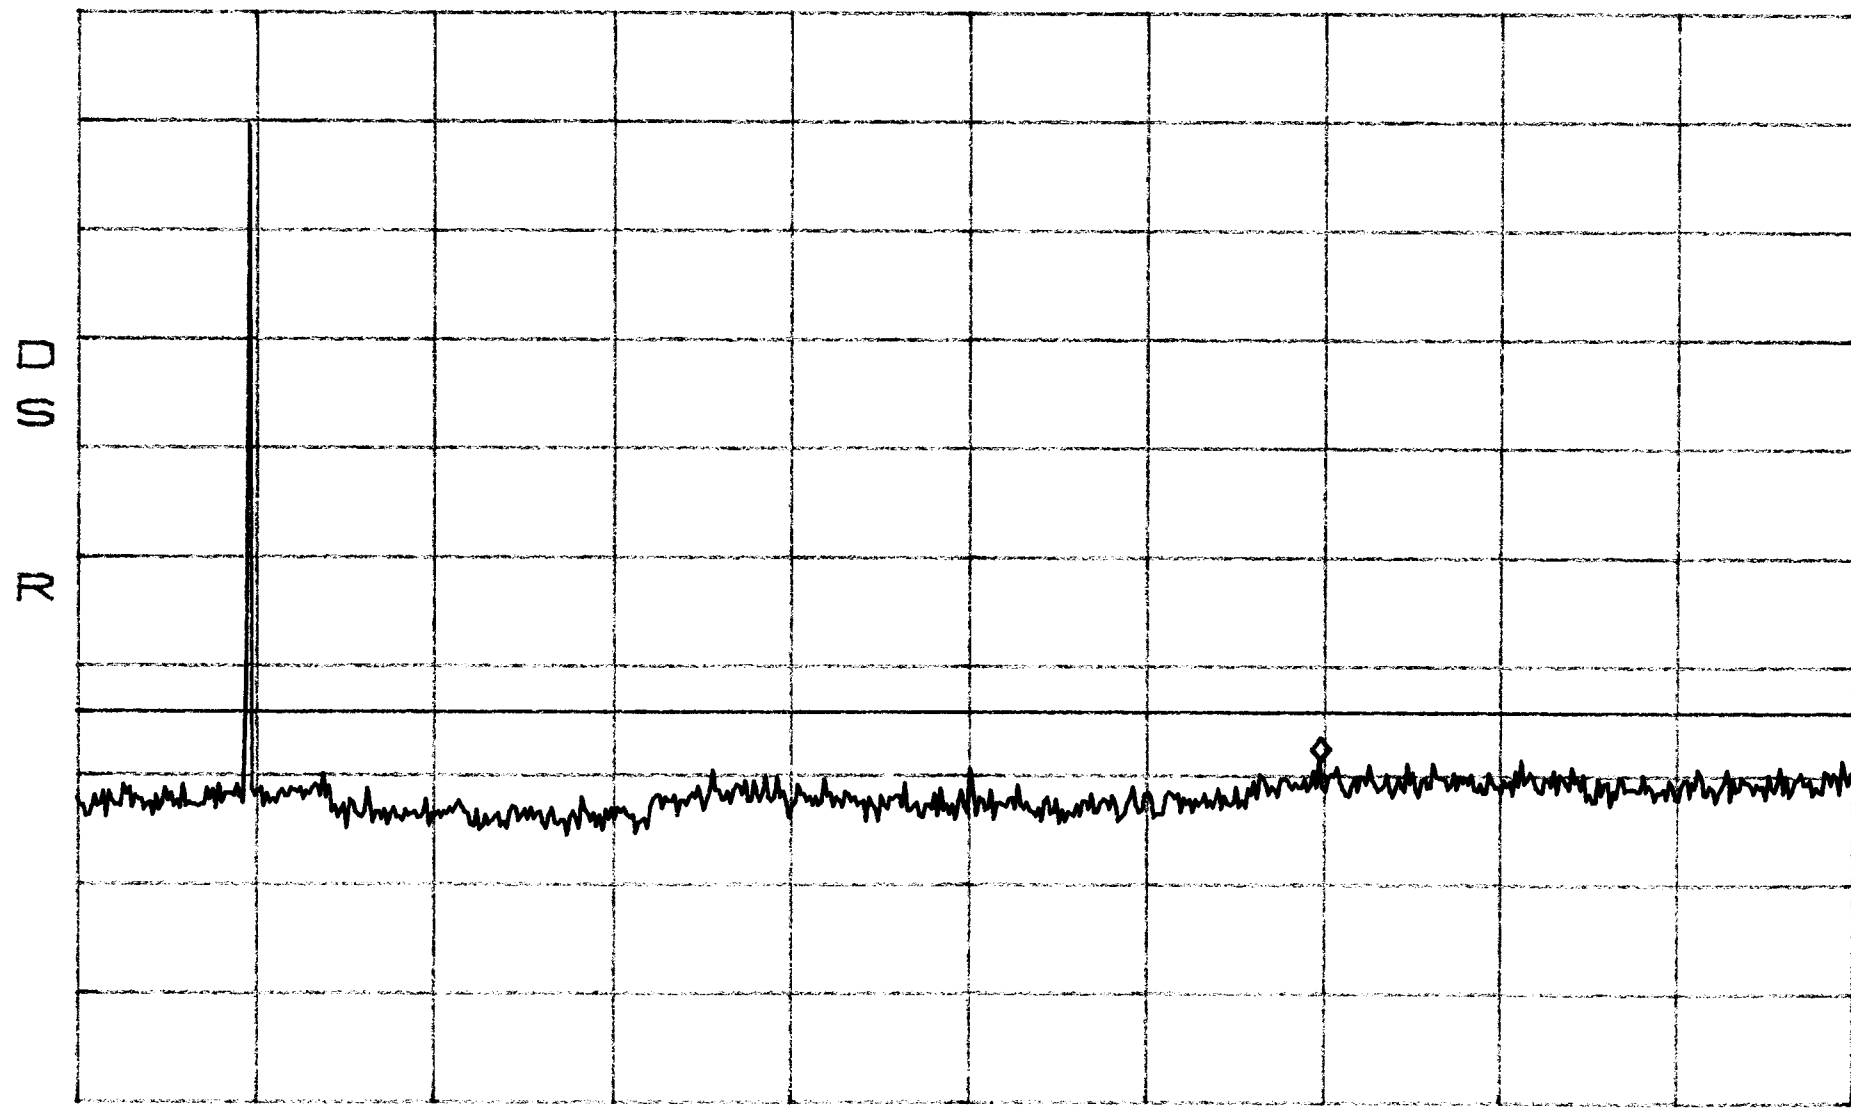

START 30MHz
*RBW 300kHz

VBW 300kHz


STOP 20.00GHz
SWP 560ms

Conducted Emissions Band E,F,C
Low

*ATTEN 30dB
RL 51.3dBm

MKR -15.70dBm
1.9862GHz

10dB/

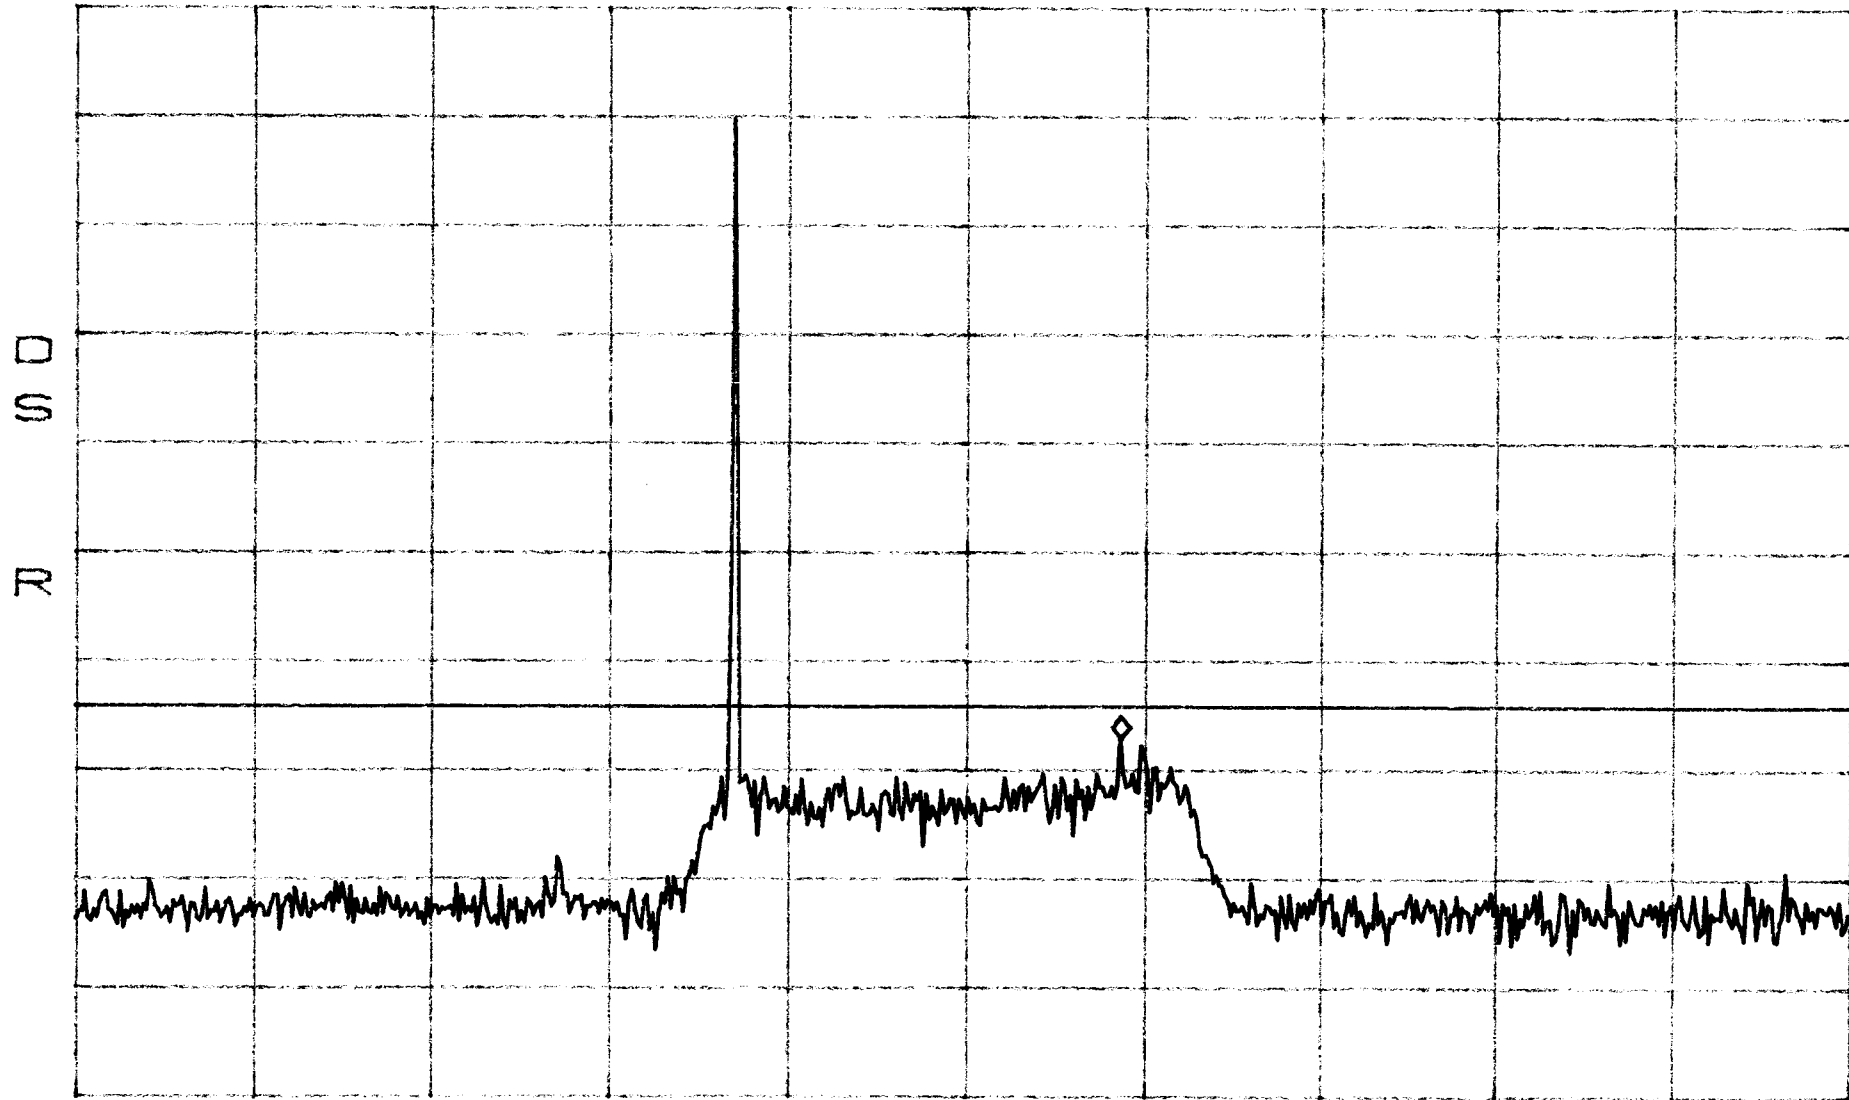


CENTER 1.9775GHz
*RBW 30kHz VBW 30kHz

SPAN 100.0MHz
SWP 280ms

Conducted Emissions Band E, F, C
Low

*ATTEN 30dB
RL 51.3dBm

MKR -16.87dBm
18.77GHz

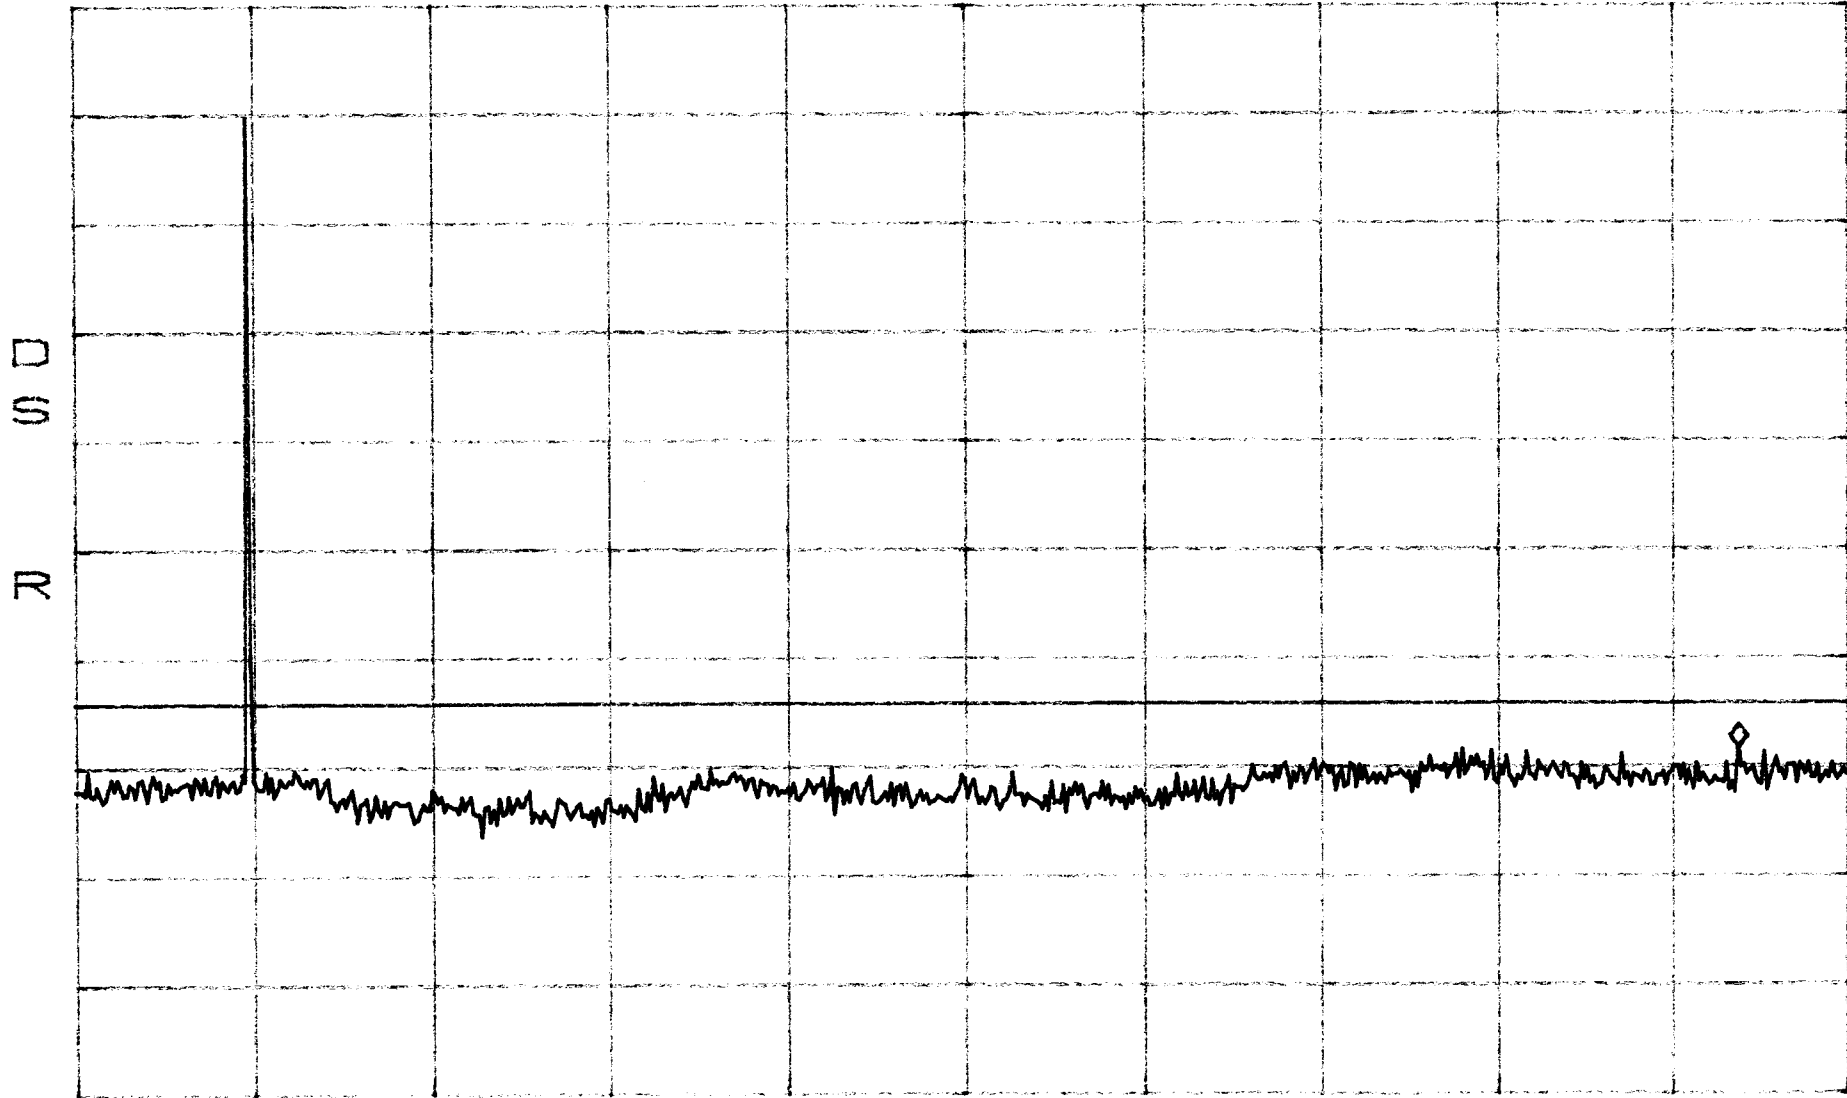

START 30MHz
*RBW 300kHz

VBW 300kHz


STOP 20.00GHz
SWP 560ms

Conducted Emissions Band E,F,C
Mid

*ATTEN 30dB
BPO3
RL 51.3dBm

MKR -15.70dBm
1.983986GHz

10dB/BPO1

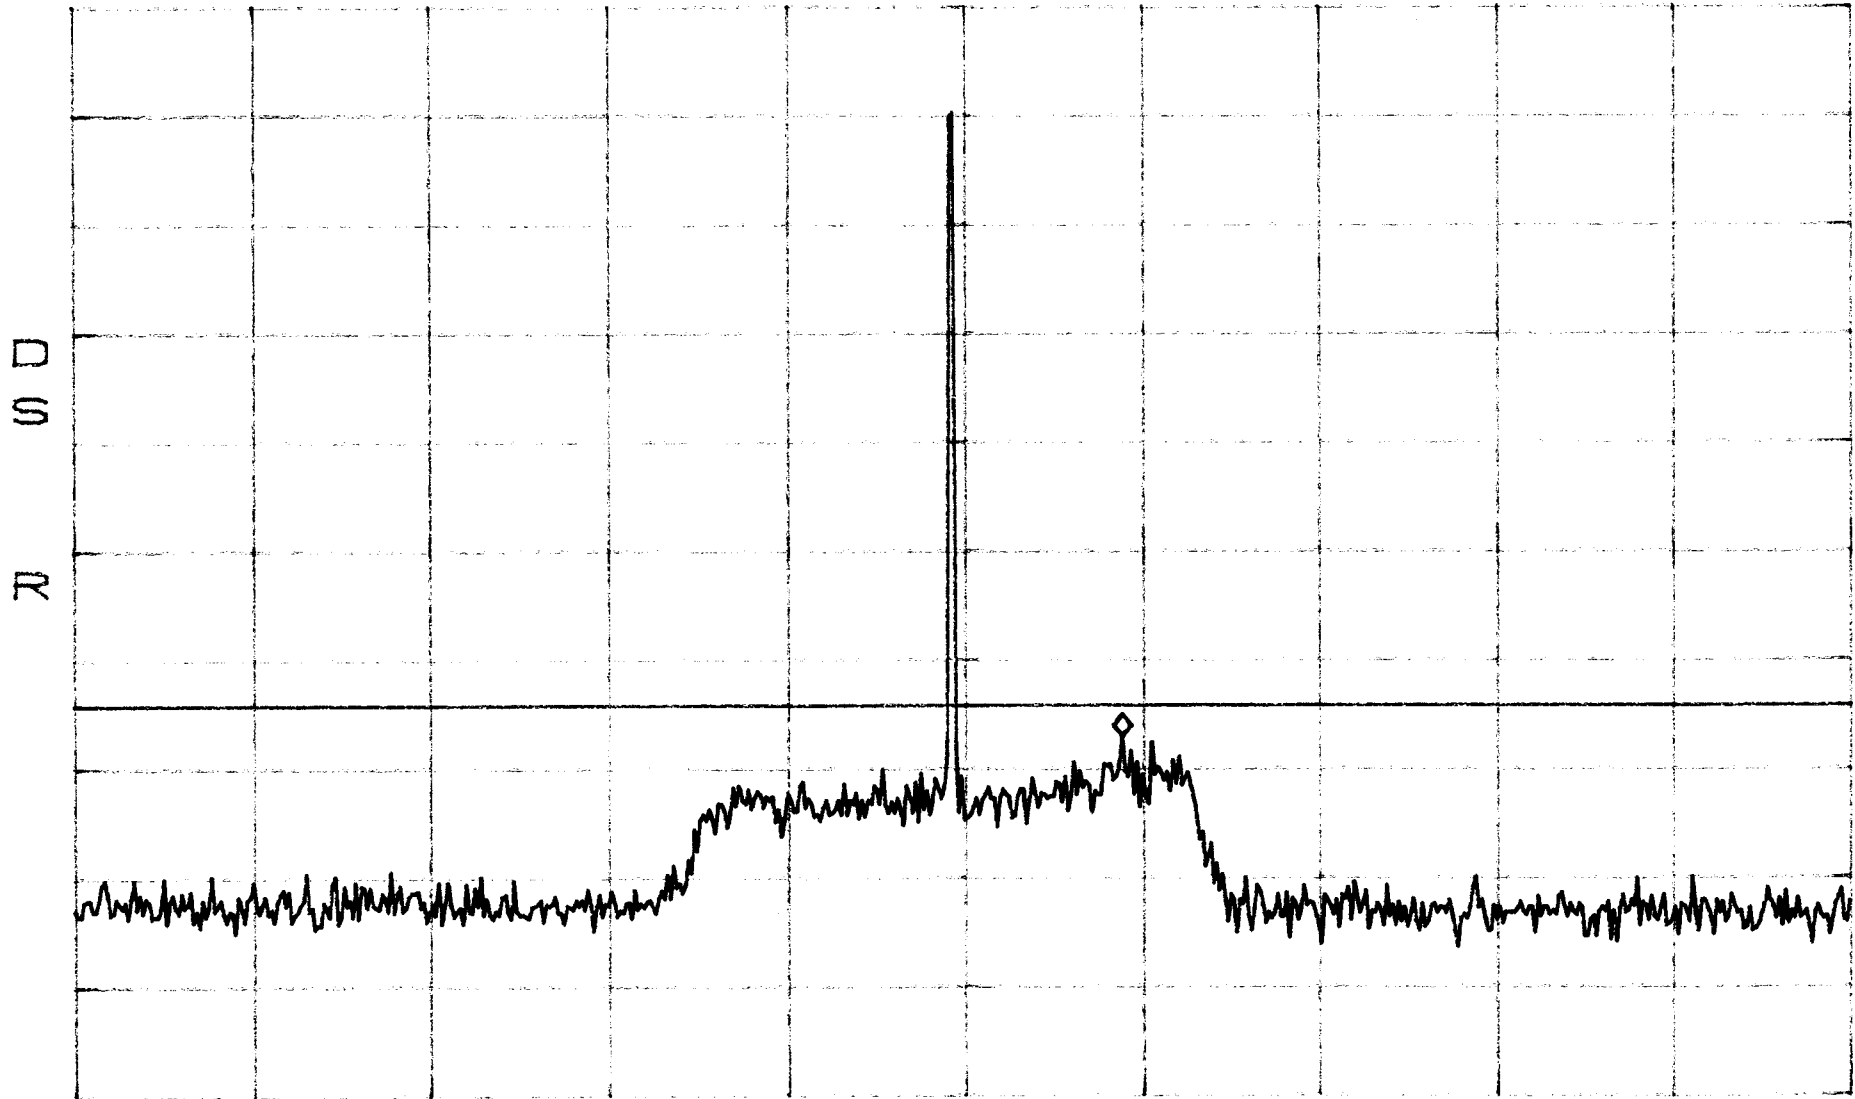


CENTER 1.9775GHz
*RBW 30kHz

VBW 30kHz

SPAN 100.0MHz
SWP 280ms

*ATTEN 30dB
RL 51.3dBm

MKR -17.20dBm
16.01GHz

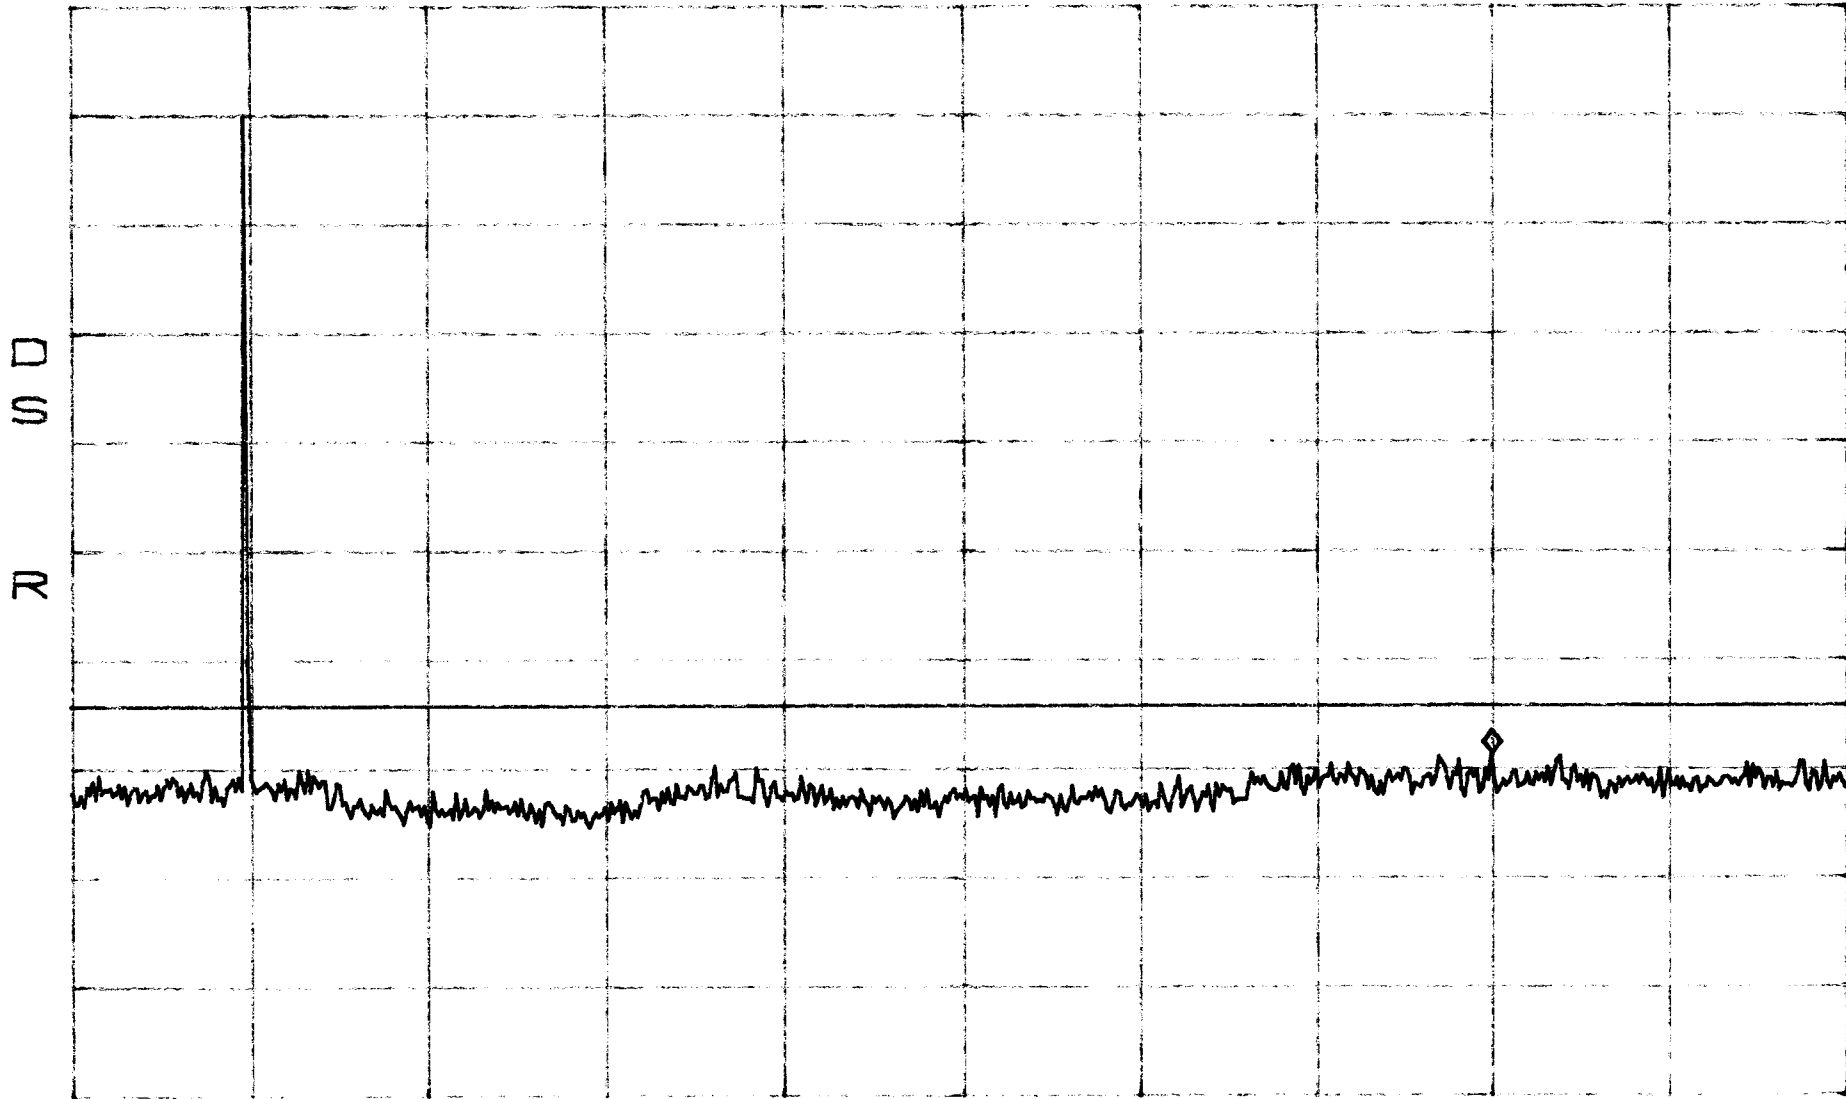

START 30MHz
*RBW 300kHz

VBW 300kHz

STOP 20.00GHz

SWP 560ms