


**TDMA
Upper Band**

**Intermodulation
Close - Upper
PCS 1900 MHz**


Center: 1982.5 MHz
Span: 40 MHz
RBW/VBW: 100 kHz

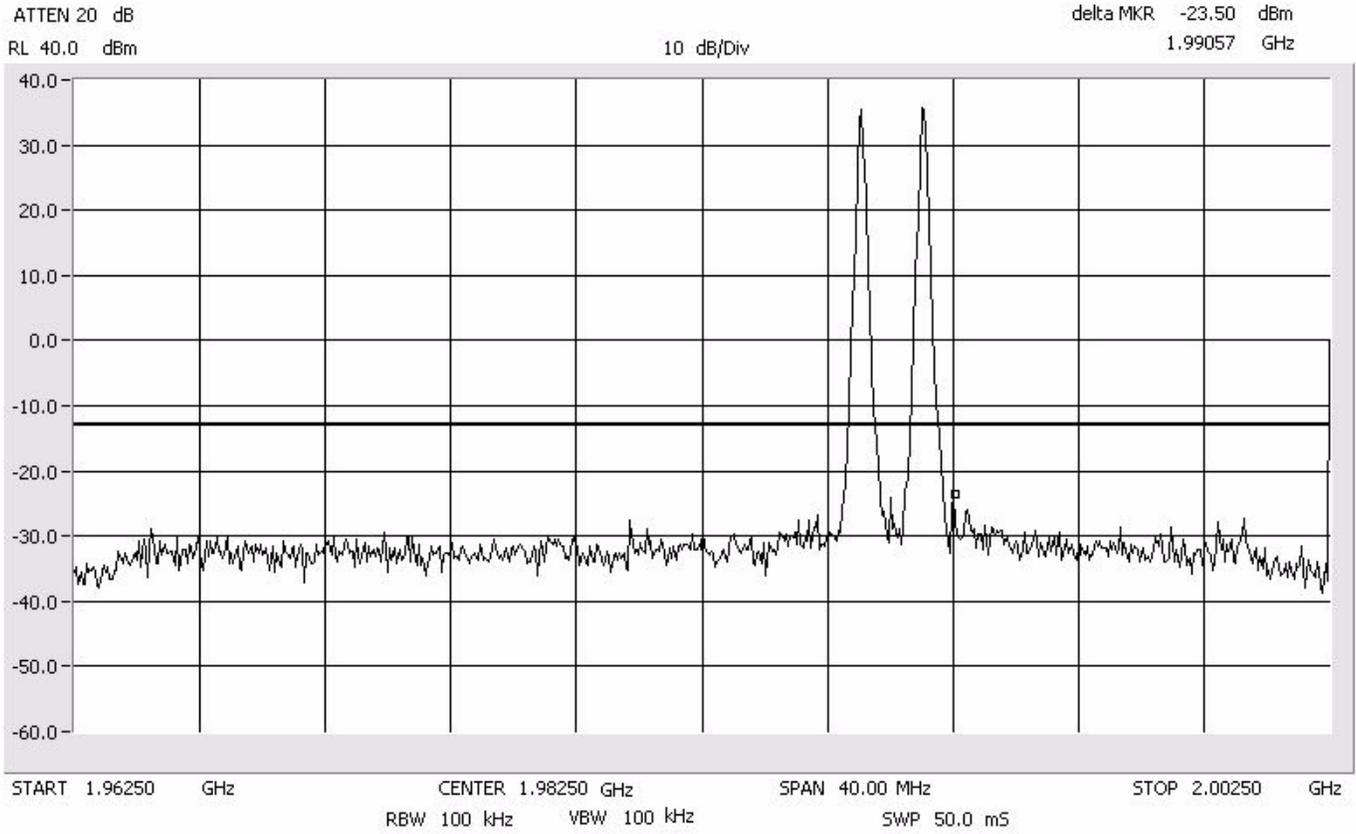

**TDMA
Upper Band**

**Intermodulation
Close - Upper
PCS 1900 MHz**


Span: 30 MHz to 1 GHz
RBW/VBW: 300 kHz

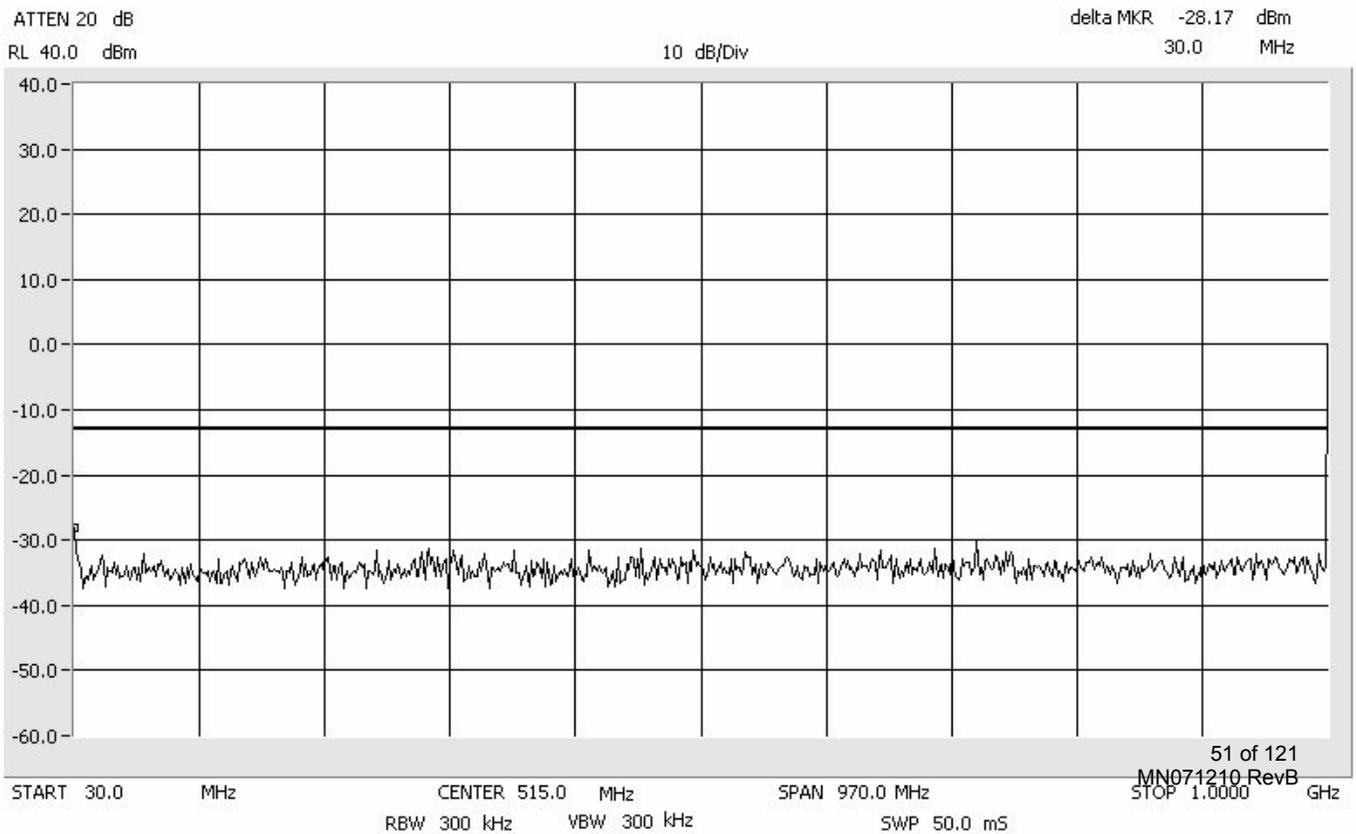

TDMA Upper Band

Intermodulation Close - Upper PCS 1900 MHz


Span: 1 GHz to 20 GHz
RBW/VBW: 1 MHz

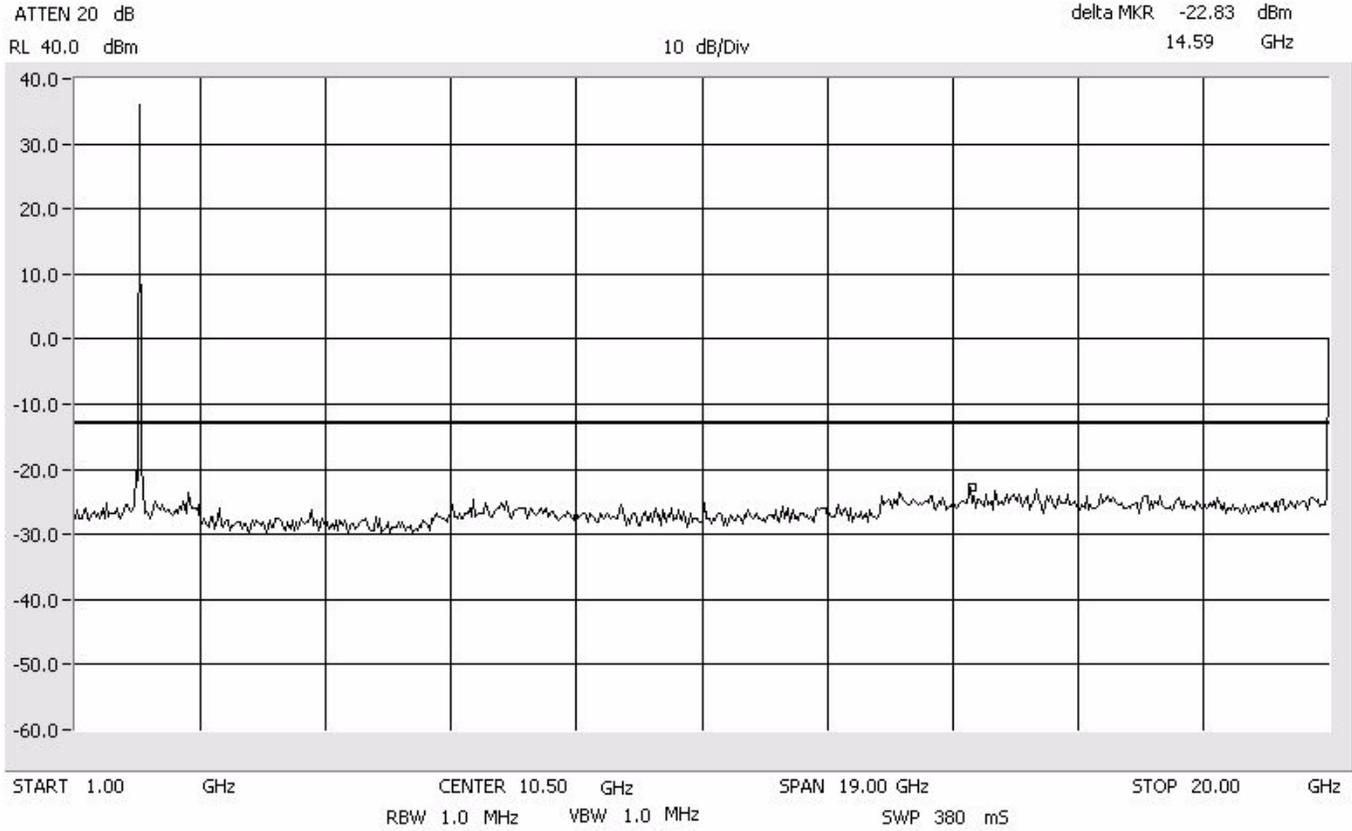

TDMA Upper Band

Intermodulation Apart PCS 1900 MHz


Center: 1982.5 MHz
Span: 100 MHz
RBW/VBW: 100 kHz

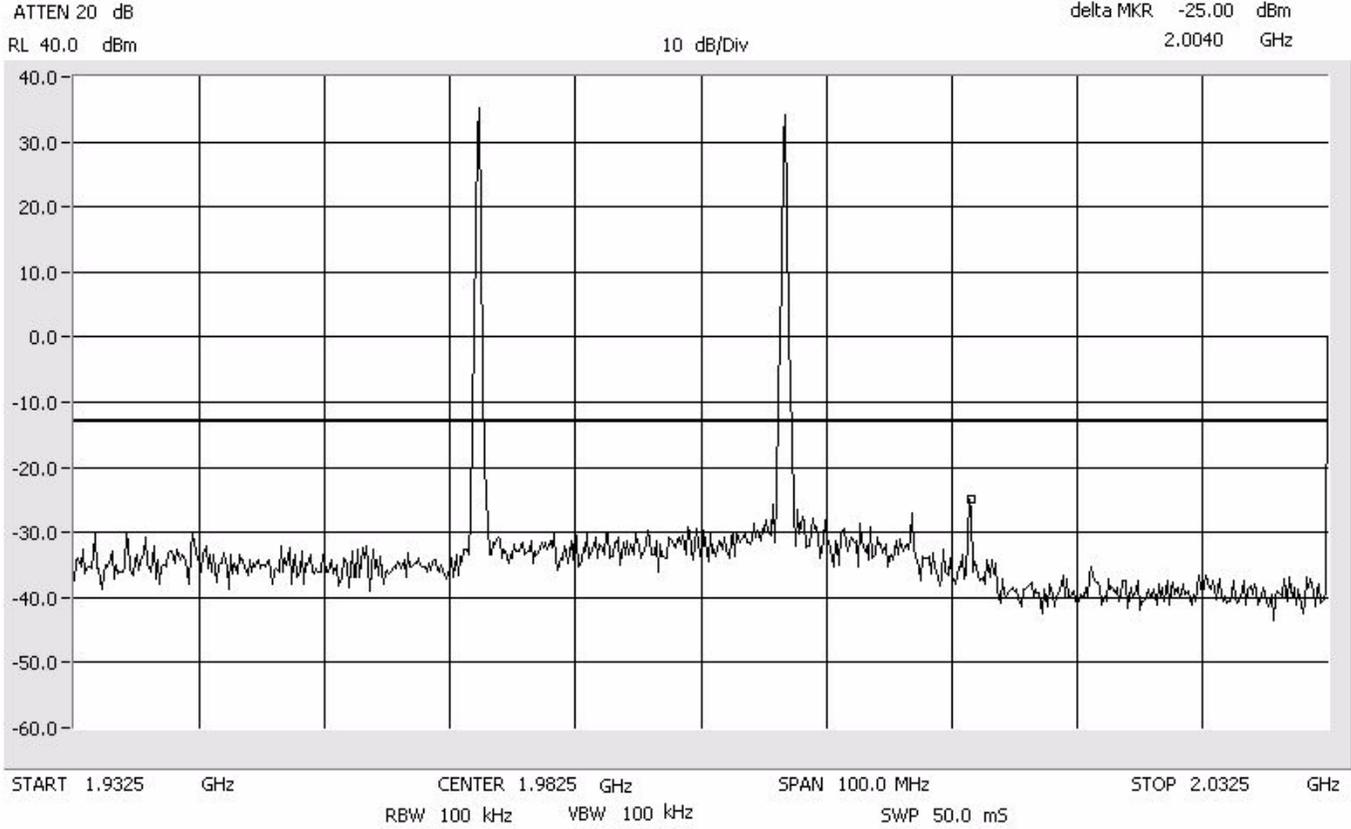


TDMA Upper Band

Intermodulation Apart PCS 1900 MHz

Span: 30 MHz to 1 GHz
RBW/VBW: 300 kHz

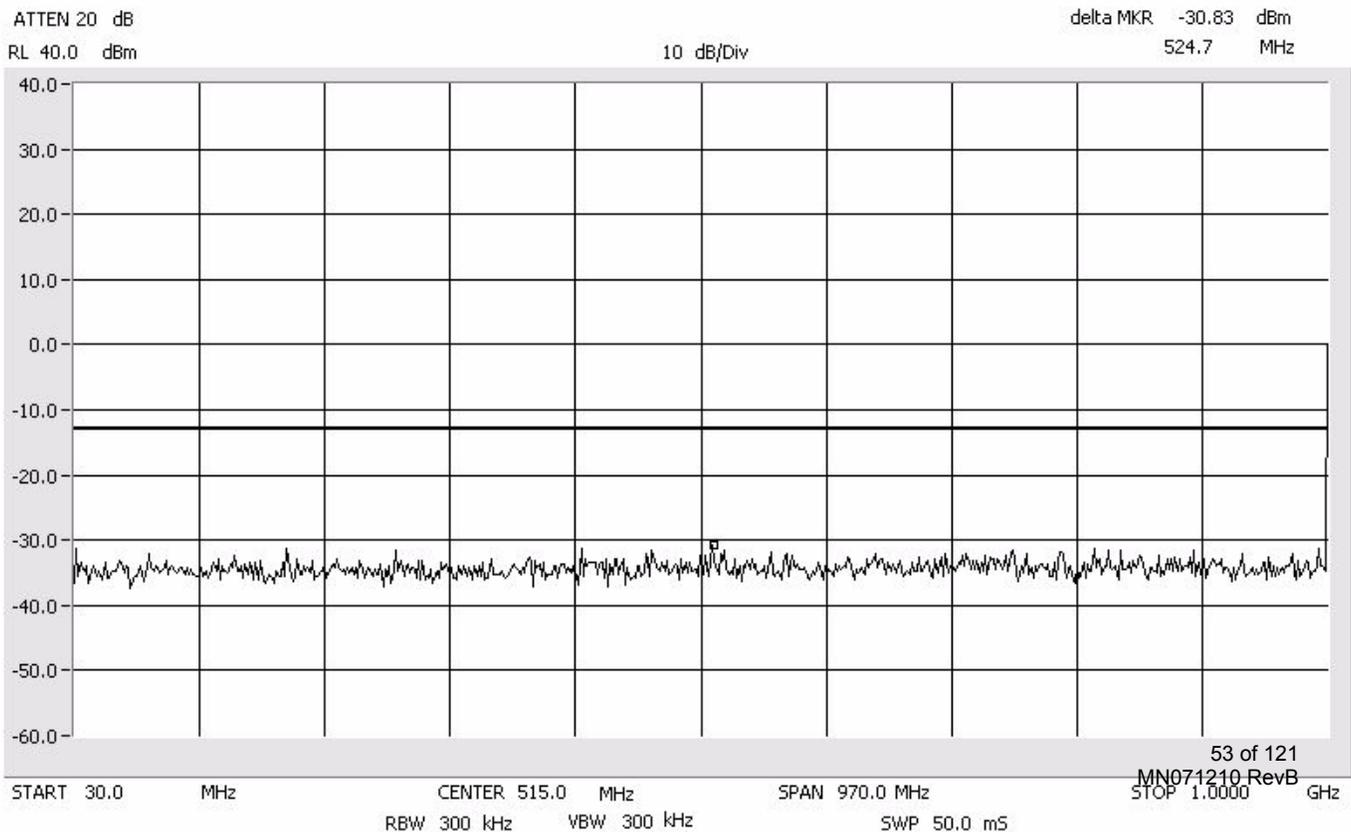


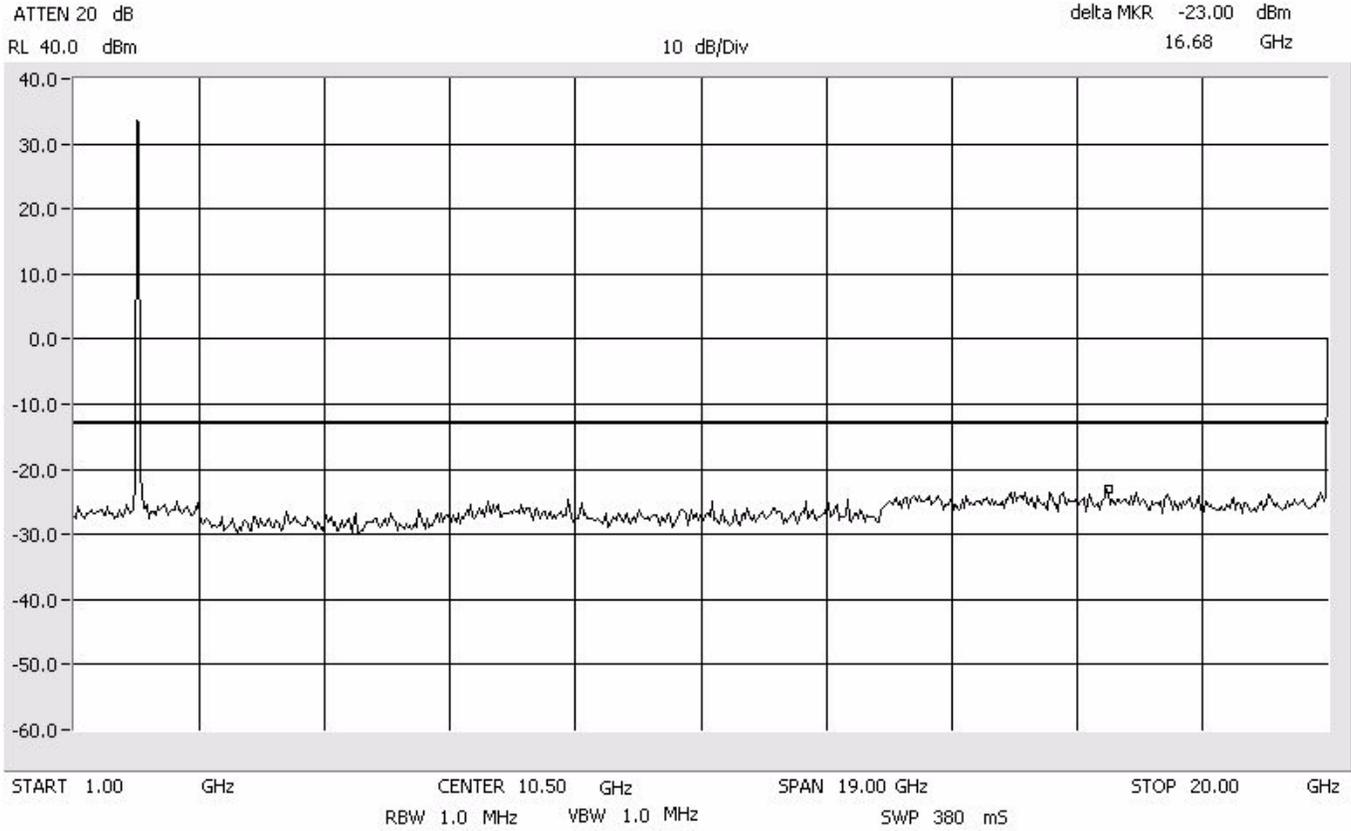

GSM Lower Band

Intermodulation Close - Lower PCS 1900 MHz


Center: 1947.5 MHz
Span: 40 MHz
RBW/VBW: 100 kHz

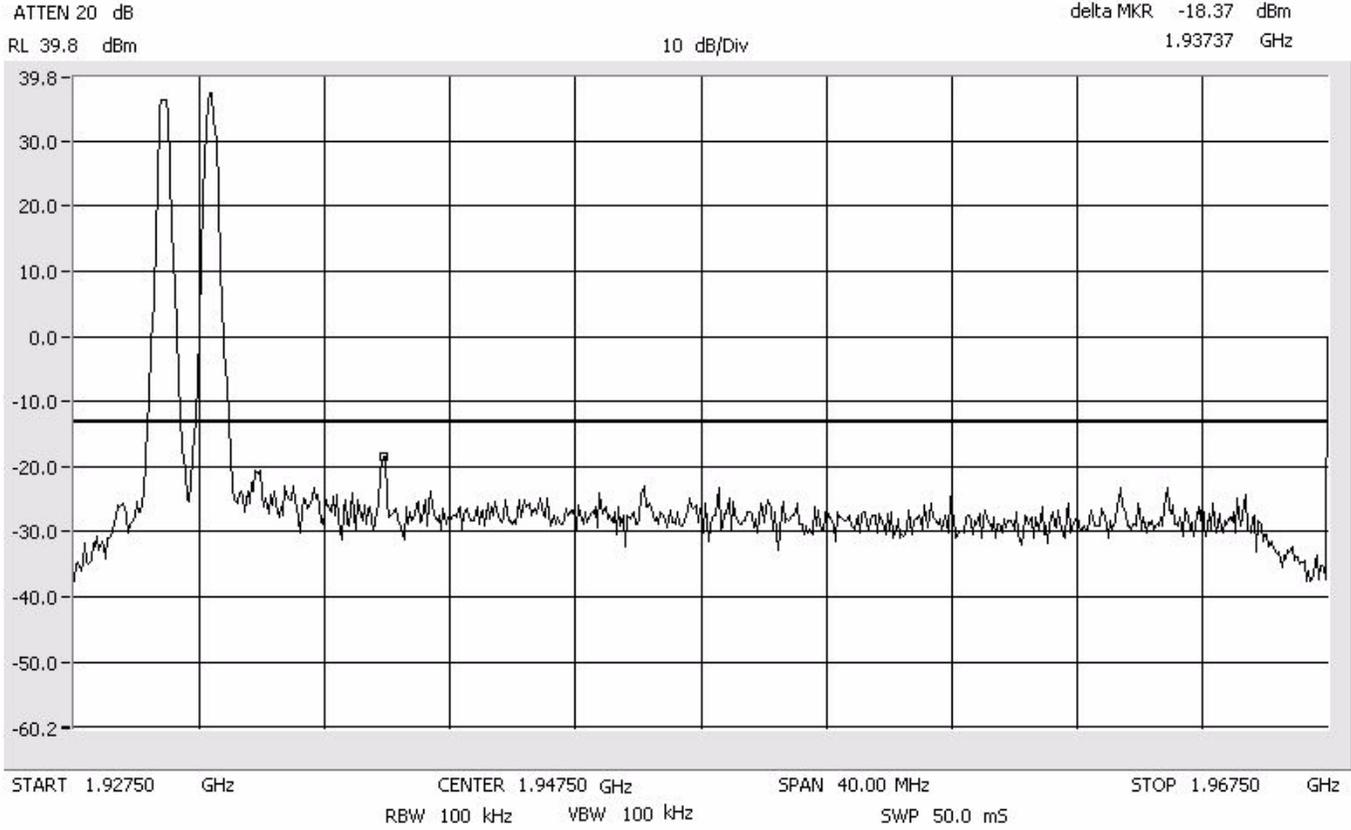

GSM Lower Band

Intermodulation Close - Lower PCS 1900 MHz


Span: 30 MHz to 1 GHz
RBW/VBW: 300 kHz

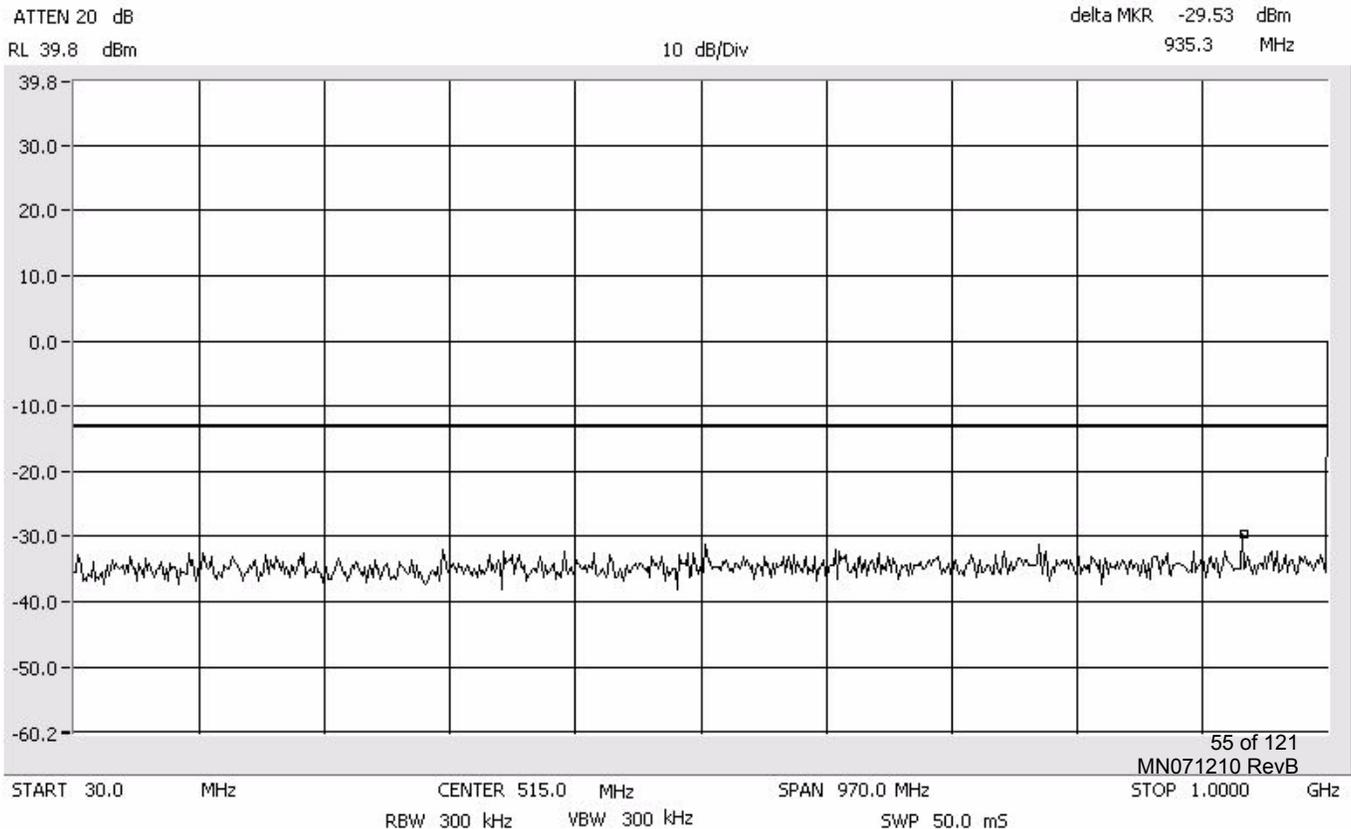

GSM Lower Band

Intermodulation Close - Lower PCS 1900 MHz


Span: 1 GHz to 20 GHz
RBW/VBW: 1 MHz

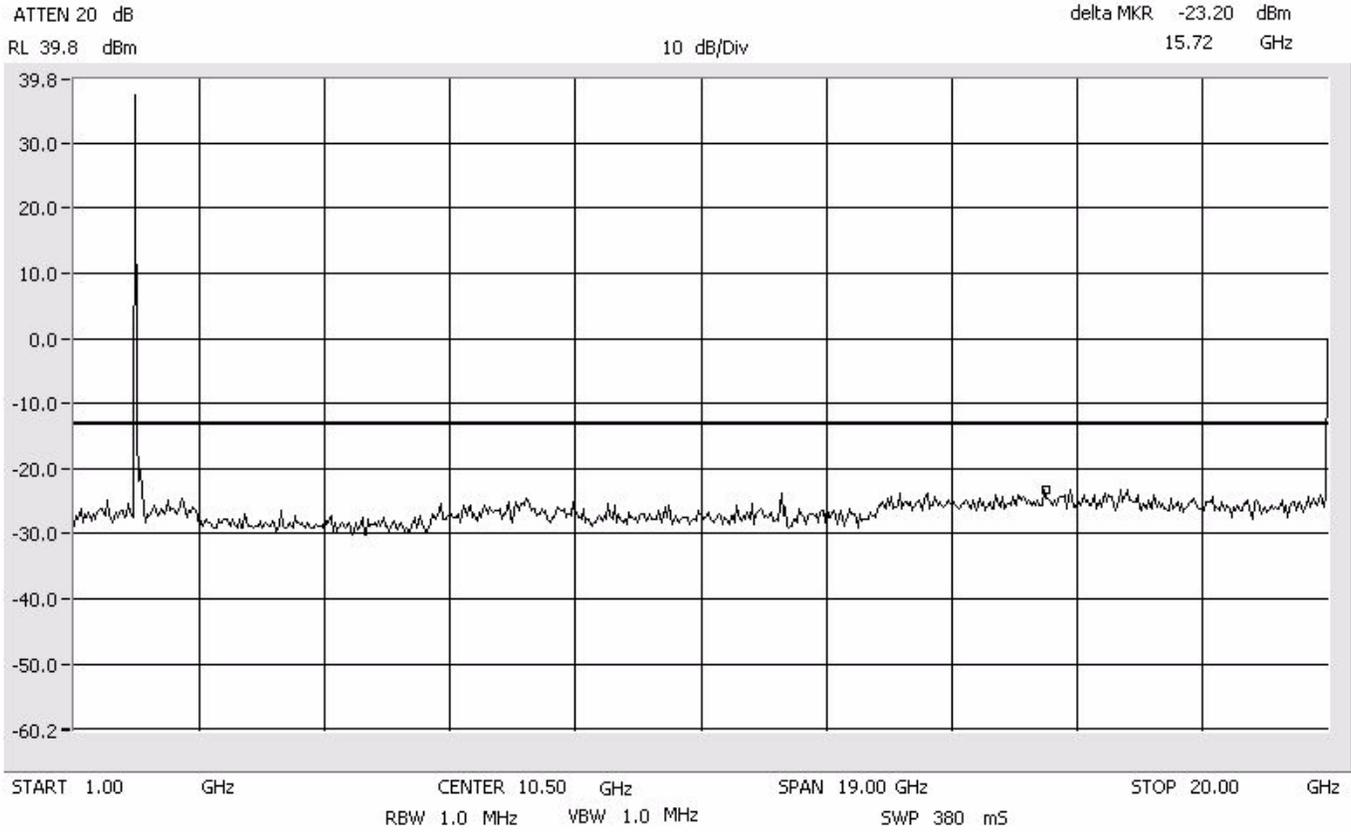

GSM Lower Band

Intermodulation Close - Upper PCS 1900 MHz


Center: 1947.5 MHz
Span: 40 MHz
RBW/VBW: 100 kHz

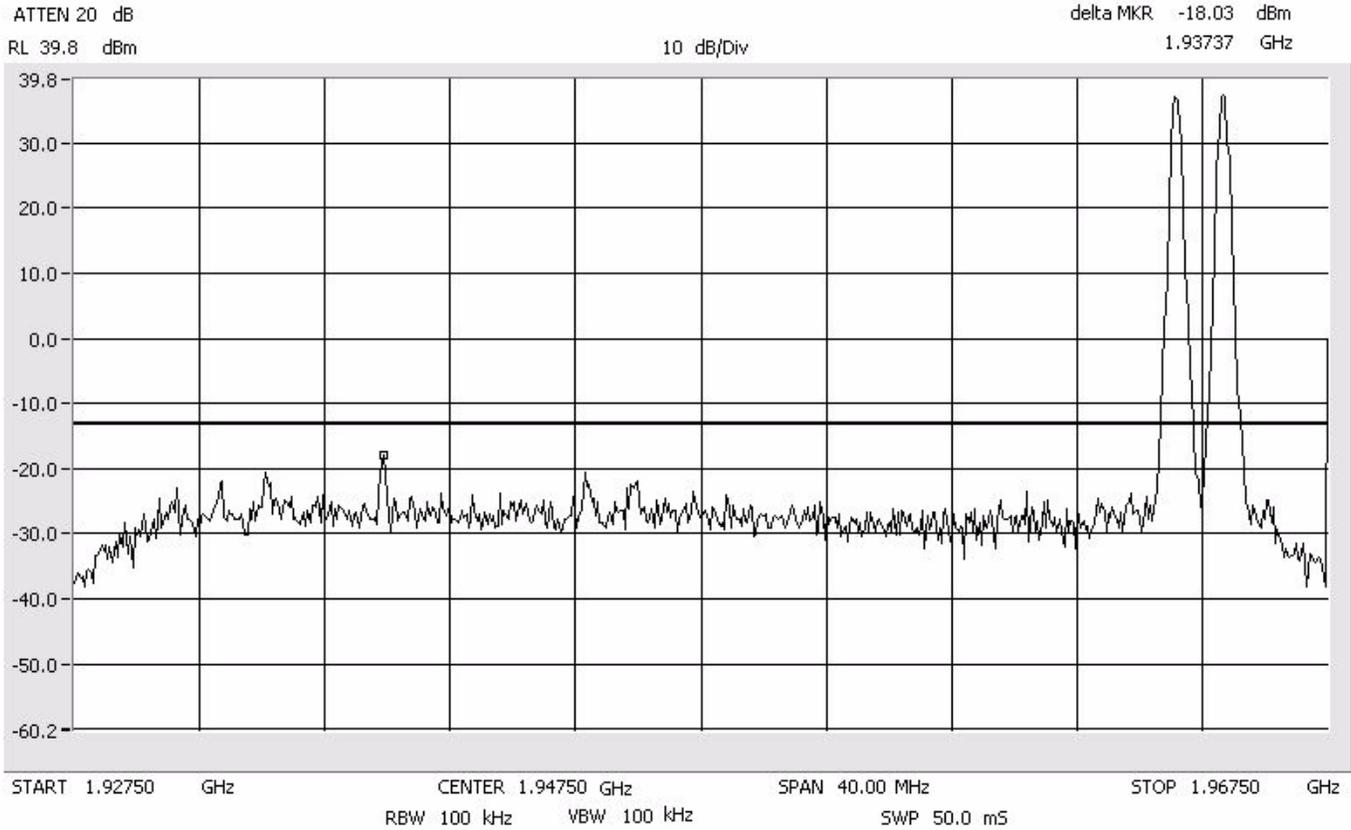

GSM Lower Band

Intermodulation Close - Upper PCS 1900 MHz


Span: 30 MHz to 1 GHz
RBW/VBW: 300 kHz

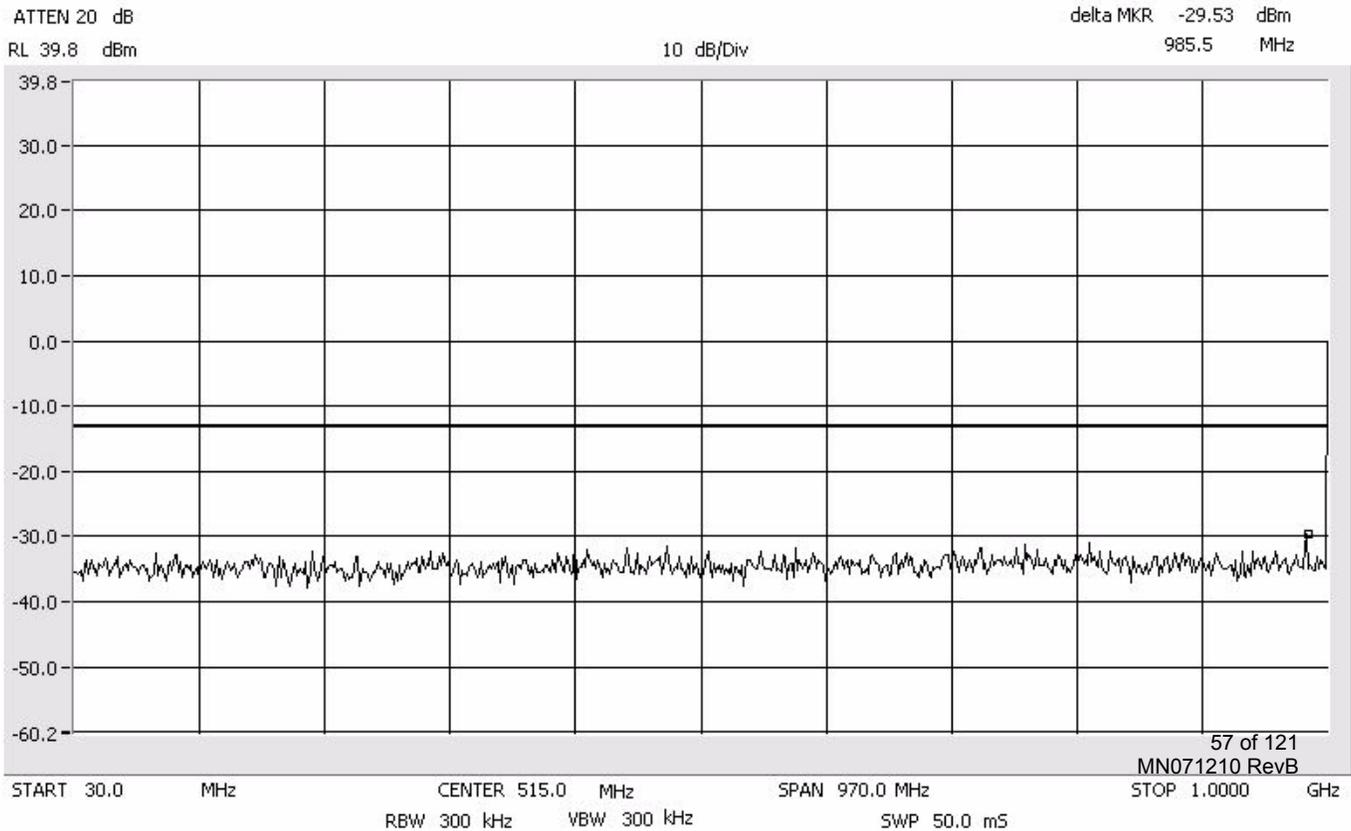

GSM Lower Band

Intermodulation Close - Upper PCS 1900 MHz


Span: 1 GHz to 20 GHz
RBW/VBW: 1 MHz

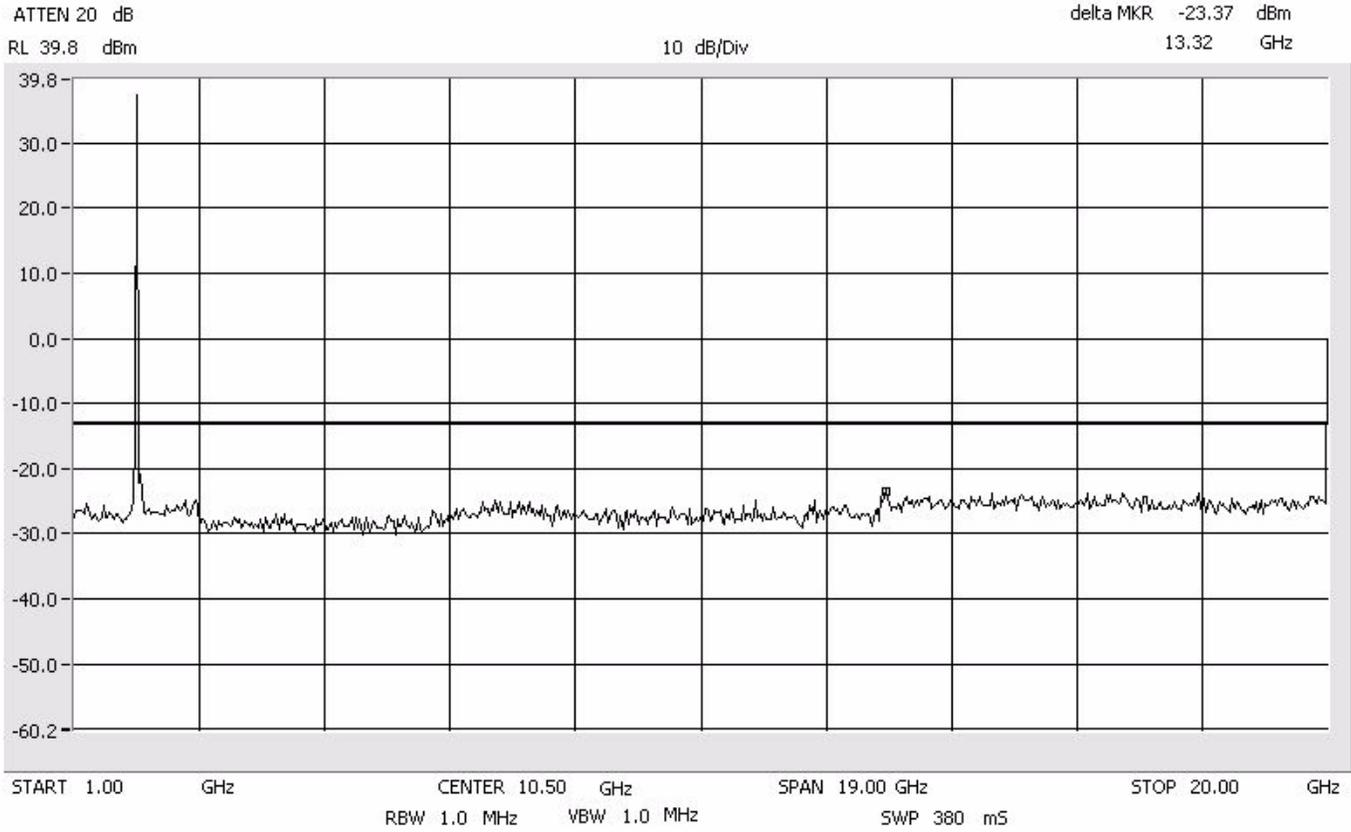

GSM Lower Band

Intermodulation Apart PCS 1900 MHz


Center: 1947.5 MHz
Span: 100 MHz
RBW/VBW: 100 kHz

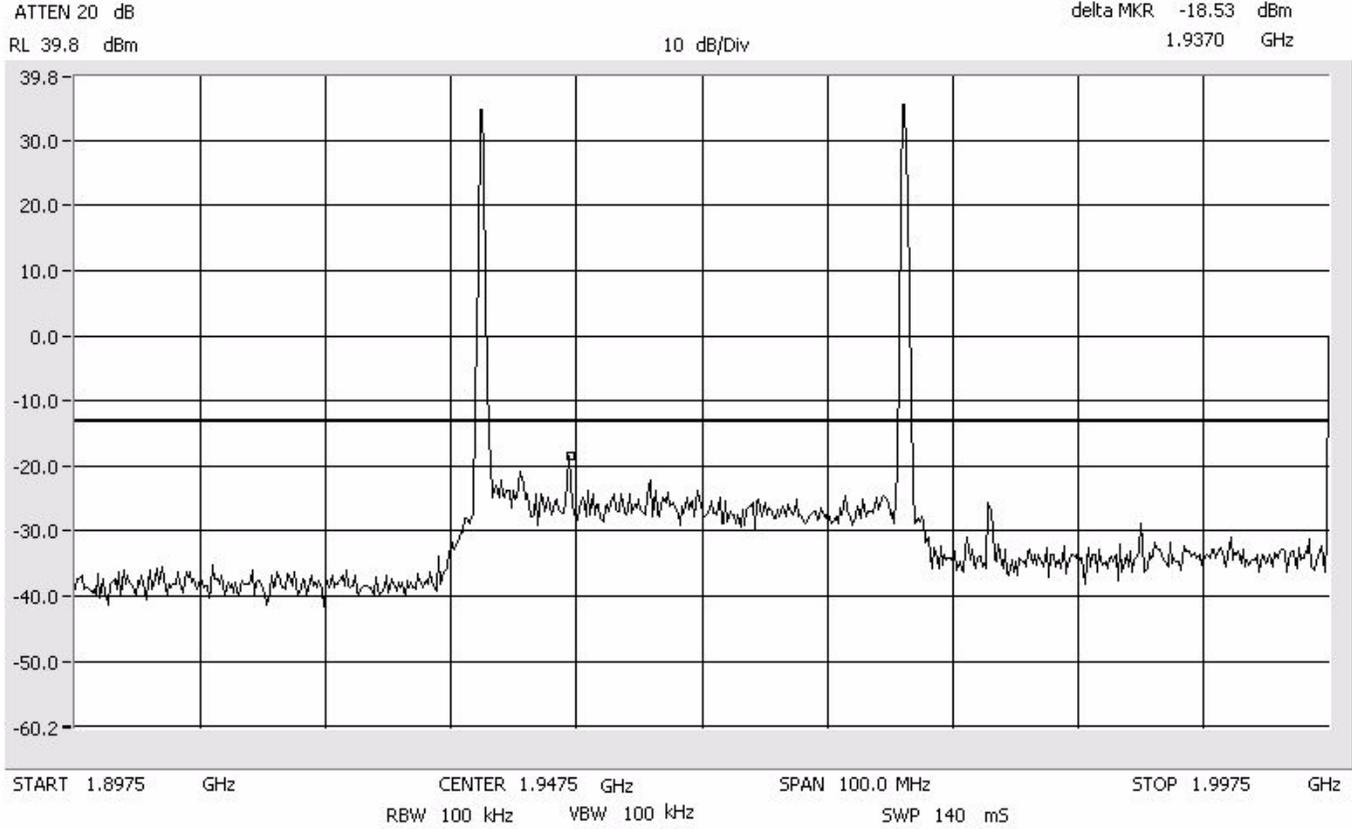

GSM Lower Band

Intermodulation Apart PCS 1900 MHz


Span: 30 MHz to 1 GHz
RBW/VBW: 300 kHz

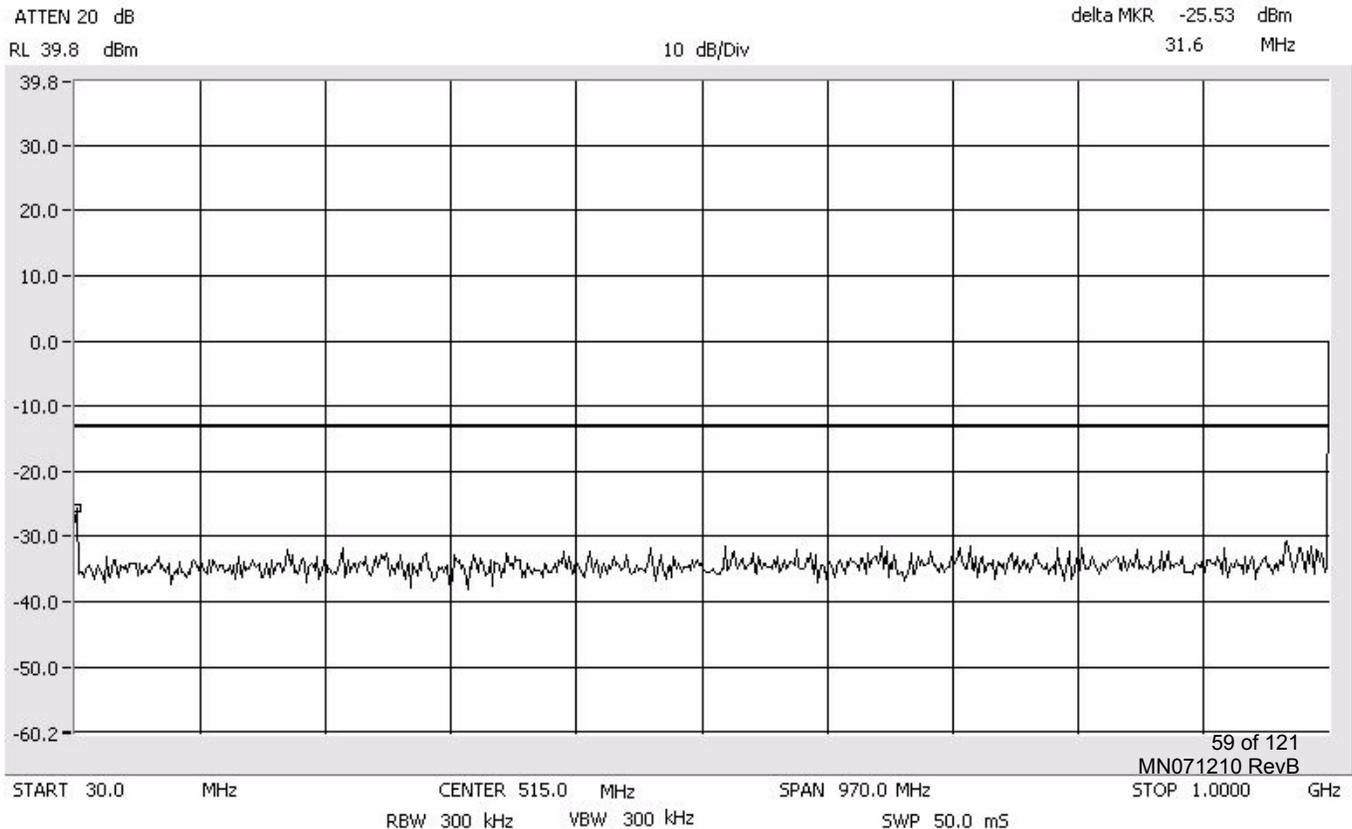

GSM Lower Band

Intermodulation Apart PCS 1900 MHz


Span: 1 GHz to 20 GHz
RBW/VBW: 1 MHz

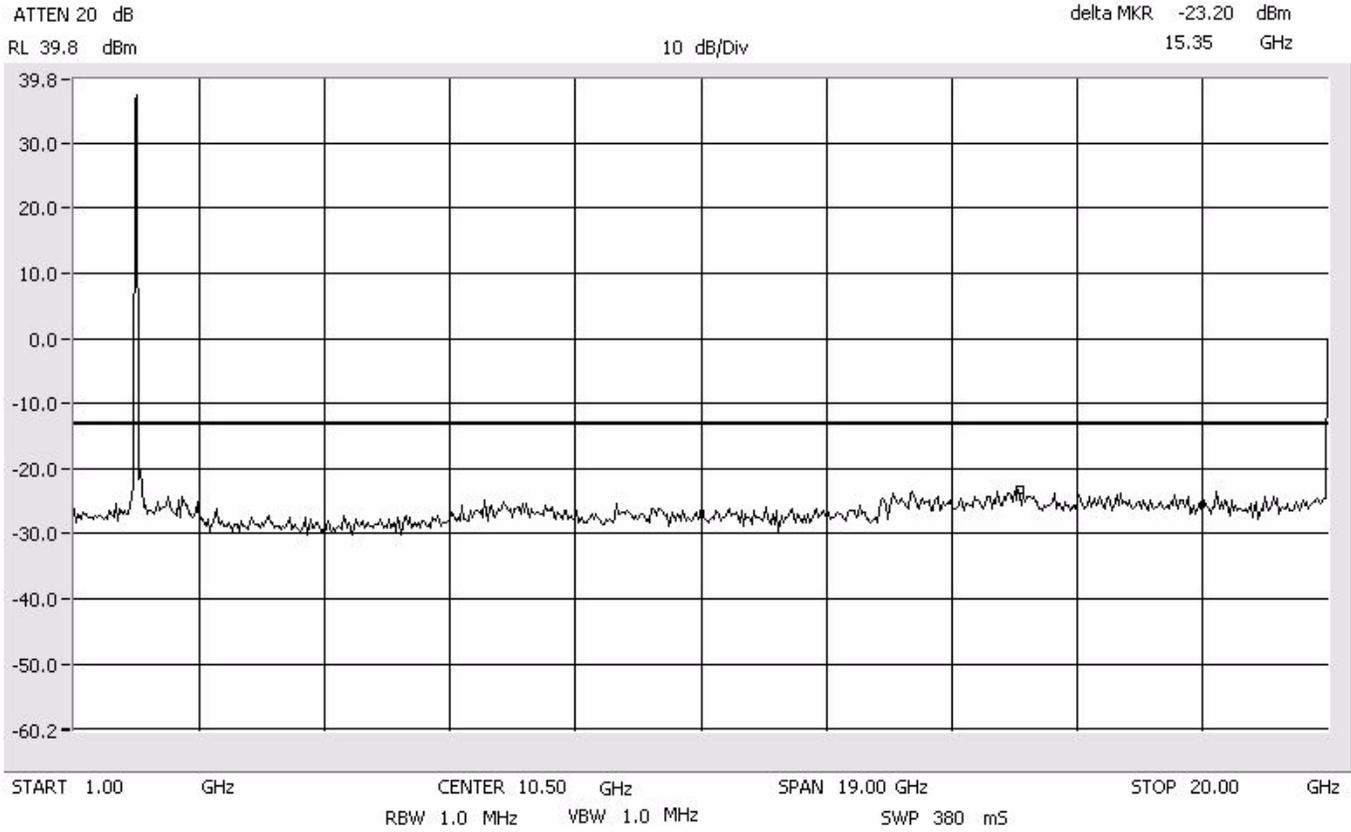

GSM Upper Band

Intermodulation Close - Lower PCS 1900 MHz


Center: 1982.5 MHz
Span: 40 MHz
RBW/VBW: 100 kHz

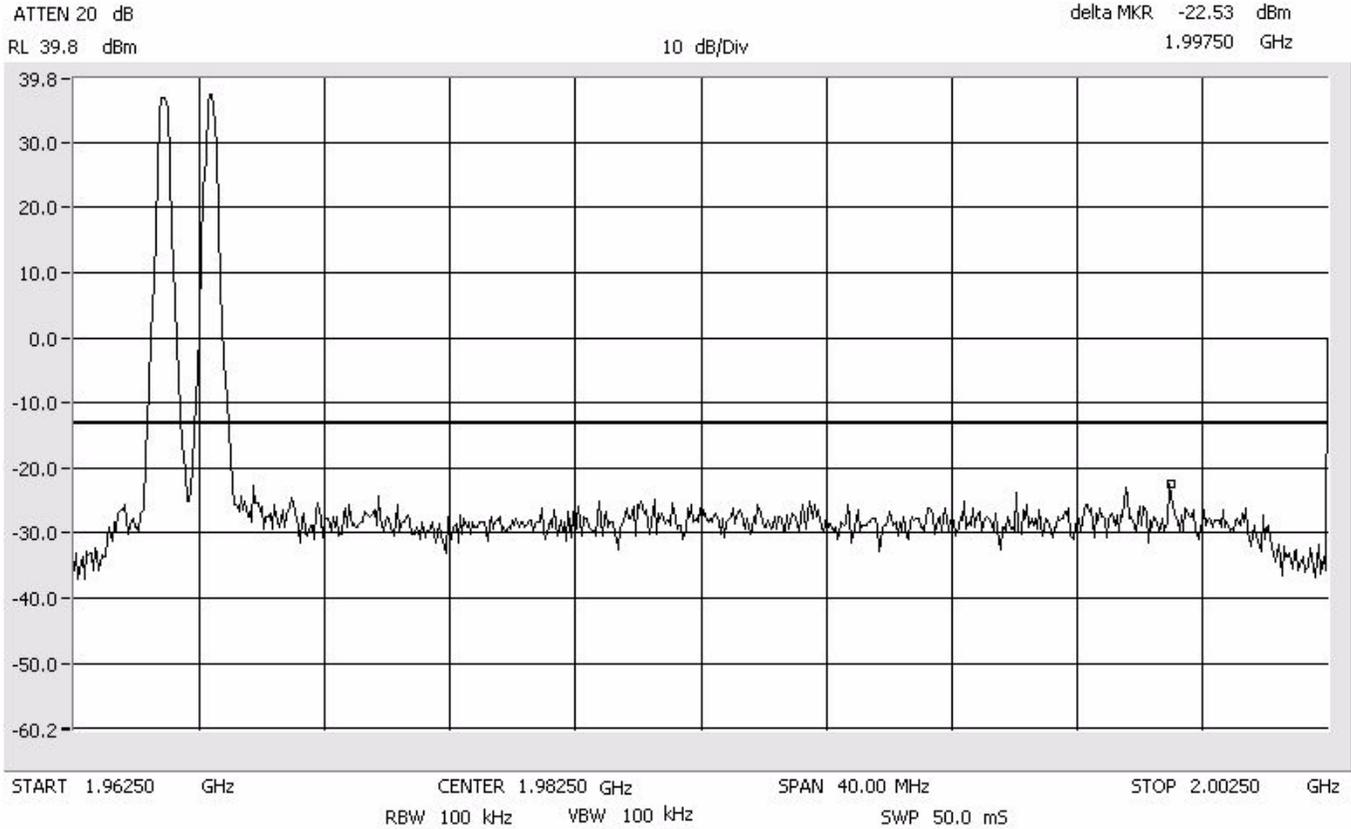

GSM Upper Band

Intermodulation Close - Lower PCS 1900 MHz


Span: 30 MHz to 1 GHz
RBW/VBW: 300 kHz

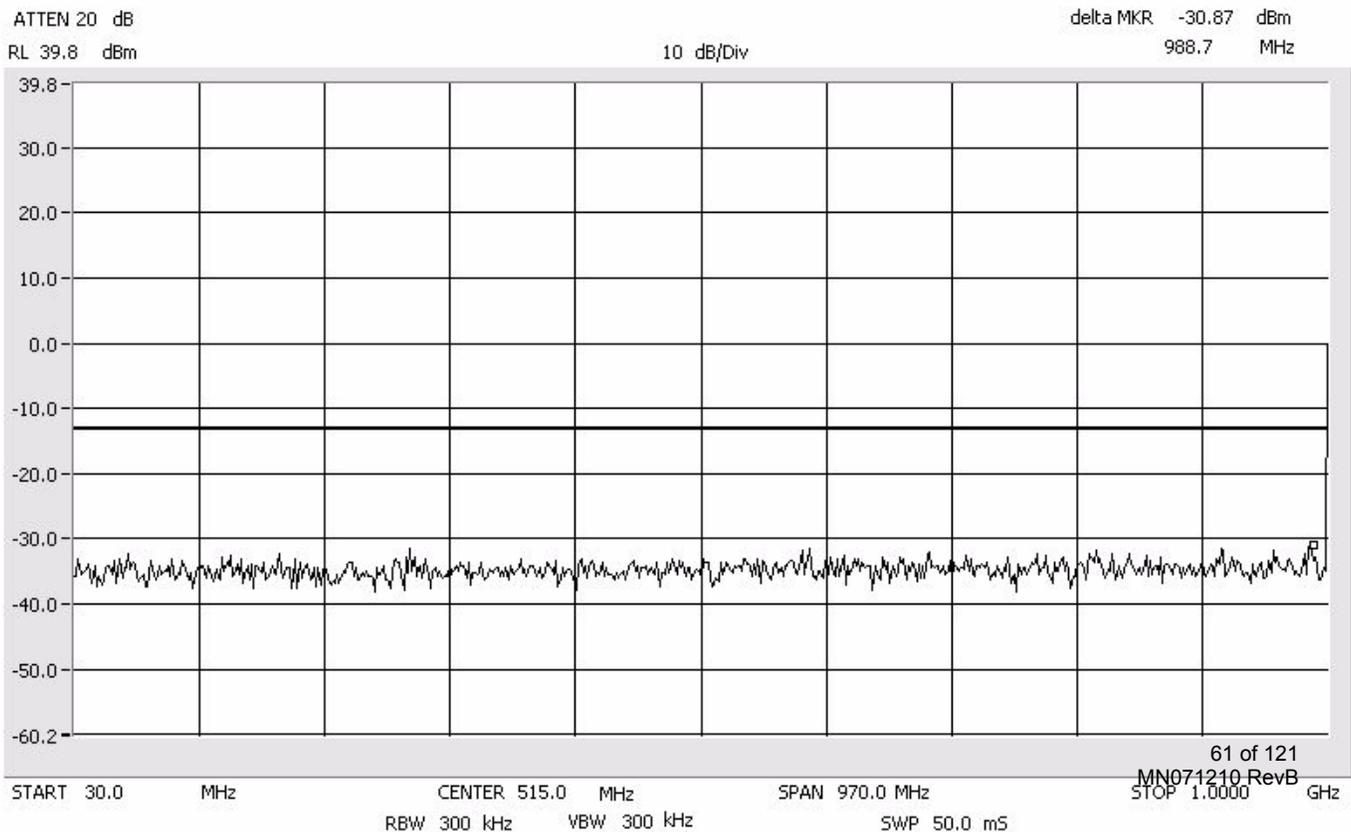

GSM Upper Band

Intermodulation Close - Lower PCS 1900 MHz


Span: 1 GHz to 20 GHz
RBW/VBW: 1 MHz

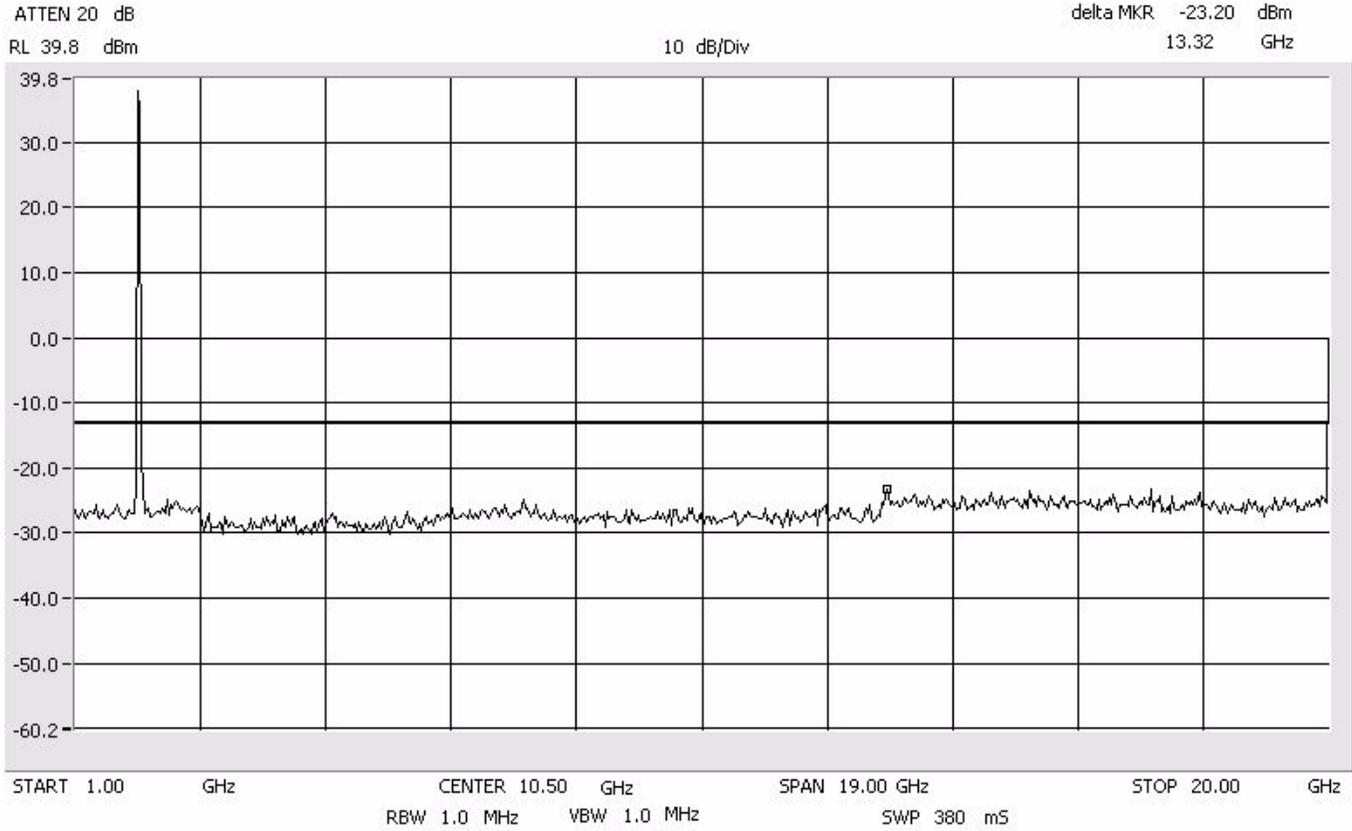

GSM Upper Band

Intermodulation Close - Upper PCS 1900 MHz


Center: 1982.5 MHz
Span: 40 MHz
RBW/VBW: 100 kHz

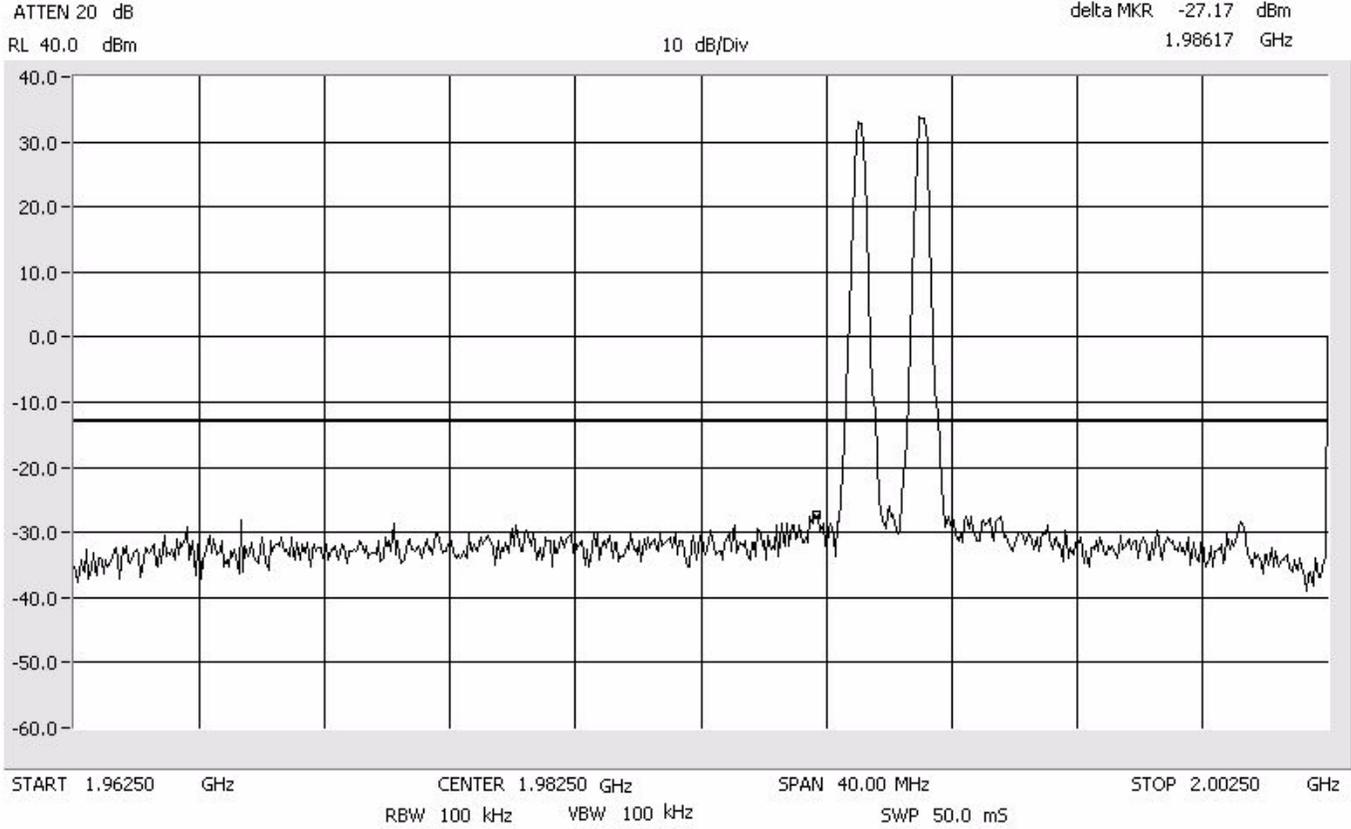

GSM Upper Band

Intermodulation Close - Upper PCS 1900 MHz


Span: 30 MHz to 1 GHz
RBW/VBW: 300 kHz

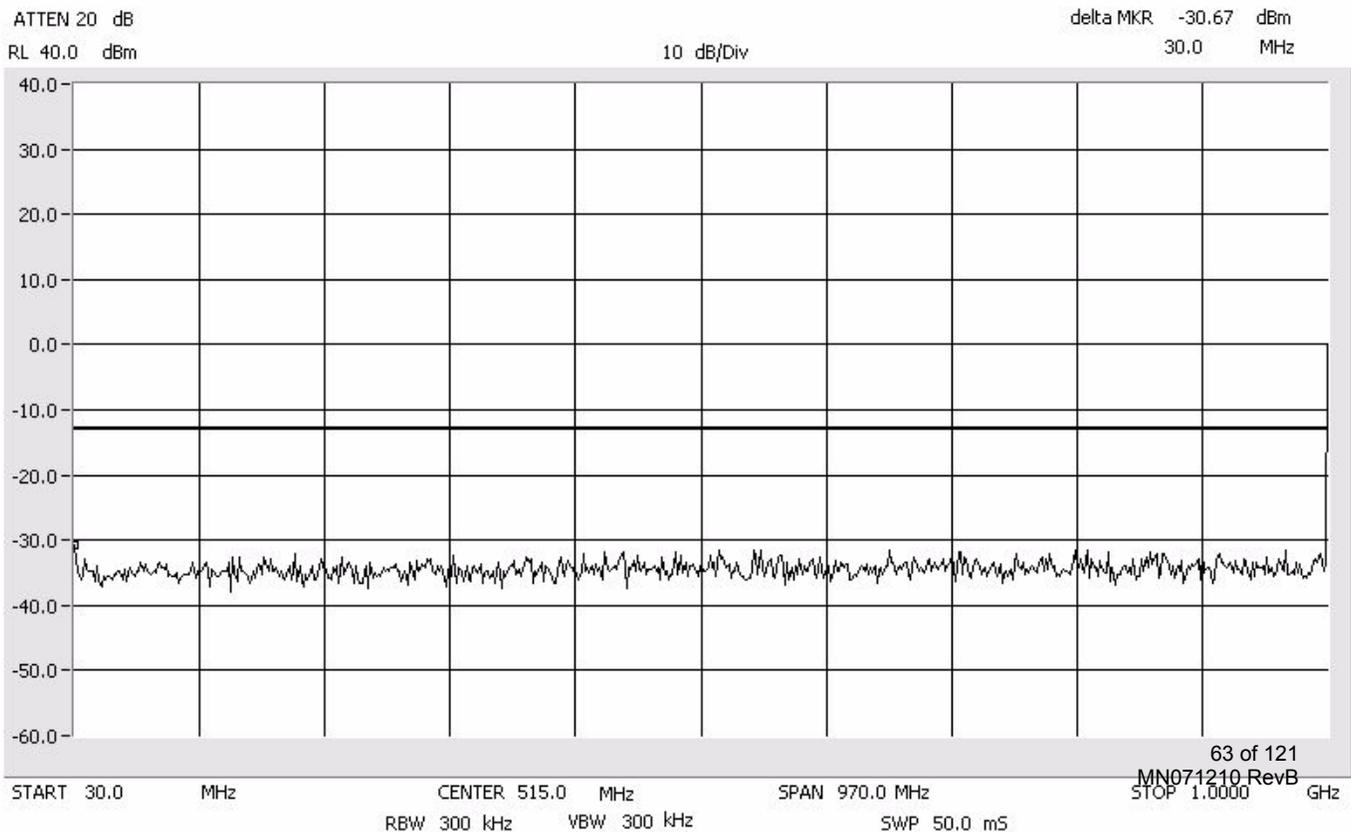

GSM Upper Band

Intermodulation Close - Upper PCS 1900 MHz


Span: 1 GHz to 20 GHz
RBW/VBW: 1 MHz

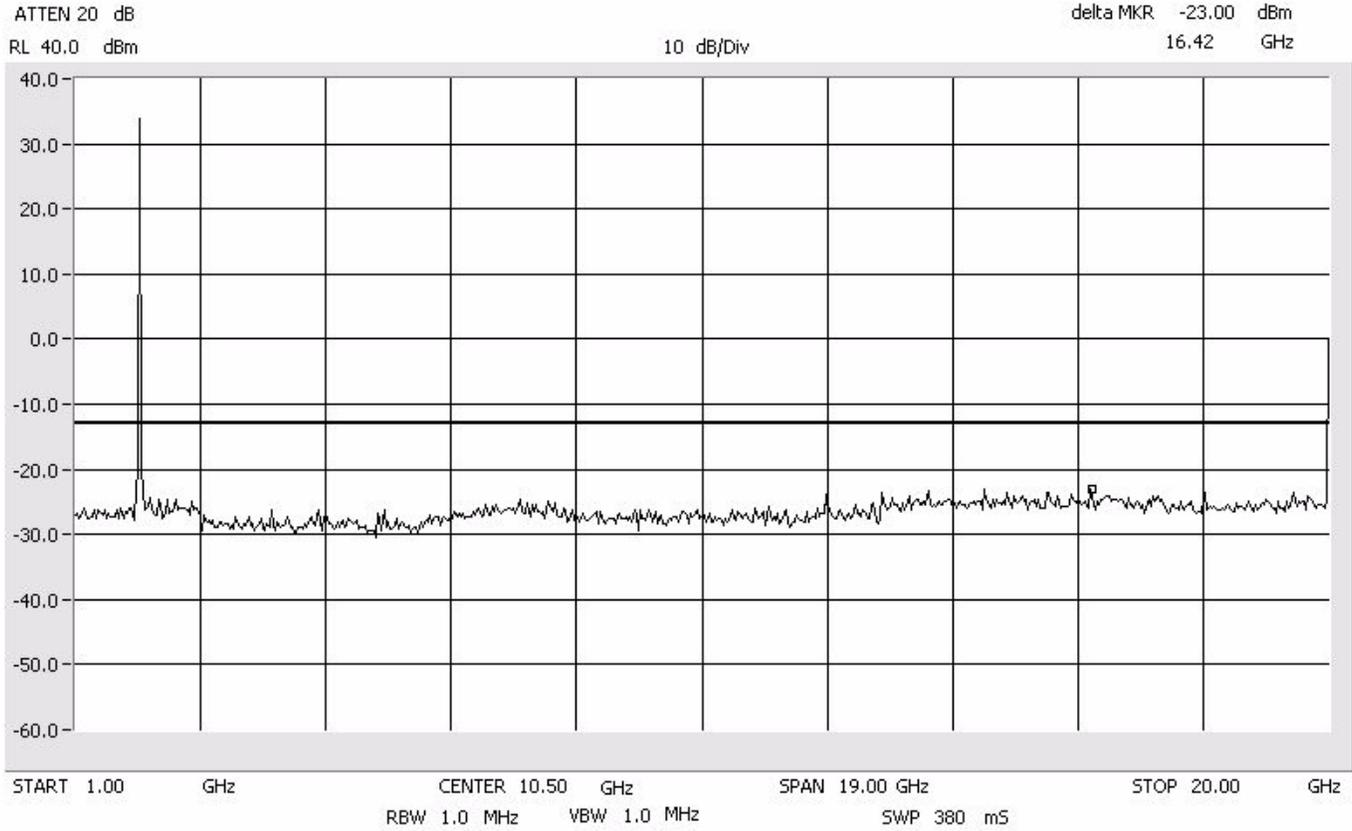

GSM Upper Band

Intermodulation Apart PCS 1900 MHz


Center: 1982.5 MHz
Span: 100 MHz
RBW/VBW: 100 kHz

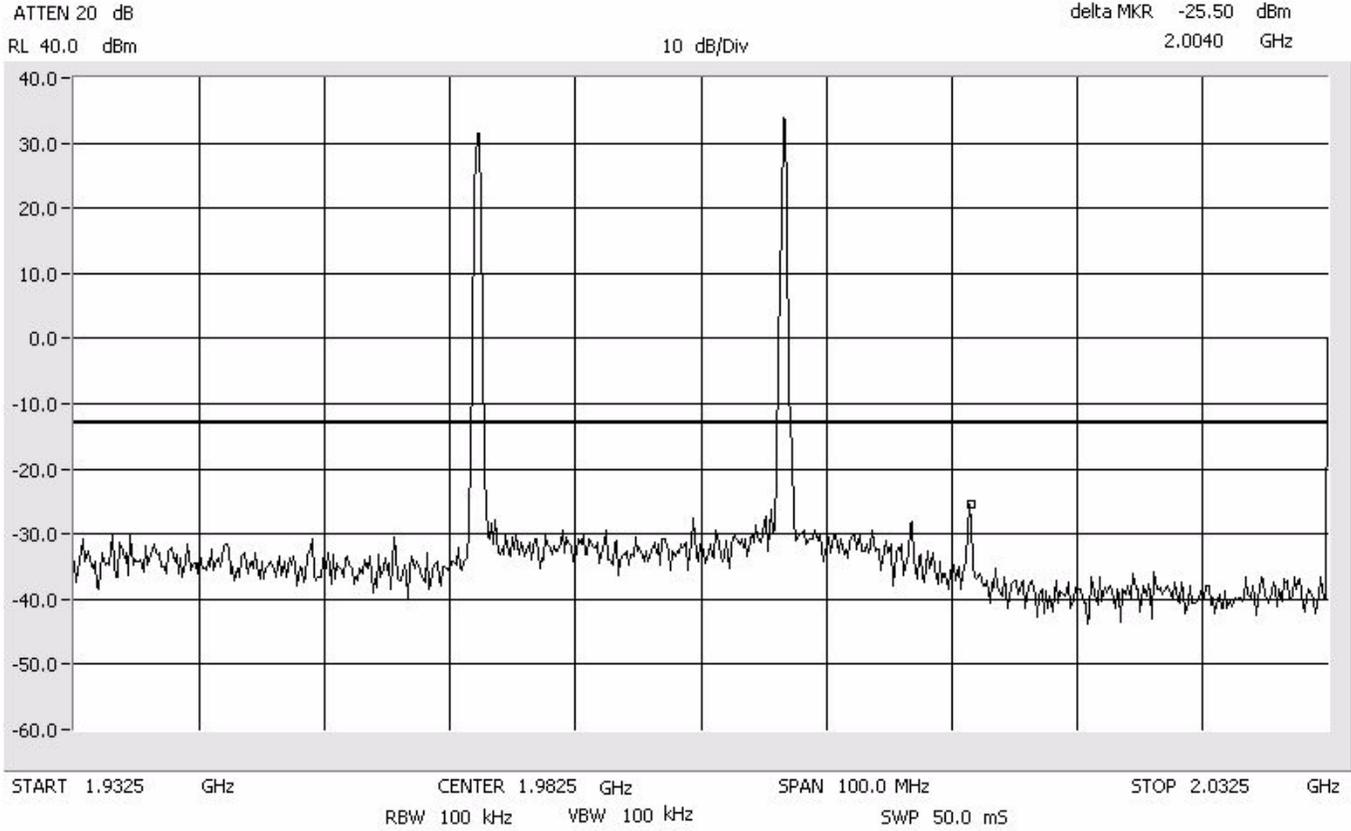

GSM Upper Band

Intermodulation Apart PCS 1900 MHz


Span: 30 MHz to 1 GHz
RBW/VBW: 300 kHz

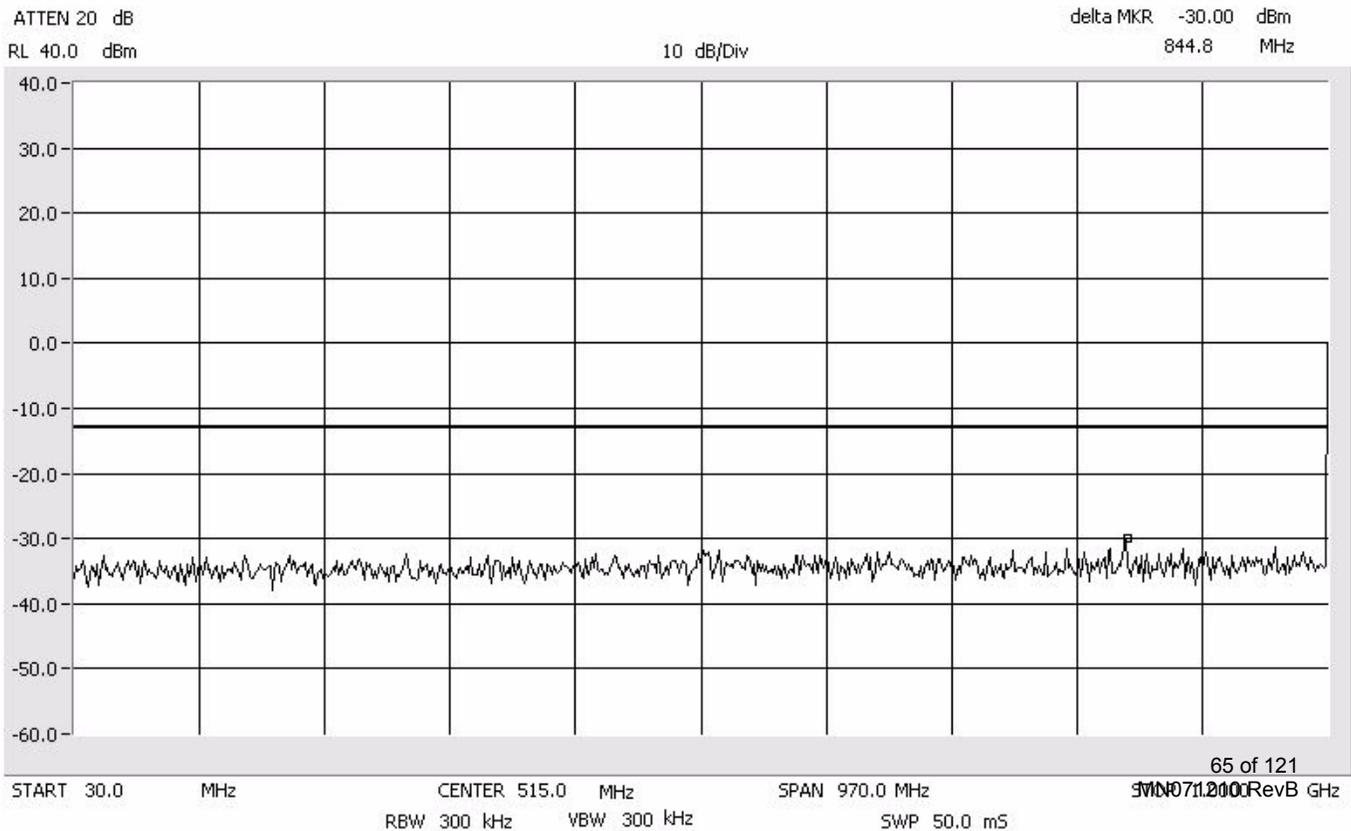

GSM Upper Band

Intermodulation Apart PCS 1900 MHz


Span: 1 GHz to 20 GHz
RBW/VBW: 1 MHz

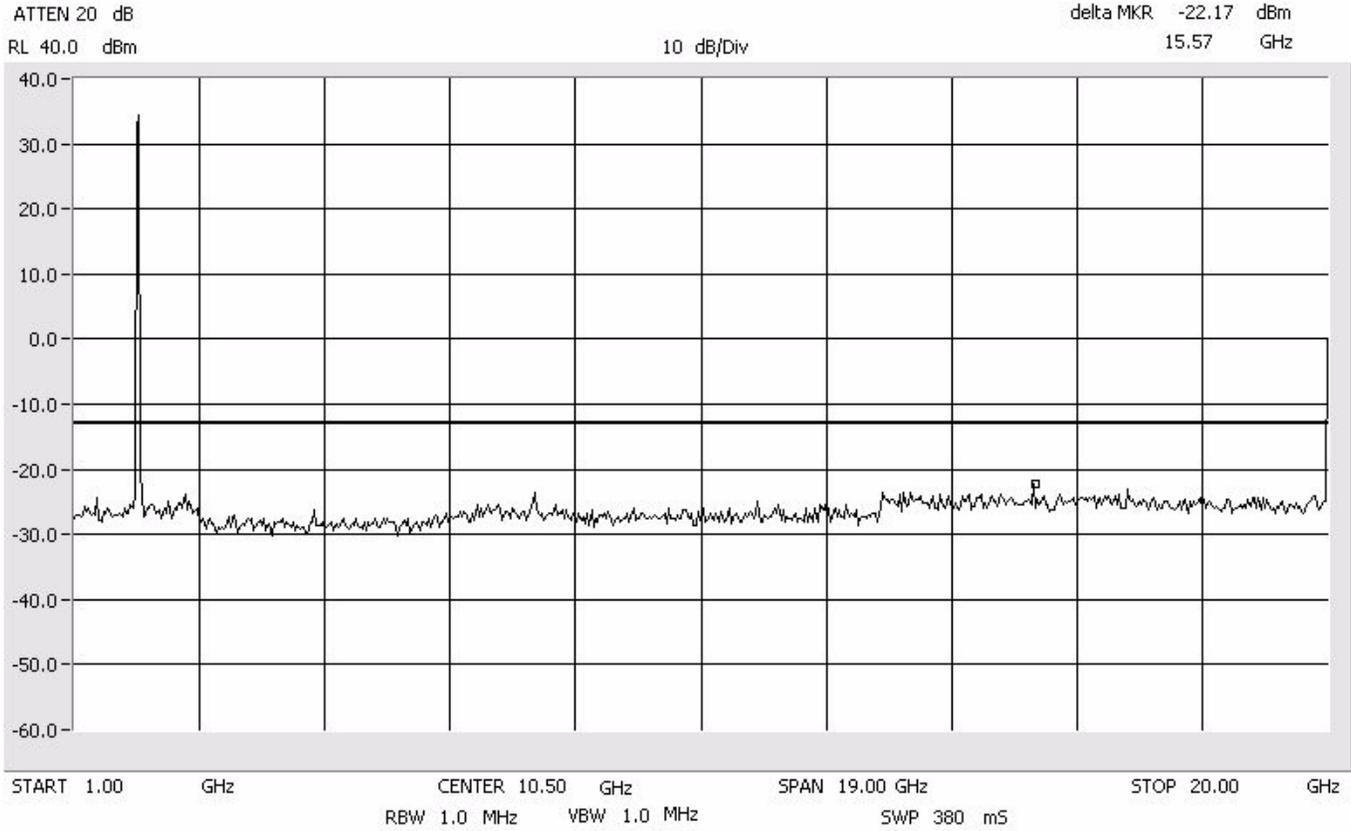

EDGE Lower Band

Intermodulation Close - Lower PCS 1900 MHz


Center: 1947.5 MHz
Span: 40 MHz
RBW/VBW: 100 kHz

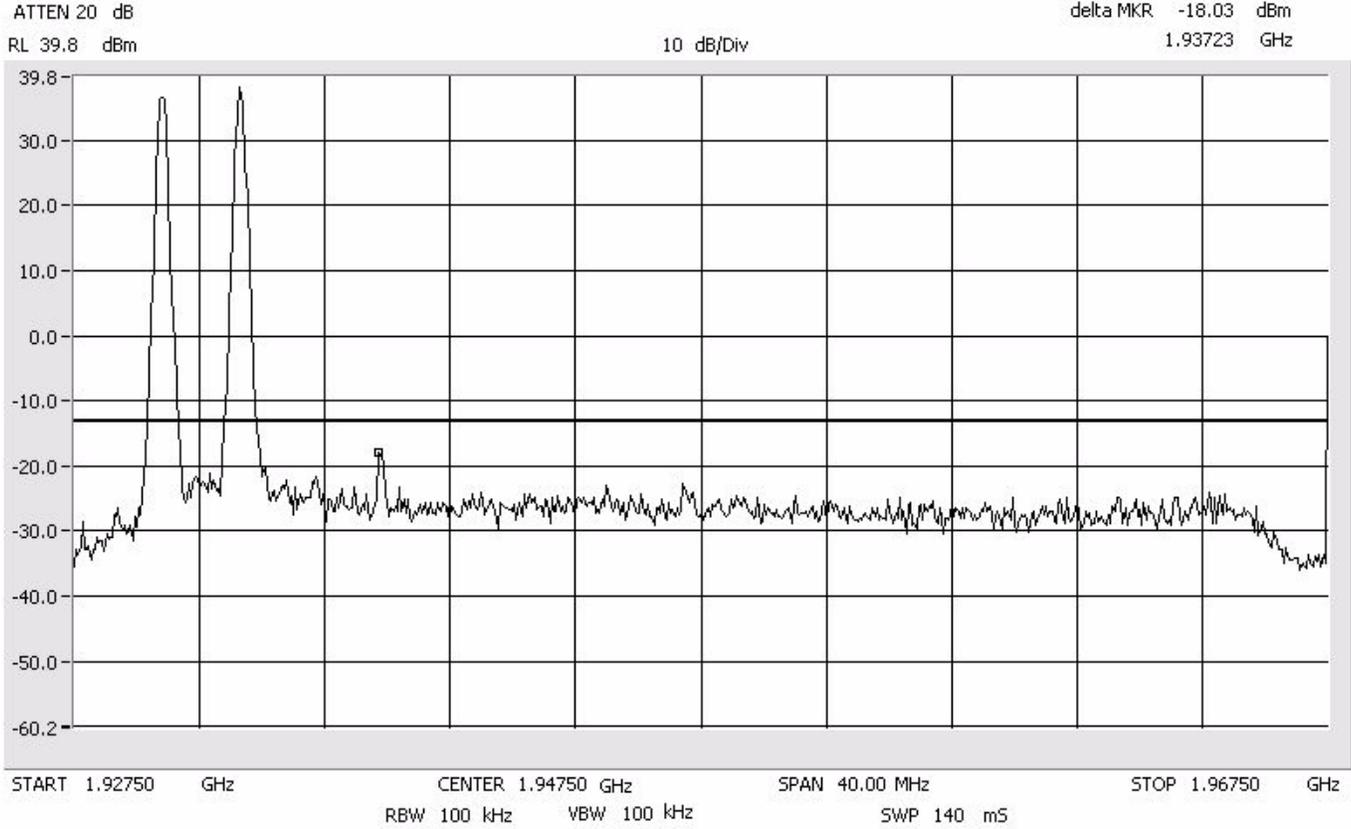


EDGE Lower Band

Intermodulation Close - Lower PCS 1900 MHz

Span: 30 MHz to 1 GHz
RBW/VBW: 300 kHz

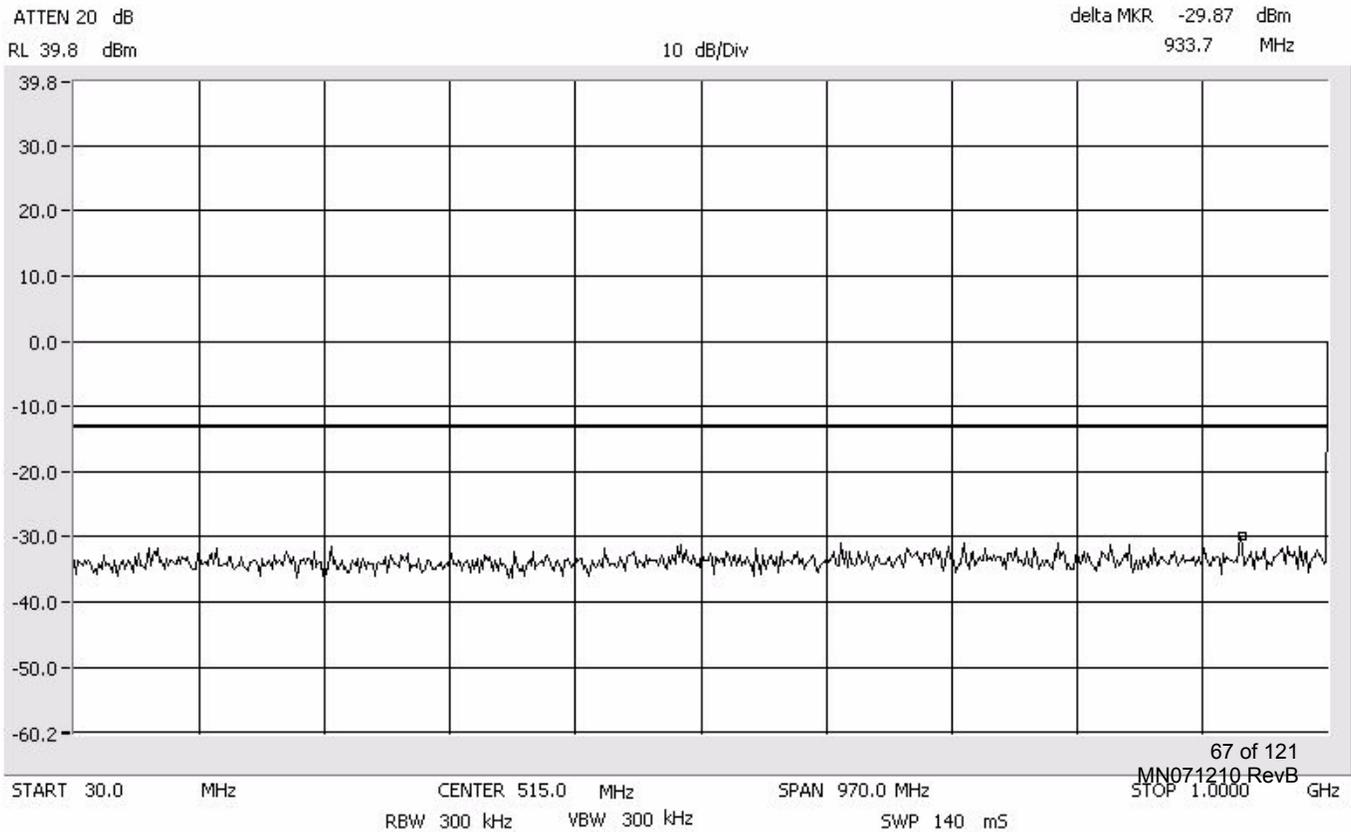


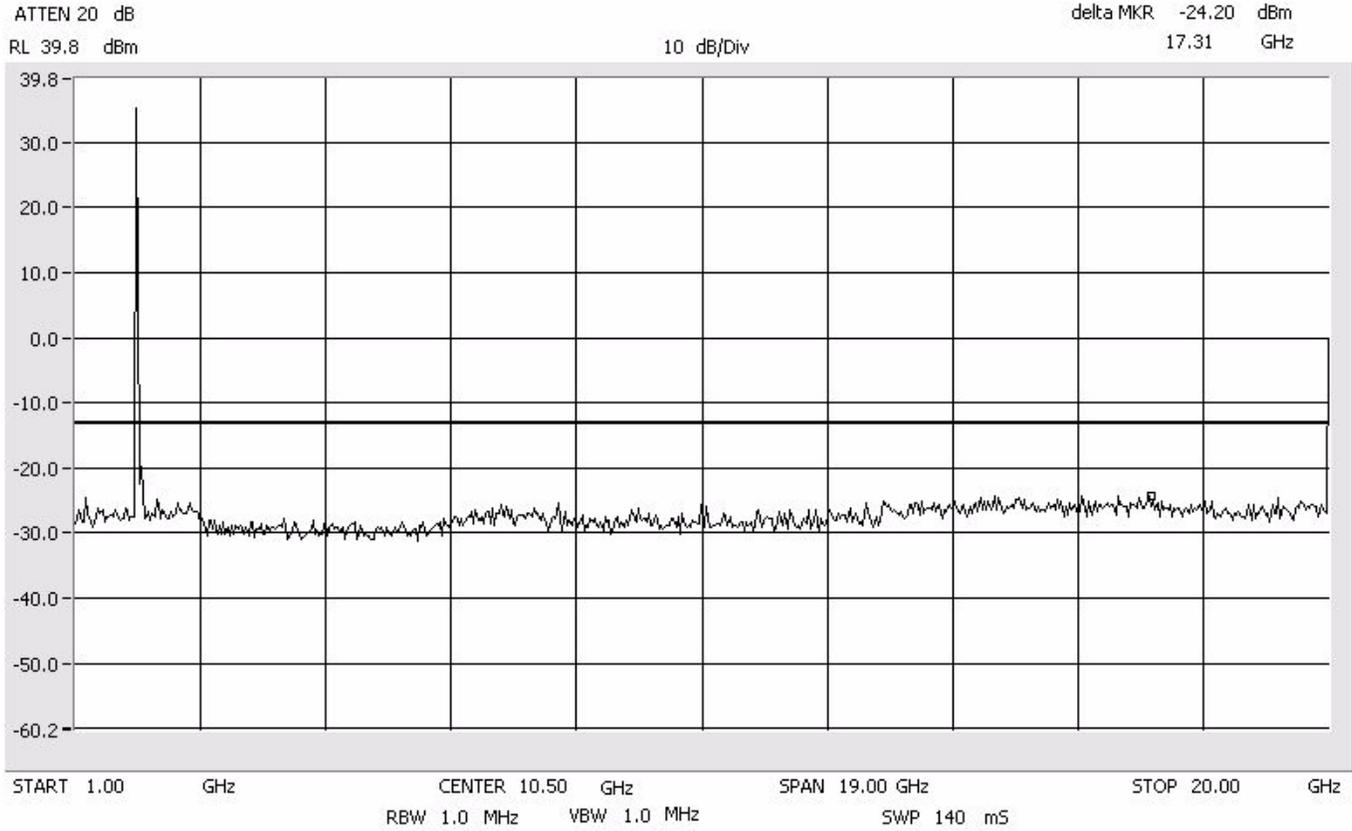

EDGE Lower Band

Intermodulation Close - Upper PCS 1900 MHz


Center: 1947.5 MHz
Span: 40 MHz
RBW/VBW: 100 kHz

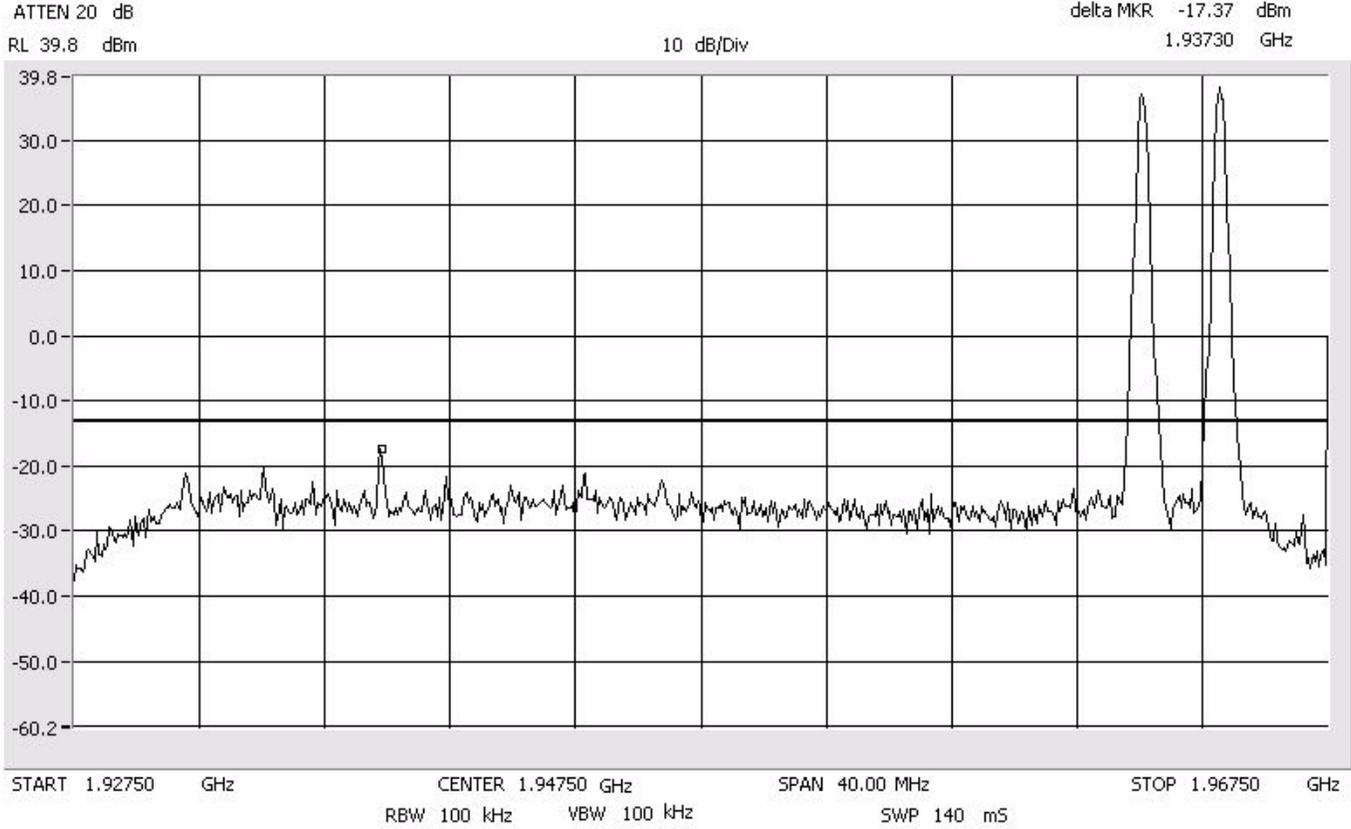


EDGE Lower Band

Intermodulation Close - Upper PCS 1900 MHz

Span: 30 MHz to 1 GHz
RBW/VBW: 300 kHz

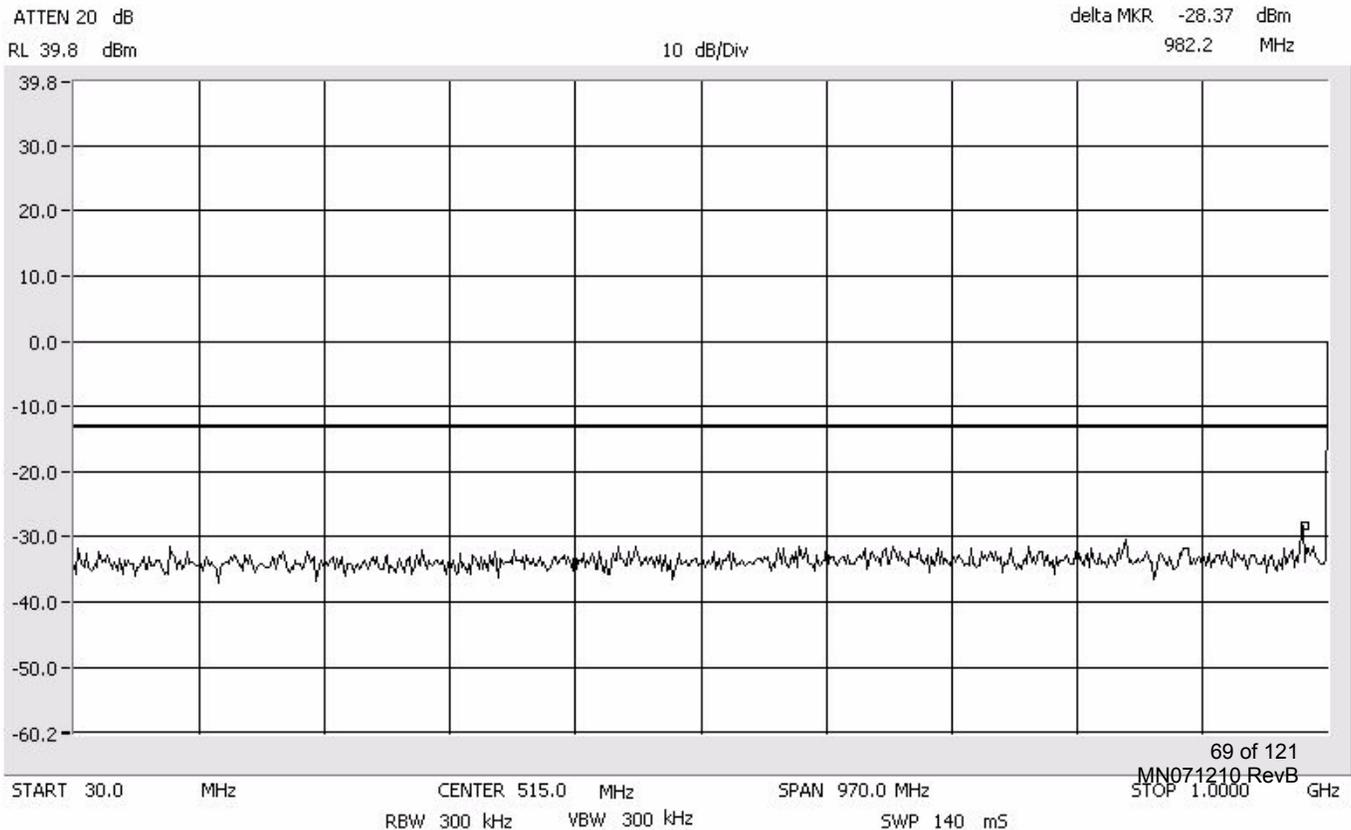


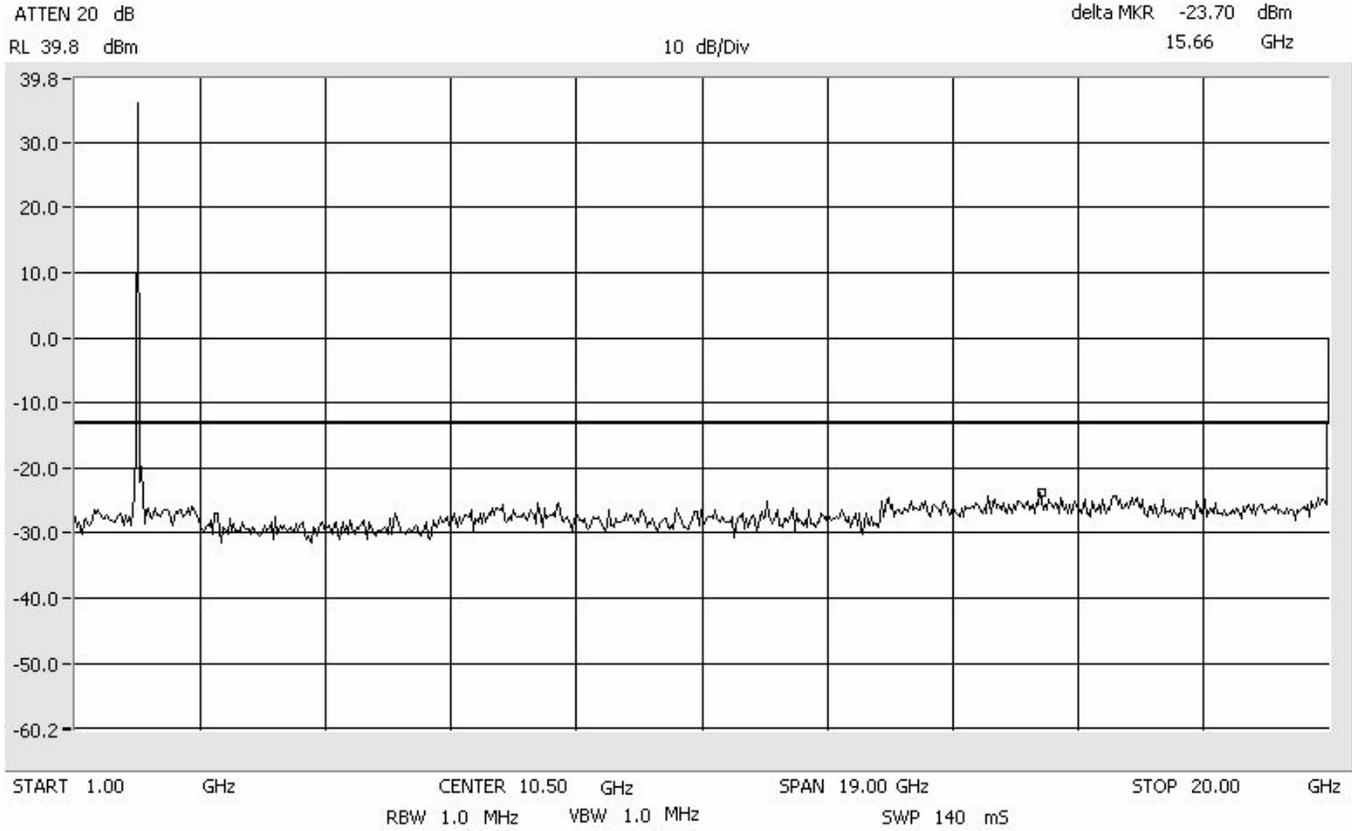

**EDGE
Lower Band**

**Intermodulation
Apart
PCS 1900 MHz**


Center: 1947.5 MHz
Span: 100 MHz
RBW/VBW: 100 kHz

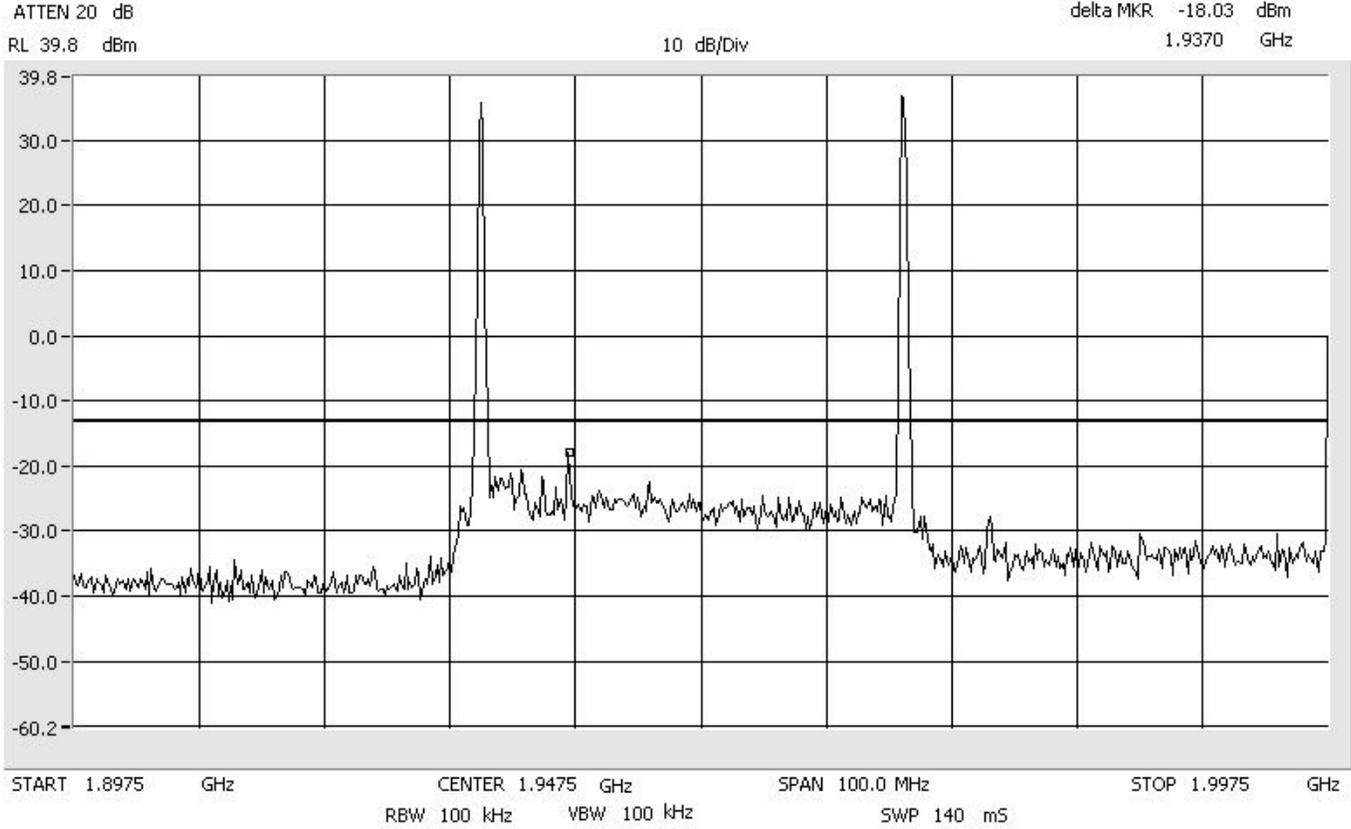


**EDGE
Lower Band**

**Intermodulation
Apart
PCS 1900 MHz**

Span: 30 MHz to 1 GHz
RBW/VBW: 300 kHz

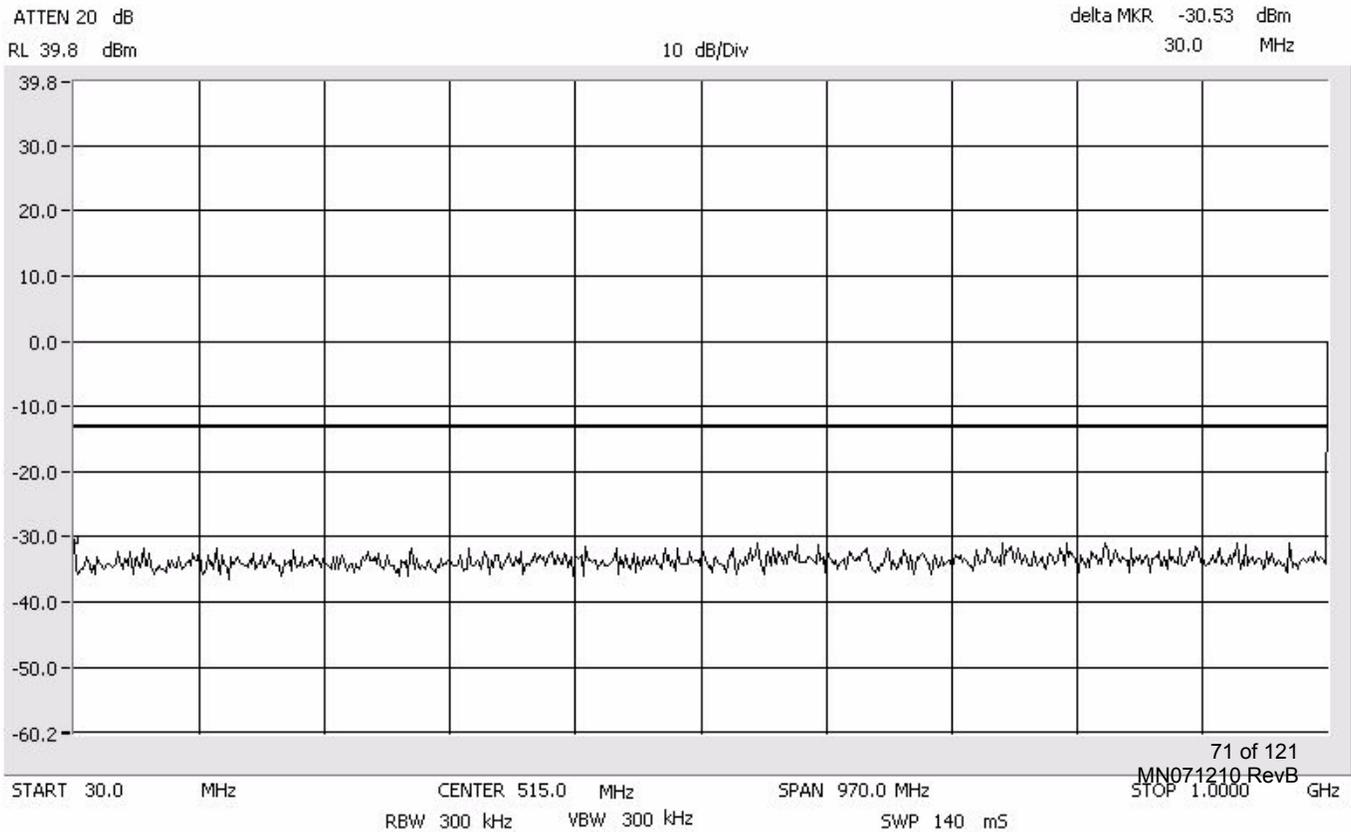


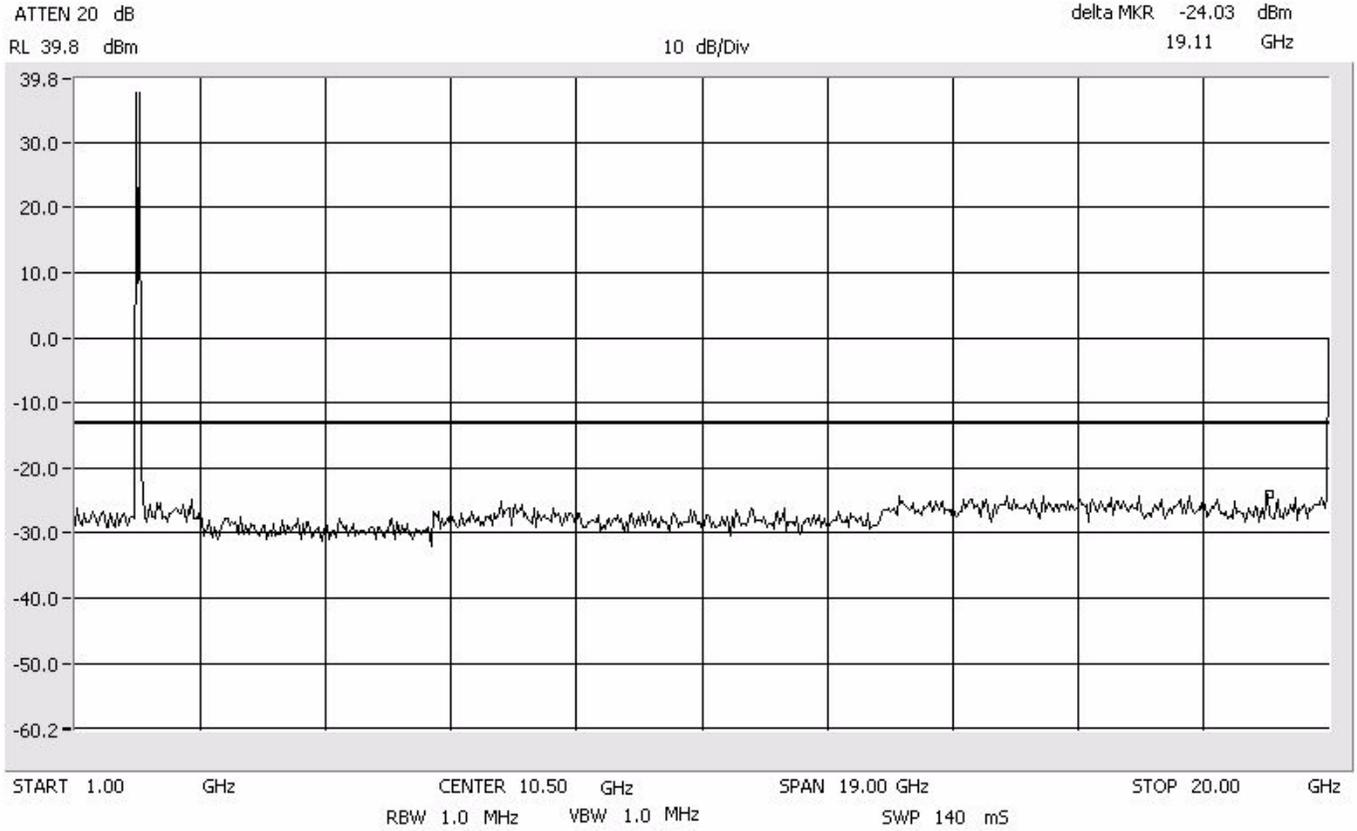

EDGE Upper Band

Intermodulation Close - Lower PCS 1900 MHz


Center: 1982.5 MHz
Span: 40 MHz
RBW/VBW: 100 kHz

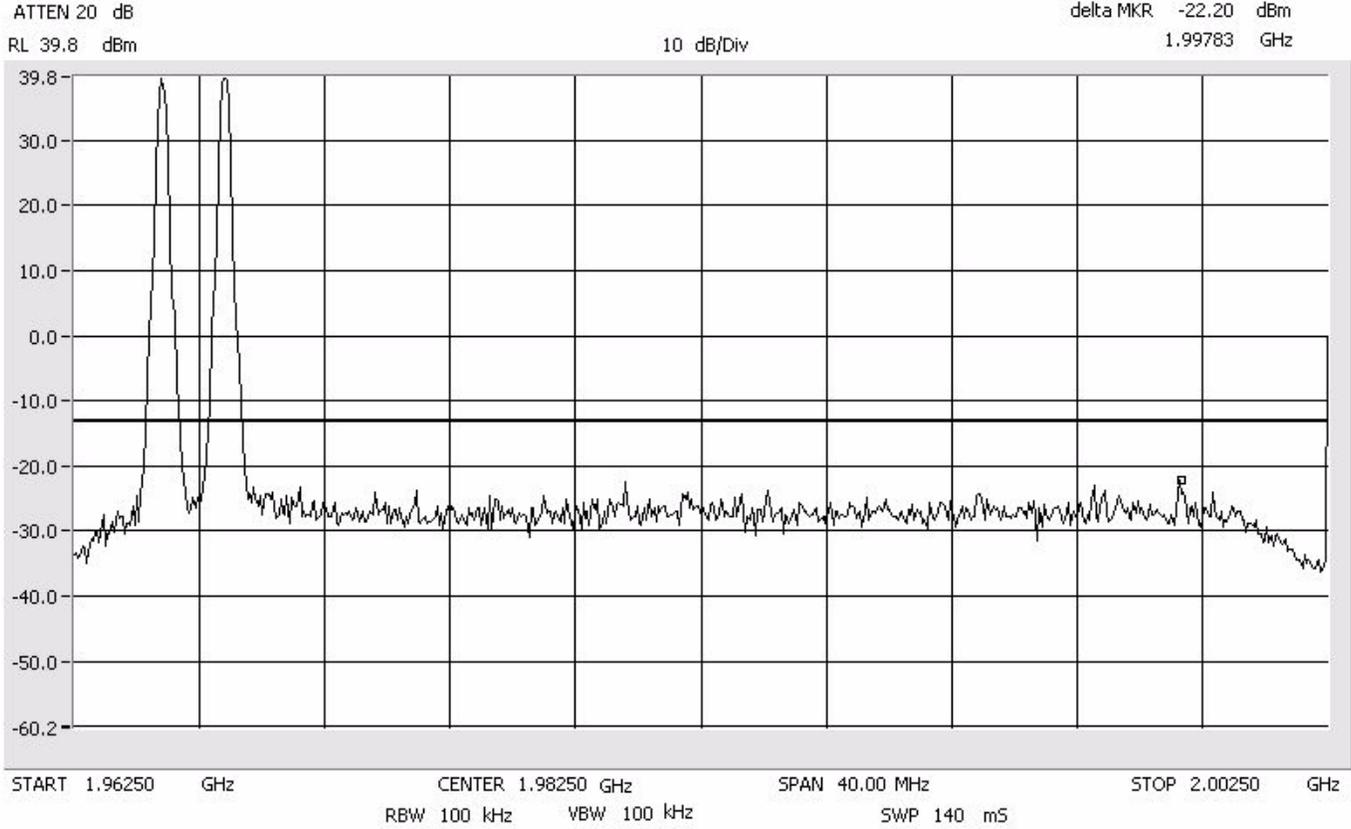

EDGE Upper Band

Intermodulation Close - Lower PCS 1900 MHz


Span: 30 MHz to 1 GHz
RBW/VBW: 300 kHz

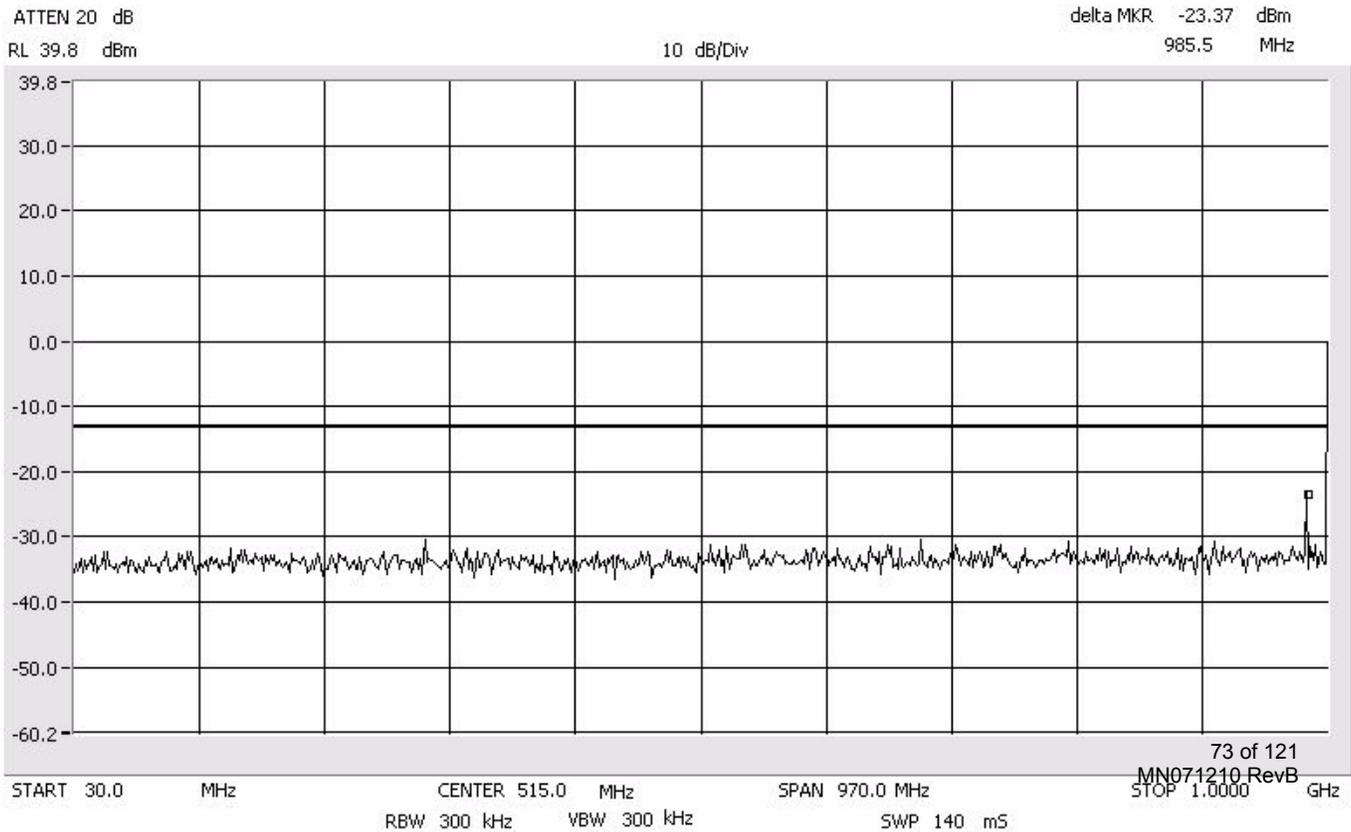

EDGE Upper Band

Intermodulation Close - Lower PCS 1900 MHz


Span: 1 GHz to 20 GHz
RBW/VBW: 1 MHz

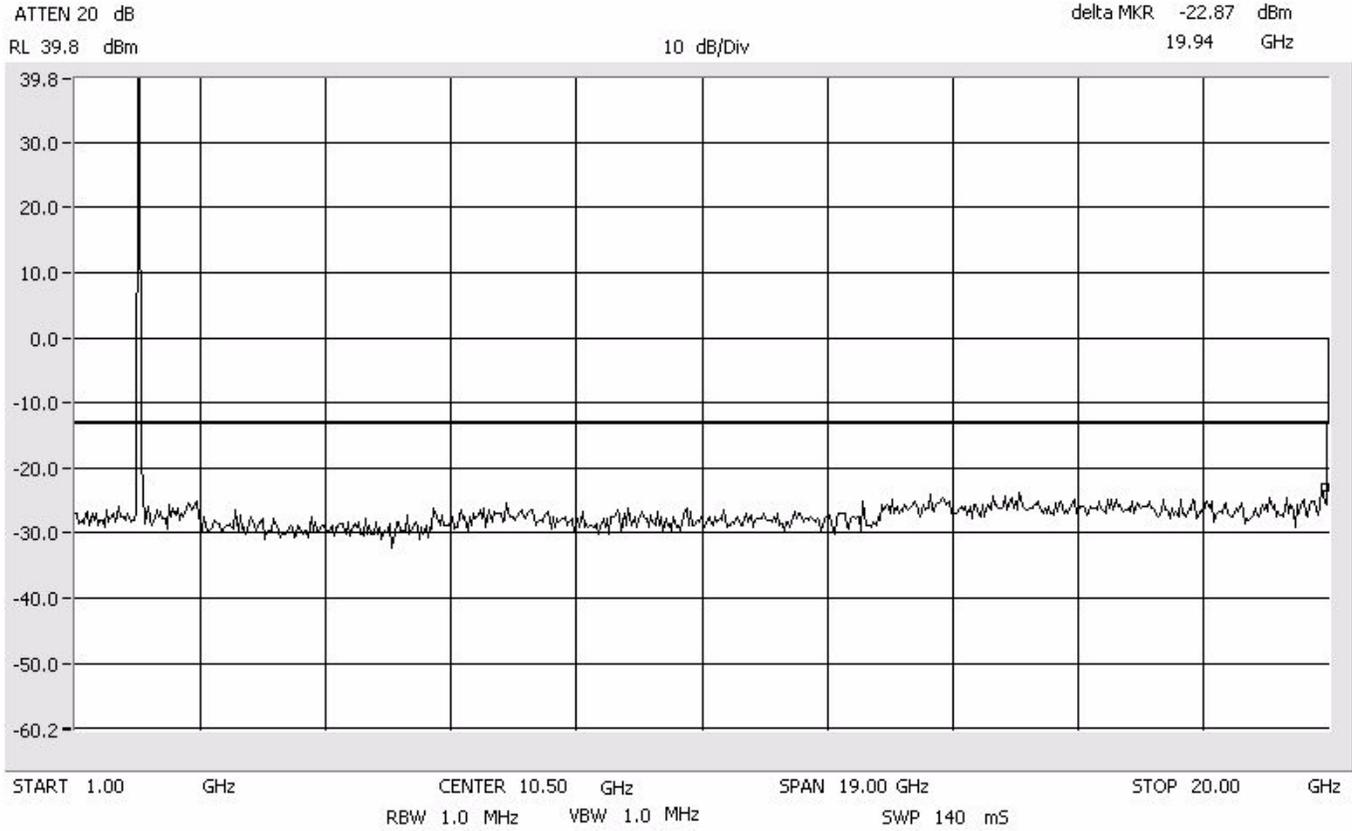

EDGE Upper Band

Intermodulation Close - Upper PCS 1900 MHz


Center: 1982.5 MHz
Span: 40 MHz
RBW/VBW: 100 kHz

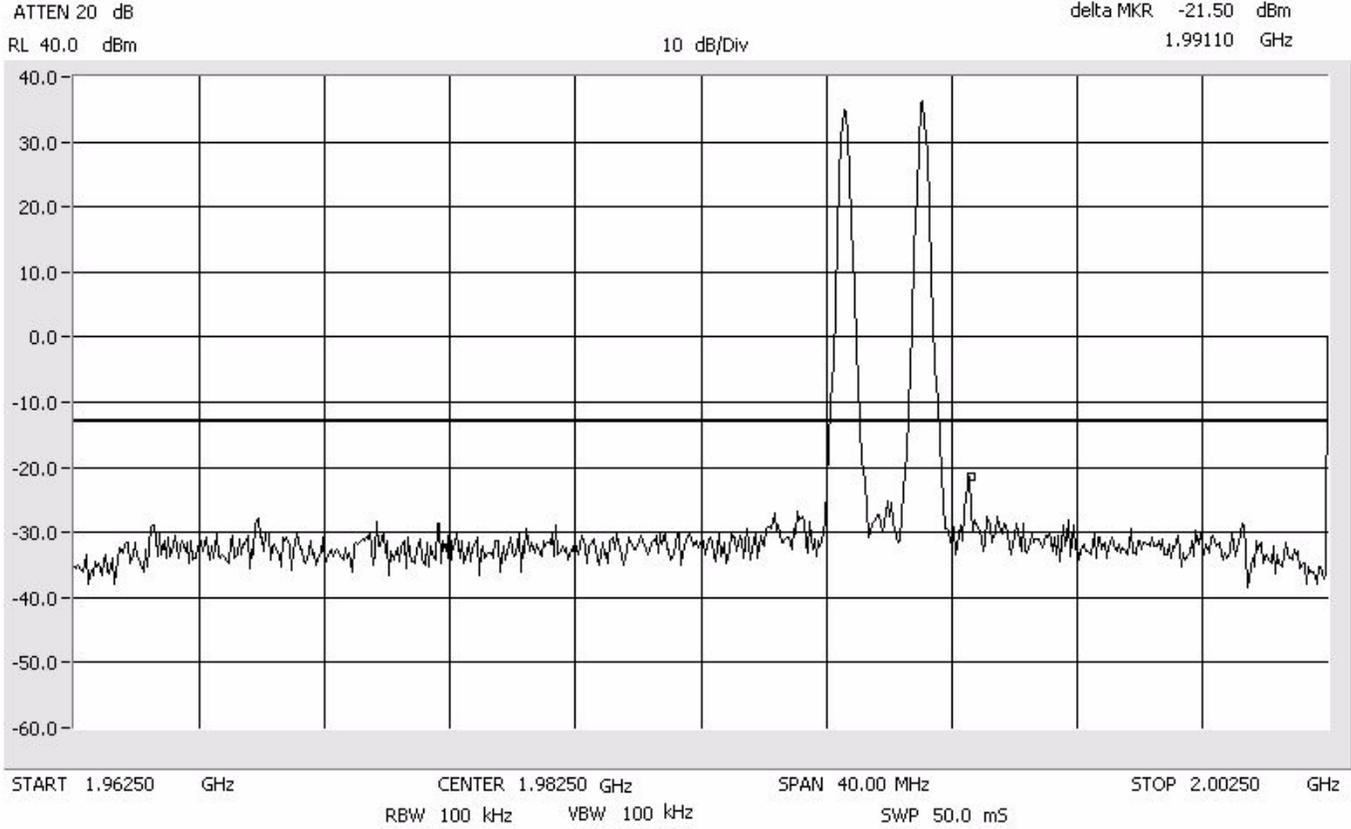

EDGE Upper Band

Intermodulation Close - Upper PCS 1900 MHz


Span: 30 MHz to 1 GHz
RBW/VBW: 300 kHz

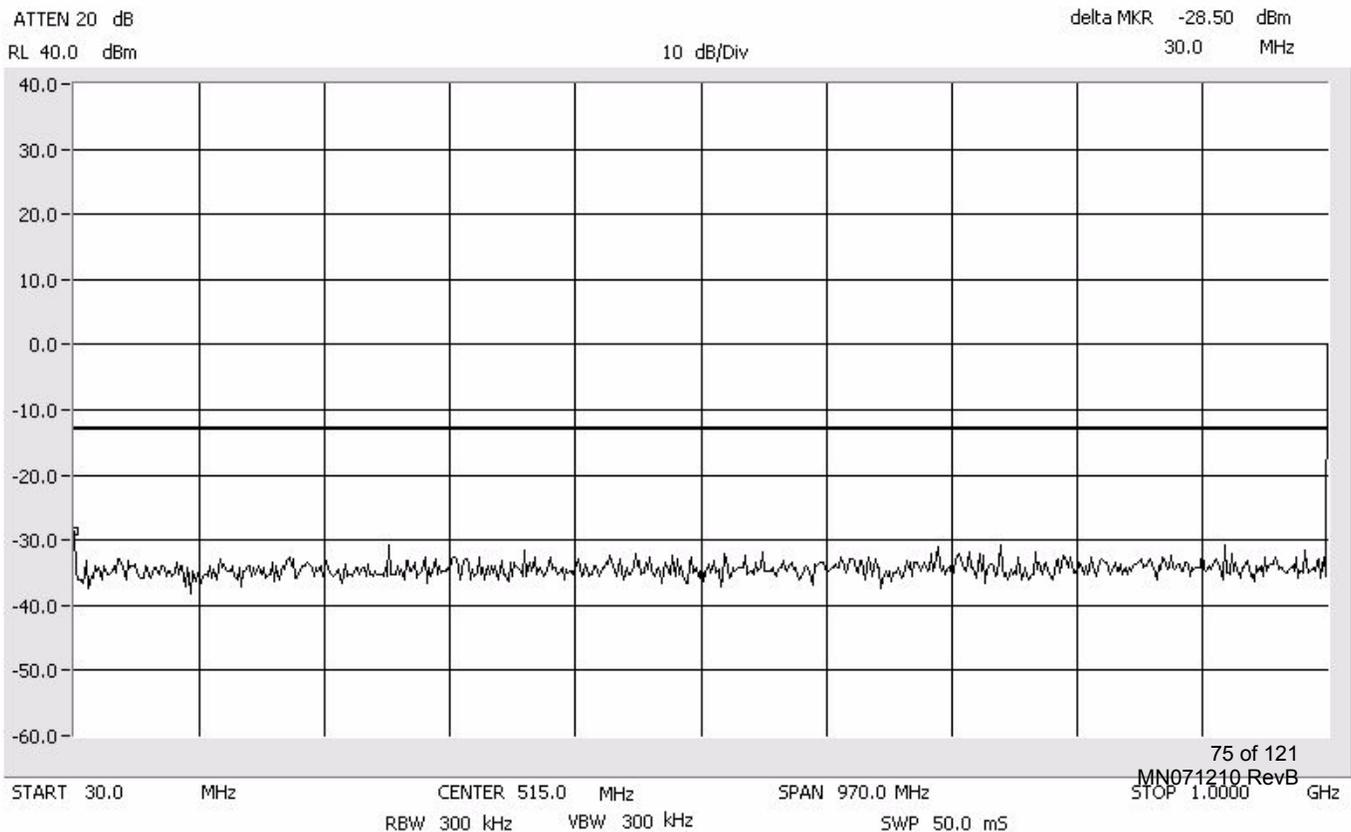

EDGE Upper Band

Intermodulation Close - Upper PCS 1900 MHz


Span: 1 GHz to 20 GHz
RBW/VBW: 1 MHz

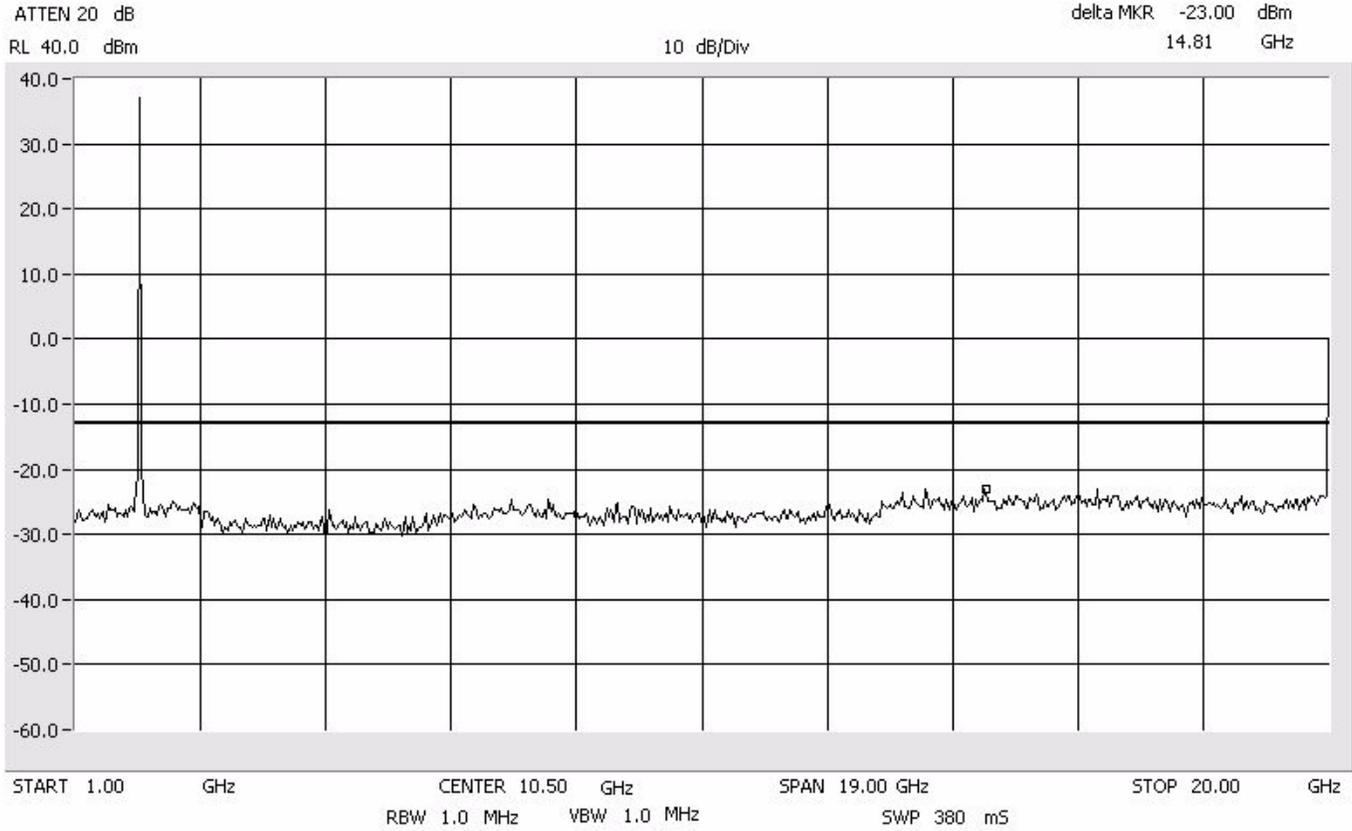

**EDGE
Upper Band**

**Intermodulation
Apart
PCS 1900 MHz**


Center: 1982.5 MHz
Span: 100 MHz
RBW/VBW: 100 kHz

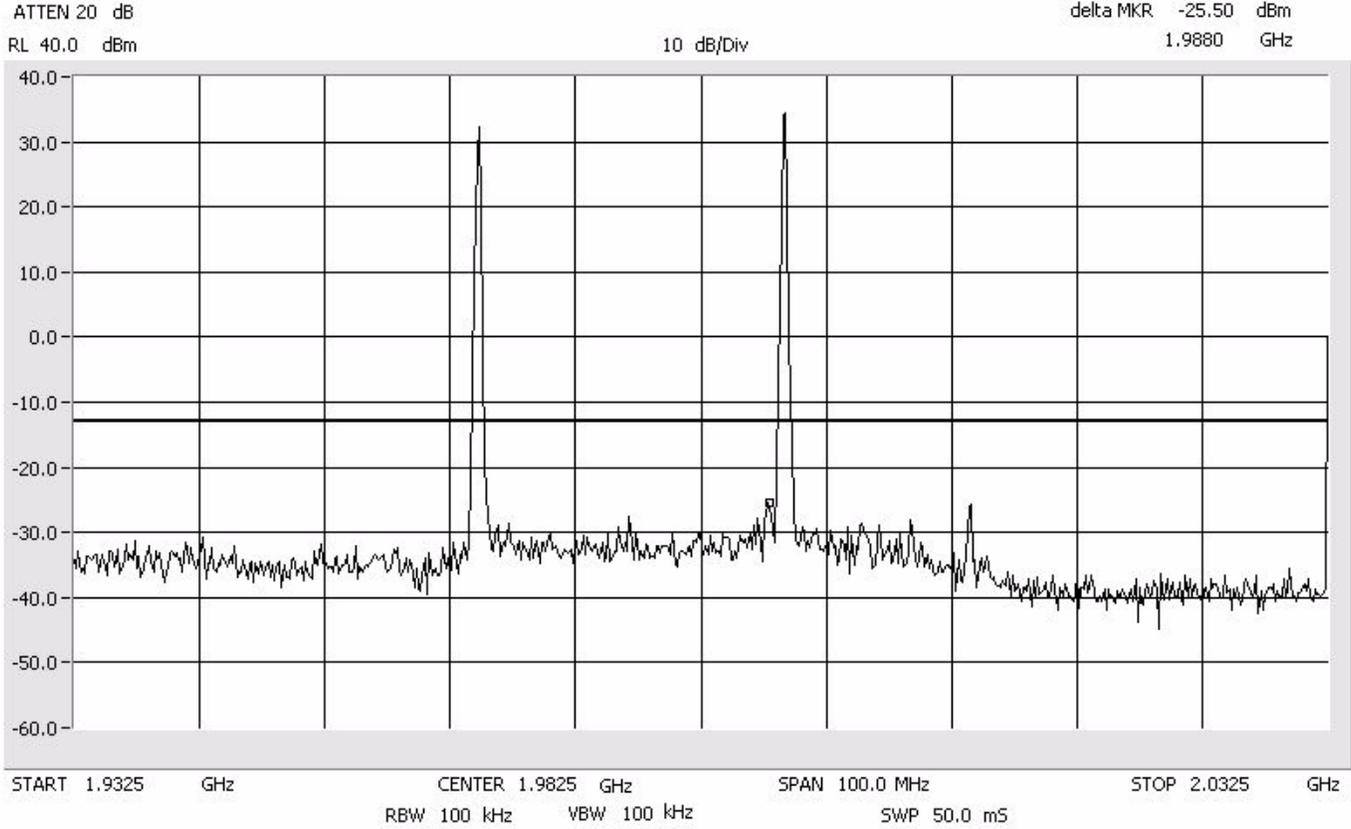


**EDGE
Upper Band**

**Intermodulation
Apart
PCS 1900 MHz**

Span: 30 MHz to 1 GHz
RBW/VBW: 300 kHz

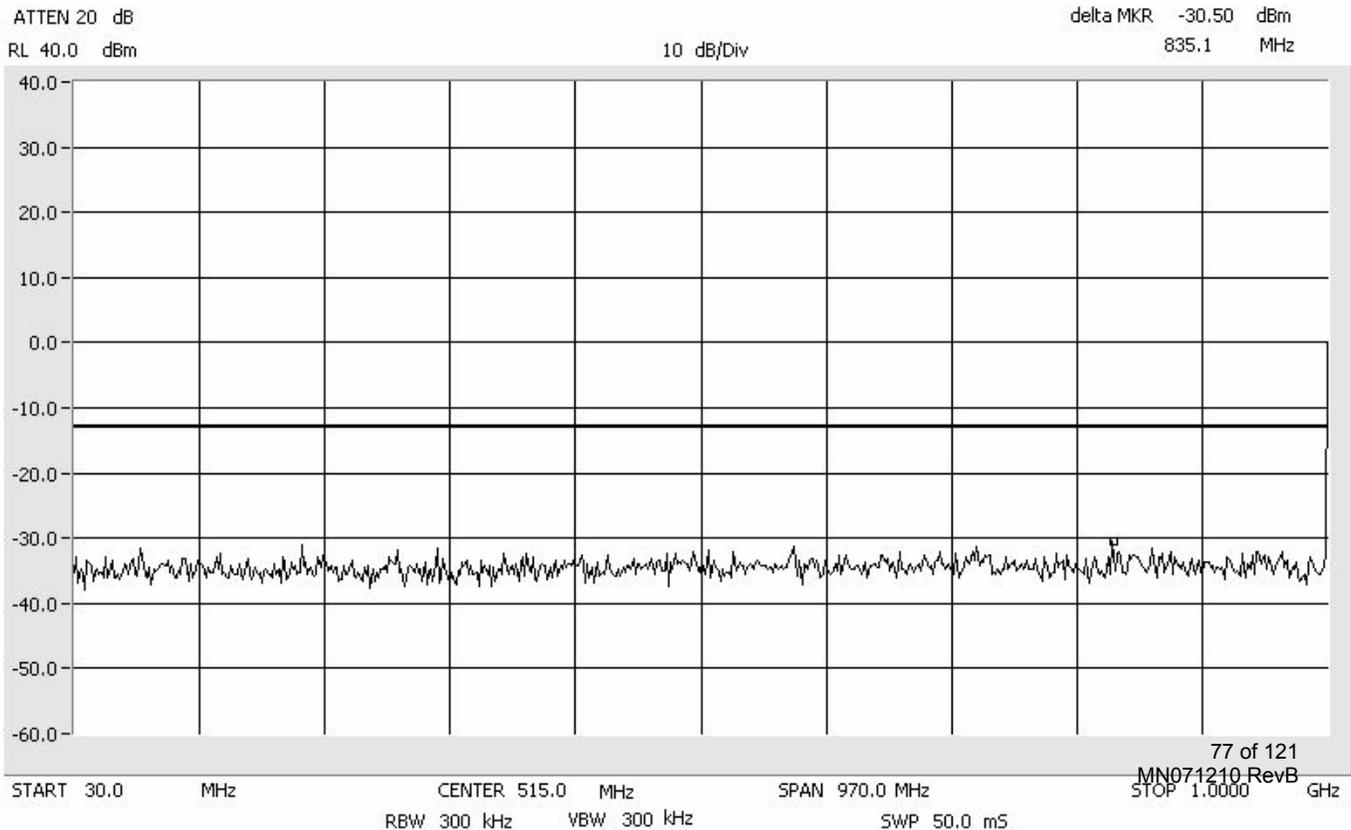


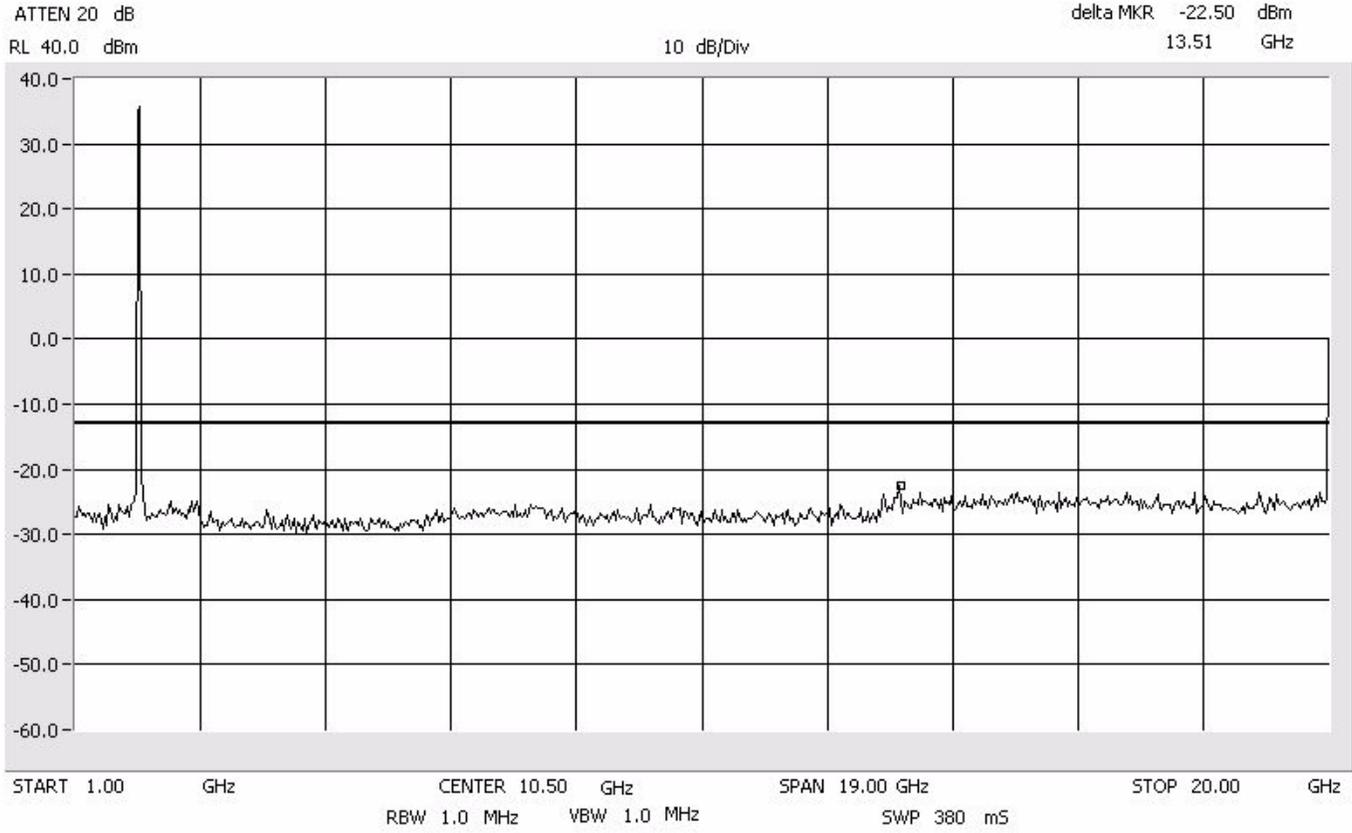

CDMA Lower Band

Intermodulation Close - Lower PCS 1900 MHz


Center: 1947.5 MHz
Span: 40 MHz
RBW/VBW: 100 kHz

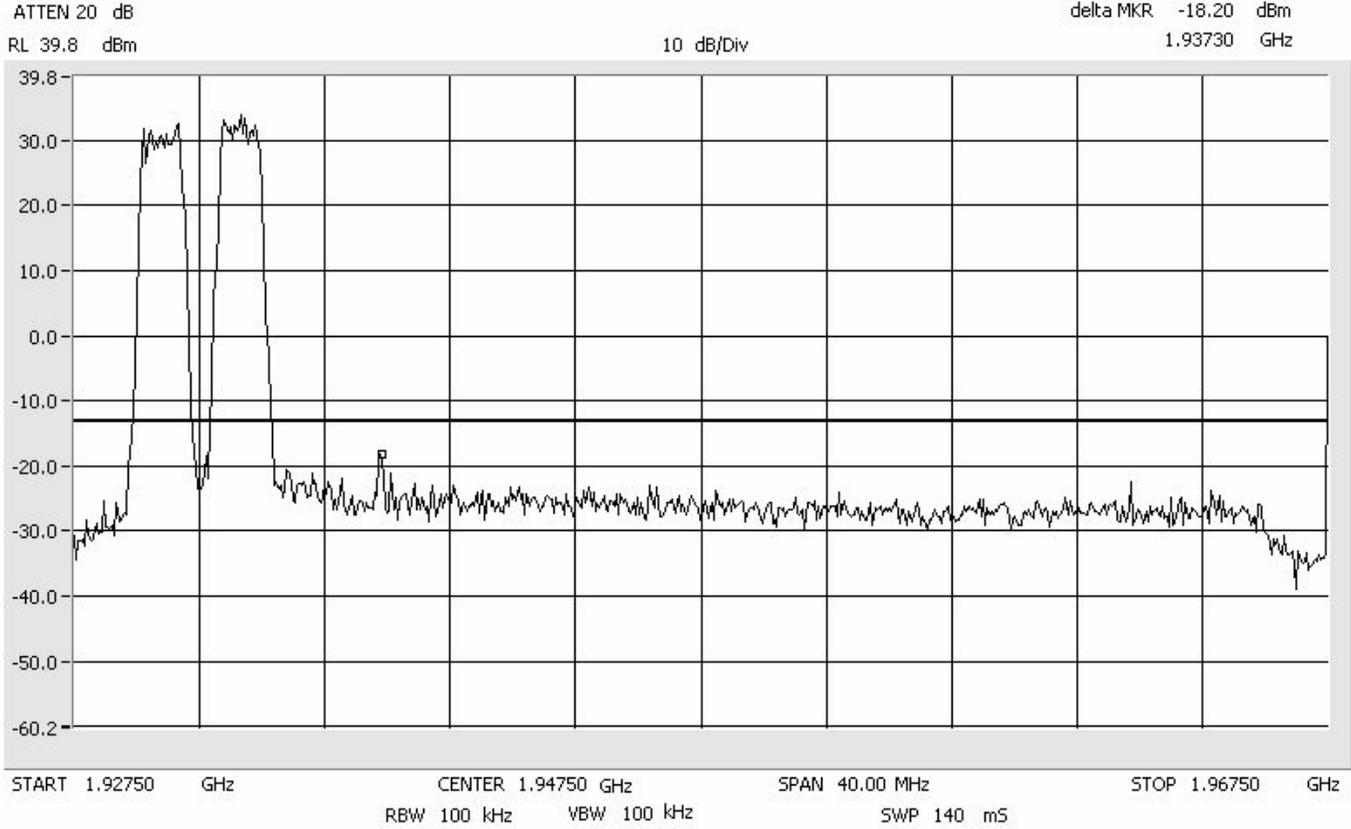

CDMA Lower Band

Intermodulation Close - Lower PCS 1900 MHz


Span: 30 MHz to 1 GHz
RBW/VBW: 300 kHz

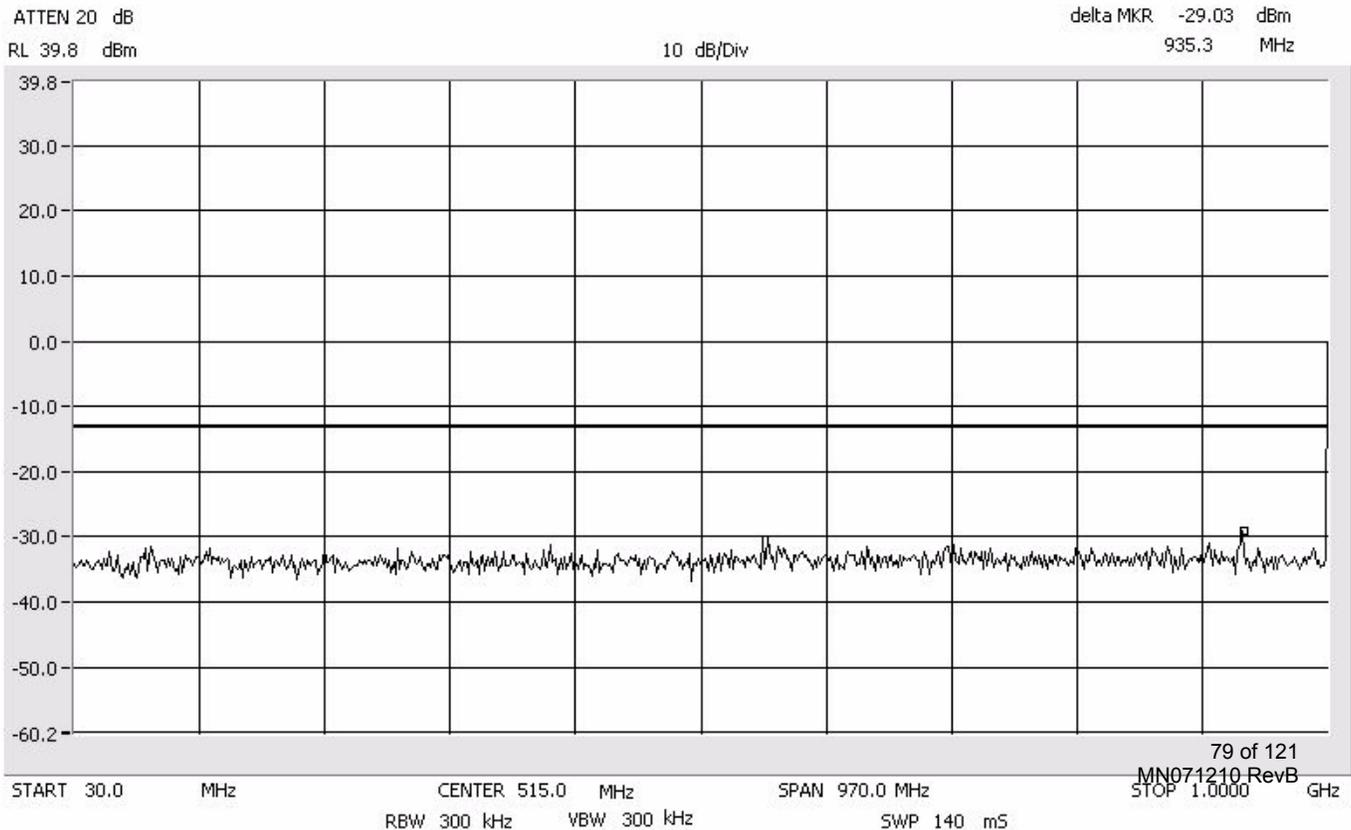

CDMA Lower Band

Intermodulation Close - Lower PCS 1900 MHz


Span: 1 GHz to 20 GHz
RBW/VBW: 1 MHz

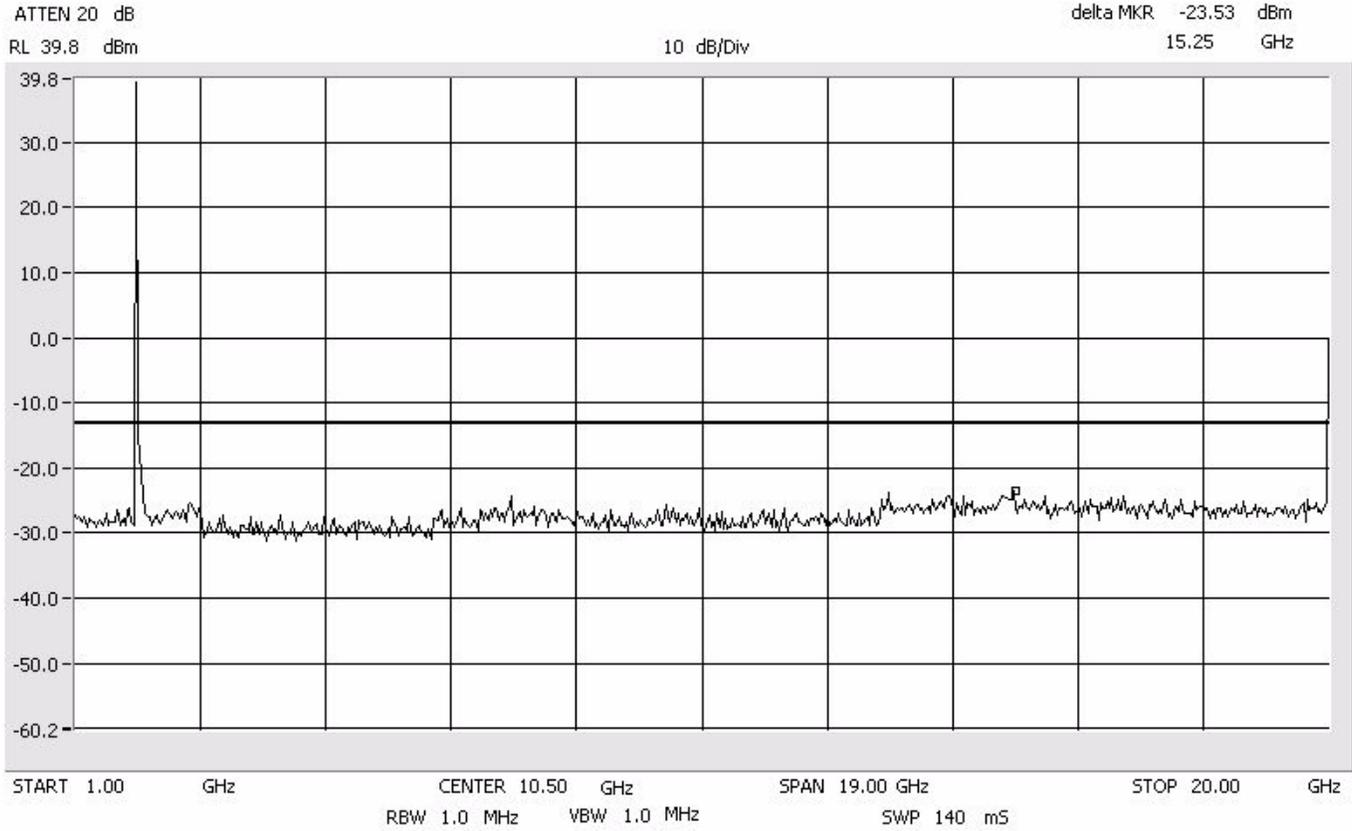

CDMA Lower Band

Intermodulation Close - Upper PCS 1900 MHz


Center: 1947.5 MHz
Span: 40 MHz
RBW/VBW: 100 kHz

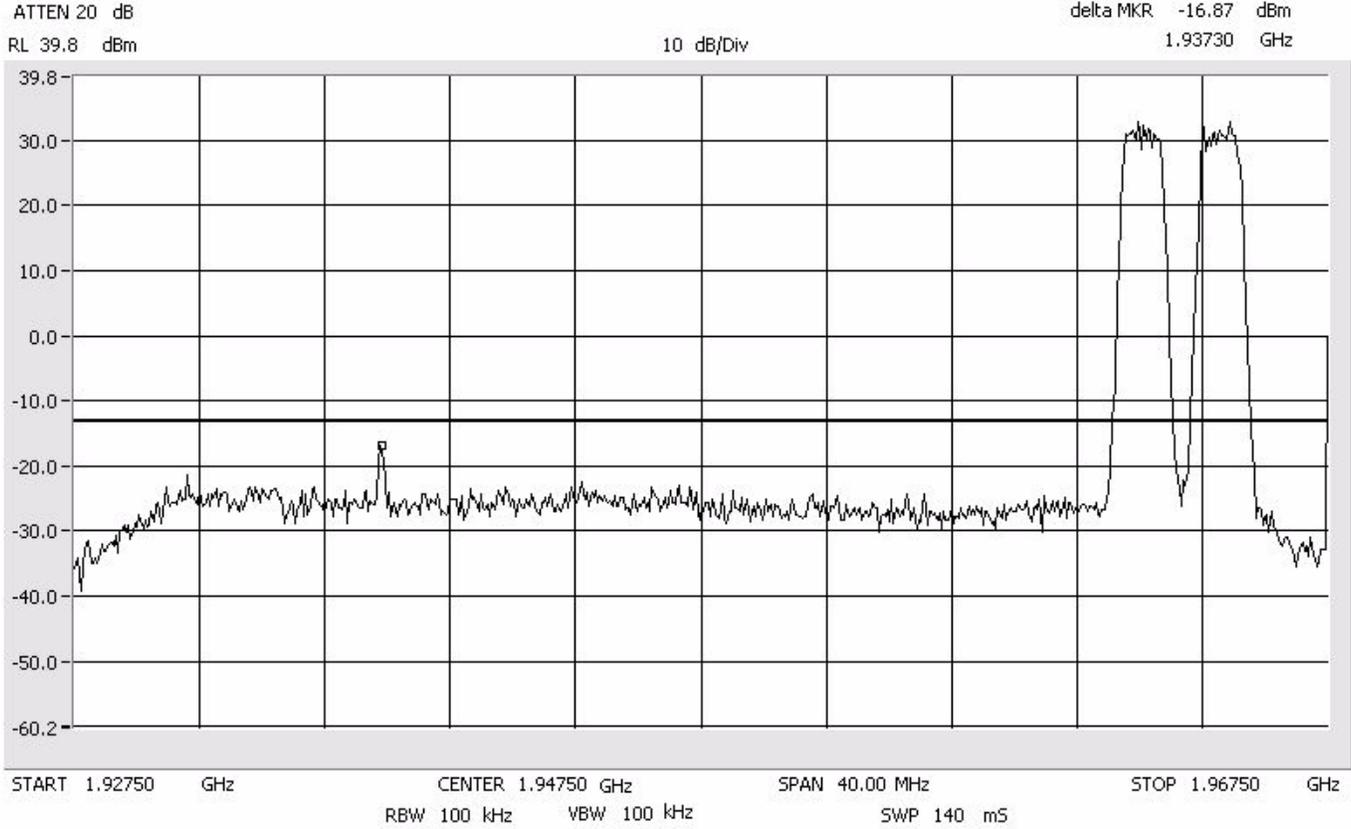

CDMA Lower Band

Intermodulation Close - Upper PCS 1900 MHz


Span: 30 MHz to 1 GHz
RBW/VBW: 300 kHz

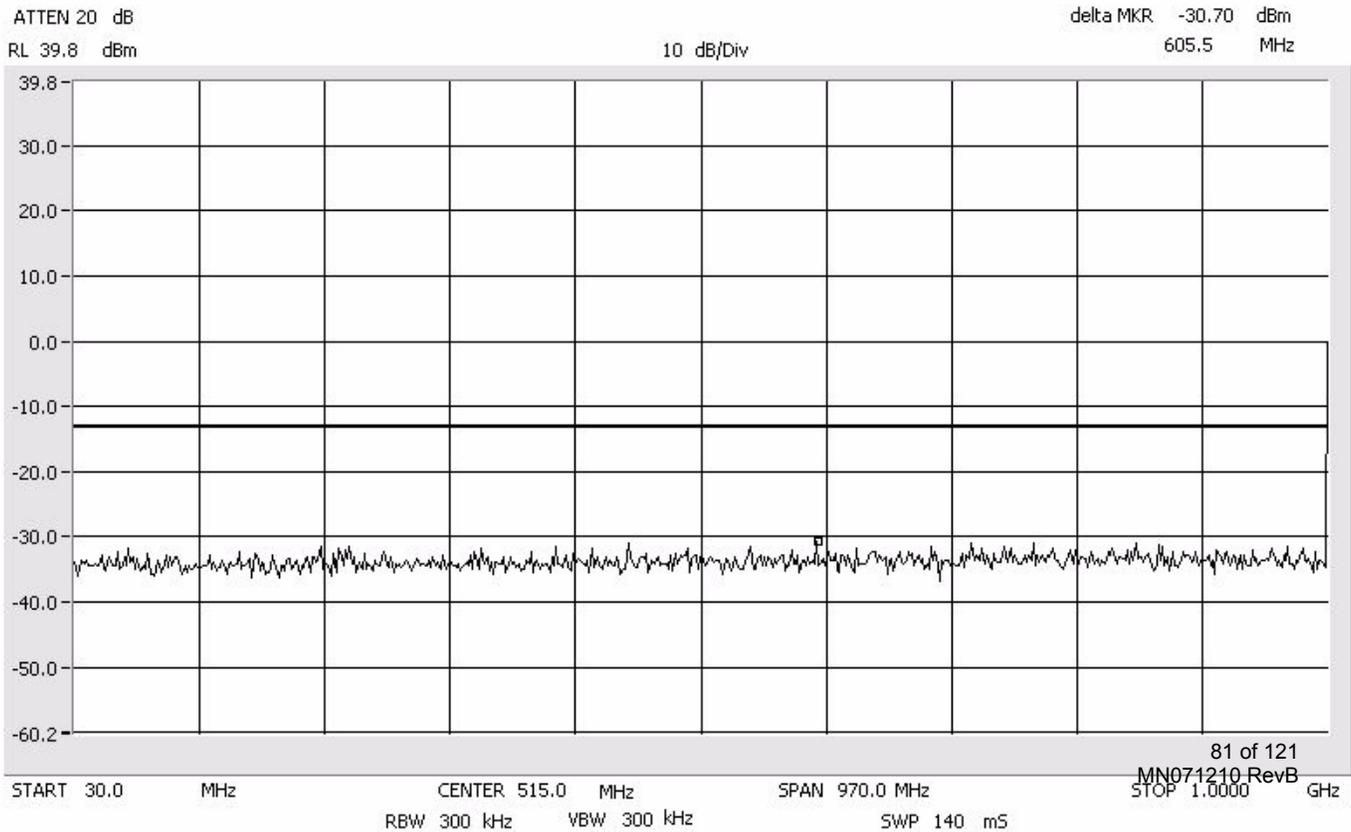

CDMA Lower Band

Intermodulation Close - Upper PCS 1900 MHz


Span: 1 GHz to 20 GHz
RBW/VBW: 1 MHz

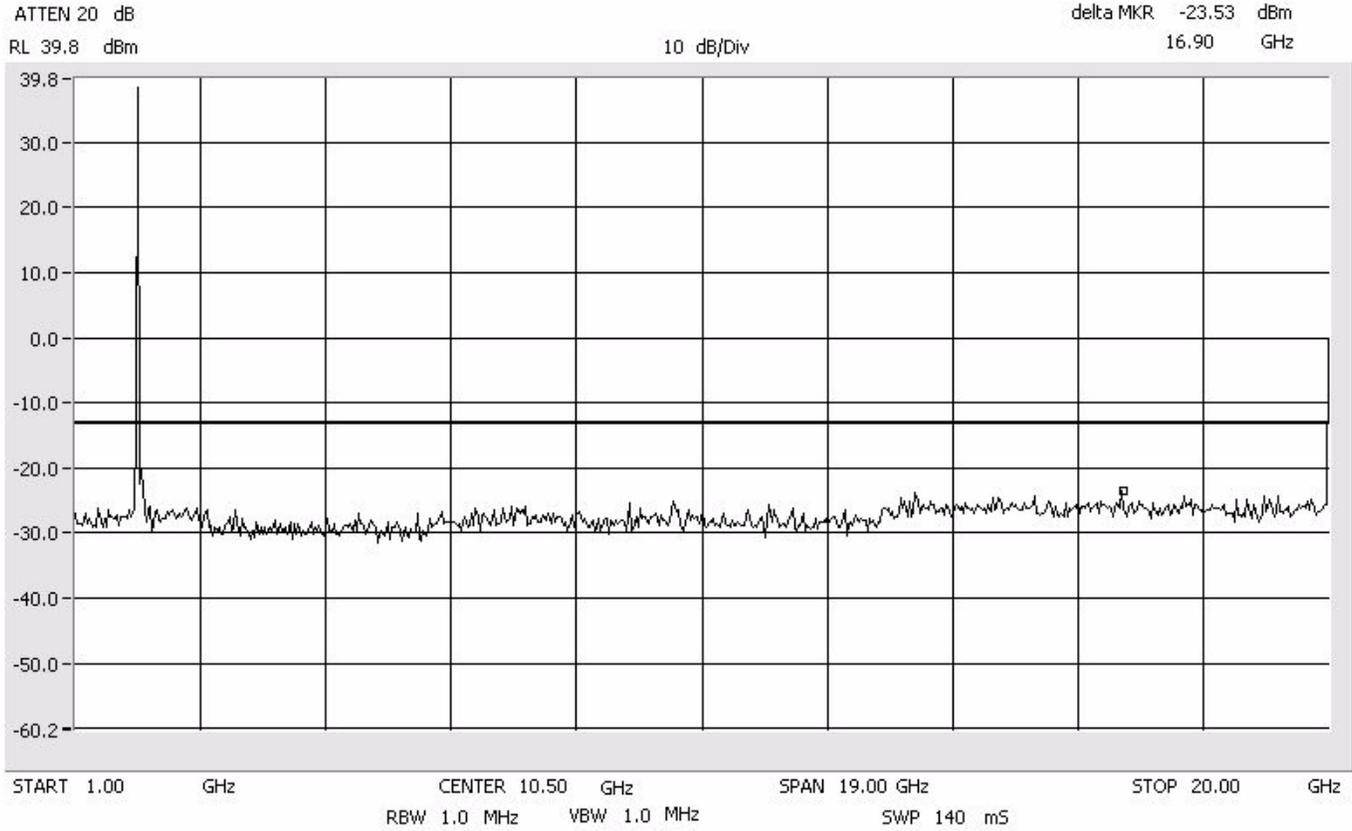

CDMA Lower Band

Intermodulation Apart PCS 1900 MHz


Center: 1947.5 MHz
Span: 100 MHz
RBW/VBW: 100 kHz

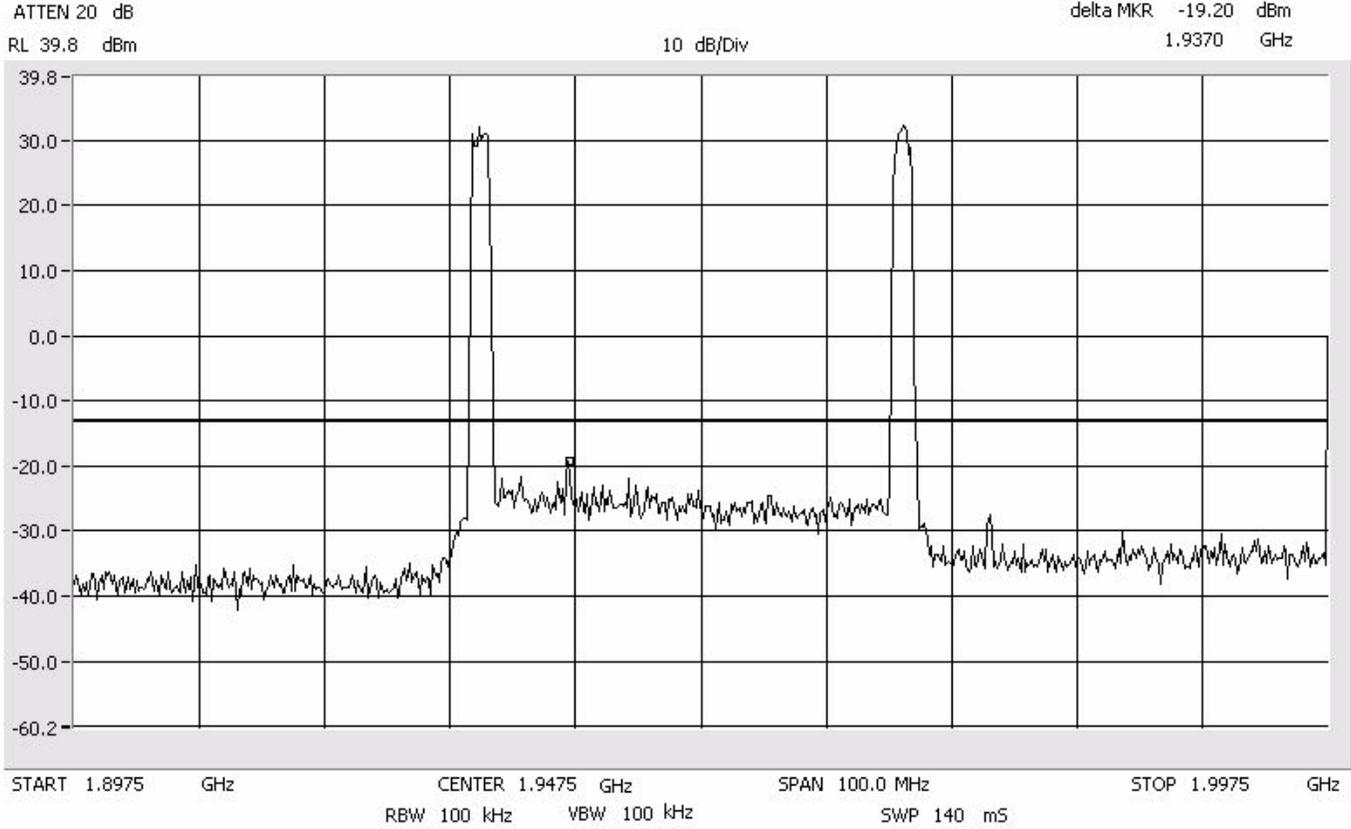


CDMA Lower Band

Intermodulation Apart PCS 1900 MHz

Span: 30 MHz to 1 GHz
RBW/VBW: 300 kHz

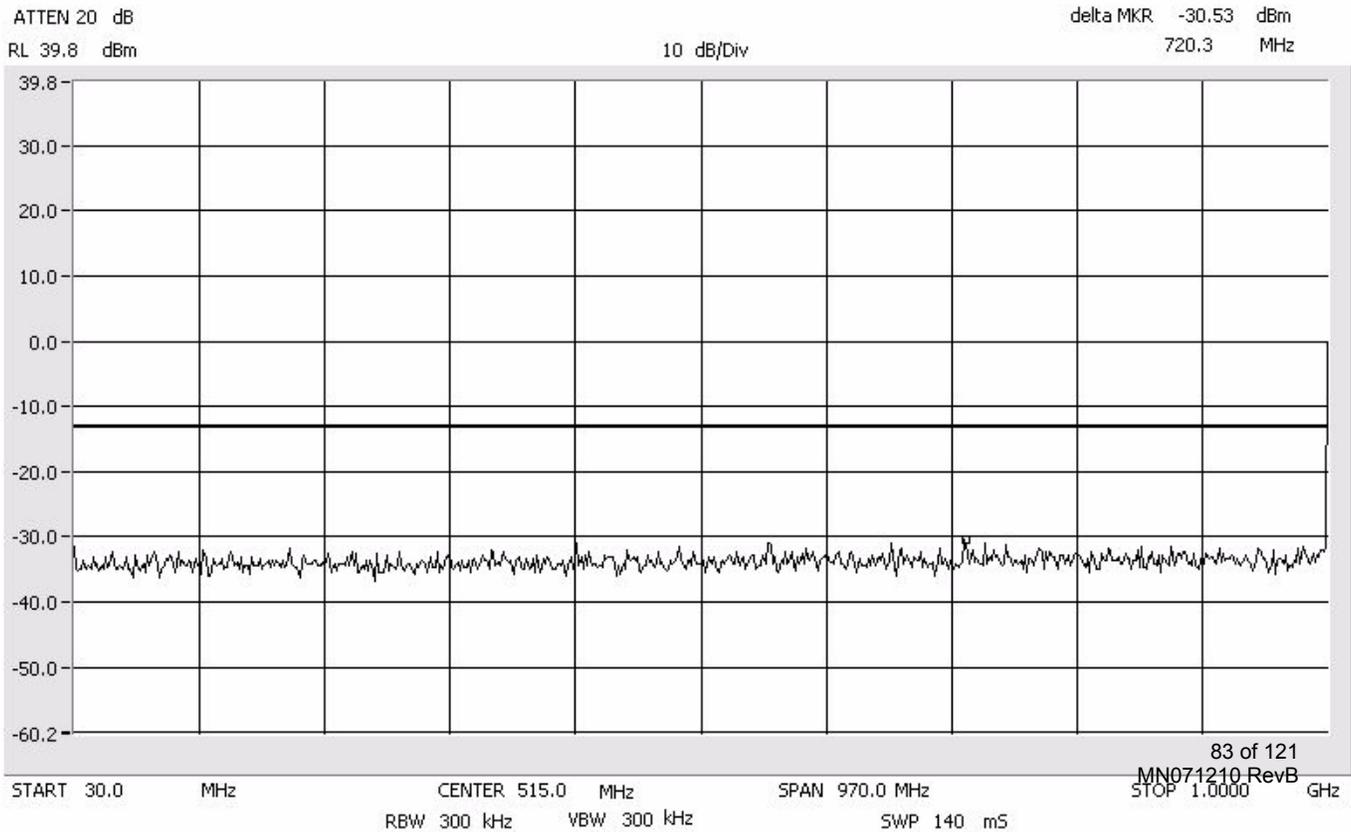


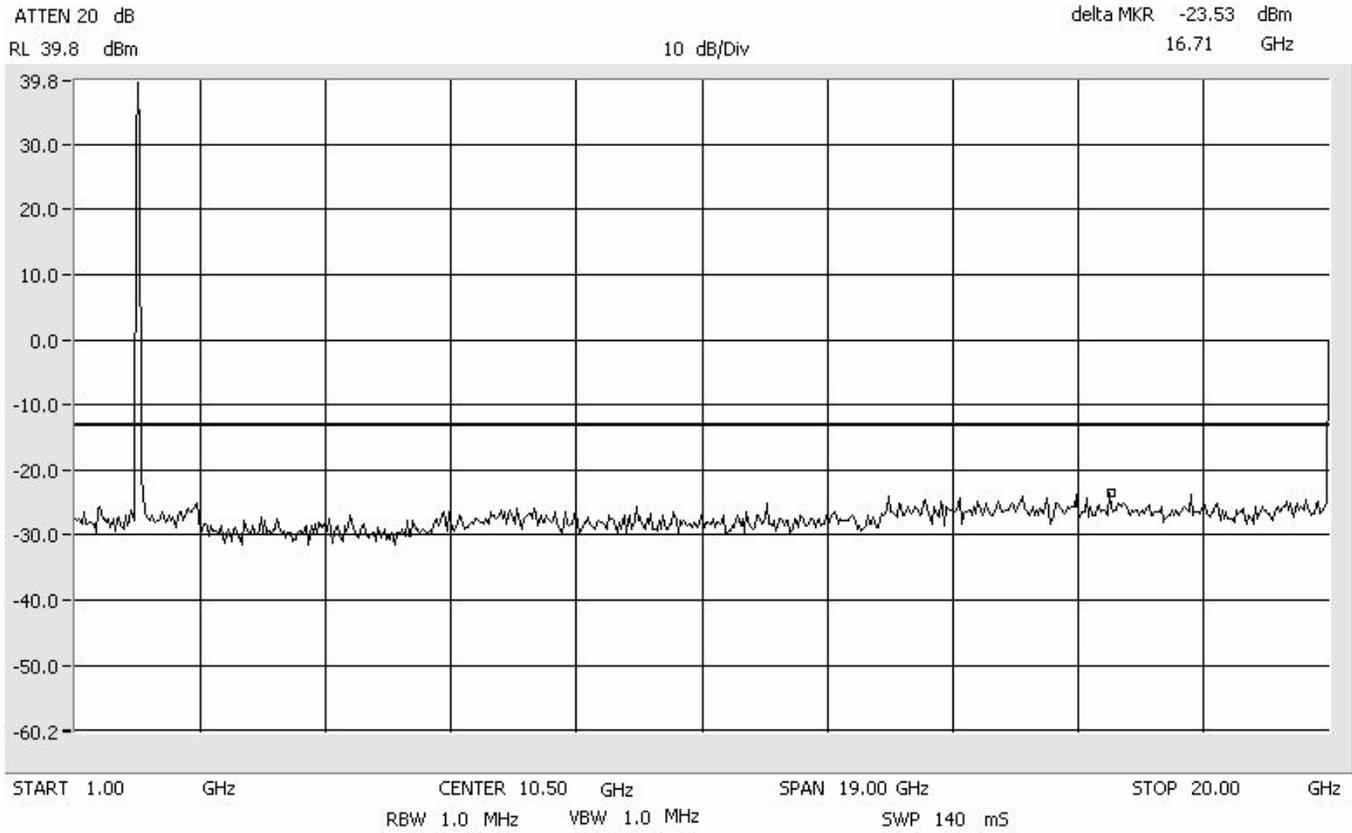

CDMA Upper Band

Intermodulation Close - Lower PCS 1900 MHz


Center: 1982.5 MHz
Span: 40 MHz
RBW/VBW: 100 kHz

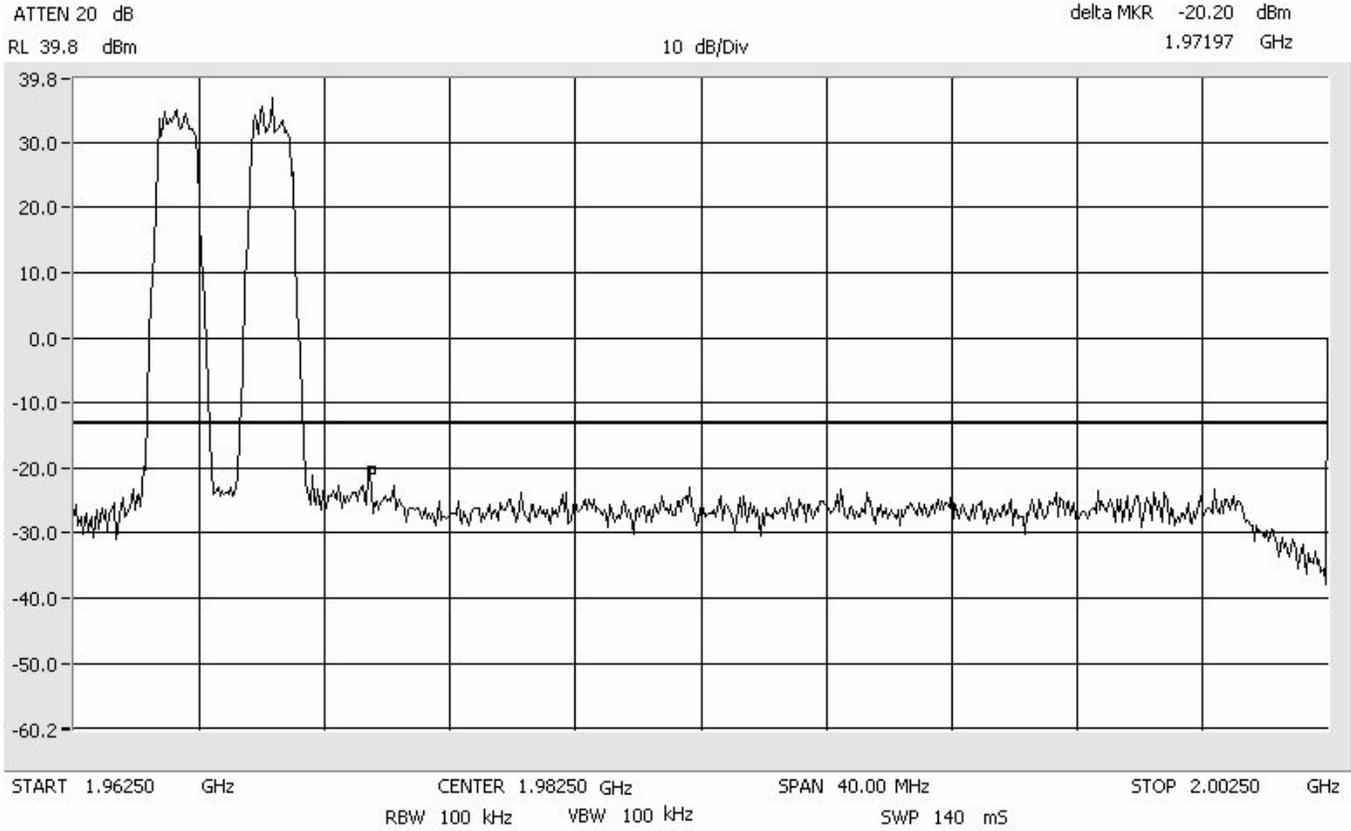

CDMA Upper Band

Intermodulation Close - Lower PCS 1900 MHz


Span: 30 MHz to 1 GHz
RBW/VBW: 300 kHz

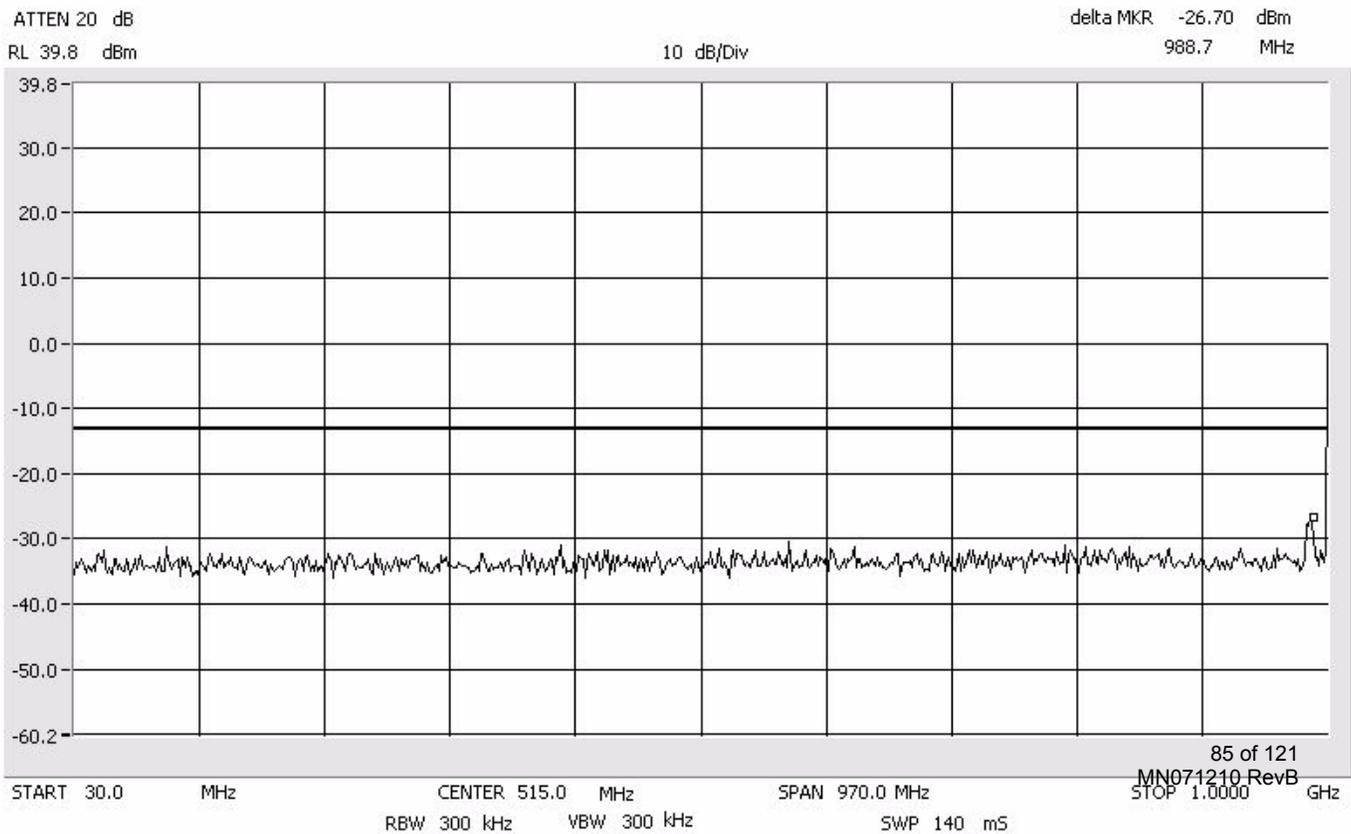

CDMA Upper Band

Intermodulation Close - Lower PCS 1900 MHz


Span: 1 GHz to 20 GHz
RBW/VBW: 1 MHz

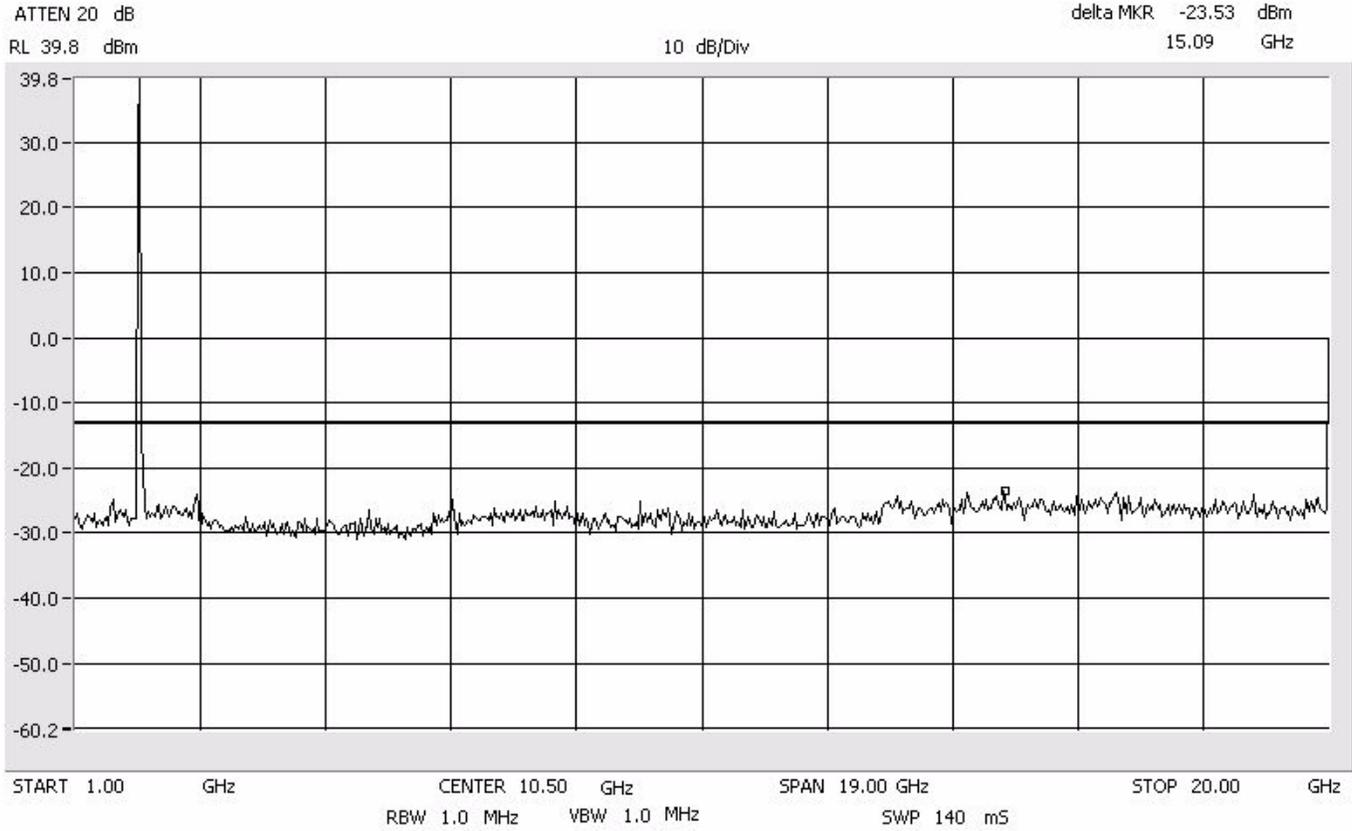

CDMA Upper Band

Intermodulation Close - Upper PCS 1900 MHz


Center: 1982.5 MHz
Span: 40 MHz
RBW/VBW: 100 kHz

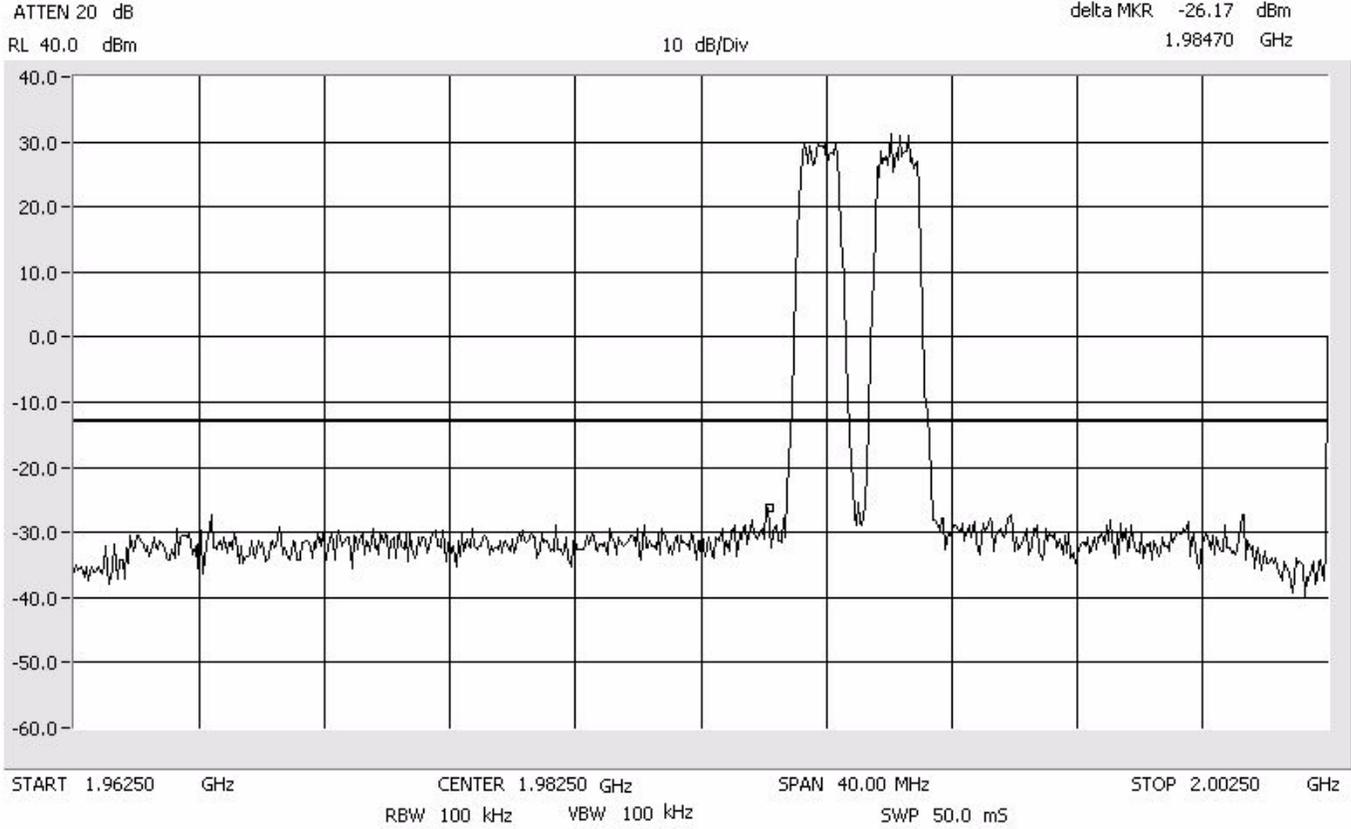

CDMA Upper Band

Intermodulation Close - Upper PCS 1900 MHz


Span: 30 MHz to 1 GHz
RBW/VBW: 300 kHz

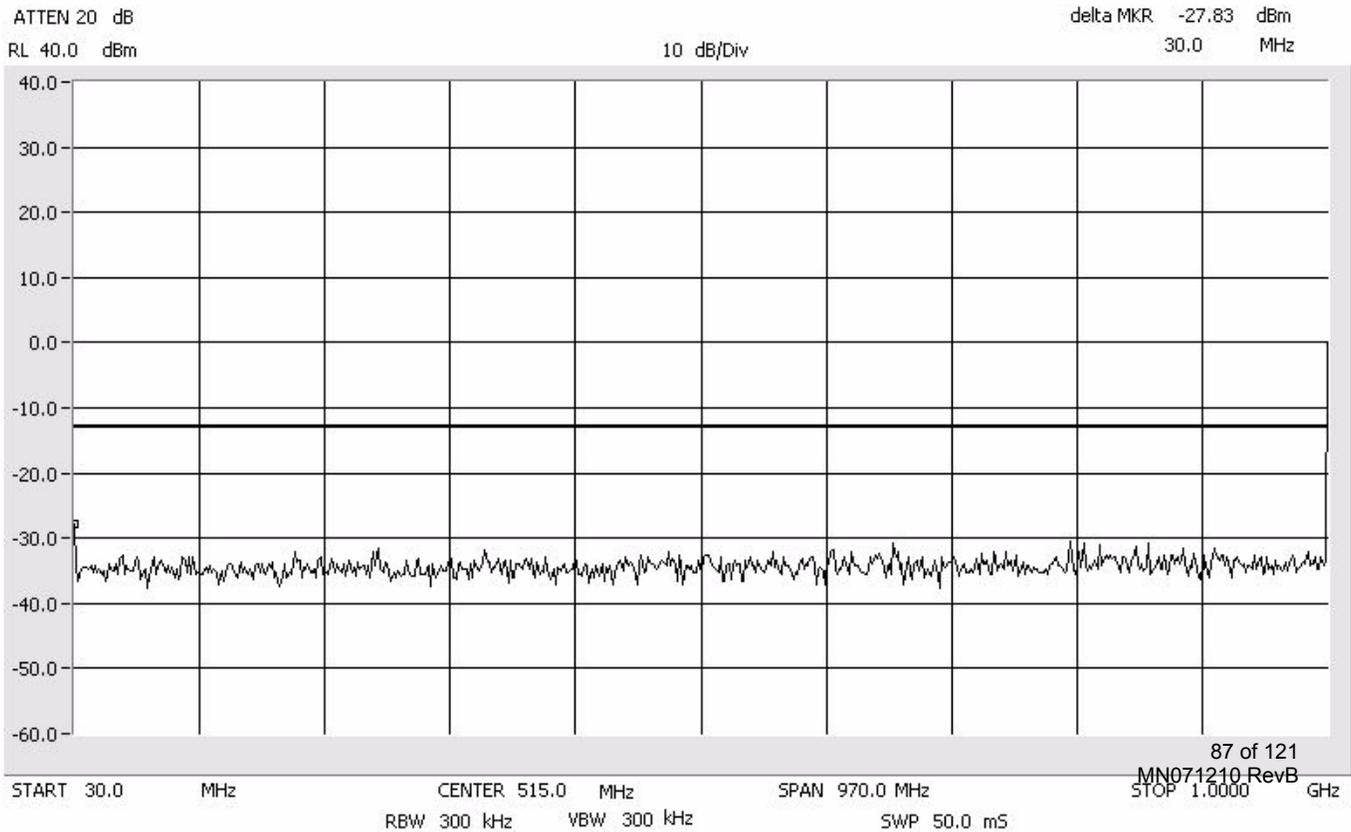

CDMA Upper Band

Intermodulation Close - Upper PCS 1900 MHz


Span: 1 GHz to 20 GHz
RBW/VBW: 1 MHz

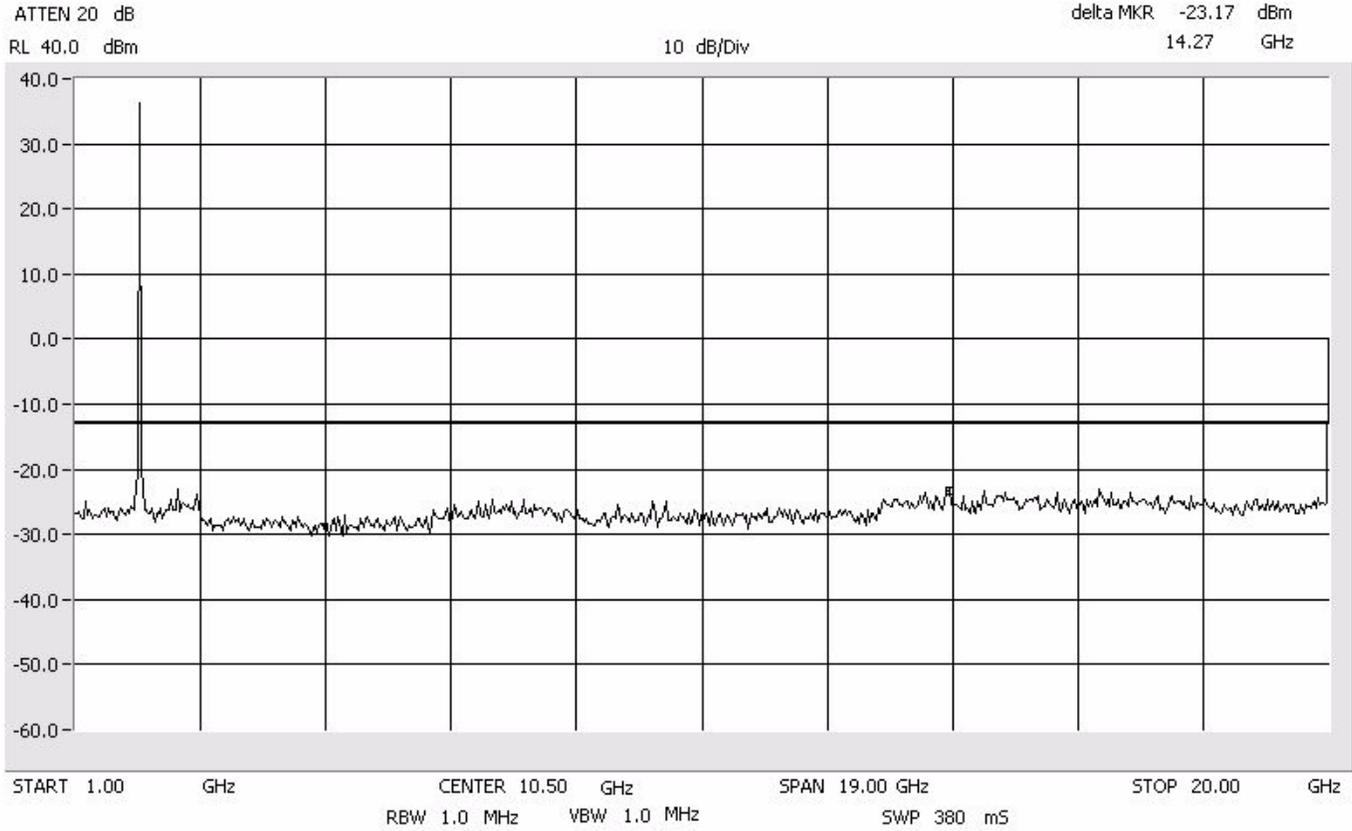

**CDMA
Upper Band**

**Intermodulation
Apart
PCS 1900 MHz**


Center: 1982.5 MHz
Span: 100 MHz
RBW/VBW: 100 kHz

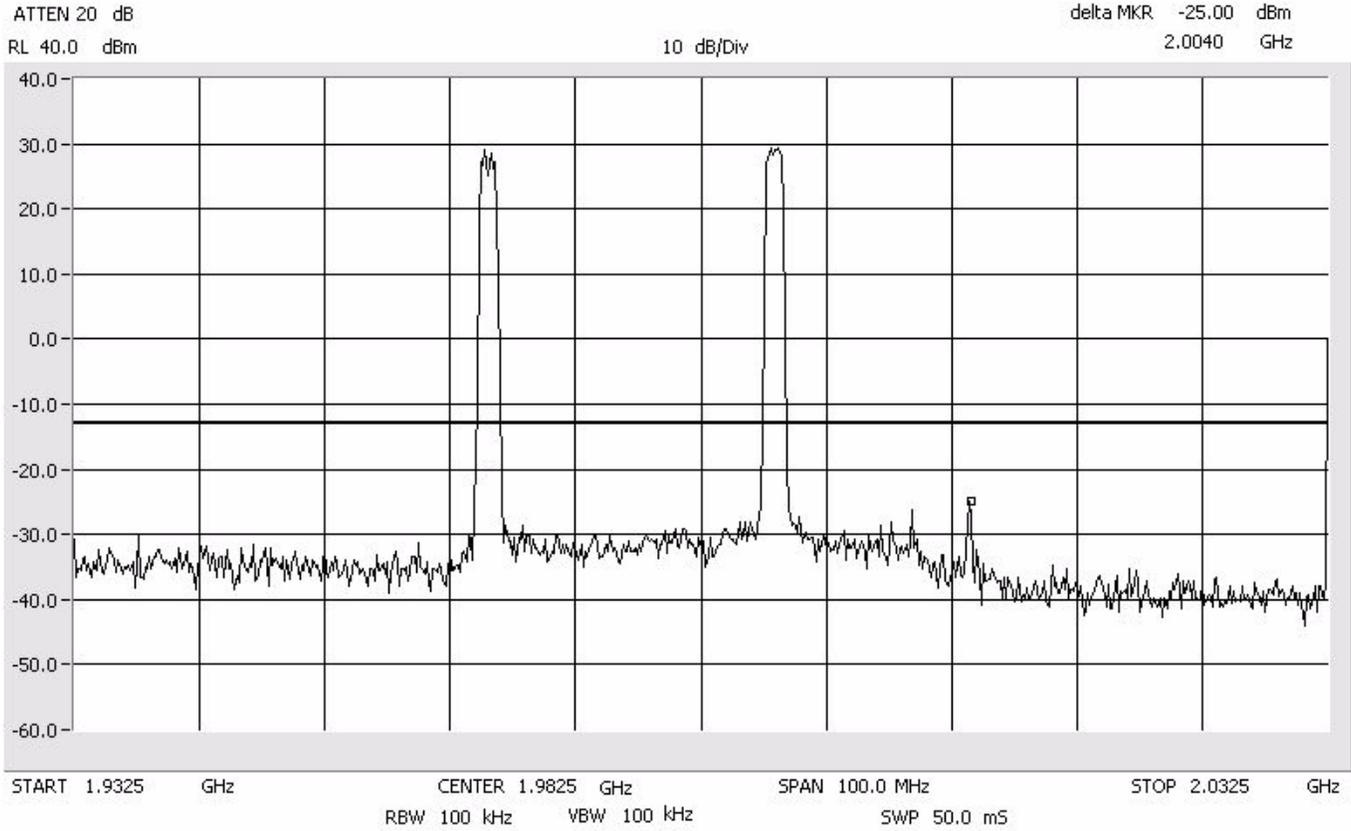

**CDMA
Upper Band**

**Intermodulation
Apart
PCS 1900 MHz**


Span: 30 MHz to 1 GHz
RBW/VBW: 300 kHz

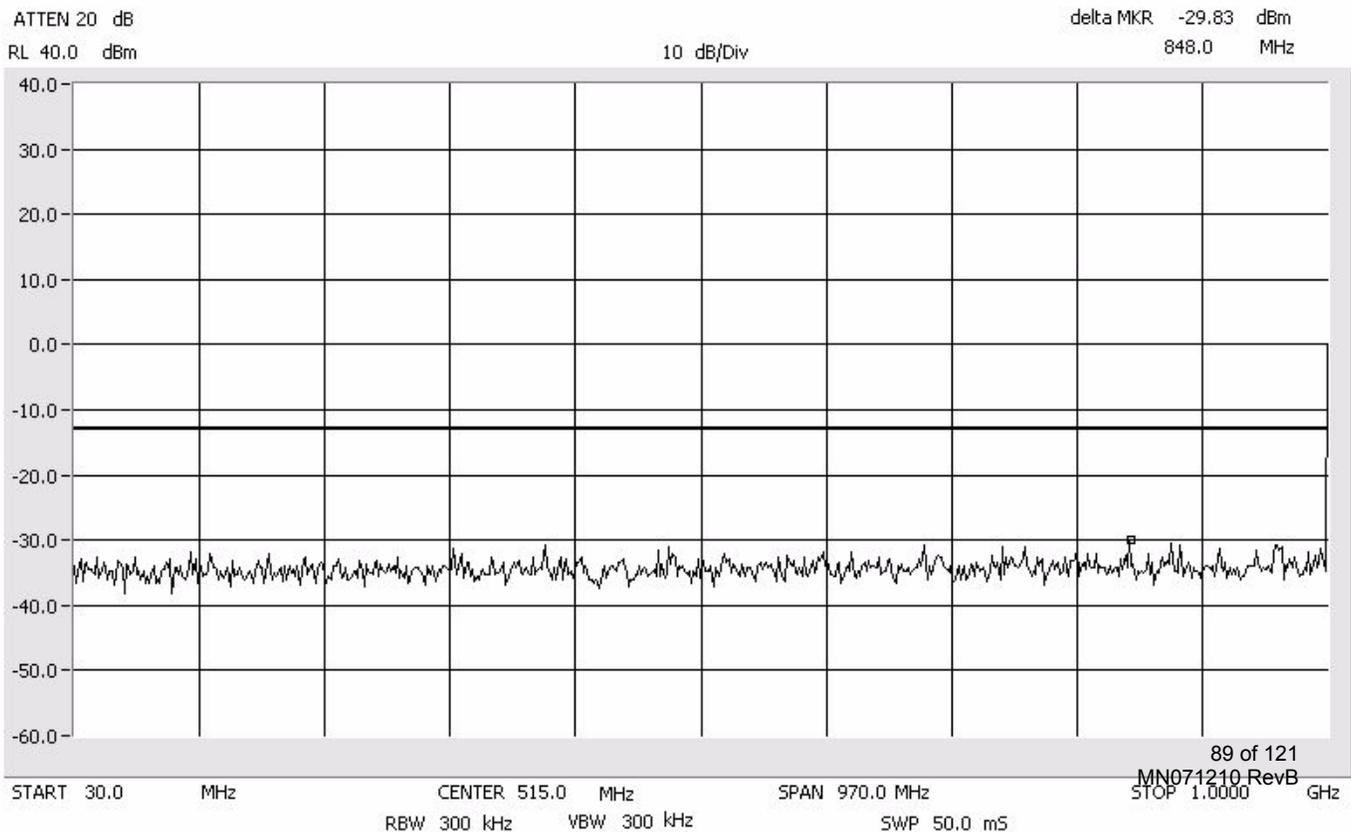

CDMA Upper Band

Intermodulation Apart PCS 1900 MHz

Span: 1 GHz to 20 GHz
RBW/VBW: 1 MHz

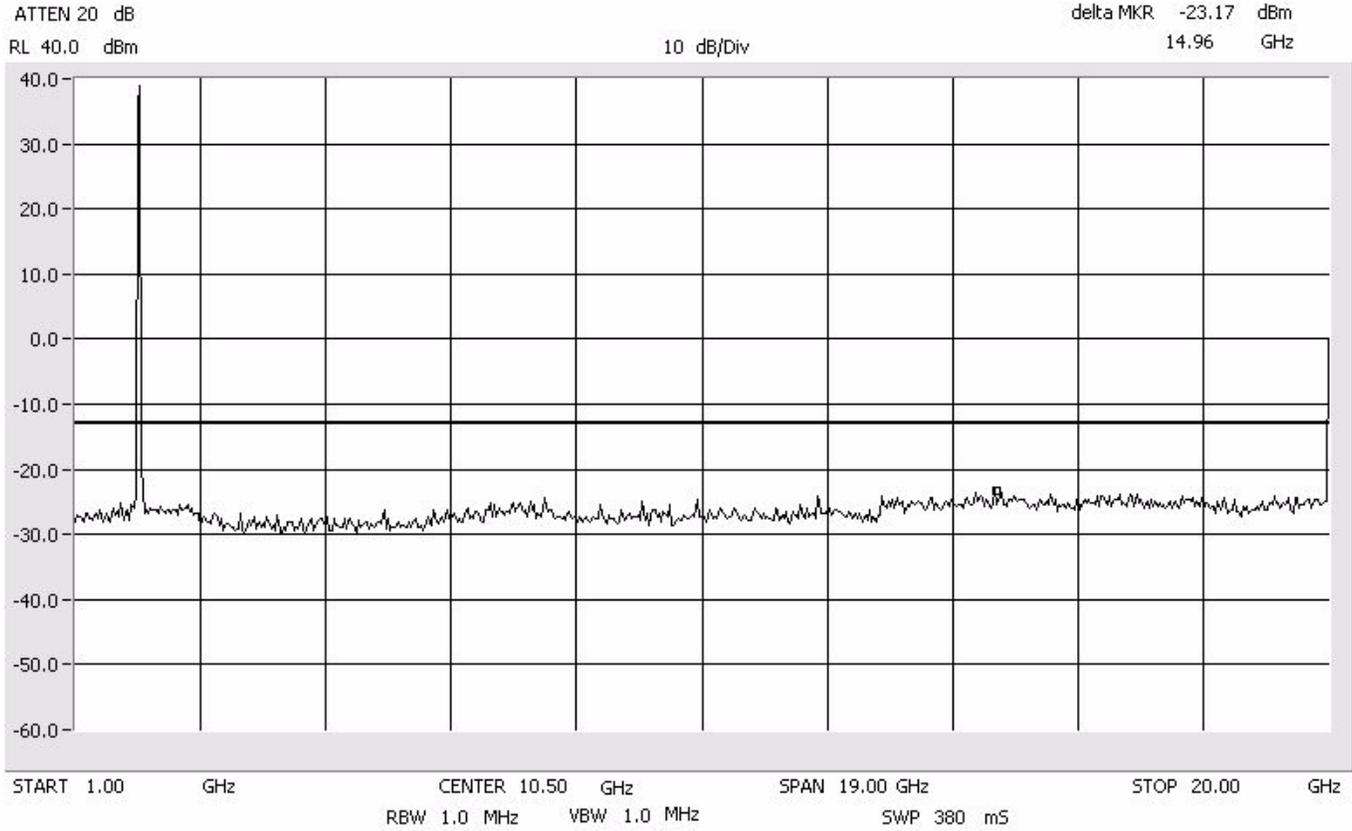

Occupied Bandwidth Modulation Test for ADC Inc
FlexWave™ URH - PCS
Model Number FWU-84000002110RU

[Back](#)

An input/output Occupied Bandwidth test was done with modulation types: TDMA, GSM, EDGE, CDMA, EVDO, and W-CDMA. The purpose was to determine the amount of distortion added to different types of modulation schemes by the EUT. The following plots show input signals vs. output signals.


The resolution bandwidth is reduced to 1% of the estimated emission bandwidth and the video bandwidth is set to 3 times the resolution bandwidth. The markers are moved to the -20 dB points (from the previously established center frequency level) on either side of center frequency.

Results:

Pass (see plots)


Occupied Bandwidth TDMA Signal In

Span: 50 kHz
RBW: 1 kHz
VBW: 3 kHz

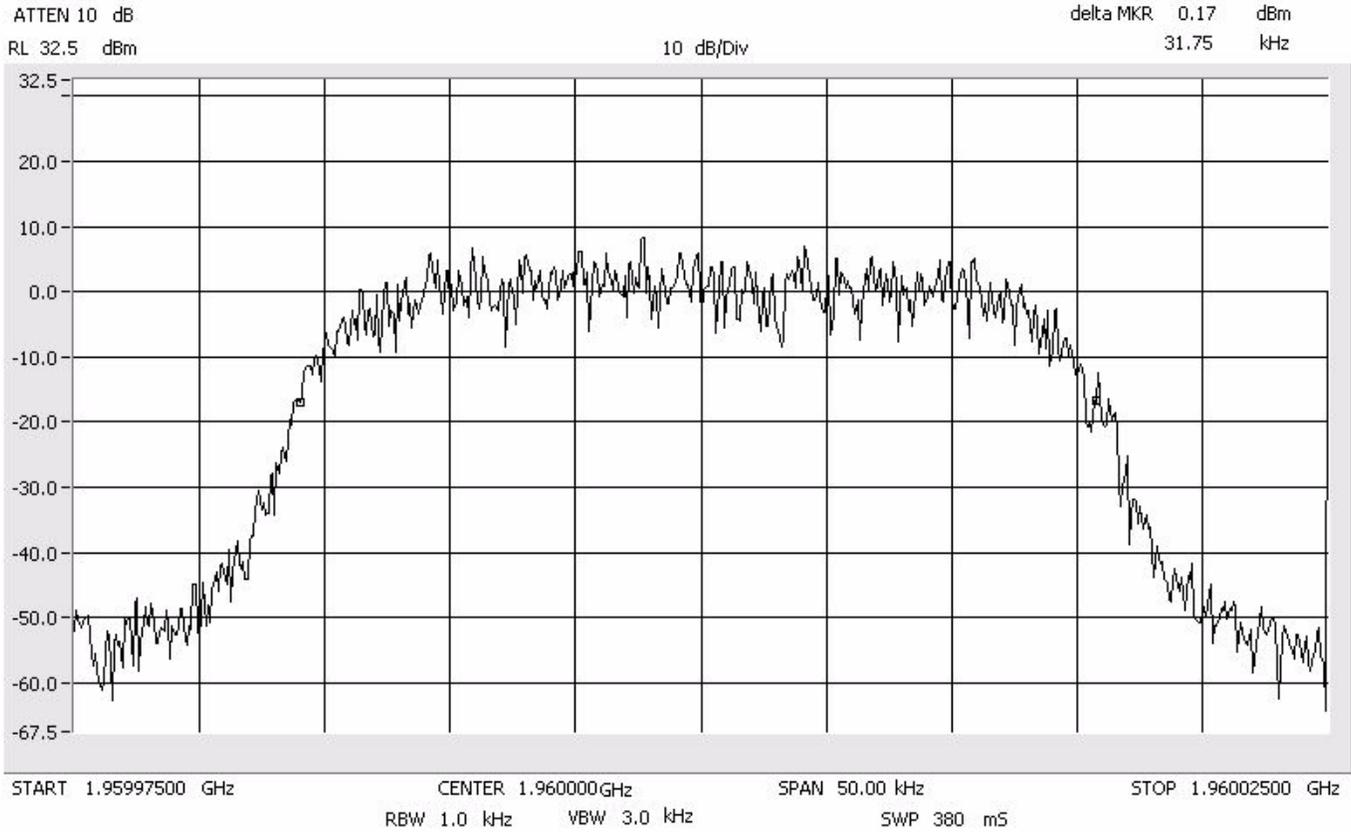


Occupied Bandwidth TDMA Signal Out

Span: 50 kHz
RBW: 1 kHz
VBW: 3 kHz

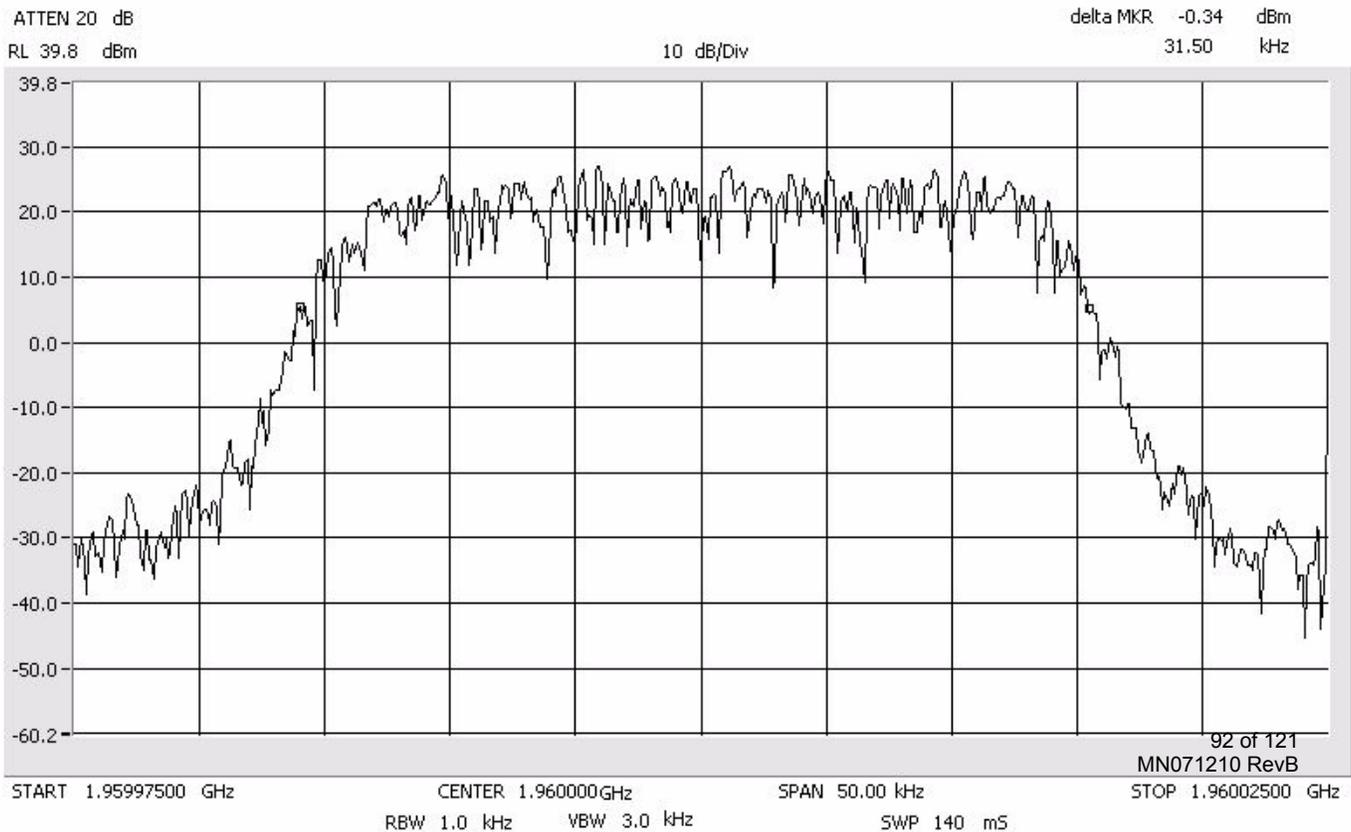


Occupied Bandwidth GSM Signal In

Span: 350 kHz
RBW: 3 kHz
VBW: 10 kHz

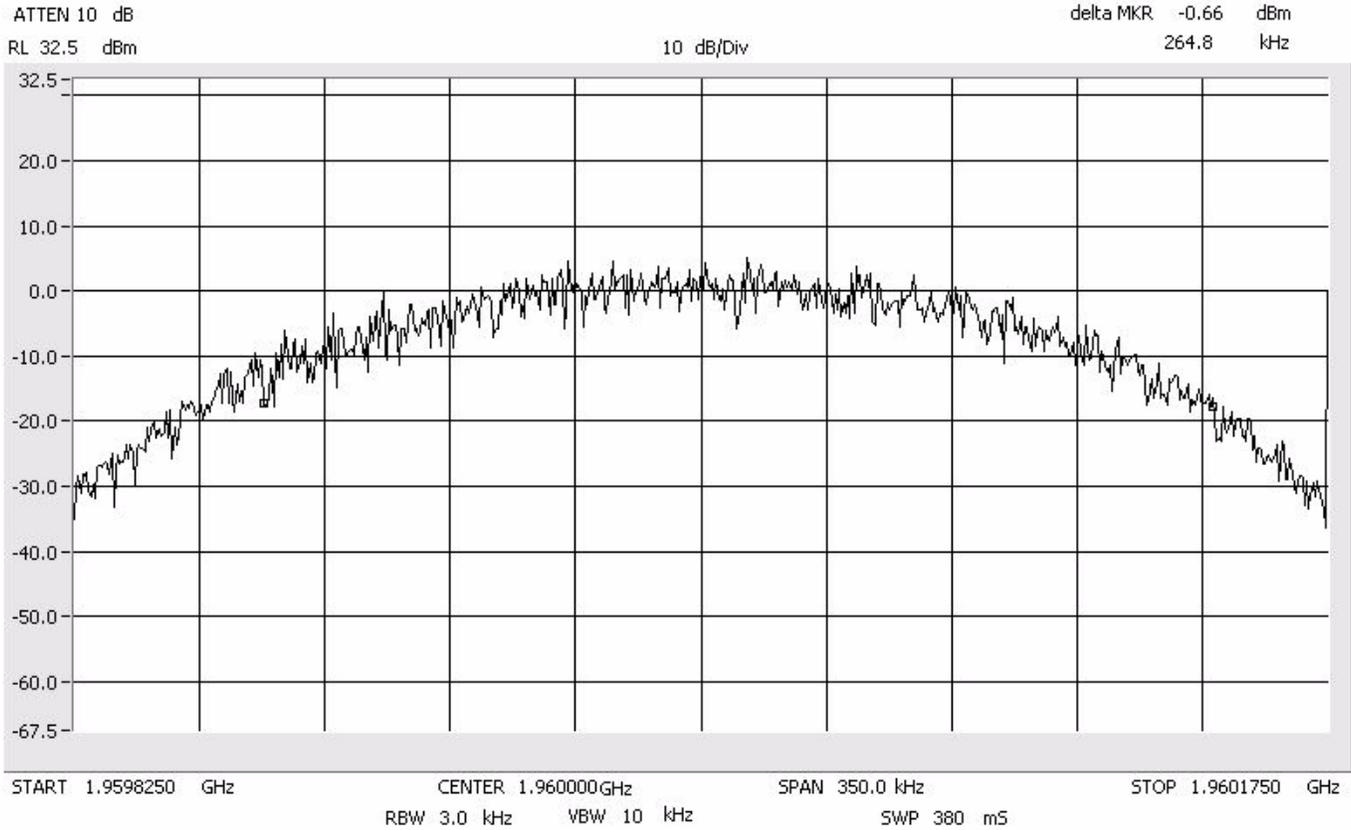

Occupied Bandwidth GSM Signal Out

Span: 350 kHz
RBW: 3 kHz
VBW: 10 kHz

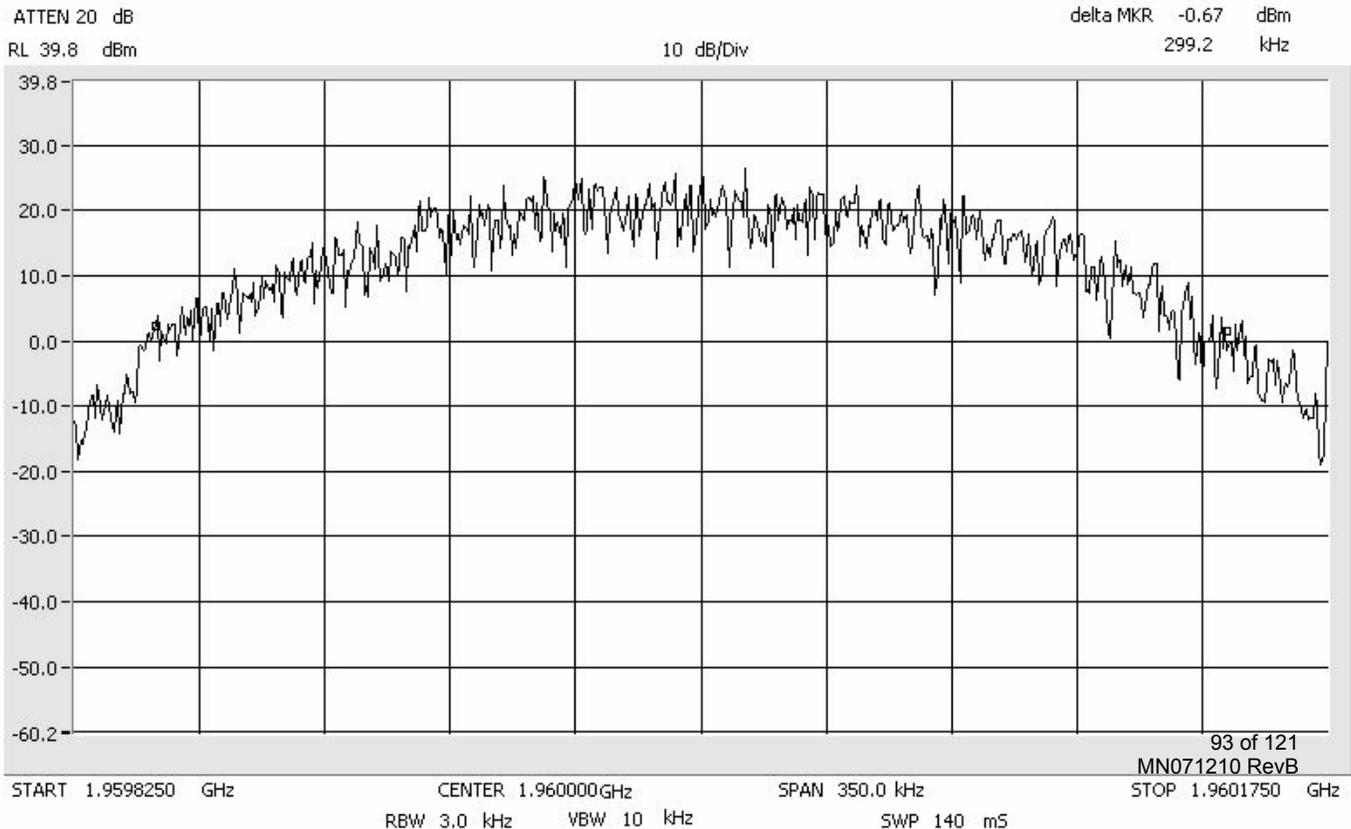


Occupied Bandwidth EDGE Signal In

Span: 350 kHz
RBW: 3 kHz
VBW: 10 kHz

ATTEN 10 dB
RL 32.5 dBm

delta MKR 0.83 dBm
260.8 kHz

10 dB/Div

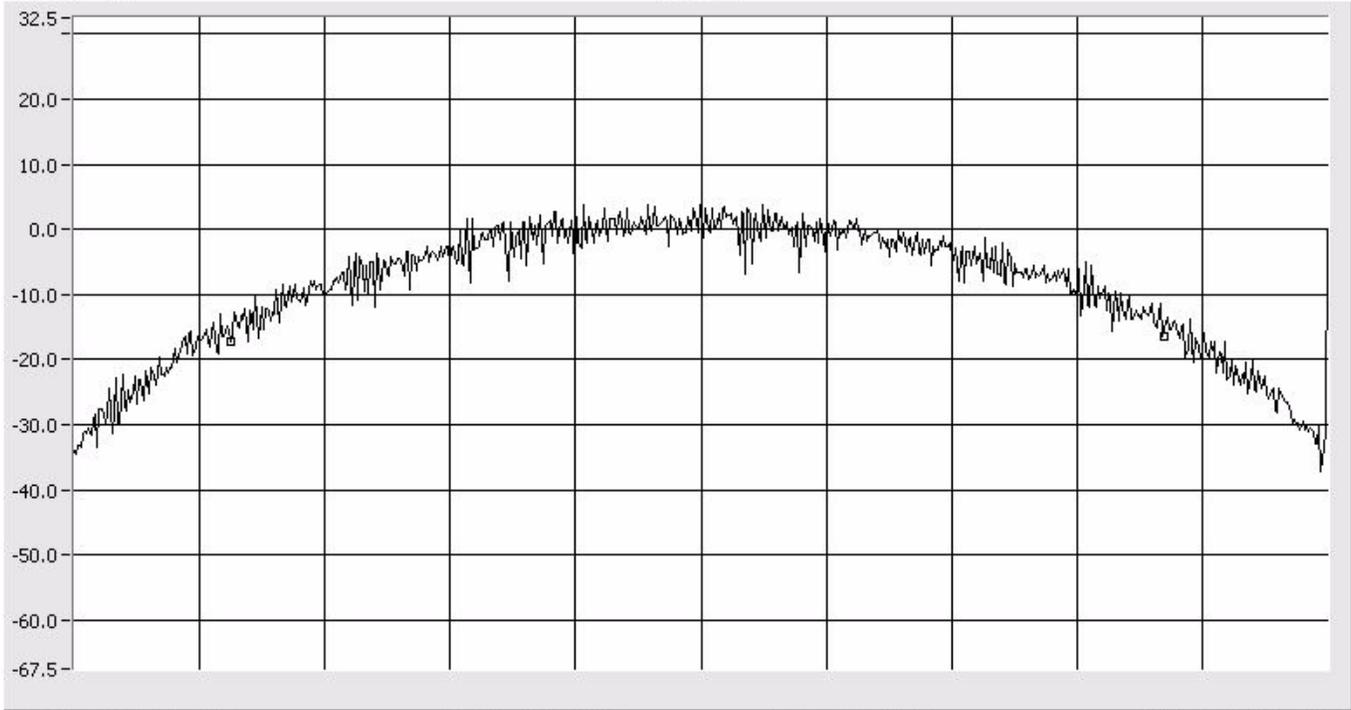

START 1.9598250 GHz CENTER 1.960000GHz SPAN 350.0 kHz STOP 1.9601750 GHz
RBW 3.0 kHz VBW 10 kHz SWP 380 mS


Occupied Bandwidth EDGE Signal Out

Span: 350 kHz
RBW: 3 kHz
VBW: 10 kHz

ATTEN 20 dB
RL 39.8 dBm

delta MKR 0.33 dBm
264.2 kHz

10 dB/Div

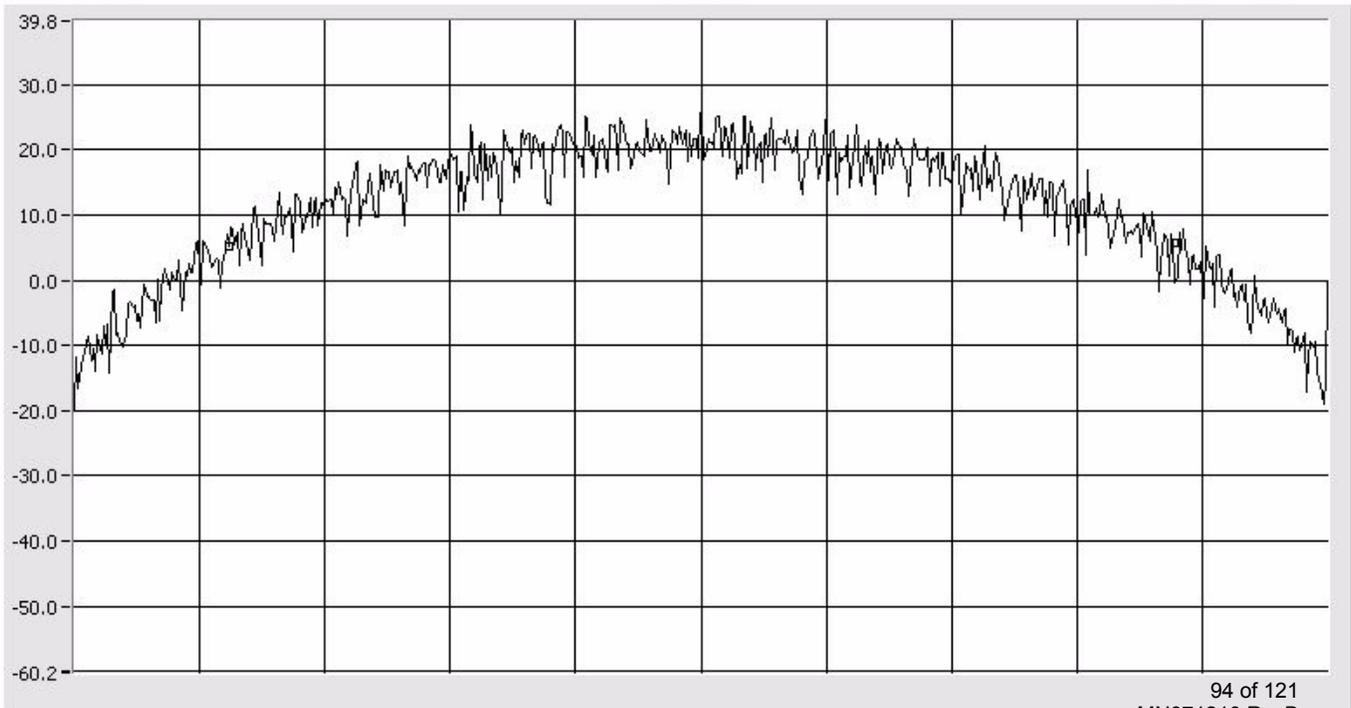

START 1.9598250 GHz CENTER 1.960000GHz SPAN 350.0 kHz STOP 1.9601750 GHz
RBW 3.0 kHz VBW 10 kHz SWP 140 mS


Occupied Bandwidth CDMA Signal In

Span: 1.4 MHz
RBW: 30 kHz
VBW: 100 kHz

ATTEN 10 dB
RL 32.5 dBm

delta MKR -0.33 dBm
1.377 MHz

10 dB/Div

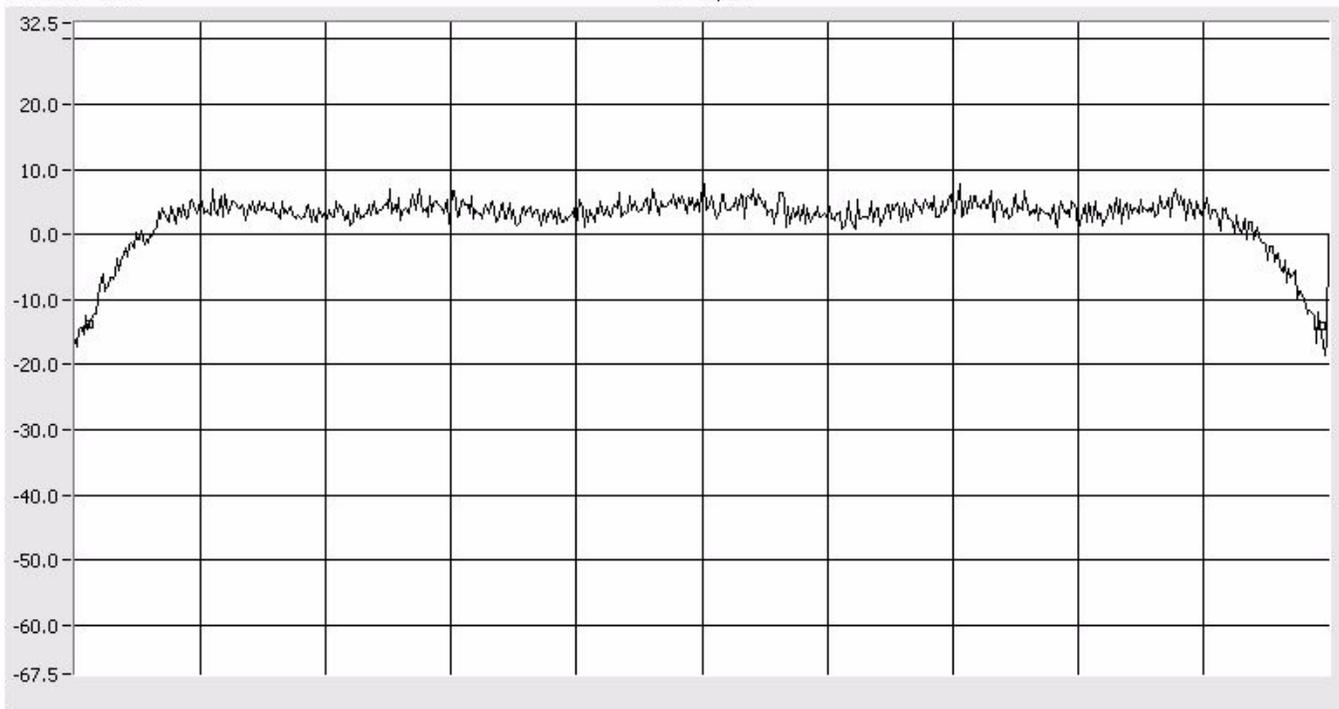

START 1.959300 GHz CENTER 1.960000GHz SPAN 1.400 MHz STOP 1.960700 GHz
RBW 30 kHz VBW 100 kHz SWP 380 mS


Occupied Bandwidth CDMA Signal Out

Span: 1.4 MHz
RBW: 30 kHz
VBW: 100 kHz

ATTEN 20 dB
RL 39.8 dBm

delta MKR -0.50 dBm
1.356 MHz


10 dB/Div

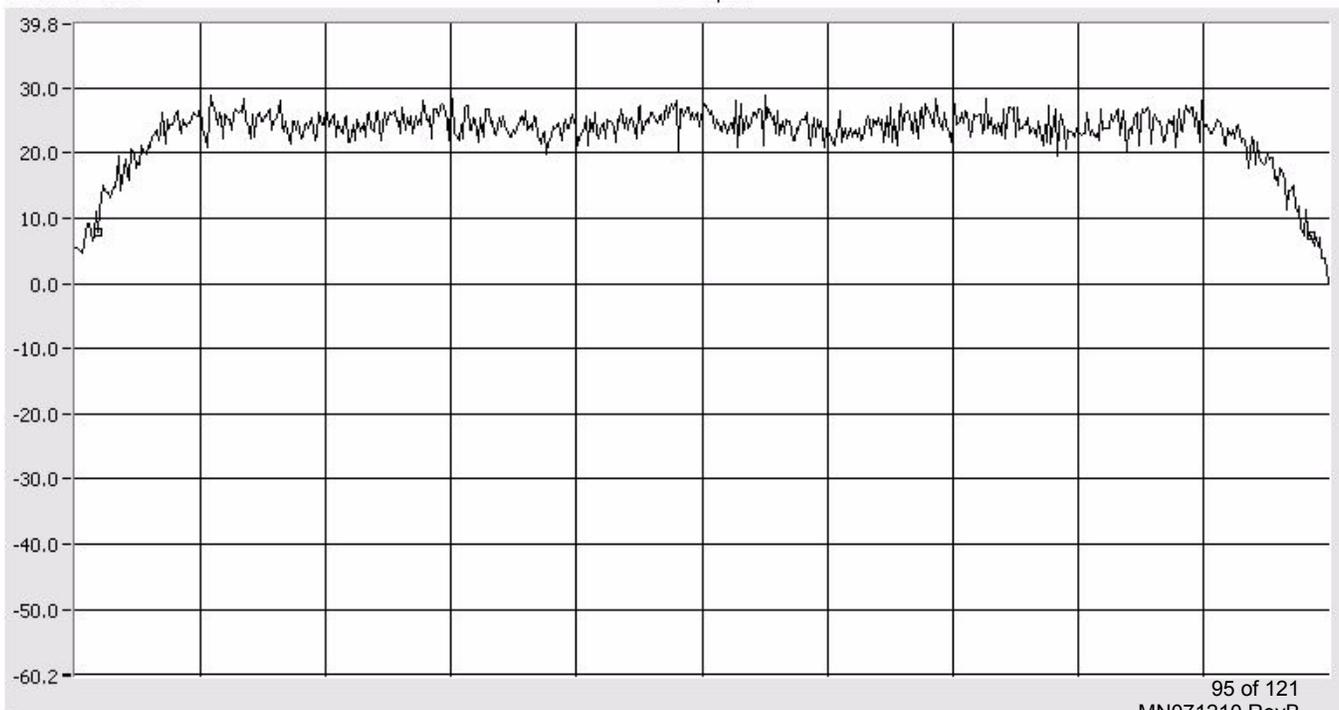

START 1.959300 GHz CENTER 1.960000GHz SPAN 1.400 MHz STOP 1.960700 GHz
RBW 30 kHz VBW 100 kHz SWP 140 mS


Occupied Bandwidth EVDO Signal In

Span: 1.4 MHz
RBW: 30 kHz
VBW: 100 kHz

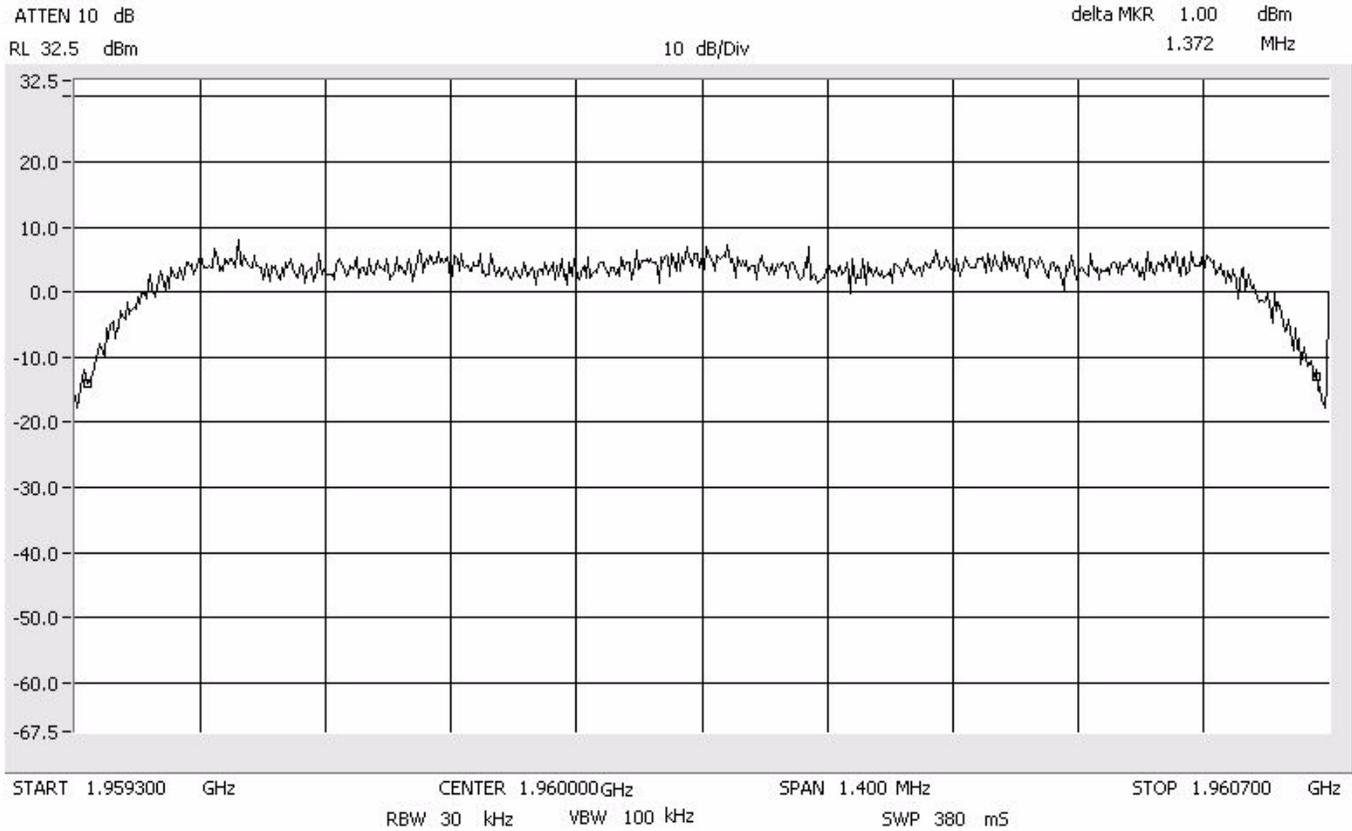


Occupied Bandwidth EVDO Signal Out

Span: 1.4 MHz
RBW: 30 kHz
VBW: 100 kHz

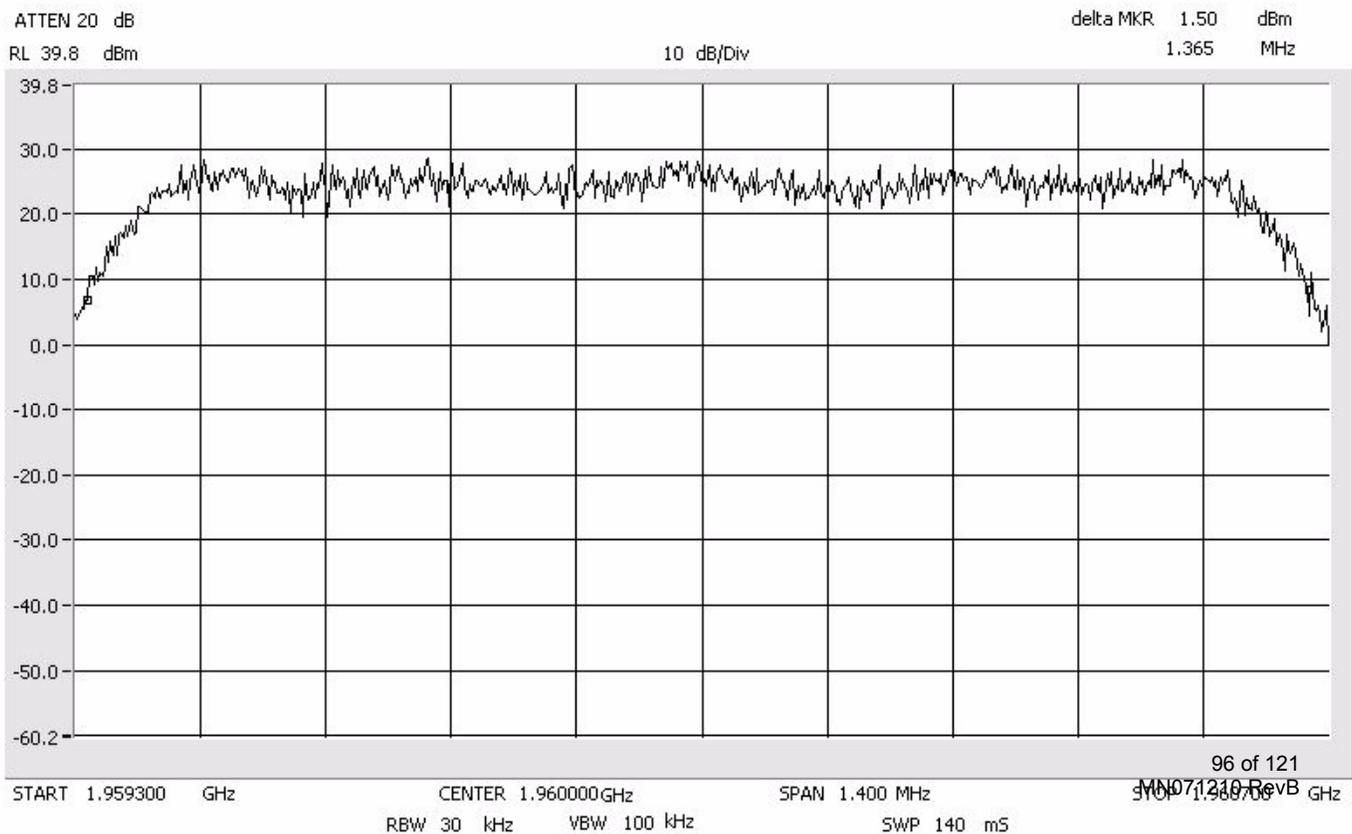


Occupied Bandwidth W-CDMA Signal In

Span: 4.8 MHz
RBW: 30 kHz
VBW: 100 kHz

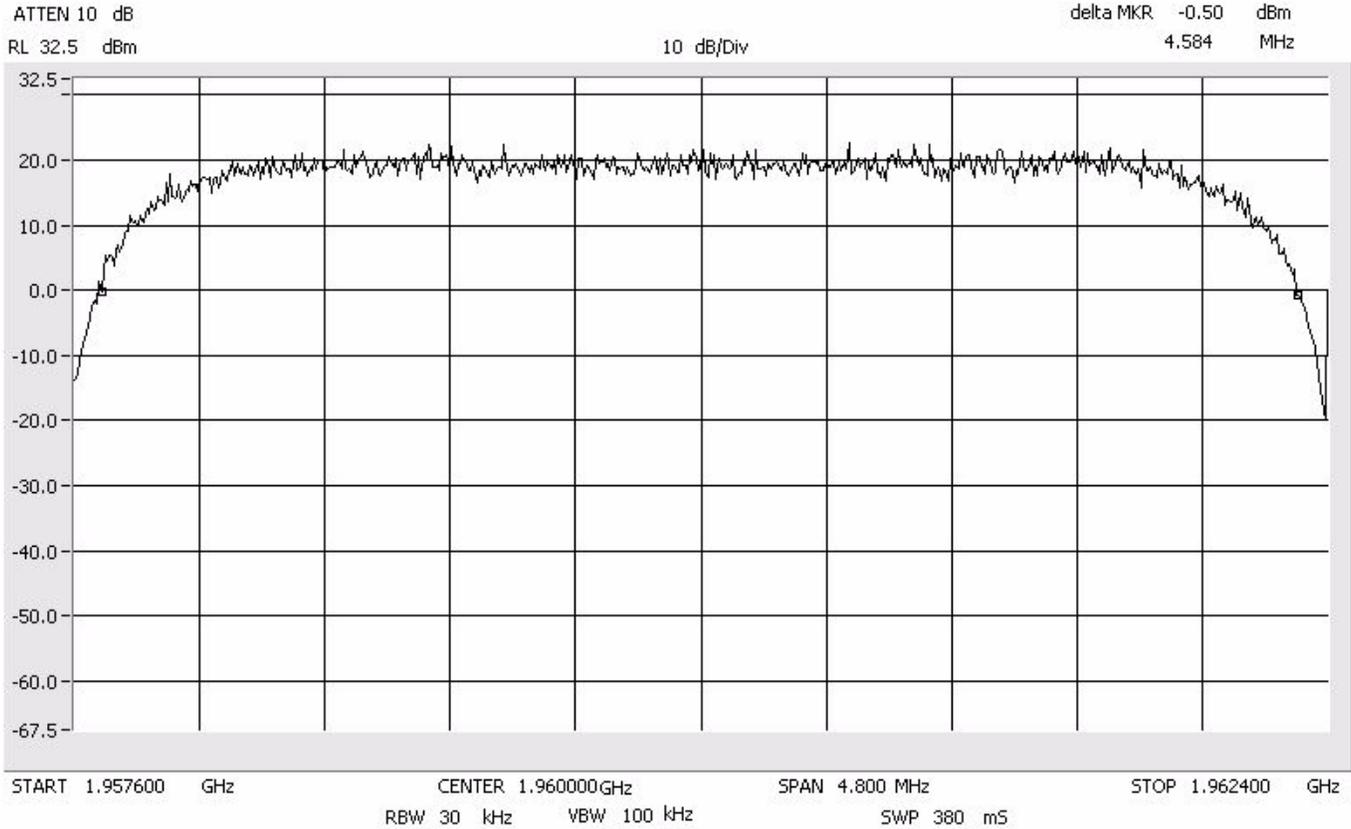

Occupied Bandwidth W-CDMA Signal Out

Span: 4.8 MHz
RBW: 30 kHz
VBW: 100 kHz

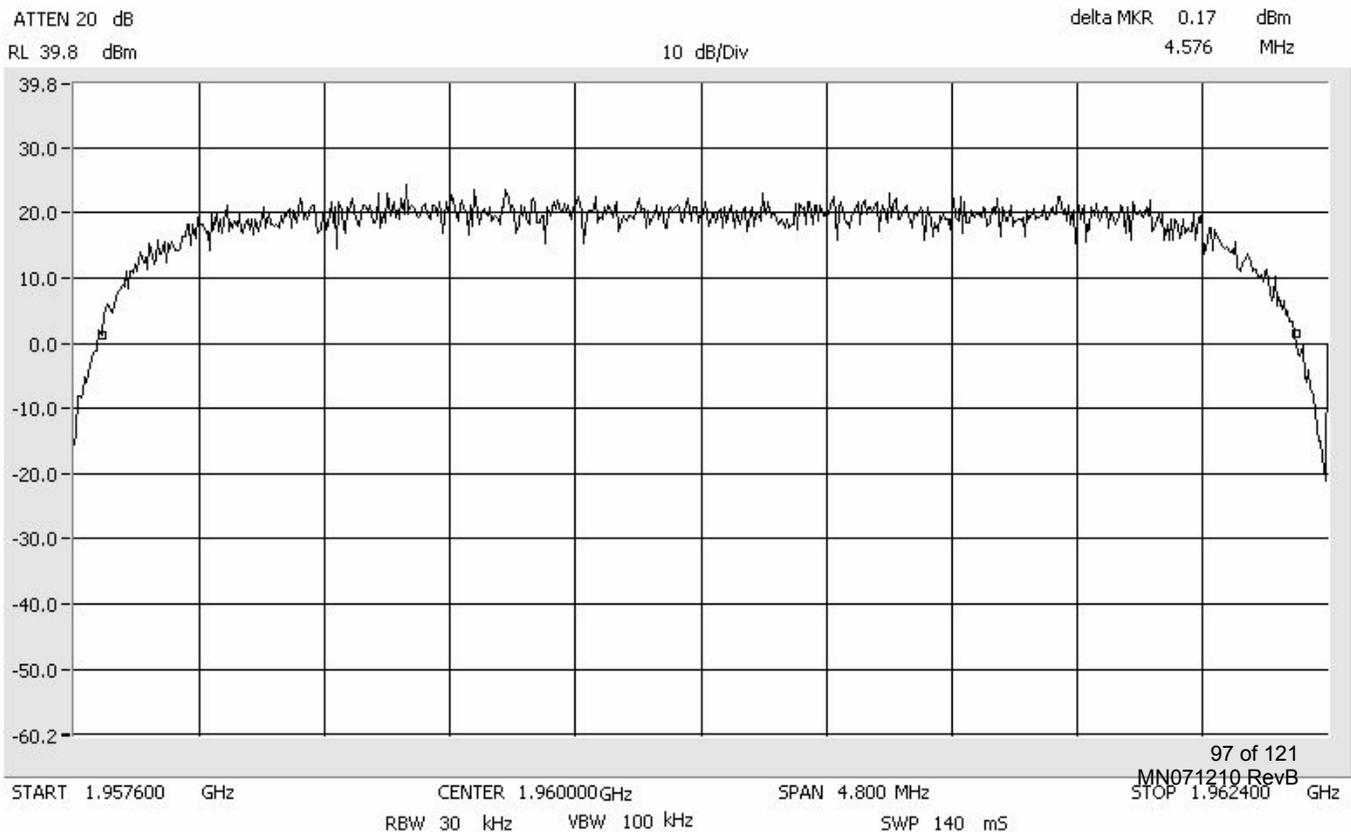

**Frequency Tolerance Test for ADC Inc
FlexWave™ URH - PCS
Model Number FWU-84000002110RU**

[Back](#)

EUT PCS (1900 MHz)

HOST	REMOTE			
Input Voltage	Input Voltage	Carrier Frequency	Measured Frequency	Meets Requirements?
21 VDC	100 VAC	1930.200 MHz	1930.200 MHz	Yes
48 VDC	170 VAC	1930.200 MHz	1930.200 MHz	Yes
60 VDC	240 VAC	1930.200 MHz	1930.200 MHz	Yes
21 VDC	100 VAC	1965.000 MHz	1965.000 MHz	Yes
48 VDC	170 VAC	1965.000 MHz	1965.000 MHz	Yes
60 VDC	240 VAC	1965.000 MHz	1965.000 MHz	Yes
21 VDC	100 VAC	1989.800 MHz	1989.800 MHz	Yes
48 VDC	170 VAC	1989.800 MHz	1989.800 MHz	Yes
60 VDC	240 VAC	1989.800 MHz	1989.800 MHz	Yes
Temperature		Carrier Frequency	Measured Frequency	Meets Requirements?
-30 Deg. C		1930.200 MHz	1930.200 MHz	Yes
-20 Deg. C		1930.200 MHz	1930.200 MHz	Yes
-10 Deg. C		1930.200 MHz	1930.200 MHz	Yes
0 Deg. C		1930.200 MHz	1930.200 MHz	Yes
10 Deg. C		1930.200 MHz	1930.200 MHz	Yes
20 Deg. C		1930.200 MHz	1930.200 MHz	Yes
30 Deg. C		1930.200 MHz	1930.200 MHz	Yes
40 Deg. C		1930.200 MHz	1930.200 MHz	Yes
50 Deg. C		1930.200 MHz	1930.200 MHz	Yes
-30 Deg. C		1965.000 MHz	1965.000 MHz	Yes
-20 Deg. C		1965.000 MHz	1965.000 MHz	Yes
-10 Deg. C		1965.000 MHz	1965.000 MHz	Yes
0 Deg. C		1965.000 MHz	1965.000 MHz	Yes
10 Deg. C		1965.000 MHz	1965.000 MHz	Yes
20 Deg. C		1965.000 MHz	1965.000 MHz	Yes
30 Deg. C		1965.000 MHz	1965.000 MHz	Yes
40 Deg. C		1965.000 MHz	1965.000 MHz	Yes
50 Deg. C		1965.000 MHz	1965.000 MHz	Yes
-30 Deg. C		1989.800 MHz	1989.800 MHz	Yes
-20 Deg. C		1989.800 MHz	1989.800 MHz	Yes
-10 Deg. C		1989.800 MHz	1989.800 MHz	Yes
0 Deg. C		1989.800 MHz	1989.800 MHz	Yes
10 Deg. C		1989.800 MHz	1989.800 MHz	Yes
20 Deg. C		1989.800 MHz	1989.800 MHz	Yes
30 Deg. C		1989.800 MHz	1989.800 MHz	Yes
40 Deg. C		1989.800 MHz	1989.800 MHz	Yes
50 Deg. C		1989.800 MHz	1989.800 MHz	Yes

7.0

APPENDIX B

Intertek Test Data

[Back to Test Data:](#)

[Back to Table of Contents:](#)

Test Engineer: Norman Shpilsher

Date: 3, 4 December, 2007

Test Engineer: Norman Shpilsher

Date: 7 January, 2008

Test Procedure:

Test measurements were made in accordance with ANSI C63.4-2003, Standard Methods of Measurement of Radio Noise Emissions from Low-Voltage Electrical and Electronics Equipment in the Range of 9 kHz to 40 GHz.

Test Site Location:

The test site is a 3 meter Semi-Anechoic Chamber, constructed by Panashield™ Inc. and located inside the building at 7250 Hudson Blvd. Suite 100, Oakdale, MN 55128.

Test Site Description:

The 3 meter Semi-Anechoic Chamber is constructed of Panabolt™ modular RF shielding and self-supported with structural steel designed for the local seismic zone rating. The chamber has the nominal size of 20' wide x 29' long x 18' high. All walls and ceiling of the chamber are treated with FFG-1000 Ferrite Grid absorber which was developed specifically to meet international requirements for EMC anechoic chambers for emissions and immunity measurements. To meet high frequency testing white HY-35 hybrid absorber is mounted on the ferrites in specular regions of the chamber.

The chamber has a 2 meter diameter ANSI test volume area and meets the requirements of ANSI C63.4 (1992), EN55022, and FCC Part 15 standards for testing at a 3 meter path length.

FCC Registration Number: 90706

IC Registration Number: 4359



TEST DATA

Test Data Number: 3141830MIN-001R
Project Number: 3141830

Testing performed on the
URH-PCS, Universal Radio Head-PCS

To
47 CFR, Part 24

For
ADC Telecommunications Inc.

Test Performed by:
Intertek Testing Services NA, Inc.
7250 Hudson Blvd., Suite 100
Oakdale, MN 55128

Test Authorized by:
ADC Telecommunications Inc.
5341 12th Avenue East
Shakopee, MN 55379

Prepared by: *Norman Shpilsher*
Norman Shpilsher

Date: January 17, 2008

Reviewed by: *Uri Spector*
Uri Spector

Date: January 17, 2008



TABLE OF CONTENTS

- 1.0 DESCRIPTION OF THE SAMPLE (EUT)..... 3**
- 2.0 TEST SUMMARY 4**
 - 2.1 Statement of the Measurement Uncertainty..... 4
- 3.0 TEST RESULTS 5**
 - 3.1 Environmental conditions 17
- 5.0 TEST EQUIPMENT.....20**



1.0 DESCRIPTION OF THE SAMPLE (EUT)

Model:	URH-PCS, Universal Radio Head-PCS
Type of EUT:	Outdoor Repeater
Serial Number:	N/A
Company:	ADC Telecommunications Inc.
Customer:	Mr. Mark Miska
Address:	1187 Park Place Shakopee, MN 55379
Phone:	952-403-8340
Fax:	952-403-8858
Test Standards:	<input type="checkbox"/> EN 55022:2006, Class [REDACTED] <input type="checkbox"/> EN 55011:1998 + A1:1999 + A2:2002, Group [REDACTED], Class [REDACTED] <input type="checkbox"/> 47 CFR, Part 15:2006, §15.107 and §15.109, Class [REDACTED] <input checked="" type="checkbox"/> 47 CFR, Part 24:2006 <input type="checkbox"/> EN 55014-1:2000 + A1:2001 + A2:2002 <input type="checkbox"/> EN 61326-1:2006 <input type="checkbox"/> Class [REDACTED] for Radiated and Conducted Emissions <input type="checkbox"/> EN 60601-1-2:2001 +A1:2006 <input type="checkbox"/> Class [REDACTED] Radiated and Conducted Emissions <input type="checkbox"/> EN 61000-6-3:2007 <input type="checkbox"/> EN 61000-6-4:2007 <input type="checkbox"/> EN 61000-3-2:2006 <input type="checkbox"/> EN 61000-3-3:1995 +A1:2001 +A2:2006 <input type="checkbox"/> Other [REDACTED]



2.0 TEST SUMMARY

Referring to the performance criteria and the operating mode during the tests specified in this report, the equipment complies with the requirements according to the following standards.

TEST STANDARD	TEST	RESULT
Part 24	Spurious Enclosure Radiated Emissions	Pass

2.1 Statement of the Measurement Uncertainty

Note: The measured result in this report is within the specification limits by more than the measurement uncertainty; the measured result indicates that the product tested complies with the specification limit.

The expanded uncertainty ($k = 2$) for radiated emissions from 30 to 1000 MHz has been determined to be: ± 4 dB at 10m and ± 5.4 dB at 3m

The expanded uncertainty ($k = 2$) for conducted emissions from 150 kHz to 30 MHz has been determined to be: ± 2.6 dB

General notes:

1. Test was performed with the EUT tuned to the low frequency (1930MHz), middle frequency (1965MHz), and upper frequency (1990MHz) of the operating band. Testing was performed in frequency range from 30MHz to 20GHz.
2. The Spurious Radiated Power limits of -13dBm was correlated with field strength reference level of 82.2dB μ V/m during field strength measurements at 3m measurement distance
3. Testing at the EUT operating frequencies of 1930MHz and 1965MHz was performed on 12/03/2007 and testing at the EUT operating frequency of 1990MHz was performed on 01/07/2008.

3.0 TEST RESULTS

Radiated Emissions from 30MHz to 1GHz

Date: 12-03-2007 and 01-07-2008

Company: ADC Telecommunications Inc.

Model: URH-PCS

Test Engineer: Norman Shpilsher

Special Info: Direct Measurements

Standard: FCC Part 24

Test Site: 3m Anechoic Chamber, 3m measurement distance

Note: The table shows the worst case radiated emissions
Measurements were taken using a Peak detector

Table # 1

Frequency	Ant. Polarity	Peak Reading dBμV	Ant.Factor dB1/m	Total at 3m dBμV/m	QP Limit dBμV/m	Margin dB
Operating Frequency 1930MHz						
34.44 MHz	V	55.9	16.4	72.3	82.2	-9.9
38.016 MHz	V	59.8	14.3	74.1	82.2	-8.1
52.011 MHz	V	51.8	8.3	60.1	82.2	-22.1
88.067 MHz	V	47.2	9.6	56.8	82.2	-25.4
93.96 MHz	V	47.4	10.8	58.2	82.2	-24.0
145.8 MHz	V	44.0	12.7	56.7	82.2	-25.6
39.418 MHz	H	46.2	13.5	59.7	82.2	-22.5
437.63 MHz	H	37.0	19.5	56.5	82.2	-25.7
624.78 MHz	H	33.3	22.6	56.0	82.2	-26.2
Operating Frequency 1965MHz						
33.809 MHz	V	55.9	16.8	72.6	82.2	-9.6
38.436 MHz	V	58.0	14.1	72.1	82.2	-10.1
52.303 MHz	V	52.0	8.2	60.2	82.2	-22.0
87.189 MHz	V	46.7	9.4	56.1	82.2	-26.1
93.709 MHz	V	45.8	10.8	56.5	82.2	-25.7
107.88 MHz	V	42.5	13.3	55.8	82.2	-26.4
148.5 MHz	V	42.7	12.5	55.2	82.2	-27.0
34.043 MHz	H	43.4	16.6	60.1	82.2	-22.2
38.997 MHz	H	45.6	13.8	59.3	82.2	-22.9
Operating Frequency 1990MHz						
36.193 MHz	V	49.1	15.4	64.5	82.2	-17.8
44.835 MHz	V	51.7	10.8	62.5	82.2	-19.7
117.4 MHz	V	49.2	13.7	62.9	82.2	-19.3
136.74 MHz	V	43.9	13.1	57.0	82.2	-25.3
437.63 MHz	V	35.1	19.5	54.6	82.2	-27.6
36.099 MHz	H	39.8	15.4	55.3	82.2	-26.9
104.12 MHz	H	41.9	12.8	54.7	82.2	-27.6
276.45 MHz	H	39.5	15.4	54.8	82.2	-27.4
312.39 MHz	H	44.0	16.2	60.2	82.2	-22.0
437.63 MHz	H	39.3	19.5	58.8	82.2	-23.4



Radiated Emissions from 1GHz to 20GHz

Date: 12-03-2007 and 01-07-2008

Company: ADC Telecommunications Inc.
Model: URH-PCS
Test Engineer: Norman Shpilsher
Special Info: Direct Measurements
Standard: FCC Part 24
Test Site: 3m Anechoic Chamber, 3m measurement distance
Note: The table shows the worst case radiated emissions
 All measurements were taken using a Peak detector

Table # 2

Frequency MHz	Antenna Polarity	Reading dBµV	Total C.F. dB1/m	Pre-Amp. Gain (dB)	Total at 3m dBµV/m	QP Limit dBµV/m	Margin dB
Operating Frequency 1930MHz							
1.930 GHz	V	76.0	30.2	38.7	67.5	82.2	-14.7
13.801 GHz	V	44.3	48.1	35.3	57.2	82.2	-25.1
Operating Frequency 1965MHz							
1.965 GHz	V	75.9	30.3	38.7	67.6	82.2	-14.6
13.716 GHz	V	43.3	48.1	35.1	56.2	82.2	-26.0
Operating Frequency 1990MHz							
1.99 GHz	V	61.5	30.5	38.6	53.3	82.2	-28.9
13.764 GHz	V	42.7	48.1	35.2	55.6	82.2	-26.6
1.99 GHz	H	64.3	30.5	38.6	56.2	82.2	-26.0
13.736 GHz	H	42.2	48.1	35.2	55.1	82.2	-27.1



Spurious Emissions


Date: 12-03-2007 and 01-07-2008

Company: ADC Telecommunications Inc.
Model: URH-PCS
Test Engineer: Norman Shpilsher
Special Config. Info: Substitution Method
Limits: FCC Part 24
Frequency Range: 30MHz - 10GHz
Test Site: 3m Anechoic Chamber


Note: The table shows radiated emissions with margin less than 20dB below straight measurements limits
 No substitution emissions measurements were perform at EUT operating frequency

Table # 3


Frequency MHz	Antenna Polarity	Measured Emissions dBµV	Substitution Antenna Power dBm	Substitution Antenna Gain dBi	Cable Loss dB	ERP Spur. Emissions dBm	Limit dBm	Margin dB
Operating frequency 1930MHz								
34.44	V	55.9	-18.1	-9.1	0.1	-27.3	-13.0	-14.3
38.016	V	59.8	-14.9	-8.6	0.1	-23.6	-13.0	-10.6
Operating frequency 1965MHz								
33.809	V	55.9	-18.0	-9.1	0.1	-27.2	-13.0	-14.2
38.436	V	58.0	-16.8	-8.5	0.1	-25.4	-13.0	-12.4
Operating frequency 1990MHz								
36.193	V	49.06	-24.0	-8.8	0.1	-32.9	-13.0	-19.9
44.835	V	51.72	-23.7	-7.7	0.1	-31.5	-13.0	-18.5
117.403	V	49.19	-22.5	-0.7	0.1	-23.3	-13.0	-10.3

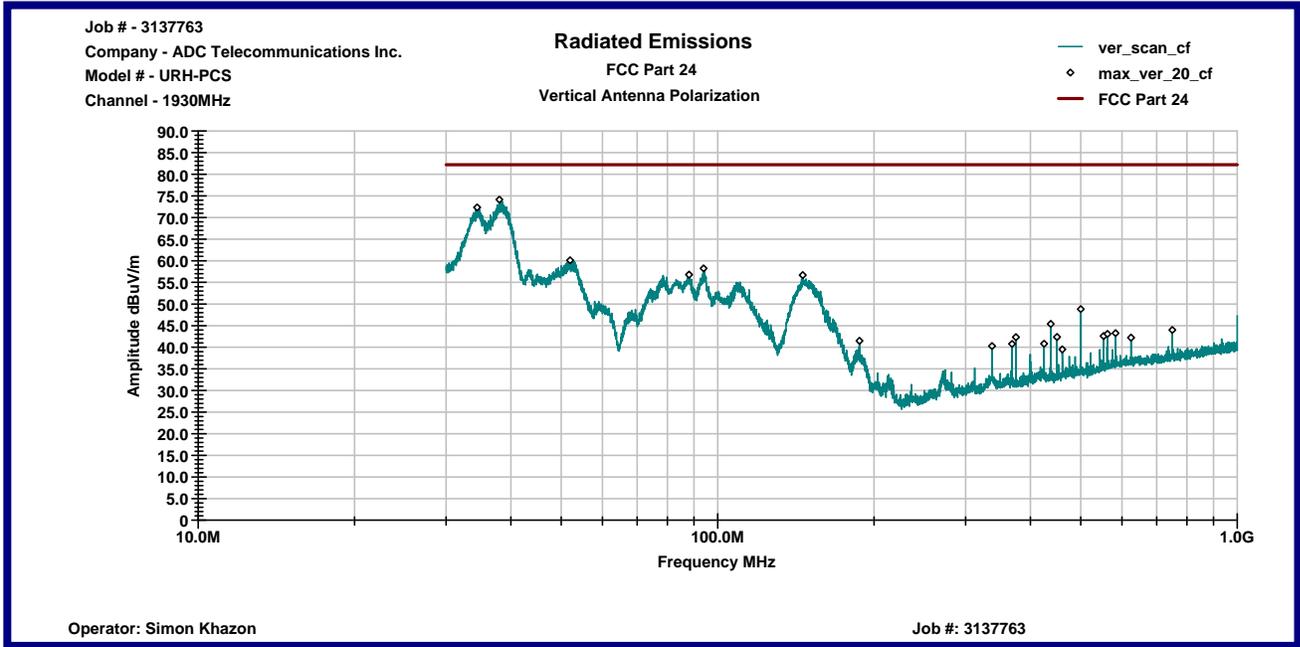


Graph 1

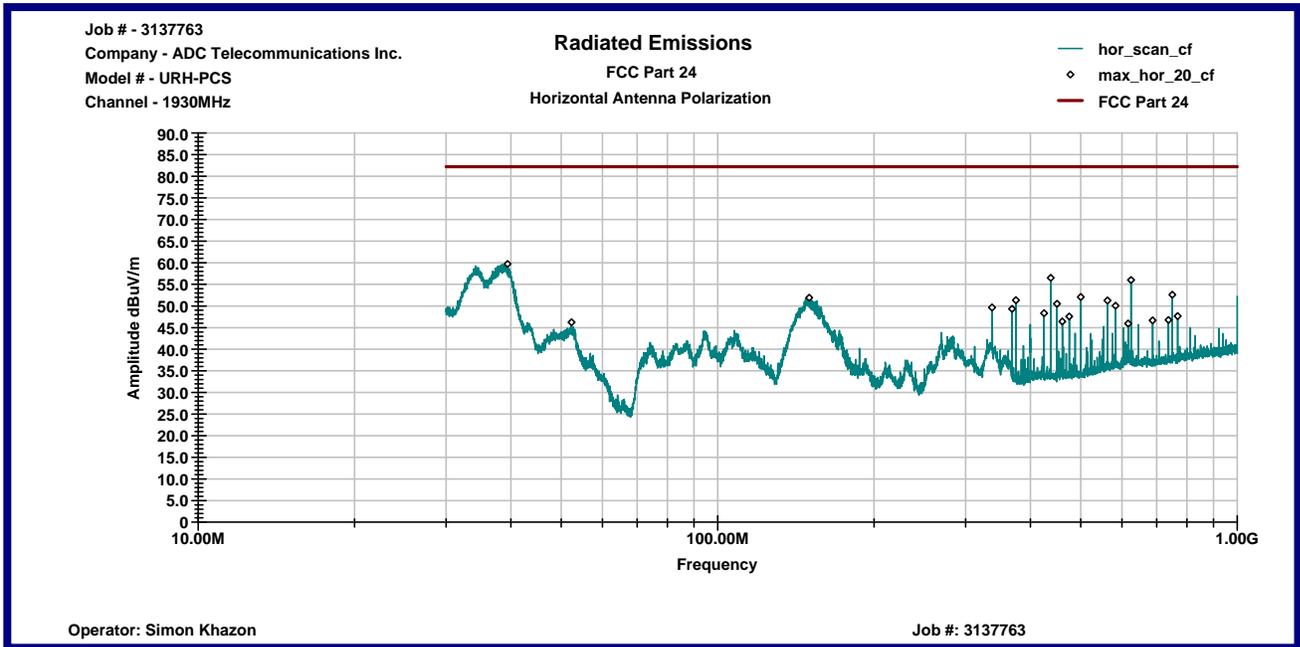


Graph 2

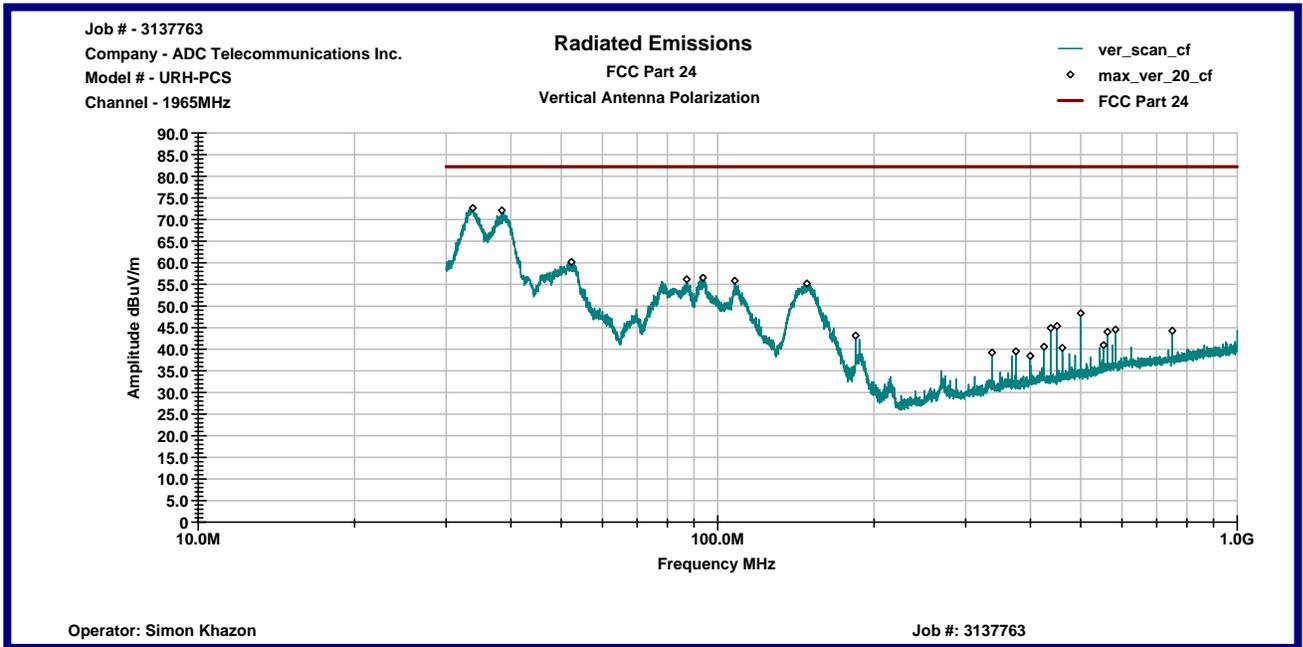


Graph 3

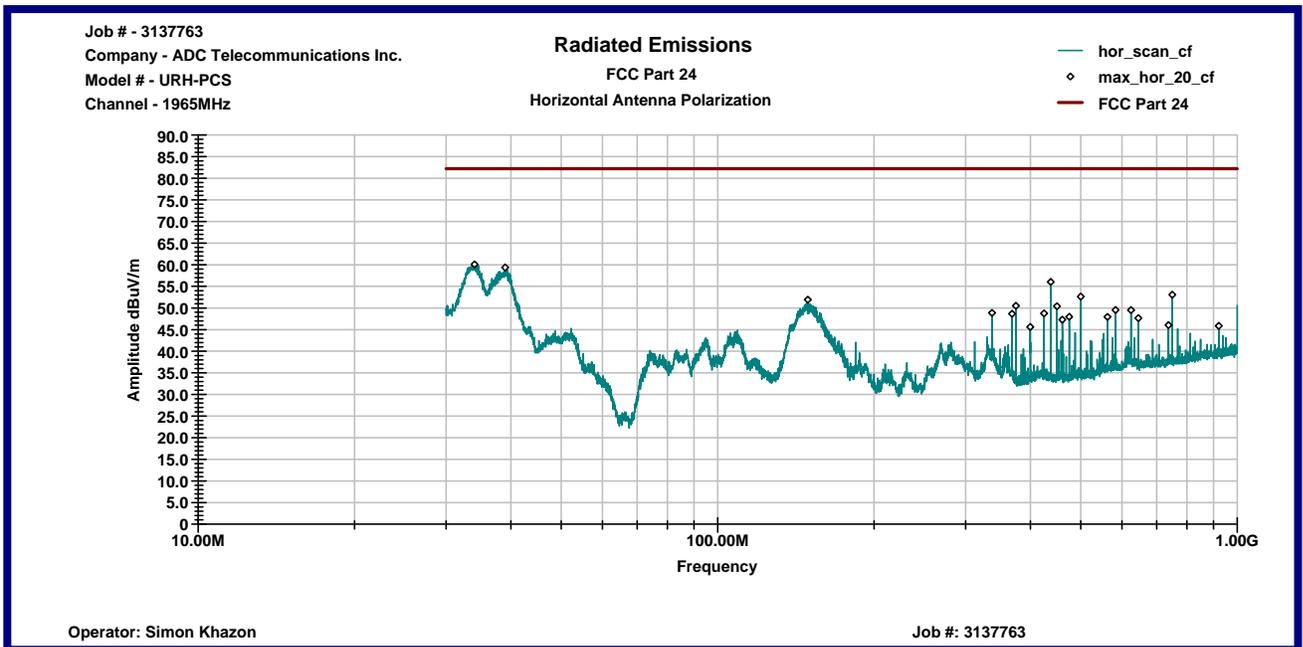


Graph 4

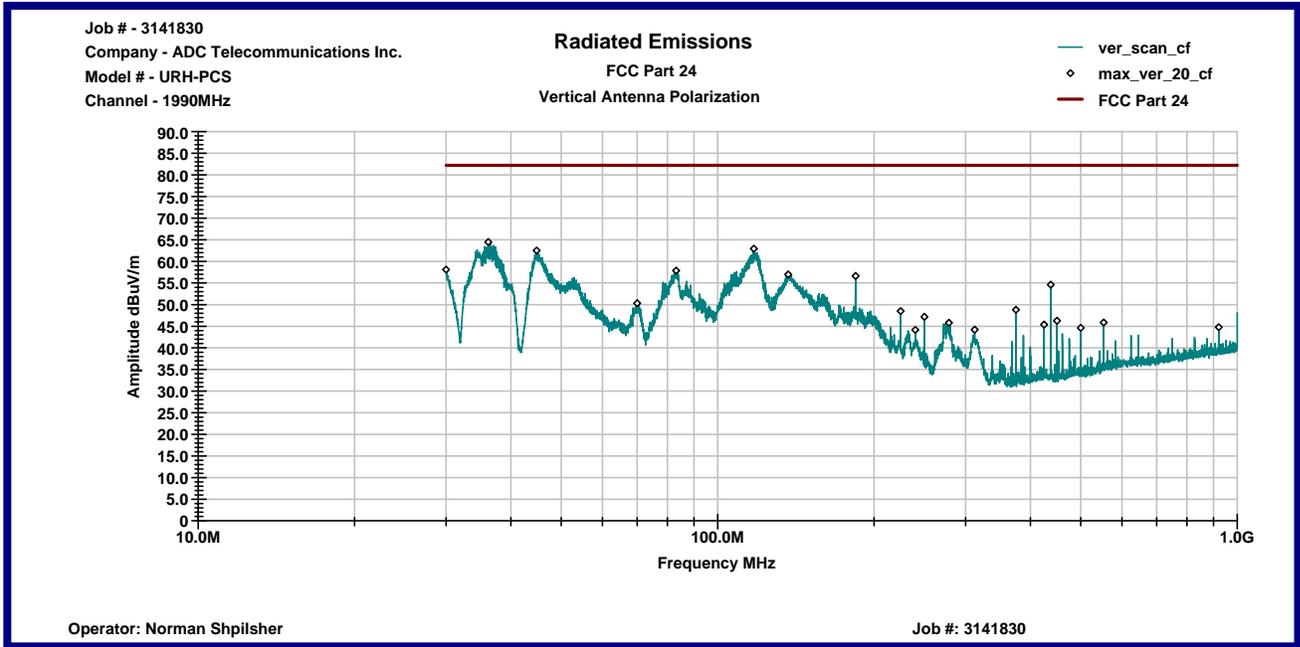


Graph 5

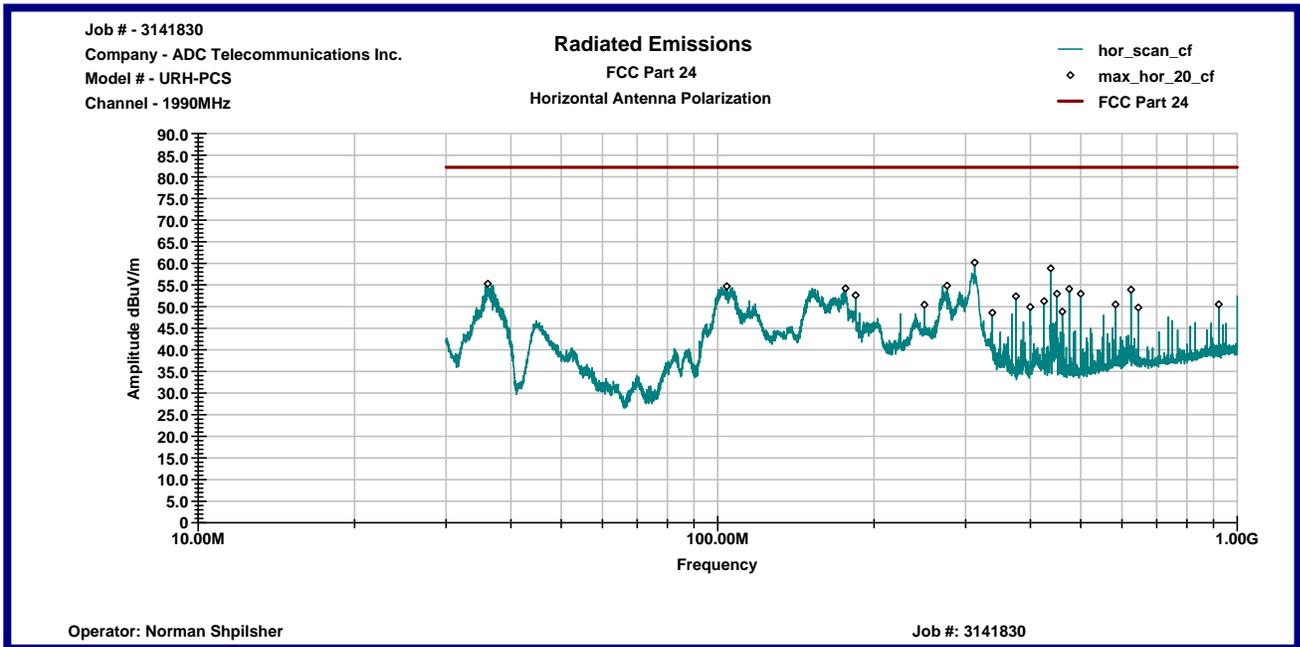


Graph 6

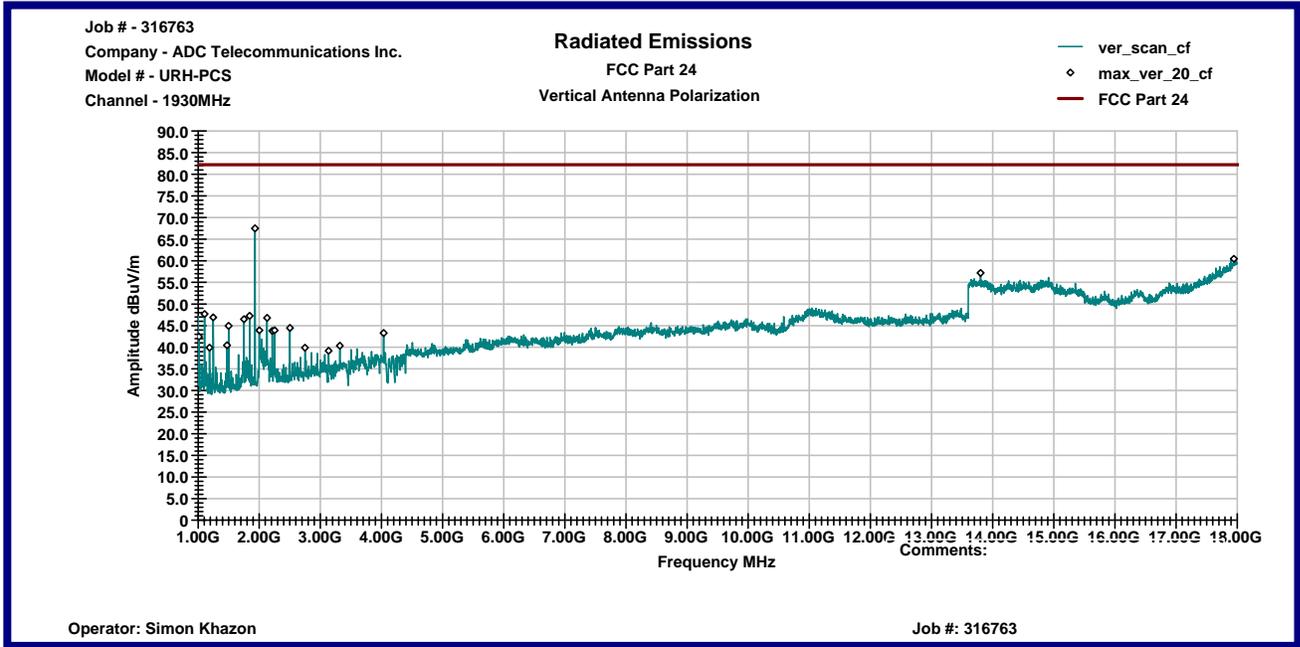


Graph 7

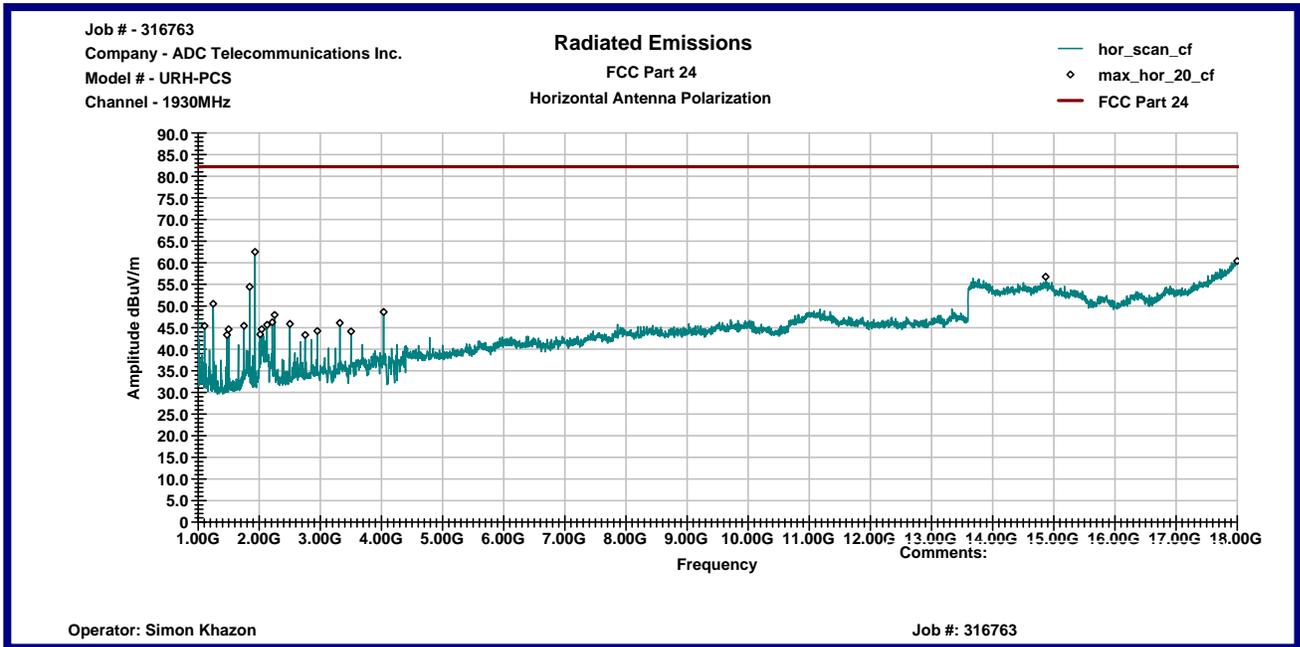


Graph 8

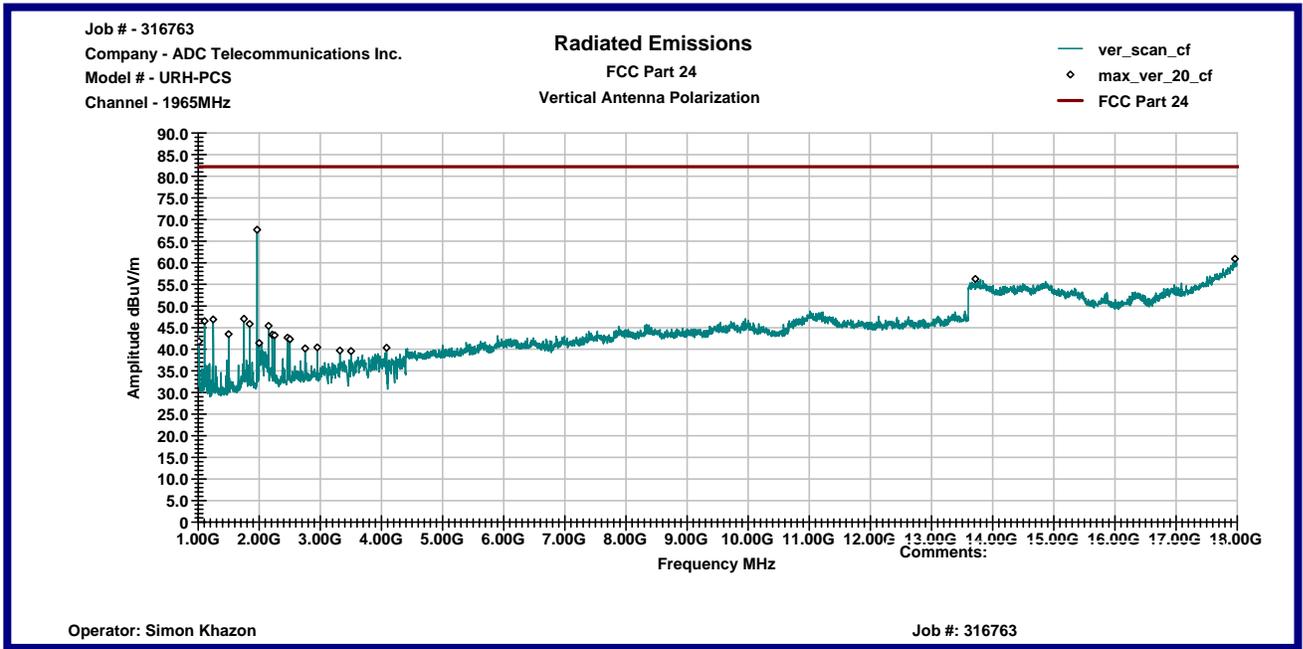


Graph 9

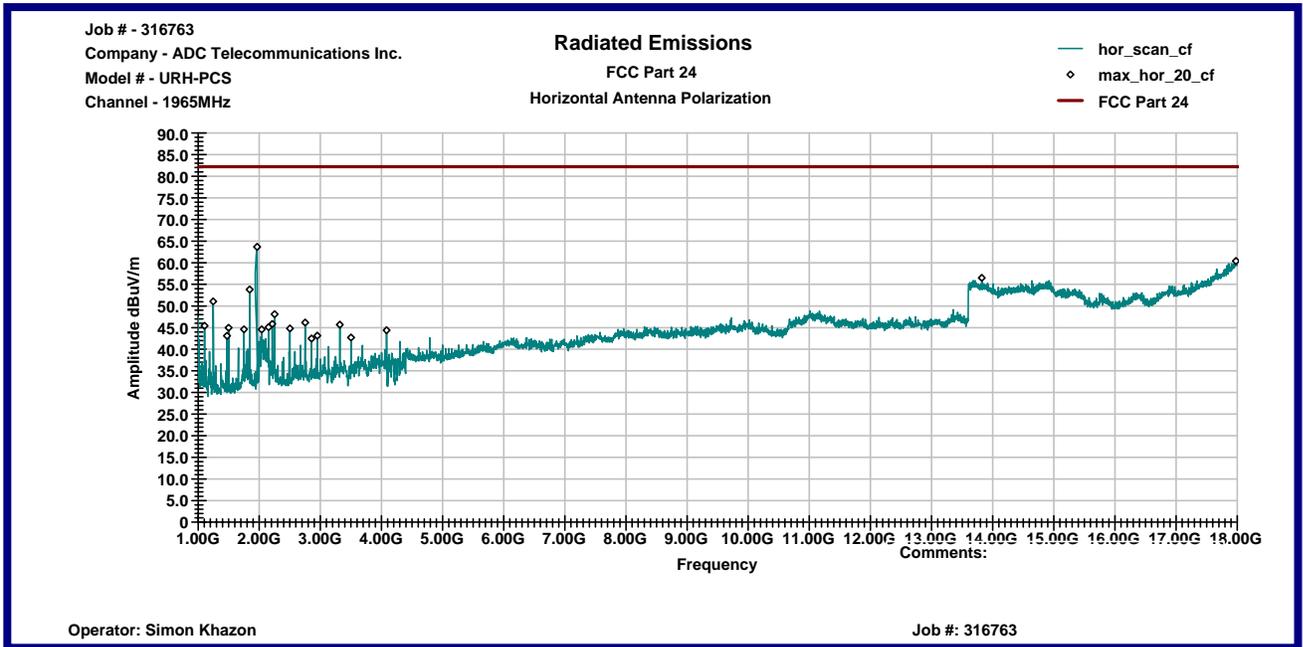


Graph 10

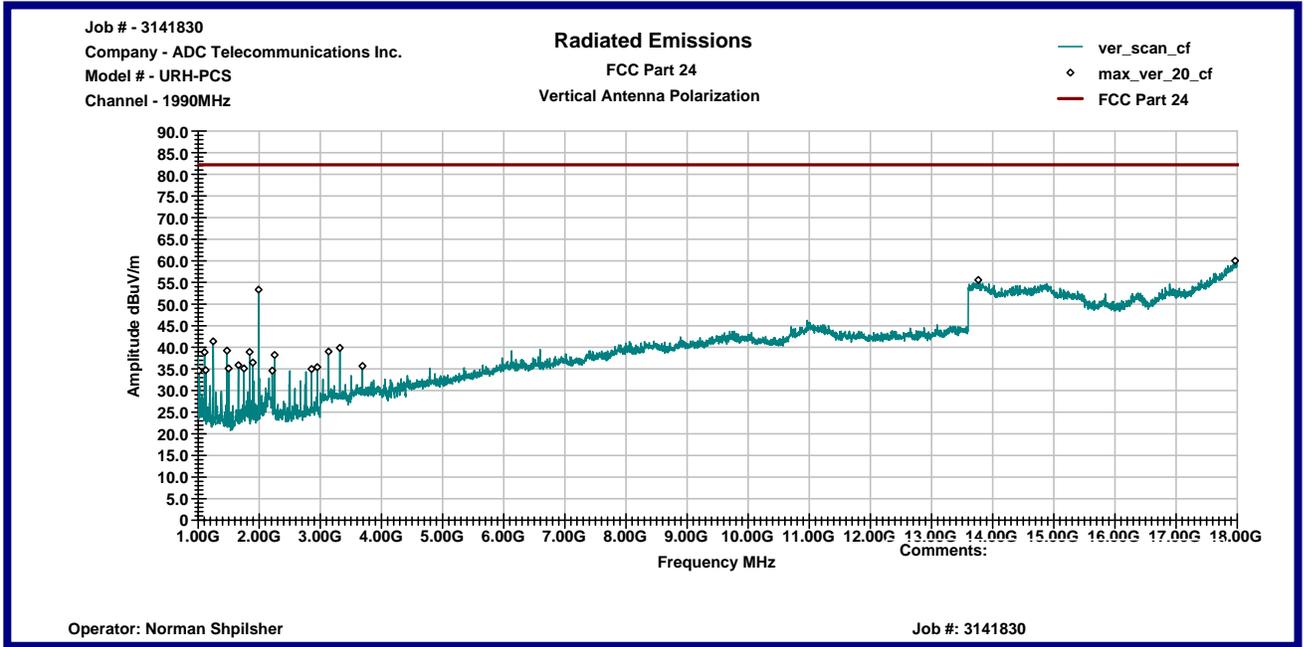


Graph 11

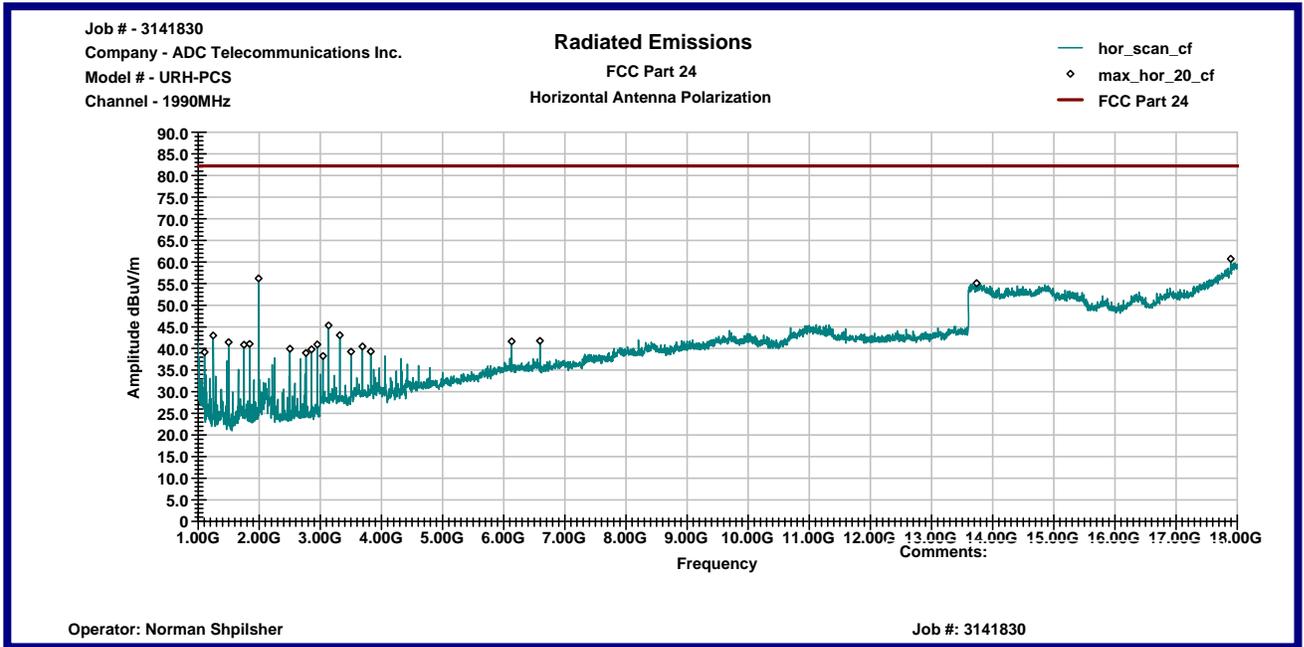


Graph 12

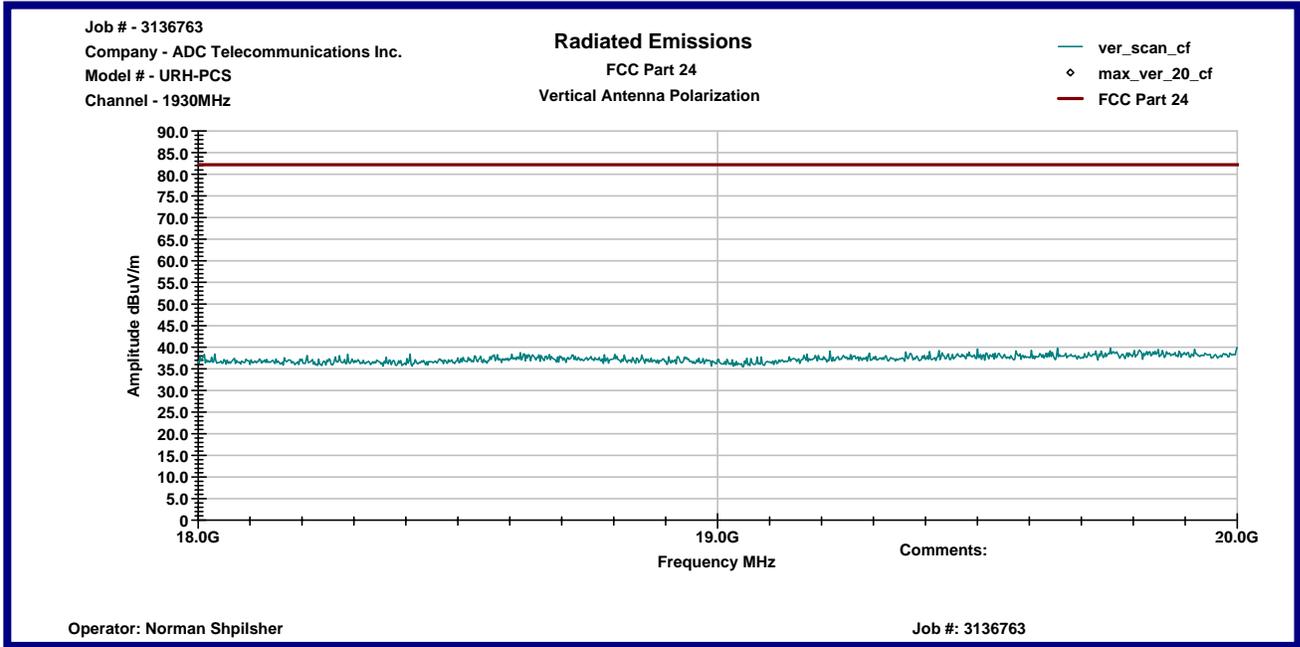


Graph 13

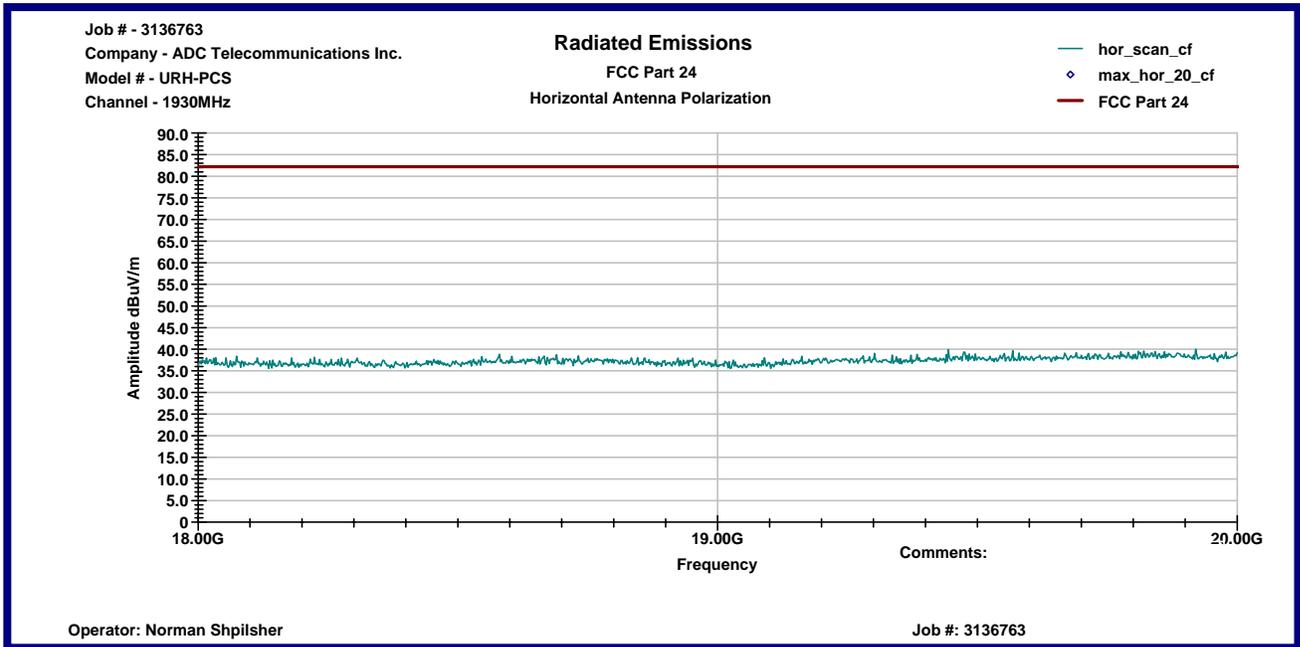


Graph 14

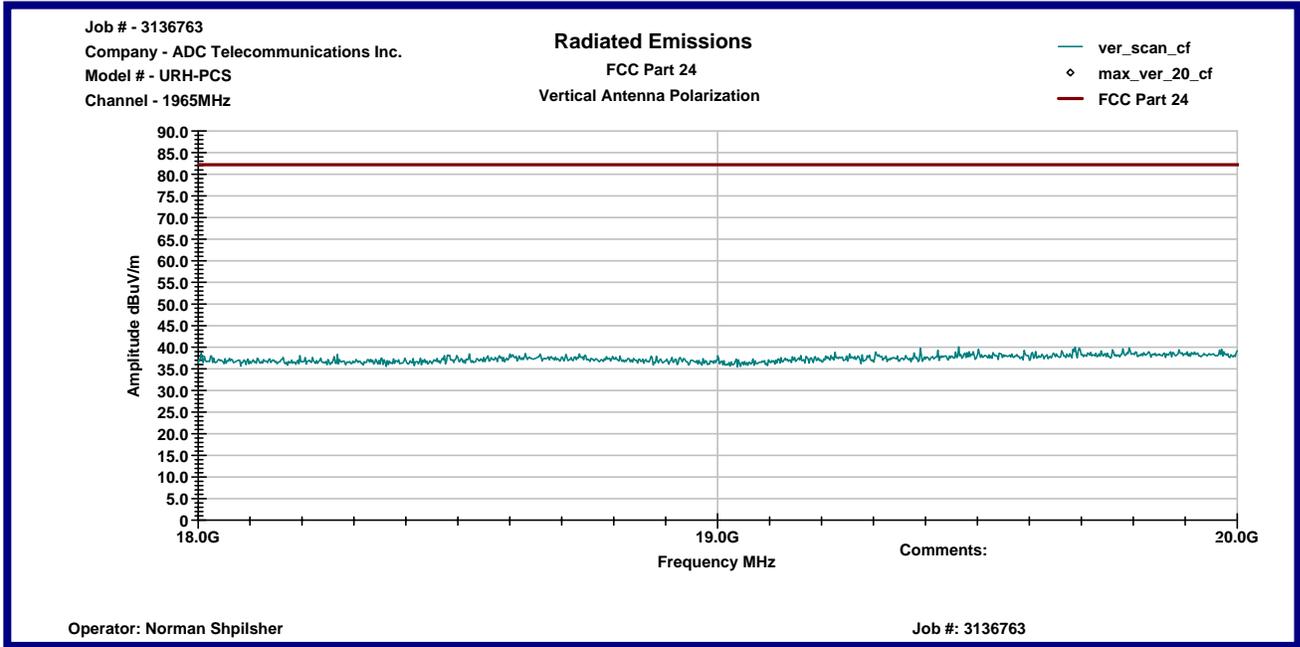


Graph 15

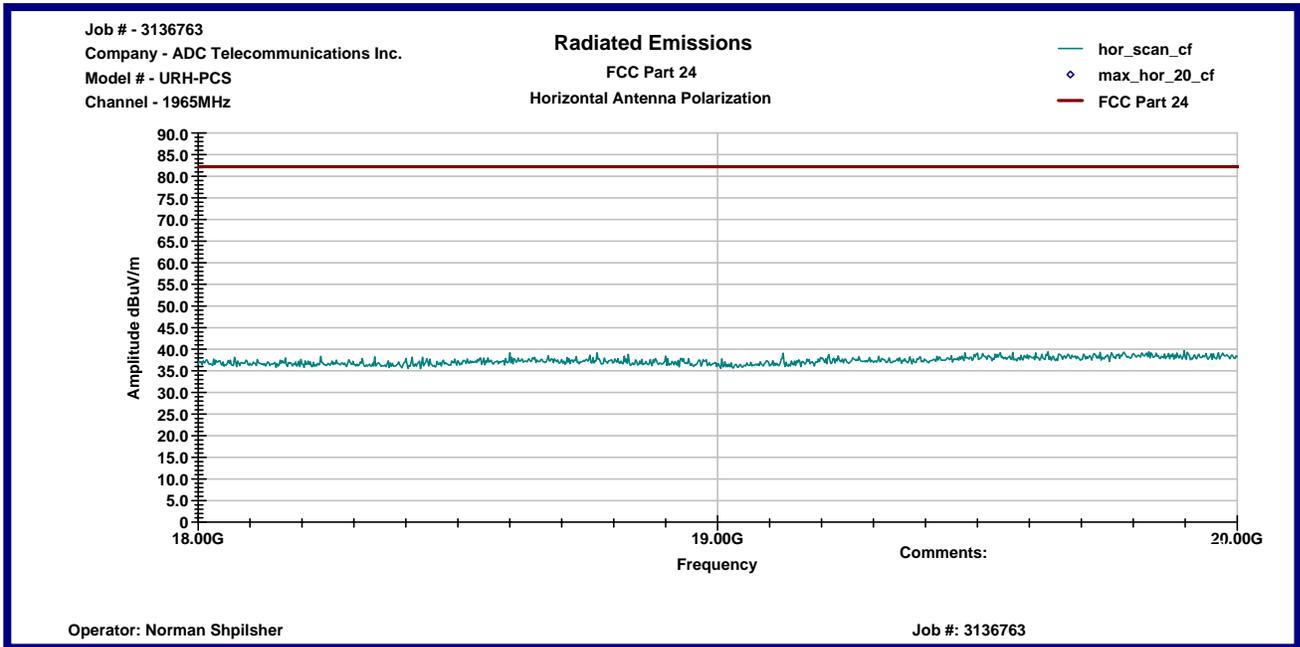

Graph 16

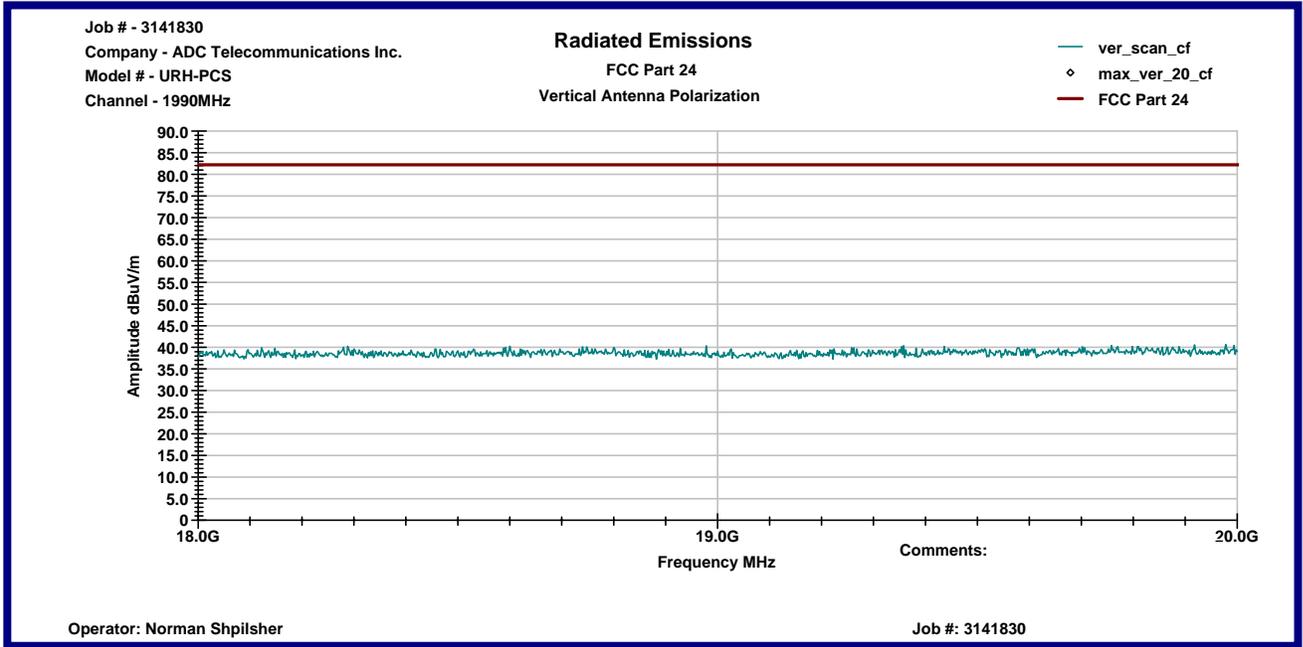

Graph 17

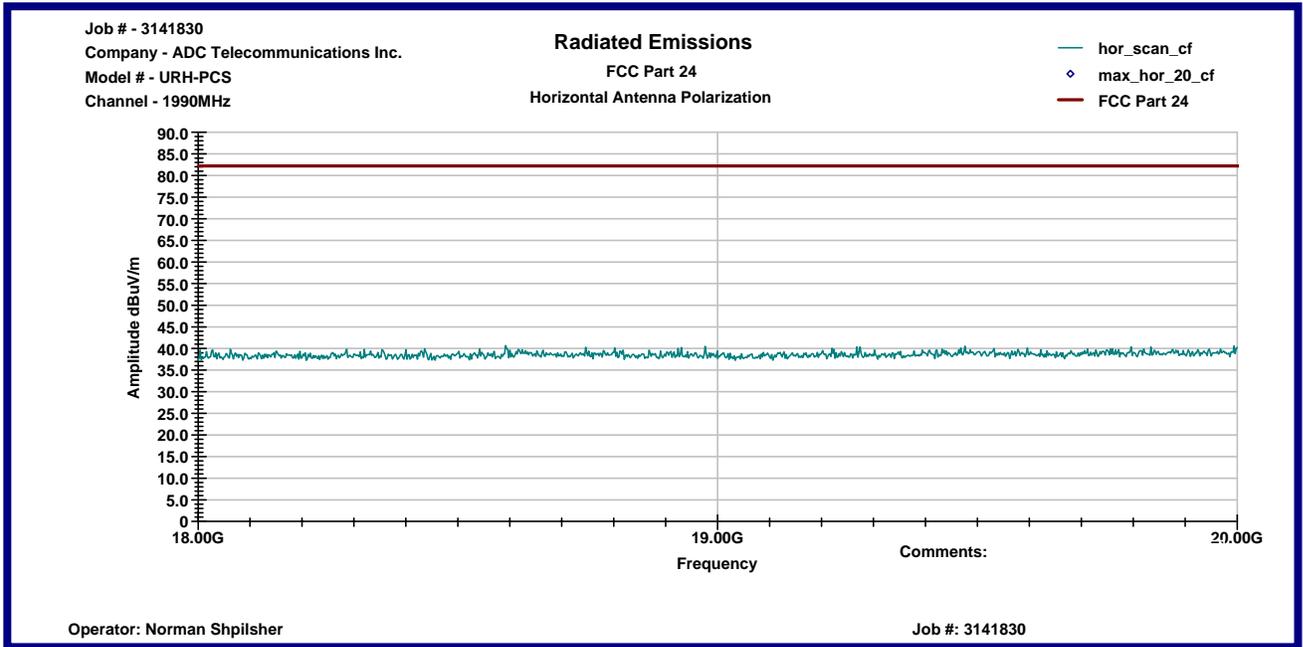

Graph 18



3.1 Environmental conditions


During the measurement the environmental conditions were within the listed ranges:

Temperature: 15-35 ° C



Humidity: 30-60 %

Atmospheric pressure: 86-106 kPa

4.0 PHOTOS

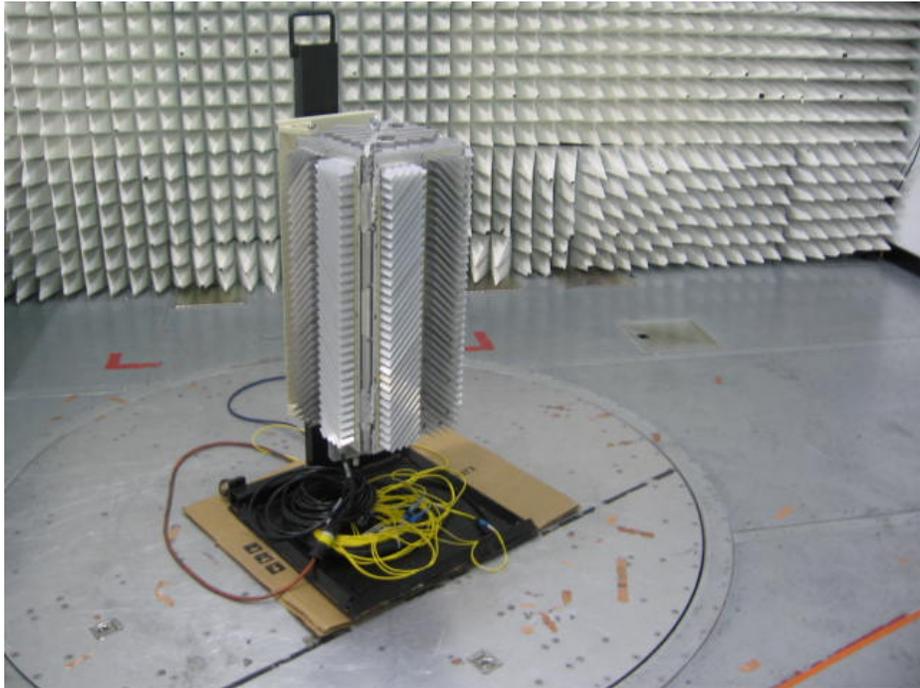

Test Setup Photos

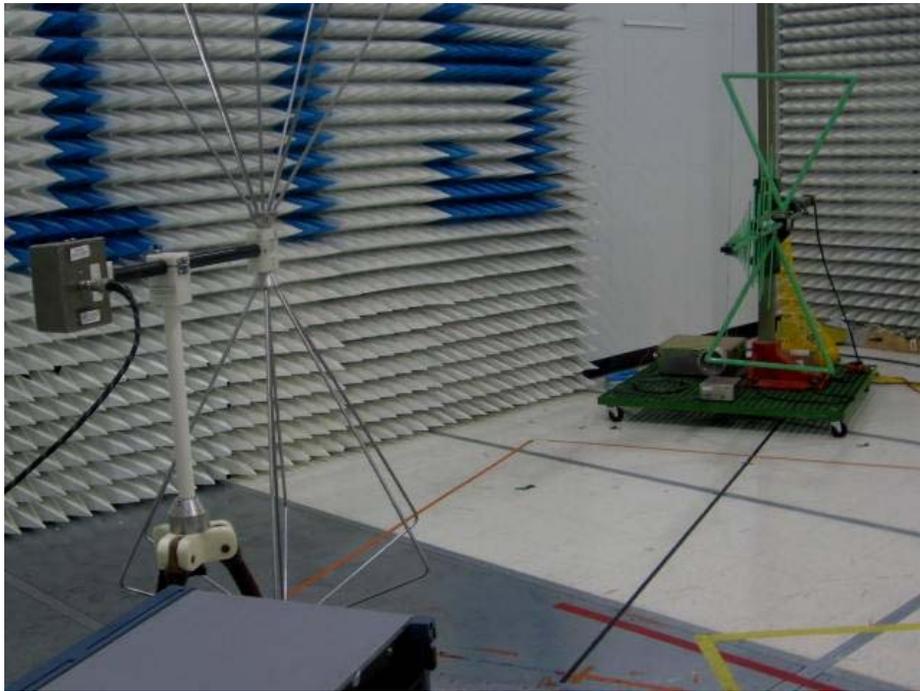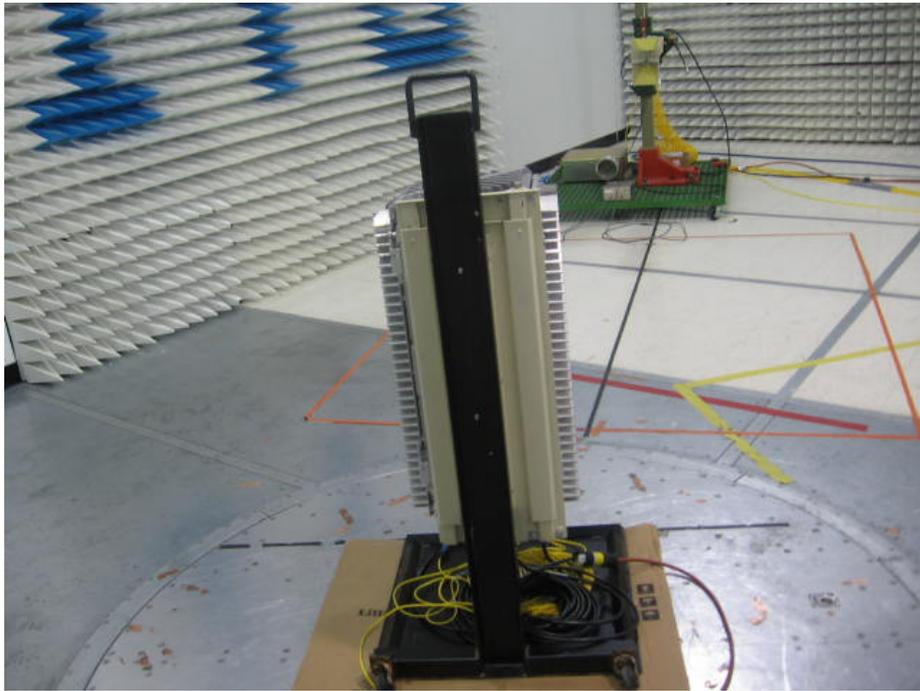

Test Setup Photos



5.0 TEST EQUIPMENT

DESCRIPTION	MANUFACTURER	MODEL	SERIAL NO.	CAL DUE	USED
Receiver RF Section	HP	85462A	3549A00306	02/27/2008	<input type="checkbox"/>
RF Filter Section	HP	85460A	3448A00276	02/27/2008	<input type="checkbox"/>
Spectrum Analyzer	R & S	FSP 40	100024	08/23/2008	<input checked="" type="checkbox"/>
Spectrum Analyzer	R & S	ESCI	100358	04/27/2008	<input checked="" type="checkbox"/>
Bicono-Log Antenna	Schaffner-Chase	CBL 6112 B	2468	07/30/2008	<input checked="" type="checkbox"/>
Bicono-Log Antenna	Schaffner-Chase	CBL 6112 B	2630	09/07/2008	<input type="checkbox"/>
Horn Antenna	EMCO	3115	9507-4513	01/09/2008	<input checked="" type="checkbox"/>
Horn Antenna	EMCO	3115	6579	03/06/2008	<input checked="" type="checkbox"/>
Waveguide Horn Antenna	EMCO	3116	9904-2423	07/20/2008	<input checked="" type="checkbox"/>
Loop Antenna	A.H.Systems	SAS-200/562	215	05/04/2008	<input type="checkbox"/>
Monopole Antenna	A.H.Systems	SAS-200/550-1	692	05/09/2008	<input type="checkbox"/>
Biconical Antenna	CDI	B100	00632	08/01/2008	<input checked="" type="checkbox"/>
Signal Generator	R & S	SMT 03	DE12157	8/13/2008	<input checked="" type="checkbox"/>
LISN	Fischer Custom Communications	FCC-LISN-2	316	09/24/2008	<input type="checkbox"/>
LISN	Fischer Custom Communications	FCC-TLISN-T4	15333.01	03/01/2008	<input type="checkbox"/>
Pre-Amplifier	MITEQ	AMF-5D-00501800-28-13P	1122951	04/24/2008	<input checked="" type="checkbox"/>
Pre-Amplifier	MITEQ	AMF-6F-16002600-25-10P	1222383	11/05/2008	<input checked="" type="checkbox"/>
Pre-Amplifier	MITEQ	AMF-6F-26004000-40-8P	13224444	11/05/2008	<input type="checkbox"/>
Pre-Amplifier	HP	8447F OPT H64	3113A04974	03/07/2008	<input type="checkbox"/>
System	TILE! Instrument Control		Ver. 3.4.K.29	VBU	<input checked="" type="checkbox"/>

8.0

APPENDIX C

Measurement Protocol

[Back to Table of Contents:](#)

Measurement Protocol

Environmental conditions of the lab, (ADC)

Temperature: 21 - 26° C
Relative Humidity: 21 - 24 %
Atmospheric Pressure: 97.8 - 100.0 kPa

Test Methodology:

Emission testing is performed according to the procedures in ANSI C63.4-2003.

Measurement Uncertainty

The test system for conducted emissions is defined as the signal generator(s), the power meter, the spectrum analyzer and the coaxial cable. The equipment comprising the test systems is calibrated prior to testing the EUT.

Justification

The Equipment Under Test (EUT) is configured in a typical user arrangement in accordance with the manufacturer's instructions. A cable is connected to each available port and either terminated with a peripheral into its characteristic impedance or left un-terminated. When appropriate, the cables are manually manipulated with respect to each other to obtain maximum emissions from the unit.

Radiated Emissions

The final level, in dBuV/m, equals the reading from the spectrum analyzer (Level dBuV), adding the antenna correction factor and cable loss factor (Factor dB) to it, and subtracting the preamp gain (and duty cycle correction factor, if applicable). This result then has the limit subtracted from it to provide the Delta, which gives the tabular data as shown in the data sheets in Appendix B.

Example:

FREQ (MHz)	LEVEL (dBuV)	CABLE/ANT/PREAMP (dB) (dB/m) (dB)	FINAL (dBuV/m)	POL/HGT/AZ (m) (deg)	DELTA1
60.80	42.5Qp +	1.2 + 10.9 - 25.5 =	29.1	V 1.0 0.0	-10.9

Substitution Method

A cabinet (or enclosure) radiated emission scan was also made, at Intertek, with the EUT's antenna replaced with a termination to demonstrate case radiation compliance to the -13 dBm requirement. Radiated emissions from the EUT are measured in the frequency range of 30 to 20,000 MHz using a spectrum analyzer and appropriate broadband linearly polarized antennas. Table top equipment is placed on a 1.0 X 1.5 meter non-conducting table 80 centimeters above the ground plane. Floor standing equipment is placed directly on the turntable/ground plane. Interface cables that are closer than 40 centimeters to the ground plane are bundled in the center in a serpentine fashion so they are at least 40 centimeters from the ground plane. Cables to simulators/testers (if used in this test) are routed through the center of the table and to a screen room located outside the test area. The antenna is positioned 3 meters horizontally from the EUT. To locate maximum emissions from the test sample the antenna is varied in height from 1 to 4 meters, measurement scans are made with both horizontal and vertical antenna polarizations and the EUT are rotated 360 degrees. The field strength levels were measured per ANSI C63.4. The EUT is then replaced with a tuned dipole antenna (below 1GHz) or horn antenna (above 1 GHz). The substitute antenna was placed in the same polarization as the test antenna. A signal generator was used to generate a signal level that matched the highest level measured from the EUT. The signal generator level minus the cable loss from the signal generator to the substitute antenna plus the substitute antenna gain equals the spurious power level.

Test Equipment

All measurement instrumentation is traceable to the National Institute of Standards and Technology and is calibrated according to internal procedure.