



element[®]

CommScope

Prism AWS3 SISO HDM 20 Watt

FCC 27:2018

FCC 27.53:2018

20W SISO Cellular Repeater

Report # TECO0046



NVLAP Lab Code: 200881-0



This report must not be used to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government of the United States of America. This Report shall not be reproduced, except in full without written approval of the laboratory.



CERTIFICATE OF TEST

Last Date of Test: February 16, 2018
CommScope
Model: Prism AWS3 SISO HDM 20 Watt

Radio Equipment Testing

Standards

Specification	Method
FCC 27:2018	ANSI/TIA/EIA-603-D-2010
FCC 27.53:2018	ANSI C63.26:2015

Results

Method Clause	Test Description	Applied	Results	Comments
2.2.1	Equivalent Isotropic Radiated Power (EIRP)	Yes	Pass	
2.2.1	Peak To Average Ratio	Yes	Pass	
2.2.2	Frequency Stability	Yes	Pass	
2.2.3	Emissions Bandwidth	Yes	Pass	
2.2.12	Spurious Radiated Emissions	Yes	Pass	
2.2.13	Spurious Conducted Emissions	Yes	Pass	
2.2.13	Band Edge Compliance	Yes	Pass	
2.2.13	Intermodulation	Yes	Pass	

Deviations From Test Standards

None

Approved By:

Matt Nuernberg, Operations Manager

Product compliance is the responsibility of the client; therefore, the tests and equipment modes of operation represented in this report were agreed upon by the client, prior to testing. The results of this test pertain only to the sample(s) tested. The specific description is noted in each of the individual sections of the test report supporting this certificate of test. This report reflects only those tests from the referenced standards shown in the certificate of test. It does not include inspection or verification of labels, identification, marking or user information.

REVISION HISTORY



2017.1.25

Revision Number	Description	Date	Page Number
00	None		

ACCREDITATIONS AND AUTHORIZATIONS



United States

FCC - Designated by the FCC as a Telecommunications Certification Body (TCB). Certification chambers, Open Area Test Sites, and conducted measurement facilities are listed with the FCC.

A2LA - Accredited by A2LA to ISO / IEC 17065 as a product certifier. This allows Element to certify transmitters to FCC and IC specifications.

NVLAP - Each laboratory is accredited by NVLAP to ISO 17025

Canada

ISED - Recognized by Innovation, Science and Economic Development Canada as a Certification Body (CB). Certification chambers and Open Area Test Sites are filed with ISED.

European Union

European Commission – Within Element, we have a EU Notified Body validated for the EMCD and RED Directives.

Australia/New Zealand

ACMA - Recognized by ACMA as a CAB for the acceptance of test data.

Korea

MSIP / RRA - Recognized by KCC's RRA as a CAB for the acceptance of test data.

Japan

VCCI - Associate Member of the VCCI. Conducted and radiated measurement facilities are registered.

Taiwan

BSMI – Recognized by BSMI as a CAB for the acceptance of test data.

NCC - Recognized by NCC as a CAB for the acceptance of test data.

Singapore

IDA – Recognized by IDA as a CAB for the acceptance of test data.

Israel

MOC – Recognized by MOC as a CAB for the acceptance of test data.

Hong Kong

OFCA – Recognized by OFCA as a CAB for the acceptance of test data.

Vietnam

MIC – Recognized by MIC as a CAB for the acceptance of test data.

SCOPE

For details on the Scopes of our Accreditations, please visit:


<http://portlandcustomer.element.com/ts/scope/scope.htm>

<http://gsi.nist.gov/global/docs/cabs/designations.html>

FACILITIES



California Labs OC01-17 41 Tesla Irvine, CA 92618 (949) 861-8918	Minnesota Labs MN01-10 9349 W Broadway Ave. Brooklyn Park, MN 55445 (612)-638-5136	New York Labs NY01-04 4939 Jordan Rd. Elbridge, NY 13060 (315) 554-8214	Oregon Labs EV01-12 6775 NE Evergreen Pkwy #400 Hillsboro, OR 97124 (503) 844-4066	Texas Labs TX01-09 3801 E Plano Pkwy Plano, TX 75074 (469) 304-5255	Washington Labs NC01-05 19201 120 th Ave NE Bothell, WA 98011 (425)984-6600
NVLAP					
NVLAP Lab Code: 200676-0	NVLAP Lab Code: 200881-0	NVLAP Lab Code: 200761-0	NVLAP Lab Code: 200630-0	NVLAP Lab Code:201049-0	NVLAP Lab Code: 200629-0
Innovation, Science and Economic Development Canada					
2834B-1, 2834B-3	2834E-1, 2834E-3	N/A	2834D-1, 2834D-2	2834G-1	2834F-1
BSMI					
SL2-IN-E-1154R	SL2-IN-E-1152R	N/A	SL2-IN-E-1017	SL2-IN-E-1158R	SL2-IN-E-1153R
VCCI					
A-0029	A-0109	N/A	A-0108	A-0201	A-0110
Recognized Phase I CAB for ACMA, BSMI, IDA, KCC/RRA, MIC, MOC, NCC, OFCA					
US0158	US0175	N/A	US0017	US0191	US0157

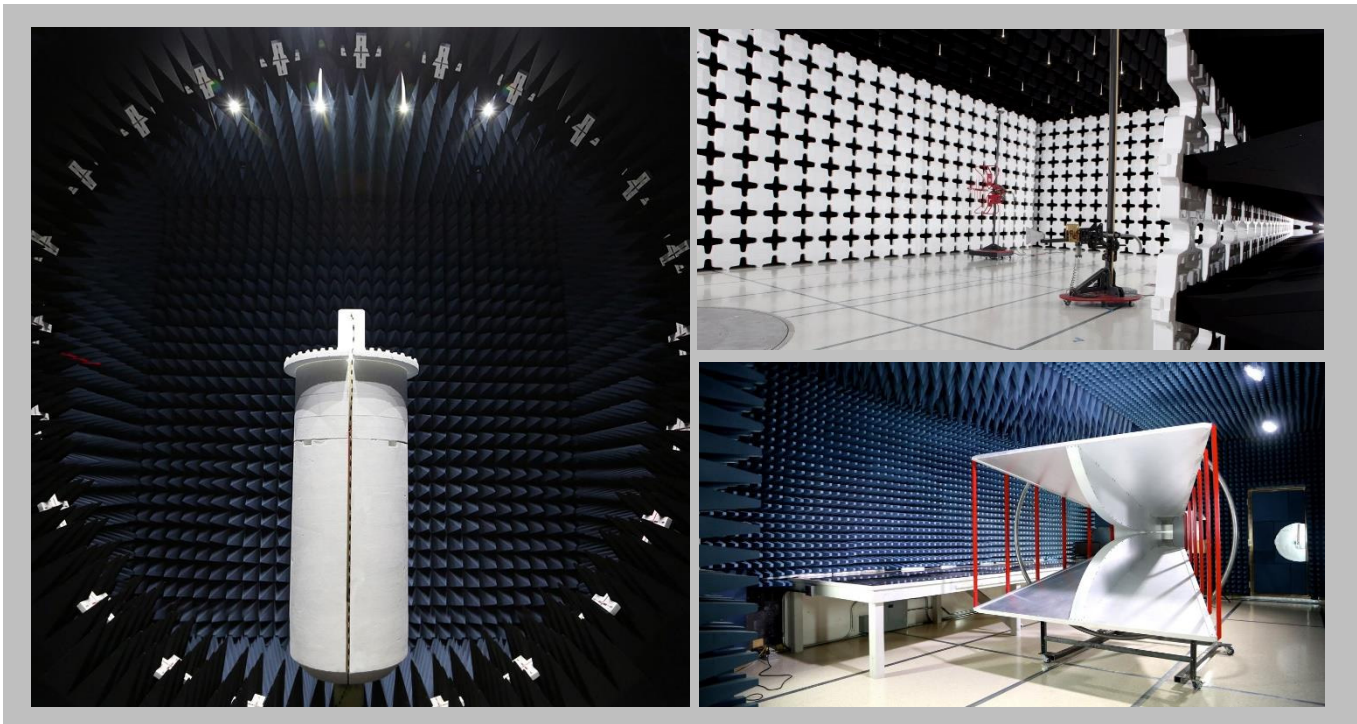

MEASUREMENT UNCERTAINTY



TMU.2015.07.10

Measurement Uncertainty

When a measurement is made, the result will be different from the true or theoretically correct value. The difference is the result of tolerances in the measurement system that cannot be completely eliminated. To the extent that technology allows us, it has been our aim to minimize this error. Measurement uncertainty is a statistical expression of measurement error qualified by a probability distribution.

A measurement uncertainty estimation has been performed for each test per our internal quality document QM205.4.6. The estimation is used to compare the measured result with its "true" or theoretically correct value. The expanded measurement uncertainty (K=2) can be found included as part of the applicable test description page. Our measurement data meets or exceeds the measurement uncertainty requirements of the applicable specification; therefore, the test data can be compared directly to the specification limit to determine compliance. The calculations for estimating measurement uncertainty are based upon ETSI TR 100 028 (or CISPR 16-4-2 as applicable), and are available upon request.

The following table represents the Measurement Uncertainty (MU) budgets for each of the tests that may be contained in this report.


Test	+ MU	- MU
Frequency Accuracy (Hz)	0.0007%	-0.0007%
Amplitude Accuracy (dB)	1.2 dB	-1.2 dB
Conducted Power (dB)	0.3 dB	-0.3 dB
Radiated Power via Substitution (dB)	0.7 dB	-0.7 dB
Temperature (degrees C)	0.7°C	-0.7°C
Humidity (% RH)	2.5% RH	-2.5% RH
Voltage (AC)	1.0%	-1.0%
Voltage (DC)	0.7%	-0.7%
Field Strength (dB)	5.2 dB	-5.2 dB
AC Powerline Conducted Emissions (dB)	2.4 dB	-2.4 dB

Test Setup Block Diagrams




2017.1.25


Antenna Port Conducted Measurements

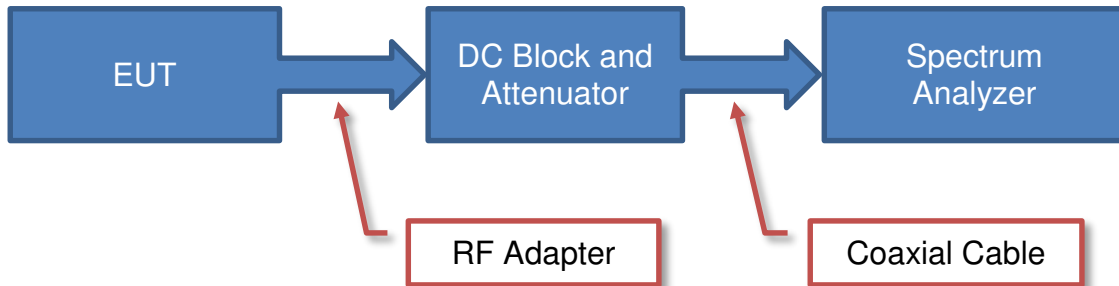

Near Field Test Fixture Measurements

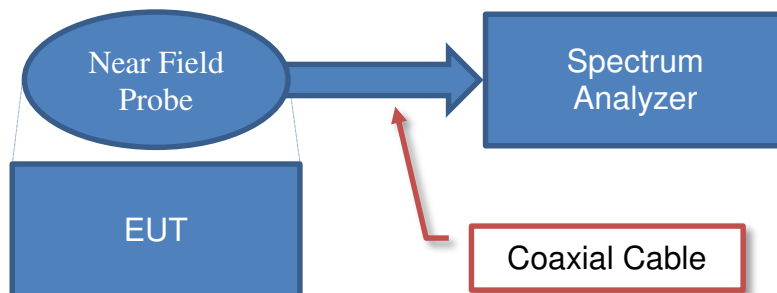

Spurious Radiated Emissions

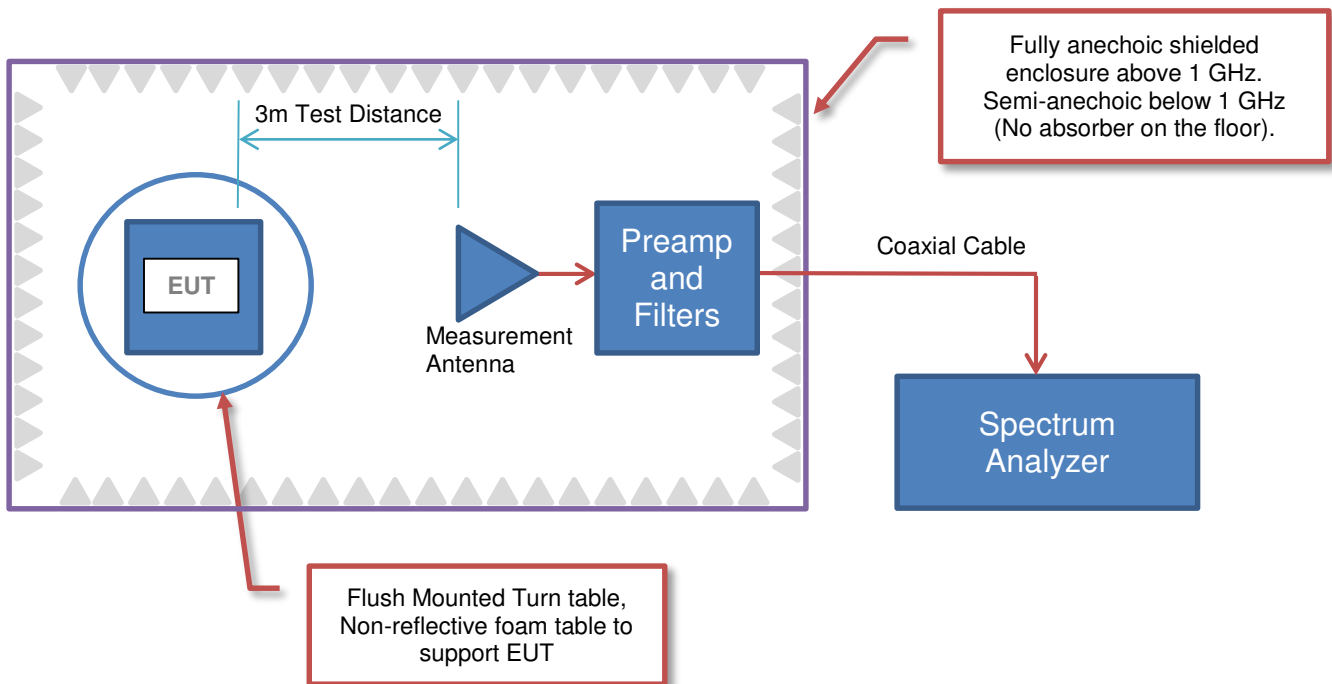



PRODUCT DESCRIPTION

Client and Equipment Under Test (EUT) Information

Company Name:	CommScope
Address:	501 Shenandoah Drive
City, State, Zip:	Shakopee, MN 55379
Test Requested By:	Joshua Wittman
Model:	Prism AWS3 SISO HDM 20 Watt
First Date of Test:	May 23, 2017
Last Date of Test:	February 16, 2018
Receipt Date of Samples:	May 23, 2017
Equipment Design Stage:	Production
Equipment Condition:	No Damage
Purchase Authorization:	Verified

Information Provided by the Party Requesting the Test

Functional Description of the EUT:
20 Watt RF Repeater

Testing Objective:
To demonstrate compliance of the Cellular repeater requirements of FCC Part 27

CONFIGURATIONS



Configuration TECO0042- 1

EUT			
Description	Manufacturer	Model/Part Number	Serial Number
Prism AWS3 SISO HDM 20 Watt (EUT)	CommScope Connectivity LLC	7761388-00-11	459644002

Peripherals in test setup boundary			
Description	Manufacturer	Model/Part Number	Serial Number
Attenuator 1	Inmet Corporation	2N75W-30-296	None
Attenuator 2	Aeroflex / Weinschel	57-30-43	QY541

Remote Equipment Outside of Test Setup Boundary			
Description	Manufacturer	Model/Part Number	Serial Number
Signal Generator 1	Aeroflex	IFR 3413	341007/003
Signal Generator 2	Aeroflex	IFR 3413	341006/056
48V DC Power Supply	TDK-Lambda	SWS300A-48	3LR-140Y11-0106HO411
Laptop	Lenovo	T510	431436U
Power Supply (Laptop)	Lenovo	92P1156	11S92P1156Z1ZDXN8A81AZ
I/O Control Device	CommScope/ADC Telecommunications	1673542-21	MR222P8C

Cables					
Cable Type	Shield	Length (m)	Ferrite	Connection 1	Connection 2
AC Mains Cable (Laptop)	No	1.8m	No	AC Mains	Power Supply (Laptop)
DC Power Cable (Laptop)	No	1.8m	Yes	Power Supply (Laptop)	Laptop
DC Power Cable (I/O Control Device)	No	2.8m	Yes	48V DC Power Supply	I/O Control Device
Fiber Optic Cable	No	>3.0m	No	I/O Control Device	Prism AWS3 SISO HDM 20 Watt
AC Mains Cable (Prism AWS3 SISO HDM 20 Watt)	No	5.0m	No	Prism AWS3 SISO HDM 20 Watt	AC Mains
Output Cable 1	No	1.5m	No	Prism AWS3 SISO HDM 20 Watt	Attenuator 1
Output Cable 2	No	0.9m	No	Prism AWS3 SISO HDM 20 Watt	Attenuator 2
Ethernet Cable	No	1.0m	No	I/O Control Device	Laptop
Coaxial Cable 1	No	1.8m	No	Signal Generator 1	I/O Control Device
Coaxial Cable 2	No	1.8m	No	Signal Generator 2	I/O Control Device
AC Mains Cable (Signal Generator 1)	No	1.8m	No	Signal Generator 1	AC Mains
AC Mains Cable (Signal Generator 2)	No	1.8m	No	Signal Generator 2	AC Mains

CONFIGURATIONS



Configuration TECO0042- 2

EUT			
Description	Manufacturer	Model/Part Number	Serial Number
Prism AWS3 SISO HDM 20 Watt (EUT)	CommScope Connectivity LLC	7761388-00-11	459644002

Peripherals in test setup boundary			
Description	Manufacturer	Model/Part Number	Serial Number
Attenuator 1	Inmet Corporation	2N75W-30-296	None
Attenuator 2	Aeroflex	48-30-34	RCU

Remote Equipment Outside of Test Setup Boundary			
Description	Manufacturer	Model/Part Number	Serial Number
Signal Generator 1	Aeroflex	IFR 3413	341007/003
Signal Generator 2	Aeroflex	IFR 3413	341006/056
48V DC Power Supply	TDK-Lambda	SWS300A-48	3LR-140Y11-0106HO411
Laptop	Lenovo	T510	431436U
Power Supply (Laptop)	Lenovo	92P1156	11S92P1156Z1ZDXN8A81AZ
I/O Control Device	CommScope/ADC Telecommunications	1673542-21	MR222P8C

Cables					
Cable Type	Shield	Length (m)	Ferrite	Connection 1	Connection 2
AC Mains Cable (Laptop)	No	1.8m	No	AC Mains	Power Supply (Laptop)
DC Power Cable (Laptop)	No	1.8m	Yes	Power Supply (Laptop)	Laptop
DC Power Cable (I/O Control Device)	No	2.8m	Yes	48V DC Power Supply	I/O Control Device
Fiber Optic Cable	No	>3.0m	No	I/O Control Device	Prism AWS3 SISO HDM 20 Watt
AC Mains Cable (Prism AWS3 SISO HDM 20 Watt)	No	5.0m	No	Prism AWS3 SISO HDM 20 Watt	AC Mains
Output Cable 1	No	1.5m	No	Prism AWS3 SISO HDM 20 Watt	Attenuator 1
Output Cable 2	No	0.9m	No	Prism AWS3 SISO HDM 20 Watt	Attenuator 2
Ethernet Cable	No	1.0m	No	I/O Control Device	Laptop
Coaxial Cable 1	No	1.8m	No	Signal Generator 1	I/O Control Device
Coaxial Cable 2	No	1.8m	No	Signal Generator 2	I/O Control Device
AC Mains Cable (Signal Generator 1)	No	1.8m	No	Signal Generator 1	AC Mains
AC Mains Cable (Signal Generator 2)	No	1.8m	No	Signal Generator 2	AC Mains

CONFIGURATIONS



Configuration TECO0046- 1

EUT			
Description	Manufacturer	Model/Part Number	Serial Number
Prism AWS3 SISO HDM 20 Watt (EUT)	CommScope Connectivity LLC	7780038-00-11	45087200002

Peripherals in test setup boundary			
Description	Manufacturer	Model/Part Number	Serial Number
Attenuator (1)	Aeroflex	49-30-33	MZ078
Attenuator (2)	Inmet Corp.	75 Watt	2N75W-30-296

Remote Equipment Outside of Test Setup Boundary			
Description	Manufacturer	Model/Part Number	Serial Number
Comm Box	ADC	1673542-21	MR222P8C
AC Converter	TDK	SWS300A-48 EHFP	3LR-140Y11-0105H0411
Signal Generator	Aeroflex	IFR 3414	341007/003

Cables					
Cable Type	Shield	Length (m)	Ferrite	Connection 1	Connection 2
AC Cable (EUT)	No	3 m	No	EUT	AC Mains
Fiber Cable	No	10 m	No	EUT	Comm Box
DC Cable (Comm Box)	No	2 m	No	Comm Box	AC Converter
AC Cable (Conn Bos)	No	3 m	No	AC Converter	AC Mains
AC Cable (Sig Gen)	No	1.5 m	No	Sig Gen	AC Mains
RF Cable	No	1 m	No	Sig Gen	Comm Box
RF Cable	No	1 m	No	EUT	Attenuator (1)
RF Cable	No	1 m	No	EUT	Attenuator (2)

MODIFICATIONS



2017-1-25

Equipment Modifications

Item	Date	Test	Modification	Note	Disposition of EUT
1	5/22/2017	Spurious Radiated Emissions	Tested as delivered to Test Station.	No EMI suppression devices were added or modified during this test.	EUT remained at Element following the test.
2	5/23/2017	Equivalent Isotropic Radiated Power (EIRP)	Tested as delivered to Test Station.	No EMI suppression devices were added or modified during this test.	EUT remained at Element following the test.
3	5/23/2017	Band Edge Compliance	Tested as delivered to Test Station.	No EMI suppression devices were added or modified during this test.	EUT remained at Element following the test.
4	5/24/2017	Frequency Stability	Tested as delivered to Test Station.	No EMI suppression devices were added or modified during this test.	EUT remained at Element following the test.
5	5/24/2017	Emissions Bandwidth	Tested as delivered to Test Station.	No EMI suppression devices were added or modified during this test.	EUT remained at Element following the test.
6	5/24/2017	Peak To Average Ratio	Tested as delivered to Test Station.	No EMI suppression devices were added or modified during this test.	EUT remained at Element following the test.
7	5/24/2017	Spurious Conducted Emissions	Tested as delivered to Test Station.	No EMI suppression devices were added or modified during this test.	EUT remained at Element following the test.
8	5/24/2017	Intermodulation	Tested as delivered to Test Station.	No EMI suppression devices were added or modified during this test.	EUT was taken home by the client following the test.
9	2/16/2018	Spurious Radiated Emissions	Tested as delivered to Test Station.	No EMI suppression devices were added or modified during this test.	Scheduled testing was completed.

EQUIVALENT ISOTROPIC RADIATED POWER (EIRP)



XMI 2017.02.08

Testing was performed using the mode(s) of operation and configuration(s) noted within the report. The individuals and/or the organization requesting the test provided the modes, configurations and settings used to complete the evaluation. The actual test parameters are specified in the test data, this includes items such as investigated frequency range (scanned) and test levels. The testing methods and performance specifications, as well as the test site used for the evaluation are indicated in the test data.

TEST EQUIPMENT

Description	Manufacturer	Model	ID	Last Cal.	Cal. Due
Meter - Power	ETS Lindgren	7002-006	SRE	7/21/2016	7/21/2017
Meter - Power	ETS Lindgren	7002-006	SRA	3/20/2017	3/20/2018
Generator - Signal	Agilent	N5183A	TIK	10/17/2014	10/17/2017
Cable	ESM Cable Corp	TTBJ141 KMKM-72	MNP	NCR	NCR
Attenuator	S.M. Electronics	SA26B-20	RFW	2/14/2017	2/14/2018
Block - DC	Fairview Microwave	SD3379	AMI	9/15/2016	9/15/2017
Analyzer - Spectrum Analyzer	Agilent	E4440A	AAX	3/16/2017	3/16/2018

TEST DESCRIPTION

The measurement was made using a direct connection between the RF output of the EUT and an RF Power Sensor. The spectrum analyzer and signal generator were used to generate an offset for the cables and attenuators. An RF signal generator was used to create the modulated signal(s) listed in the datasheets. These signals were input into the EUT.

The RF output power was measured with the EUT set to the modes called out in the datasheet. The power measurement was made using a direct connection between the RF output of the EUT and an RF Power Sensor which only measures across the high time of the burst of the carrier.

The observed duty cycle was noted but not needed to calculate the EIRP.

$EIRP = \text{Max Measured Power} + \text{Antenna gain (dBi)}$



EQUIVALENT ISOTROPIC RADIATED POWER (EIRP)

TstTx 2017.01.27 XMI 2017.02.08


EUT: Prism AWS3 SISO HDM 20 Watt		Work Order: TECO0042	
Serial Number: 459644002		Date: 05/23/17	
Customer: CommScope		Temperature: 22.3 °C	
Attendees: Josh Wittman		Humidity: 42.7% RH	
Project: None		Barometric Pres.: 1013 mbar	
Tested by: Dustin Sparks		Power: 110VAC/60Hz	
Job Site: MN08			
TEST SPECIFICATIONS			
Test Method			
FCC 27:2017		ANSI/TIA/EIA-603-D-2010	
COMMENTS			
Antenna gain is assumed to be 0 - per customer, the antenna gain will be reevaluated during installation. System is rated at 20W (+43 dBm). Limit is 1640W (62.2 dBm). Both ports were terminated but only one port is active.			
DEVIATIONS FROM TEST STANDARD			
None			
Configuration #	1	Signature <i>Dustin Sparks</i>	
		Avg Cond Pwr Sens 1 (dBm)	Duty Cycle (%)
		Antenna Gain (dBi)	Avg Pwr EIRP (dBm)
		Limit (dBm)	Results
Low Channel (2112.5 MHz) WCDMA		43.27	100
Mid Channel (2145 MHz) WCDMA		43.35	100
High Channel (2177.5 MHz) WCDMA		43.03	100
Low Channel (2115 MHz) LTE 10MHz		43.12	99.228
Mid Channel (2145 MHz) LTE 10MHz		43.47	99.44
High Channel (2175 MHz) LTE 10MHz		43.33	100
		0	43.27
		0	43.35
		0	43.03
		0	43.12
		0	43.47
		0	43.33
			62.2
			62.2
			62.2
			N/A
			N/A
			N/A
			N/A
			Pass
			Pass
			Pass
			N/A
			N/A
			N/A

EQUIVALENT ISOTROPIC RADIATED POWER (EIRP)




TbTx 2017.01.27 XMI 2017.02.08

Low Channel (2112.5 MHz) WCDMA						
Avg Cond Pwr Sens 1 (dBm)	Duty Cycle (%)	Antenna Gain (dBi)	Avg Pwr EIRP (dBm)	Limit (dBm)	Results	
43.27	100	0	43.27	62.2	Pass	

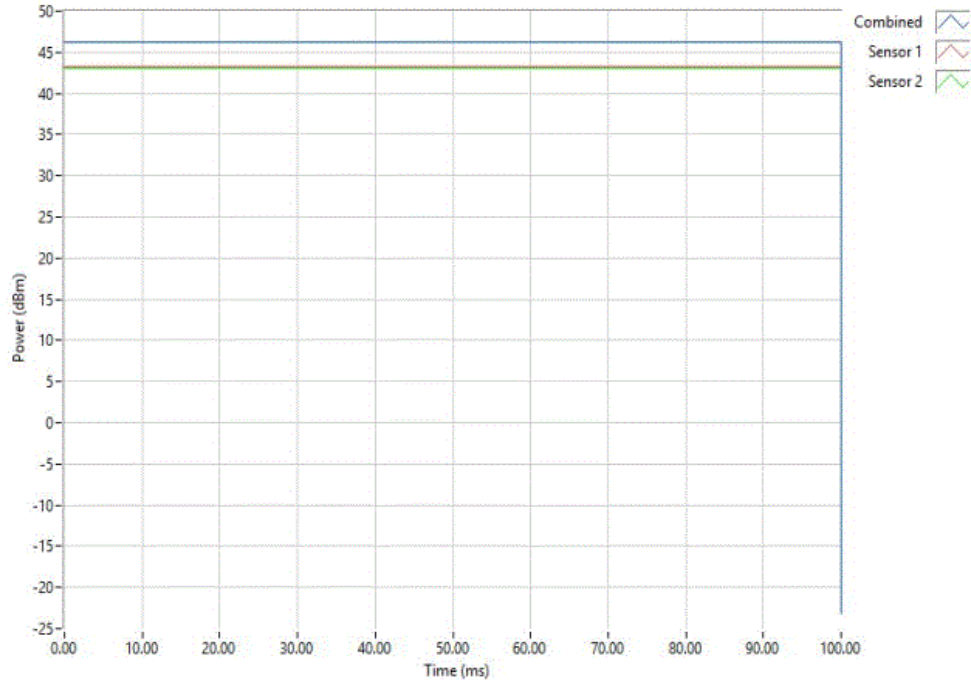

Mid Channel (2145 MHz) WCDMA						
Avg Cond Pwr Sens 1 (dBm)	Duty Cycle (%)	Antenna Gain (dBi)	Avg Pwr EIRP (dBm)	Limit (dBm)	Results	
43.35	100	0	43.35	62.2	Pass	

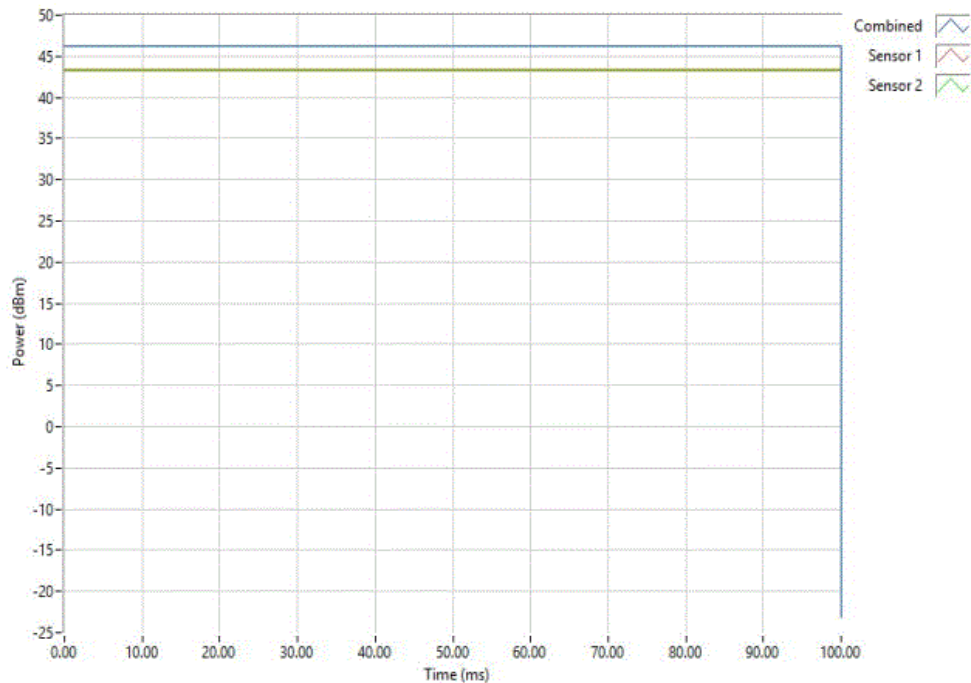


EQUIVALENT ISOTROPIC RADIATED POWER (EIRP)



TbTx 2017.01.27 XMt 2017.02.08

High Channel (2177.5 MHz) WCDMA						
	Avg Cond Pwr Sens 1 (dBm)	Duty Cycle (%)	Antenna Gain (dBi)	Avg Pwr EIRP (dBm)	Limit (dBm)	Results
	43.03	100	0	43.03	62.2	Pass

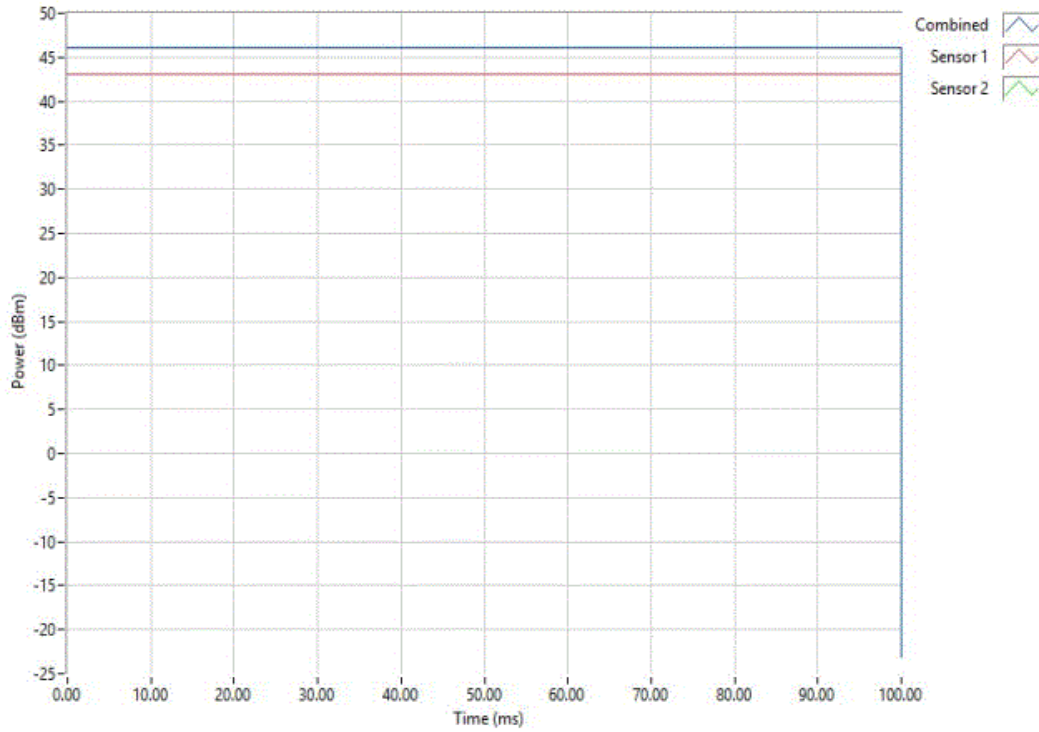


EQUIVALENT ISOTROPIC RADIATED POWER (EIRP)




TbTx 2017.01.27 XMI 2017.02.08

Low Channel (2115 MHz) LTE 10MHz						
Avg Cond Pwr Sens 1 (dBm)	Duty Cycle (%)	Antenna Gain (dBi)	Avg Pwr EIRP (dBm)	Limit (dBm)	Results	
43.12	99.228	0	43.12	N/A	N/A	

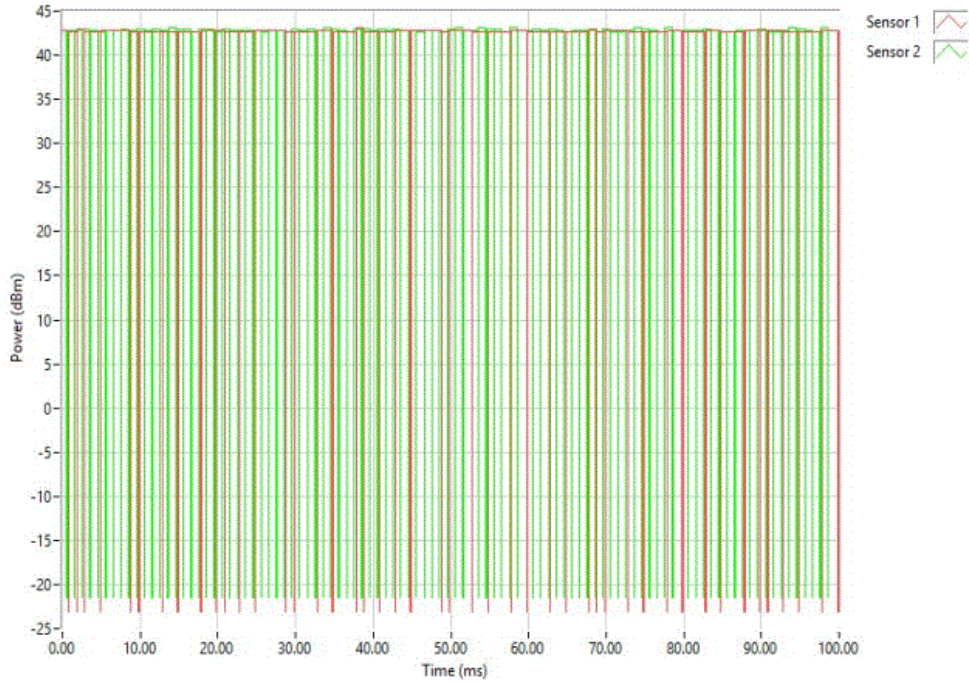

Mid Channel (2145 MHz) LTE 10MHz						
Avg Cond Pwr Sens 1 (dBm)	Duty Cycle (%)	Antenna Gain (dBi)	Avg Pwr EIRP (dBm)	Limit (dBm)	Results	
43.47	99.44	0	43.47	N/A	N/A	

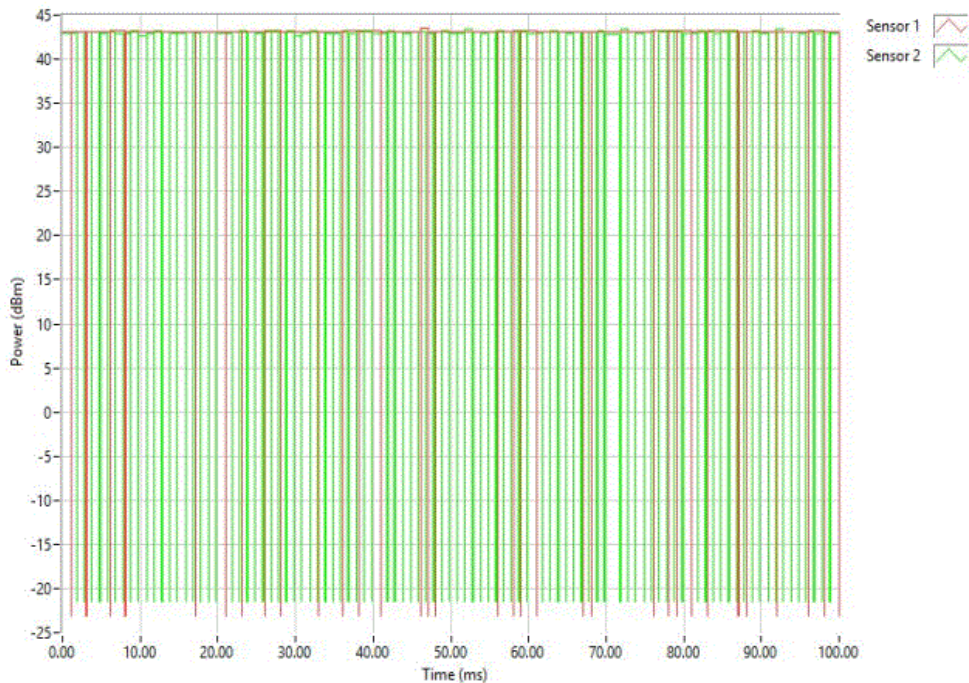


EQUIVALENT ISOTROPIC RADIATED POWER (EIRP)



TdTx 2017.01.27 XMI 2017.02.08

High Channel (2175 MHz) LTE 10MHz						
Avg Cond Pwr	Duty	Antenna	Avg Pwr	Limit	Results	
Sens 1 (dBm)	Cycle (%)	Gain (dBi)	EIRP (dBm)	(dBm)		
43.33	100	0	43.33	N/A	N/A	

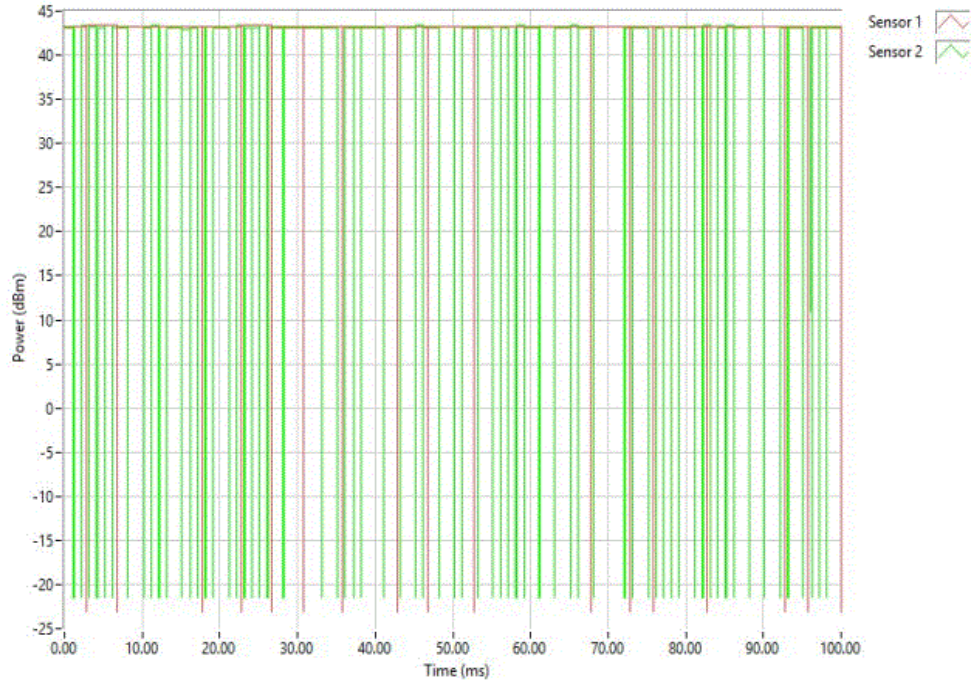

PEAK TO AVERAGE RATIO



XMI 2017.02.08

Testing was performed using the mode(s) of operation and configuration(s) noted within the report. The individuals and/or the organization requesting the test provided the modes, configurations and settings used to complete the evaluation. The actual test parameters are specified in the test data, this includes items such as investigated frequency range (scanned) and test levels. The testing methods and performance specifications, as well as the test site used for the evaluation are indicated in the test data.

TEST EQUIPMENT

Description	Manufacturer	Model	ID	Last Cal.	Cal. Due
Attenuator	Aeroflex	48-30-34	RCU	9/15/2016	9/15/2017
Generator - Signal	Agilent	N5183A	TIK	10/17/2014	10/17/2017
Cable	ESM Cable Corp	TTBJ141 KMKM-72	MNP	NCR	NCR
Attenuator	S.M. Electronics	SA26B-20	RFW	2/14/2017	2/14/2018
Block - DC	Fairview Microwave	SD3379	AMI	9/15/2016	9/15/2017
Analyzer - Spectrum Analyzer	Agilent	E4440A	AAX	3/16/2017	3/16/2018

TEST DESCRIPTION

The measurement was made using a direct connection between the RF output of the EUT and a spectrum analyzer. An RF signal generator was used to create the modulated signal(s) listed in the datasheets. These signals were input into the EUT.

Because the conducted Output Power was measured using a RMS Average detector, the Peak to Average Ratio was measured to show that the maximum peak-max-hold spectrum to the maximum of the average spectrum does not exceed 13 dB.

The spectrum analyzer settings were as follows:

Span set to encompass the entire emission bandwidth, centered on the transmit channel.

The largest difference between the following two screen captures/traces was calculated:

➤ 1st Screen Capture/Trace: Peak detector and trace max-hold.

➤ 2nd Screen Capture/Trace: The same procedure and settings as was used for conducted Output Power.

PEAK TO AVERAGE RATIO



TbTx 2017.01.27 XMi 2017.02.08


EUT: Prism AWS3 SISO HDM 20 Watt		Work Order: TECO0042	
Serial Number: 459644002		Date: 05/24/17	
Customer: CommScope		Temperature: 21.6 °C	
Attendees: Josh Wittman		Humidity: 47.3% RH	
Project: None		Barometric Pres.: 1008 mbar	
Tested by: Dustin Sparks		Power: 110VAC/60Hz	
		Job Site: MN08	
TEST SPECIFICATIONS			
FCC 27:2017		Test Method	
		ANSI/TIA/EIA-603-D-2010	
COMMENTS			
Antenna gain is assumed to be 0 - per customer, the antenna gain will be reevaluated during installation. System is rated at 20W (+43 dBm) per port. Both ports were terminated but only one port is active.			
DEVIATIONS FROM TEST STANDARD			
None			
Configuration #	2	Signature <i>Dustin Sparks</i>	
		Value (dB)	Limit < (dB) Results
WCDMA	Mid Channel, 2145 MHz	8.869	13 Pass
LTE 10MHz	Mid Channel, 2145 MHz	11.986	13 Pass

PEAK TO AVERAGE RATIO




TMTX 2017.01.27 XMI 2017.02.08

WCDMA, Mid Channel, 2145 MHz			
	Value (dB)	Limit < (dB)	Results
	8.869	13	Pass

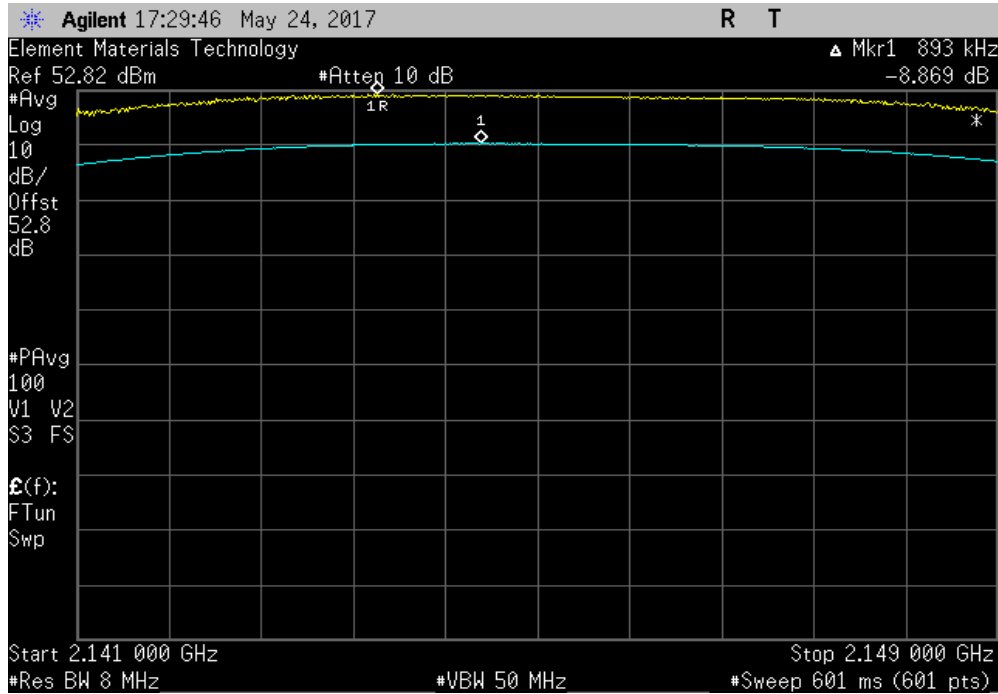

LTE 10MHz, Mid Channel, 2145 MHz			
	Value (dB)	Limit < (dB)	Results
	11.986	13	Pass

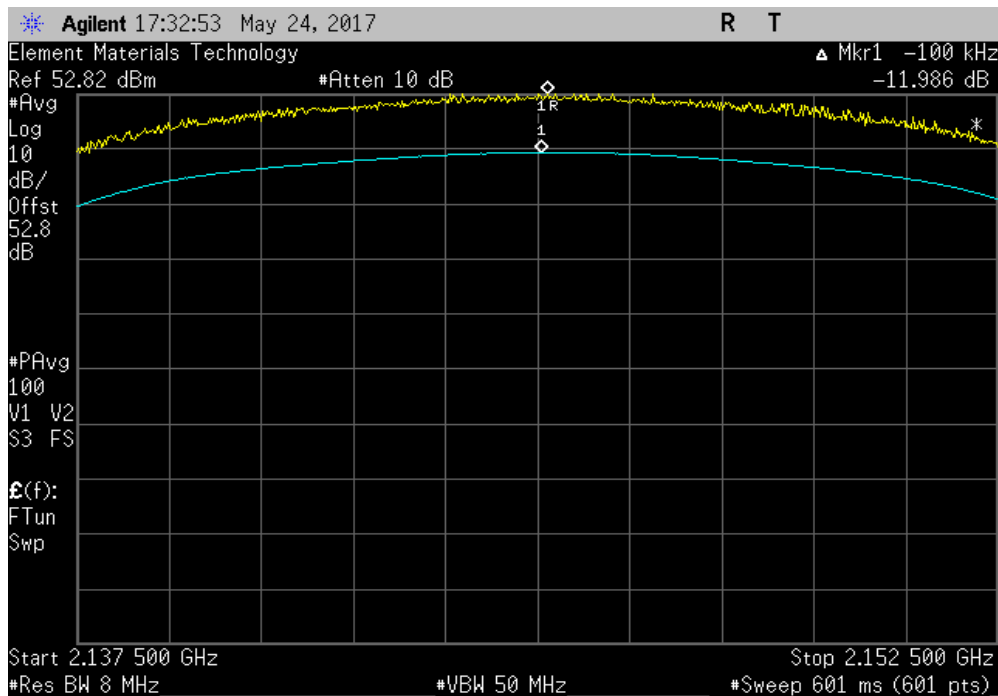

FREQUENCY STABILITY



XMR 2017.02.08

Testing was performed using the mode(s) of operation and configuration(s) noted within the report. The individuals and/or the organization requesting the test provided the modes, configurations and settings used to complete the evaluation. The actual test parameters are specified in the test data, this includes items such as investigated frequency range (scanned) and test levels. The testing methods and performance specifications, as well as the test site used for the evaluation are indicated in the test data.

TEST EQUIPMENT

Description	Manufacturer	Model	ID	Last Cal.	Cal. Due
Meter - Multimeter	Fluke	117	MLS	1/23/2017	1/23/2020
Attenuator	Aeroflex	48-30-34	RCU	9/15/2016	9/15/2017
Chamber - Temperature/Humidity	Cincinnati Sub Zero (CSZ)	ZPH-32-3.5-	TBF	NCR	NCR
Thermometer	Omega Engineering, Inc.	HH311	DUB	11/3/2014	11/3/2017
Generator - Signal	Agilent	N5183A	TIK	10/17/2014	10/17/2017
Cable	ESM Cable Corp	TTBJ141 KMKM-72	MNP	NCR	NCR
Attenuator	S.M. Electronics	SA26B-20	RFW	2/14/2017	2/14/2018
Block - DC	Fairview Microwave	SD3379	AMI	9/15/2016	9/15/2017
Analyzer - Spectrum Analyzer	Agilent	E4440A	AAX	3/16/2017	3/16/2018

TEST DESCRIPTION

The measurement was made using a direct connection between the RF output of the EUT and a spectrum analyzer. An RF signal generator was used to create the modulated signal(s) listed in the datasheets. These signals were input into the EUT.

Measurements were made at the edges of the main transmit bands as called out on the data sheets. Testing was done with an absence of modulation in a CW mode of operation.

The primary supply voltage was varied from 85 % to 115% of the nominal voltage Using a temperature chamber, the transmit frequency was recorded at the extremes of the specified temperature range (-30 ° to +50° C) and at 10°C intervals.

Per the requirements of FCC Part 27.54:

“The frequency stability shall be sufficient to ensure that the fundamental emissions stay within the authorized bands of operation.”

No specific limits are provided in either FCC 27.54, the product specific rule part, or FCC 2.1055, the equipment authorization procedure for testing frequency stability. While there are no limits called out, any results less than 1ppm will still allow the radio to be operating within the band.

FREQUENCY STABILITY



TbTx 2017.01.27 XMI 2017.02.08


EUT: Prism AWS3 SISO HDM 20 Watt		Work Order: TECO0042	
Serial Number: 459644002		Date: 05/24/17	
Customer: CommScope		Temperature: 21.5 °C	
Attendees: Josh Wittman		Humidity: 47% RH	
Project: None		Barometric Pres.: 1008 mbar	
Tested by: Dustin Sparks		Power: 120VAC/60Hz	
		Job Site: MN08	
TEST SPECIFICATIONS			
FCC 27:2017		Test Method	
		ANSI/TIA/EIA-603-D-2010	
COMMENTS			
System is rated at 20W (+43 dBm) per port. Both ports were terminated but only one port is active.			
DEVIATIONS FROM TEST STANDARD			
None			
Configuration #	2	Signature <i>Dustin Sparks</i>	
		Measured Value (MHz)	Assigned Value (MHz)
		Error (ppm)	Limit (ppm)
			Results
+50°C			
	2112.5 MHz	2112.500027	2112.5
	2115 MHz	2115.000047	2115.0
	2145 MHz	2145.000043	2145.0
	2175 MHz	2175.000036	2175.0
	2177.5 MHz	2177.500038	2177.5
+40°C			
	2112.5 MHz	2112.500011	2112.5
	2115 MHz	2115.000025	2115.0
	2145 MHz	2145.000009	2145.0
	2175 MHz	2175.000019	2175.0
	2177.5 MHz	2177.500021	2177.5
+30°C			
	2112.5 MHz	2112.500044	2112.5
	2115 MHz	2115.000046	2115.0
	2145 MHz	2145.000043	2145.0
	2175 MHz	2175.000003	2175.0
	2177.5 MHz	2177.500038	2177.5
+20°C			
	2112.5 MHz	2112.500044	2112.5
	2115 MHz	2115.000042	2115.0
	2145 MHz	2145.000043	2145.0
	2175 MHz	2175.000053	2175.0
	2177.5 MHz	2177.500038	2177.5
+10°C			
	2112.5 MHz	2112.500027	2112.5
	2115 MHz	2115.000046	2115.0
	2145 MHz	2145.000043	2145.0
	2175 MHz	2175.000052	2175.0
	2177.5 MHz	2177.500038	2177.5
0°C			
	2112.5 MHz	2112.500044	2112.5
	2115 MHz	2115.000046	2115.0
	2145 MHz	2145.000043	2145.0
	2175 MHz	2175.000053	2175.0
	2177.5 MHz	2177.500038	2177.5
-10°C			
	2112.5 MHz	2112.500044	2112.5
	2115 MHz	2115.000042	2115.0
	2145 MHz	2145.00001	2145.0
	2175 MHz	2175.000036	2175.0
	2177.5 MHz	2177.500055	2177.5
-20°C			
	2112.5 MHz	2112.500044	2112.5
	2115 MHz	2115.000042	2115.0
	2145 MHz	2145.000009	2145.0
	2175 MHz	2175.000036	2175.0
	2177.5 MHz	2177.500038	2177.5
-30°C			
	2112.5 MHz	2112.500044	2112.5
	2115 MHz	2115.000046	2115.0
	2145 MHz	2145.000043	2145.0
	2175 MHz	2175.000036	2175.0
	2177.5 MHz	2177.500038	2177.5
Normal Voltage			
	2112.5 MHz	2112.500044	2112.5
	2115 MHz	2115.000025	2115.0
	2145 MHz	2145.000043	2145.0
	2175 MHz	2175.000053	2175.0
	2177.5 MHz	2177.500055	2177.5
Extreme Voltage (102VAC/60Hz)			
	2112.5 MHz	2112.500044	2112.5
	2115 MHz	2115.000042	2115.0
	2145 MHz	2145.000043	2145.0
	2175 MHz	2175.000036	2175.0
	2177.5 MHz	2177.500038	2177.5
Extreme Voltage (138VAC/60Hz)			
	2112.5 MHz	2112.500044	2112.5
	2115 MHz	2115.000042	2115.0
	2145 MHz	2145.000043	2145.0
	2175 MHz	2175.000036	2175.0
	2177.5 MHz	2177.500038	2177.5

FREQUENCY STABILITY




TMTx 2017.01.27 XMI 2017.02.08

+50°C, 2112.5 MHz						
	Measured Value (MHz)	Assigned Value (MHz)	Error (ppm)	Limit (ppm)	Results	
	2112.500027	2112.5	0.013	1	Pass	

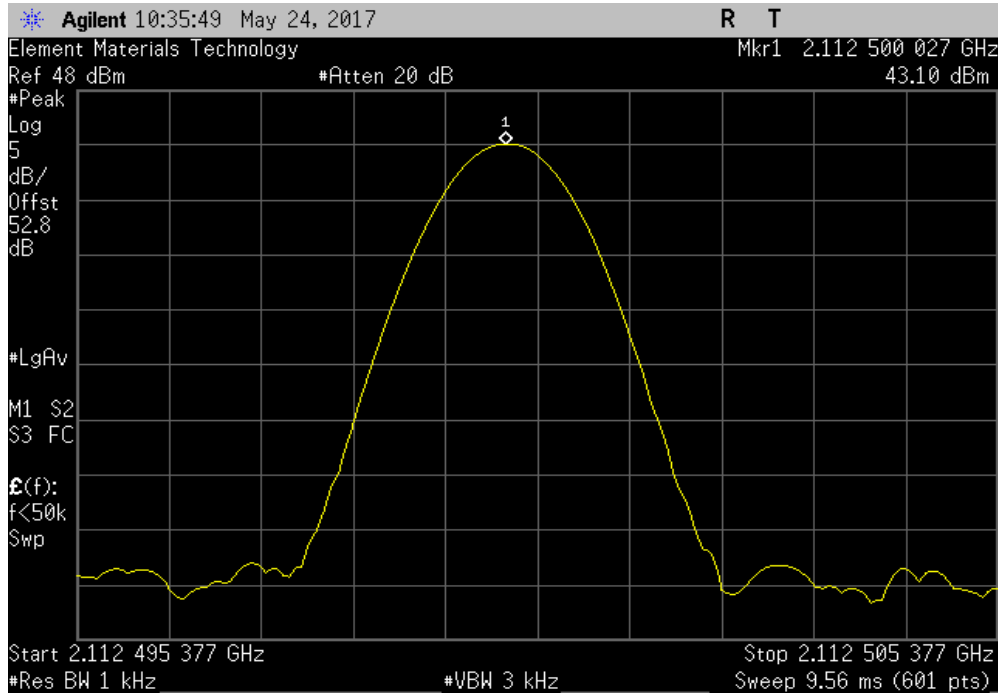

+50°C, 2115 MHz						
	Measured Value (MHz)	Assigned Value (MHz)	Error (ppm)	Limit (ppm)	Results	
	2115.000047	2115	0.022	1	Pass	

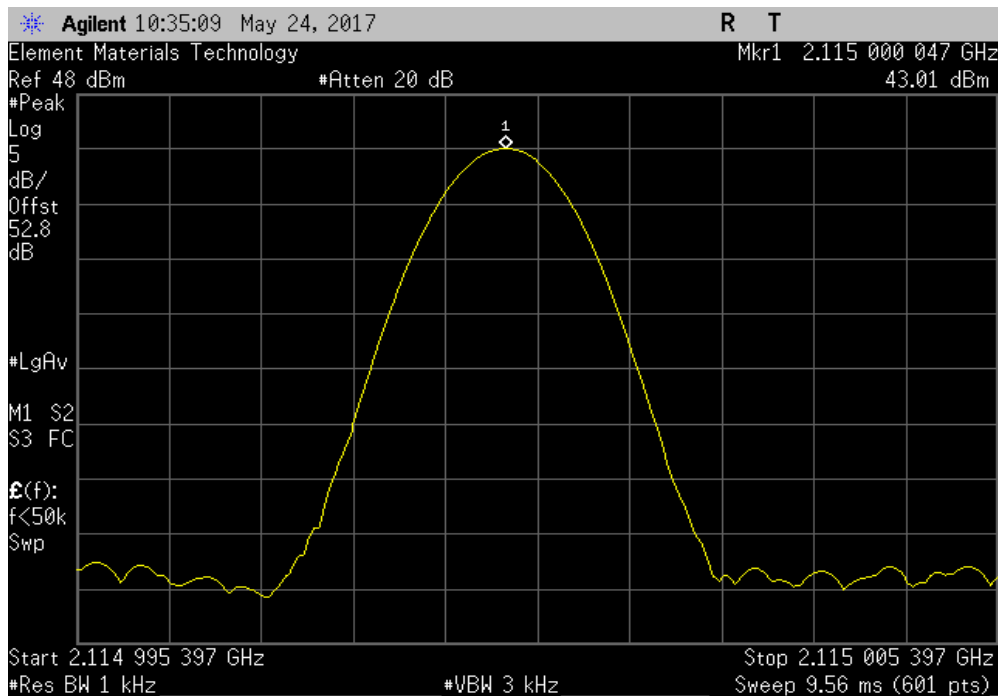


FREQUENCY STABILITY




TMTx 2017.01.27 XMI 2017.02.08

+50°C, 2145 MHz						
	Measured Value (MHz)	Assigned Value (MHz)	Error (ppm)	Limit (ppm)	Results	
	2145.000043	2145	0.020	1	Pass	

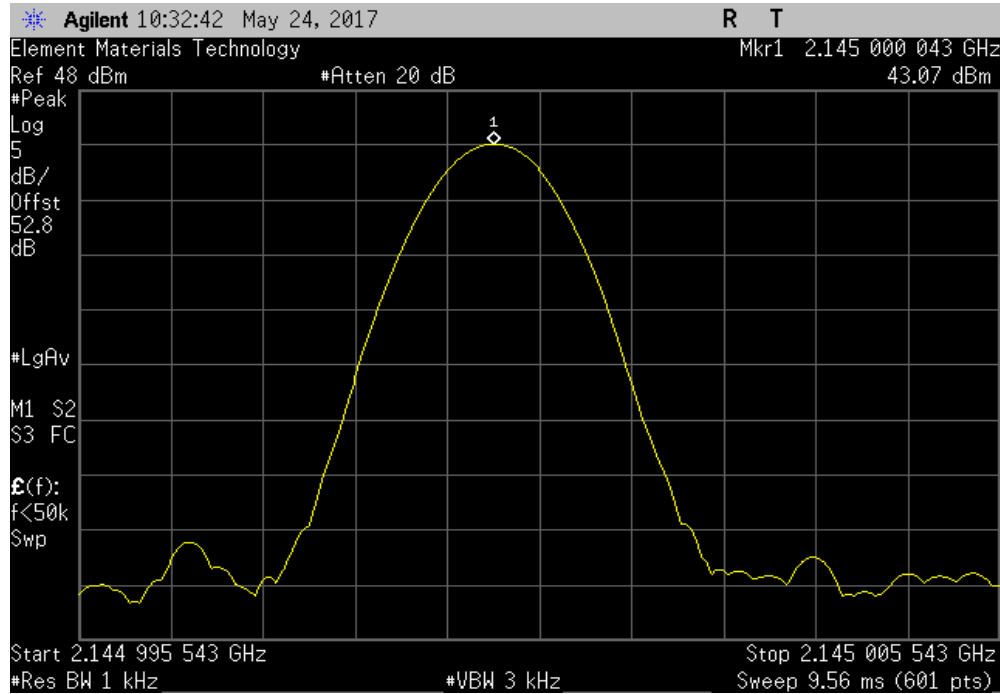

+50°C, 2175 MHz						
	Measured Value (MHz)	Assigned Value (MHz)	Error (ppm)	Limit (ppm)	Results	
	2175.000036	2175	0.017	1	Pass	

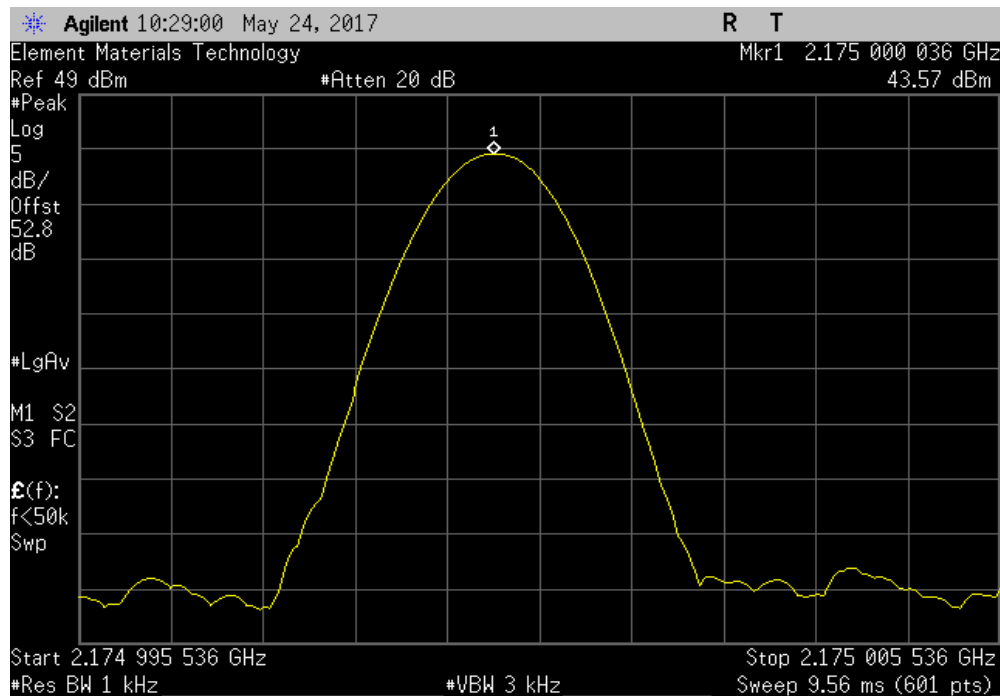


FREQUENCY STABILITY




TMTx 2017.01.27 XMI 2017.02.08

+50°C, 2177.5 MHz						
	Measured Value (MHz)	Assigned Value (MHz)	Error (ppm)	Limit (ppm)	Results	
	2177.500038	2177.5	0.017	1	Pass	

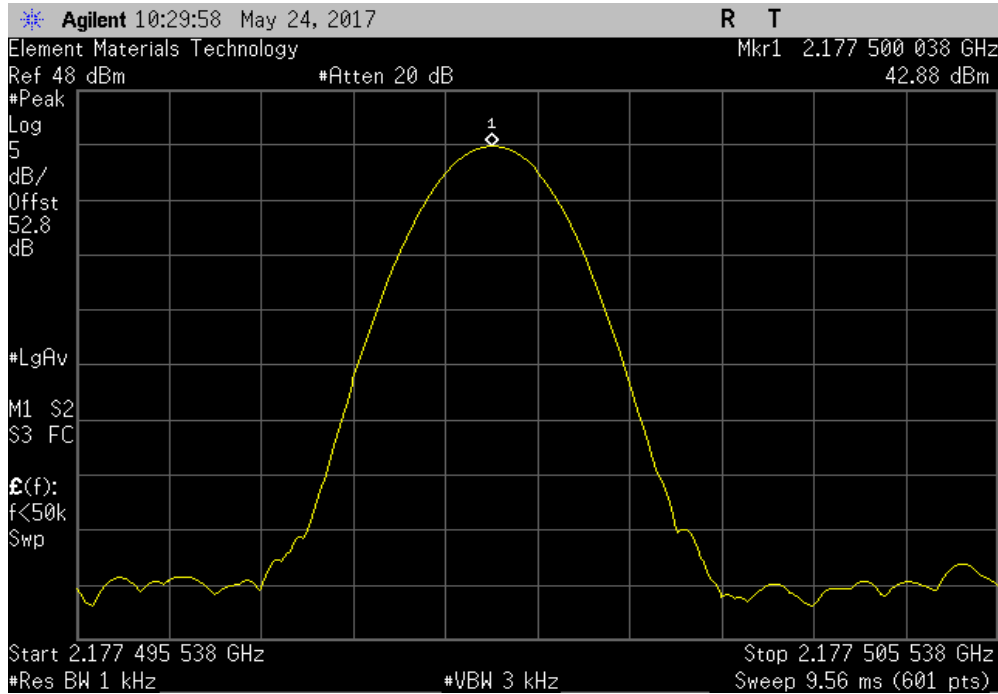

+40°C, 2112.5 MHz						
	Measured Value (MHz)	Assigned Value (MHz)	Error (ppm)	Limit (ppm)	Results	
	2112.500011	2112.5	0.005	1	Pass	

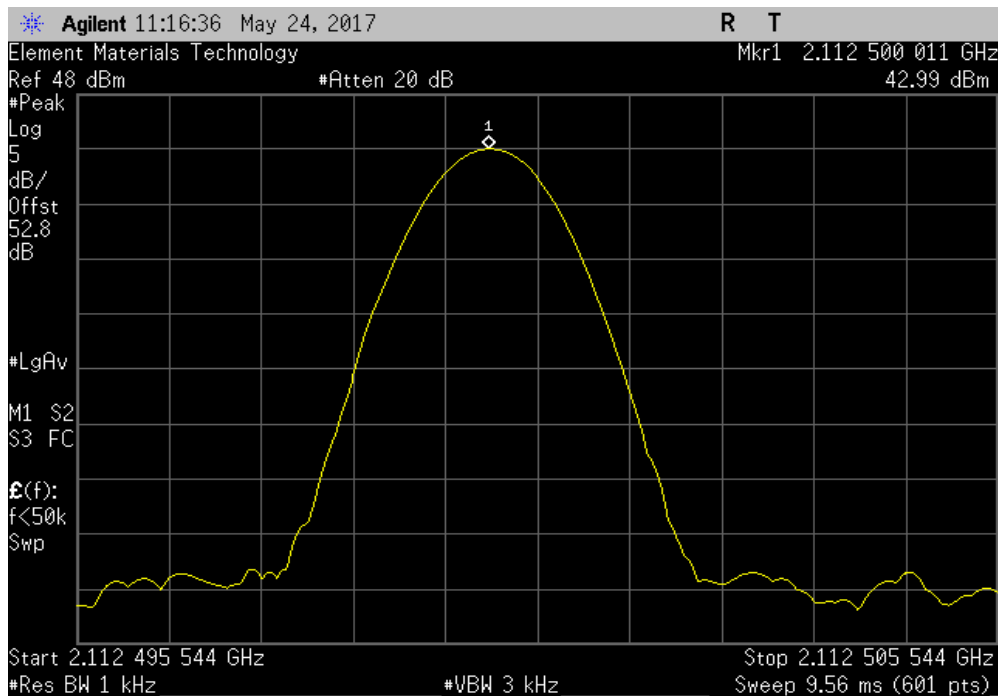


FREQUENCY STABILITY




TMTx 2017.01.27 XMI 2017.02.08

+40°C, 2115 MHz						
	Measured Value (MHz)	Assigned Value (MHz)	Error (ppm)	Limit (ppm)	Results	
	2115.000025	2115	0.012	1	Pass	

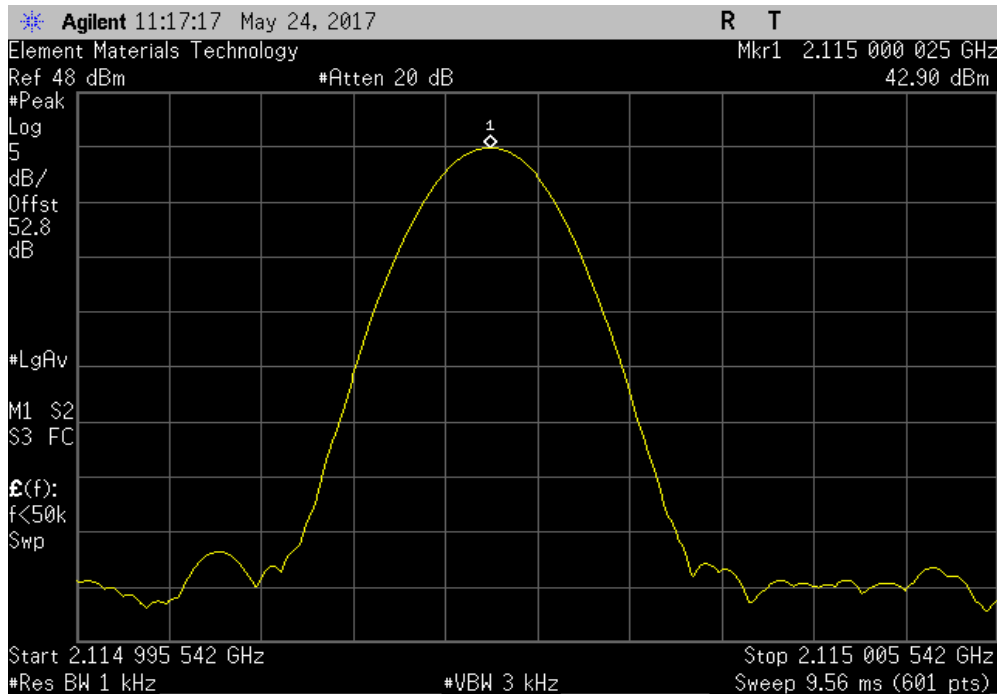

+40°C, 2145 MHz						
	Measured Value (MHz)	Assigned Value (MHz)	Error (ppm)	Limit (ppm)	Results	
	2145.000009	2145	0.004	1	Pass	

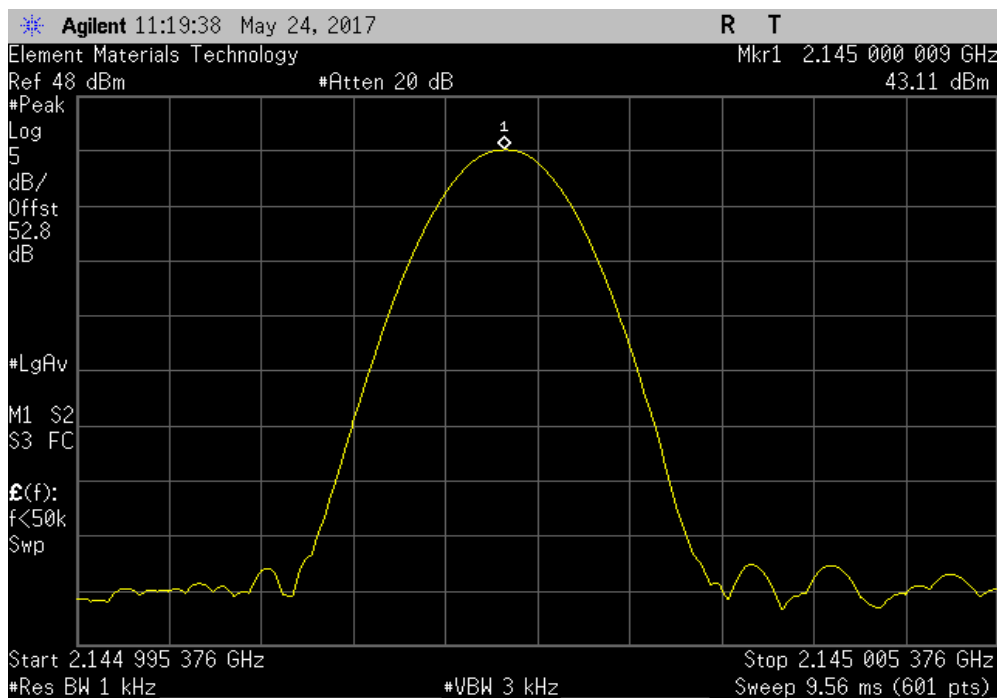


FREQUENCY STABILITY




TMTx 2017.01.27 XMI 2017.02.08

+40°C, 2175 MHz					
Measured Value (MHz)	Assigned Value (MHz)	Error (ppm)	Limit (ppm)	Results	
2175.000019	2175	0.009	1	Pass	

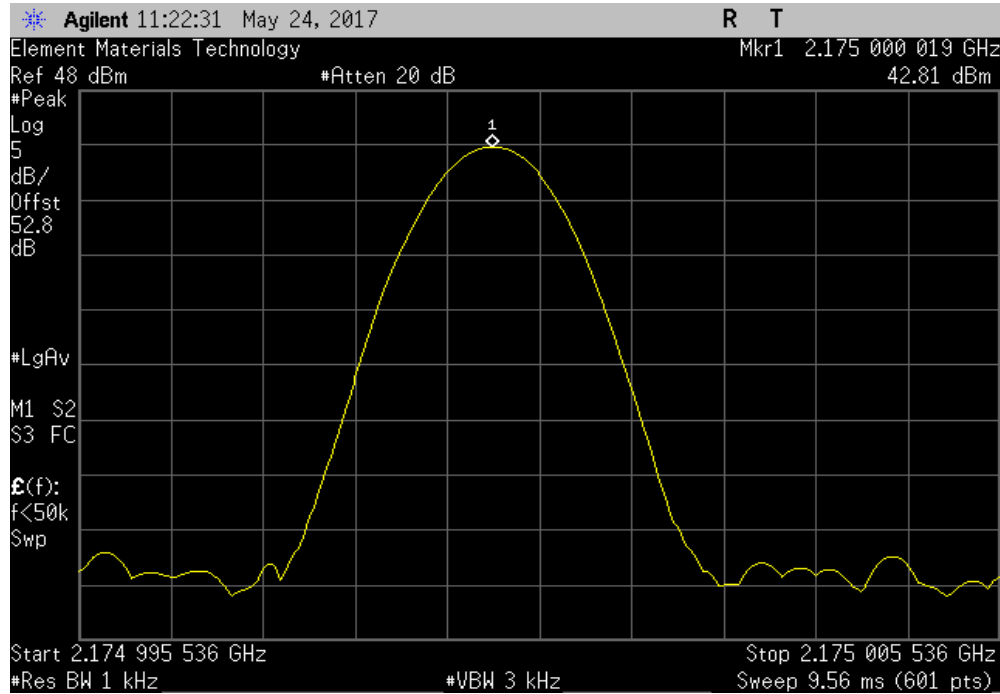

+40°C, 2177.5 MHz					
Measured Value (MHz)	Assigned Value (MHz)	Error (ppm)	Limit (ppm)	Results	
2177.500021	2177.5	0.010	1	Pass	

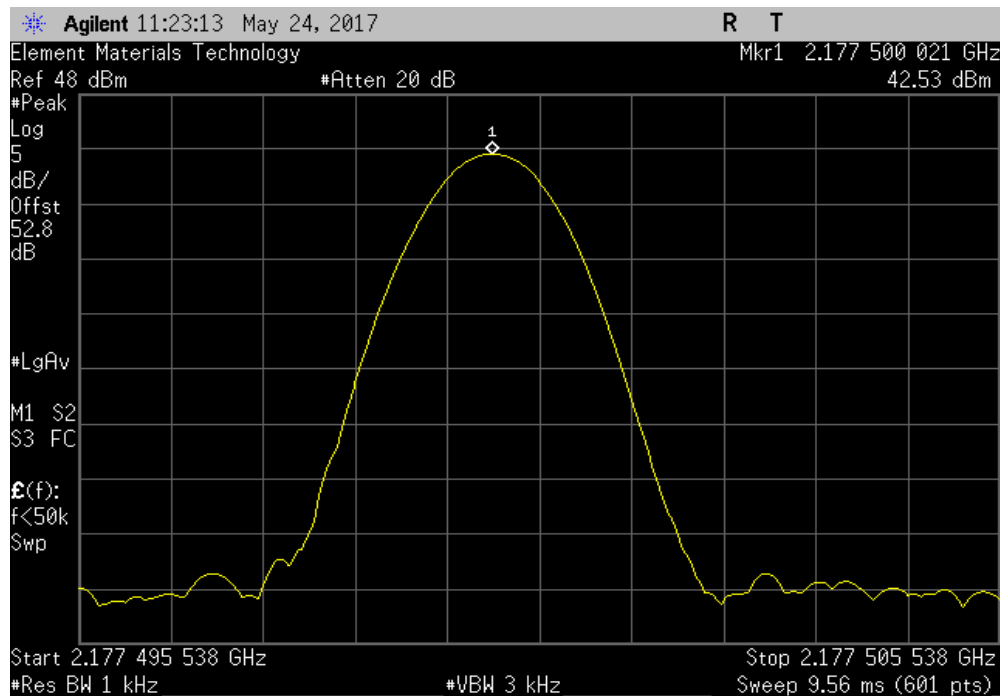


FREQUENCY STABILITY




TMTx 2017.01.27 XMI 2017.02.08

+30°C, 2112.5 MHz						
	Measured Value (MHz)	Assigned Value (MHz)	Error (ppm)	Limit (ppm)	Results	
	2112.500044	2112.5	0.021	1	Pass	

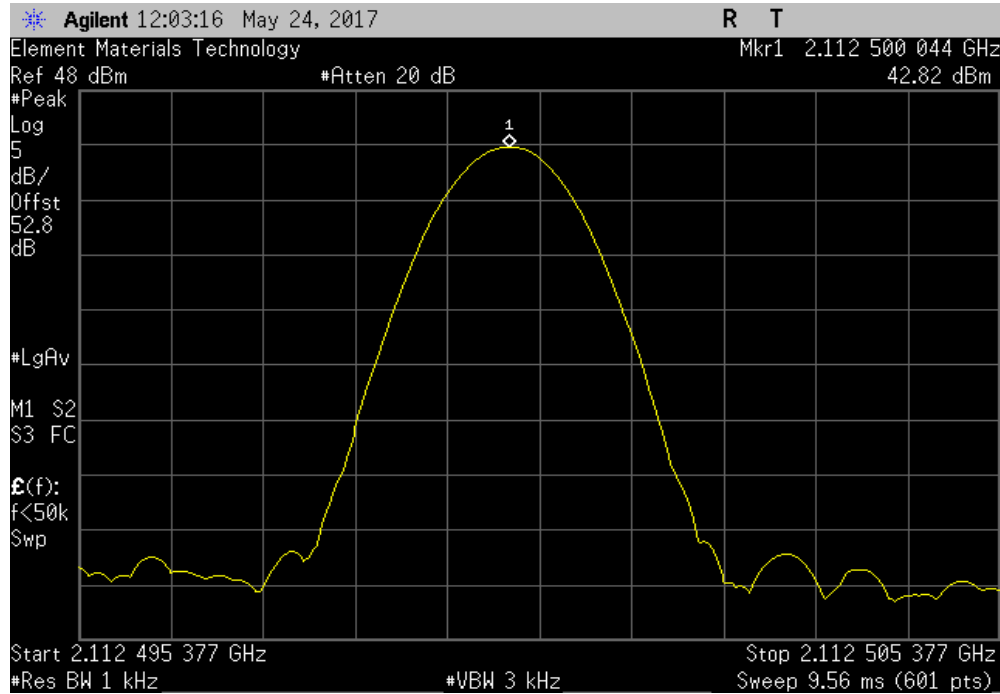

+30°C, 2115 MHz						
	Measured Value (MHz)	Assigned Value (MHz)	Error (ppm)	Limit (ppm)	Results	
	2115.000046	2115	0.022	1	Pass	

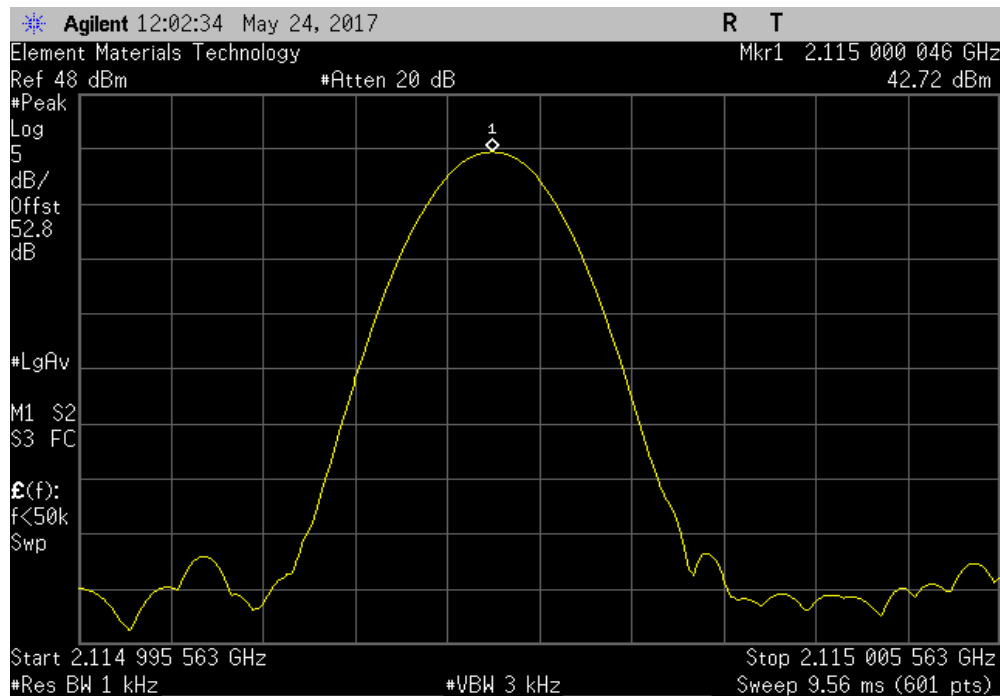


FREQUENCY STABILITY




TMTx 2017.01.27 XMI 2017.02.08

+30°C, 2145 MHz						
	Measured Value (MHz)	Assigned Value (MHz)	Error (ppm)	Limit (ppm)	Results	
	2145.000043	2145	0.020	1	Pass	

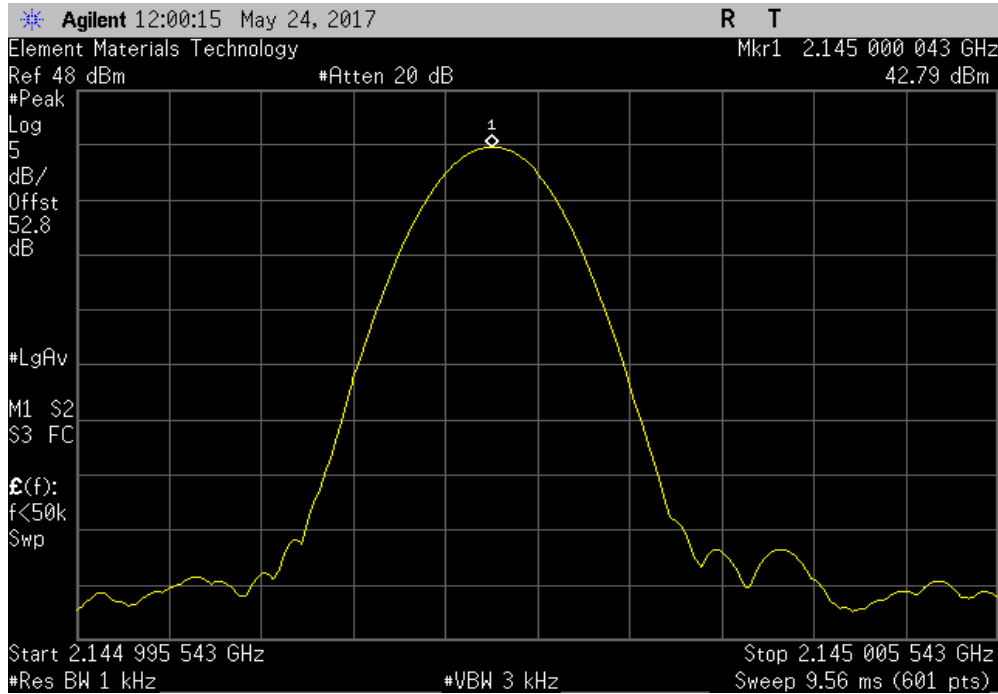

+30°C, 2175 MHz						
	Measured Value (MHz)	Assigned Value (MHz)	Error (ppm)	Limit (ppm)	Results	
	2175.000003	2175	0.001	1	Pass	

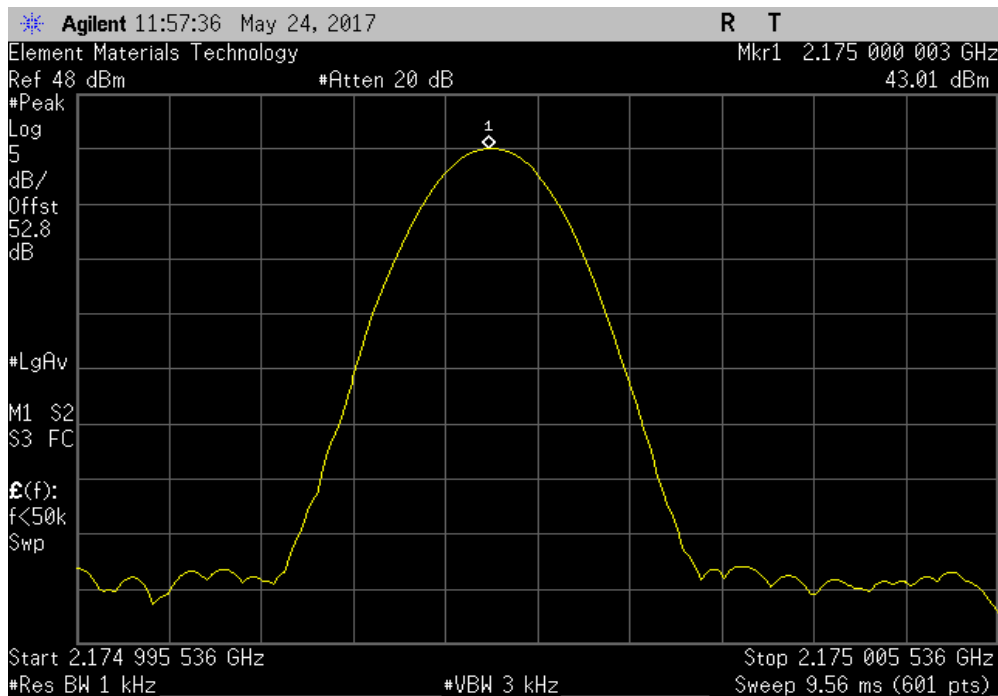


FREQUENCY STABILITY




TMTx 2017.01.27 XMI 2017.02.08

+30°C, 2177.5 MHz						
	Measured Value (MHz)	Assigned Value (MHz)	Error (ppm)	Limit (ppm)	Results	
	2177.500038	2177.5	0.017	1	Pass	

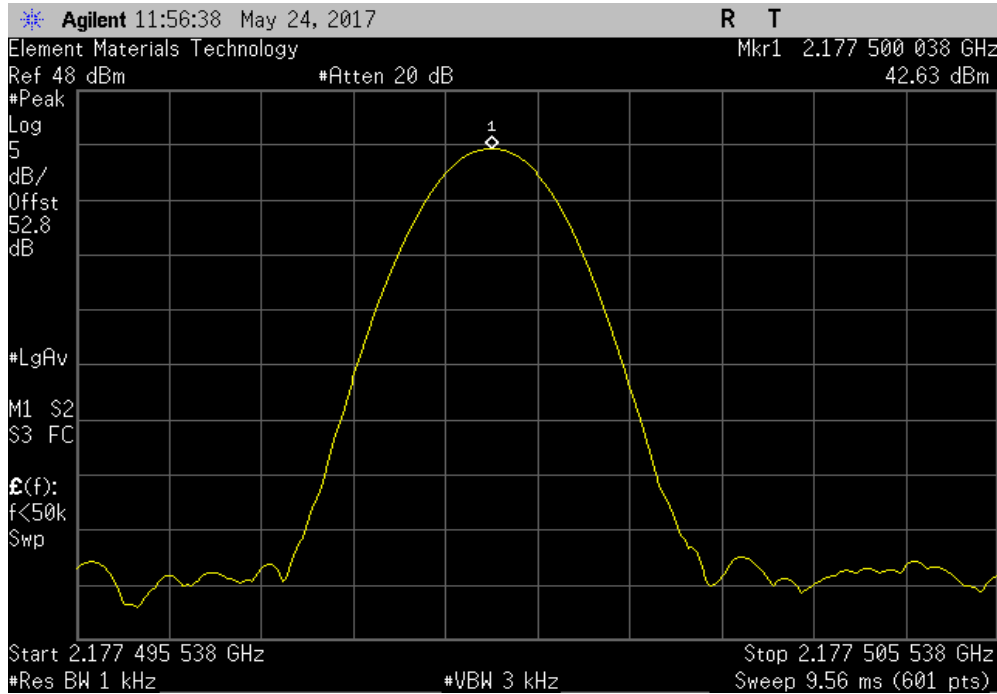

+20°C, 2112.5 MHz						
	Measured Value (MHz)	Assigned Value (MHz)	Error (ppm)	Limit (ppm)	Results	
	2112.500044	2112.5	0.021	1	Pass	

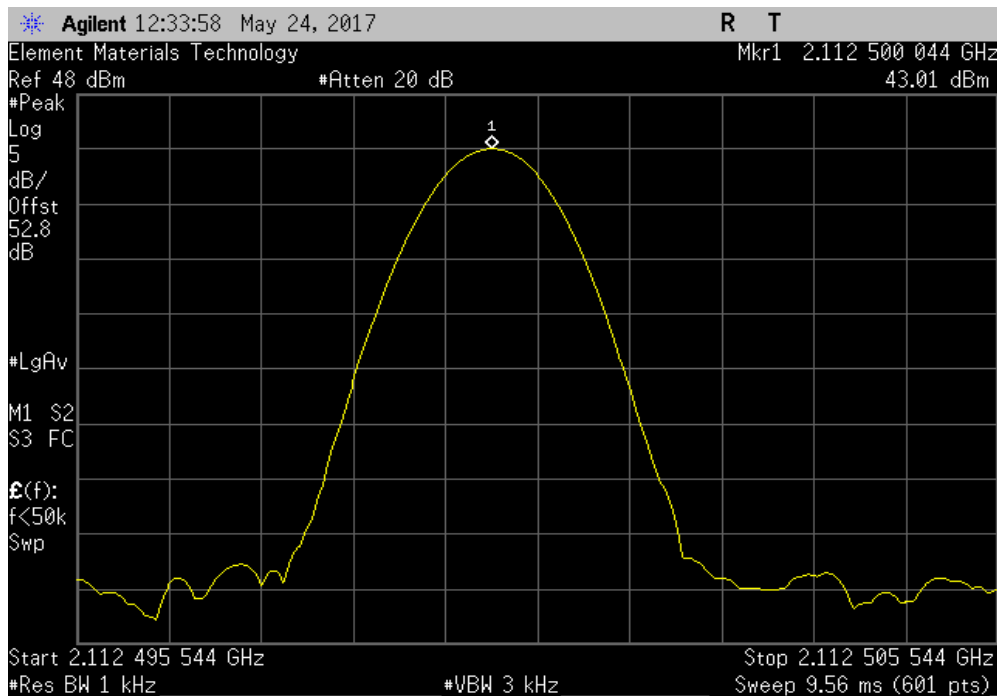


FREQUENCY STABILITY




TMTx 2017.01.27 XMI 2017.02.08

+20°C, 2115 MHz						
	Measured Value (MHz)	Assigned Value (MHz)	Error (ppm)	Limit (ppm)	Results	
	2115.000042	2115	0.020	1	Pass	

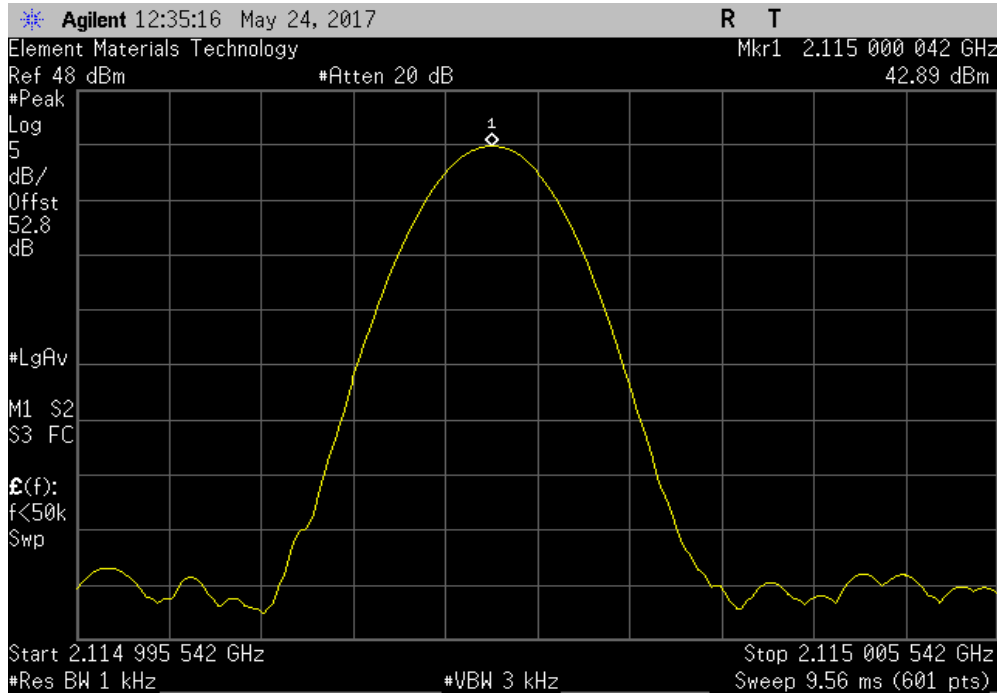

+20°C, 2145 MHz						
	Measured Value (MHz)	Assigned Value (MHz)	Error (ppm)	Limit (ppm)	Results	
	2145.000043	2145	0.020	1	Pass	

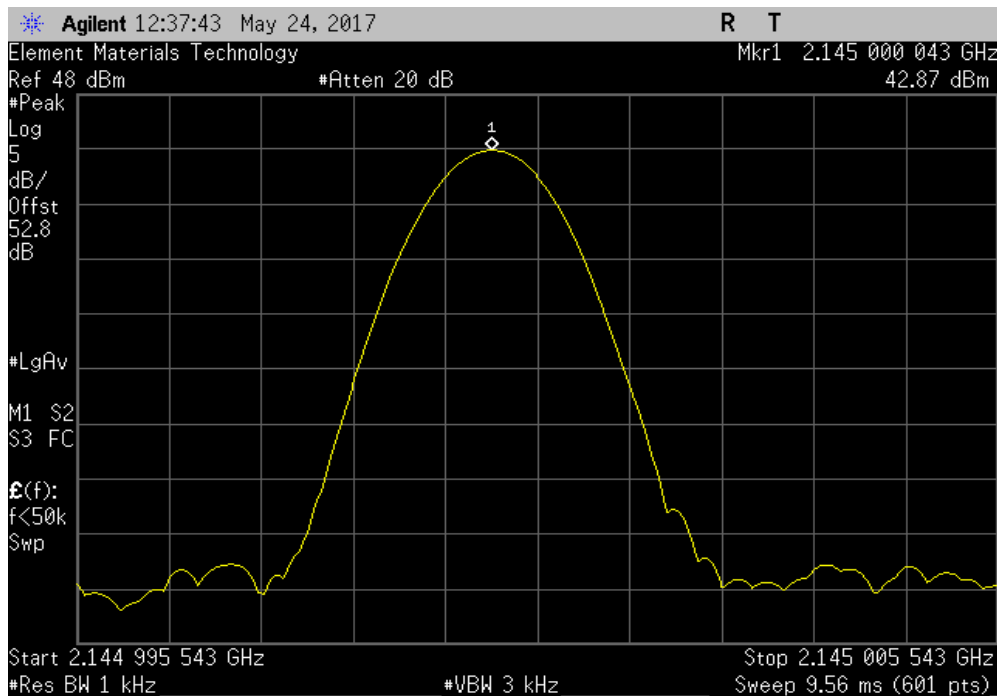


FREQUENCY STABILITY




TMTx 2017.01.27 XMI 2017.02.08

+20°C, 2175 MHz						
	Measured Value (MHz)	Assigned Value (MHz)	Error (ppm)	Limit (ppm)	Results	
	2175.000053	2175	0.024	1	Pass	

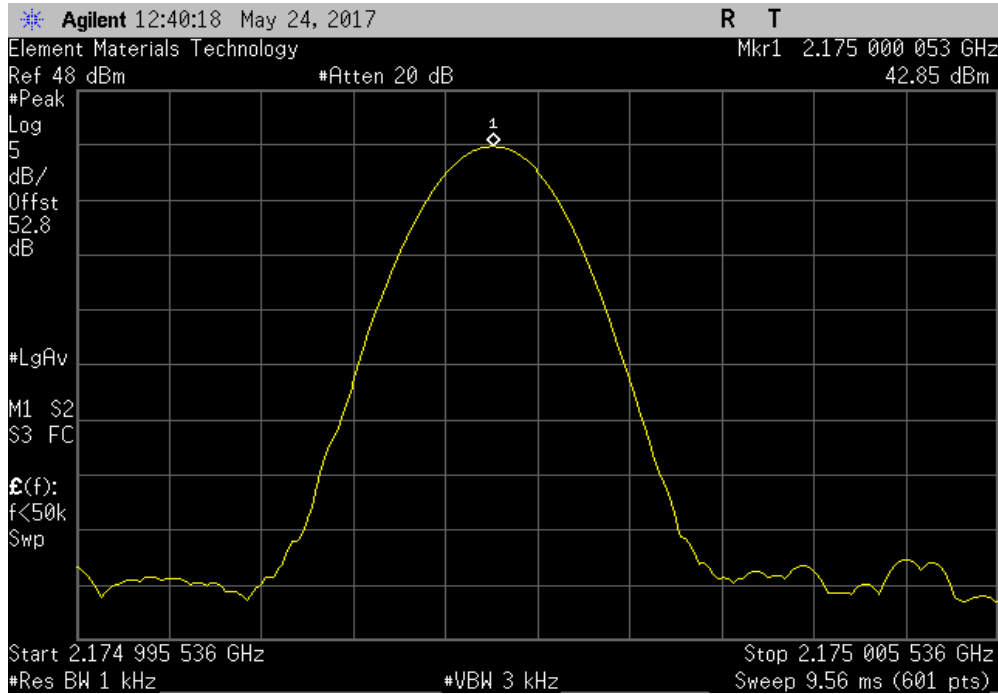

+20°C, 2177.5 MHz						
	Measured Value (MHz)	Assigned Value (MHz)	Error (ppm)	Limit (ppm)	Results	
	2177.500038	2177.5	0.017	1	Pass	

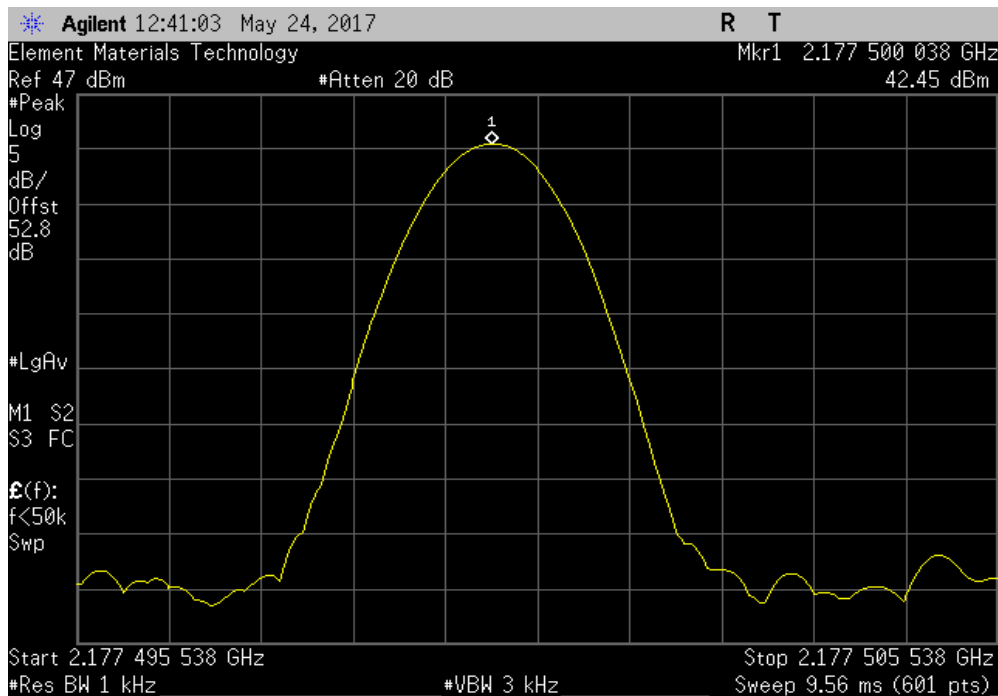


FREQUENCY STABILITY




TMTx 2017.01.27 XMI 2017.02.08

+10°C, 2112.5 MHz						
	Measured Value (MHz)	Assigned Value (MHz)	Error (ppm)	Limit (ppm)	Results	
	2112.500027	2112.5	0.013	1	Pass	

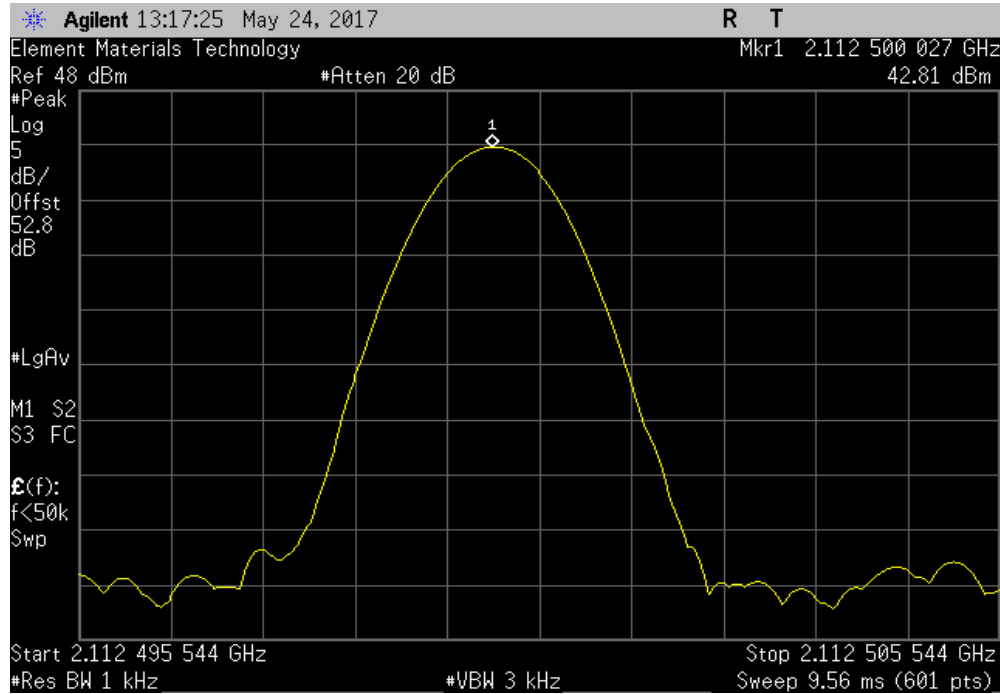

+10°C, 2115 MHz						
	Measured Value (MHz)	Assigned Value (MHz)	Error (ppm)	Limit (ppm)	Results	
	2115.000046	2115	0.022	1	Pass	

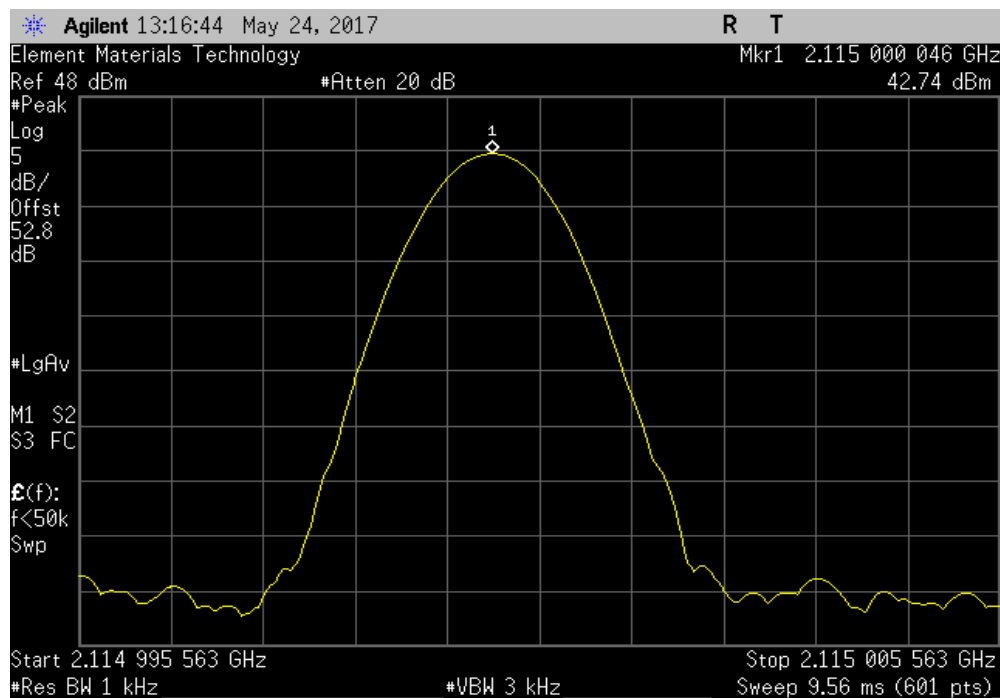


FREQUENCY STABILITY




TMTx 2017.01.27 XMI 2017.02.08

+10°C, 2145 MHz						
	Measured Value (MHz)	Assigned Value (MHz)	Error (ppm)	Limit (ppm)	Results	
	2145.000043	2145	0.020	1	Pass	

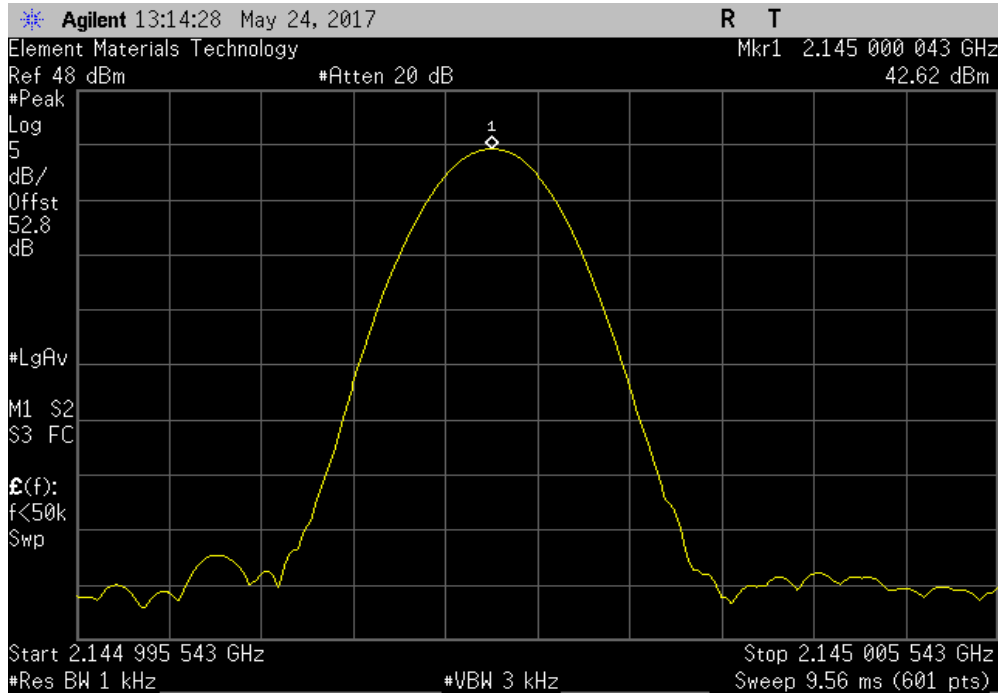

+10°C, 2175 MHz						
	Measured Value (MHz)	Assigned Value (MHz)	Error (ppm)	Limit (ppm)	Results	
	2175.000052	2175	0.024	1	Pass	

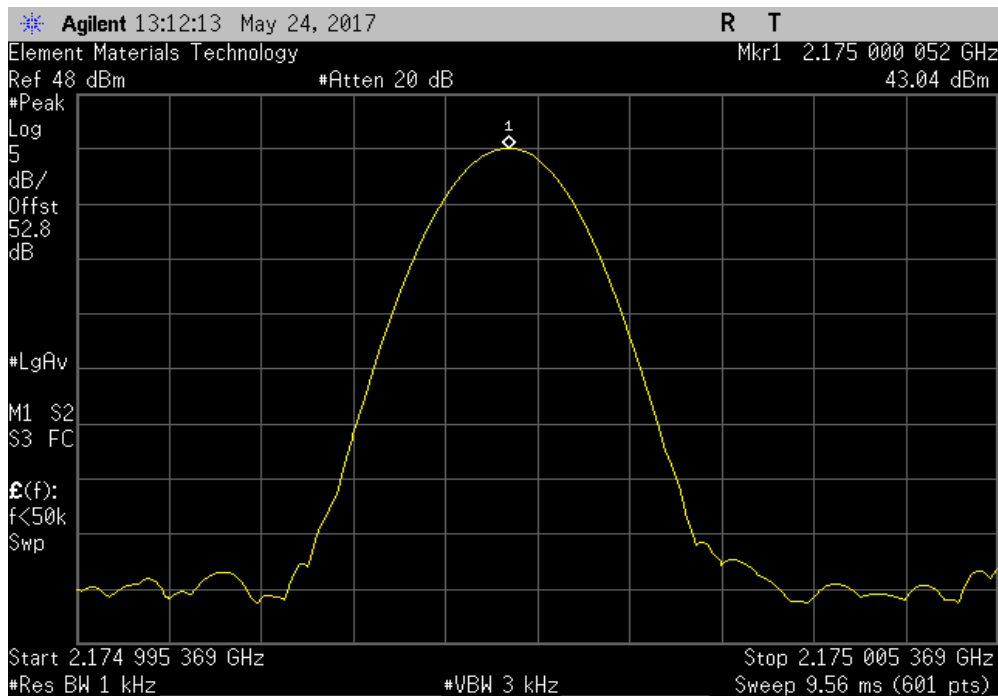


FREQUENCY STABILITY




TMTx 2017.01.27 XMI 2017.02.08

+10°C, 2177.5 MHz						
	Measured Value (MHz)	Assigned Value (MHz)	Error (ppm)	Limit (ppm)	Results	
	2177.500038	2177.5	0.017	1	Pass	

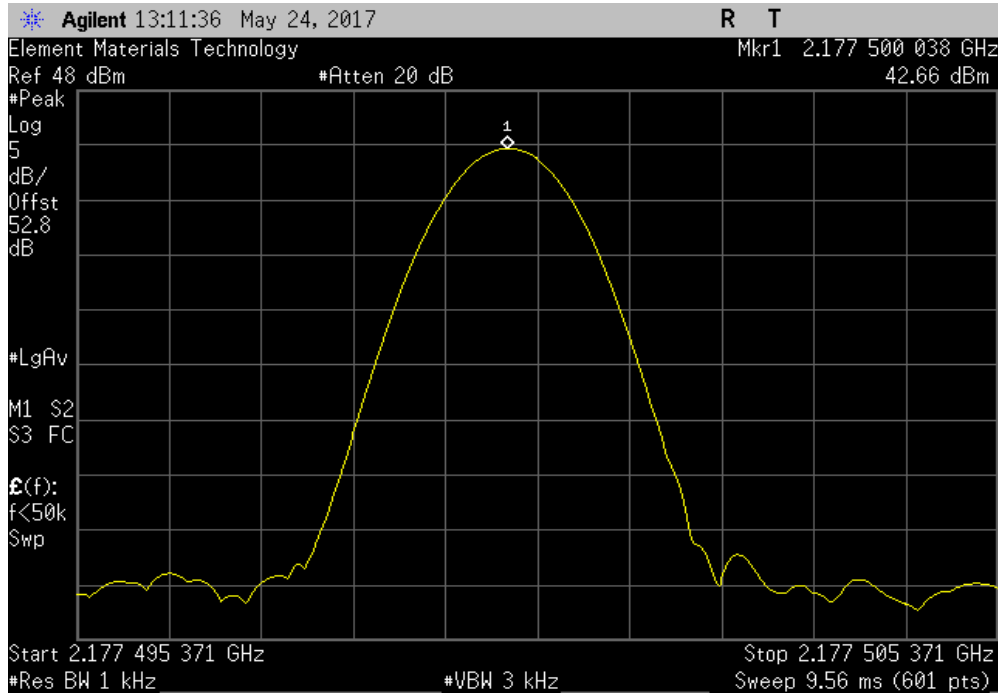

0°C, 2112.5 MHz						
	Measured Value (MHz)	Assigned Value (MHz)	Error (ppm)	Limit (ppm)	Results	
	2112.500044	2112.5	0.021	1	Pass	

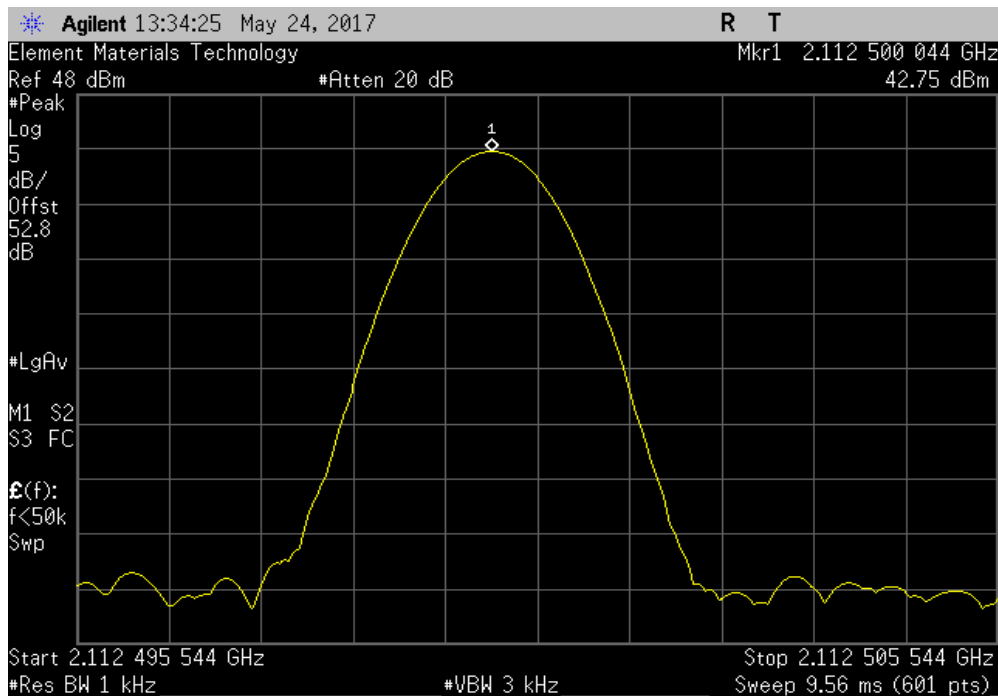


FREQUENCY STABILITY




TMTx 2017.01.27 XMI 2017.02.08

0°C, 2115 MHz						
	Measured Value (MHz)	Assigned Value (MHz)	Error (ppm)	Limit (ppm)	Results	
	2115.000046	2115	0.022	1	Pass	

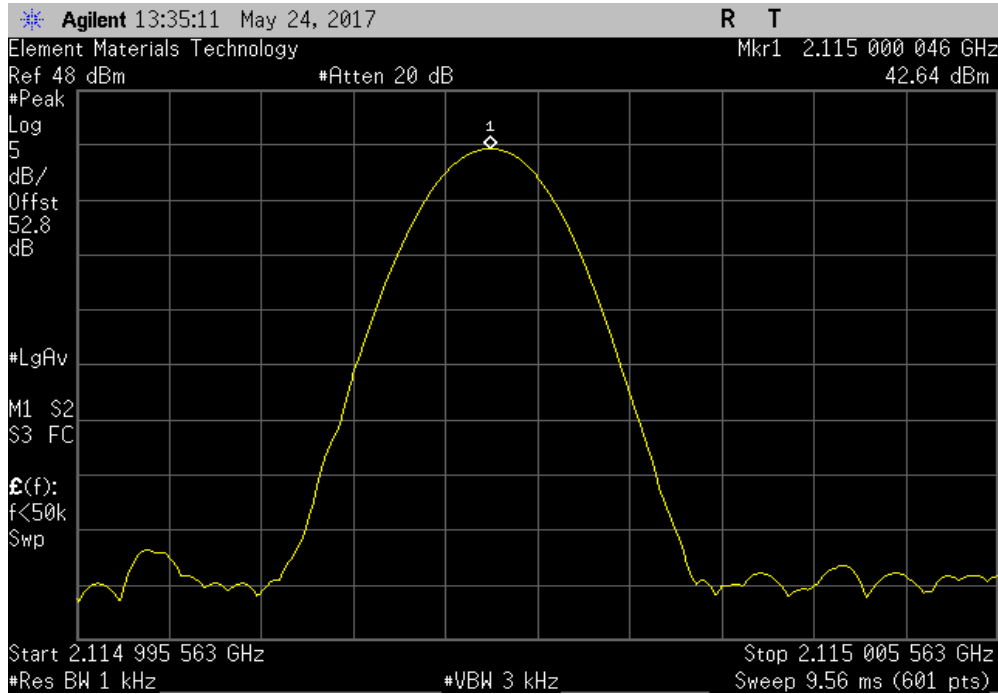

0°C, 2145 MHz						
	Measured Value (MHz)	Assigned Value (MHz)	Error (ppm)	Limit (ppm)	Results	
	2145.000043	2145	0.020	1	Pass	

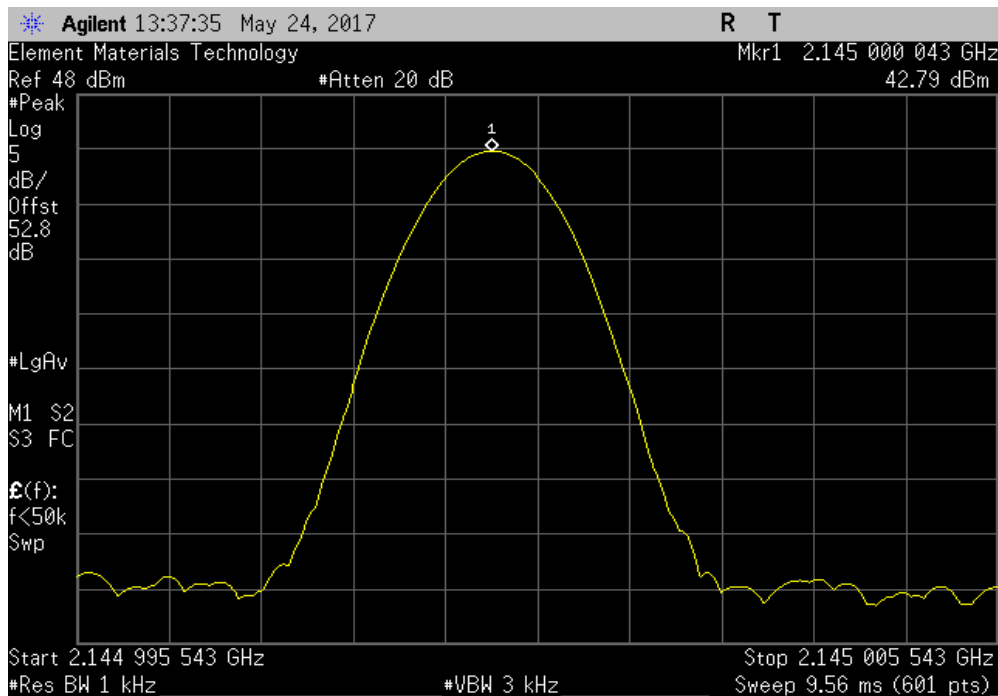


FREQUENCY STABILITY




TMTx 2017.01.27 XMI 2017.02.08

0°C, 2175 MHz						
	Measured Value (MHz)	Assigned Value (MHz)	Error (ppm)	Limit (ppm)	Results	
	2175.000053	2175	0.024	1	Pass	

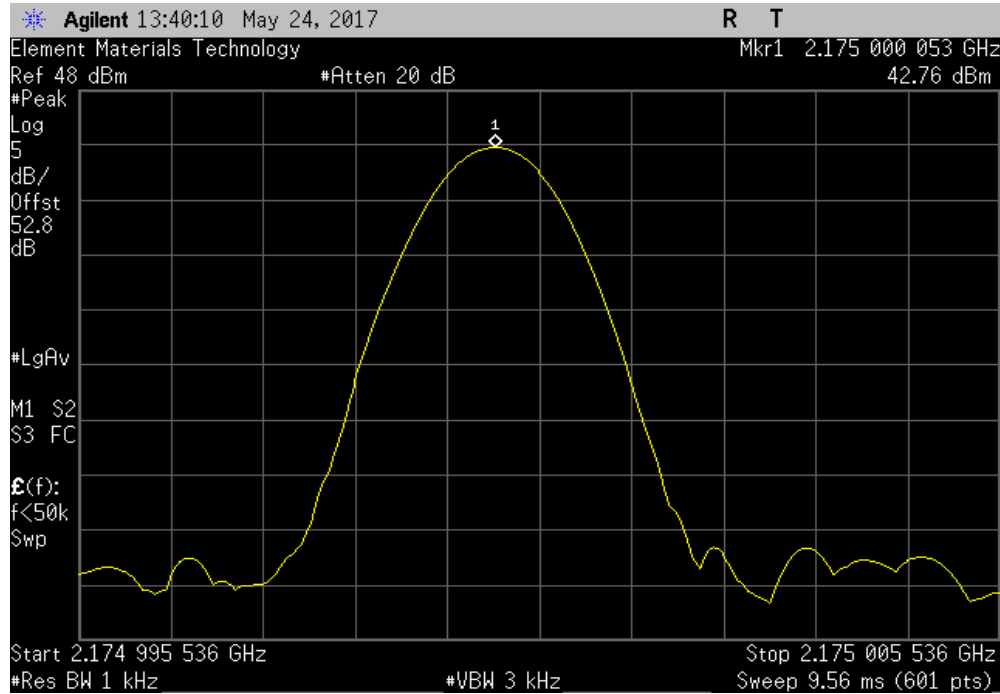

0°C, 2177.5 MHz						
	Measured Value (MHz)	Assigned Value (MHz)	Error (ppm)	Limit (ppm)	Results	
	2177.500038	2177.5	0.017	1	Pass	

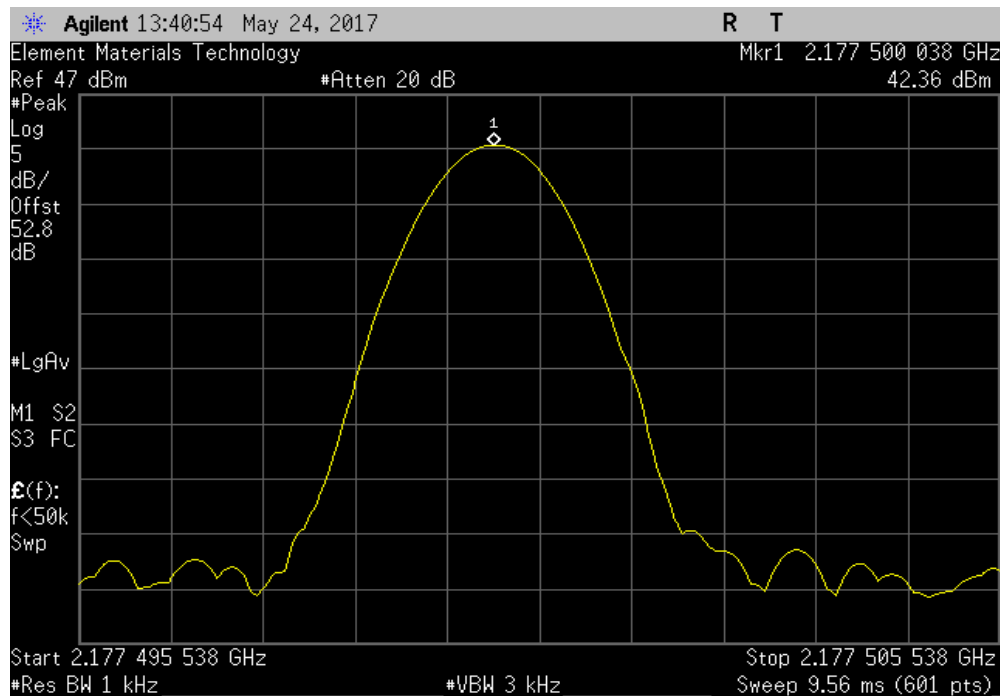


FREQUENCY STABILITY




TMTX 2017.01.27 XMI 2017.02.08

-10°C, 2112.5 MHz						
	Measured Value (MHz)	Assigned Value (MHz)	Error (ppm)	Limit (ppm)	Results	
	2112.500044	2112.5	0.021	1	Pass	

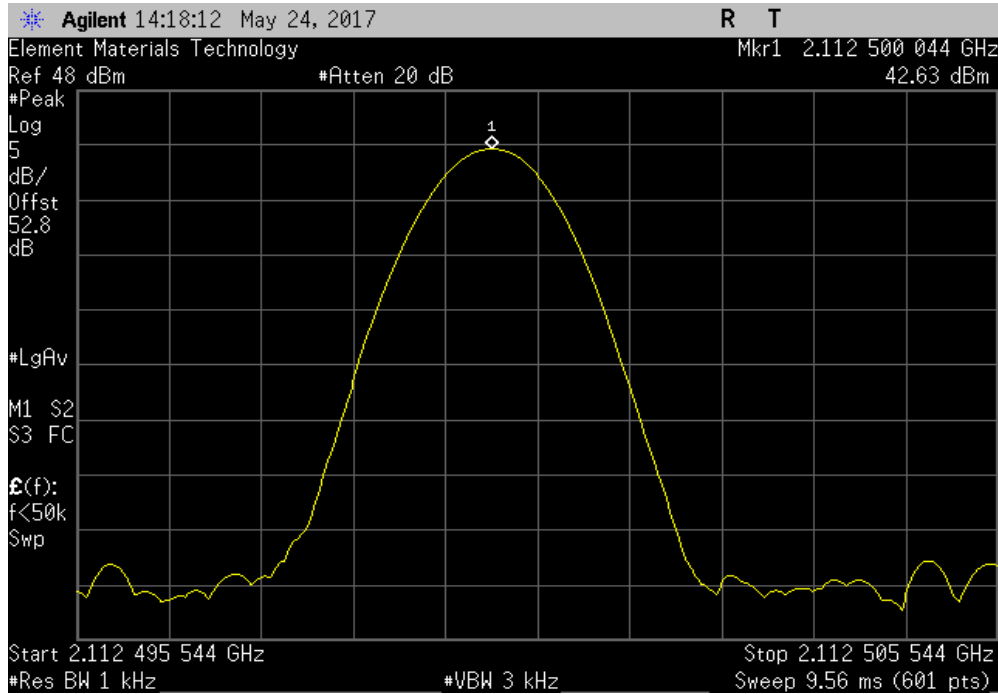

-10°C, 2115 MHz						
	Measured Value (MHz)	Assigned Value (MHz)	Error (ppm)	Limit (ppm)	Results	
	2115.000042	2115	0.020	1	Pass	

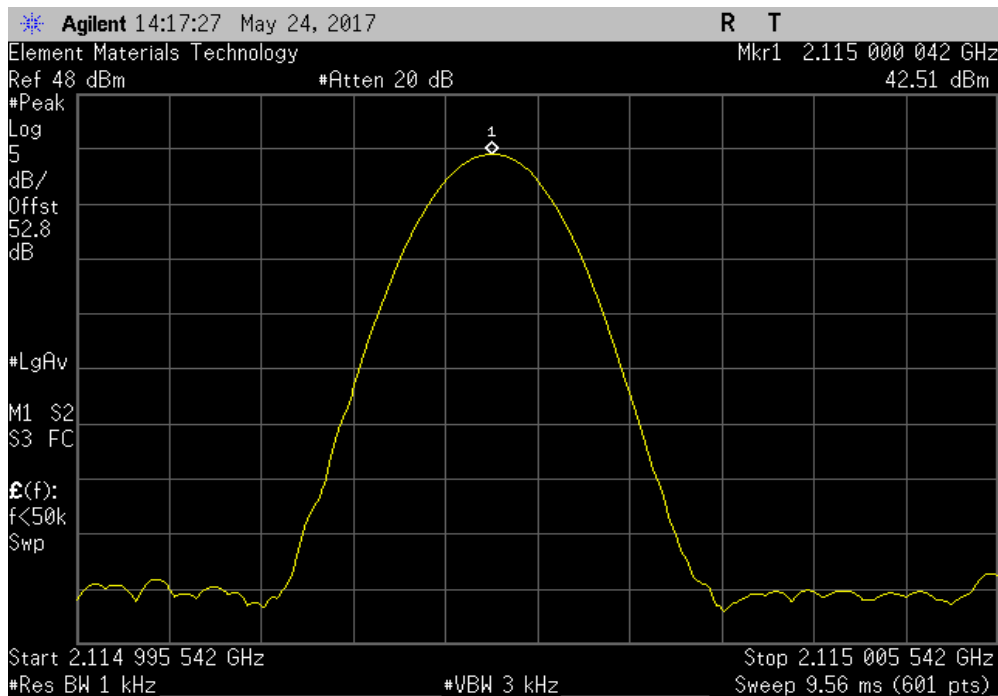


FREQUENCY STABILITY




TMTx 2017.01.27 XMI 2017.02.08

-10°C, 2145 MHz						
	Measured Value (MHz)	Assigned Value (MHz)	Error (ppm)	Limit (ppm)	Results	
	2145.00001	2145	0.005	1	Pass	

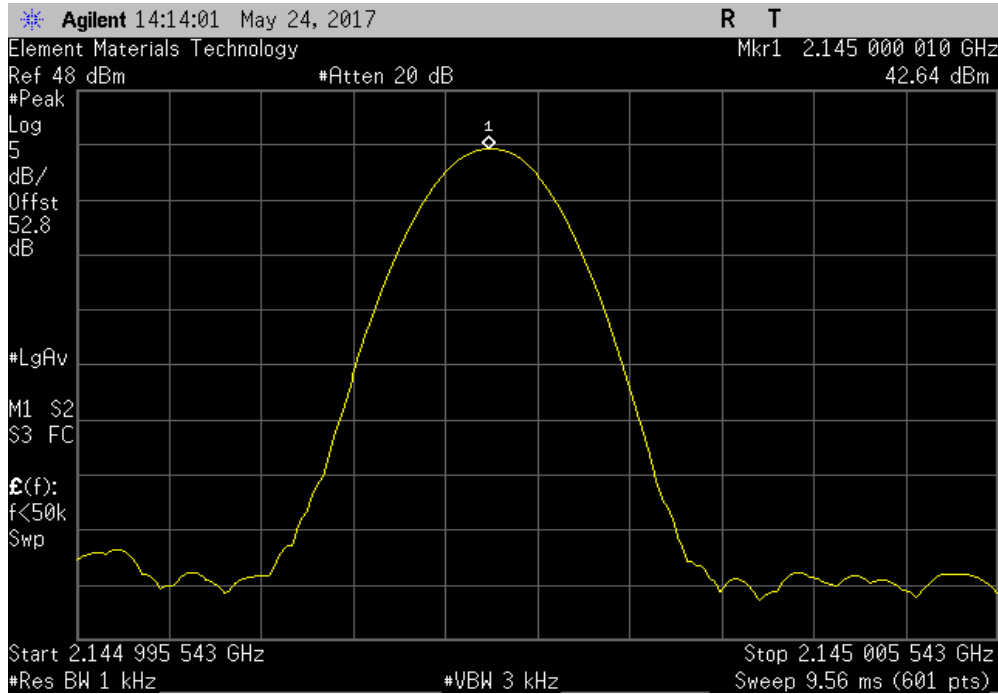

-10°C, 2175 MHz						
	Measured Value (MHz)	Assigned Value (MHz)	Error (ppm)	Limit (ppm)	Results	
	2175.000036	2175	0.017	1	Pass	

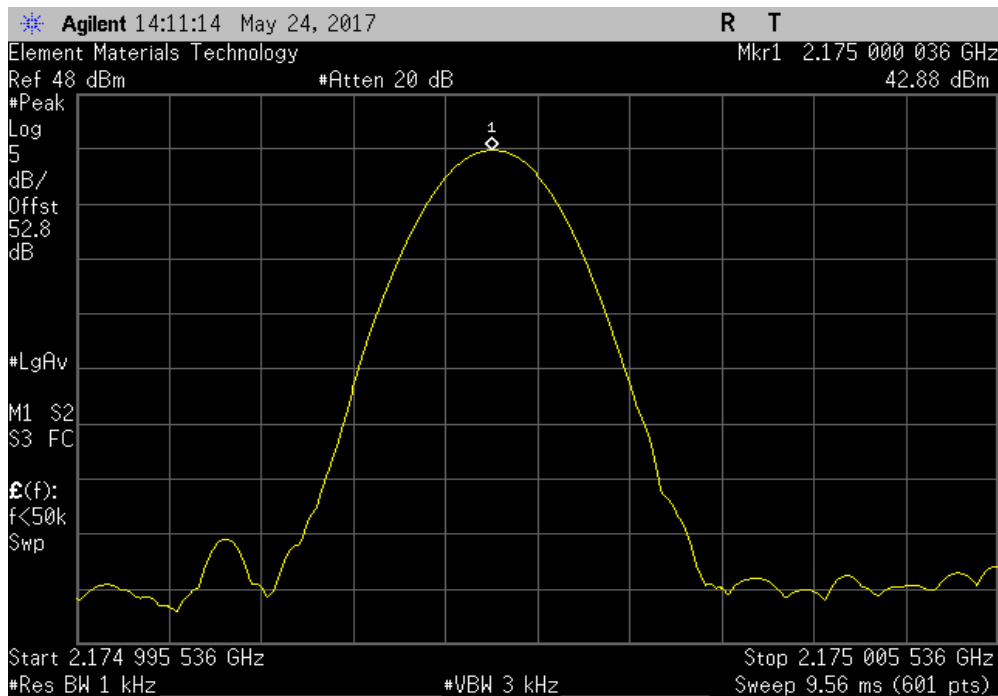


FREQUENCY STABILITY




TMTx 2017.01.27 XMI 2017.02.08

-10°C, 2177.5 MHz						
	Measured Value (MHz)	Assigned Value (MHz)	Error (ppm)	Limit (ppm)	Results	
	2177.500055	2177.5	0.025	1	Pass	

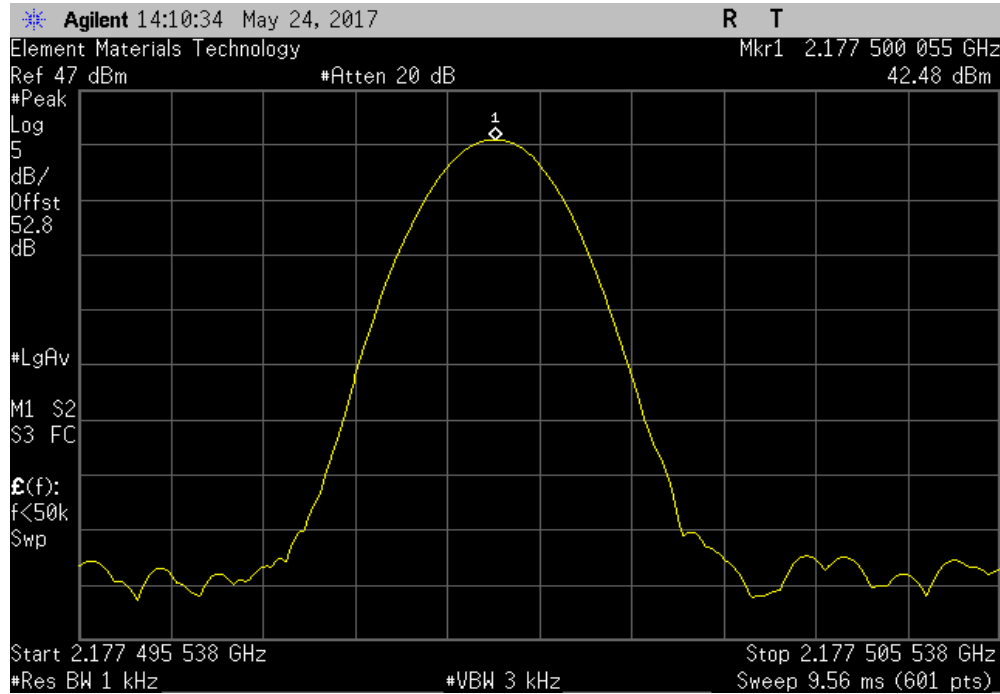

-20°C, 2112.5 MHz						
	Measured Value (MHz)	Assigned Value (MHz)	Error (ppm)	Limit (ppm)	Results	
	2112.500044	2112.5	0.021	1	Pass	

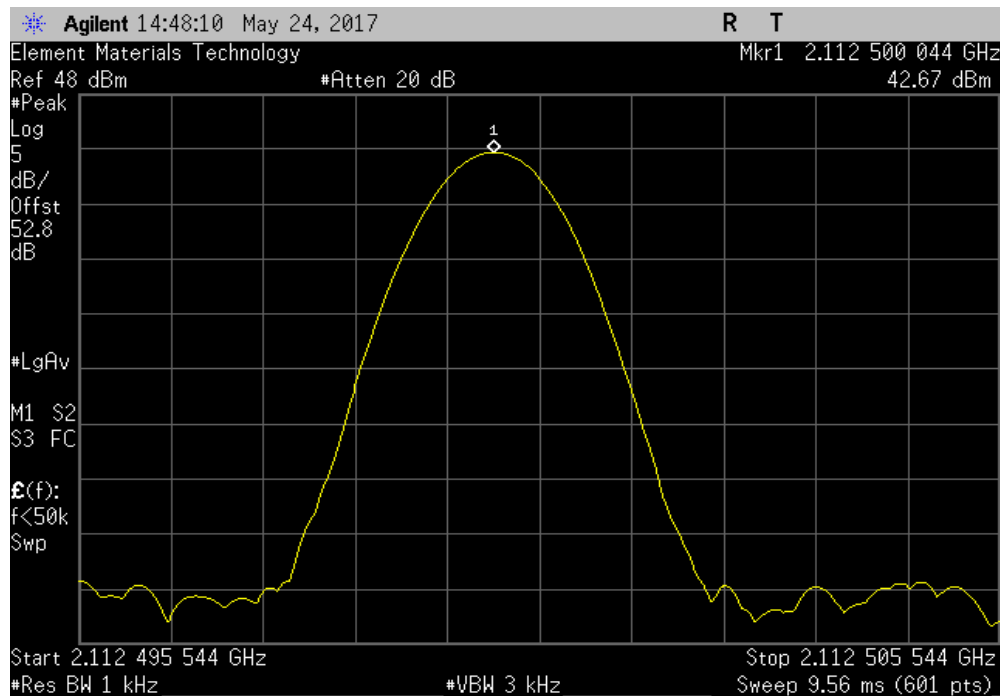


FREQUENCY STABILITY




TMTx 2017.01.27 XMI 2017.02.08

-20°C, 2115 MHz						
	Measured Value (MHz)	Assigned Value (MHz)	Error (ppm)	Limit (ppm)	Results	
	2115.000042	2115	0.020	1	Pass	

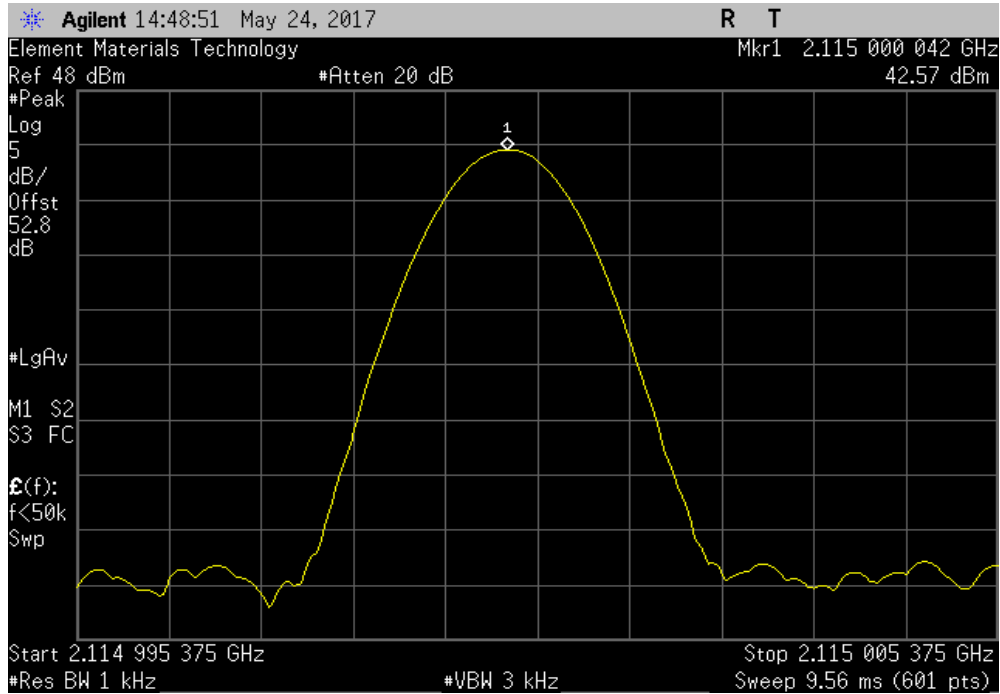

-20°C, 2145 MHz						
	Measured Value (MHz)	Assigned Value (MHz)	Error (ppm)	Limit (ppm)	Results	
	2145.000009	2145	0.004	1	Pass	

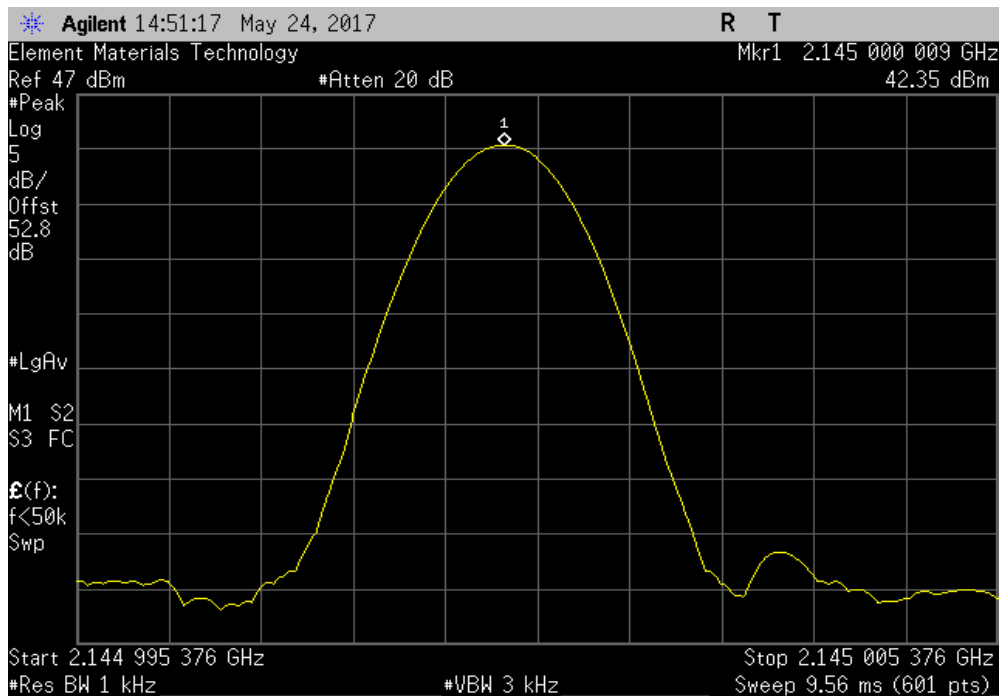


FREQUENCY STABILITY




TMTx 2017.01.27 XMI 2017.02.08

-20°C, 2175 MHz						
	Measured Value (MHz)	Assigned Value (MHz)	Error (ppm)	Limit (ppm)	Results	
	2175.000036	2175	0.017	1	Pass	

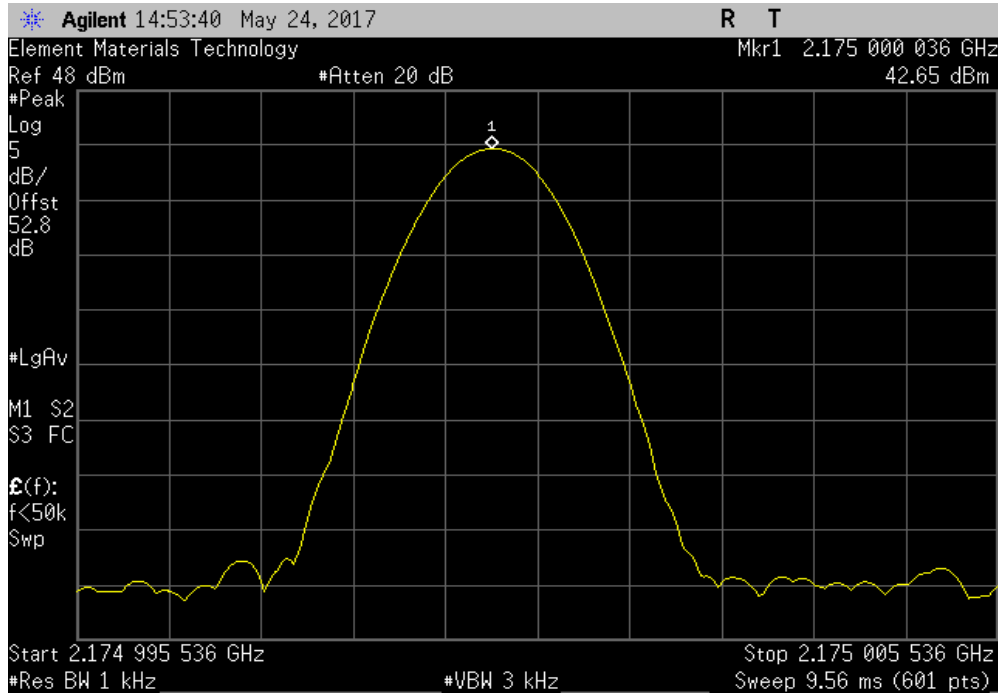

-20°C, 2177.5 MHz						
	Measured Value (MHz)	Assigned Value (MHz)	Error (ppm)	Limit (ppm)	Results	
	2177.500038	2177.5	0.017	1	Pass	

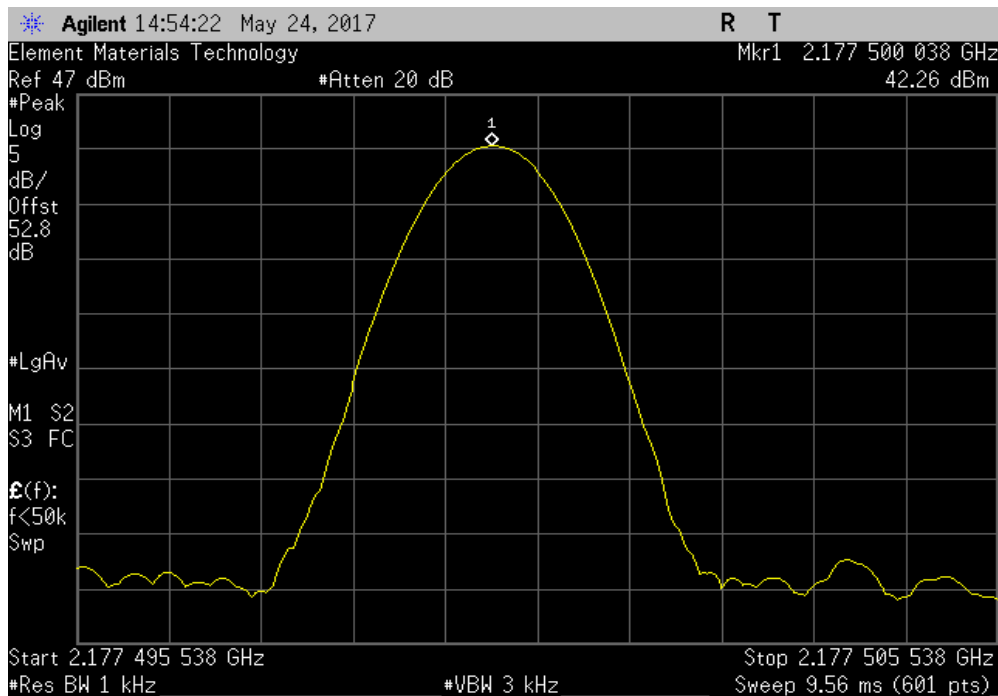


FREQUENCY STABILITY




TMTx 2017.01.27 XMI 2017.02.08

-30°C, 2112.5 MHz						
	Measured Value (MHz)	Assigned Value (MHz)	Error (ppm)	Limit (ppm)	Results	
	2112.500044	2112.5	0.021	1	Pass	

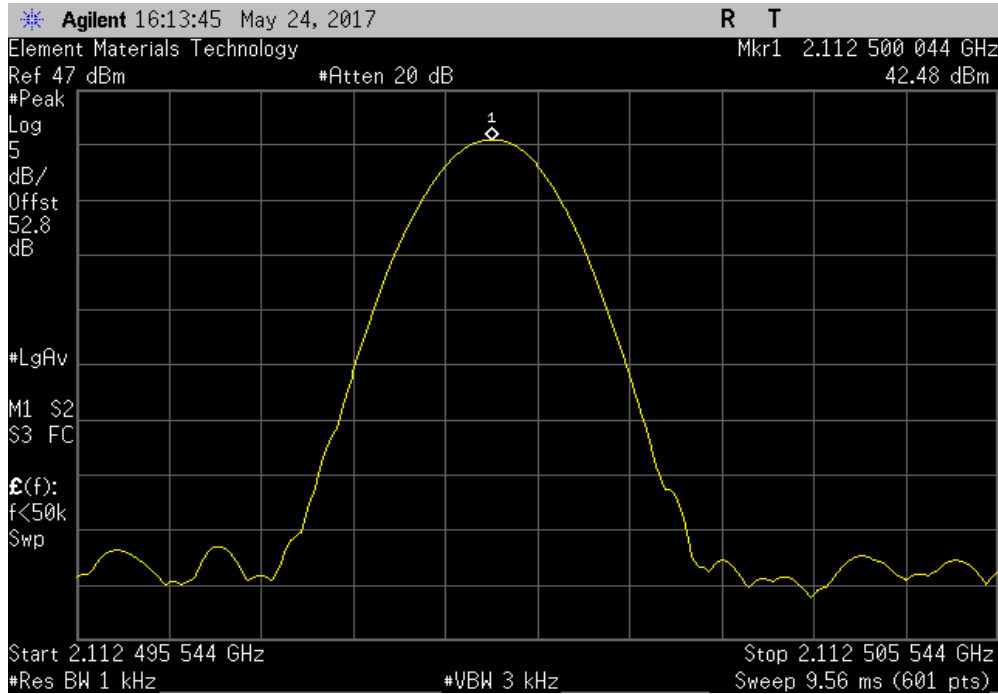

-30°C, 2115 MHz						
	Measured Value (MHz)	Assigned Value (MHz)	Error (ppm)	Limit (ppm)	Results	
	2115.000046	2115	0.022	1	Pass	

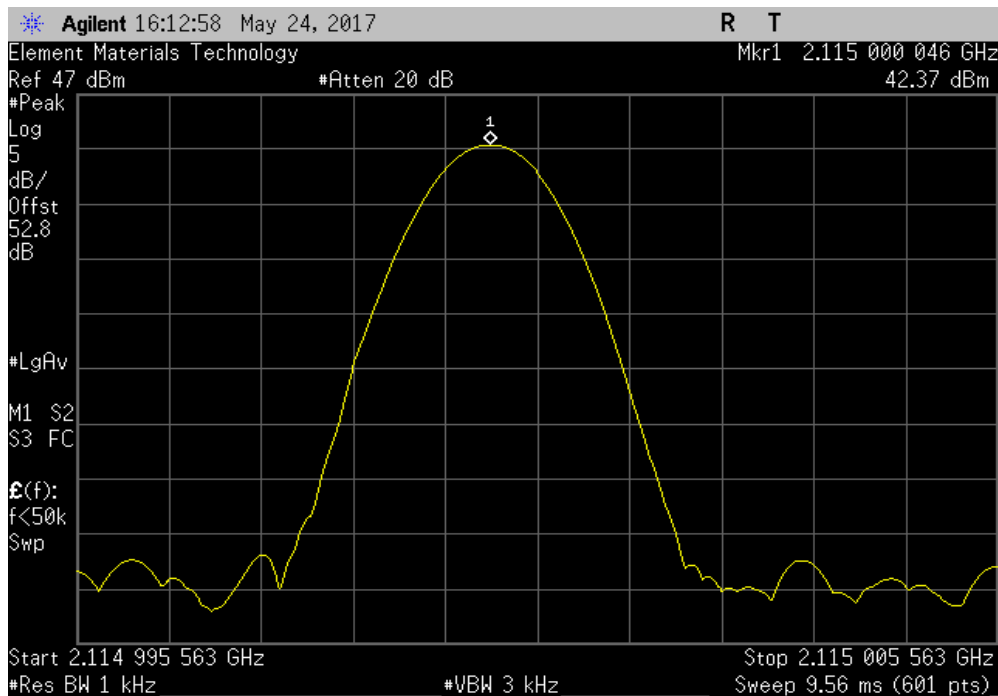


FREQUENCY STABILITY




TMTx 2017.01.27 XMI 2017.02.08

-30°C, 2145 MHz						
	Measured Value (MHz)	Assigned Value (MHz)	Error (ppm)	Limit (ppm)	Results	
	2145.000043	2145	0.020	1	Pass	

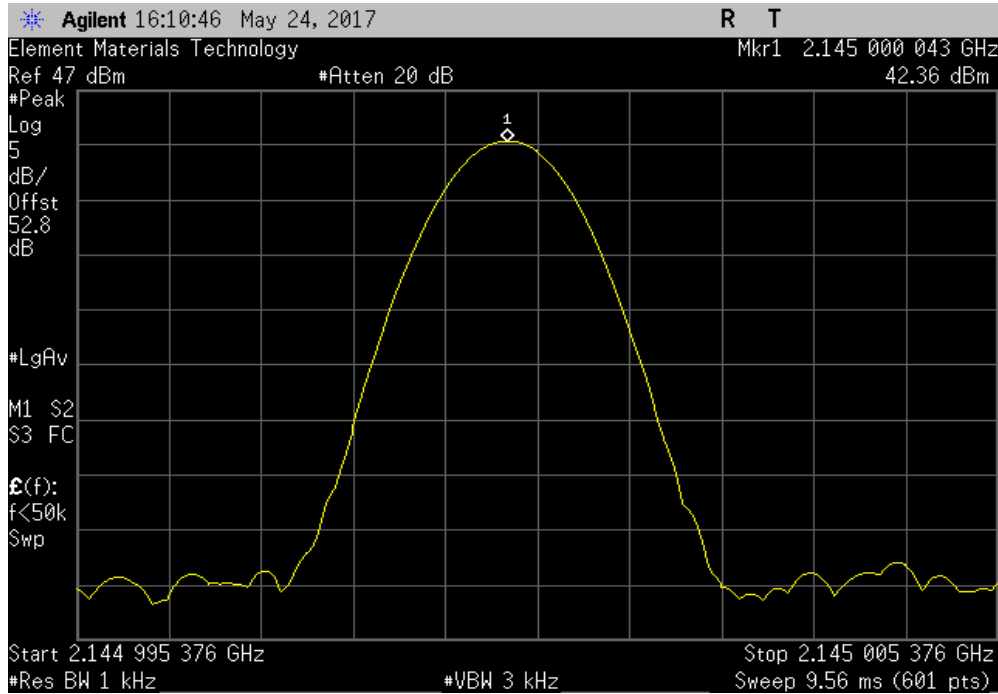

-30°C, 2175 MHz						
	Measured Value (MHz)	Assigned Value (MHz)	Error (ppm)	Limit (ppm)	Results	
	2175.000036	2175	0.017	1	Pass	

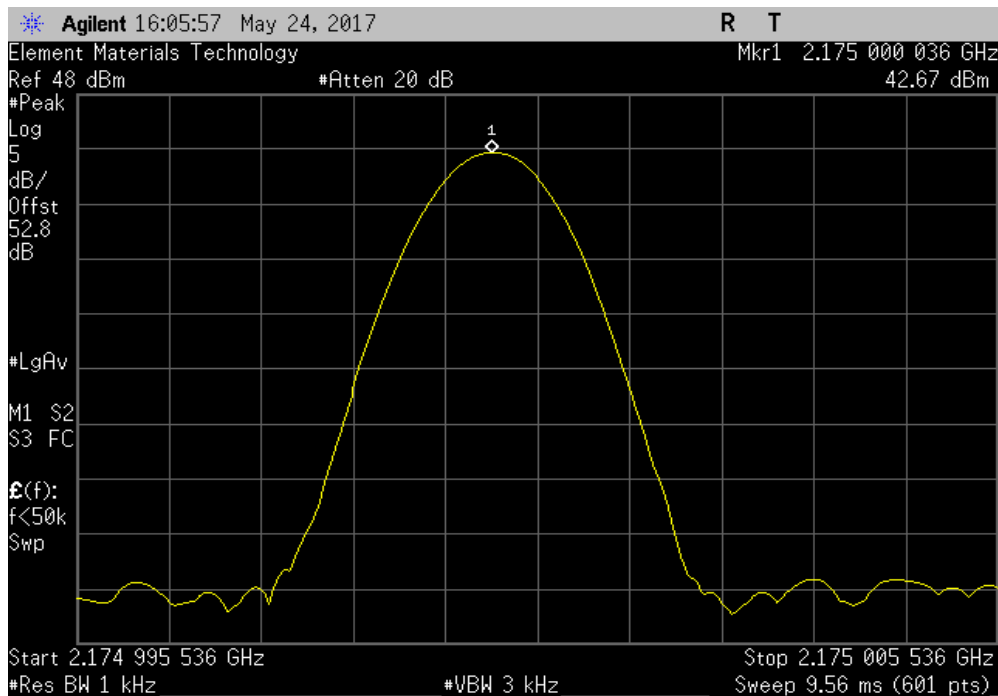


FREQUENCY STABILITY




TMTx 2017.01.27 XMI 2017.02.08

-30°C, 2177.5 MHz						
	Measured Value (MHz)	Assigned Value (MHz)	Error (ppm)	Limit (ppm)	Results	
	2177.500038	2177.5	0.017	1	Pass	

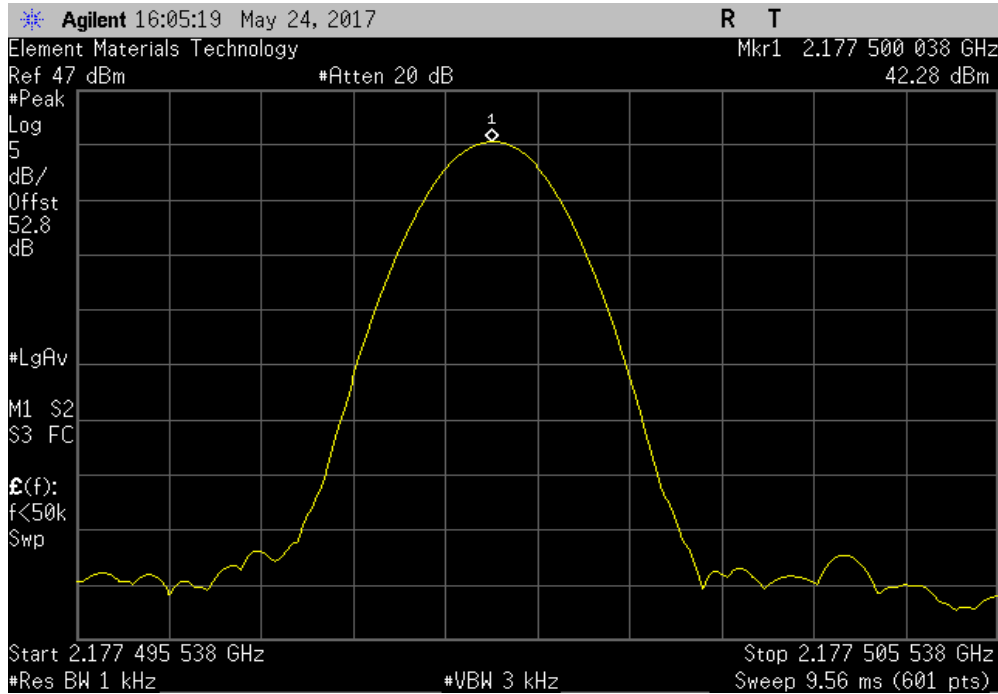

Normal Voltage, 2112.5 MHz						
	Measured Value (MHz)	Assigned Value (MHz)	Error (ppm)	Limit (ppm)	Results	
	2112.500044	2112.5	0.021	1	Pass	

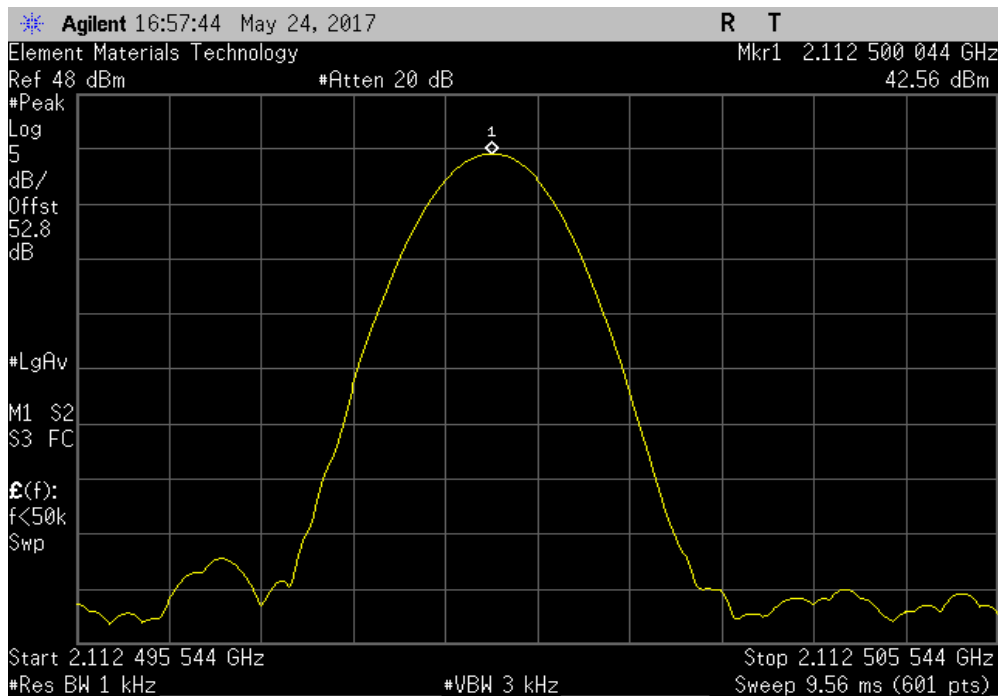


FREQUENCY STABILITY




TMTx 2017.01.27 XMI 2017.02.08

Normal Voltage, 2115 MHz						
	Measured Value (MHz)	Assigned Value (MHz)	Error (ppm)	Limit (ppm)	Results	
	2115.000025	2115	0.012	1	Pass	

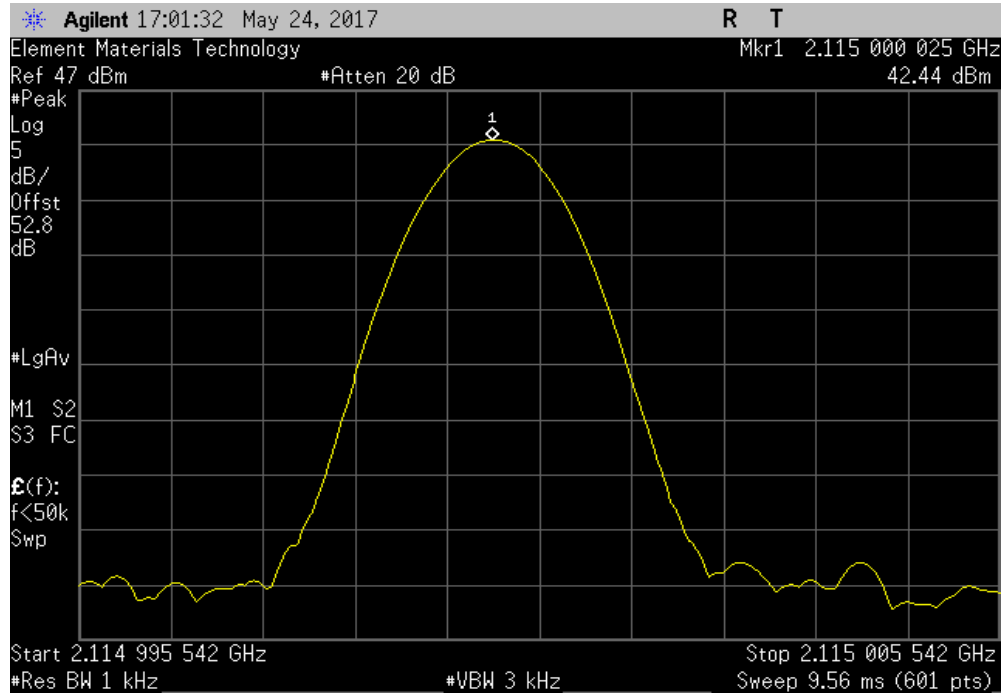

Normal Voltage, 2145 MHz						
	Measured Value (MHz)	Assigned Value (MHz)	Error (ppm)	Limit (ppm)	Results	
	2145.000043	2145	0.020	1	Pass	

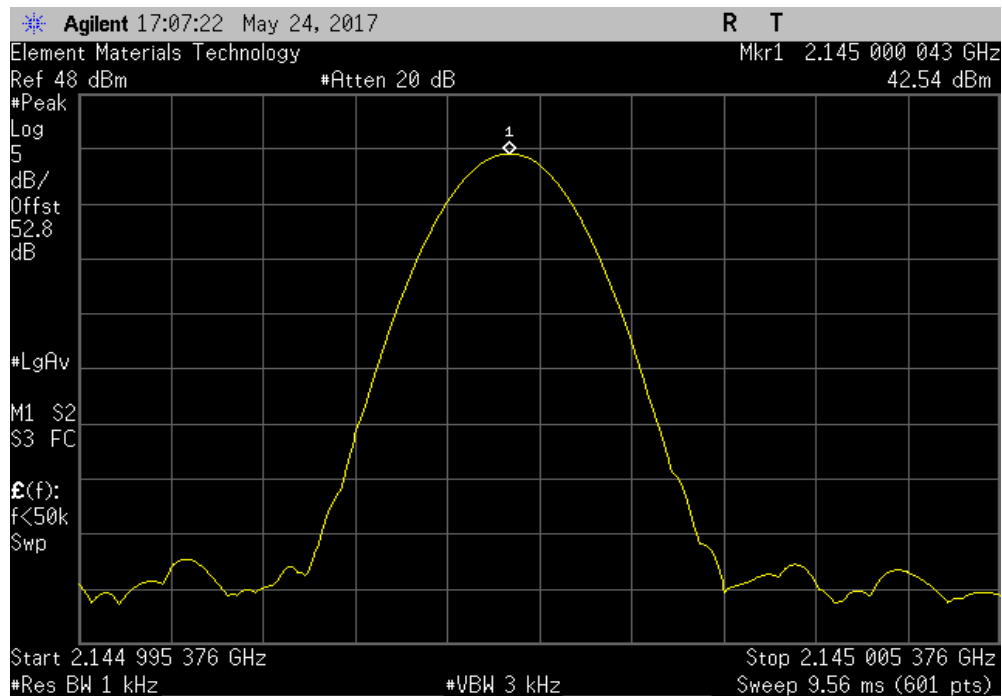


FREQUENCY STABILITY




TMTX 2017.01.27 XMI 2017.02.08

Normal Voltage, 2175 MHz						
	Measured Value (MHz)	Assigned Value (MHz)	Error (ppm)	Limit (ppm)	Results	
	2175.000053	2175	0.024	1	Pass	

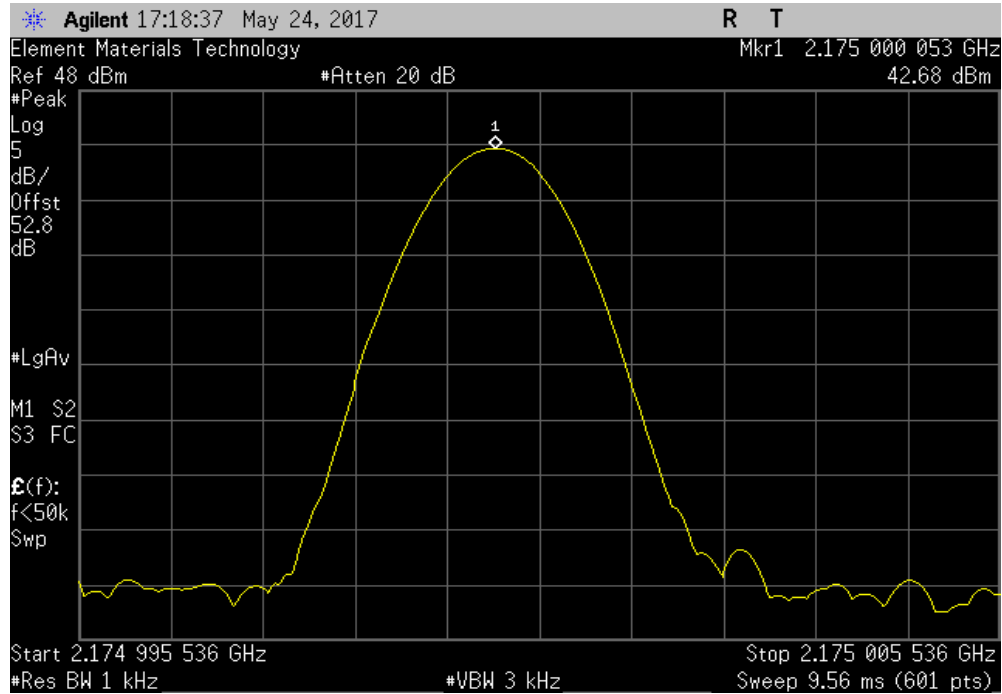

Normal Voltage, 2177.5 MHz						
	Measured Value (MHz)	Assigned Value (MHz)	Error (ppm)	Limit (ppm)	Results	
	2177.500055	2177.5	0.025	1	Pass	

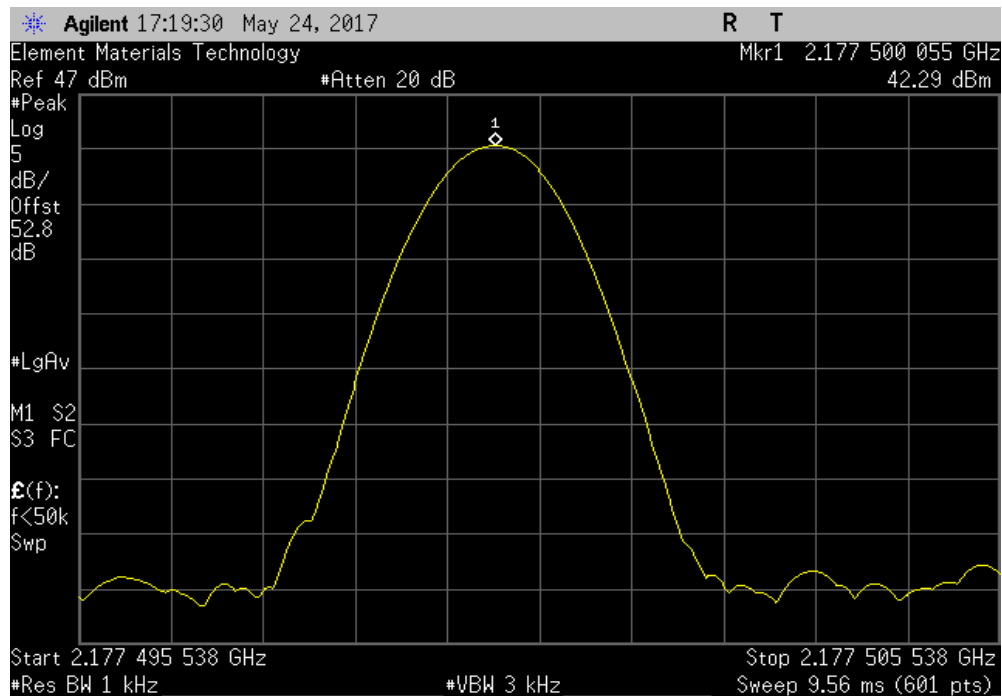


FREQUENCY STABILITY




TMTx 2017.01.27 XMI 2017.02.08

Extreme Voltage (102VAC/60Hz), 2112.5 MHz						
	Measured Value (MHz)	Assigned Value (MHz)	Error (ppm)	Limit (ppm)	Results	
	2112.500044	2112.5	0.021	1	Pass	

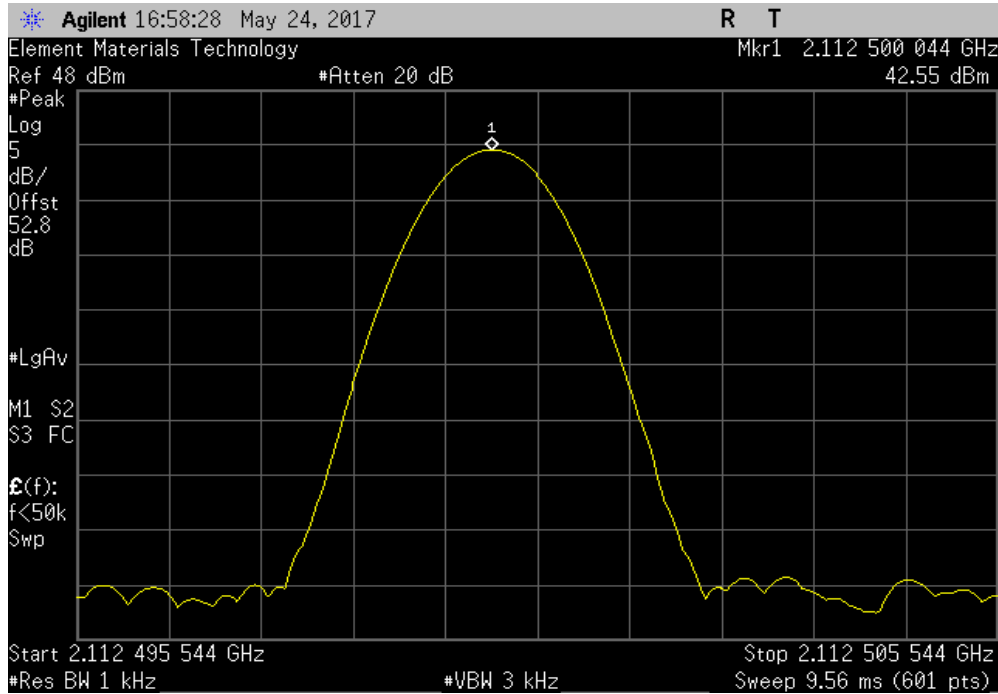

Extreme Voltage (102VAC/60Hz), 2115 MHz						
	Measured Value (MHz)	Assigned Value (MHz)	Error (ppm)	Limit (ppm)	Results	
	2115.000042	2115	0.020	1	Pass	

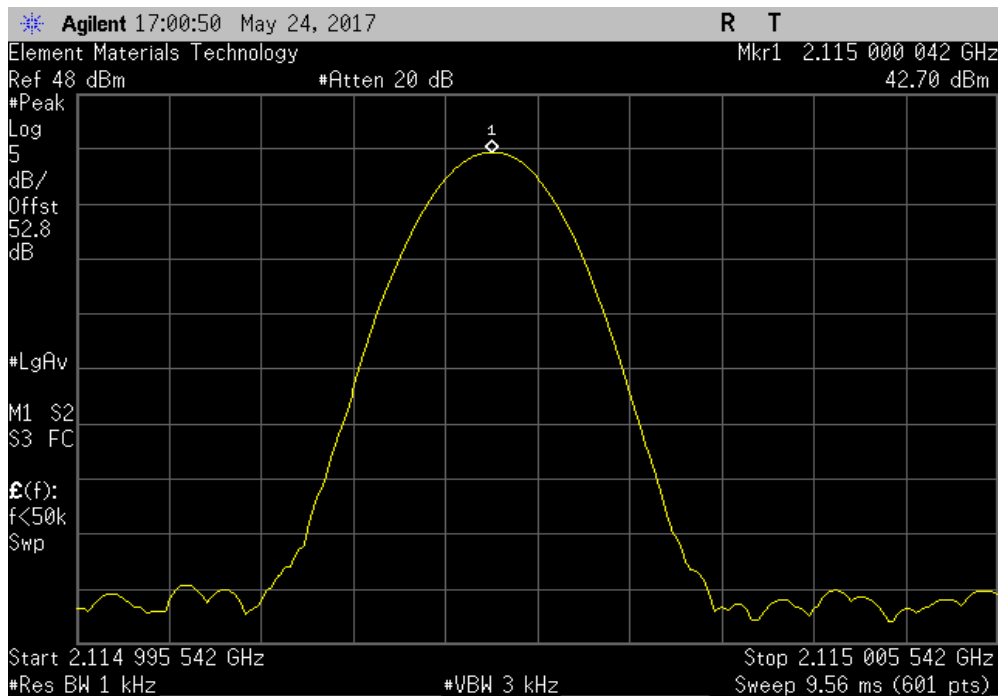


FREQUENCY STABILITY




TMTX 2017.01.27 XMI 2017.02.08

Extreme Voltage (102VAC/60Hz), 2145 MHz						
	Measured Value (MHz)	Assigned Value (MHz)	Error (ppm)	Limit (ppm)	Results	
	2145.000043	2145	0.020	1	Pass	

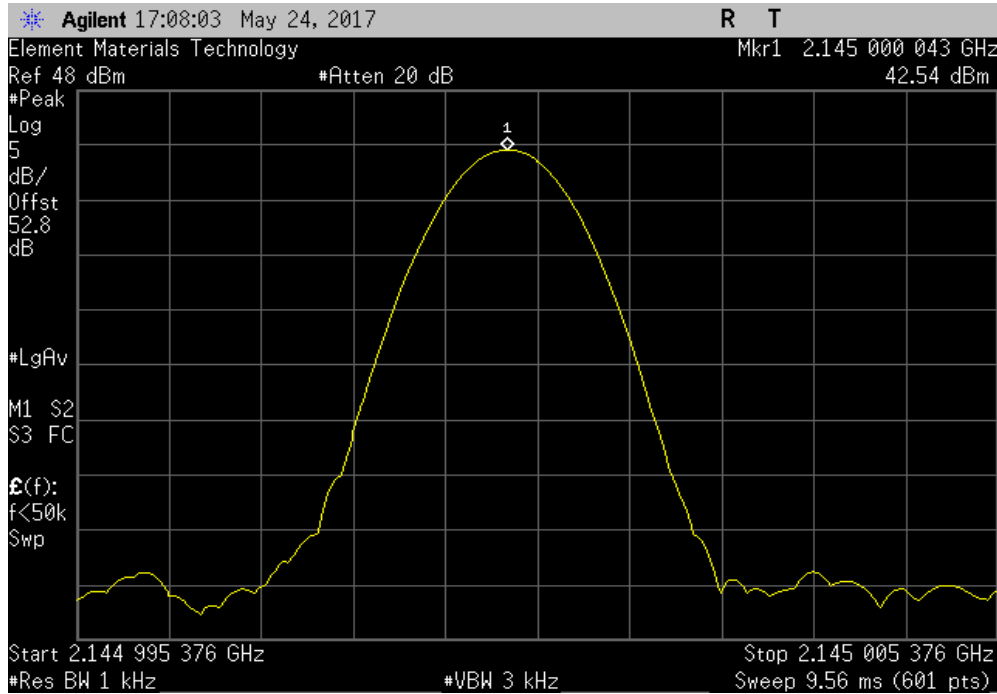

Extreme Voltage (102VAC/60Hz), 2175 MHz						
	Measured Value (MHz)	Assigned Value (MHz)	Error (ppm)	Limit (ppm)	Results	
	2175.000036	2175	0.017	1	Pass	

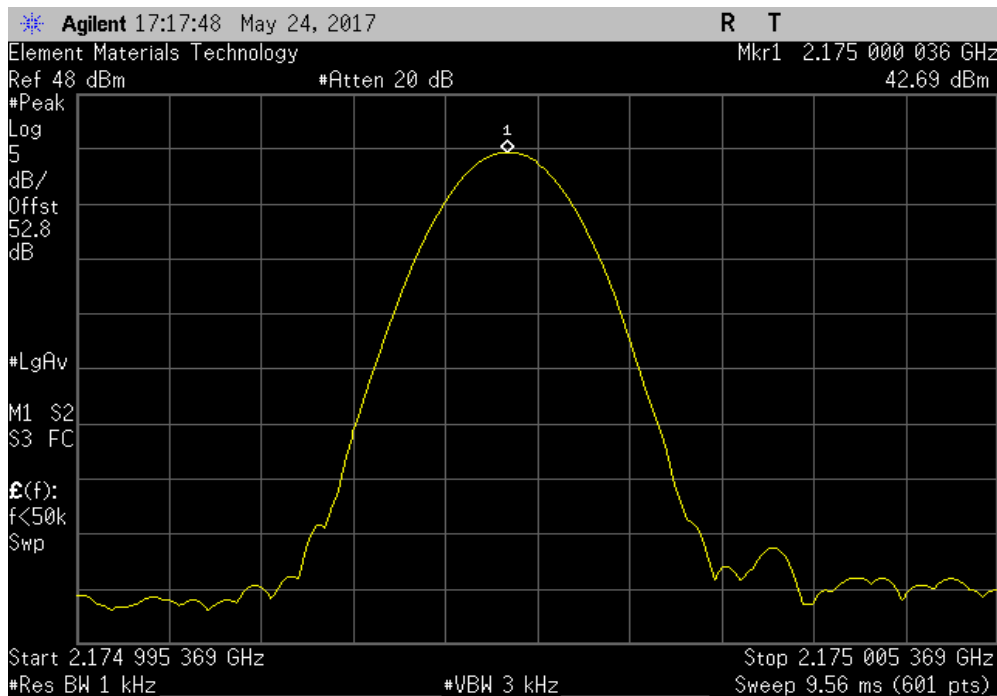


FREQUENCY STABILITY




TMTx 2017.01.27 XMI 2017.02.08

Extreme Voltage (102VAC/60Hz), 2177.5 MHz						
	Measured Value (MHz)	Assigned Value (MHz)	Error (ppm)	Limit (ppm)	Results	
	2177.500038	2177.5	0.017	1	Pass	

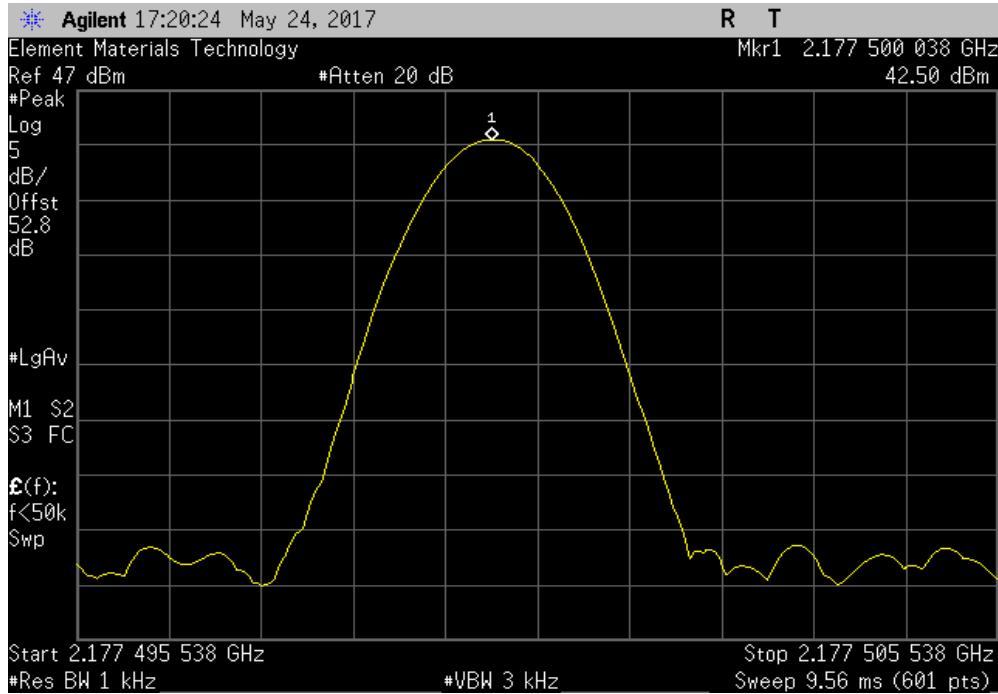

Extreme Voltage (138VAC/60Hz), 2112.5 MHz						
	Measured Value (MHz)	Assigned Value (MHz)	Error (ppm)	Limit (ppm)	Results	
	2112.500044	2112.5	0.021	1	Pass	

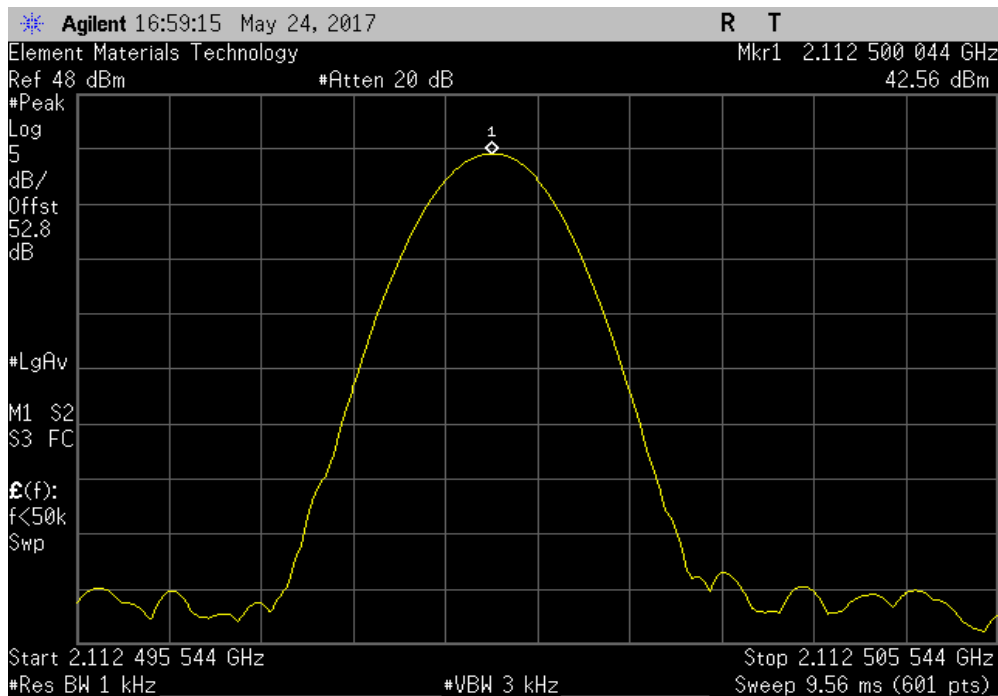


FREQUENCY STABILITY




TMTX 2017.01.27 XMI 2017.02.08

Extreme Voltage (138VAC/60Hz), 2115 MHz						
	Measured Value (MHz)	Assigned Value (MHz)	Error (ppm)	Limit (ppm)	Results	
	2115.000042	2115	0.020	1	Pass	

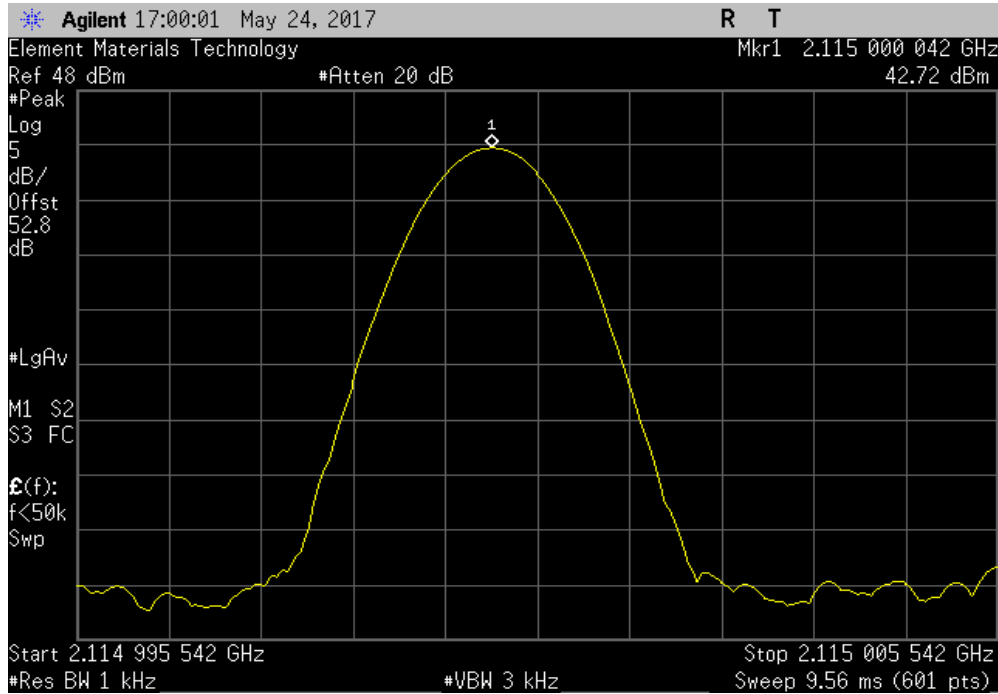

Extreme Voltage (138VAC/60Hz), 2145 MHz						
	Measured Value (MHz)	Assigned Value (MHz)	Error (ppm)	Limit (ppm)	Results	
	2145.000043	2145	0.020	1	Pass	

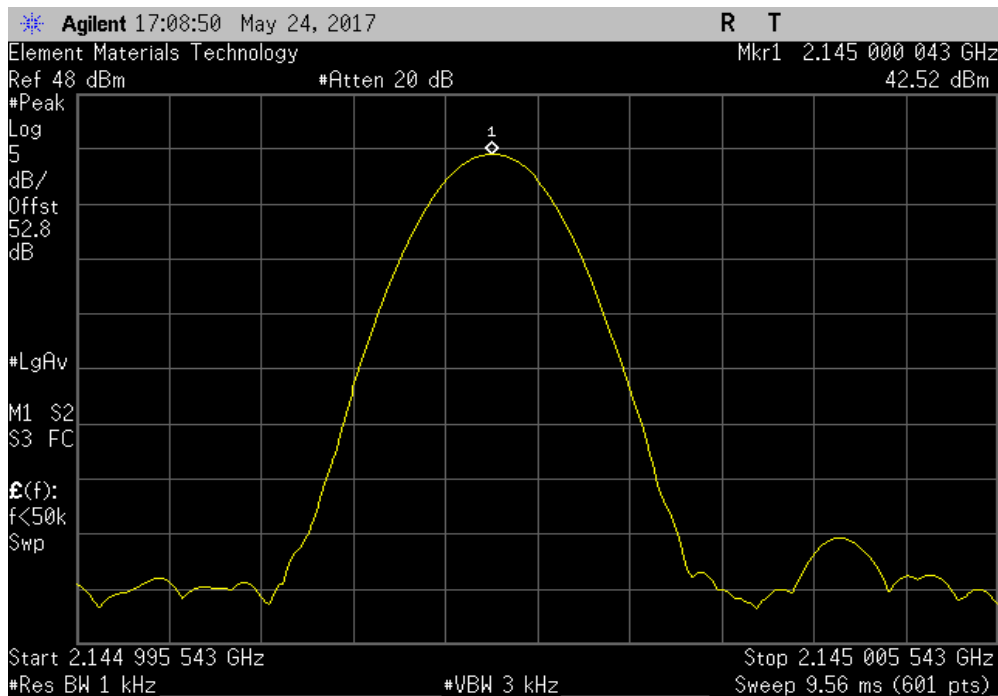


FREQUENCY STABILITY




TMTX 2017.01.27 XMI 2017.02.08

Extreme Voltage (138VAC/60Hz), 2175 MHz						
	Measured Value (MHz)	Assigned Value (MHz)	Error (ppm)	Limit (ppm)	Results	
	2175.000036	2175	0.017	1	Pass	

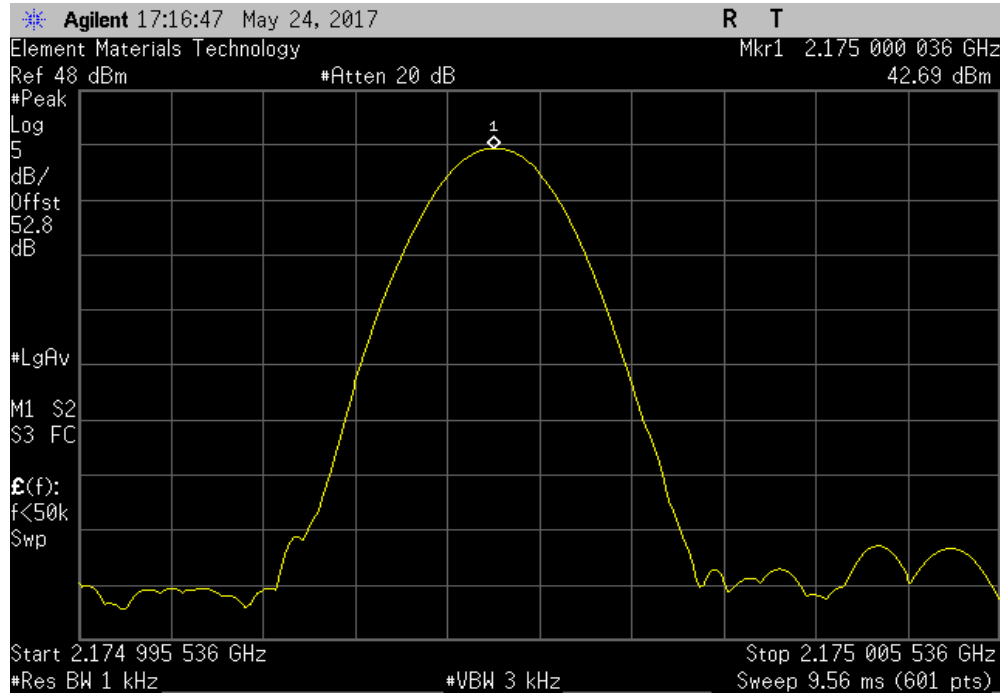

Extreme Voltage (138VAC/60Hz), 2177.5 MHz						
	Measured Value (MHz)	Assigned Value (MHz)	Error (ppm)	Limit (ppm)	Results	
	2177.500038	2177.5	0.017	1	Pass	

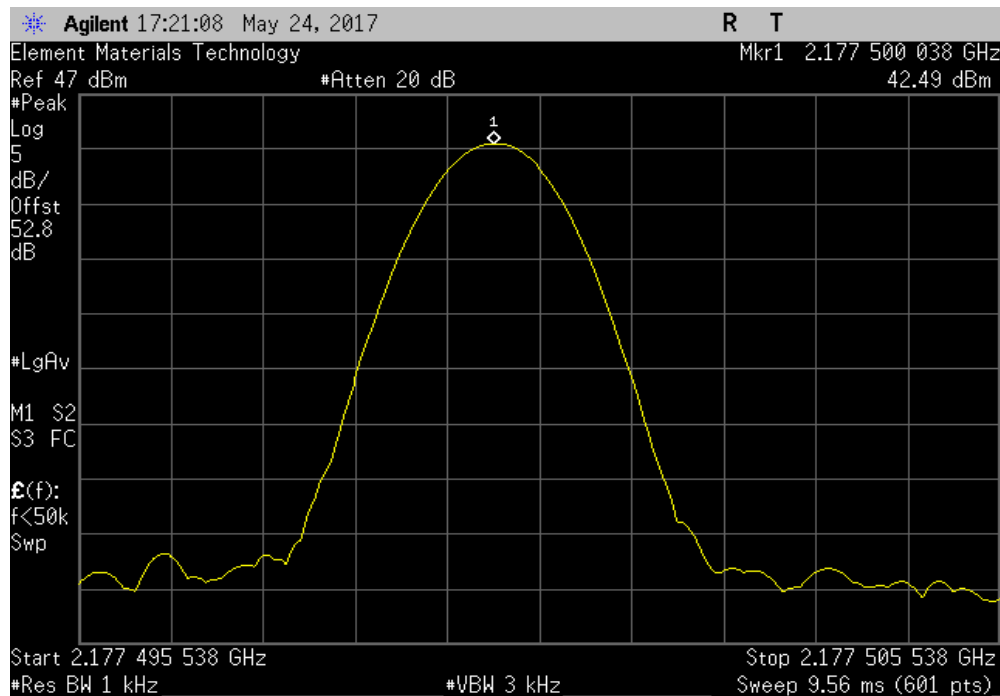

EMISSIONS BANDWIDTH



XMit 2017.02.08

Testing was performed using the mode(s) of operation and configuration(s) noted within the report. The individuals and/or the organization requesting the test provided the modes, configurations and settings used to complete the evaluation. The actual test parameters are specified in the test data, this includes items such as investigated frequency range (scanned) and test levels. The testing methods and performance specifications, as well as the test site used for the evaluation are indicated in the test data.

TEST EQUIPMENT

Description	Manufacturer	Model	ID	Last Cal.	Cal. Due
Attenuator	Aeroflex	48-30-34	RCU	9/15/2016	9/15/2017
Generator - Signal	Agilent	N5183A	TIK	10/17/2014	10/17/2017
Cable	ESM Cable Corp	TTBJ141 KMKM-72	MNP	NCR	NCR
Attenuator	S.M. Electronics	SA26B-20	RFW	2/14/2017	2/14/2018
Block - DC	Fairview Microwave	SD3379	AMI	9/15/2016	9/15/2017
Analyzer - Spectrum Analyzer	Agilent	E4440A	AAX	3/16/2017	3/16/2018

TEST DESCRIPTION

The measurement was made using a direct connection between the RF output of the EUT and a spectrum analyzer. An RF signal generator was used to create the modulated signal(s) listed in the datasheets. These signals were input into the EUT.

The spectrum analyzer settings were as follows:

- RBW = Approx. 1% of the emission bandwidth (B). This was an iterative process to determine the RBW based on the emissions bandwidth (B).
- VBW = > RBW
- A peak detector was used
- Trace max hold.

The spectrum analyzer occupied bandwidth measurement function was then used to measure the 26 dB emission bandwidth.

There is no required limit to be met in the rule part for this test. The purpose of the test is to both report the results and to utilize the emission bandwidth for setting the channel power integration bandwidth during conducted output power testing.

EMISSIONS BANDWIDTH



TbTx 2017.01.27 XMI 2017.02.08

EUT: Prism AWS3 SISO HDM 20 WATT		Work Order: TECO0042
Serial Number: 459644002		Date: 05/24/17
Customer: CommScope		Temperature: 21.6 °C
Attendees: Josh Wittman		Humidity: 46.4% RH
Project: None		Barometric Pres.: 1008 mbar
Tested by: Dustin Sparks	Power: 110VAC/60Hz	Job Site: MN08
TEST SPECIFICATIONS		
FCC 27:2017		Test Method
		ANSI/TIA/EIA-603-D-2010
COMMENTS		
System is rated at 20W (+43 dBm) per port. Both ports were terminated but only one port is active.		
DEVIATIONS FROM TEST STANDARD		
None		
Configuration #	2	Signature <i>Dustin Sparks</i>


	Value	Limit	Result
Low Channel (2112.5 MHz) WCDMA	4.675 MHz	N/A	N/A
Mid Channel (2145 MHz) WCDMA	4.659 MHz	N/A	N/A
Mid Channel (2145 MHz) WCDMA, Input Signal	5.48 MHz	N/A	N/A
High Channel (2177.5 MHz) WCDMA	4.667 MHz	N/A	N/A
Low Channel (2115 MHz) LTE 10 MHz	9.46 MHz	N/A	N/A
Mid Channel (2145 MHz) LTE 10 MHz	9.484 MHz	N/A	N/A
Mid Channel (2145 MHz) LTE 10 MHz, Input Signal	10.985 MHz	N/A	N/A
High Channel (2175 MHz) LTE 10 MHz, Input Signal	9.466 MHz	N/A	N/A

EMISSIONS BANDWIDTH




TMTX 2017.01.27 XMI 2017.02.08

Low Channel (2112.5 MHz) WCDMA						
				Value	Limit	Result
				4.675 MHz	N/A	N/A

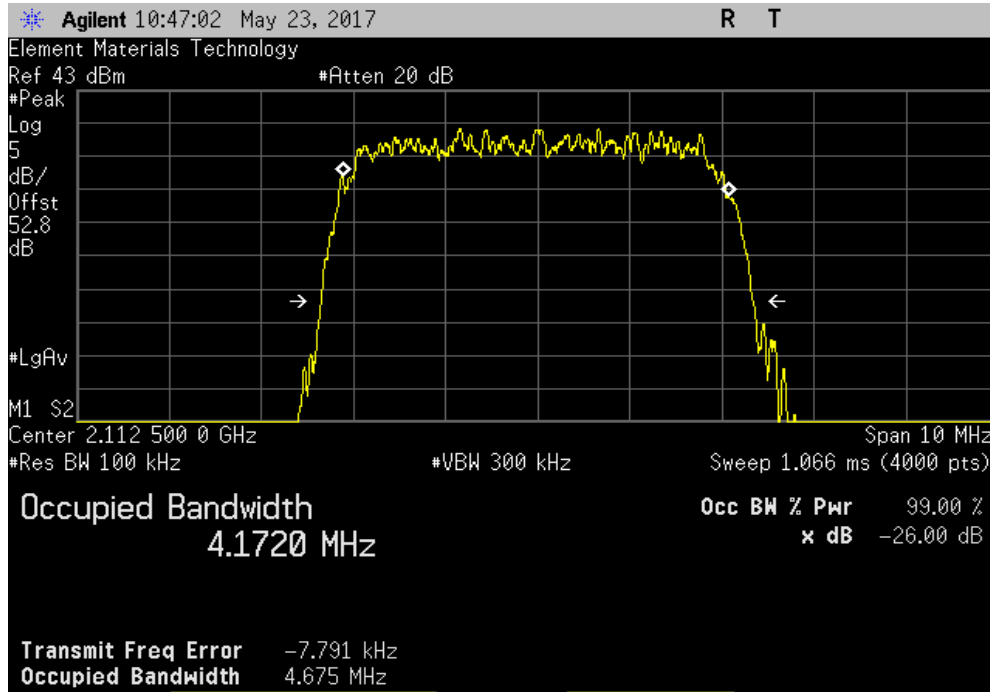

Mid Channel (2145 MHz) WCDMA						
				Value	Limit	Result
				4.659 MHz	N/A	N/A

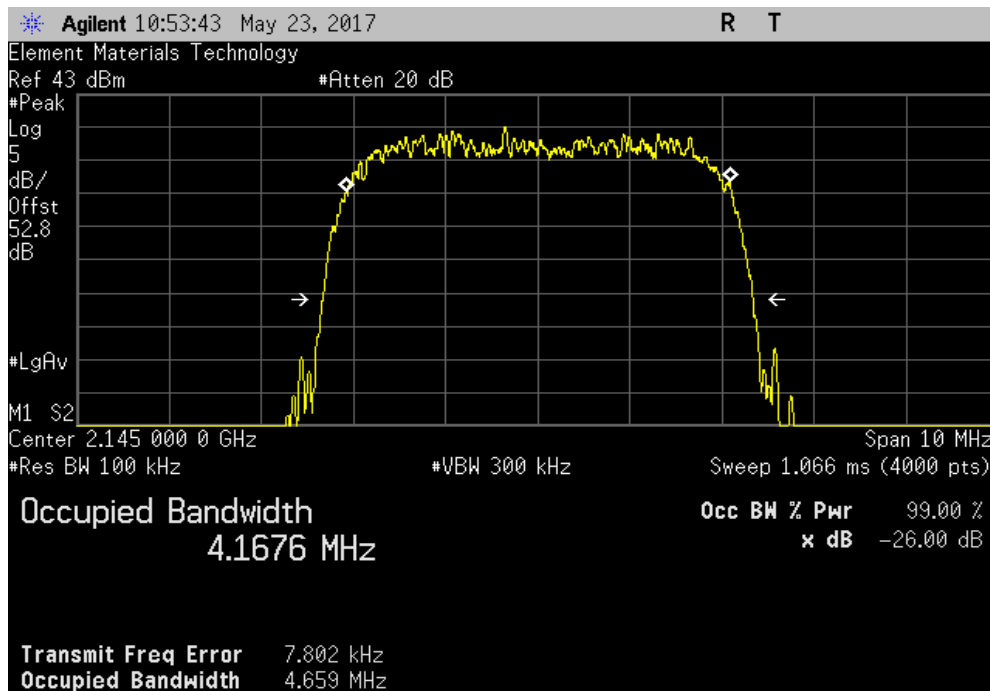


EMISSIONS BANDWIDTH




TMTX 2017.01.27 XMI 2017.02.08

Mid Channel (2145 MHz) WCDMA, Input Signal			
	Value	Limit	Result
	5.48 MHz	N/A	N/A

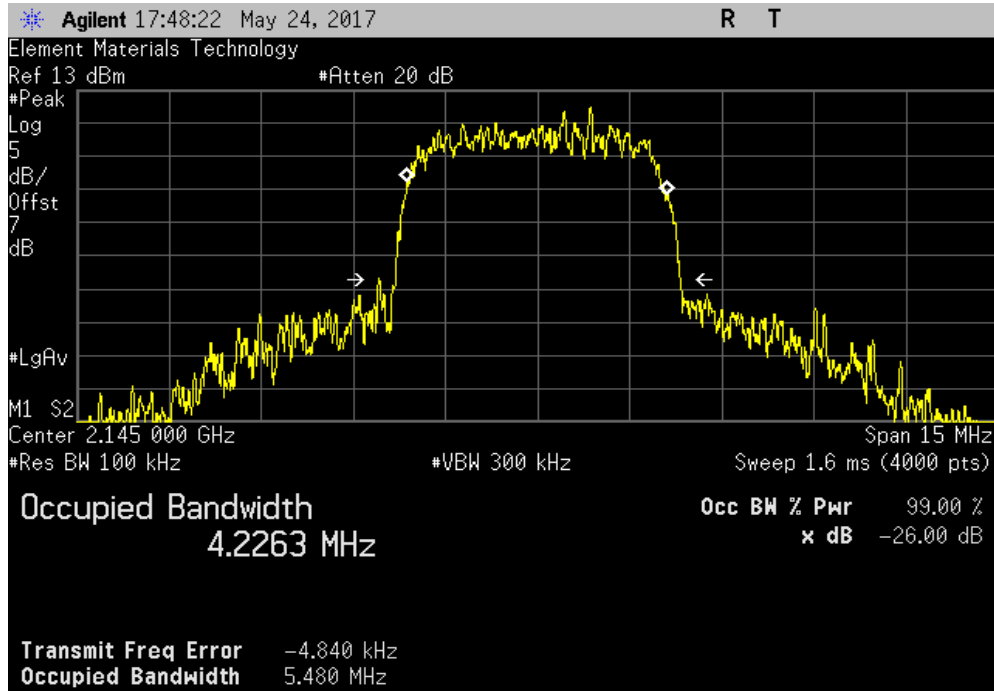

High Channel (2177.5 MHz) WCDMA			
	Value	Limit	Result
	4.667 MHz	N/A	N/A

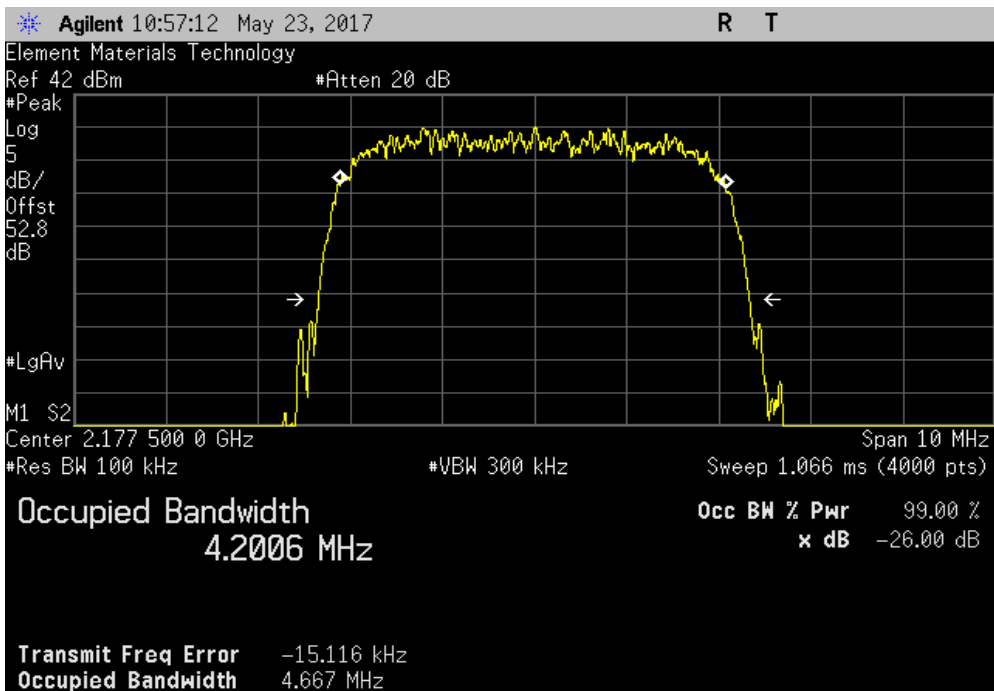


EMISSIONS BANDWIDTH




TMTx 2017.01.27 XMI 2017.02.08

Low Channel (2115 MHz) LTE 10 MHz						
				Value	Limit	Result
				9.46 MHz	N/A	N/A

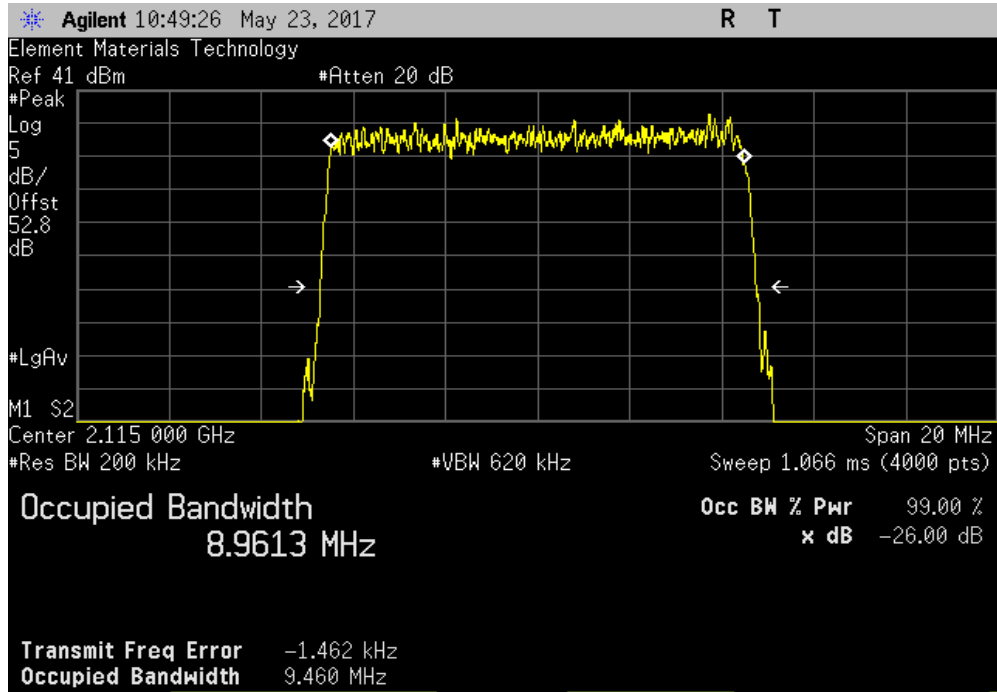

Mid Channel (2145 MHz) LTE 10 MHz						
				Value	Limit	Result
				9.484 MHz	N/A	N/A

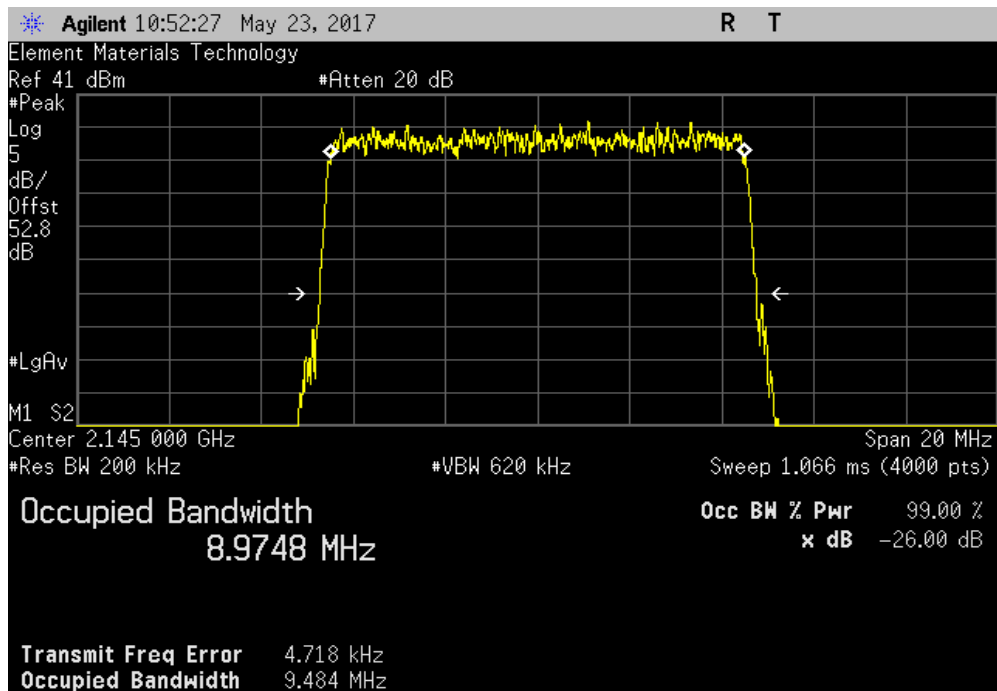


EMISSIONS BANDWIDTH




TMTX 2017.01.27 XMI 2017.02.08

Mid Channel (2145 MHz) LTE 10 MHz, Input Signal						
				Value	Limit	Result
				10.985 MHz	N/A	N/A

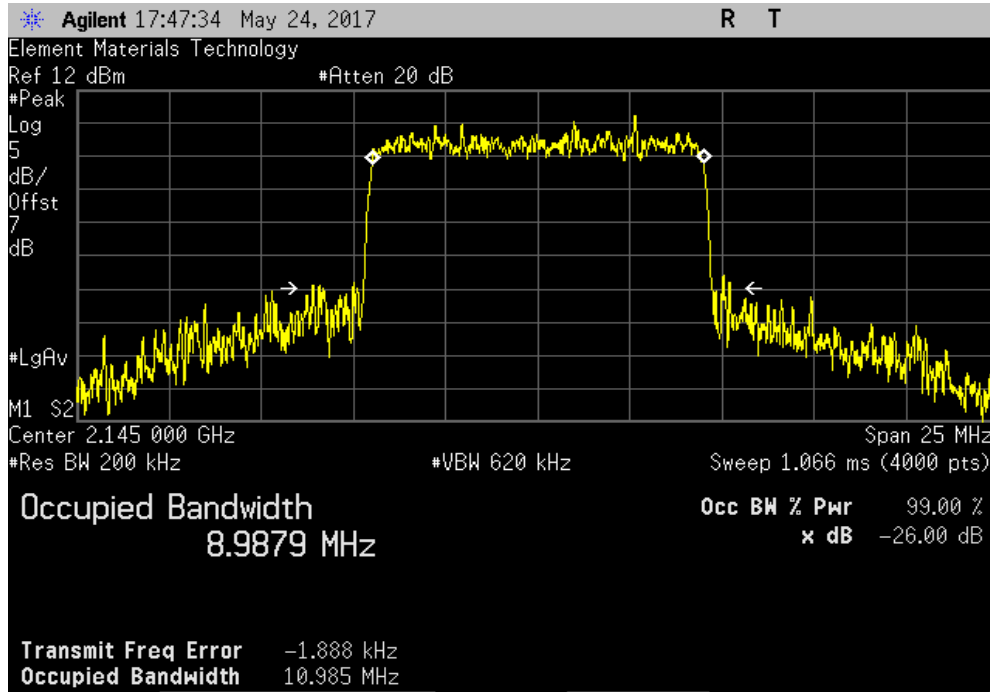

High Channel (2175 MHz) LTE 10 MHz, Input Signal						
				Value	Limit	Result
				9.466 MHz	N/A	N/A

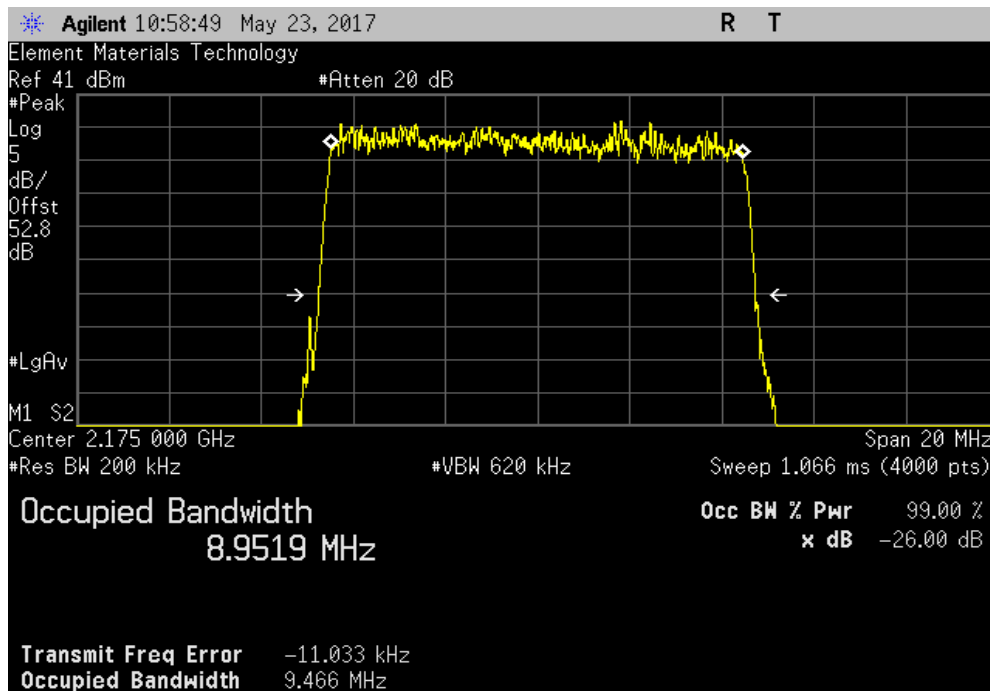

SPURIOUS RADIATED EMISSIONS



PSA-ESCI 2017.09.18

Testing was performed using the mode(s) of operation and configuration(s) noted within the report. The individuals and/or the organization requesting the test provided the modes, configurations and settings used to complete the evaluation. The actual test parameters are specified in the test data, this includes items such as investigated frequency range (scanned) and test levels. The testing methods and performance specifications, as well as the test site used for the evaluation are indicated in the test data. The test data represents the configuration / operating mode/ model that produced the highest emission levels as compared to the specification limit.

MODES OF OPERATION

Transmitting at Low Channel (2112.5 MHz, WCDMA/LTE-5, and 2115 MHz, LTE-10), Mid Channel (2145 MHz, WCDMA, LTE-5/10), High Channel (2177.5 MHz, WCDMA/LTE-5, and 2175 MHz, LTE-10)

POWER SETTINGS INVESTIGATED

110VAC/60Hz

CONFIGURATIONS INVESTIGATED

TECO0046 - 1

FREQUENCY RANGE INVESTIGATED

Start Frequency	30 MHz	Stop Frequency	26500 MHz
-----------------	--------	----------------	-----------

SAMPLE CALCULATIONS

Radiated Emissions: Field Strength = Measured Level + Antenna Factor + Cable Factor - Amplifier Gain + Distance Adjustment Factor + External Attenuation

TEST EQUIPMENT

Description	Manufacturer	Model	ID	Last Cal.	Interval
Analyzer - Spectrum Analyzer	Agilent	E4440A	AAX	16-Mar-2017	12 mo
Amplifier - Pre-Amplifier	Miteq	JSD4-18002600-26-8P	APU	12-Sep-2017	12 mo
Cable	ESM Cable Corp.	TTBJ141 KMKM-72	MNU	11-Sep-2017	12 mo
Antenna - Standard Gain	ETS Lindgren	3160-09	AHG	NCR	0 mo
Amplifier - Pre-Amplifier	Miteq	AMF-6F-12001800-30-10P	AVW	23-Feb-2017	12 mo
Antenna - Standard Gain	ETS Lindgren	3160-08	AIQ	NCR	0 mo
Amplifier - Pre-Amplifier	Miteq	AMF-6F-08001200-30-10P	AVV	23-Feb-2017	12 mo
Cable	ESM Cable Corp.	Standard Gain Horn Cables	MNJ	12-Jul-2017	12 mo
Antenna - Standard Gain	ETS Lindgren	3160-07	AXP	NCR	0 mo
Filter - High Pass	Micro-Tronics	HPM50111	LFN	20-Sep-2017	12 mo
Attenuator	Fairview Microwave	SA18E-20	TWZ	20-Sep-2017	12 mo
Amplifier - Pre-Amplifier	Miteq	AMF-3D-00100800-32-13P	AVT	23-Feb-2017	12 mo
Cable	ESM Cable Corp.	Double Ridge Guide Horn Cables	MNI	21-Nov-2017	12 mo
Antenna - Double Ridge	ETS Lindgren	3115	AJA	23-Jun-2016	24 mo
Amplifier - Pre-Amplifier	Miteq	AM-1616-1000	AVO	9-Nov-2017	12 mo
Cable	ESM Cable Corp.	Bilog Cables	MNH	9-Nov-2017	12 mo
Antenna - Biconilog	Teseq	CBL 6141B	AYD	25-Jan-2018	24 mo

MEASUREMENT BANDWIDTHS

Frequency Range (MHz)	Peak Data (kHz)	Quasi-Peak Data (kHz)	Average Data (kHz)
0.01 - 0.15	1.0	0.2	0.2
0.15 - 30.0	10.0	9.0	9.0
30.0 - 1000	100.0	120.0	120.0
Above 1000	1000.0	N/A	1000.0

TEST DESCRIPTION

The EUT was tested with shielded terminators on the RF output ports instead of antennas.


At an approved test site, the transmitter is placed on a remotely controlled turntable, and the measurement antenna is placed 3 meters from the transmitter. The turntable azimuth is varied to maximize the level of spurious emissions. The height of the measurement antenna is also varied from 1 to 4 meters. The amplitude and frequency of the highest emissions are noted. The transmitter is then replaced with a $\frac{1}{2}$ wave dipole that is successively tuned to each of the highest spurious emissions for emissions below 1 GHz, and a horn antenna for emissions above 1 GHz. A signal generator is connected to the dipole (horn antenna for frequencies above 1 GHz), and its output is adjusted to match the level previously noted for each frequency. The output of the signal generator is recorded, and by factoring in the cable loss to the antenna and its gain; the power (dBm) into an ideal $\frac{1}{2}$ wave dipole antenna is determined for each radiated spurious emission.

SPURIOUS RADIATED EMISSIONS




EmiR5 2017.09.18.2

PSA-ESCI 2017.09.18

Work Order:	TECO0046	Date:	16-Feb-2018	
Project:	None	Temperature:	22.6 °C	
Job Site:	MN05	Humidity:	15.3% RH	
Serial Number:	45087200002	Barometric Pres.:	1031 mbar	
Tested by:	Chris Patterson			
EUT:	Prism AWS3 SISO HDM 20 Watt			
Configuration:	1			
Customer:	CommScope			
Attendees:	Joshua Wittman			
EUT Power:	110VAC/60Hz			
Operating Mode:	Transmitting at Low Channel (2112.5 MHz, WCDMA/LTE-5, and 2115 MHz, LTE-10), Mid Channel (2145 MHz, WCDMA, LTE-5/10), High Channel (2177.5 MHz, WCDMA/LTE-5, and 2175 MHz, LTE-10)			
Deviations:	None			
Comments:	Both ports were terminated but only one port is active.			

Test Specifications	FCC 27.53:2018	Test Method	ANSI C63.26:2015
Run #	4	Test Distance (m)	3
Antenna Height(s)	1 to 4(m)		Results
			Pass

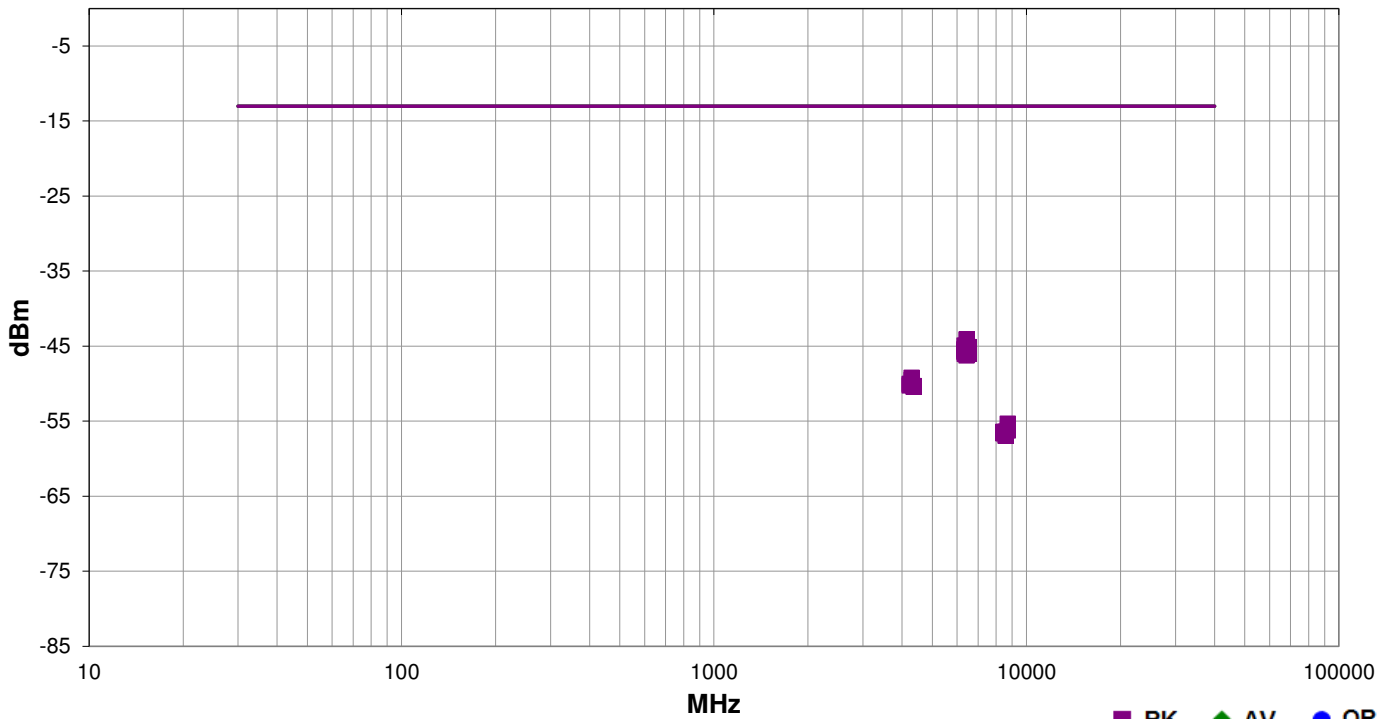

Freq (MHz)	Antenna Height (meters)	Azimuth (degrees)	Polarity/Transducer Type	Detector	EIRP (Watts)	EIRP (dBm)	Spec. Limit (dBm)	Compared to Spec. (dB)	Comments
6435.342	1.0	282.9	Vert	PK	3.86E-08	-44.1	-13.0	-31.1	Mid Channel, LTE-5
6335.533	1.0	258.9	Horz	PK	3.21E-08	-44.9	-13.0	-31.9	Low Channel, WCDMA
6436.350	1.0	243.0	Vert	PK	3.21E-08	-44.9	-13.0	-31.9	Mid Channel, LTE-10
6435.208	1.0	355.9	Vert	PK	3.07E-08	-45.1	-13.0	-32.1	Mid Channel, WCDMA
6532.758	1.0	336.9	Vert	PK	3.07E-08	-45.1	-13.0	-32.1	High Channel, WCDMA

Freq (MHz)	Antenna Height (meters)	Azimuth (degrees)	Polarity/Transducer Type	Detector	EIRP (Watts)	EIRP (dBm)	Spec. Limit (dBm)	Compared to Spec. (dB)	Comments
6338.225	1.2	90.0	Vert	PK	2.86E-08	-45.4	-13.0	-32.4	Low Channel, WCDMA
6531.500	1.0	157.0	Horz	PK	2.86E-08	-45.4	-13.0	-32.4	High Channel, LTE-5
6432.517	1.2	189.0	Horz	PK	2.86E-08	-45.4	-13.0	-32.4	Mid Channel, LTE-10
6343.675	1.0	235.0	Vert	PK	2.86E-08	-45.4	-13.0	-32.4	Low Channel (2115 MHz), LTE-10
6530.883	1.0	185.1	Horz	PK	2.86E-08	-45.4	-13.0	-32.4	High Channel, WCDMA
6534.158	3.5	97.0	Vert	PK	2.80E-08	-45.5	-13.0	-32.5	High Channel, LTE-5
6523.283	2.9	0.0	Vert	PK	2.80E-08	-45.5	-13.0	-32.5	High Channel (2175 MHz), LTE-10
6434.883	1.0	171.0	Horz	PK	2.74E-08	-45.6	-13.0	-32.6	Mid Channel, LTE-5
6336.608	1.0	126.0	Horz	PK	2.67E-08	-45.7	-13.0	-32.7	Low Channel, LTE-5
6336.458	1.0	360.0	Vert	PK	2.67E-08	-45.7	-13.0	-32.7	Low Channel, LTE-5
6524.525	2.6	343.0	Horz	PK	2.50E-08	-46.0	-13.0	-33.0	High Channel (2175 MHz), LTE-10
6342.517	3.5	253.0	Horz	PK	2.50E-08	-46.0	-13.0	-33.0	Low Channel (2115 MHz), LTE-10
6435.375	1.0	306.0	Horz	PK	2.38E-08	-46.2	-13.0	-33.2	Mid Channel, WCDMA
4289.692	1.0	216.0	Vert	PK	1.19E-08	-49.2	-13.0	-36.2	Mid Channel, WCDMA
4291.500	1.0	30.1	Horz	PK	1.11E-08	-49.5	-13.0	-36.5	Mid Channel, WCDMA
4226.500	1.0	202.1	Vert	PK	9.93E-09	-50.0	-13.0	-37.0	Low Channel, WCDMA
4227.167	1.0	219.0	Horz	PK	9.49E-09	-50.2	-13.0	-37.2	Low Channel, WCDMA
4356.833	1.0	293.9	Vert	PK	9.27E-09	-50.3	-13.0	-37.3	High Channel, WCDMA
4355.942	1.0	325.9	Horz	PK	9.06E-09	-50.4	-13.0	-37.4	High Channel, WCDMA
8707.967	1.1	231.0	Horz	PK	2.93E-09	-55.3	-13.0	-42.3	High Channel, WCDMA
8711.917	1.0	169.0	Vert	PK	2.38E-09	-56.2	-13.0	-43.2	High Channel, WCDMA
8447.667	2.5	11.1	Horz	PK	2.28E-09	-56.4	-13.0	-43.4	Low Channel, WCDMA
8580.658	1.0	297.0	Horz	PK	2.28E-09	-56.4	-13.0	-43.4	Mid Channel, WCDMA
8450.917	1.0	227.1	Vert	PK	2.17E-09	-56.6	-13.0	-43.6	Low Channel, WCDMA
8578.367	1.0	310.0	Vert	PK	2.03E-09	-56.9	-13.0	-43.9	Mid Channel, WCDMA

SPURIOUS CONDUCTED EMISSIONS



XMI 2017.02.08

Testing was performed using the mode(s) of operation and configuration(s) noted within the report. The individuals and/or the organization requesting the test provided the modes, configurations and settings used to complete the evaluation. The actual test parameters are specified in the test data, this includes items such as investigated frequency range (scanned) and test levels. The testing methods and performance specifications, as well as the test site used for the evaluation are indicated in the test data.

TEST EQUIPMENT

Description	Manufacturer	Model	ID	Last Cal.	Cal. Due
Attenuator	Aeroflex	48-30-34	RCU	9/15/2016	9/15/2017
Generator - Signal	Agilent	N5183A	TIK	10/17/2014	10/17/2017
Cable	ESM Cable Corp	TTBJ141 KMKM-72	MNP	NCR	NCR
Attenuator	S.M. Electronics	SA26B-20	RFW	2/14/2017	2/14/2018
Block - DC	Fairview Microwave	SD3379	AMI	9/15/2016	9/15/2017
Analyzer - Spectrum Analyzer	Agilent	E4440A	AAX	3/16/2017	3/16/2018

TEST DESCRIPTION

The measurement was made using a direct connection between the RF output of the EUT and a spectrum analyzer. Analyzer plots utilizing a 1 MHz resolution bandwidth and no video filtering were made for each mode listed in the datasheet.

An RF signal generator was used to create the modulated signal(s) listed in the datasheets. These signals were input into the EUT.

The peak conducted power of spurious emissions, up to the 10th harmonic of the transmit frequency, were investigated to ensure they were less than or equal to the limit. Emissions close to the limit were re-measured using an RMS Average detector to match the method used during output power measurements.

SPURIOUS CONDUCTED EMISSIONS



TbTx 2017.01.27 XMI 2017.02.08


EUT: Prism AWS3 SISO HDM 20 Watt		Work Order: TECO0042	
Serial Number: 459644002		Date: 05/24/17	
Customer: CommScope		Temperature: 21.9 °C	
Attendees: Josh Wittman		Humidity: 43% RH	
Project: None		Barometric Pres.: 1011 mbar	
Tested by: Dustin Sparks		Power: 110VAC/60Hz	
		Job Site: MN08	
TEST SPECIFICATIONS			
FCC 27:2017		Test Method	
		ANSI/TIA/EIA-603-D-2010	
COMMENTS			
Antenna gain is assumed to be 0 - per customer, the antenna gain will be reevaluated during installation. System is rated at 20W (+43 dBm) per port. Both ports were terminated but only one port is active.			
DEVIATIONS FROM TEST STANDARD			
None			
Configuration #	2	Signature <i>Dustin Sparks</i>	
		Frequency Range	Max Value (dBm) Limit ≤ (dBm) Result
Low Channel (2112.5 MHz) WCDMA		30 MHz - 12.5 GHz	-19.58 -13 Pass
Low Channel (2112.5 MHz) WCDMA		12.5 GHz - 22 GHz	-16.6 -13 Pass
Mid Channel (2145 MHz) WCDMA		30 MHz - 12.5 GHz	-20.63 -13 Pass
Mid Channel (2145 MHz) WCDMA		12.5 GHz - 22 GHz	-17.07 -13 Pass
High Channel (2177.5 MHz) WCDMA		30 MHz - 12.5 GHz	-20.07 -13 Pass
High Channel (2177.5 MHz) WCDMA		12.5 GHz - 22 GHz	-16.83 -13 Pass
Low Channel (2115 MHz) LTE 10MHz		30 MHz - 12.5 GHz	-20.31 -13 Pass
Low Channel (2115 MHz) LTE 10MHz		12.5 GHz - 22 GHz	-16.4 -13 Pass
Mid Channel (2145 MHz) LTE 10MHz		30 MHz - 12.5 GHz	-19.97 -13 Pass
Mid Channel (2145 MHz) LTE 10MHz		12.5 GHz - 22 GHz	-16.43 -13 Pass
High Channel (2175 MHz) LTE 10MHz		30 MHz - 12.5 GHz	-20.49 -13 Pass
High Channel (2175 MHz) LTE 10MHz		12.5 GHz - 22 GHz	-16.41 -13 Pass

SPURIOUS CONDUCTED EMISSIONS




TMTX 2017.01.27 XMI 2017.02.08

Low Channel (2112.5 MHz) WCDMA					
Frequency Range		Max Value (dBm)	Limit ≤ (dBm)	Result	
30 MHz - 12.5 GHz		-19.58	-13	Pass	

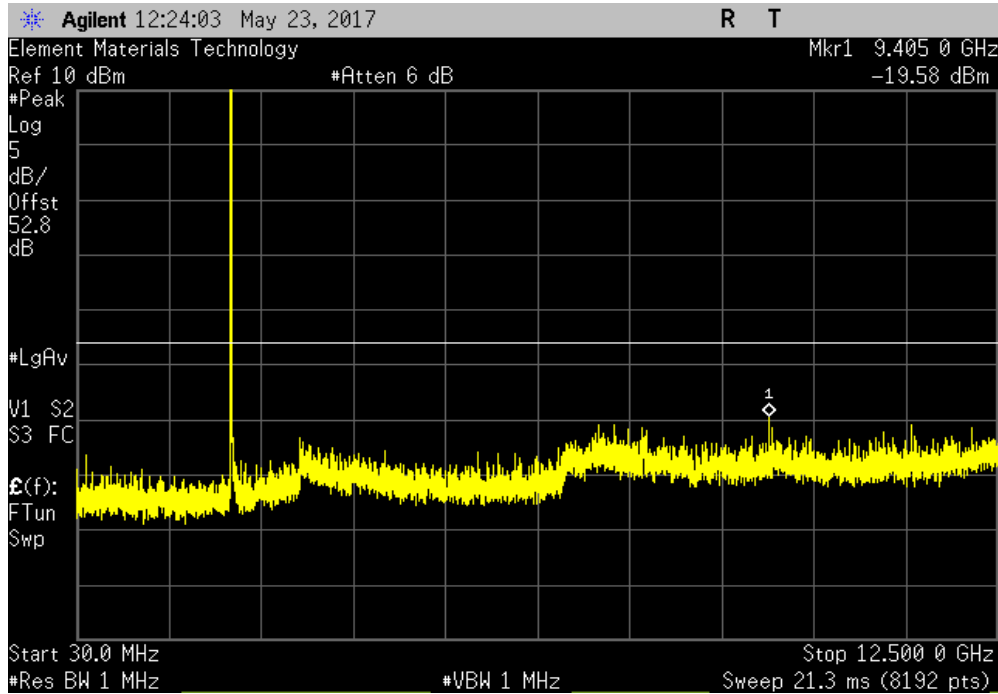

Low Channel (2112.5 MHz) WCDMA					
Frequency Range		Max Value (dBm)	Limit ≤ (dBm)	Result	
12.5 GHz - 22 GHz		-16.6	-13	Pass	

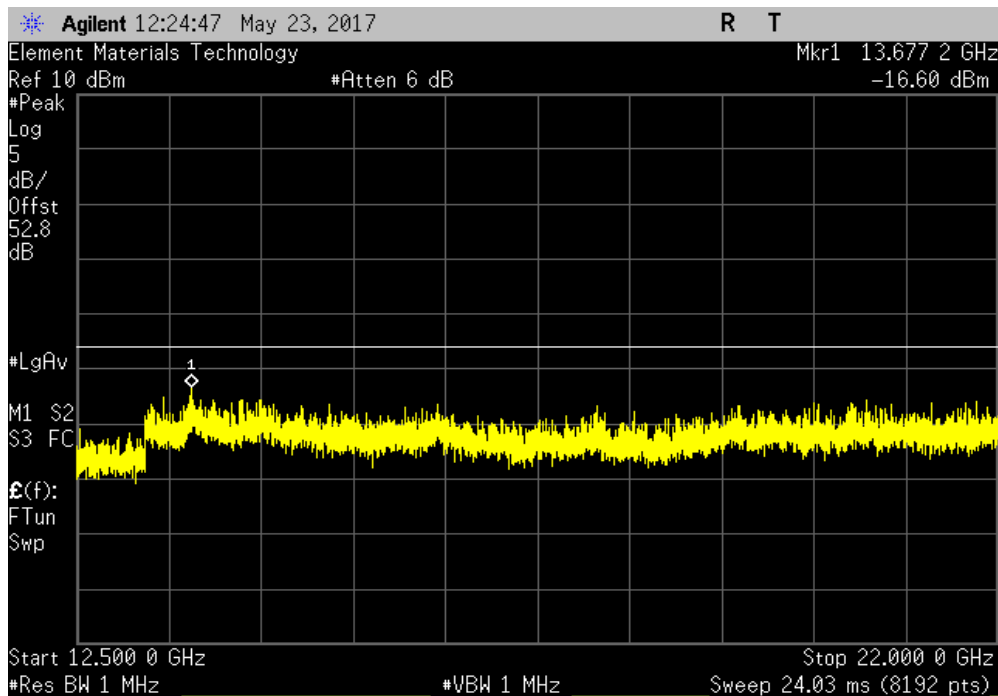


SPURIOUS CONDUCTED EMISSIONS




TMTX 2017.01.27 XMI 2017.02.08

Mid Channel (2145 MHz) WCDMA					
Frequency Range		Max Value (dBm)	Limit ≤ (dBm)	Result	
30 MHz - 12.5 GHz		-20.63	-13	Pass	

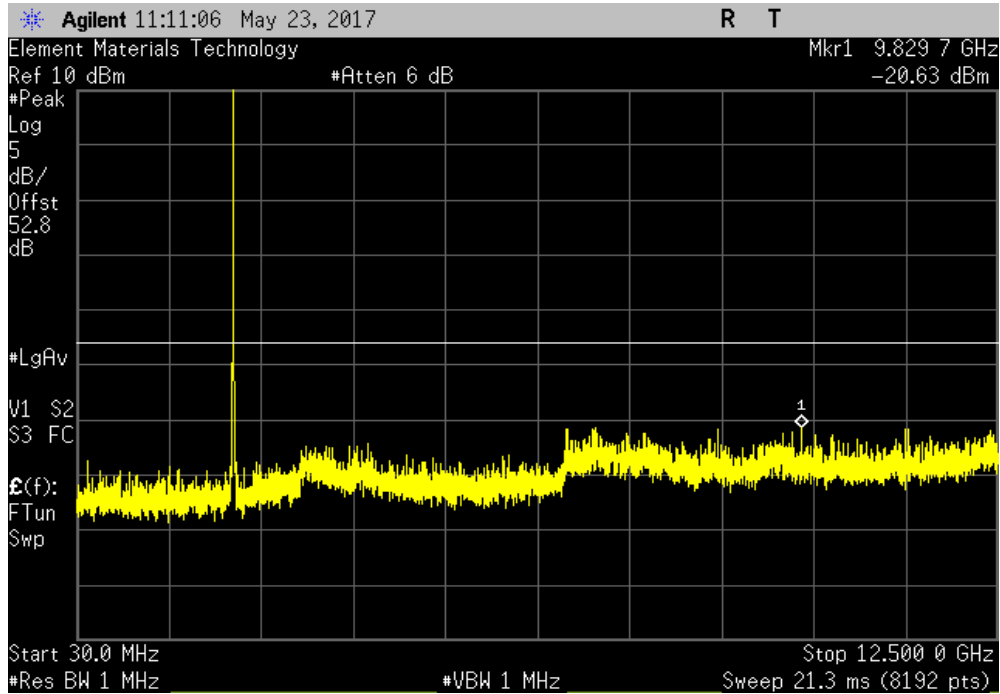

Mid Channel (2145 MHz) WCDMA					
Frequency Range		Max Value (dBm)	Limit ≤ (dBm)	Result	
12.5 GHz - 22 GHz		-17.07	-13	Pass	

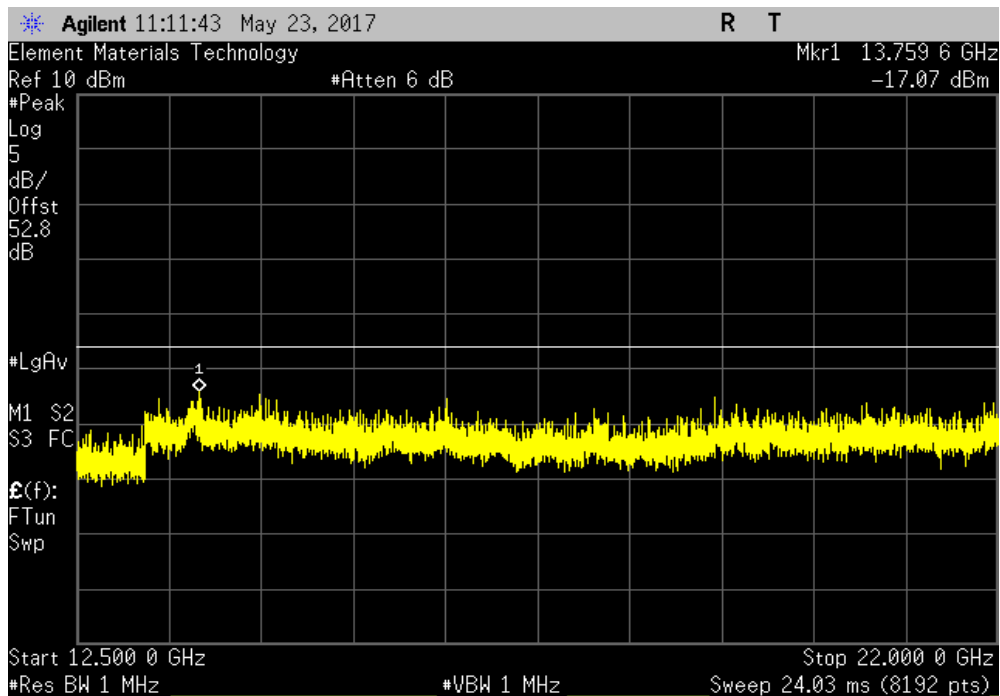


SPURIOUS CONDUCTED EMISSIONS




TMTx 2017.01.27 XMI 2017.02.08

High Channel (2177.5 MHz) WCDMA					
Frequency Range		Max Value (dBm)	Limit ≤ (dBm)	Result	
30 MHz - 12.5 GHz		-20.07	-13	Pass	

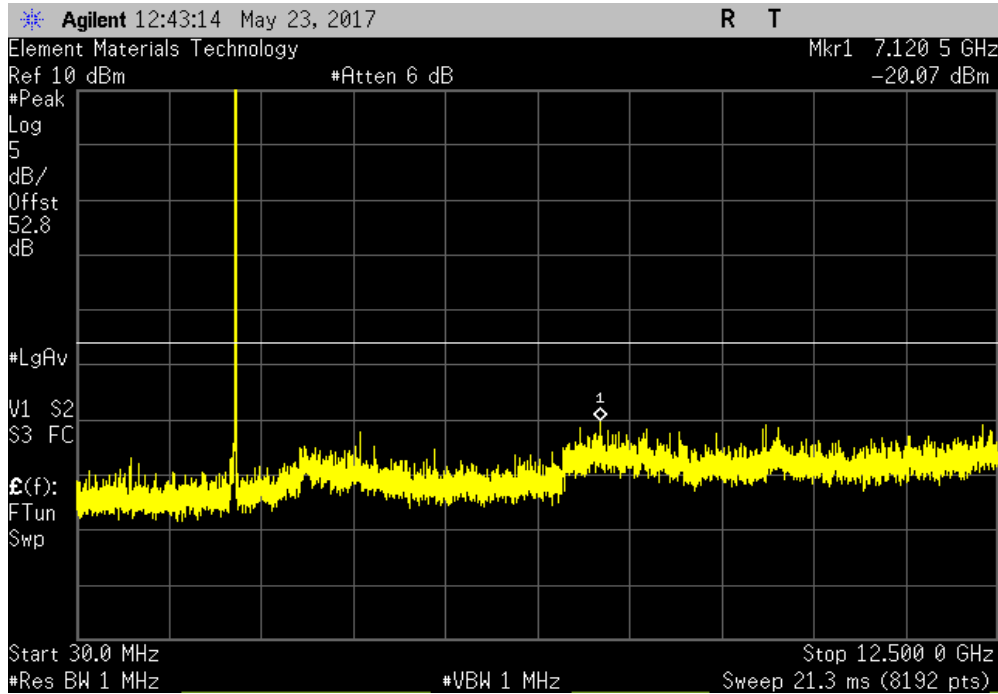

High Channel (2177.5 MHz) WCDMA					
Frequency Range		Max Value (dBm)	Limit ≤ (dBm)	Result	
12.5 GHz - 22 GHz		-16.83	-13	Pass	

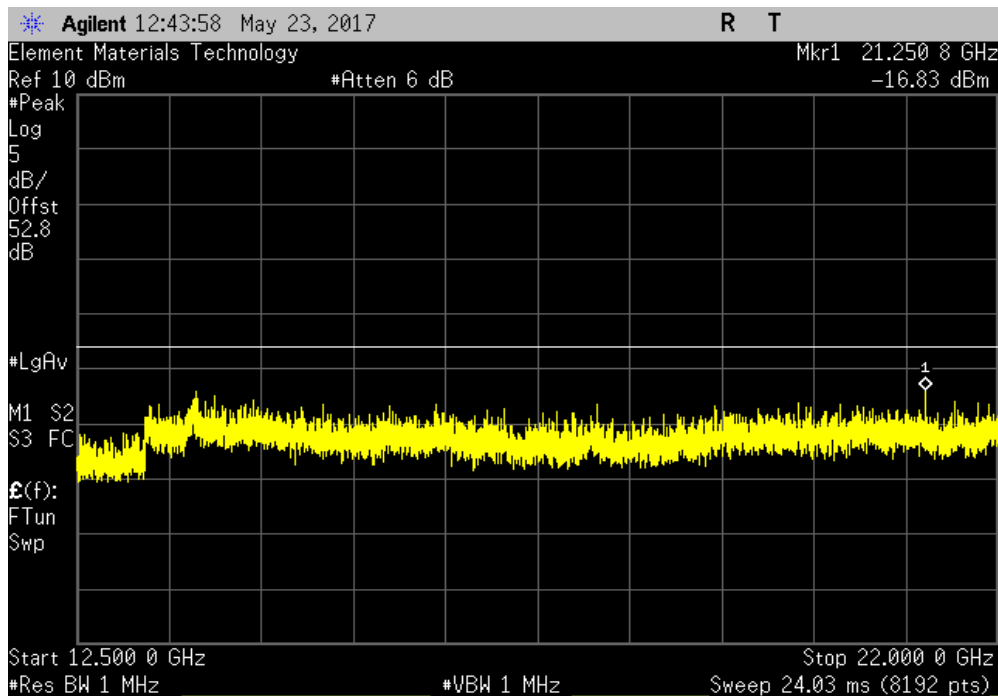


SPURIOUS CONDUCTED EMISSIONS




TMTx 2017.01.27 XMI 2017.02.08

Low Channel (2115 MHz) LTE 10MHz					
Frequency Range		Max Value (dBm)	Limit ≤ (dBm)	Result	
30 MHz - 12.5 GHz		-20.31	-13	Pass	

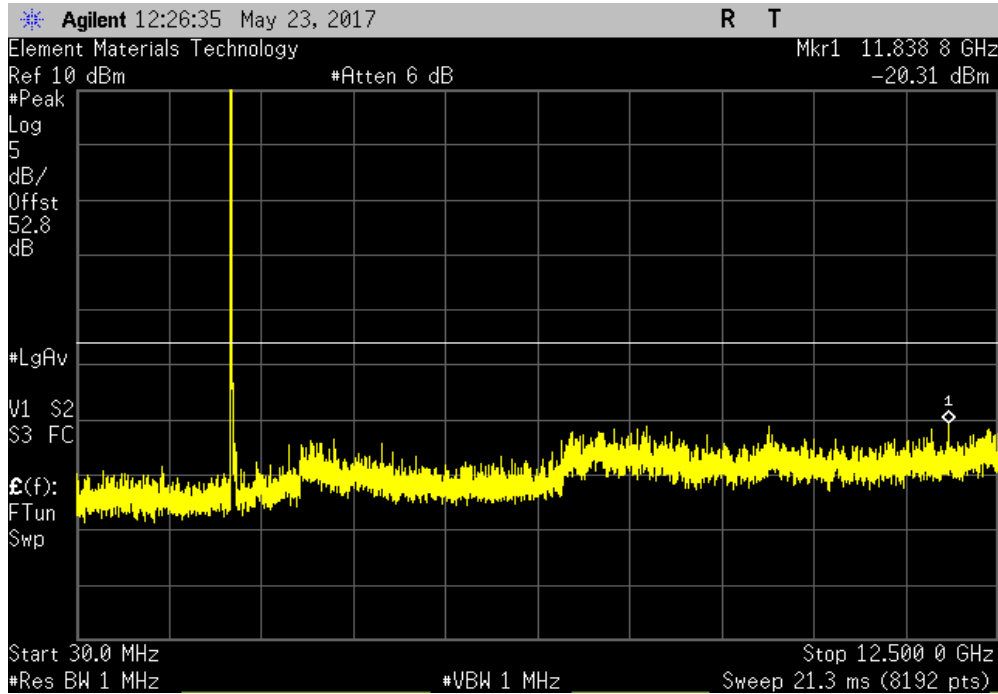

Low Channel (2115 MHz) LTE 10MHz					
Frequency Range		Max Value (dBm)	Limit ≤ (dBm)	Result	
12.5 GHz - 22 GHz		-16.4	-13	Pass	

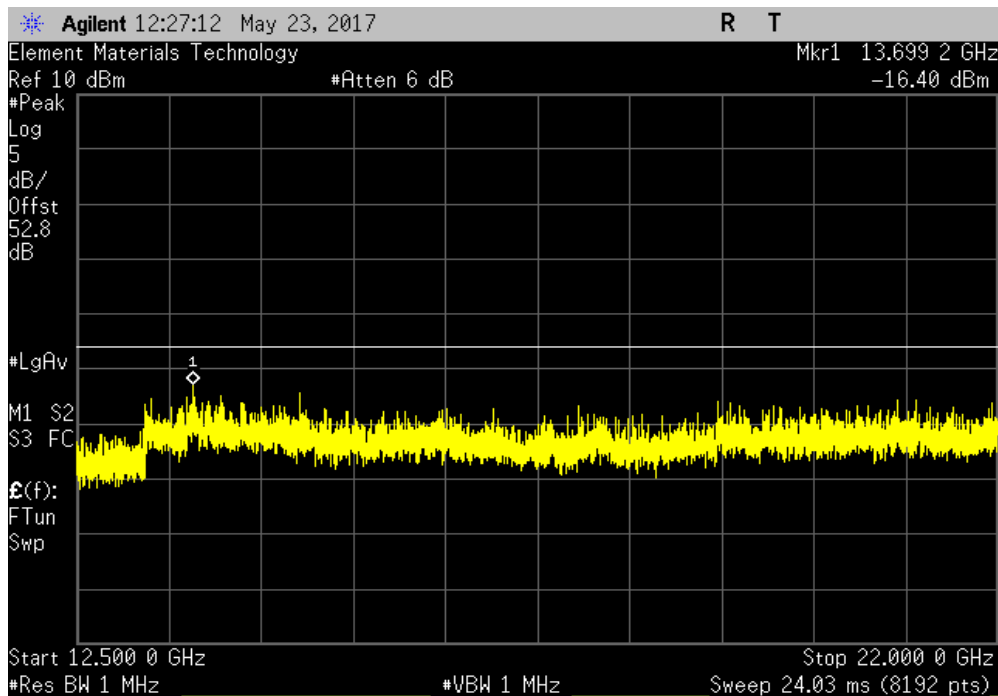


SPURIOUS CONDUCTED EMISSIONS




TMTX 2017.01.27 XMI 2017.02.08

Mid Channel (2145 MHz) LTE 10MHz					
Frequency Range		Max Value (dBm)	Limit ≤ (dBm)	Result	
30 MHz - 12.5 GHz		-19.97	-13	Pass	

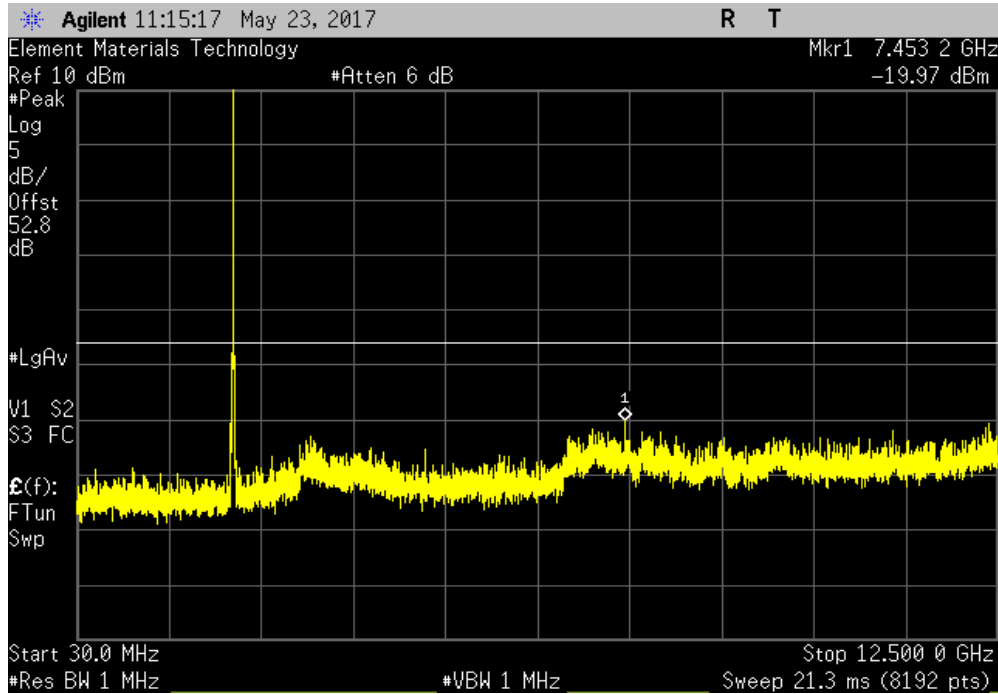

Mid Channel (2145 MHz) LTE 10MHz					
Frequency Range		Max Value (dBm)	Limit ≤ (dBm)	Result	
12.5 GHz - 22 GHz		-16.43	-13	Pass	

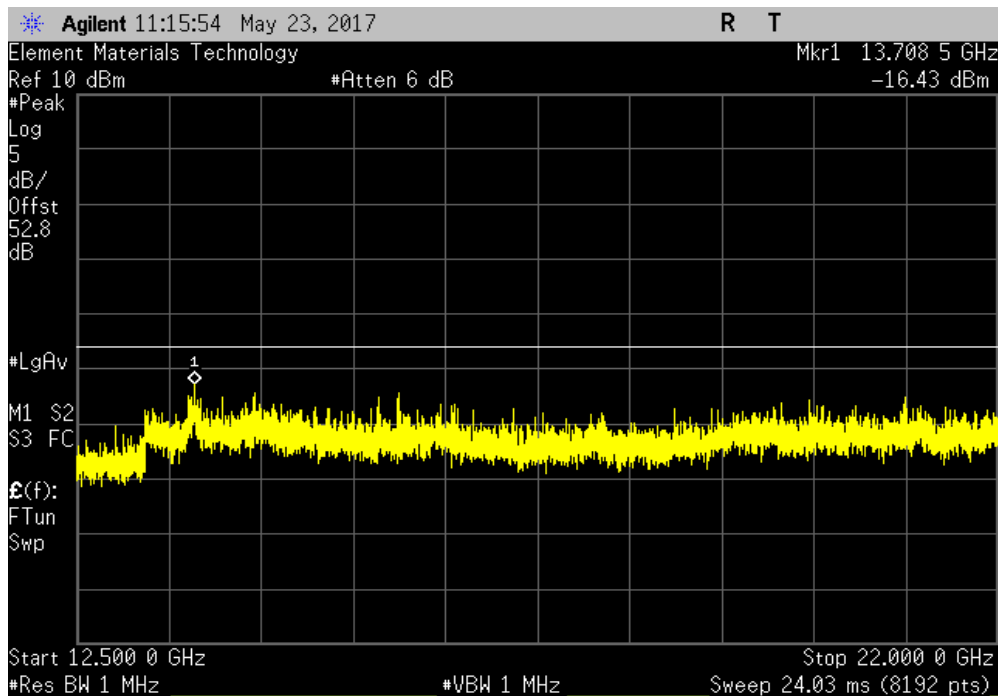


SPURIOUS CONDUCTED EMISSIONS




TMTx 2017.01.27 XMI 2017.02.08

High Channel (2175 MHz) LTE 10MHz					
Frequency Range		Max Value (dBm)	Limit ≤ (dBm)	Result	
30 MHz - 12.5 GHz		-20.49	-13	Pass	

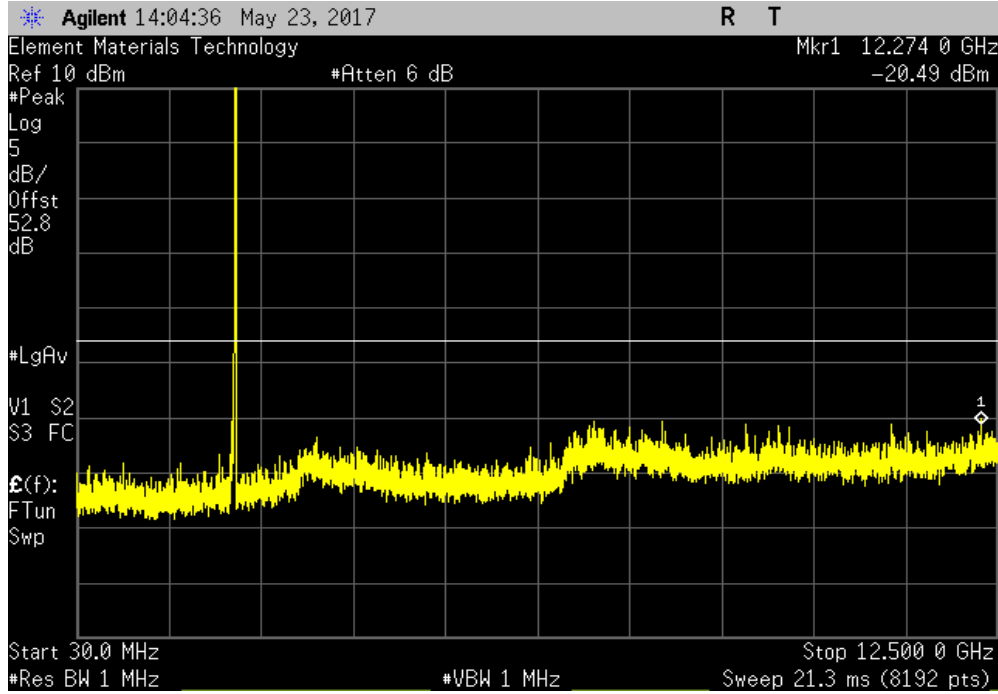

High Channel (2175 MHz) LTE 10MHz					
Frequency Range		Max Value (dBm)	Limit ≤ (dBm)	Result	
12.5 GHz - 22 GHz		-16.41	-13	Pass	

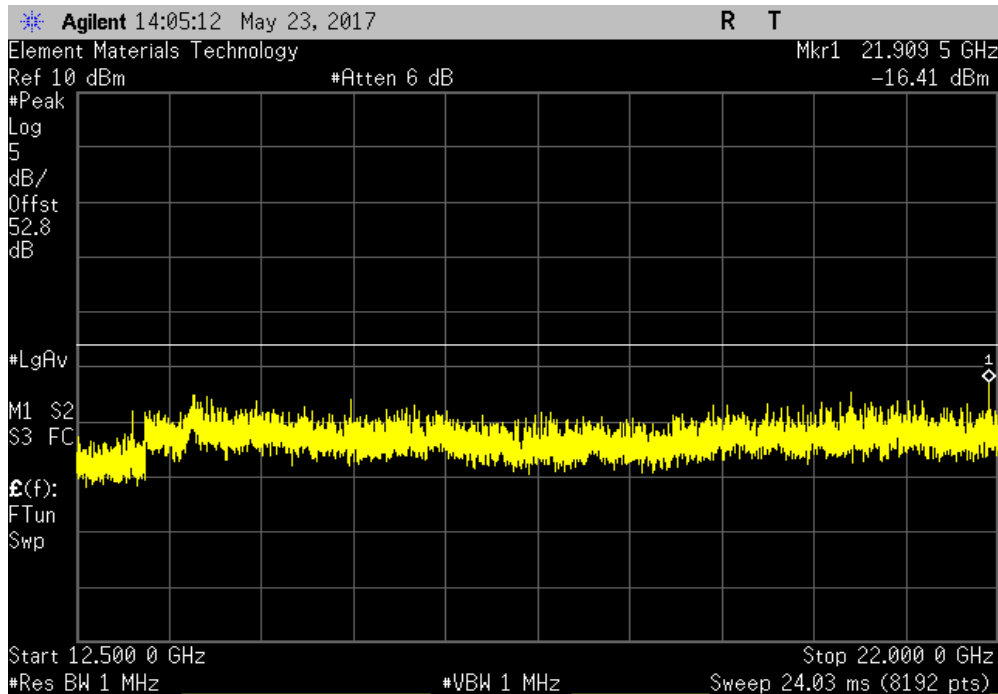

BAND EDGE COMPLIANCE



XMI 2017.02.08

Testing was performed using the mode(s) of operation and configuration(s) noted within the report. The individuals and/or the organization requesting the test provided the modes, configurations and settings used to complete the evaluation. The actual test parameters are specified in the test data, this includes items such as investigated frequency range (scanned) and test levels. The testing methods and performance specifications, as well as the test site used for the evaluation are indicated in the test data.

TEST EQUIPMENT

Description	Manufacturer	Model	ID	Last Cal.	Cal. Due
Attenuator	Aeroflex	48-30-34	RCU	9/15/2016	9/15/2017
Generator - Signal	Agilent	N5183A	TIK	10/17/2014	10/17/2017
Cable	ESM Cable Corp	TTBJ141 KMKM-72	MNP	NCR	NCR
Attenuator	S.M. Electronics	SA26B-20	RFW	2/14/2017	2/14/2018
Block - DC	Fairview Microwave	SD3379	AMI	9/15/2016	9/15/2017
Analyzer - Spectrum Analyzer	Agilent	E4440A	AAX	3/16/2017	3/16/2018

TEST DESCRIPTION

The measurement was made using a direct connection between the RF output of the EUT and a spectrum analyzer. An RF signal generator was used to create the modulated signal(s) listed in the datasheets. These signals were input into the EUT.

The spurious RF conducted emissions at the edges of the authorized bands were measured with the EUT set to low and high transmit frequencies in the available band. The channels closest to the band edges were selected. The EUT was transmitting at the data rate(s) listed in the datasheet.

The spectrum was scanned below the lower band edge and above the higher band edge. The resolution bandwidth was set to approximately 1% of the measured emissions bandwidth within the first 1 MHz block adjacent to the transmit band. An average RMS detector was used to match the method used during Output Power. The screen capture shows the margin between the measured value and the limit at the band edge. Failing measurements were re-measured using the channel power integration method as called out in the standard.

BAND EDGE COMPLIANCE



TbTx 2017.01.27 XMI 2017.02.08


EUT: Prism AWS3 SISO HDM 20 Watt		Work Order: TECO0042	
Serial Number: 459644002		Date: 05/23/17	
Customer: CommScope		Temperature: 24.2 °C	
Attendees: Josh Wittman		Humidity: 40% RH	
Project: None		Barometric Pres.: 1012 mbar	
Tested by: Dustin Sparks		Power: 110VAC/60Hz	
		Job Site: MN08	
TEST SPECIFICATIONS			
FCC 27:2017		Test Method	
		ANSI/TIA/EIA-603-D-2010	
COMMENTS			
Antenna gain is assumed to be 0 - per customer, the antenna gain will be reevaluated during installation. System is rated at 20W (+43 dBm) per port. Both ports were terminated but only one port is active.			
DEVIATIONS FROM TEST STANDARD			
None			
Configuration #	2	Signature <i>Dustin Sparks</i>	
		Value (dBm)	Limit (dBm) Result
Low Channel (2112.5 MHz) WCDMA		-18.37	-13 Pass
High Channel (2177.5 MHz) WCDMA		-21.15	-13 Pass
Low Channel (2115 MHz) LTE 10MHz		-18.54	-13 Pass
High Channel (2175 MHz) LTE 10MHz		-20.78	-13 Pass

BAND EDGE COMPLIANCE




TMTx 2017.01.27 XMI 2017.02.08

Low Channel (2112.5 MHz) WCDMA						
				Value (dBm)	Limit (dBm)	Result
				-18.37	-13	Pass

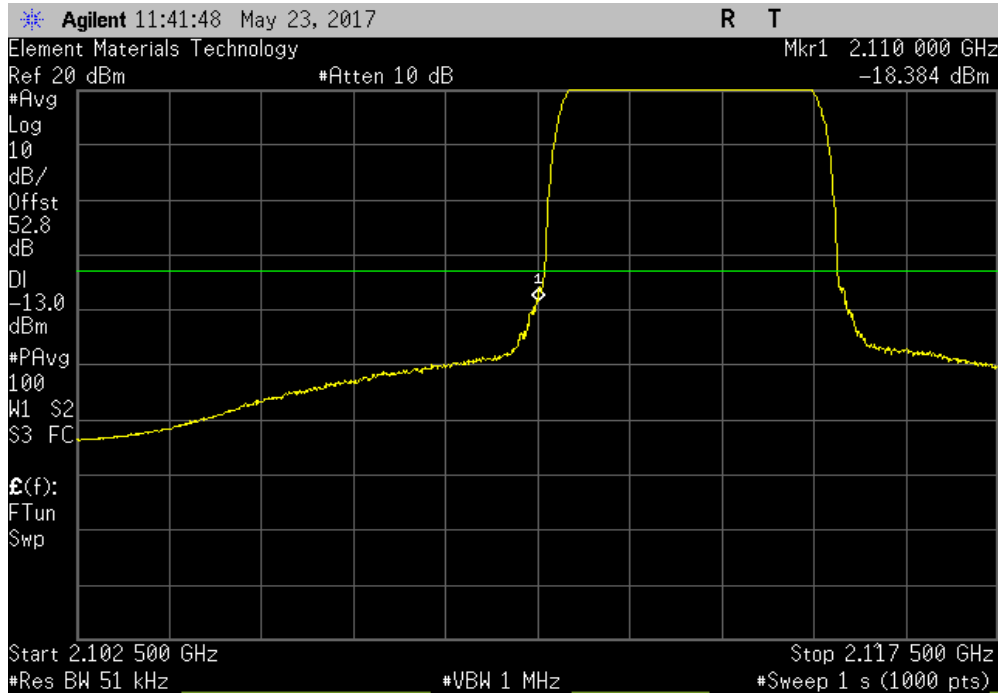

High Channel (2177.5 MHz) WCDMA						
				Value (dBm)	Limit (dBm)	Result
				-21.15	-13	Pass

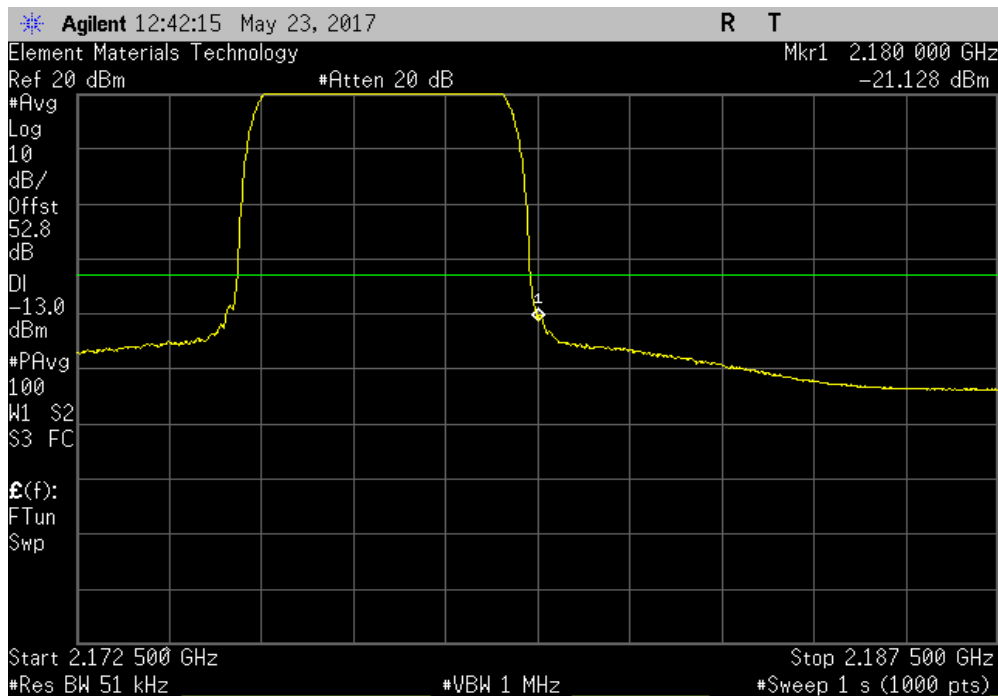


BAND EDGE COMPLIANCE




TMTX 2017.01.27 XMI 2017.02.08

Low Channel (2115 MHz) LTE 10MHz						
				Value (dBm)	Limit (dBm)	Result
				-18.54	-13	Pass

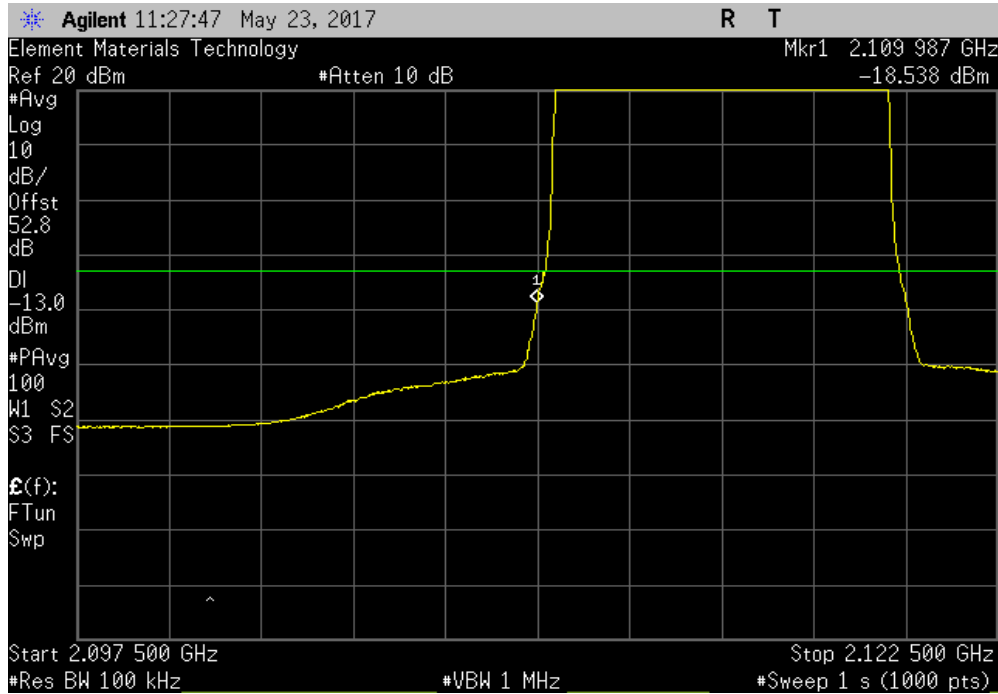

High Channel (2175 MHz) LTE 10MHz						
				Value (dBm)	Limit (dBm)	Result
				-20.78	-13	Pass

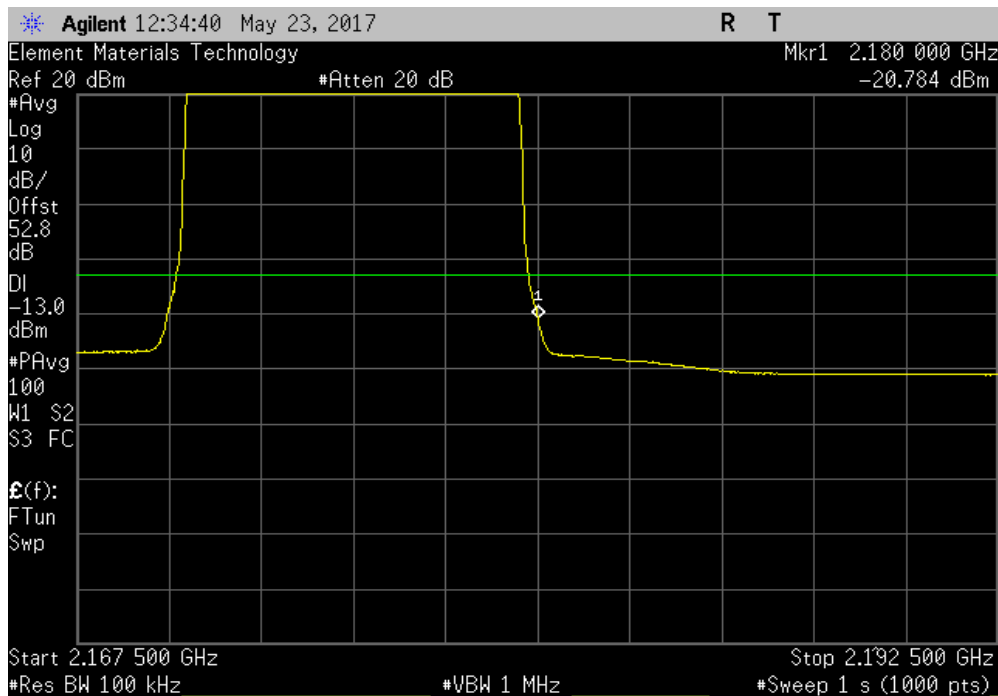

INTERMODULATION



XMR 2017.02.08

Testing was performed using the mode(s) of operation and configuration(s) noted within the report. The individuals and/or the organization requesting the test provided the modes, configurations and settings used to complete the evaluation. The actual test parameters are specified in the test data, this includes items such as investigated frequency range (scanned) and test levels. The testing methods and performance specifications, as well as the test site used for the evaluation are indicated in the test data.

TEST EQUIPMENT

Description	Manufacturer	Model	ID	Last Cal.	Cal. Due
Attenuator	Aeroflex	48-30-34	RCU	9/15/2016	9/15/2017
Power Divider/Combiner	Fairview Microwave	MP0208-2	IAF	NCR	NCR
Power Divider/Combiner	Fairview Microwave	MP0208-2	IAE	NCR	NCR
Generator - Signal	Agilent	N5183A	TIK	10/17/2014	10/17/2017
Cable	ESM Cable Corp	TTBJ141 KMKM-72	MNP	NCR	NCR
Attenuator	S.M. Electronics	SA26B-20	RFW	2/14/2017	2/14/2018
Block - DC	Fairview Microwave	SD3379	AMI	9/15/2016	9/15/2017
Analyzer - Spectrum Analyzer	Agilent	E4440A	AAX	3/16/2017	3/16/2018

TEST DESCRIPTION

Analyzer plots utilizing a 1MHz resolution bandwidth and no video filtering were made for each modulation type.

An RF signal generator was used to create the modulated signal(s) listed in the datasheets. These signals were input into the EUT.

The EUT was configured with an input of two CW pulses at the edges of the band and a modulated pulse in the band. The purpose of the test is to insure that no additional signals are creating by having multiple carriers in the passband of the EUT.

Analyzer plots utilizing a 1MHz resolution bandwidth and no video filtering were made for each modulation type.

The peak conducted power of spurious emissions, up to the 10th harmonic of the transmit frequency, were investigated to ensure they were less than or equal to the spurious conducted emissions limits. Measurements close to the limit were re-measured using a RMS average detector.

INTERMODULATION



TbTx 2017.01.27 XMM 2017.02.08


EUT: Prism AWS3 SISO HDM 20 Watt		Work Order: TECO0042	
Serial Number: 459644002		Date: 05/24/17	
Customer: CommScope		Temperature: 21.6 °C	
Attendees: Josh Wittman		Humidity: 43.6% RH	
Project: None		Barometric Pres.: 1011 mbar	
Tested by: Dustin Sparks		Power: 110VAC/60Hz	
		Job Site: MN08	
TEST SPECIFICATIONS			
FCC 27:2017		Test Method	
		ANSI/TIA/EIA-603-D-2010	
COMMENTS			
Antenna gain is assumed to be 0 - per customer, the antenna gain will be reevaluated during installation. System is rated at 20W (+43 dBm) per port. Both ports were terminated but only one port is active. Measurements made outside of the Passband, but within the allowable band were made to show that all Intermodulation emissions were below the spurious limit.			
DEVIATIONS FROM TEST STANDARD			
None			
Configuration #	2	Signature <i>Dustin Sparks</i>	
		Frequency Range	Max Value (dBm) Limit ≤ (dBm) Result
Low Passband (2110-2145 MHz) WCDMA		30 MHz - 12.5 GHz	-20.3 -13 Pass
Low Passband (2110-2145 MHz) WCDMA		12.5 GHz - 22 GHz	-17.23 -13 Pass
Low Passband (2110-2145 MHz) WCDMA		Fundamental	-21.76 -13 Pass
Mid Passband (2130-2160 MHz) WCDMA		30 MHz - 12.5 GHz	-20.34 -13 Pass
Mid Passband (2130-2160 MHz) WCDMA		12.5 GHz - 22 GHz	-16.81 -13 Pass
Mid Passband (2130-2160 MHz) WCDMA		Fundamental	-18.36 -13 Pass
High Passband (2145-2180 MHz) WCDMA		30 MHz - 12.5 GHz	-20.11 -13 Pass
High Passband (2145-2180 MHz) WCDMA		12.5 GHz - 22 GHz	-16.09 -13 Pass
High Passband (2145-2180 MHz) WCDMA		Fundamental	-19.6 -13 Pass
Low Passband (2110-2145 MHz) LTE 10 MHz		30 MHz - 12.5 GHz	-20.31 -13 Pass
Low Passband (2110-2145 MHz) LTE 10 MHz		12.5 GHz - 22 GHz	-17.44 -13 Pass
Low Passband (2110-2145 MHz) LTE 10 MHz		Fundamental	-22.58 -13 Pass
Mid Passband (2130-2160 MHz) LTE 10 MHz		30 MHz - 12.5 GHz	-20.28 -13 Pass
Mid Passband (2130-2160 MHz) LTE 10 MHz		12.5 GHz - 22 GHz	-16.62 -13 Pass
Mid Passband (2130-2160 MHz) LTE 10 MHz		Fundamental	-22.61 -13 Pass
High Passband (2145-2180 MHz) LTE 10 MHz		30 MHz - 12.5 GHz	-19.87 -13 Pass
High Passband (2145-2180 MHz) LTE 10 MHz		12.5 GHz - 22 GHz	-16.55 -13 Pass
High Passband (2145-2180 MHz) LTE 10 MHz		Fundamental	-23.38 -13 Pass

INTERMODULATION




TMTX 2017.01.27 XMI 2017.02.08

Low Passband (2110-2145 MHz) WCDMA					
Frequency Range		Max Value (dBm)	Limit ≤ (dBm)	Result	
30 MHz - 12.5 GHz		-20.3	-13	Pass	

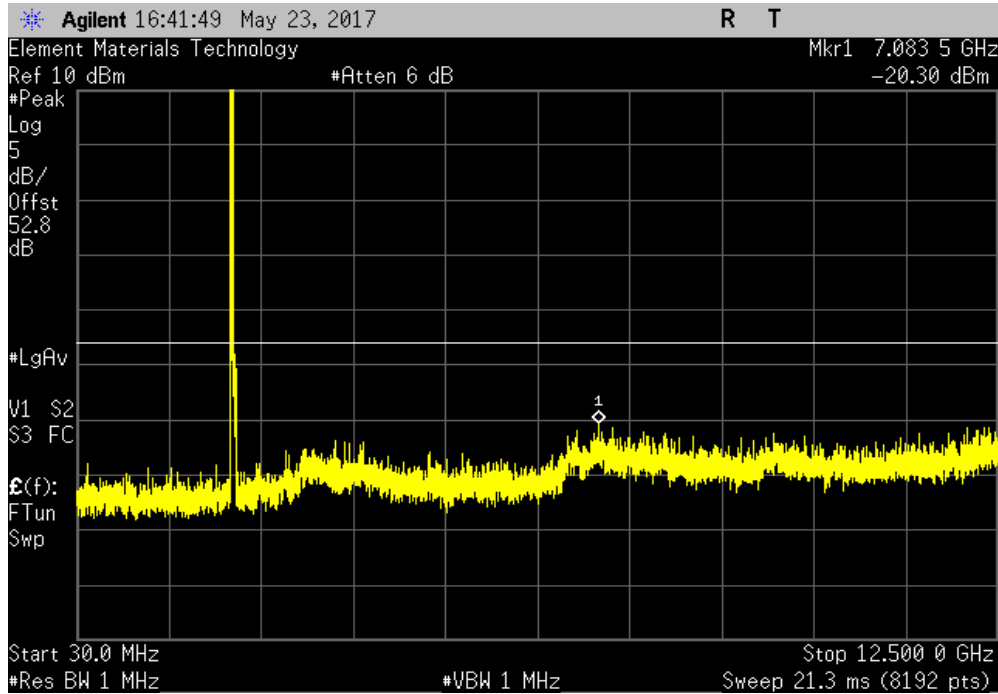

Low Passband (2110-2145 MHz) WCDMA					
Frequency Range		Max Value (dBm)	Limit ≤ (dBm)	Result	
12.5 GHz - 22 GHz		-17.23	-13	Pass	

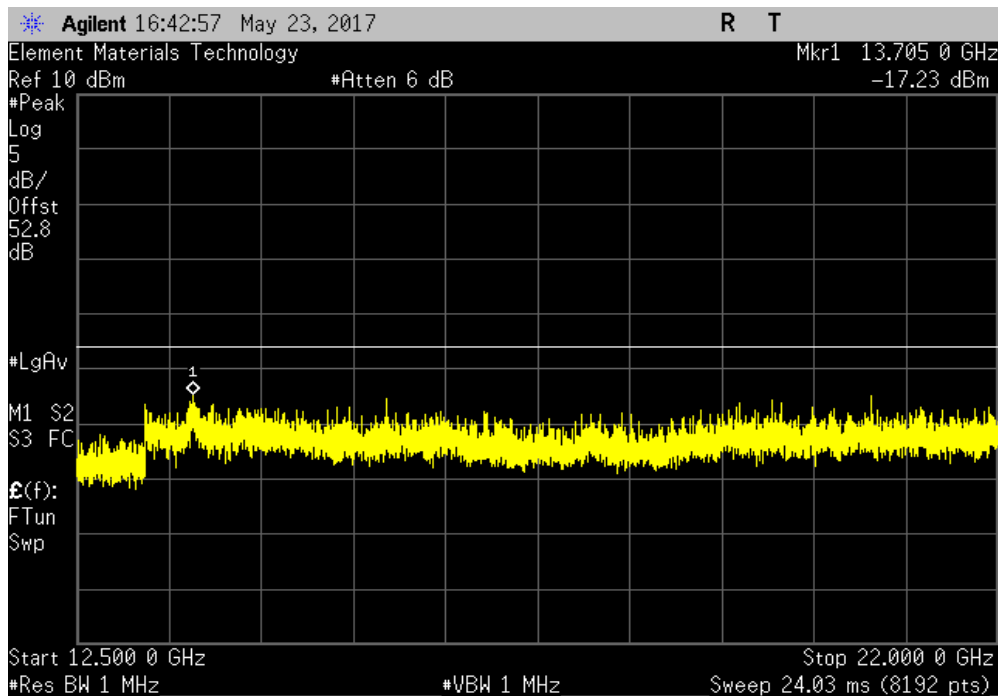


INTERMODULATION




TMTx 2017.01.27 XMI 2017.02.08

Low Passband (2110-2145 MHz) WCDMA					
Frequency Range			Max Value (dBm)	Limit ≤ (dBm)	Result
Fundamental			-21.76	-13	Pass

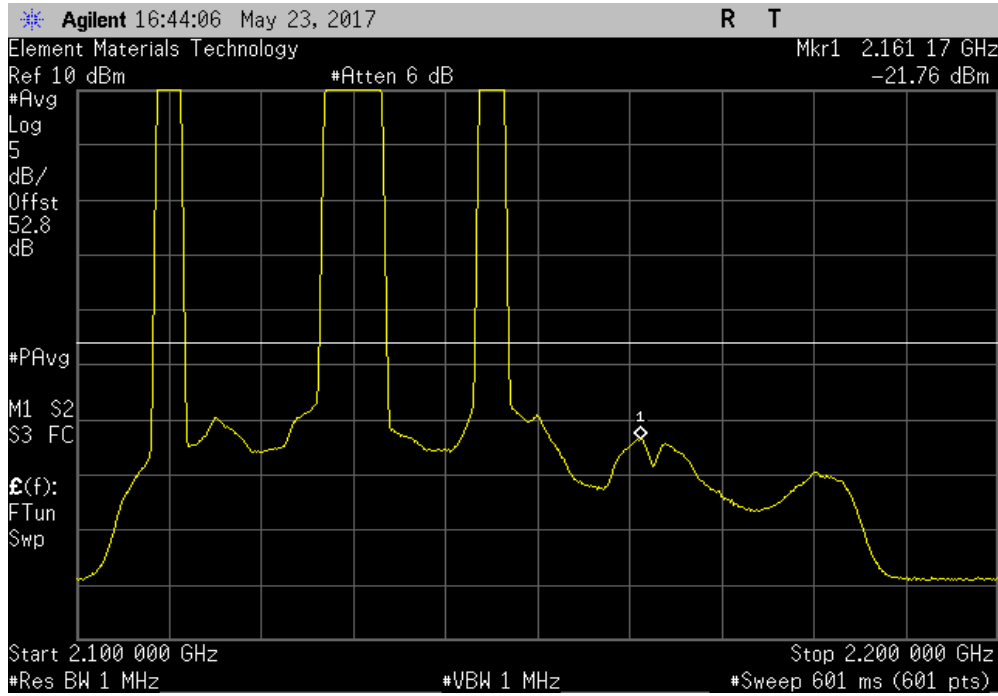

Mid Passband (2130-2160 MHz) WCDMA					
Frequency Range			Max Value (dBm)	Limit ≤ (dBm)	Result
30 MHz - 12.5 GHz			-20.34	-13	Pass

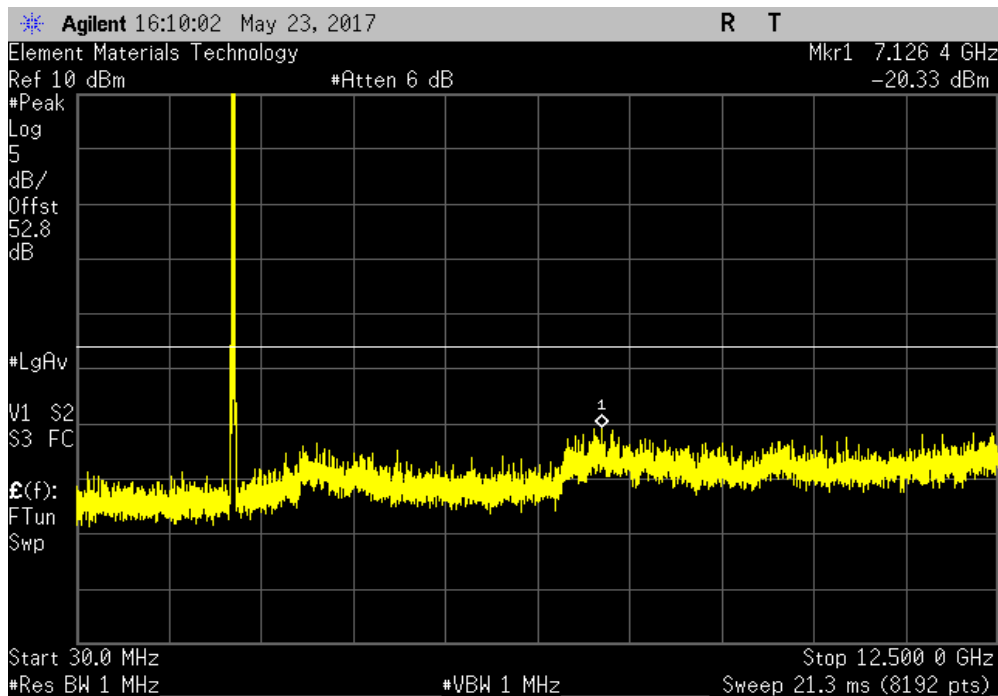


INTERMODULATION




TMTX 2017.01.27 XMI 2017.02.08

Mid Passband (2130-2160 MHz) WCDMA					
Frequency Range		Max Value (dBm)	Limit ≤ (dBm)	Result	
12.5 GHz - 22 GHz		-16.81	-13	Pass	

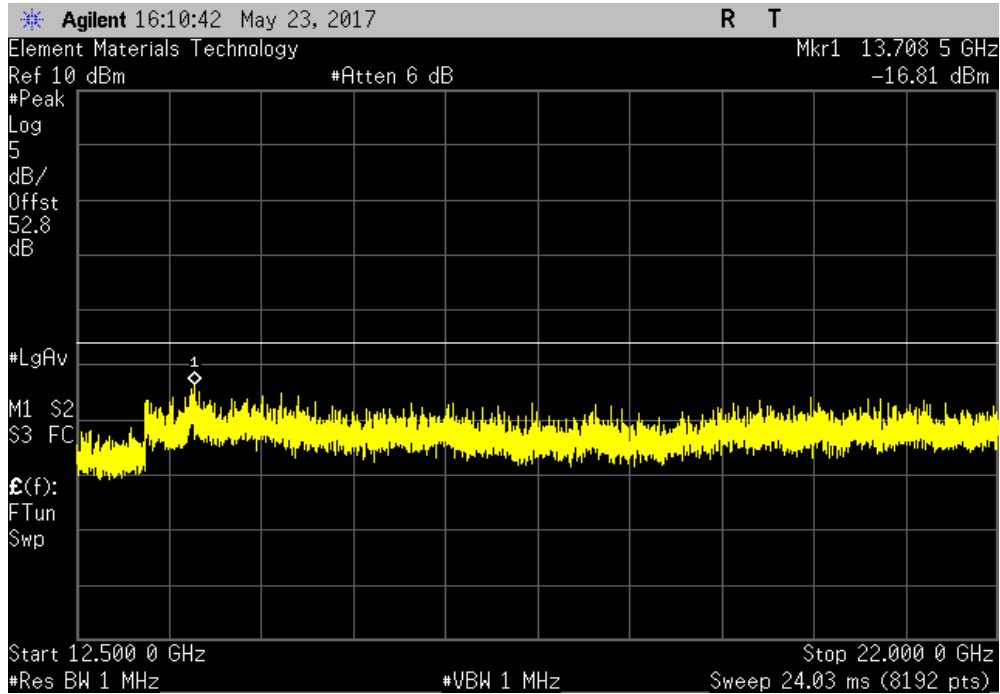

Mid Passband (2130-2160 MHz) WCDMA					
Frequency Range		Max Value (dBm)	Limit ≤ (dBm)	Result	
Fundamental		-18.36	-13	Pass	

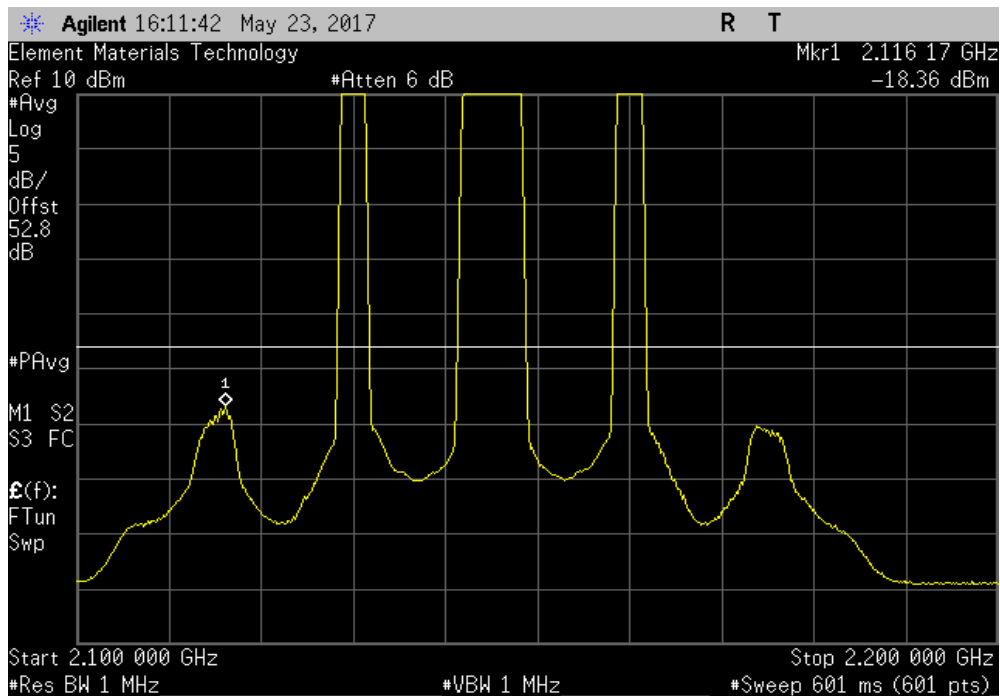


INTERMODULATION




TMTx 2017.01.27 XMI 2017.02.08

High Passband (2145-2180 MHz) WCDMA					
Frequency Range		Max Value (dBm)	Limit ≤ (dBm)	Result	
30 MHz - 12.5 GHz		-20.11	-13	Pass	

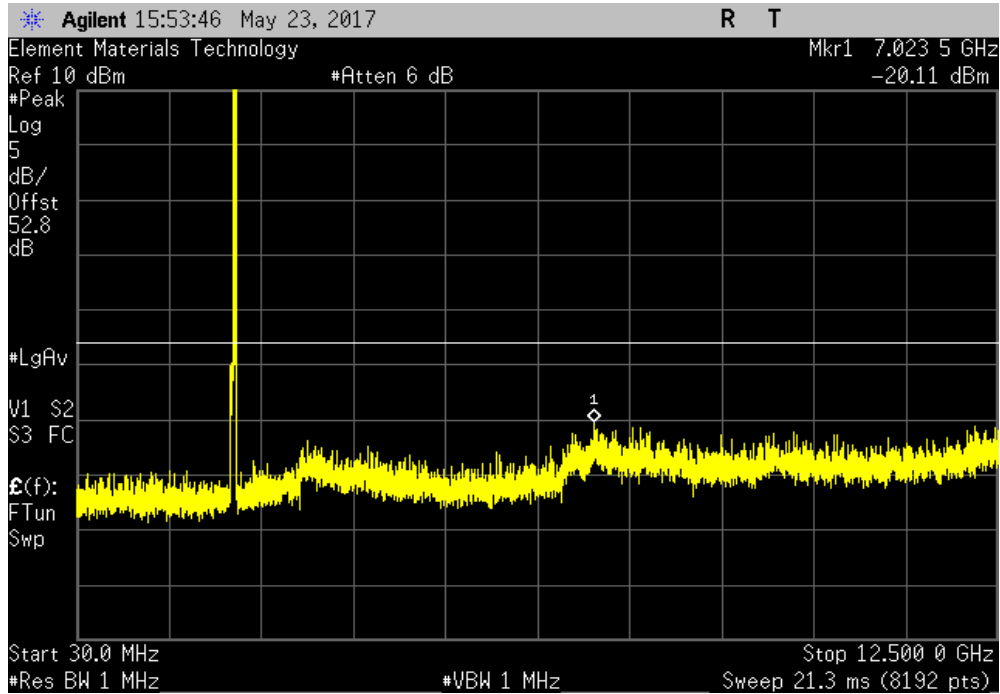

High Passband (2145-2180 MHz) WCDMA					
Frequency Range		Max Value (dBm)	Limit ≤ (dBm)	Result	
12.5 GHz - 22 GHz		-16.09	-13	Pass	

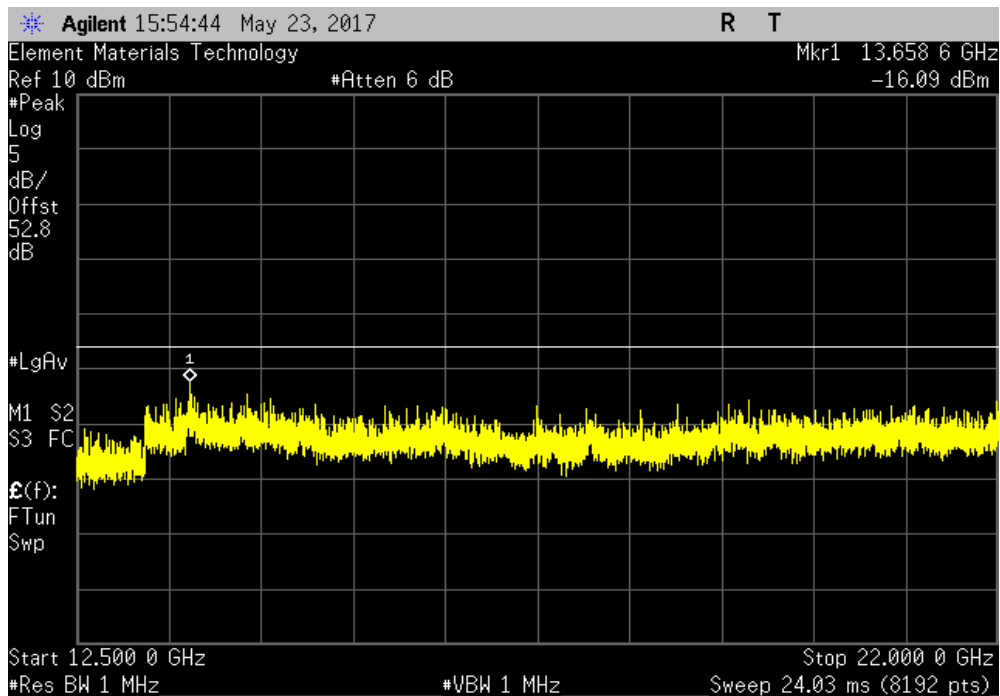


INTERMODULATION




TMTX 2017.01.27 XMI 2017.02.08

High Passband (2145-2180 MHz) WCDMA					
Frequency Range			Max Value (dBm)	Limit ≤ (dBm)	Result
Fundamental			-19.6	-13	Pass

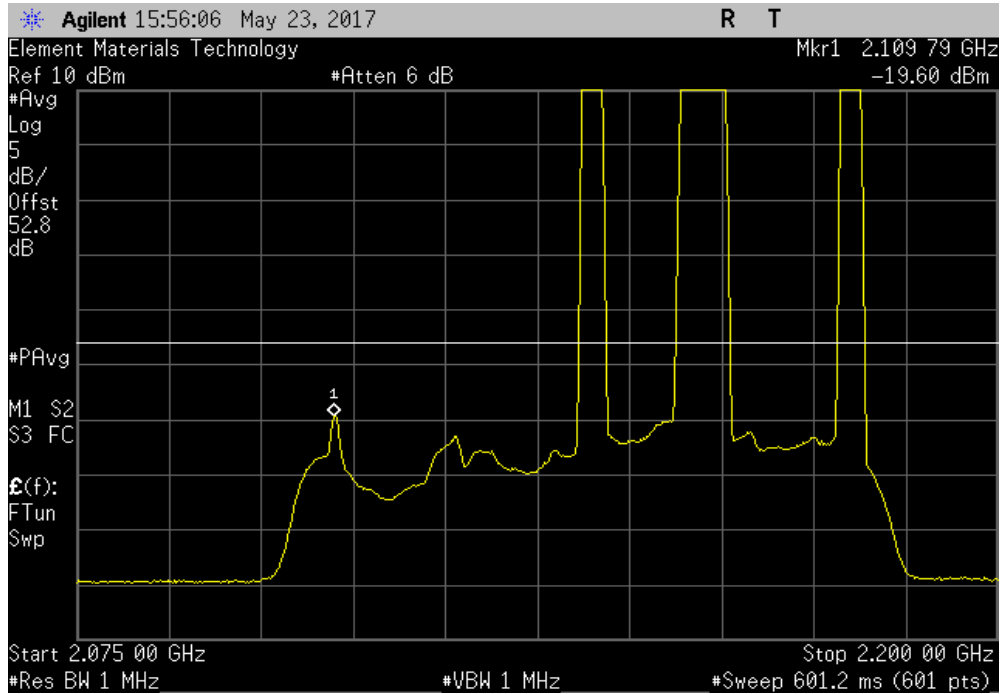

Low Passband (2110-2145 MHz) LTE 10 MHz					
Frequency Range			Max Value (dBm)	Limit ≤ (dBm)	Result
30 MHz - 12.5 GHz			-20.31	-13	Pass

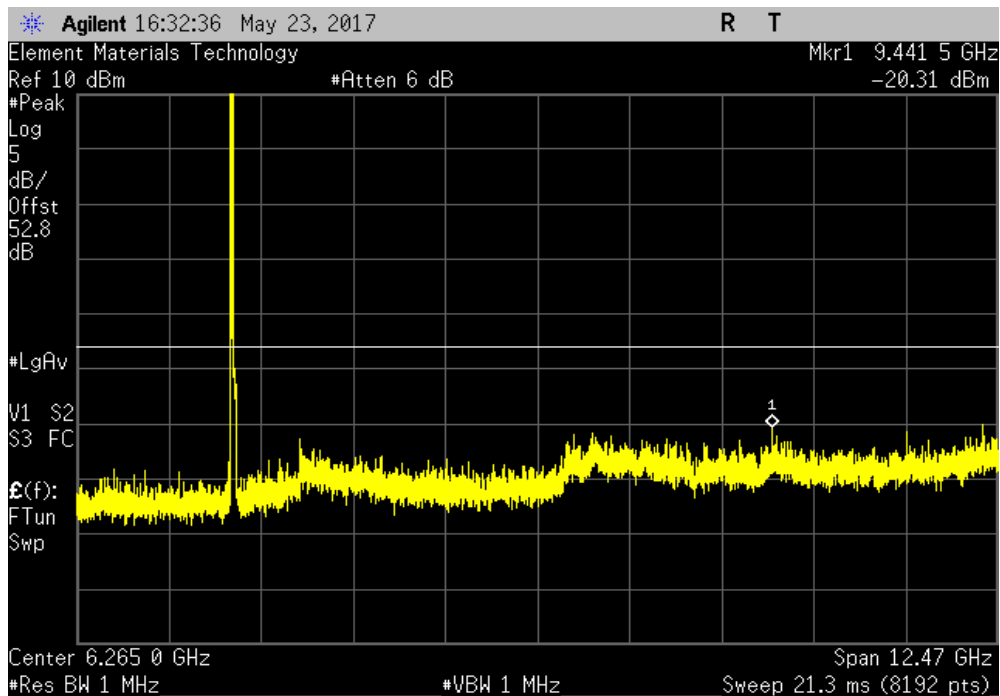


INTERMODULATION




TMTX 2017.01.27 XMI 2017.02.08

Low Passband (2110-2145 MHz) LTE 10 MHz					
Frequency Range		Max Value (dBm)	Limit ≤ (dBm)	Result	
12.5 GHz - 22 GHz		-17.44	-13	Pass	

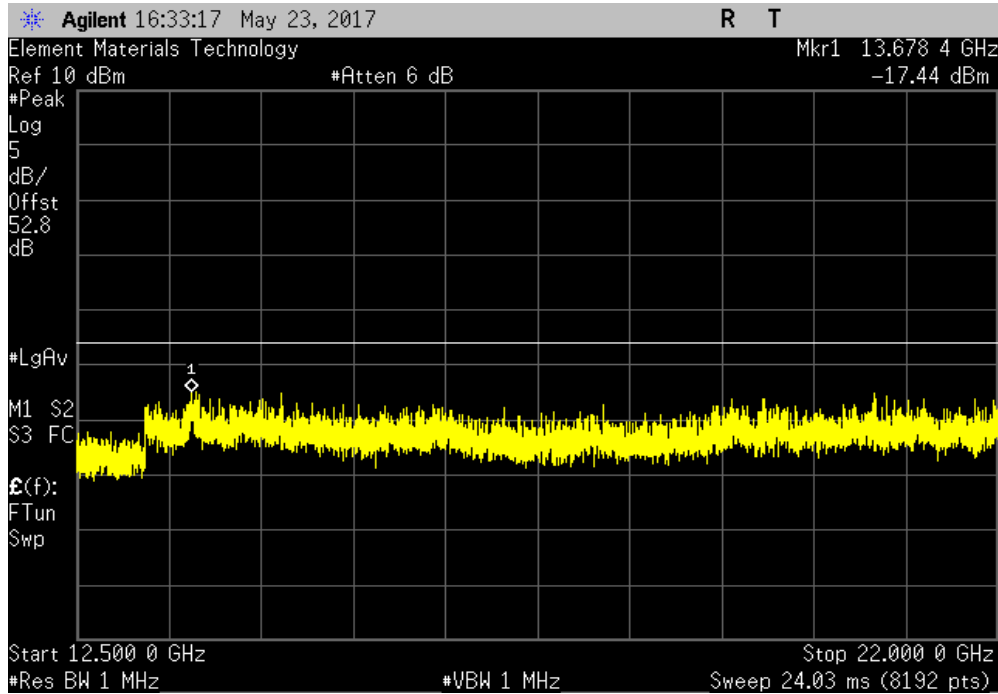

Low Passband (2110-2145 MHz) LTE 10 MHz					
Frequency Range		Max Value (dBm)	Limit ≤ (dBm)	Result	
Fundamental		-22.58	-13	Pass	

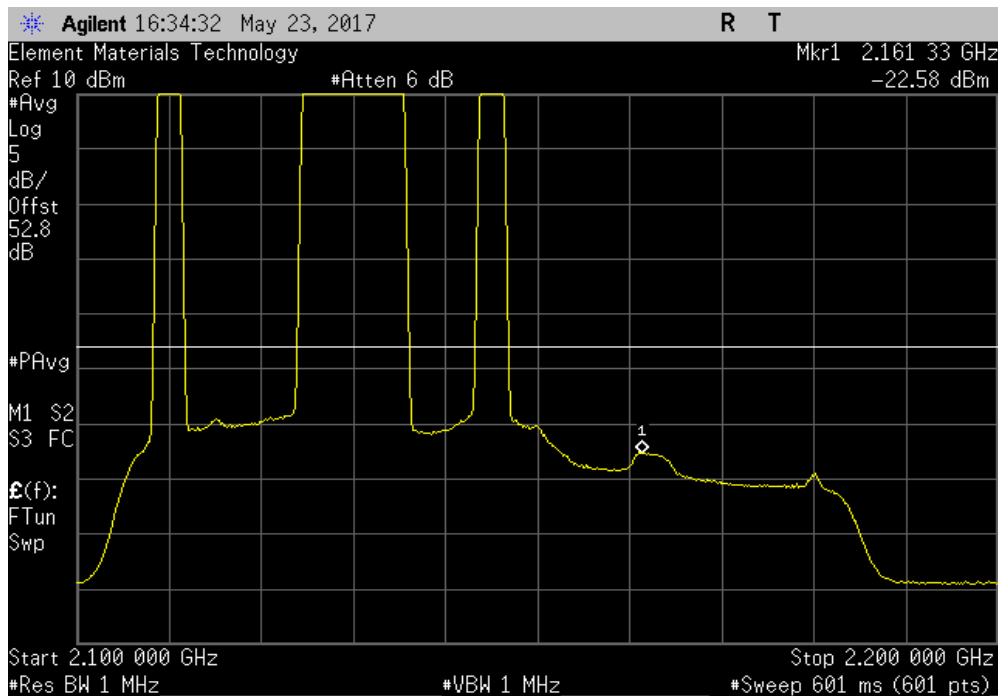


INTERMODULATION




TMTx 2017.01.27 XMI 2017.02.08

Mid Passband (2130-2160 MHz) LTE 10 MHz					
Frequency Range		Max Value (dBm)	Limit ≤ (dBm)	Result	
30 MHz - 12.5 GHz		-20.28	-13	Pass	

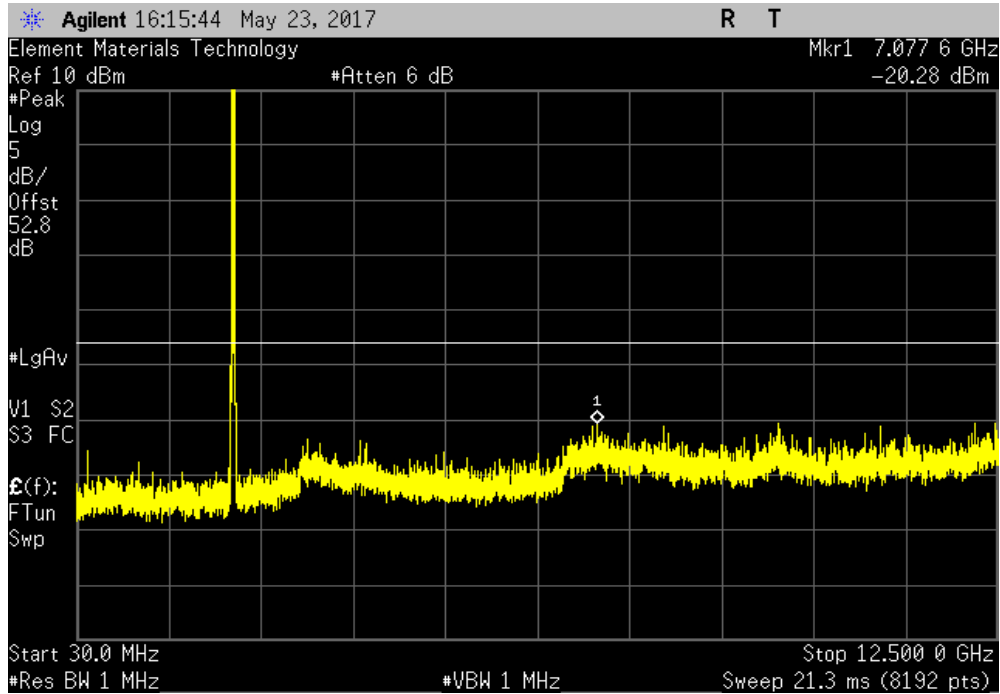

Mid Passband (2130-2160 MHz) LTE 10 MHz					
Frequency Range		Max Value (dBm)	Limit ≤ (dBm)	Result	
12.5 GHz - 22 GHz		-16.62	-13	Pass	

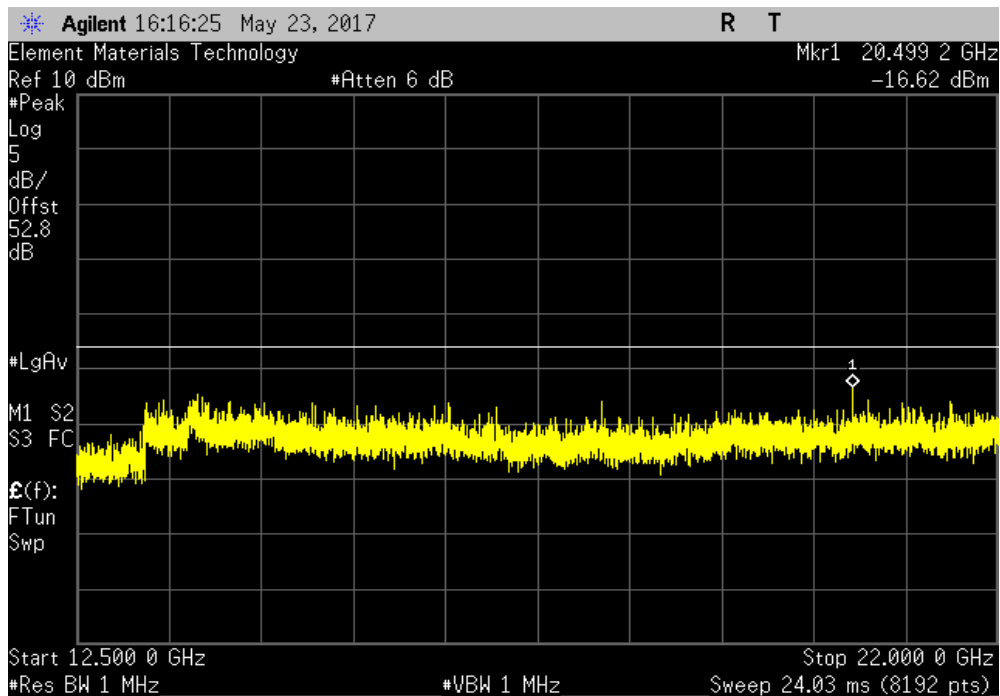


INTERMODULATION




TMTX 2017.01.27 XMI 2017.02.08

Mid Passband (2130-2160 MHz) LTE 10 MHz					
Frequency Range			Max Value (dBm)	Limit ≤ (dBm)	Result
Fundamental			-22.61	-13	Pass

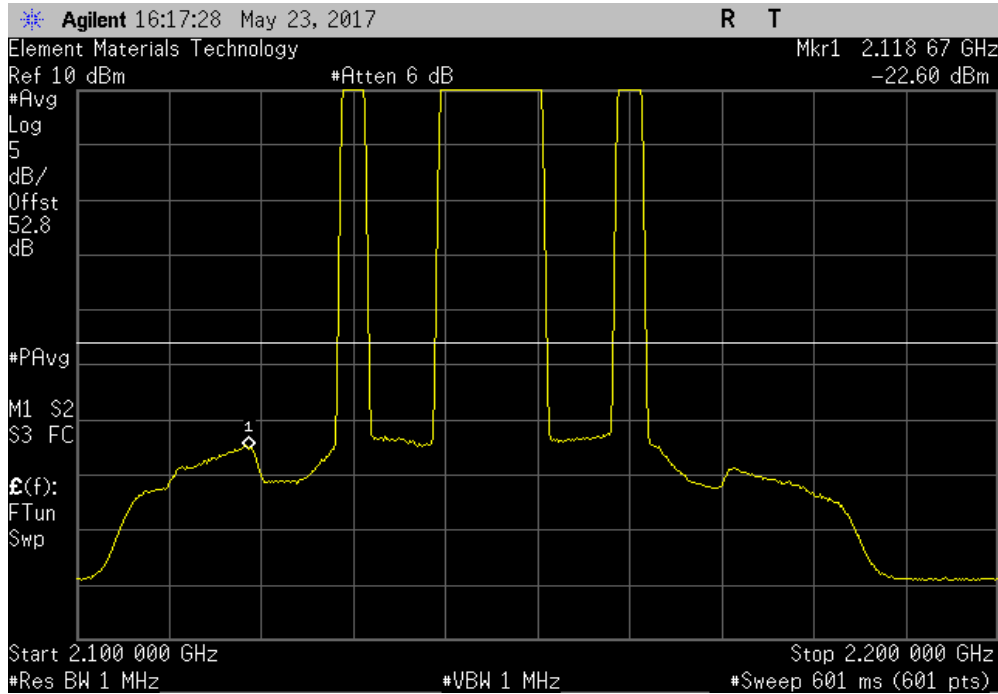

High Passband (2145-2180 MHz) LTE 10 MHz					
Frequency Range			Max Value (dBm)	Limit ≤ (dBm)	Result
30 MHz - 12.5 GHz			-19.87	-13	Pass

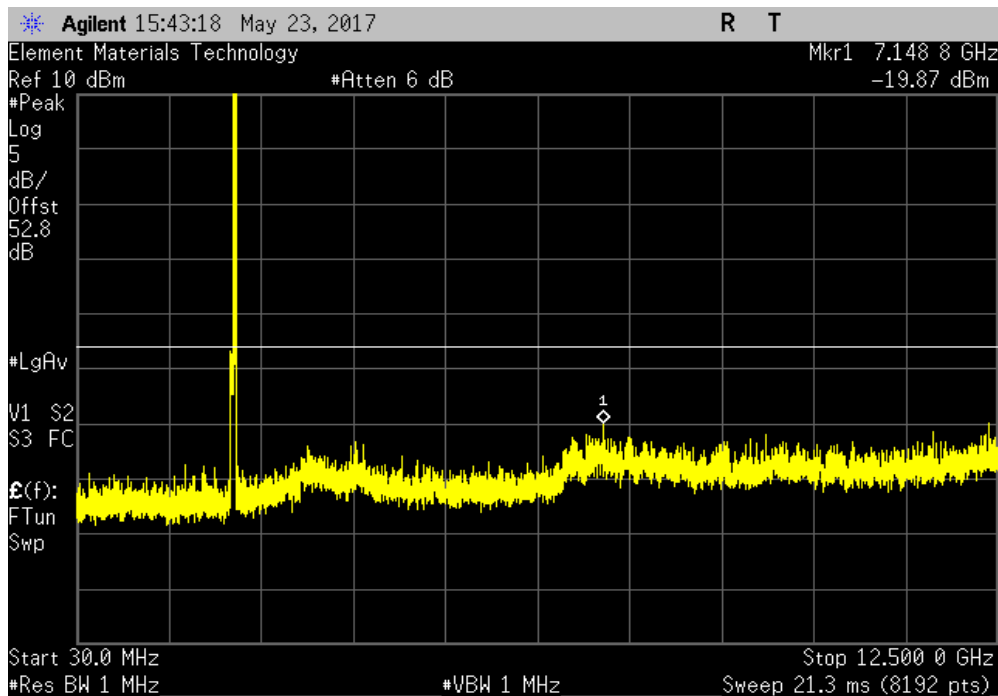


INTERMODULATION



TMTX 2017.01.27 XMI 2017.02.08

High Passband (2145-2180 MHz) LTE 10 MHz					
Frequency Range		Max Value (dBm)	Limit ≤ (dBm)	Result	
12.5 GHz - 22 GHz		-16.55	-13	Pass	

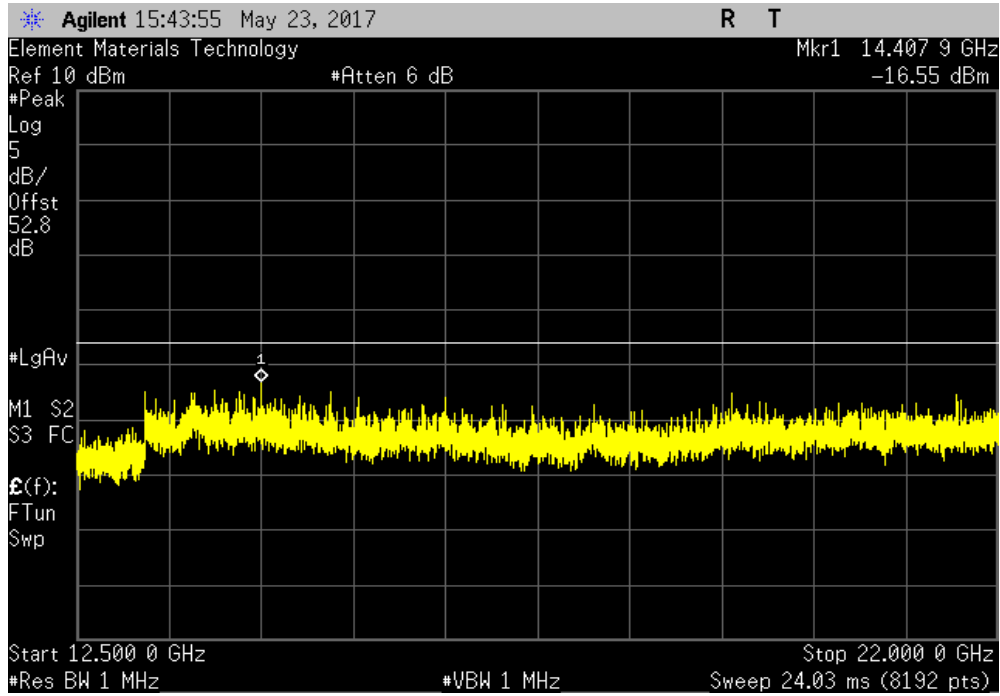

High Passband (2145-2180 MHz) LTE 10 MHz					
Frequency Range		Max Value (dBm)	Limit ≤ (dBm)	Result	
Fundamental		-23.38	-13	Pass	

