

EMC TEST REPORT

For the 36170 MainStreet ARIC card

TEST DATE: 99.02.25

Test Performed:

FCC Part 15/ICES-003 Class B

NOTICE

This document contains confidential information which is proprietary to Newbridge Networks Corporation. No part of its contents may be used, copied, disclosed or conveyed to any party in any manner whatsoever without prior written permission from Newbridge Networks Corporation.

Newbridge and MainStreet are trademarks of Newbridge Networks Corporation

© Copyright 1999 Newbridge Networks Corporation, All Rights Reserved

This document contains Confidential Information of Newbridge Networks Corporation.

ABSTRACT

This document provides the test procedure and test report used to fulfill the requirements of the EMC Approvals Group personnel and the product designers to evaluate the 36170 MainStreet ARIC card during EMC(Electromagnetic Compatibility) testing.

The test data contained in this report is evidence of compliance to specified EMC standards for the units described herein.

Complete procedures describing the activities of the EMC Approvals Group are found in Newbridge internal document HQP0009 [26], Regulatory Approvals Overview.

GLOSSARY

ANSI	<i>American National Standards Institute</i>
Bellcore	<i>BELL Communications Research</i> A research company jointly formed and operated by the Bell operating companies in the United States concerned with network environmental, reliability and quality issues.
BER	<i>Bit Error Rate.</i> The ratio of incorrect bits to total number of bits transmitted.
ESD	<i>ElectroStatic Discharge</i>
EUT	<i>Equipment Under Test</i>
IEC	<i>International Electrotechnical Commission</i>
ITE	<i>Information Technology Equipment</i>
NIST	<i>National Institute of Standards and Technology</i>
RBOC	<i>Regional Bell Operating Company</i>
TBD	<i>To Be Determined</i>
CISPR	<i>International Special Committee on Radio Interference</i>
CW	<i>Continuous Wave</i>
EMC	<i>Electro Magnetic Compatibility</i>
EN	<i>European Standard</i>
FCC	<i>Federal Communications Commission</i>
OATS	<i>Open Area Test Site</i>
RF	<i>Radio Frequency</i>

TABLE OF CONTENTS

ABSTRACT	2
GLOSSARY	3
TABLE OF CONTENTS	4
1 INTRODUCTION	6
Purpose	6
Scope	6
2 EQUIPMENT UNDER TEST (EUT)	7
Equipment Description	7
EUT Configuration	7
EUT Cables	7
System Test Configuration	8
Justification	8
Functional Interconnect	10
Equipment Modifications	11
3 REGULATORY EMC COMPLIANCE SUMMARY	12
4 RADIATED EMISSIONS (ELECTRIC FIELDS)	13
Test Specification	13
Deviations From the Test Specification	13
Test Location	13
Tested by	14
Test Procedure	14
Operating and Environmental Conditions	17
Test Equipment and Support Equipment	17
5 CONDUCTED EMISSIONS	21
REFERENCES	22
HISTORY	24

LIST OF FIGURES

FIGURE 2-1 DIAGRAM OF SYSTEM CONFIGURATION

9

FIGURE 2-2 BLOCK DIAGRAM OF FUNCTIONAL INTERCONNECT	10
FIGURE 4-1 RADIATED EMISSIONS (ELECTRIC FIELD)	15
FIGURE 4-1 RADIATED EMISSIONS (ELECTRIC FIELD)	16

LIST OF TABLES

2-1 DIAGRAM OF SYSTEM CONFIGURATION	9
2-2 BLOCK DIAGRAM OF FUNCTIONAL INTERCONNECT	10
6-1 RADIATED EMISSIONS (ELECTRIC FIELD)	16

1 INTRODUCTION

Purpose

This document provides a test plan and report for EMC testing of the 36170 MainStreet ARIC card according to applicable EMC standards. EMC requirements are found in tables at the beginning of the sections for Regulatory EMC Compliance and Bellcore EMC Compliance.

Scope

This document shall be used to evaluate 36170 MainStreet ARIC card conformance to the test requirements contained in applicable EMC standards.

2 EQUIPMENT UNDER TEST (EUT)

Equipment Description

The 36170 MainStreet ATMnet is a rackmount unit and is ideal for service provider backbones supporting multiple services such as Cell Relay, PVC's, SVC's, Circuit Emulation, LAN interconnectivity and frame relay.

EUT Configuration

Model Number	Name and Description	S/N
90-2507-12	Standalone Hub Card	03980104631
90-3346-01	Control Card 2	09980114427
90-4905-03	OC3 - 2 MMF	20980102273
90-6205-01	ARIC card	Prototype
90-4907-01	High Powered Peripheral Shelf	Prototype

EUT Cables

Part Number	Cable Type	Length (m)	Shield	Connector Hoods
90-2296-04	ISL CABLE OPTICAL	10.0	none	none
N/A	RJ45 shielded cable	5.0	Foil	metalized

System Test Configuration

Justification

For all tests, the EUT was configured to simulate a typical application. The testing was conducted using only cables recommended for use with the EUT by Newbridge. The EUT was installed as per Newbridge Technical Practices unless noted otherwise for a particular EMC test. Attention was made to follow any recommended chassis grounding, cable routing, etc. in the Newbridge Technical Practices. The EUT was placed according to the required set ups detailed in the test specifications and methods within this document for each type of EMC test (ESD, EFT, RF Immunity, etc.) Appropriate set ups for floor-standing or table-top equipment were followed. Wall-mounted equipment was tested as per table-top configuration. All test equipment used met the applicable requirements of CISPR 16, ANSI C63.4, CSA 108.8 .

Emissions measurements were made using average or quasi-peak detectors as specified in the methods listed for each EMC test type. For narrow band emissions, peak detectors were used in lieu of quasi-peak detectors to accelerate the measurement process.

All emissions data include the following minimum:

- the 6 highest emissions relative to the limit;
- or 6 measurements of the ambient noise level throughout the frequency range tested, where no emissions were observable;
- all emissions within 20 dB of the limit at EUT operating frequencies (clock rates, bus speeds, transmission rates, carrier frequencies, etc.) and
- the worst case antenna polarity (horizontal/vertical).

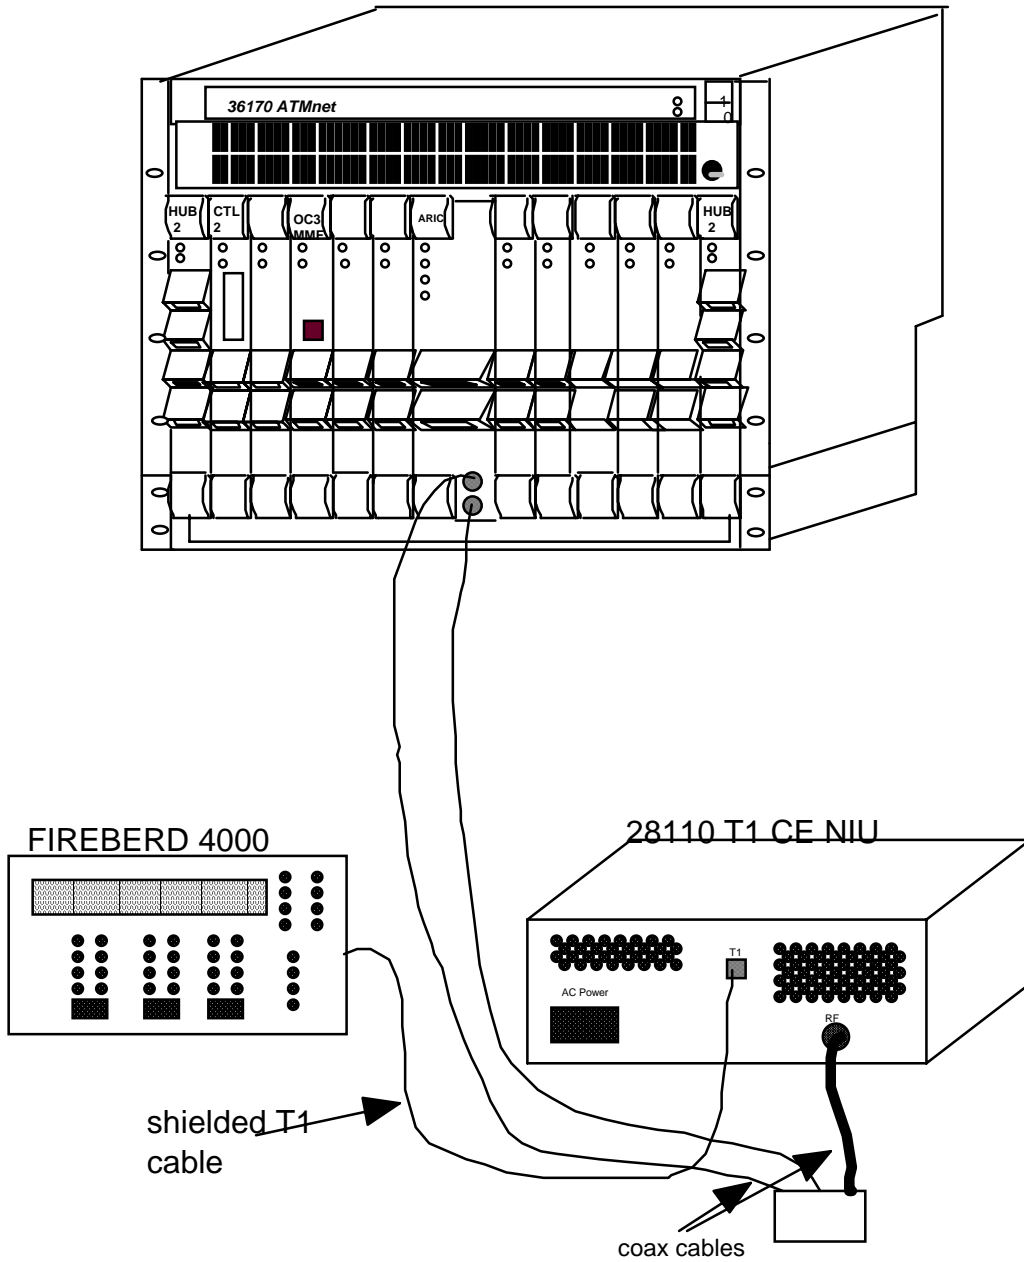


Figure 2-1 Diagram of System Configuration

Functional Interconnect

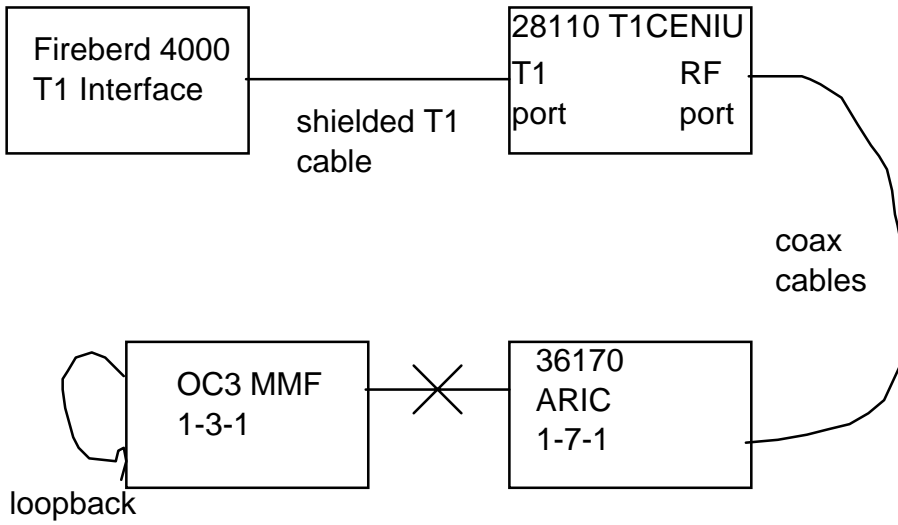


Figure 2-2 Block Diagram of Functional Interconnect

Equipment Modifications

No changes required for compliance.

3 REGULATORY EMC COMPLIANCE SUMMARY

This report has been read and approved by the following departments responsible for its implementation. All changes found necessary for compliance will be incorporated into production.

The EUT as configured in this report meets the requirements indicated below. The results of these tests apply only to items tested and provide an indication of hardware quality during operation and maintenance in their intended electromagnetic environment.

Basic Standard	Measurement Type	Test Requirement
FCC Part 15:1990, IC ICES-003: 1995	Radiated Emissions and Conducted Emissions	Class B

Table 3-1 Regulatory EMC Compliance Requirements

Andrew Roberts
Manager EMC Approvals
Review

Date _____

Don Moncion
Chairman of the ECO
Board

Date _____

George Sinfield
Approval Specialist

Date _____

4 RADIATED EMISSIONS (ELECTRIC FIELDS)

Test Specification

Standard	FCC Part 15 Subpart B and ICES-003		
Method	ANSI C63.4: 1992		
Performance Criterion	Class B, 3 meters		
Limit	Frequency (MHz)	Field Strength (dBμV/m)	Field Strength (μV/m)
	30 to 88	40	100
	88 to 216	44	150
	216 to 960	46	200
	above 960	49.5	500
Summary of Results	Pass. Highest emission: 0.2 dB below limit @ 950 MHz.		

Deviations From the Test Specification

None

Test Location

Test Laboratory Electronic Test Center

Address 302 Legget Drive
Kanata, Ontario K2K 1Y5

Prime Contact Dave Scribailo, Manager Electromagnetic Services

Tested by**Test Engineer**

George Sinfield, Approvals Specialist

Company

Newbridge Networks Corporation

DATE OF TEST:

99.02.25

Test Procedure

All antenna measurements were taken according to the specified measurement distance in the required test methods listed above for radiated emissions testing.

The EUT was rotated 360° on a turntable, all the cables and cords manipulated and antennas moved through the entire range of height specified to maximize emissions. Final measurements were performed with antennas in both horizontal and vertical polarities. Worst case antenna polarity (horizontal/vertical) was recorded for each emission.\

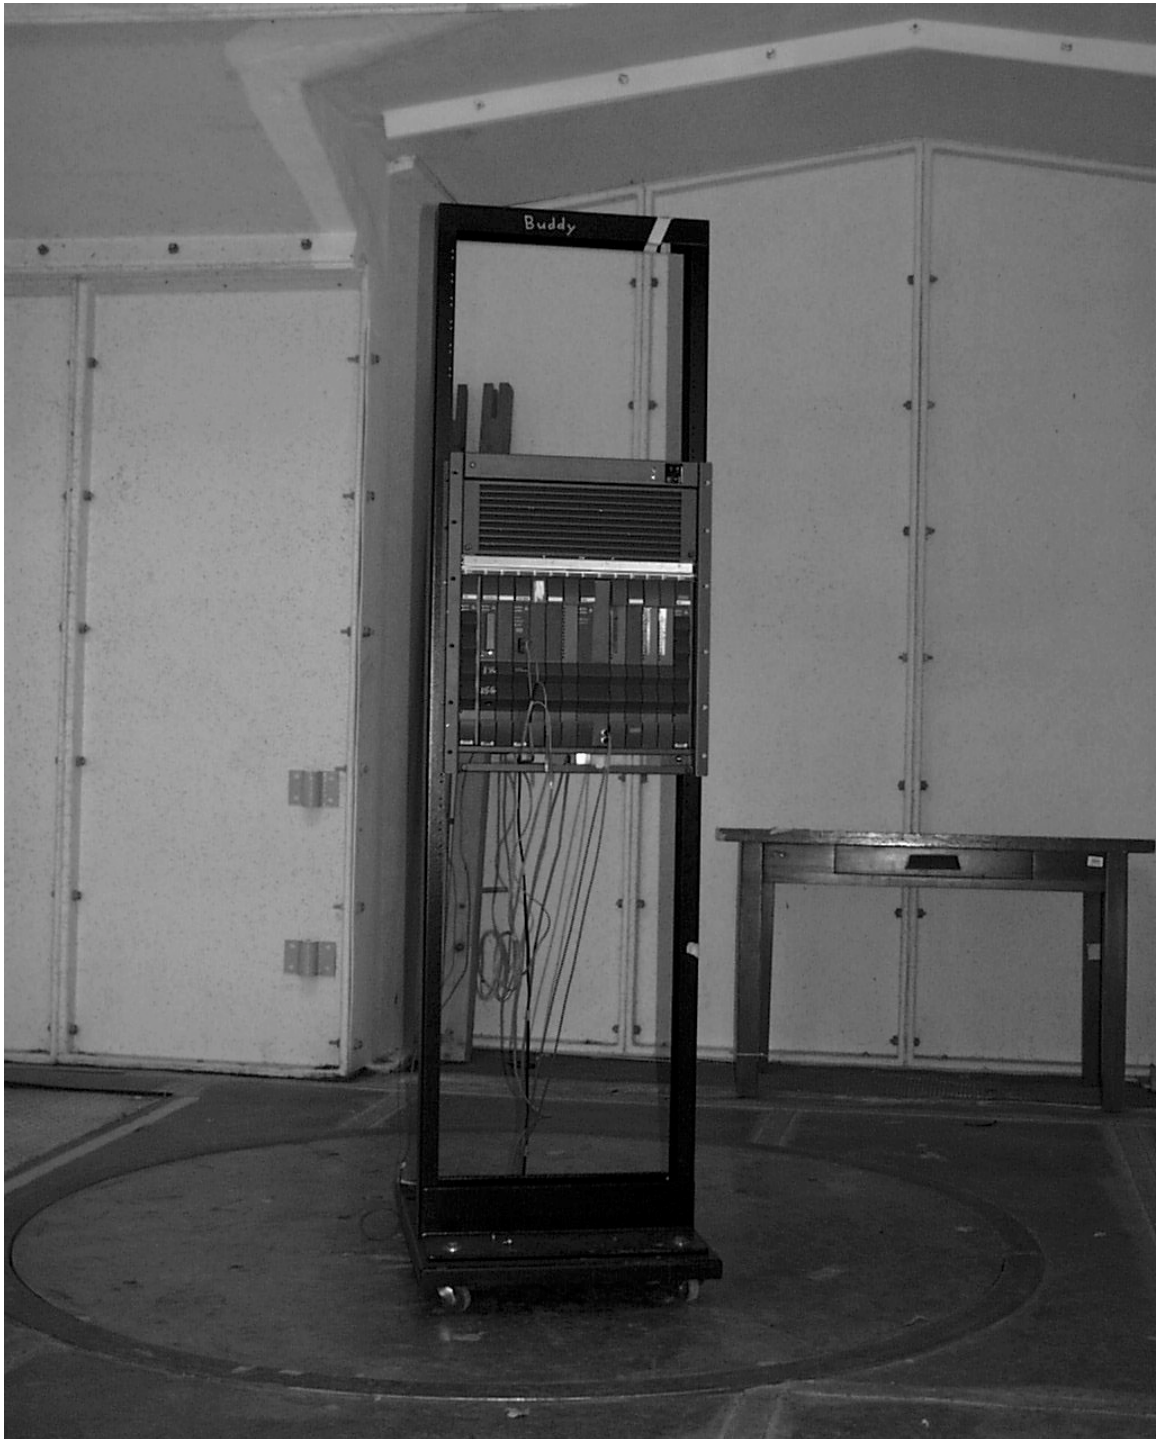


Figure 4-1 Radiated Emissions (Electric Field)

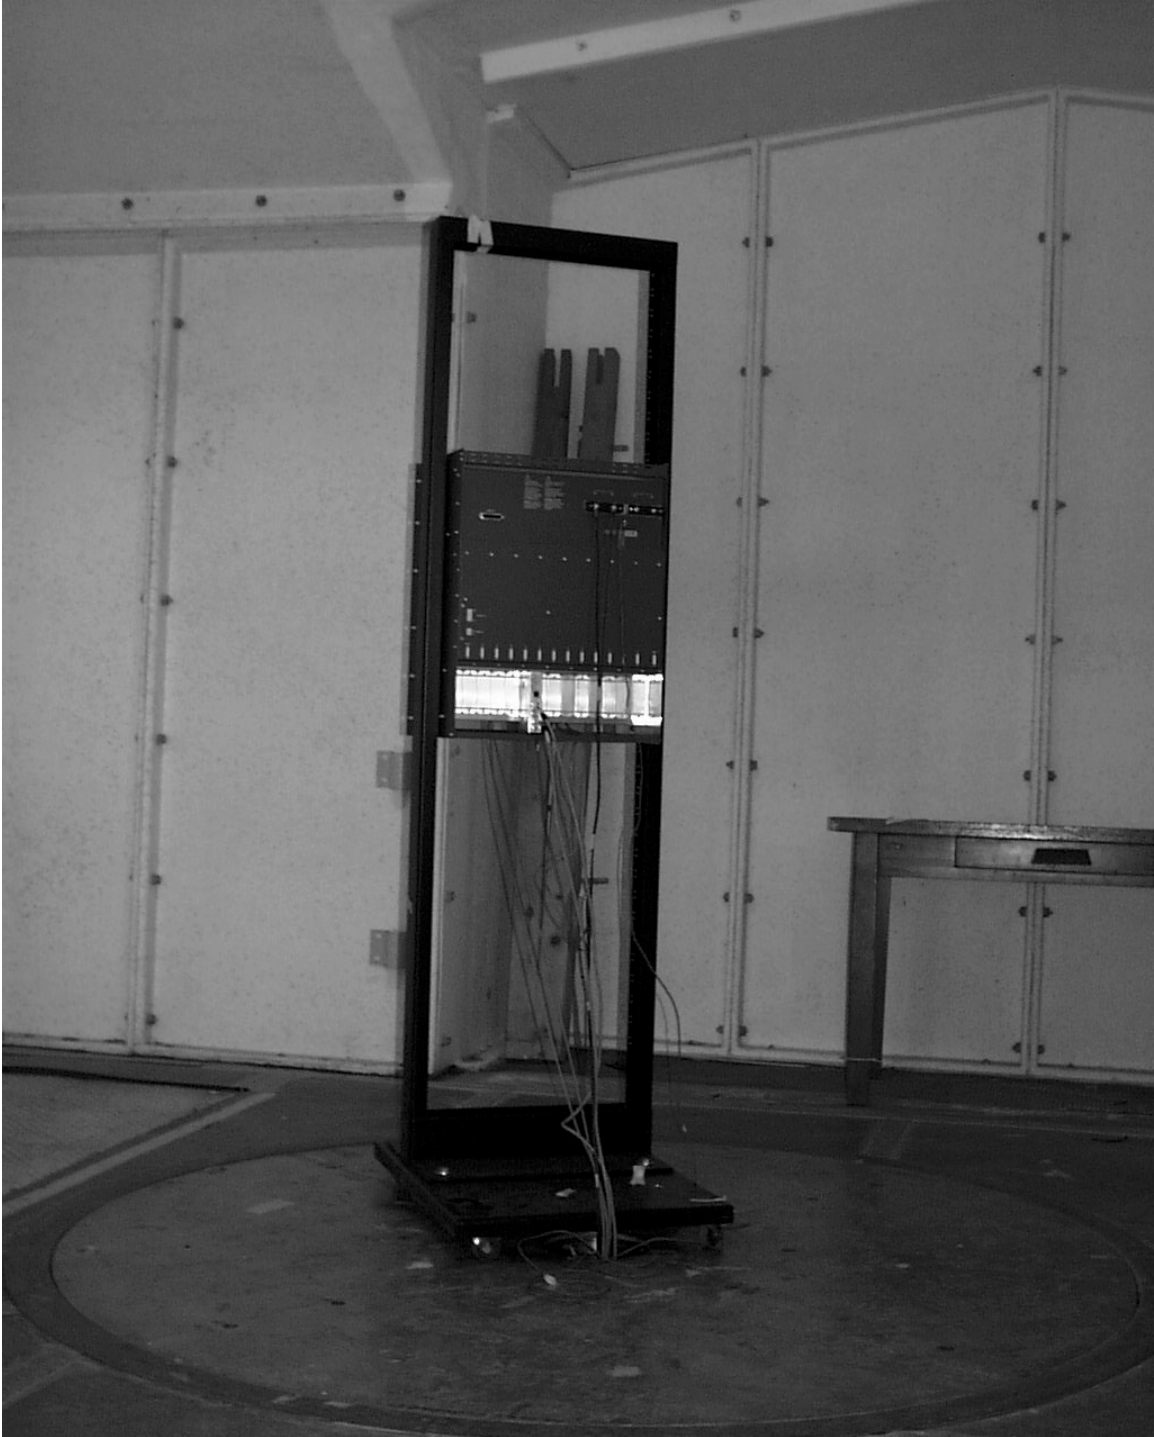


Figure 4-1 Radiated Emissions (Electric Field)

Operating and Environmental Conditions

Power Line Voltage	-48 Volt DC Power
Temperature	21.0 °C
Relative Humidity	40.0 %

Test Equipment and Support Equipment

Instrument	Mftr./Model / S/N	Range	Calibration
Rohde & Schwarz Test Receiver	Model ESVP S/N 354.3000.52	20 to 1.3 GHz	Cal Date 08/11/98 Due Date 08/11/99
Biconlog	Antenna Research Associates Model LPB- 250/A S/N 1021	30 - 2 GHz	Cal Date 03/11/98 Due Date 03/11/99
TCC BERT Tester	Fireberd Model 4000 S/N 6578	N/A	Cal Date 23/02/99 Due Date 23/02/00
DC Power Supply	Xantrex XKW 80-13 S/N 0663	0 to 60 VDC	Cal Date 15/09/98 Due Date 15/09/99

Results - Test Data

Freq (MHz)	Measure (dBμV)	Factor (dB/m)	Field Strength (dBμV/m)	FCC Limit (dBμV/m)	Pol. (V/H)
32.00	1.1	17.1	18.2	40.0	V
38.60	19.8	14.4	34.2	40.0	V
55.27	3.1	12.0	15.1	40.0	V

60.03	9.6	11.3	20.9	49.0	V
223.99	15.5	12.3	27.8	46.0	V
225.00	17.5	12.3	29.8	46.0	V
250.00	19.8	13.5	33.3	46.0	V
274.99	8.5	14.1	22.6	46.0	V
300.00	11.4	14.8	26.2	46.0	V
350.00	8.9	16.1	25.0	46.0	V
352.00	13.9	16.1	30.0	46.0	V
375.00	8.0	16.6	24.6	46.0	V
384.00	6.7	16.8	23.5	46.0	V
400.00	18.1	17.1	35.2	46.0	V
416.00	2.0	17.5	19.5	46.0	V
425.00	8.1	17.6	25.7	46.0	V
450.00	16.6	18.1	34.7	46.0	V
500.00	17.0	18.8	35.8	46.0	V
525.00	7.2	19.0	26.2	46.0	V
550.00	11.5	19.1	30.6	46.0	V
599.99	12.0	20.3	32.3	46.0	V
624.99	12.9	20.8	33.7	46.0	V
650.00	16.1	21.1	37.2	46.0	V
700.00	6.5	21.6	28.1	46.0	V
849.99	6.7	23.5	30.2	46.0	V
900.00	4.0	24.1	28.1	46.0	V
950.00	10.4	24.5	34.9	46.0	V
1000.00	15.5	25.3	40.8	46.0	V
1200.00	-4.2	26.5	22.3	49.0	V
1400.00	8.5	28.1	36.6	49.0	V
1500.00	11.9	28.8	40.7	49.0	V
150.00	6.7	10.8	17.5	40.0	H
200.00	20.1	11.3	31.4	40.0	H
225.00	18.3	12.3	30.6	46.0	H

250.00	21.3	13.5	34.8	46.0	H
300.00	9.6	14.8	24.4	46.0	H
350.00	6.7	16.1	22.8	46.0	H
375.00	5.5	16.6	22.1	46.0	H
384.00	13.1	16.8	29.9	46.0	H
400.00	18.3	17.1	35.4	46.0	H
416.00	4.5	17.5	22.0	46.0	H
425.00	16.3	17.6	33.9	46.0	H
450.00	19.8	18.1	37.9	46.0	H
499.99	20.1	18.8	38.9	46.0	H
525.00	5.5	19.0	24.5	46.0	H
549.99	26.1	19.1	45.2	46.0	H
575.00	20.8	19.8	40.6	46.0	H
599.99	19.6	20.3	39.9	46.0	H
700.00	8.1	21.6	29.7	46.0	H
750.00	8.6	21.8	30.4	46.0	H
799.99	21.1	23.3	44.4	46.0	H
850.00	18.6	23.5	42.1	46.0	H
900.00	4.2	24.1	28.3	46.0	H
950.00	21.3	24.5	45.8	46.0	H
1000.00	17.8	25.3	43.1	49.0	H
1200.00	15.3	26.5	41.8	49.0	H
1300.00	6.1	28.5	28.6	49.0	H
1400.00	11.8	28.1	39.9	49.0	H

where Factor (dB/m) = antenna factors + preamplifier gain + cable loss + attenuators

Field Strength (dB μ V/m) = Measure (dB μ V) + Factor (dB/m)

FCC Limit (dB μ V/m) = FCC Part 15 limit

CISPR Limit (dB μ V/m) = CISPR 22/EN55022/AS/NZS 3548 limit

5 CONDUCTED EMISSIONS

The 36170 is powered by a -48 DC Voltage source, therefore this section is not applicable

REFERENCES

- [1] ANSI, C62.41, IEEE Recommended Practice on Surge Voltages in Low Voltage AC Power Circuits, 1991.
- [2] ANSI, C63.4, Methods of Measurement of Radio Noise Emissions from Low Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz, 1992.
- [3] ANSI/IEEE C62.41, IEEE Recommended Practice on Surge Voltages in Low-Voltage AC Power Circuits, 1991.
- [4] Bellcore, GR-1089-CORE Electromagnetic Compatibility and Electrical Safety Generic Criteria for Network Telecommunication Equipment, Issue 1, November 1994.
- [5] Bellcore, GR-1089-ILR Revised and Additional Criteria for GR-1089-CORE, Issue 1A, JULY 1996.
- [6] Bellcore, TR-NWT-000063 Network Equipment-Building System (NEBS) Generic Equipment Requirements, Issue 5, September 1993.
- [7] Bellcore, TR-NWT-001089 Electromagnetic Compatibility and Electrical Safety Generic Criteria for Network Telecommunication Equipment, Issue 1, October, 1991.
- [8] CEN/CENELEC, EN 45001 General criteria for the operation of testing laboratories , 1989.
- [9] CENELEC, EN 50082-1, Electromagnetic compatibility - Generic immunity standard - Part 1 - Residential, commercial and light industry, 1991.
- [10] CENELEC, EN 50082-2, Electromagnetic compatibility - Generic immunity standard - Part 2 - Industrial environment, 1994.
- [11] CENELEC, EN 55022, Limits and methods of measurement of radio disturbance characteristics of information technology equipment, 1994.
- [12] CENELEC, EN 61000-3-2, Electromagnetic compatibility (EMC) Part 3: Limits Section 2: Limits for harmonic current emissions (equipment input current $\leq 16\text{A}$ per phase (IEC 1000-3-2:1995) 1995.
- [13] CENELEC, EN 61000-3-3, Electromagnetic compatibility (EMC) Part 3: Limits Section 23 Limits for voltage fluctuations and flicker in low-voltage supply systems for equipment with rated current $\leq 16\text{ A}$ (IEC 1000-3-3:1994) 1995.
- [14] CISPR 16, CISPR Specifications for Radio Interference Measuring Apparatus and Measurement Methods, 2nd ed., 1987.
- [15] CISPR 22, Limits and methods of measurement of radio disturbance characteristics of information technology equipment, 1993.
- [16] FCC, 47 CFR Part 15 Radio Frequency Devices, 1995

- [17] FCC, 47 CFR Part 68 Connection of Terminal Equipment to the Telephone Network, 1995
- [18] IEC, 801-2 Electromagnetic compatibility for industrial process and control equipment, Part 2: Electrostatic Discharge requirements, First Edition, 1984.
- [19] IEC, 801-2, Electromagnetic compatibility for industrial process and control equipment, Part 2: Electrostatic Discharge requirements, Second Edition, 1991.
- [20] IEC, 801-3, Electromagnetic compatibility for electrical and electronic equipment, Part 3: Immunity to radiated, radio frequency, electromagnetic fields, 1984.
- [21] IEC, 801-4, Electromagnetic compatibility for industrial process and control equipment, Part 4: Electrical fast transient/burst requirements, First Edition 1988.
- [22] IEC, 1000-4-2, Electromagnetic Compatibility (EMC), Part:4: Testing and measurement techniques - Section 2: Electrostatic discharge immunity test, First Edition, 1995-01.
- [23] IEC, 1000-4-4, Electromagnetic Compatibility (EMC), Part:4: Testing and measurement techniques - Section 4: Electrical fast transient/ burst immunity test, First Edition, 1995-01.
- [24] Industry Canada, ICES-003 Interference-Causing Equipment Standard DIGITAL APPARATUS, Issue 2, Revision 1, 1995.
- [25] ISO, GUIDE 25 General requirements for the competence of calibration and testing laboratories, Third Edition, 1990.
- [26] Newbridge internal document HQP0009, Regulatory Approvals Overview, D. Moncion.

HISTORY

This document was created from the document template GQP0001, version 8.2.

Version	Date	Person	Reason
1.0	99.03.05	G. Sinfield	Issued