



849 NW STATE ROAD 45
NEWBERRY, FL 32669 USA
PH: 888.472.2424 OR 352.472.5500
FAX: 352.472.2030
EMAIL: INFO@TIMCOENGR.COM
[HTTP://WWW.TIMCOENGR.COM](http://WWW.TIMCOENGR.COM)

FCC PART 74

LOW POWER LICENSED TRANSMITTER

TEST REPORT

APPLICANT	CLEARONE INC.
	EDGEWATER CORPORATE PARK, SOUTH TOWER 5225 WILEY POST WAY, SUITE # 500 SALT LAKE CITY UTAH 84116 USA
FCC ID	FBIGOOSENECK
MODEL NUMBER	DS80-P18C-C-M610, 910-6002-183-C, DS80-P18C-C-M500, 910-6002-123-C, DS80-P12C-C-M610, 910-6002-124-C, DS80-P12-C-C-M500, 910-6002-184-C
PRODUCT DESCRIPTION	PODIUM WIRELESS MICROPHONE
STANDARD APPLIED	CFR 47 Part 74.801
DATE SAMPLE RECEIVED	9/15/2014
DATE TESTED	9/22/2014
TESTED BY	Sid Sanders
APPROVED BY	Cory Leverett
TIMCO REPORT NO.	1641AUT14TestReport.docx
TEST RESULTS	<input checked="" type="checkbox"/> PASS <input type="checkbox"/> FAIL

THE ATTACHED REPORT SHALL NOT BE REPRODUCED EXCEPT IN FULL
WITHOUT THE WRITTEN APPROVAL OF TIMCO ENGINEERING, INC.



TABLE OF CONTENTS

GENERAL REMARKS	3
GENERAL INFORMATION.....	4
TEST PROCEDURES.....	6
TEST REPORT SUMMARY.....	7
RF POWER OUTPUT.....	8
RF Exposure & SAR Exclusion.....	8
MODULATION CHARACTERISTICS.....	9
OCCUPIED BANDWIDTH	10
MODULATION CHARACTERISTICS OCCUPIED BANDWIDTH	11
20 dB BANDWIDTH	11
FIELD STRENGTH OF SPURIOUS EMISSIONS.....	12
FIELD STRENGTH OF SPURIOUS EMISSIONS TEST SETUP PHOTO.....	13
FIELD STRENGTH OF SPURIOUS EMISSIONS.....	15
FIELD STRENGTH OF SPURIOUS EMISSIONS.....	16
FIELD STRENGTH OF SPURIOUS EMISSIONS.....	17
SPURIOUS EMISSIONS AT ANTENNA TERMINALS (CONDUCTED).....	18
FREQUENCY STABILITY	19
EMC EQUIPMENT LIST	20

Applicant: CLEARONE INC.

FCC ID: FBIGOOSENECK

REPORT: V:\C\CLEARONE_FBI\1641AUT14\1641AUT14TESTREPORT_REV1.DOCX

GENERAL REMARKS

The attached report shall not be reproduced except in full without the written permission of Timco Engineering Inc.

The test results relate only to the items tested.

Summary

The device under test does:

- fulfill the general approval requirements as identified in this test report
- not fulfill the general approval requirements as identified in this test report

Attestations

This equipment has been tested in accordance with the standards identified in this test report. To the best of my knowledge and belief, these tests were performed using the measurement procedures described in this report.

All instrumentation and accessories used to test products for compliance to the indicated standards are calibrated regularly in accordance with ISO 17025 requirements.

I attest that the necessary measurements were made, under my supervision, at:

Timco Engineering Inc.
849 NW State Road 45
Newberry, FL 32669

Authorized Signatory Name:



A handwritten signature in black ink is overlaid on a circular blue ink stamp. The stamp contains the text "TIMCO ENGINEERING, INC." around the perimeter and a small asterisk (*) in the center.

Project Manager Name
Engineering Project Manager

Date: 9/28/14

Table of contents

Applicant: CLEARONE INC.
FCC ID: FBIGOOSENECK
REPORT: V:\C\CLEARONE_FBI\1641AUT14\1641AUT14TESTREPORT_REV1.DOCX



GENERAL INFORMATION

RULES FCC PART 2.1033

EUT TECHNICAL DESCRIPTION

EUT Description	PODIUM WIRELESS MICROPHONE
FCC ID	FBIGOOSENECK
Model Number	DS80-P18C-C-M610, 910-6002-183-C, DS80-P18C-C-M500, 910-6002-123-C, DS80-P12C-C-M610, 910-6002-124-C, DS80-P12-C-C-M500, 910-6002-184-C
Modulation	DQPSK
Type of Emission	157K0G1D
Frequency Range	Band 1 499-608 MHz Band 2 614-618 MHz
Test Frequencies	Band 1 499, & 511.58 MHz Band 2 605.40, 614.35, & 617.60 MHz
Maximum Output Power	6.3 milliWatts
EUT Power Source	<input type="checkbox"/> 110-120Vac/50- 60Hz <input checked="" type="checkbox"/> DC Power <input type="checkbox"/> Battery Operated Exclusively
Test Item	<input type="checkbox"/> Prototype <input type="checkbox"/> Pre-Production <input checked="" type="checkbox"/> Production
Type of Equipment	<input type="checkbox"/> Fixed <input type="checkbox"/> Mobile <input checked="" type="checkbox"/> Portable

[Table of contents](#)

Applicant: CLEARONE INC.

FCC ID: FBIGOOSENECK

REPORT: V:\C\CLEARONE_FBI\1641AUT14\1641AUT14TESTREPORT_REV1.DOCX

GENERAL INFORMATION

Test Facility	Timco Engineering, Inc. 849 NW State Road 45, Newberry, FL 32669
Test Condition	The temperature was 24-26°C with a relative humidity of 50-60%.
Modifications	None
Test Exercise (e.g. software description, test signal, etc.)	The EUT was operated in its normal mode of operation.
Applicable Standards	ANSI/TIA 603-C:2010, FCC CFR 47 Parts 2 and 74

[Table of contents](#)

Applicant: CLEARONE INC.

FCC ID: FBIGOOSENECK

REPORT: V:\C\CLEARONE_FBI\1641AUT14\1641AUT14TESTREPORT_REV1.DOCX

TEST PROCEDURES

Power Line Conducted Interference: The procedure used was ANSI/TIA 603-C:2004 using a 50uH LISN. Both lines were observed with the UUT transmitting. The bandwidth of the spectrum analyzer was 10 kHz with an appropriate sweep speed.

Bandwidth 20 dB: The measurements were made with the spectrum analyzer's resolution bandwidth (RBW) = 1 MHz and the video bandwidth (VBW) = 3 MHz and the span set as shown on plot.

Power Output: For a device with a fixed antenna, RF power is measured as ERP as the antenna is permanently attached. The substitution method was used as described in ANSI/TIA-603-C:2004. If the EUT has an antenna connector the RF Power is measured conducted.

Antenna Conducted Emissions: The RBW = 100 kHz, VBW = 300 kHz and the span set to 5 MHz and the spectrum was scanned from 30 MHz to the 10th Harmonic of the fundamental. Above 1 GHz the resolution bandwidth was 1 MHz and the VBW = 3 MHz and the span to 50 MHz.

Radiation Interference: The test procedure used was ANSI/TIA 603-C:2004 using an Agilent spectrum receiver with preselector. The bandwidth (RBW) of the spectrum receiver was 100 kHz up to 1 GHz and 1 MHz above 1 GHz with an appropriate sweep speed. The VBW above 1 GHz was 3 MHz. The analyzer was calibrated in dB above a microvolt at the output of the antenna.

[Table of contents](#)

Applicant: CLEARONE INC.

FCC ID: FBIGOOSENECK

REPORT: V:\C\CLEARONE_FBI\1641AUT14\1641AUT14TESTREPORT_REV1.DOCX

TEST REPORT SUMMARY

Rule Part No.	Scope of Work	Status Pass/Fail/NA
<u>Part 2.1033(c)(8), Part 2.1046(a), 74.801,</u>	DC Input into the final Amplifier RF Power Output	PASS
<u>Part 2.1033(c) (4) Part 2.1047(a)(b), 74.861(e)(3)</u>	Modulation Characteristics	NA *See Note
<u>2.1049(c), 74.861</u>	Emission Mask and Occupied Bandwidths	PASS
<u>2.1053,</u>	Antenna Conducted Emissions	PASS
<u>2.1053,</u>	Field Strength Spurious Emissions	PASS
<u>Part 2.1055 Part 74.861,</u>	Frequency Stability	PASS

*The EUT uses a digital modulation scheme therefore the deviation of the modulation remains constant and never changes.

[Table of Contents](#)

Applicant: CLEARONE INC.

FCC ID: FBIGOOSENECK


REPORT: V:\C\CLEARONE_FBI\1641AUT14\1641AUT14TESTREPORT_REV1.DOCX

RF POWER OUTPUT

Rule Part No.: Part 2.1046(a), Part 74.801,

Method of Measurement: For a device with a fixed antenna, RF power is measured as ERP as the antenna is permanently attached. The substitution method was used as described in ANSI/TIA-603-C:2004. If the EUT has an antenna connector the RF Power is measured conducted. With a nominal battery voltage, and the transmitter properly adjusted the RF output measures:

Test Setup Diagram:

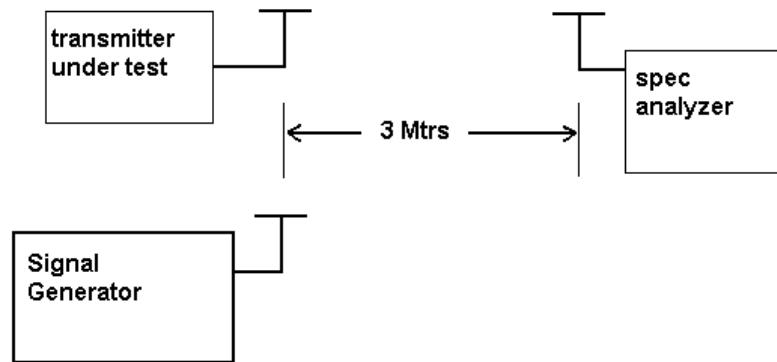

Test Data: **ERP** $Erp = P_t + G_t = (E * d)^2 / 30$

OUTPUT POWER: 6.3 mW or 7.99dBm

Part 2.1033 (C)(8) DC Input into the final amplifier

INPUT POWER: (3.0V)(0.015A) = .045 Watts

RF Exposure & SAR Exclusion

Maximum Power: 6.3mW
 Minimum Separation: 5.0mm
 Highest Frequency: 618MHz

Calculation: 0.0 and this number must be less than 3.0 for SAR Exclusion

Conclusion: This EUT is Exempt from SAR Testing.

Table of contents

Applicant: CLEARONE INC.
 FCC ID: FBIGOOSENECK
 REPORT: V:\C\CLEARONE_FBI\1641AUT14\1641AUT14TESTREPORT_REV1.DOCX



MODULATION CHARACTERISTICS

Rule Part No.: Part 2.1047(a)(b), 74.861 (e)(3)

FCC Limit: ± 75 kHz Deviation

Channel Spacing 200 kHz

**Method of Modulation is DQPSK with an emission designator of;
157K0G1D**

Applicant: CLEARONE INC.

FCC ID: FBIGOOSENECK


REPORT: V:\C\CLEARONE_FBI\1641AUT14\1641AUT14TESTREPORT_REV1.DOCX

OCCUPIED BANDWIDTH

Data in the plots show that all sidebands between 50 & 100% for the authorized bandwidth are attenuated by at least 25dB. From 100 to 250% of the authorized bandwidth they are attenuated by at least 35dB and beyond 250% 43 log(P_o) dB. The plot shows the transmitter modulated with 15000 Hz (the highest modulation frequency), adjusted for 50% modulation plus 16 dB. The spectrum analyzer was set with the unmodulated carrier at the top of the screen. The test procedure diagram and occupied bandwidth plot follows.

Method of Measurement:

TIA 603-D

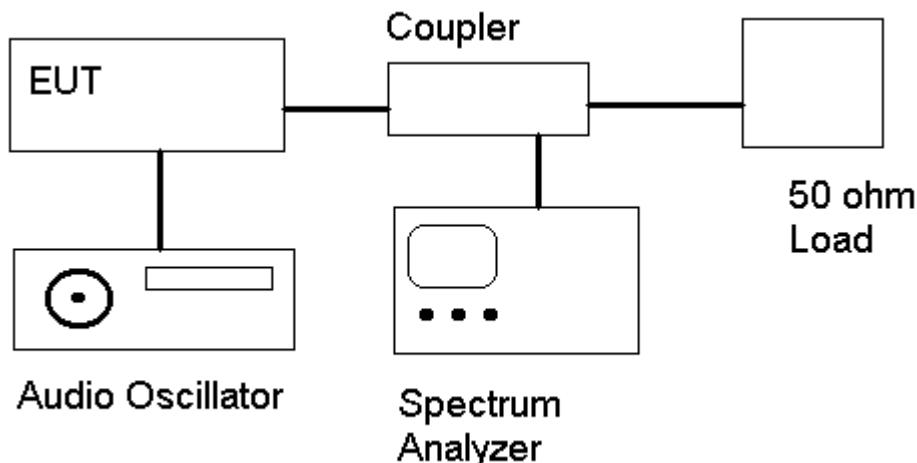

[Table of contents](#)


Applicant: CLEARONE INC.

FCC ID: FBIGOOSENECK

REPORT: V:\C\CLEARONE_FBI\1641AUT14\1641AUT14TESTREPORT_REV1.DOCX

MODULATION CHARACTERISTICS OCCUPIED BANDWIDTH

RESULTS:

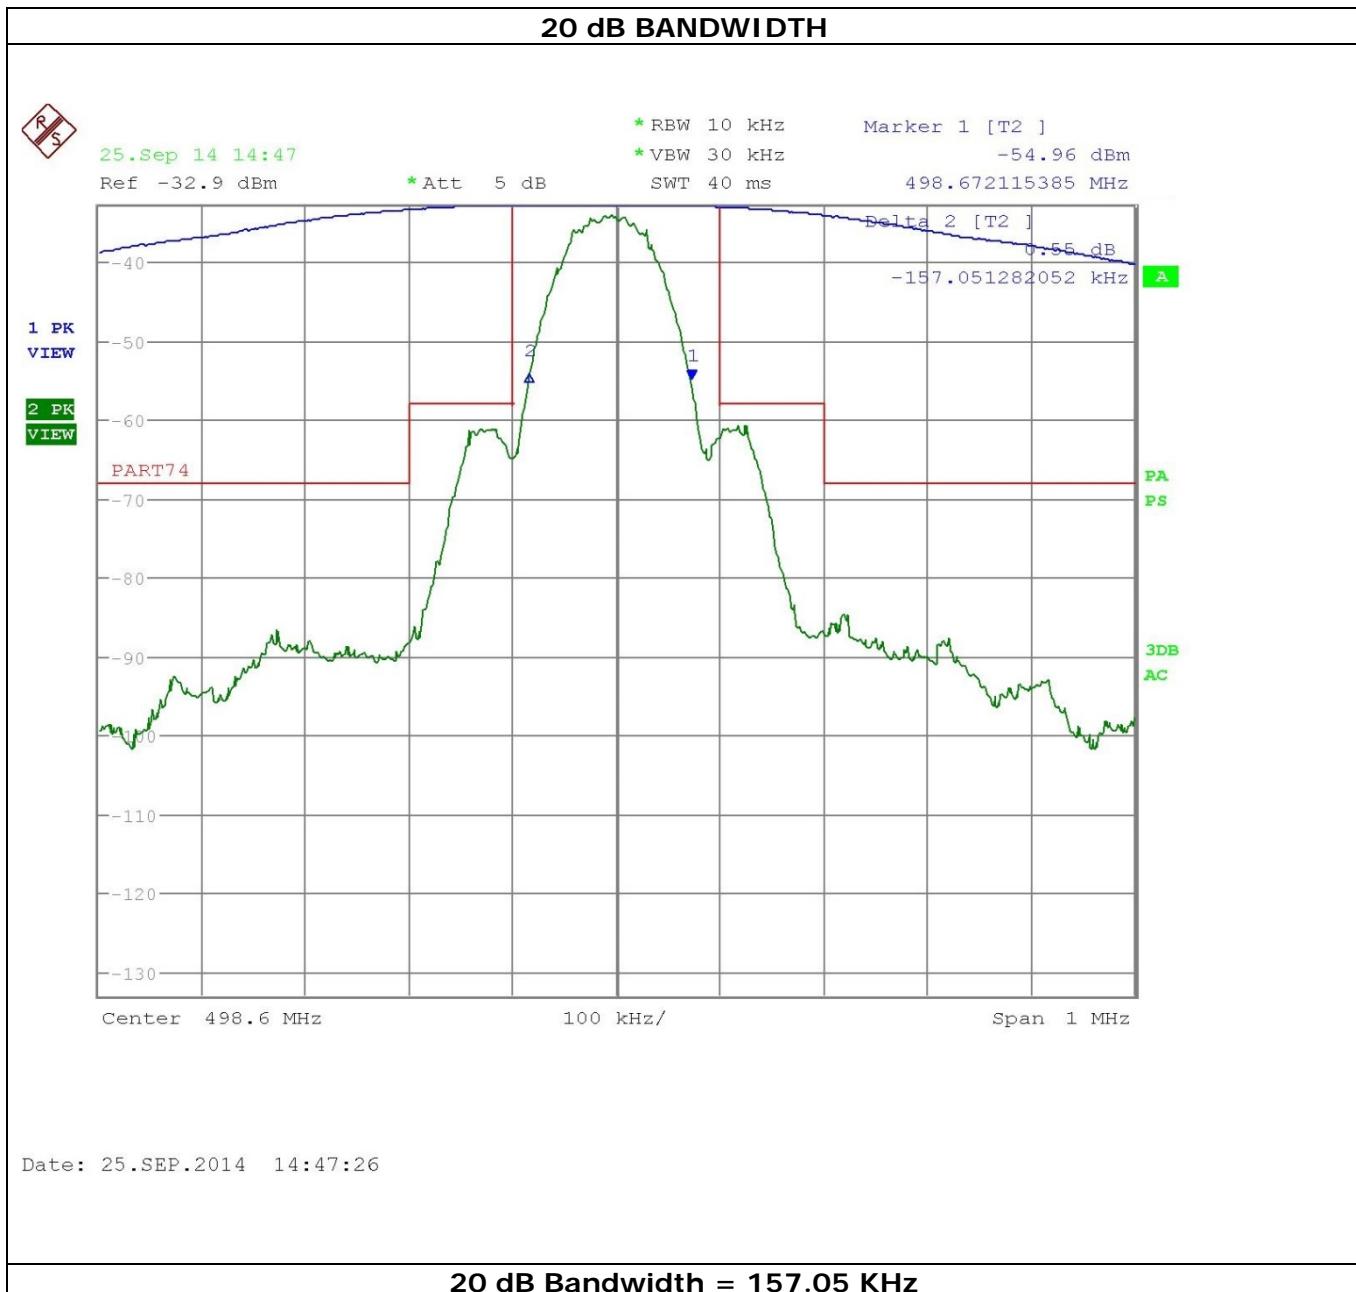

[Table of contents](#)

Applicant: CLEARONE INC.

FCC ID: FBIGOOSENECK

REPORT: V:\C\CLEARONE_FBI\1641AUT14\1641AUT14TESTREPORT_REV1.DOCX

FIELD STRENGTH OF SPURIOUS EMISSIONS

Rule Parts. No.: Part 2.1053, RSS-123 Issue 2


Requirements: Emissions must be $43 + 10\log(P_o)$ dB below the mean power output of the transmitter.

$$43 + 10 \log 0.0063 = 20.9 \text{ dB}$$

METHOD OF MEASUREMENTS: The tabulated data shows the results of the radiated field strength emissions test. The spectrum was scanned from 30 MHz to at least the tenth harmonic of the fundamental. This test was conducted per ANSI/TIA 603-C:2010 using the substitution method. Measurements were made at the test site of Timco Engineering, Inc. located at 849 NW State Road 45, Newberry, FL 32669.

Test Method: TIA 603 D 2.2.12.3 Determine the EIRP of the EUT at the frequency to be tested and convert to dBm. Then use the substitution SW

Test Setup Diagram:

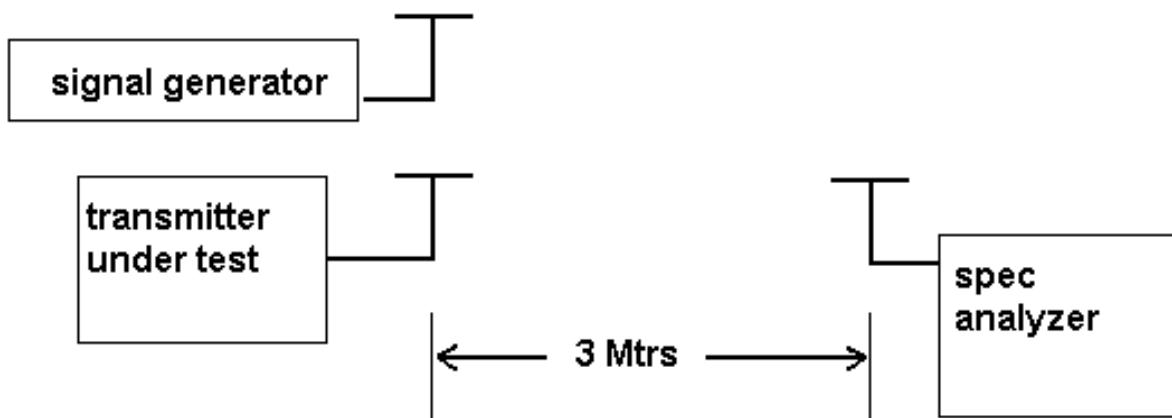


Applicant: CLEARONE INC.

FCC ID: FBIGOOSENECK


REPORT: V:\C\CLEARONE_FBI\1641AUT14\1641AUT14TESTREPORT_REV1.DOCX

FIELD STRENGTH OF SPURIOUS EMISSIONS TEST SETUP PHOTO

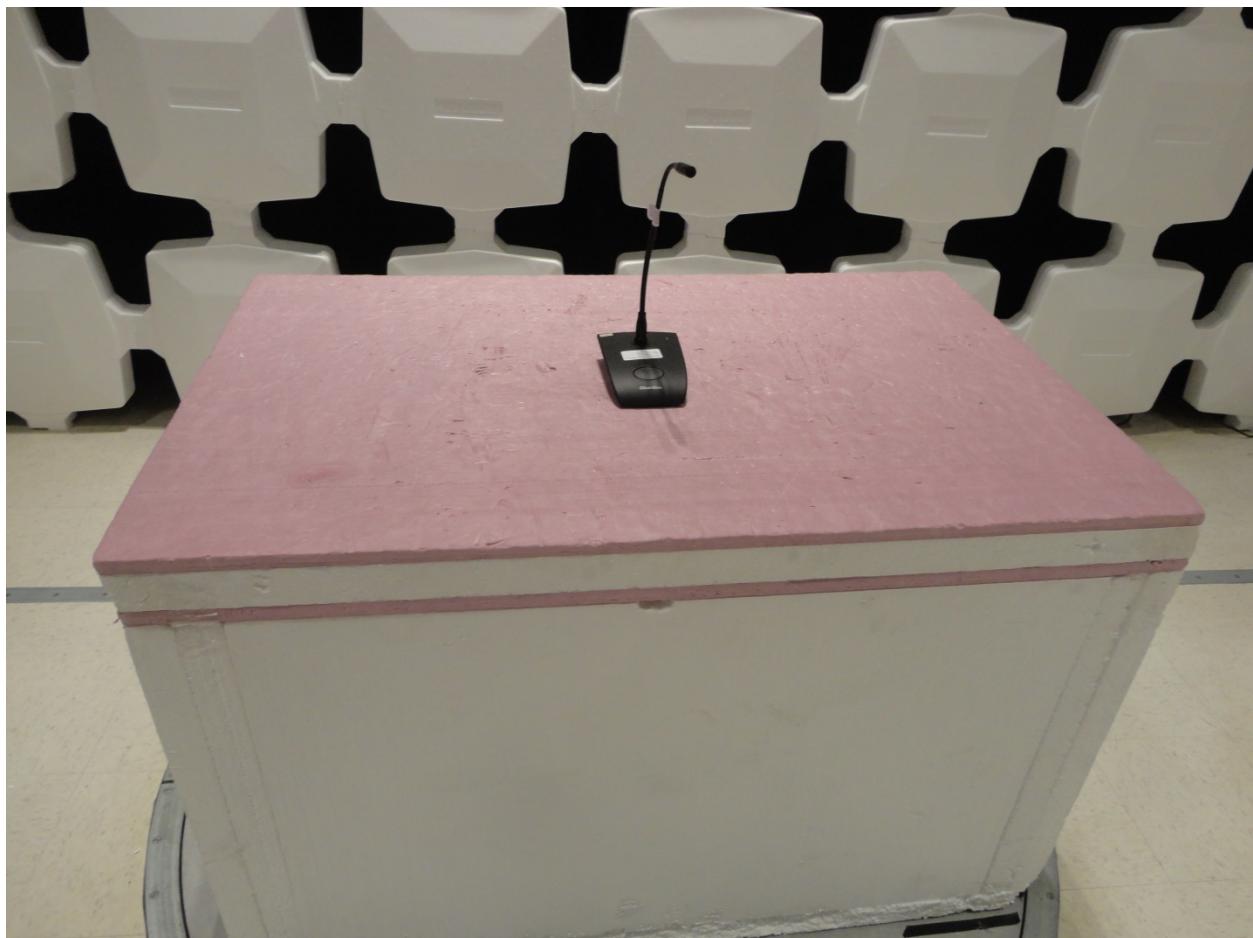

Applicant: CLEARONE INC.
FCC ID: FBIGOOSENECK
REPORT: V:\C\CLEARONE_FBI\1641AUT14\1641AUT14TESTREPORT_REV1.DOCX

FIELD STRENGTH OF SPURIOUS EMISSIONS TEST SETUP PHOTO

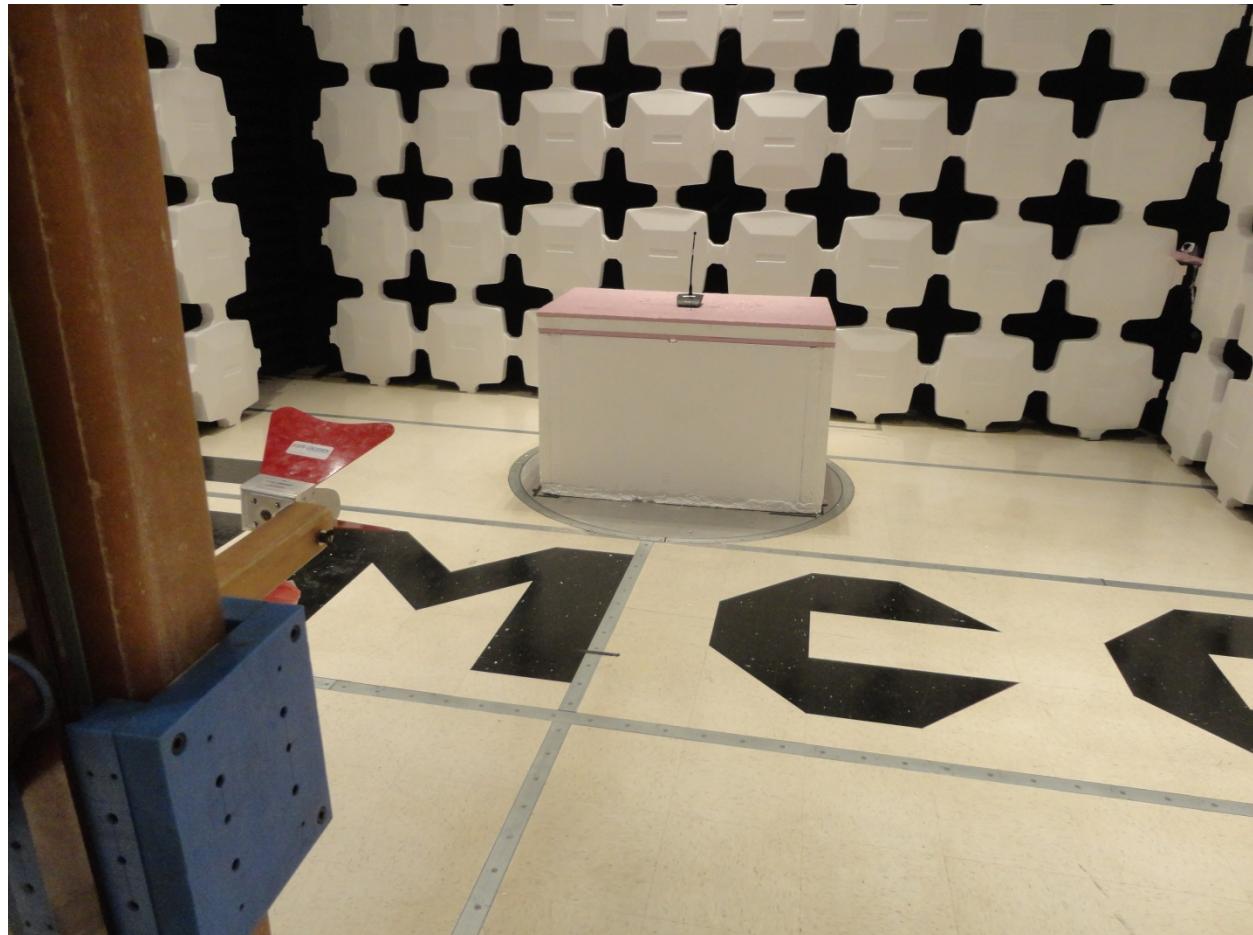

Applicant: CLEARONE INC.

FCC ID: FBIGOOSENECK

REPORT: V:\C\CLEARONE_FBI\1641AUT14\1641AUT14TESTREPORT_REV1.DOCX



FIELD STRENGTH OF SPURIOUS EMISSIONS

Test Data:

Emission Frequency (MHz)	Power Mode	ERP Power Output (dBm)	ERP Power Output (Watts)	FCC Requirement dB	Bandwidth - BW - kHz
499.60	Hi	7.99	0.01	20.99	25.00

Emission Frequency (MHz)	Ant. Polarity	Below Carrier (dBc)	Margin
997.20	H	45.52	32.52
1,495.80	H	45.00	32.00
1,994.40	V	50.01	37.01
2,493.00	V	42.72	29.72
2,991.60	V	47.08	34.08
3,490.20	V	40.48	27.48
3,988.80	H	40.38	27.38
4,487.40	V	41.17	28.17
4,986.00	V	43.41	30.41

Emission Frequency (MHz)	Power Mode	ERP Power Output (dBm)	ERP Power Output (Watts)	FCC Requirement dB	Bandwidth - BW - kHz
511.60	Hi	7.99	0.01	20.99	25.00

Emission Frequency (MHz)	Ant. Polarity	Below Carrier (dBc)	Margin
1,023.20	V	53.55	36.60
1,534.80	H	55.64	37.58
2,046.40	V	54.74	36.68
2,558.00	V	50.21	32.15
3,069.60	H	52.49	34.43
3,581.20	V	47.33	29.27
4,092.80	V	47.43	29.37
4,604.40	V	55.73	37.67
5,116.00	V	48.43	30.37

Applicant: CLEARONE INC.

FCC ID: FBIGOOSENECK

REPORT: V:\C\CLEARONE_FBI\1641AUT14\1641AUT14TESTREPORT_REV1.DOCX



FIELD STRENGTH OF SPURIOUS EMISSIONS

Emission Frequency (MHz)	Power Mode	ERP Power Output (dBm)	ERP Power Output (Watts)	FCC Requirement dB	Bandwidth - BW - kHz
605.40	Hi	7.99	0.01	20.99	25.00

Emission Frequency (MHz)	Ant. Polarity	Below Carrier (dBc)	Margin
1,210.80	V	44.06	31.06
1,816.20	H	40.87	27.87
2,421.60	V	44.90	31.90
3,027.00	H	45.36	32.36
3,632.40	V	41.63	28.63
4,237.80	V	39.44	26.44
4,843.20	V	38.34	25.34
5,448.60	V	35.89	22.89
6,054.00	V	31.95	18.95

Emission Frequency (MHz)	Power Mode	ERP Power Output (dBm)	ERP Power Output (Watts)	FCC Requirement dB	Bandwidth - BW - kHz
614.35	Hi	7.99	0.01	20.99	25.00

Emission Frequency (MHz)	Ant. Polarity	Below Carrier (dBc)	Margin
1,228.70	H	35.02	26.88
1,843.05	H	35.50	27.36
2,457.40	H	42.92	29.92
3,071.75	H	46.44	33.44
3,686.10	V	42.37	29.37
4,300.45	H	40.26	27.26
4,914.80	V	37.86	24.86
5,529.15	V	36.21	23.21
6,143.50	V	36.78	23.78

Applicant: CLEARONE INC.

FCC ID: FBIGOOSENECK

REPORT: V:\C\CLEARONE_FBI\1641AUT14\1641AUT14TESTREPORT_REV1.DOCX



FIELD STRENGTH OF SPURIOUS EMISSIONS

Emission Frequency (MHz)	Power Mode	ERP Power Output (dBm)	ERP Power Output (Watts)	FCC Requirement dB	Bandwidth - BW - kHz
617.60	Hi	7.99	0.01	20.99	25.00

Emission Frequency (MHz)	Ant. Polarity	Below Carrier (dBc)	Margin
1,235.20	H	37.34	29.80
1,852.80	H	35.64	28.10
2,470.40	V	40.47	32.93
3,088.00	V	37.45	29.91
3,705.60	V	36.49	28.95
4,323.20	V	34.03	26.49
4,940.80	V	33.69	26.15
5,558.40	V	31.87	24.33
6,176.00	V	32.41	24.87

Results: Meets Requirements

Applicant: CLEARONE INC.

FCC ID: FBIGOOSENECK

REPORT: V:\C\CLEARONE_FBI\1641AUT14\1641AUT14TESTREPORT_REV1.DOCX



SPURIOUS EMISSIONS AT ANTENNA TERMINALS (CONDUCTED)

REQUIREMENTS: Not applicable no Antenna Connector.

Applicant: CLEARONE INC.
FCC ID: FBIGOOSENECK
REPORT: V:\C\CLEARONE_FBI\1641AUT14\1641AUT14TESTREPORT_REV1.DOCX

FREQUENCY STABILITY

Rule Parts. No.: Part 2.1055, Part 74.861

Requirements: Temperature and voltage tests were performed to verify that the frequency remains within the .0050%,(50 ppm)

Method of Measurements: ANSI/TIA 603-C:2004.

The test was conducted as follows: The transmitter was placed in the temperature chamber at 25 °C and allowed to stabilize for one hour. The transmitter was keyed ON for one minute during which four frequency readings were recorded at 15-second intervals. The worse case number used in the table below. The assigned channel frequency was considered to be the reference frequency. The temperature was then reduced to -30 °C after which the transmitter was again allowed to stabilize for one hour. The transmitter was keyed ON for one minute, and again frequency readings were noted at 15-second intervals. The worst-case number was again used in the table below. This procedure was repeated in 10-degree increments up to + 50 degrees C.

Test Data:

Temperature	Frequency MHz	PPM
25°C (reference)	511.593121	
-30°C	511.593402	0.549
-20°C	511.593518	0.776
-10°C	511.593502	0.745
0°C	511.593393	0.532
10°C	511.593379	0.504
20°C	511.593189	0.133
30°C	511.593502	0.745
40°C	511.593357	0.461
50°C	511.593392	0.530
Battery Voltage	Frequency	PPM
-15%	N/A	*See Note
15%	511.593449	0.641

*The EUT will not operate below the nominal voltage of 2.5 VDC, a measurement was not possible at -15% percent.

Table of contents

Applicant: CLEARONE INC.

FCC ID: FBIGOOSENECK

REPORT: V:\C\CLEARONE_FBI\1641AUT14\1641AUT14TESTREPORT_REV1.DOCX



EMC EQUIPMENT LIST

Device	Manufacturer	Model	Serial Number	Cal/Char Date	Due Date
Antenna: Biconnical	Eaton	94455-1	1096	05/10/13	05/10/15
Antenna: Log-Periodic	Electro-Metrics	LPA-25	1122	05/09/13	05/09/15
AC Voltmeter	HP	400FL	2213A14499	06/20/13	06/20/15
Digital Multimeter	Fluke	FLUKE-77-3	79510405	06/20/13	06/20/15
Frequency Counter	HP	5385A	2730A03025	08/22/13	08/22/15
Thermometer	Martel	303	080504494	2/25/13	2/25/15
Measuring Tape-7.5M	Kraftixx	7.5M PROFI		05/20/13	05/20/15
3-Meter Semi-Anechoic Chamber	Panashield	N/A	N/A	12/31/13	12/31/15
Temperature Chamber Small	Thermotron Corp.	S1.2 Mini Max	25-1420-09	08/20/14	08/20/16
EMI Test Receiver R & S ESIB 40	Rohde & Schwarz	ESIB 40	100274	08/12/14	08/12/16
Software: Field Strength Program	Timco	N/A	Version 4.0	N/A	N/A
Hygro-Thermometer	Extech	445703	0602	06/20/13	06/20/15
Attenuator	Narda	766-30	N/A	08/01/13	08/01/15
*EMI Test Receiver R & S ESU 40	Rohde & Schwarz	ESU 40	100320	03/11/14	03/11/16
Signal Generator HP 8648C	HP	8648C	3623A02898	08/29/13	08/29/15
Antenna: Double-Ridged Horn 18-40 GHz	EMCO	3116	9011-2145	09/20/13	09/20/15

*EMI RECEIVER SOFTWARE VERSION

The receiver firmware used was version 4.43 Service Pack 3

[Table of contents](#)

Applicant: CLEARONE INC.

FCC ID: FBIGOOSENECK

REPORT: V:\C\CLEARONE_FBI\1641AUT14\1641AUT14TESTREPORT_REV1.DOCX