



Engineering and Testing for EMC and Safety Compliance



Accredited under A2LA testing certificate # 2653.01

**Certification Application Report
FCC Part 15.247 & Industry Canada RSS-210**

Test Lab:		Applicant:	
Rhein Tech Laboratories, Inc. Tel: 703-689-0368 360 Herndon Parkway Fax: 703-689-2056 Suite 1400 Herndon, VA 20170 E-Mail: atcinfo@rheintech.com http://www.rheintech.com		Fleetwood Group, Inc. Tel: 616-820-8271 11832 James Street Fax: 616-820-8300 Holland, MI 49424 Contact: Will Buehler	
FCC ID/ IC:	FBRWRS8200/ 1859A-WRS8200	Test Report Date:	August 13, 2009
Platform:	N/A	RTL Work Order #:	2009237
Model:	WRS8200	RTL Quote #:	QRTL09-343
American National Standard Institute:	ANSI C63.4-2003: Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz		
FCC Classification:	DSS – Part 15 Spread Spectrum Transmitter		
FCC Rule Part(s)/Guidance:	FCC Rules Part 15.247: Operation within the bands 920-928 MHz, 2400-2483.5 MHz and 5725-5850 MHz Direct Sequence System (10-01-08), DA 00-705		
Industry Canada:	RSS-210 Issue 7: Low Power License-Exempt Communications Devices		
Digital Interface Information:	Digital Interface was found to be compliant		
Frequency Range (MHz)	Output Power* (W)	Frequency Tolerance	Emission Designator
2401–2475	0.095	N/A	600KFXD

* power is conducted

I, the undersigned, hereby declare that the equipment tested and referenced in this report conforms to the identified standard(s) as described in this test report. No modifications were made to the equipment during testing in order to achieve compliance with these standards. Furthermore, there was no deviation from, additions to, or exclusions from, the applicable parts of FCC Part 2, FCC Part 15, Industry Canada RSS-210, and ANSI C63.4.

Signature:

Date: August 13, 2009

Typed/Printed Name: Desmond A. Fraser

Position: President

This report may not be reproduced, except in full, without the written approval of Rhein Tech Laboratories, Inc. and Fleetwood Group, Inc. The test results relate only to the item(s) tested.

Table of Contents

1	General Information	5
1.1	Scope	5
1.2	Description of EUT	5
1.3	Test Facility	5
1.4	Related Submittal(s)/Grant(s)	5
1.5	Modifications	5
2	Test Information	6
2.1	Description of Test Modes	6
2.2	Exercising the EUT	6
2.3	Test Result Summary	6
2.4	Test System Details	7
2.5	Configuration of Tested System	7
3	Peak Output Power – FCC §15.247(b)(1); RSS-210 §6.6.2(o)	8
3.1	Power Output Test Procedure	8
3.2	Power Output Test Data	8
4	Antenna Conducted Spurious Emissions – FCC §15.247(d); RSS-210 §6.6.2(o)	9
5	Band-Edge Compliance of RF Conducted Emissions – FCC §15.247(d); RSS-210 §2.2	10
5.1	Band Edge Test Procedure	10
5.2	Test Results	11
6	20 dB Bandwidth – FCC §15.247(a)(1)(ii); IC RSS-210 §A8.1	16
6.1	20 dB Bandwidth Test Procedure	16
6.2	20 dB Modulated Bandwidth Test Data	16
6.3	20 dB Bandwidth Plots	17
7	Carrier Frequency Separation - §15.247(a)(1); IC RSS-210 §A8.1(d)	20
7.1	Carrier Frequency Separation Test Procedure	20
7.2	Carrier Frequency Separation Test Data	20
8	Hopping Characteristics – FCC §15.247(a)(1)(iii); IC RSS-210 §A8.1(d)	21
8.1	Hopping Characteristics Test Procedure	21
8.2	Number of Hopping Frequencies	21
8.3	Average Time of Occupancy	22
9	AC Conducted Emissions - FCC Rules and Regulations Part 15 §15.207; IC RSS-Gen	24
9.1	Site and Test Description	24
9.2	Test Limits	24
9.3	Conducted Emissions Test Data	25
10	Radiated Emissions Test Results - FCC Rules and Regulations Part §15.247(d); IC RSS-210 §2.6	26
10.1	Limits of Radiated Emissions Measurement	26
10.2	Radiated Emissions Measurement Test Procedure	26
10.2.1	Radiated Emissions Harmonics/Spurious Test Data	28
11	Conclusion	30

Figure Index

Figure 2-1: Configuration of System Under Test.....	7
---	---

Table Index

Table 2-1: Channels Tested.....	6
Table 2-2: Test Result Summary – FCC Part 15, Subpart C (Section 15.247)	6
Table 2-3: Equipment Under Test	7
Table 3-1: Power Output Test Equipment.....	8
Table 3-2: Power Output Test Data	8
Table 4-1: Band Edge Test Equipment	9
Table 5-1: Radiated Band Edge Emissions Test Data	14
Table 5-2: Band Edge Test Equipment	15
Table 6-1: 20 dB Bandwidth Test Equipment.....	16
Table 6-2: 20 dB Modulated Bandwidth Test Data.....	16
Table 7-1: Carrier Frequency Separation Test Equipment.....	20
Table 8-1: Hopping Characteristics Test Equipment.....	21
Table 8-2: Average Time of Occupancy Test Equipment.....	23
Table 9-1: Conducted Emissions Test Data - Neutral Side	25
Table 9-2: Conducted Emissions Test Data – Hot Side	25
Table 9-3: Conducted Emissions Test Equipment	25
Table 10-1: Radiated Emissions Test Equipment	27
Table 10-2: Radiated Emissions Harmonics/Spurious - 2401 MHz.....	28
Table 10-3: Radiated Emissions Harmonics/Spurious - 2437 MHz.....	28
Table 10-4: Radiated Emissions Harmonics/Spurious - 2475 MHz.....	29
Table 10-5: Radiated Emissions Harmonics/Spurious Hopping Mode.....	29

Plot Index

Plot 5-1: Lower Band Edge TX Frequency; 2401 MHz – Fixed Frequency	11
Plot 5-2: Lower Band Edge TX Frequency; 2401 MHz – Hopping	12
Plot 5-3: Upper Band Edge TX Frequency; 2475 MHz – Fixed Frequency	13
Plot 5-4: Upper Band Edge TX Frequency; 2475 MHz – Hopping	14
Plot 6-1: 20 dB Bandwidth - 2401 MHz.....	17
Plot 6-2: 20 dB Bandwidth - 2437 MHz.....	18
Plot 6-3: 20 dB Bandwidth - 2475 MHz.....	19
Plot 7-1: Carrier Frequency Separation	20
Plot 8-1: Number of Hopping Frequencies (2401 - 2475 MHz)	21
Plot 8-2: Time of Occupancy (Dwell Time)	22
Plot 8-3: Time of Occupancy (Dwell Time 30 Second Sweep)	23

Rhein Tech Laboratories, Inc.
360 Herndon Parkway
Suite 1400
Herndon, VA 20170
<http://www.rheintech.com>

Client: Fleetwood Group, Inc.
Model: WRS8200
Standards: FCC 15.247/IC RSS-210
FCC/IC ID: FBRWRS8200/1859A-WRS8200
Report #: 2009237

Appendix Index

Appendix A:	FCC Part 1.1307, 1.1310, 2.1091, 2.1093; IC RSS-Gen: RF Exposure	31
Appendix B:	Agency Authorization Letter.....	32
Appendix C:	Confidentiality Request Letter.....	33
Appendix D:	IC Letters	34
Appendix E:	Label and Label Location	35
Appendix F:	Technical Operational Description.....	37
Appendix G:	Schematics	38
Appendix H:	Block Diagram	39
Appendix I :	Manual.....	40
Appendix J:	Test Photographs	41
Appendix K:	External Photographs	43
Appendix L:	Internal Photographs	48

Photograph Index

Photograph 1:	ID Label Sample.....	35
Photograph 2:	ID Label Location on Back of EUT	36
Photograph 3:	Radiated Testing – Front View	41
Photograph 4:	Radiated Testing – Back View	42
Photograph 5:	Front.....	43
Photograph 6:	Side	44
Photograph 7:	Side	45
Photograph 8:	End.....	46
Photograph 9:	End.....	47
Photograph 10:	Front.....	48
Photograph 11:	Back	49
Photograph 12:	Side	50
Photograph 13:	Side	51
Photograph 14:	End.....	52
Photograph 15:	End.....	53

Rhein Tech Laboratories, Inc.
360 Herndon Parkway
Suite 1400
Herndon, VA 20170
<http://www.rheintech.com>

Client: Fleetwood Group, Inc.
Model: WRS8200
Standards: FCC 15.247/IC RSS-210
FCC/IC ID: FBRWRS8200/1859A-WRS8200
Report #: 2009237

1 General Information

1.1 Scope

This is an original certification application test report.

Applicable Standards:

- FCC Rules Part 15.247: Frequency Hopping, Direct Spread Spectrum and Hybrid Systems that are in operation within the bands of 902-928 MHz, 2400-2483.5 MHz and 5725-5850 MHz.
- Industry Canada RSS-210: Low Power License-Exempt Communications Devices

1.2 Description of EUT

Equipment Under Test	Keypad transmitter module
Model	WRS8200
Power Supply	Internal 3.7 VDC rechargeable battery
Modulation Type	FHSS
Frequency Range	2401 – 2475 MHz
Antenna Connector Type	Internal
Antenna Types	Internal

1.3 Test Facility

The open area test site and conducted measurement facility used to collect the radiated data is located at 360 Herndon Parkway, Suite 1400, Herndon, Virginia 20170. This site has been fully described in a report and approved by the Federal Communications Commission to perform AC line conducted and radiated emissions testing (ANSI C63.4-2003).

1.4 Related Submittal(s)/Grant(s)

This is an original application for Fleetwood Group, Inc., Model: WRS8200, FCC ID: FBRWRS8200, IC: 1859A-WRS8200.

1.5 Modifications

None.

Rhein Tech Laboratories, Inc.
360 Herndon Parkway
Suite 1400
Herndon, VA 20170
<http://www.rheintech.com>

Client: Fleetwood Group, Inc.
Model: WRS8200
Standards: FCC 15.247/IC RSS-210
FCC/IC ID: FBRWRS8200/1859A-WRS8200
Report #: 2009237

2 Test Information

2.1 Description of Test Modes

In accordance with FCC 15.31(m), and because the EUT utilizes an operating band greater than 10 MHz, the following frequencies were tested:

Table 2-1: Channels Tested

Channel	Frequency
Low	2401
Middle	2437
High	2475

2.2 Exercising the EUT

The EUT was supplied with test firmware programmed with a high, mid, and low channel for testing, as well as in an original configuration for hopping mode. The EUT was tested in all three orthogonal planes in order to determine worst-case emissions. The EUT was provided with software to continuously transmit during testing. The carrier was also checked to verify that information was being transmitted. There were no deviations from the test standard(s) and/or methods. The test results reported relate only to the item tested.

2.3 Test Result Summary

Table 2-2: Test Result Summary – FCC Part 15, Subpart C (Section 15.247)

Standard	Test	Pass/Fail or N/A
FCC 15.207	AC Power Conducted Emissions	N/A
FCC 15.209	Radiated Emissions	Pass
FCC 15.247(b)	Maximum Peak Power Output	Pass
FCC 15.247(d)	Antenna Conducted Spurious Emissions	Pass
FCC 15.247(d)	Band Edge Measurement	Pass
FCC 15.247(a)(1)	Carrier Frequency Separation	Pass
FCC 15.247(a)(1)(ii)	20 dB Bandwidth	Pass
FCC 15.247(a)(1)(iii)	Hopping Characteristics	Pass
FCC 15.247(a)(1)(iii)	Average Time of Occupancy	Pass

Rhein Tech Laboratories, Inc.
360 Herndon Parkway
Suite 1400
Herndon, VA 20170
<http://www.rheintech.com>

Client: Fleetwood Group, Inc.
Model: WRS8200
Standards: FCC 15.247/IC RSS-210
FCC/IC ID: FBRWRS8200/1859A-WRS8200
Report #: 2009237

2.4 Test System Details

The test samples were received on August 7, 2009. The FCC identifiers for all applicable equipment, plus descriptions of all cables used in the tested system, are identified in the following table.

Table 2-3: Equipment Under Test

Part	Manufacturer	Model	Serial Number	FCC ID	Cable Description	RTL Bar Code
Keypad	Fleetwood Group Inc.	WRS8200	V1	FBRWRS8200	N/A	19162
Keypad	Fleetwood Group Inc.	WRS8200	V2	FBRWRS8200	N/A	19163

2.5 Configuration of Tested System

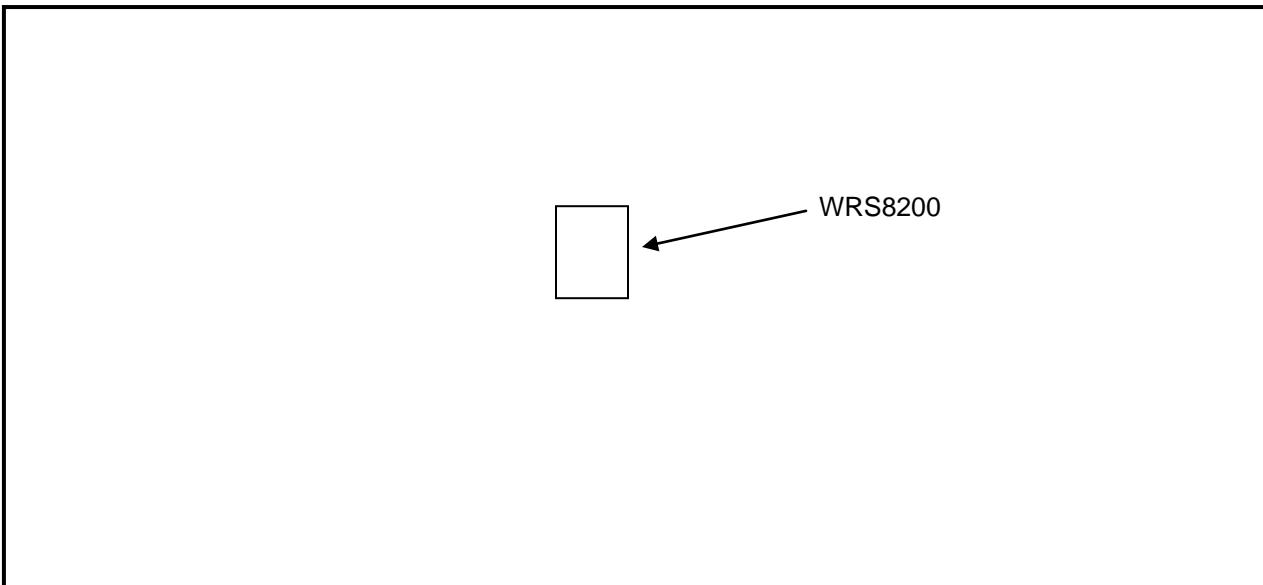


Figure 2-1: Configuration of System Under Test

Rhein Tech Laboratories, Inc.
360 Herndon Parkway
Suite 1400
Herndon, VA 20170
<http://www.rheintech.com>

Client: Fleetwood Group, Inc.
Model: WRS8200
Standards: FCC 15.247/IC RSS-210
FCC/IC ID: FBRWRS8200/1859A-WRS8200
Report #: 2009237

3 Peak Output Power – FCC §15.247(b)(1); RSS-210 §6.6.2(o)

3.1 Power Output Test Procedure

A radiated power measurement of the EUT was taken using an Agilent E9323A power meter.

Table 3-1: Power Output Test Equipment

RTL Asset #	Manufacturer	Model	Part Type	Serial Number	Calibration Due Date
901356	Agilent Technologies	E9323A	Power Sensor	31764-264	11/5/09
901184	Agilent Technologies	E4416A	EPM-P Power Meter, single channel	GB41050573	11/5/09

3.2 Power Output Test Data

Table 3-2: Power Output Test Data

Frequency (MHz)	Level Measured (dBm)
2401	19.77
2437	19.12
2475	17.91

Test Personnel:

Daniel W. Baltzell
EMC Test Engineer



Signature

August 11, 2009
Date of Test

Rhein Tech Laboratories, Inc.
360 Herndon Parkway
Suite 1400
Herndon, VA 20170
<http://www.rheintech.com>

Client: Fleetwood Group, Inc.
Model: WRS8200
Standards: FCC 15.247/IC RSS-210
FCC/IC ID: FBRWRS8200/1859A-WRS8200
Report #: 2009237

4 Antenna Conducted Spurious Emissions – FCC §15.247(d); RSS-210 §6.6.2(o)

No spurious emissions were found within 20 dB of the limit, therefore no emissions are reported.

Table 4-1: Band Edge Test Equipment

RTL Asset #	Manufacturer	Model	Part Type	Serial Number	Calibration Due Date
900913	Hewlett Packard	85462A	EMI Receiver RF Section (9 KHz – 6.5 GHz)	3325A00159	6/8/10
901523	M/A-COM	2082-6174-20	20 dB Attenuator	N/A	7/29/10

Test Personnel:

Daniel W. Baltzell
EMC Test Engineer



Signature

August 11, 2009

Date of Test

Rhein Tech Laboratories, Inc.
360 Herndon Parkway
Suite 1400
Herndon, VA 20170
<http://www.rheintech.com>

Client: Fleetwood Group, Inc.
Model: WRS8200
Standards: FCC 15.247/IC RSS-210
FCC/IC ID: FBRWRS8200/1859A-WRS8200
Report #: 2009237

5 Band-Edge Compliance of RF Conducted Emissions – FCC §15.247(d); RSS-210 §2.2

5.1 Band Edge Test Procedure

The EUT was connected to the spectrum analyzer through suitable attenuation. The span was set wide enough to capture the peak level of the emission operating on the channel closest to the band edge, as well as any modulation products which fall outside of the authorized band of operation. The spectrum analyzer was set to the following:

RBW > = 1% of the span
VBW > = RBW
Sweep = auto
Detector function = peak
Trace = max hold


The trace was allowed to stabilize. The marker was set on the emission at the band edge. The marker-delta was used to show the delta between the maximum in-band emission and the emission at the band edge, and was compared to the 20 dBc requirement of 15.247(d) (when using peak emissions). This measurement was taken in both fixed frequency and hopping modes.

Rhein Tech Laboratories, Inc.
360 Herndon Parkway
Suite 1400
Herndon, VA 20170
<http://www.rheintech.com>

Client: Fleetwood Group, Inc.
Model: WRS8200
Standards: FCC 15.247/IC RSS-210
FCC/IC ID: FBRWRS8200/1859A-WRS8200
Report #: 2009237

5.2 Test Results


Plot 5-1: Lower Band Edge TX Frequency; 2401 MHz – Fixed Frequency

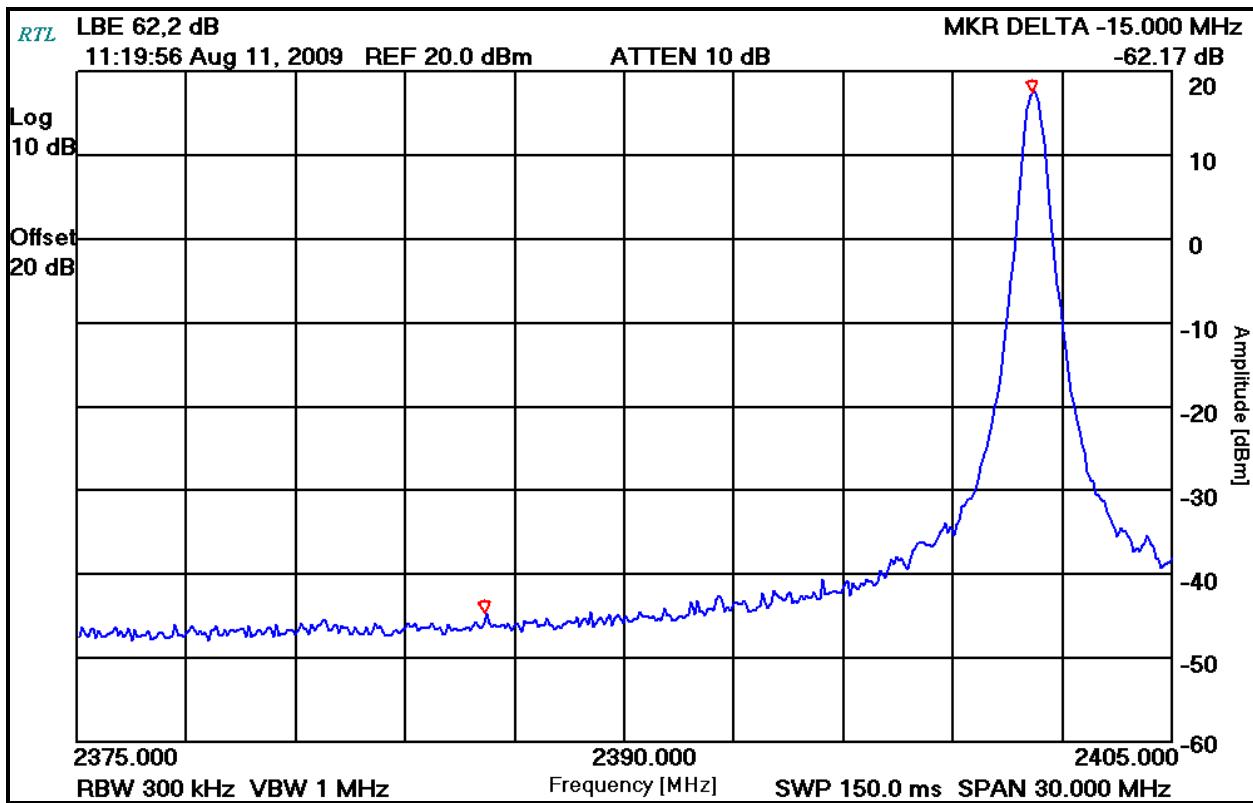

Rhein Tech Laboratories, Inc.
360 Herndon Parkway
Suite 1400
Herndon, VA 20170
<http://www.rheintech.com>

Client: Fleetwood Group, Inc.
Model: WRS8200
Standards: FCC 15.247/IC RSS-210
FCC/IC ID: FBRWRS8200/1859A-WRS8200
Report #: 2009237


Plot 5-2: Lower Band Edge TX Frequency; 2401 MHz – Hopping

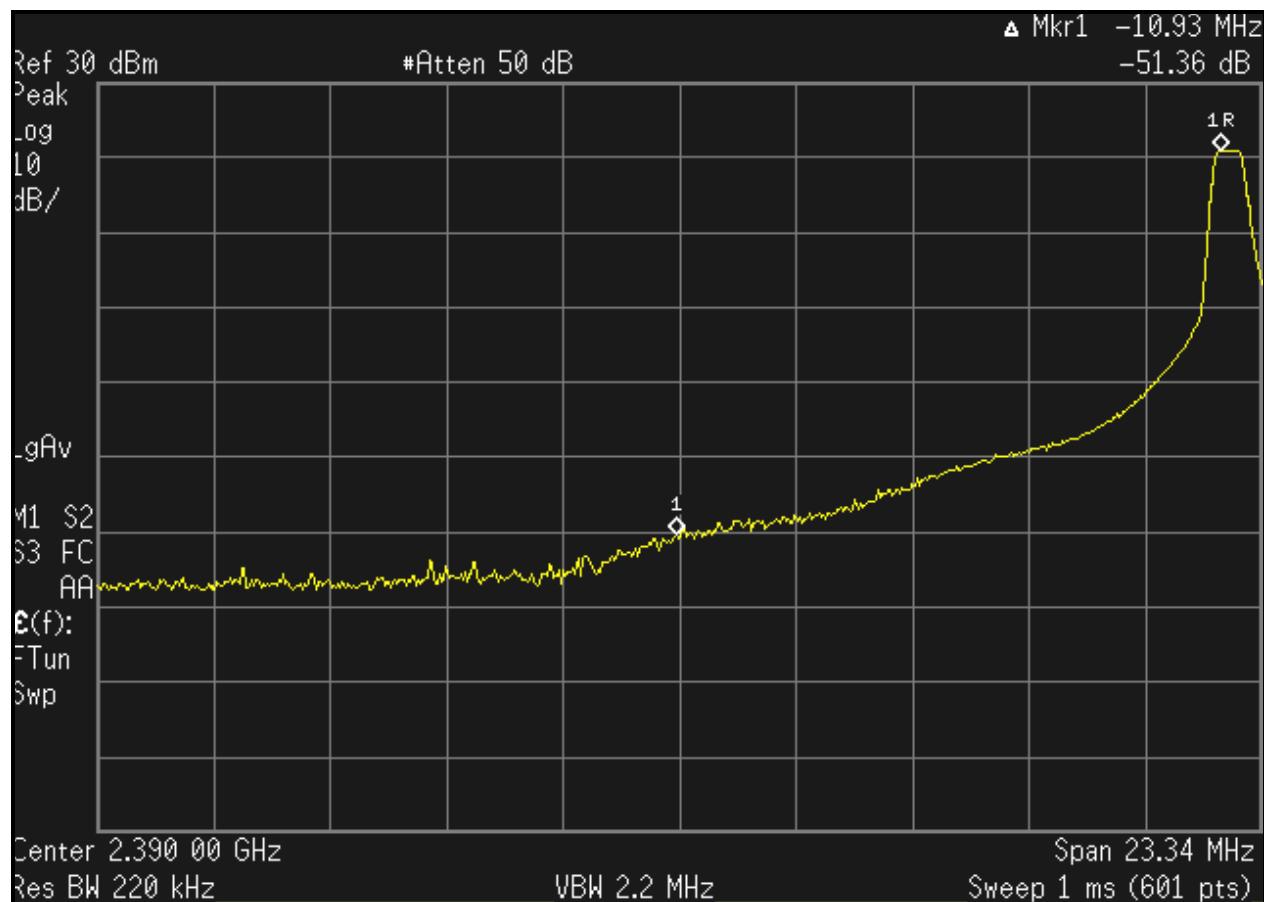

Rhein Tech Laboratories, Inc.
360 Herndon Parkway
Suite 1400
Herndon, VA 20170
<http://www.rheintech.com>

Client: Fleetwood Group, Inc.
Model: WRS8200
Standards: FCC 15.247/IC RSS-210
FCC/IC ID: FBRWRS8200/1859A-WRS8200
Report #: 2009237

Plot 5-3: Upper Band Edge TX Frequency; 2475 MHz – Fixed Frequency

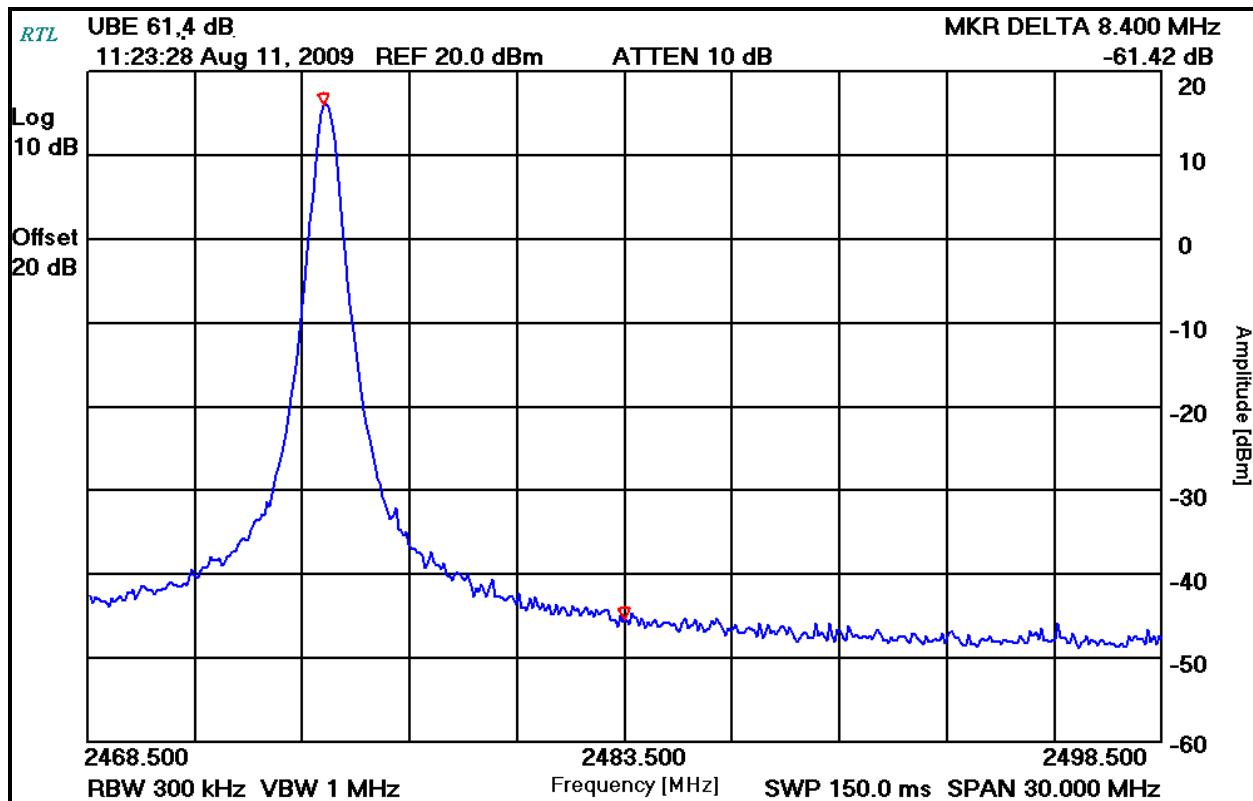

Rhein Tech Laboratories, Inc.
 360 Herndon Parkway
 Suite 1400
 Herndon, VA 20170
<http://www.rheintech.com>

Client: Fleetwood Group, Inc.
 Model: WRS8200
 Standards: FCC 15.247/IC RSS-210
 FCC/IC ID: FBRWRS8200/1859A-WRS8200
 Report #: 2009237

Plot 5-4: Upper Band Edge TX Frequency; 2475 MHz – Hopping

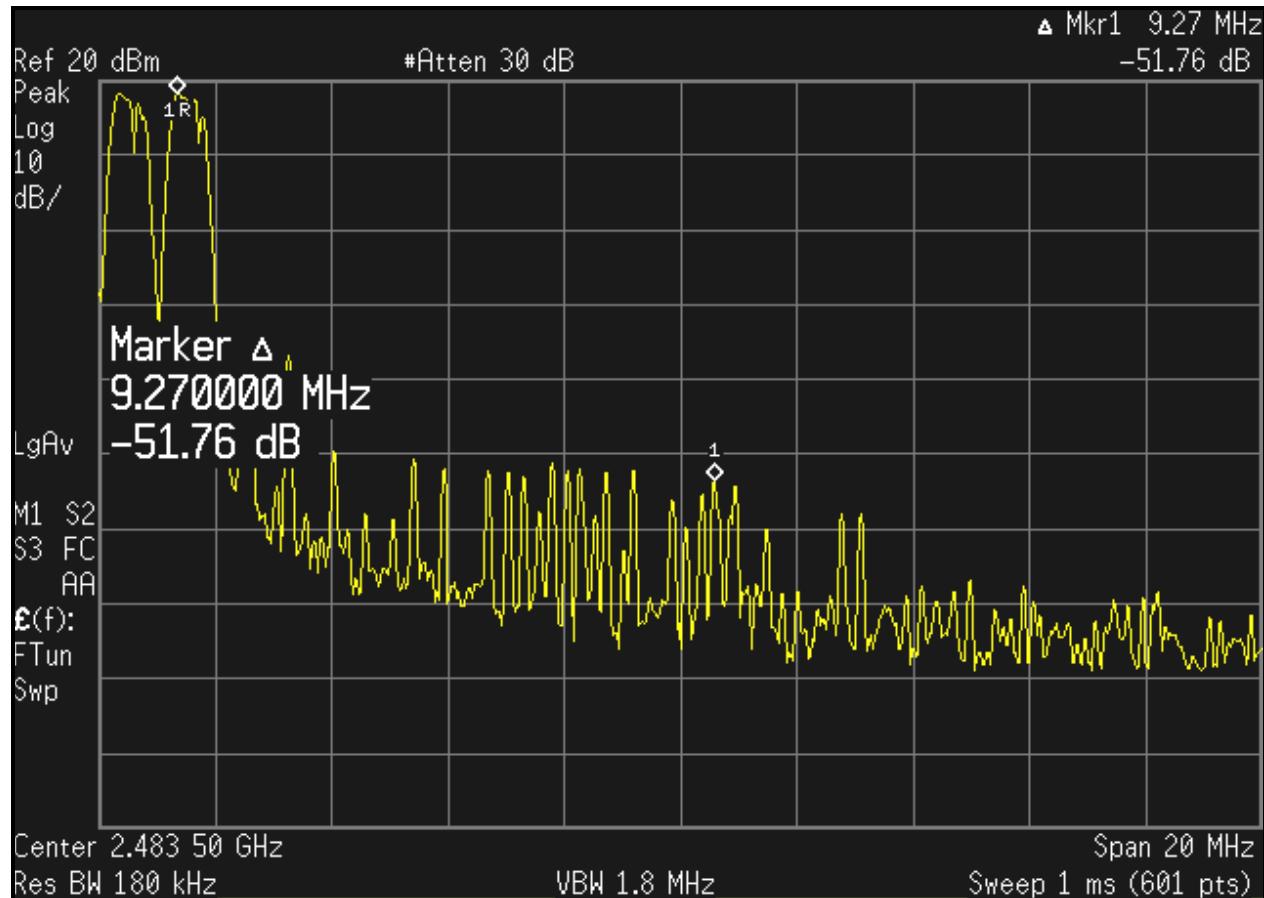


Table 5-1: Radiated Band Edge Emissions Test Data

Emission Frequency (MHz)	Peak (dBuV/m) (1 MHz RBW/ VBW)	Average (dBuV/m)	Delta (from above plots)	Average Limit (dBuV/m)	Average Margin (dB)
2401.0	116.5	96.5	51.4	54.0	-8.9
2475.0	114.1	94.1	51.8	54.0	-11.7

Rhein Tech Laboratories, Inc.
360 Herndon Parkway
Suite 1400
Herndon, VA 20170
<http://www.rheintech.com>

Client: Fleetwood Group, Inc.
Model: WRS8200
Standards: FCC 15.247/IC RSS-210
FCC/IC ID: FBRWRS8200/1859A-WRS8200
Report #: 2009237

Table 5-2: Band Edge Test Equipment

RTL Asset #	Manufacturer	Model	Part Type	Serial Number	Calibration Due Date
900913	Hewlett Packard	85462A	EMI Receiver RF Section (9 KHz – 6.5 GHz)	3325A00159	6/8/10
901523	M/A Com	2082-6174-20	20 dB Attenuator	N/A	7/29/10
901413	Agilent	E4448A	Spectrum Analyzer	US44020346	7/31/10

Test Personnel:

Dan Baltzell
EMC Test Engineer



Signature

August 11 and 17, 2009

Dates of Tests

Rhein Tech Laboratories, Inc.
360 Herndon Parkway
Suite 1400
Herndon, VA 20170
<http://www.rheintech.com>

Client: Fleetwood Group, Inc.
Model: WRS8200
Standards: FCC 15.247/IC RSS-210
FCC/IC ID: FBRWRS8200/1859A-WRS8200
Report #: 2009237

6 20 dB Bandwidth – FCC §15.247(a)(1)(ii); IC RSS-210 §A8.1

6.1 20 dB Bandwidth Test Procedure

The minimum 20 dB bandwidths per RSS-210 were measured using a 50 ohm spectrum analyzer. The carrier was adjusted on the analyzer so that it was displayed entirely on the spectrum analyzer. The sweep time was set to 1 second and allowed through several sweeps with the max hold function used in peak detector mode. The resolution bandwidth was set to 30 kHz, and the video bandwidth set at 300 kHz. The minimum 20 dB bandwidths were measured using the spectrum analyzer delta marker set 20 dB down from the peak of the carrier. The table below contains the bandwidth measurement results.

Table 6-1: 20 dB Bandwidth Test Equipment

RTL Asset #	Manufacturer	Model	Part Type	Serial Number	Calibration Due Date
900913	Hewlett Packard	85462A	EMI Receiver RF Section (9 KHz – 6.5 GHz)	3325A00159	6/8/10
901523	M/A-Com	2082-6174-20	20 dB Attenuator	N/A	7/29/10

6.2 20 dB Modulated Bandwidth Test Data

Table 6-2: 20 dB Modulated Bandwidth Test Data

Minimum 20 dB Bandwidth


Frequency (MHz)	20 dB Bandwidth (kHz)
2401	600
2437	563
2475	600

Rhein Tech Laboratories, Inc.
360 Herndon Parkway
Suite 1400
Herndon, VA 20170
<http://www.rheintech.com>

Client: Fleetwood Group, Inc.
Model: WRS8200
Standards: FCC 15.247/IC RSS-210
FCC/IC ID: FBRWRS8200/1859A-WRS8200
Report #: 2009237

6.3 20 dB Bandwidth Plots


Plot 6-1: 20 dB Bandwidth - 2401 MHz

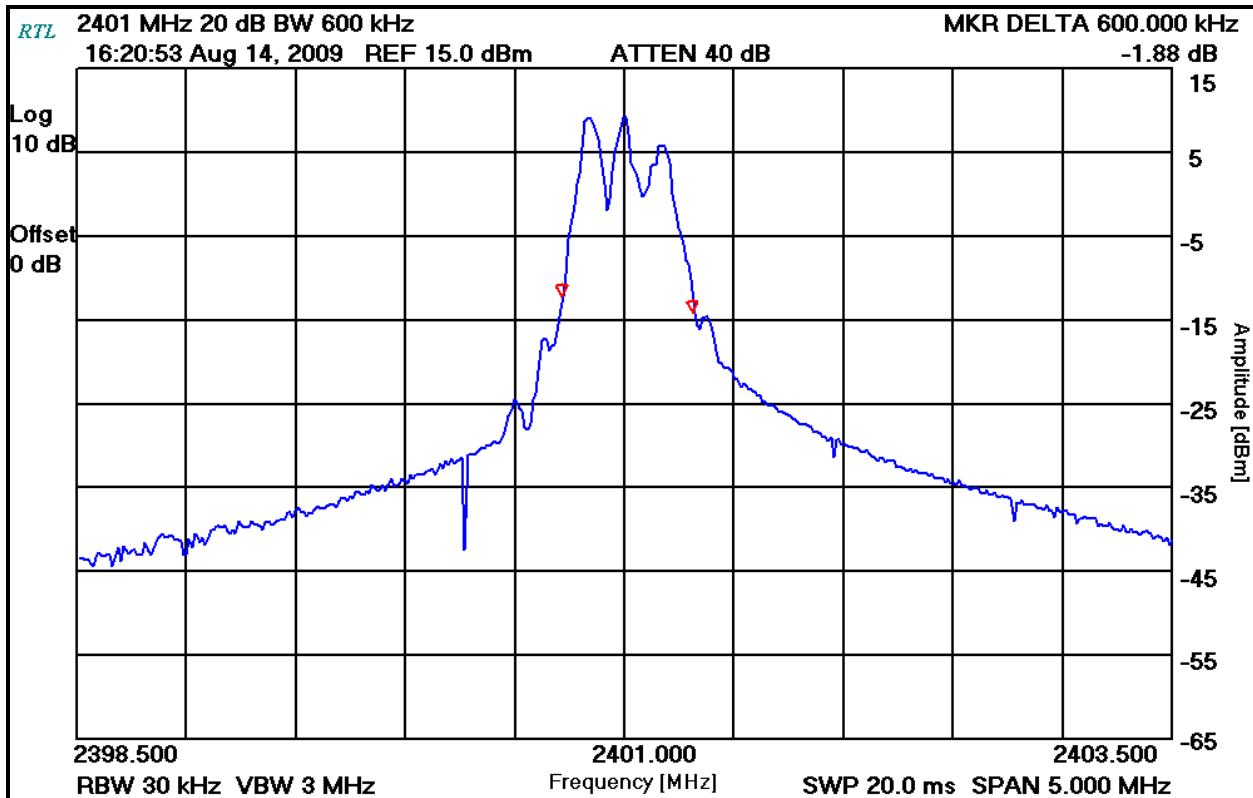

Rhein Tech Laboratories, Inc.
360 Herndon Parkway
Suite 1400
Herndon, VA 20170
<http://www.rheintech.com>

Client: Fleetwood Group, Inc.
Model: WRS8200
Standards: FCC 15.247/IC RSS-210
FCC/IC ID: FBRWRS8200/1859A-WRS8200
Report #: 2009237


Plot 6-2: 20 dB Bandwidth - 2437 MHz

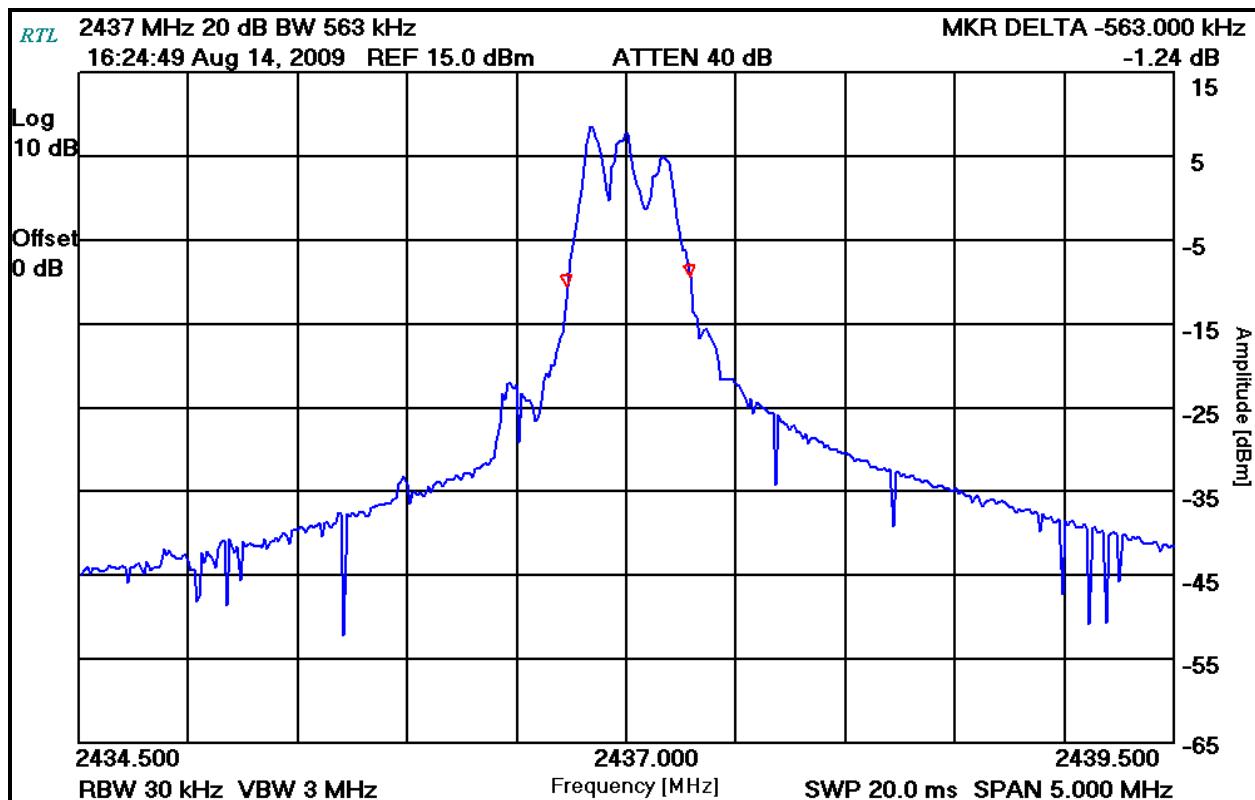

Rhein Tech Laboratories, Inc.
360 Herndon Parkway
Suite 1400
Herndon, VA 20170
<http://www.rheintech.com>

Client: Fleetwood Group, Inc.
Model: WRS8200
Standards: FCC 15.247/IC RSS-210
FCC/IC ID: FBRWRS8200/1859A-WRS8200
Report #: 2009237

Plot 6-3: 20 dB Bandwidth - 2475 MHz

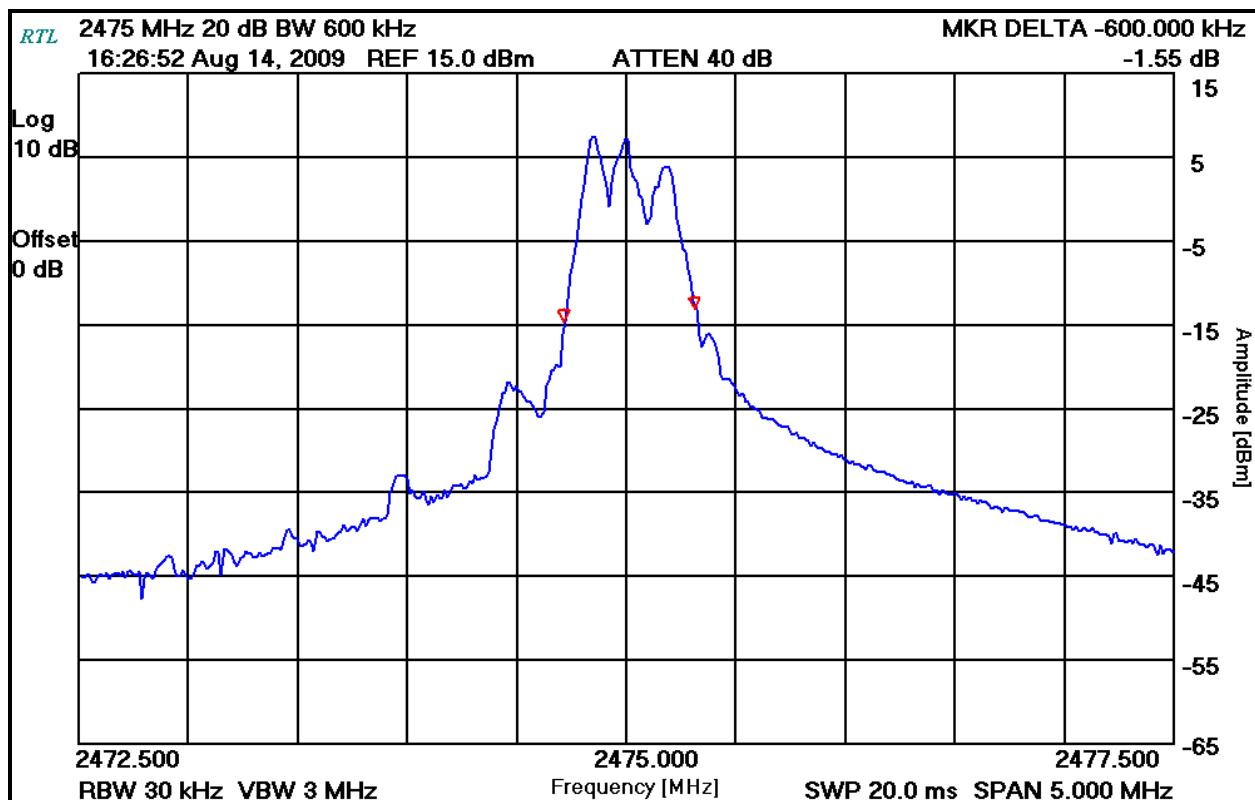

Test Personnel:

Dan Baltzell
EMC Test Engineer

Daniel W. Baltzell

Signature

August 14, 2009
Date of Tests

Rhein Tech Laboratories, Inc.
 360 Herndon Parkway
 Suite 1400
 Herndon, VA 20170
<http://www.rheintech.com>

Client: Fleetwood Group, Inc.
 Model: WRS8200
 Standards: FCC 15.247/IC RSS-210
 FCC/IC ID: FBRWRS8200/1859A-WRS8200
 Report #: 2009237

7 Carrier Frequency Separation - §15.247(a)(1); IC RSS-210 §A8.1(d)

7.1 Carrier Frequency Separation Test Procedure

Frequency Hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.


Measured frequency separation = 1.0 MHz

Table 7-1: Carrier Frequency Separation Test Equipment

RTL Asset #	Manufacturer	Model	Part Type	Serial Number	Calibration Due Date
900913	Hewlett Packard	85462A	EMI Receiver RF Section (9 KHz – 6.5 GHz)	3325A00159	6/8/10
901523	M/A Com	2082-6174-20	20 dB Attenuator	N/A	7/29/10

7.2 Carrier Frequency Separation Test Data

Plot 7-1: Carrier Frequency Separation

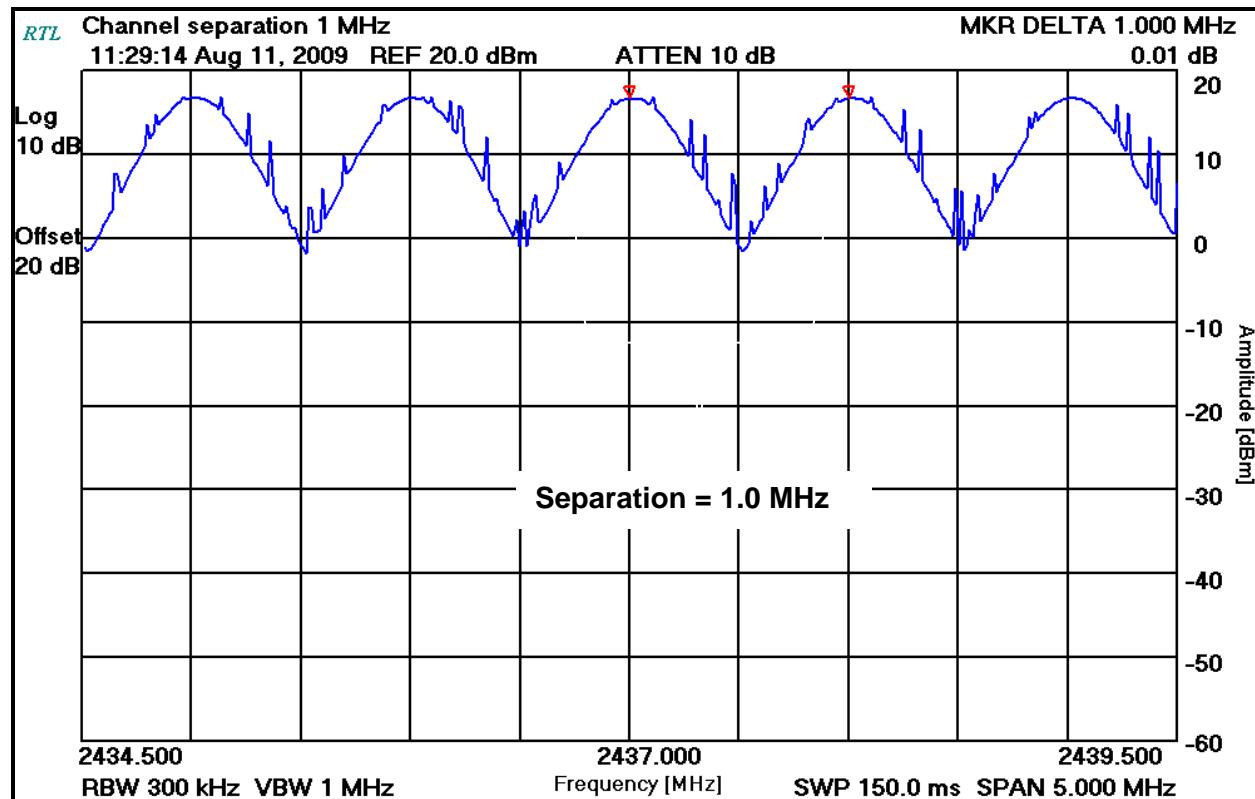

Test Personnel:

Dan Baltzell
 EMC Test Engineer

Daniel W. Baltzell

Signature

August 11, 2009

Date of Tests

Rhein Tech Laboratories, Inc.
 360 Herndon Parkway
 Suite 1400
 Herndon, VA 20170
<http://www.rheintech.com>

Client: Fleetwood Group, Inc.
 Model: WRS8200
 Standards: FCC 15.247/IC RSS-210
 FCC/IC ID: FBRWRS8200/1859A-WRS8200
 Report #: 2009237

8 Hopping Characteristics – FCC §15.247(a)(1)(iii); IC RSS-210 §A8.1(d)

8.1 Hopping Characteristics Test Procedure

Frequency hopping systems in the 2400–2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.


Table 8-1: Hopping Characteristics Test Equipment

RTL Asset #	Manufacturer	Model	Part Type	Serial Number	Calibration Due Date
900913	Hewlett Packard	85462A	EMI Receiver RF Section (9 KHz – 6.5 GHz)	3325A00159	6/8/10
901523	M/A Com	2082-6174-20	20 dB Attenuator	N/A	7/29/10


8.2 Number of Hopping Frequencies

Measured number of hopping frequencies = 75

Plot 8-1: Number of Hopping Frequencies (2401 - 2475 MHz)

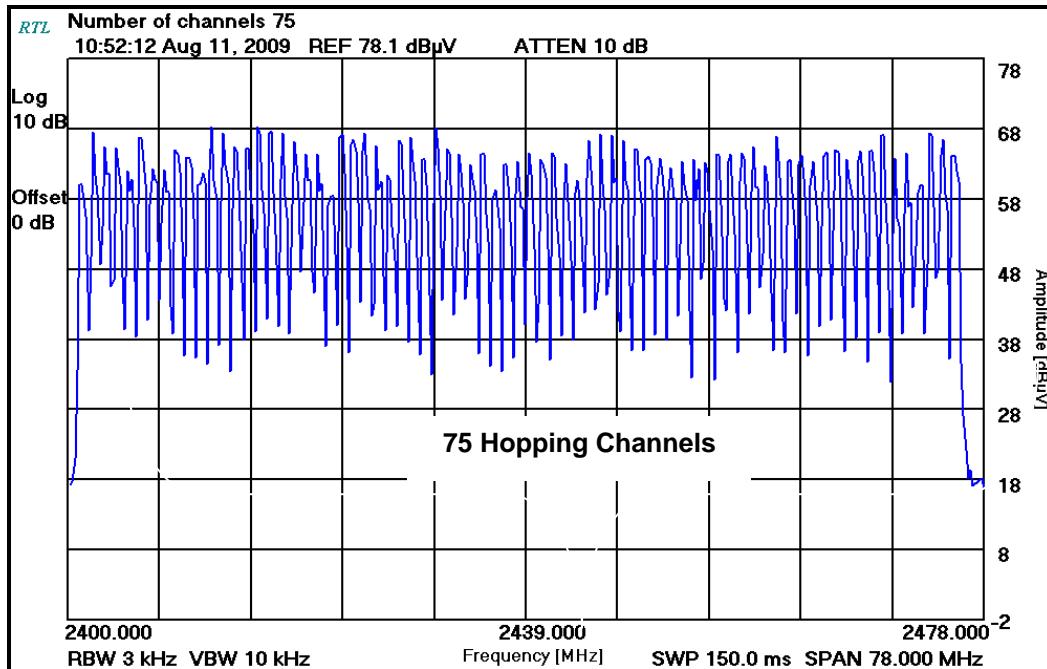

Test Personnel:

Dan Baltzell		August 11, 2009
EMC Test Engineer	Signature	Date of Tests


8.3 Average Time of Occupancy

A plot was taken from a scope of the pulse and measured to be 1.107 ms. The sweep was then set to single sweep for 30 seconds on a spectrum analyzer at zero span.

The number of pulses in a period of 0.4 seconds X 75 hopping channels (30 s) is 1 pulse.

The average time of occupancy in the above period (30 s) is equal to 1 pulse X 1.107 ms = 1.107 ms, which meets the limit as defined by 15.247(a)(1)(iii) of 0.4 seconds.

Plot 8-2: Time of Occupancy (Dwell Time)

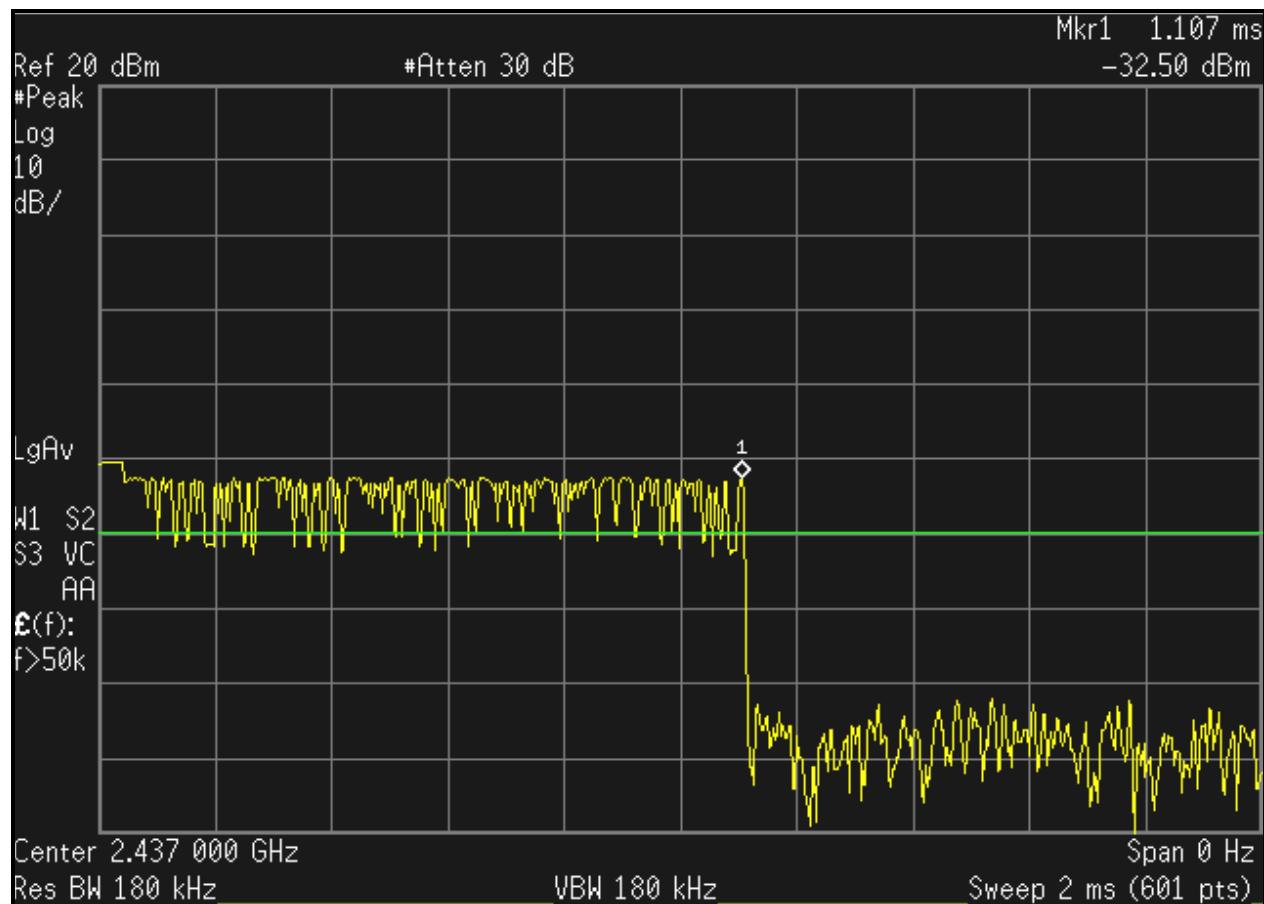

Rhein Tech Laboratories, Inc.
 360 Herndon Parkway
 Suite 1400
 Herndon, VA 20170
<http://www.rheintech.com>

Client: Fleetwood Group, Inc.
 Model: WRS8200
 Standards: FCC 15.247/IC RSS-210
 FCC/IC ID: FBRWRS8200/1859A-WRS8200
 Report #: 2009237

Plot 8-3: Time of Occupancy (Dwell Time 30 Second Sweep)

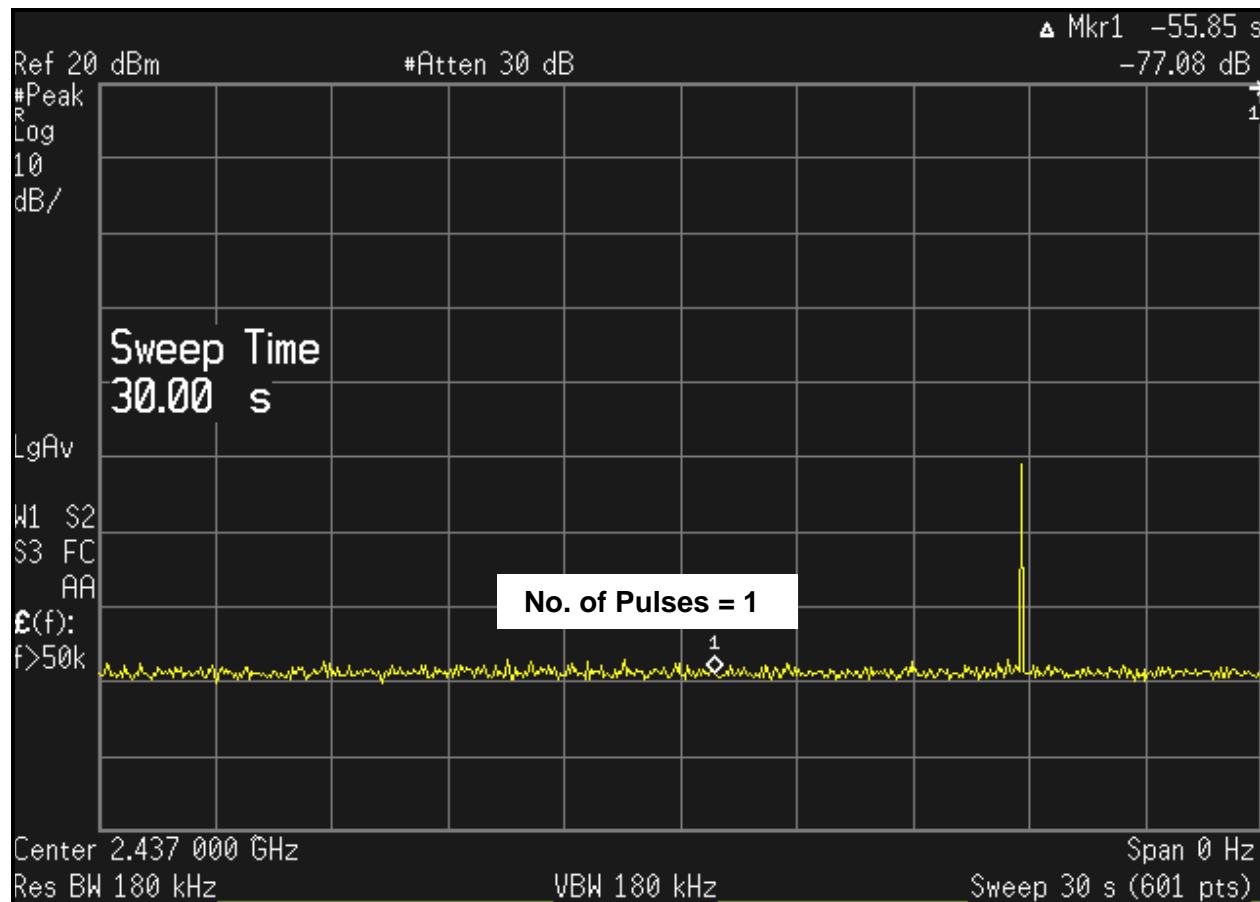


Table 8-2: Average Time of Occupancy Test Equipment

RTL Asset #	Manufacturer	Model	Part Type	Serial Number	Calibration Due Date
901413	Agilent	E4448A	Spectrum Analyzer	US44020346	7/31/10

Test Personnel:

Dan Baltzell		August 17, 2009
EMC Test Engineer	Signature	Date of Tests

9 AC Conducted Emissions - FCC Rules and Regulations Part 15 §15.207; IC RSS-Gen

9.1 Site and Test Description

The power line conducted emissions measurements were performed in a Series 81 type shielded enclosure manufactured by Rayproof. The EUT was assembled on a wooden table 80 centimeters high. Power was fed to the EUT through a 50-ohm/50 microhenry Line Impedance Stabilization Network (LISN). The EUT LISN was fed power through an A.C. filter box on the outside of the shielded enclosure. The filter box and EUT LISN housing are bonded to the ground plane of the shielded enclosure. A second LISN, the peripheral LISN, provides isolation for the EUT test peripherals. This peripheral LISN was also fed A.C. power. A metal power outlet box, which is bonded to the ground plane and electrically connected to the peripheral LISN, powers the EUT host peripherals.

The spectrum analyzer was connected to the AC line through an isolation transformer. The 50-ohm output of the EUT LISN was connected to the spectrum analyzer input through a Solar 100 kHz high-pass filter. The filter is used to prevent overload of the spectrum analyzer from noise below 100 kHz. Conducted emission levels were measured on each current-carrying line with the spectrum analyzer operating in the CISPR quasi-peak mode (or peak mode if applicable).

The analyzer's 6 dB bandwidth was set to 9 kHz. Video filter less than 10 times the resolution bandwidth is not used. Average measurements are performed in linear mode using a 10 kHz resolution bandwidth, a 1 Hz video bandwidth, and by increasing the sweep time in order to obtain a calibrated measurement. The emission spectrum was scanned from 150 kHz to 30 MHz. The highest emission amplitudes relative to the appropriate limits were measured and have been recorded.

9.2 Test Limits

Line-Conducted Emissions		
Limit (dB μ V)		
Frequency (MHz)	Quasi-Peak	Average
0.15 to 0.50	66 to 56	56 to 46
0.50 to 5.00	56	46
5.00 to 30.00	60	50

Rhein Tech Laboratories, Inc.
 360 Herndon Parkway
 Suite 1400
 Herndon, VA 20170
<http://www.rheintech.com>

Client: Fleetwood Group, Inc.
 Model: WRS8200
 Standards: FCC 15.247/IC RSS-210
 FCC/IC ID: FBRWRS8200/1859A-WRS8200
 Report #: 2009237

9.3 Conducted Emissions Test Data

Table 9-1: Conducted Emissions Test Data - Neutral Side

Temperature: 74°F Humidity: 33%									
Emission Frequency (MHz)	Test Detector	Analyzer Reading (dBuV)	Site Correction Factor (dB)	Emission Level (dBuV)	QP Limit (dBuV)	QP Margin (dBuV)	AV Limit (dBuV)	AV Margin (dBuV)	Pass/Fail
0.211	Pk	46.3	0.2	46.5	63.2	-16.7	53.2	-6.7	Pass
0.281	Pk	38.7	0.2	38.9	60.8	-21.9	50.8	-11.9	Pass
0.357	Pk	36.7	0.2	36.9	58.8	-21.9	48.8	-11.9	Pass
0.426	Pk	37.0	0.3	37.3	57.3	-20.0	47.3	-10.0	Pass
0.568	Pk	36.7	0.2	36.9	56.0	-19.1	46.0	-9.1	Pass
1.644	Pk	34.7	0.6	35.3	56.0	-20.7	46.0	-10.7	Pass
11.380	Pk	46.3	1.8	48.1	60.0	-11.9	50.0	-1.9	Pass

Table 9-2: Conducted Emissions Test Data – Hot Side

Temperature: 74°F Humidity: 33%									
Emission Frequency (MHz)	Test Detector	Analyzer Reading (dBuV)	Site Correction Factor (dB)	Emission Level (dBuV)	QP Limit (dBuV)	QP Margin (dBuV)	AV Limit (dBuV)	AV Margin (dBuV)	Pass/Fail
0.155	Pk	49.2	0.2	49.4	65.7	-16.3	55.7	-6.3	Pass
0.212	Pk	47.3	0.2	47.5	63.1	-15.6	53.1	-5.6	Pass
0.282	Pk	43.0	0.2	43.2	60.8	-17.6	50.8	-7.6	Pass
0.354	Pk	37.4	0.2	37.6	58.9	-21.3	48.9	-11.3	Pass
0.427	Pk	38.5	0.3	38.8	57.3	-18.5	47.3	-8.5	Pass
0.568	Pk	34.3	0.2	34.5	56.0	-21.5	46.0	-11.5	Pass
11.310	Pk	45.8	1.8	47.6	60.0	-12.4	50.0	-2.4	Pass

Table 9-3: Conducted Emissions Test Equipment

RTL Asset #	Manufacturer	Model	Part Type	Serial Number	Calibration Due Date
900913	Hewlett Packard	85462A	EMI Receiver RF Section (9 kHz–6.5 GHz)	3325A00159	6/8/10
901082	AFJ International	LS16	16A LISN	16010020082	2/23/10

Test Personnel:

Daniel W. Baltzell		August 11, 2009
Test Engineer	Signature	Date of Test

10 Radiated Emissions Test Results - FCC Rules and Regulations Part §15.247(d); IC **RSS-210 §2.6**

10.1 Limits of Radiated Emissions Measurement

Frequency (MHz)	Field Strength (uV/m)	Measurement Distance (m)
0.009-0.490	2400/f (kHz)	300
0.490-1.705	2400/f (kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

As shown in 15.35(b), for frequencies above 1000 MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20 dB under any circumstances of modulation.

10.2 Radiated Emissions Measurement Test Procedure

Before final measurements of radiated emissions were made on the open-field three/ten meter range, the EUT was scanned indoors at one and three meter distances. This was done in order to determine its emissions spectrum signature. The physical arrangement of the test system and associated cabling was varied in order to determine the effect on the EUT's emissions in amplitude, direction and frequency. This process was repeated during final radiated emissions measurements on the open-field range, at each frequency, in order to ensure that maximum emission amplitudes were attained.

Final radiated emissions measurements were made on the three/ten-meter, open-field test site. The EUT was placed on a nonconductive turntable 0.8 meters above the ground plane. The spectrum was examined from 9 kHz to the 10th harmonic of the highest fundamental transmitter frequency (24.8 GHz).

At each frequency, the EUT was rotated 360°, and the antenna was raised and lowered from 1 to 4 meters in order to determine the emission's maximum level. Measurements were taken using both horizontal and vertical antenna polarizations. For frequencies between 30 and 1000 MHz, the spectrum analyzer's 6 dB bandwidth was set to 120 kHz, and the analyzer was operated in the CISPR quasi-peak detection mode. For emissions above 1000 MHz, emissions are measured using the average detector function with a minimum resolution bandwidth of 1 MHz. No video filter less than 10 times the resolution bandwidth was used. The highest emission amplitudes relative to the appropriate limit were measured and recorded in this report.

Rhein Tech Laboratories, Inc.
 360 Herndon Parkway
 Suite 1400
 Herndon, VA 20170
<http://www.rheintech.com>

Client: Fleetwood Group, Inc.
 Model: WRS8200
 Standards: FCC 15.247/IC RSS-210
 FCC/IC ID: FBRWRS8200/1859A-WRS8200
 Report #: 2009237

Table 10-1: Radiated Emissions Test Equipment

RTL Asset #	Manufacturer	Model	Part Type	Serial Number	Calibration Due Date
900151	Rohde and Schwarz	HFH2-Z2	Loop Antenna (9 kHz - 30 MHz)	827525/019	09/15/09
901365	MITEQ	JS4-00102600-41-5P	Amplifier, 0.1-26 GHz, 30dB gain	N/A	3/4/10
900878	Rhein Tech Laboratories, Inc.	AM3-1197-0005	3 meter antenna mast, polarizing	Outdoor Range 1	Not Required
901516	Insulated Wire, Inc.	KPS-1503-2400-KPS	RF cable, 20'	NA	10/17/09
901517	Insulated Wire Inc.	KPS-1503-360-KPS	RF cable 36"	NA	10/17/09
901242	Rhein Tech Laboratories, Inc.	WRT-000-0003	Wood rotating table	N/A	Not Required
901215	Hewlett Packard	8596EM	Spectrum Analyzer (9 kHz - 12.8 GHz)	3826A00144	10/23/09
900931	Hewlett Packard	8566B	Spectrum Analyzer (100 Hz - 22 GHz)	3138A07771	10/23/09
900791	Chase	CBL6111B	Bilog Antenna (30 MHz – 2000 MHz)	N/A	12/12/10
900321	EMCO	3161-03	Horn Antennas (4 – 8 GHz)	9508-1020	6/14/10
900323	EMCO	3160-07	Horn Antennas (8.2 – 12 GHz)	9605-1054	6/14/10
900356	EMCO	3160-08	Horn Antennas (12.4 – 18 GHz)	9607-1044	6/14/10
901218	EMCO	3160-09	Horn Antenna (18 - 26 GHz)	960281-003	6/19/10
900772	EMCO	3161-02	Horn Antenna (2 - 4 GHz)	9804-1044	6/14/10

Rhein Tech Laboratories, Inc.
 360 Herndon Parkway
 Suite 1400
 Herndon, VA 20170
<http://www.rheintech.com>

Client: Fleetwood Group, Inc.
 Model: WRS8200
 Standards: FCC 15.247/IC RSS-210
 FCC/IC ID: FBRWRS8200/1859A-WRS8200
 Report #: 2009237

10.2.1 Radiated Emissions Harmonics/Spurious Test Data

Table 10-2: Radiated Emissions Harmonics/Spurious - 2401 MHz

Fundamental amplitude = 96.5 dBuV/m average

Emission Frequency (MHz)	Peak Analyzer Reading (dBuV) (1 MHz RBW/ VBW)	Average Analyzer Reading (dBuV) (Peak -20 dB duty cycle)	Site Correction Factor (dB/m)	Average Emission Level (dBuV/m)	Average Limit (dBuV/m)	Average Margin (dB)
4802.0	44.7	24.7	4.9	29.6	54.0	-24.4
7203.0	60.9	40.9	5.7	46.6	76.5	-29.9
9604.0	57.9	37.9	13.5	51.4	76.5	-25.1
12005.0	42.0	22.0	15.2	37.2	54.0	-16.8
14406.0	36.9	16.9	19.5	36.4	76.5	-40.1
16807.0	33.6	13.6	22.2	35.8	76.5	-40.7
19208.0	28.9	8.9	29.1	38.0	54.0	-16.0

Table 10-3: Radiated Emissions Harmonics/Spurious - 2437 MHz

Fundamental amplitude = 95.5 dBuV/m average

Emission Frequency (MHz)	Peak Analyzer Reading (dBuV) (1 MHz RBW/ VBW)	Average Analyzer Reading (dBuV) (Peak -20 dB duty cycle)	Site Correction Factor (dB/m)	Average Emission Level (dBuV/m)	Average Limit (dBuV/m)	Average Margin (dB)
4874.0	43.8	23.8	4.6	28.4	54.0	-25.6
7311.0	57.2	37.2	5.9	43.1	54.0	-10.9
9748.0	53.0	33.0	15.1	48.1	75.5	-27.4
12185.0	42.7	22.7	14.7	37.4	54.0	-16.6
14622.0	34.9	14.9	20.1	35.0	75.5	-40.5
17059.0	29.6	9.6	22.4	32.0	75.5	-43.5
19496.0	24.7	4.7	30.6	35.3	54.0	-18.7

Rhein Tech Laboratories, Inc.
 360 Herndon Parkway
 Suite 1400
 Herndon, VA 20170
<http://www.rheintech.com>

Client: Fleetwood Group, Inc.
 Model: WRS8200
 Standards: FCC 15.247/IC RSS-210
 FCC/IC ID: FBRWRS8200/1859A-WRS8200
 Report #: 2009237

Table 10-4: Radiated Emissions Harmonics/Spurious - 2475 MHz

Fundamental amplitude = 94.1 dBuV/m average

Emission Frequency (MHz)	Peak Analyzer Reading (dBuV) (1 MHz RBW/ VBW)	Average Analyzer Reading (dBuV) (Peak -20 dB duty cycle)	Site Correction Factor (dB/m)	Average Emission Level (dBuV/m)	Average Limit (dBuV/m)	Average Margin (dB)
4950.0	43.4	23.4	3.9	27.3	54.0	-26.7
7425.0	55.9	35.9	7.2	43.1	54.0	-10.9
9900.0	56.5	36.5	13.9	50.4	74.1	-23.7
12375.0	42.2	22.2	14.6	36.8	54.0	-17.2
14850.0	35.0	15.0	19.3	34.3	74.1	-39.8
17325.0	26.3	6.3	22.9	29.2	74.1	-44.9
19800.0	16.3	-3.7	31.5	27.8	54.0	-26.2

Table 10-5: Radiated Emissions Harmonics/Spurious Hopping Mode

Fundamental amplitude = 94.1 dBuV/m average

Emission Frequency (MHz)	Peak Analyzer Reading (dBuV) (1 MHz RBW/ VBW)	Average Analyzer Reading (dBuV) (Peak -20 dB duty cycle)	Site Correction Factor (dB/m)	Average Emission Level (dBuV/m)	Average Limit (dBuV/m)	Average Margin (dB)
4808.1	50.3	30.3	4.9	35.2	54.0	-18.8
4822.0	52.2	32.2	5.0	37.2	54.0	-16.8
4836.0	52.7	32.7	5.0	37.7	54.0	-16.3
4838.0	52.7	32.7	5.1	37.8	54.0	-16.2
4908.0	50.8	30.8	3.9	34.7	54.0	-19.3
7203.0	61.3	41.3	5.7	47.0	54.0	-7.0
7269.2	58.3	38.3	5.7	44.0	54.0	-10.0
7362.4	57.0	37.0	6.9	43.9	54.0	-10.1
9609.0	58.3	38.3	13.5	51.8	74.1	-22.3
9619.1	58.2	38.2	13.6	51.8	74.1	-22.3
9626.8	57.8	37.8	13.6	51.4	74.1	-22.7
9707.0	56.5	36.5	14.8	51.3	74.1	-22.8
9839.3	57.7	37.7	14.6	52.3	74.1	-21.8
9847.3	57.5	37.5	14.5	52.0	74.1	-22.1
9859.2	58.1	38.1	14.4	52.5	74.1	-21.6
12014.6	32.4	12.4	15.1	27.5	54.0	-26.5
12034.6	32.0	12.0	14.9	26.9	54.0	-27.1
12200.0	30.4	10.4	14.8	25.2	54.0	-28.8
14472.2	36.3	16.3	19.2	35.5	54.0	-18.5
14477.9	35.4	15.4	19.2	34.6	54.0	-19.4

Rhein Tech Laboratories, Inc.
360 Herndon Parkway
Suite 1400
Herndon, VA 20170
<http://www.rheintech.com>

Client: Fleetwood Group, Inc.
Model: WRS8200
Standards: FCC 15.247/IC RSS-210
FCC/IC ID: FBRWRS8200/1859A-WRS8200
Report #: 2009237

Test Personnel:

Daniel W. Baltzell
Test Engineer



Signature

August 12, 2009
Date Of Test

11 Conclusion

The data in this measurement report shows that the EUT as tested, Fleetwood Group, Inc., Model: WRS8200, FCC ID: FBRWRS8200, IC: 1859A-WRS8200, complies with all the applicable requirements of Parts 2 and 15 of the FCC Rules and Regulations, and Industry Canada RSS-210 and RSS-Gen.