



**FCC CFR47 PART 15 SUBPART C
CERTIFICATION
TEST REPORT**

FOR

HIGH POWER CARDBUS ADAPTER

MODEL NUMBER: WLI-CB-G54HP

FCC ID: FDI-09101841-0

REPORT NUMBER: 05I3515-1

ISSUE DATE: JUNE 28, 2005

Prepared for

BUFFALO INC.

**15, SHIBATA HONDORI 4-CHOME
MINAMI-KU, NAGOYA 457-8520
JAPAN**

Prepared by

COMPLIANCE ENGINEERING SERVICES, INC.

d.b.a.

COMPLIANCE CERTIFICATION SERVICES

**561F MONTEREY ROAD,
MORGAN HILL, CA 95037, USA**

TEL: (408) 463-0885

FAX: (408) 463-0888

NVLAP[®]

LAB CODE:200065-0

Revision History

<u>Rev.</u>	<u>Issue Date</u>	<u>Revisions</u>	<u>Revised By</u>
A	6/28/2005	Initial Issue	Thu
B	6/30/2005	Corrected 6dB BW Values from MHz to KHz	Thu

TABLE OF CONTENTS

1. ATTESTATION OF TEST RESULTS.....	5
2. TEST METHODOLOGY	6
3. FACILITIES AND ACCREDITATION	6
4. CALIBRATION AND UNCERTAINTY.....	6
4.1. MEASURING INSTRUMENT CALIBRATION.....	6
4.2. MEASUREMENT UNCERTAINTY.....	6
5. EQUIPMENT UNDER TEST.....	7
5.1. DESCRIPTION OF EUT.....	7
5.2. MAXIMUM OUTPUT POWER.....	7
5.3. DESCRIPTION OF AVAILABLE ANTENNAS.....	7
5.4. SOFTWARE AND FIRMWARE.....	8
5.5. WORST-CASE CONFIGURATION AND MODE.....	8
5.6. DESCRIPTION OF TEST SETUP.....	9
6. TEST AND MEASUREMENT EQUIPMENT	11
7. LIMITS AND RESULTS	12
7.1. CHANNEL TESTS FOR THE 2400 TO 2483.5 MHz BAND.....	12
7.1.1. 6 dB BANDWIDTH.....	12
7.1.2. 99% BANDWIDTH.....	19
7.1.3. PEAK OUTPUT POWER.....	26
7.1.4. MAXIMUM PERMISSIBLE EXPOSURE.....	34
7.1.5. AVERAGE POWER.....	37
7.1.6. PEAK POWER SPECTRAL DENSITY.....	38
7.1.7. CONDUCTED SPURIOUS EMISSIONS.....	45
7.2. RADIATED EMISSIONS.....	58
7.2.1. TRANSMITTER RADIATED SPURIOUS EMISSIONS.....	58
7.2.2. TRANSMITTER ABOVE 1 GHz WITH INTERNAL ANTENNA.....	61
7.2.2.1 WLE-HG-NDR ANTENNA.....	79
7.2.2.2 WLE-DA ANTENNA.....	97
7.2.2.3 WLE-MYG ANTENNA.....	115
7.2.2.4 WLE-NDR ANTENNA.....	133
7.2.5. WORST-CASE RADIATED EMISSIONS BELOW 1 GHz.....	151
7.2.5.1 INTERNAL ANTENNA.....	151
7.2.5.2 WLE-HG-NDR ANTENNA.....	153
7.2.5.3 WLE-DA ANTENNA.....	155
7.2.5.4 WLE-MYG ANTENNA.....	157
7.2.5.5 WLE-NDR ANTENNA.....	159

7.3. *POWERLINE CONDUCTED EMISSIONS* 161

8. SETUP PHOTOS **167**

1. ATTESTATION OF TEST RESULTS

COMPANY NAME: BUFFALO INC.
15, SHIBATA HONDORI 4-CHOME
MINAMI-KU, NAGOYA 457-8520, JAPAN

EUT DESCRIPTION: HIGH POWER CARDBUS ADAPTER

MODEL: WLI-CB-G54HP

SERIAL NUMBER: 000D0B974068

DATE TESTED: JUNE 20-25, 2005

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
FCC PART 15 SUBPART C	NO NON-COMPLIANCE NOTED

Compliance Certification Services, Inc. tested the above equipment in accordance with the requirements set forth in the above standards. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Note: The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by Compliance Certification Services and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by Compliance Certification Services will constitute fraud and shall nullify the document. No part of this report may be used to claim product certification, approval, or endorsement by NVLAP, NIST, or any government agency.

Approved & Released For CCS By:

Tested By:



THU CHAN
EMC SUPERVISOR
COMPLIANCE CERTIFICATION SERVICES

CHIN PANG
EMC ENGINEER
COMPLIANCE CERTIFICATION SERVICES

2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with ANSI C63.4-2003, FCC CFR 47 Part 2 and FCC CFR 47 Part 15.

3. FACILITIES AND ACCREDITATION

The test sites and measurement facilities used to collect data are located at 561F Monterey Road, Morgan Hill, California, USA. The sites are constructed in conformance with the requirements of ANSI C63.4, ANSI C63.7 and CISPR Publication 22. All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

CCS is accredited by NVLAP, Laboratory Code 200065-0. The full scope of accreditation can be viewed at <http://www.ccsemc.com>.

4. CALIBRATION AND UNCERTAINTY

4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognized national standards.

4.2. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

PARAMETER	UNCERTAINTY
Radiated Emission, 30 to 200 MHz	+/- 3.3 dB
Radiated Emission, 200 to 1000 MHz	+4.5 / -2.9 dB
Radiated Emission, 1000 to 2000 MHz	+4.5 / -2.9 dB
Power Line Conducted Emission	+/- 2.9 dB

Uncertainty figures are valid to a confidence level of 95%.

5. EQUIPMENT UNDER TEST

5.1. DESCRIPTION OF EUT

The EUT is an 802.11b/g high power cardbus adapter.

The radio module is manufactured by Broadcom Corporation.

5.2. MAXIMUM OUTPUT POWER

The transmitter has a maximum peak conducted output power as follows:

2400 to 2483.5 MHz Authorized Band

Frequency Range (MHz)	Mode	Output Power (dBm)	Output Power (mW)
2412 - 2462	802.11b	19.66	92.47
2412 - 2462	802.11g	21.88	154.17

5.3. DESCRIPTION OF AVAILABLE ANTENNAS

The radio utilizes four external antennas for diversity, each with a maximum gains and types were described as followed:

Antenna Manufacturer	Antenna Type	Antenna Gain	Transmitting Type
SmartAnt Telecom Co., Ltd (WLE-HG-NDR)	Sleeve (External)	4.1dBi	Point to Multipoint
DX Antenna Co., Ltd (WLE-DA)	Patch (External)	4dBi	Point to Point
Buffalo Inc. (WLE-MYG)	Yagi External)	3.9dBi	Point to Point
Buffalo Inc (WLE-NDR)	Dipole (External)	0dBi	Point to Multipoint
Buffalo Inc	Internal	0dBi	Point to Multipoint

5.4. SOFTWARE AND FIRMWARE

The EUT driver software installed in the IBM laptop during testing was 4311MCG Batch File.
The test utility software used during testing was wl_tool and epi_tcp

5.5. WORST-CASE CONFIGURATION AND MODE

The worst-case channel is determined as the channel with the highest output power. The highest measured output power was at 2412 MHz.

The worst-case data rate for this channel is determined to be 1Mb/s, for b mode and 6Mb/s for g mode.

Thus all emissions tests were made in the 802.11b mode, at, 1Mb/s.and 802.11g mode at 6Mb/s

5.6. DESCRIPTION OF TEST SETUP

SUPPORT EQUIPMENT

PERIPHERAL SUPPORT EQUIPMENT LIST				
Description	Manufacturer	Model	Serial Number	FCC ID
Laptop	IBM	Thinkpad R50e	1/0/1900	DoC
AC Adapter	IBM	08K8202	11S08K8202Z1ZAC75241ZG	DoC


I/O CABLES

I/O CABLE LIST						
Cable No.	Port	# of Identical Ports	Connector Type	Cable Type	Cable Length	Remarks
1	AC	1	US 115V	Un-shielded	2m	N/A
2	DC	1	DC	Un-shielded	1m	N/A
3	Antenna Port	1	antenna	Un-shielded	0.5m	Connected external antenna to EUT

TEST SETUP

The EUT is installed in a host laptop computer via a cardbus-to-MiniPCI adapter / extension board during the tests. Test software exercised the radio card.

SETUP DIAGRAM FOR TESTS

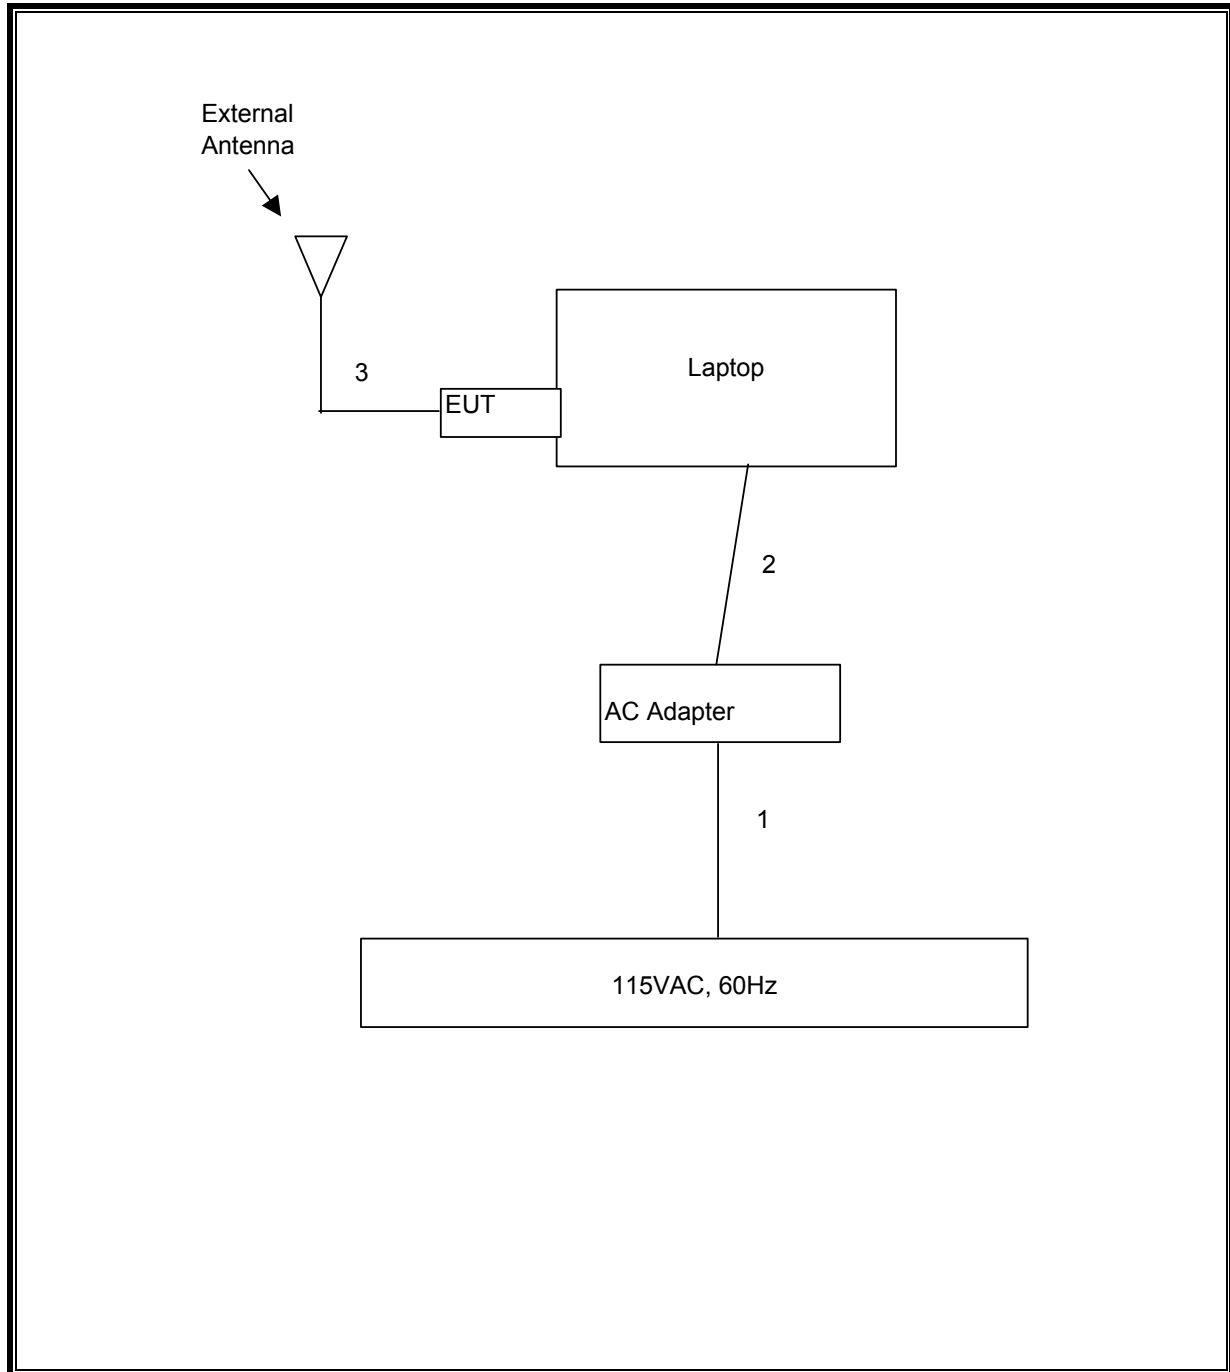

6. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

TEST EQUIPMENT LIST				
Description	Manufacturer	Model	Serial Number	Cal Due
Spectrum Analyzer 3 Hz ~ 44 GHz	Agilent	E4446A	MY43360112	3/28/2006
Antenna, Horn 1 ~ 18 GHz	EMCO	3115	2238	9/12/2005
Preamplifier, 1 ~ 26 GHz	Miteq	NSP2600-44	646456	8/17/2005
Antenna, Bilog 30MHz ~ 2Ghz	Sunol Sciences	JB1	A121003	3/3/2006
EMI Receiver, 9 kHz ~ 2.9 GHz	HP	8542E	3942A00286	3/29/2006
RF Filter Section	HP	85420E	3705A00256	3/29/2006
EMI Test Receiver	R & S	ESHS 20	827129/006	6/3/2006
Site A Line Stabilizer/Conditioner	Tripplite	LC-1800a	A005181	CNR
LISN, 10 kHz ~ 30 MHz	Solar	8012-50-R-24-BNC	837990	10/21/2005
4.0GHz High Pass Filter	MicroTronic	HPM13351	1	CNR
10dB Attenuator	Weinschel	56-10	NA	9/6/2005

7. LIMITS AND RESULTS

7.1. CHANNEL TESTS FOR THE 2400 TO 2483.5 MHz BAND

7.1.1. 6 dB BANDWIDTH

LIMIT

§15.247 (a) (2) For direct sequence systems, the minimum 6 dB bandwidth shall be at least 500 kHz.

TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer. The RBW is set to 100 kHz and the VBW is set to 300 kHz. The sweep time is coupled.

RESULTS

No non-compliance noted:


802.11b Mode


Channel	Frequency (MHz)	6 dB Bandwidth (kHz)	Minimum Limit (kHz)	Margin (kHz)
Low	2412	10170	500	9670
Middle	2437	10170	500	9670
High	2462	10170	500	9670


802.11g Mode

Channel	Frequency (MHz)	6 dB Bandwidth (kHz)	Minimum Limit (kHz)	Margin (kHz)
Low	2412	16470	500	15970
Middle	2437	16530	500	16030
High	2462	16530	500	16030


6 DB BANDWIDTH (802.11b MODE)

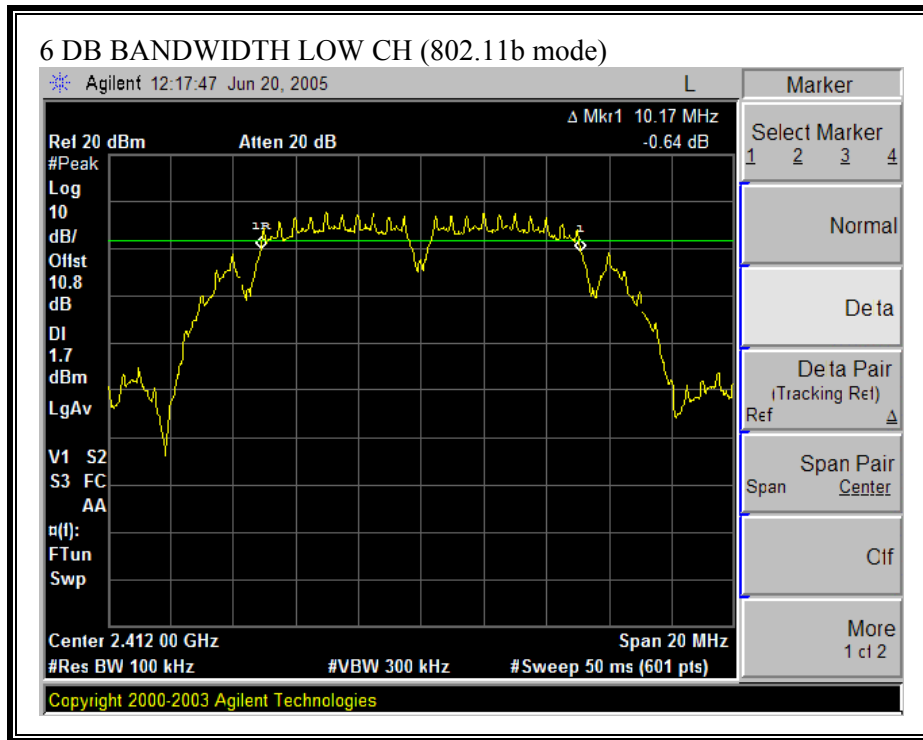


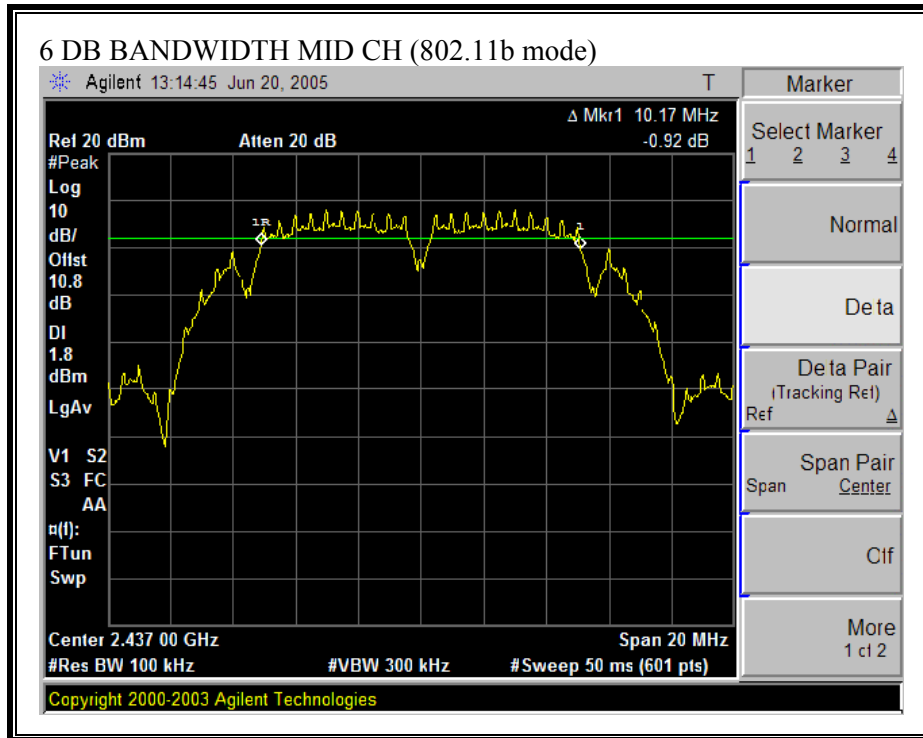


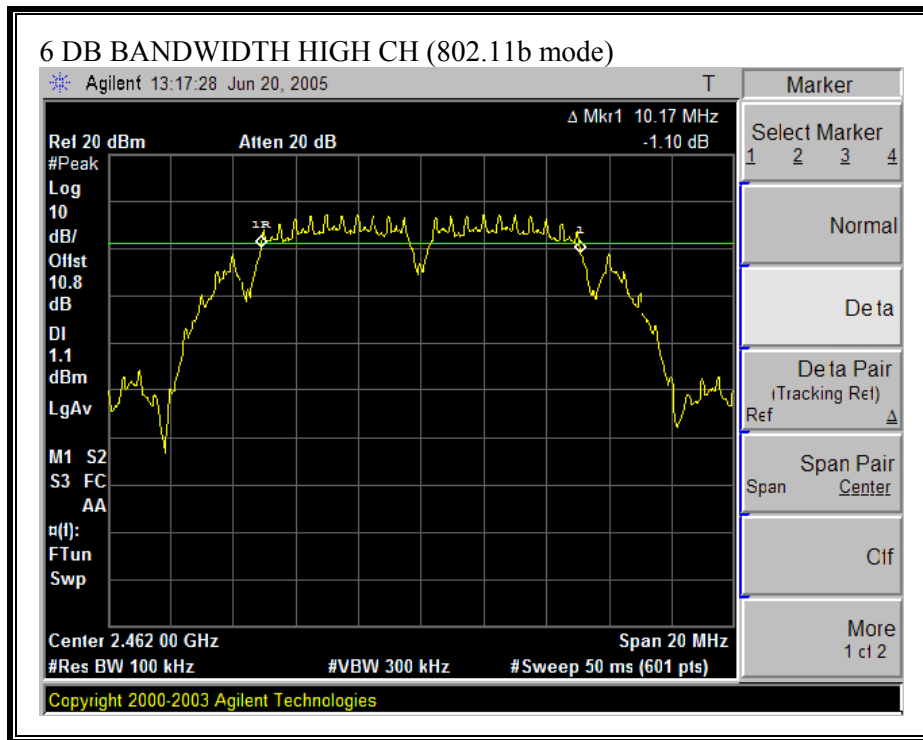

6 DB BANDWIDTH (802.11g MODE)

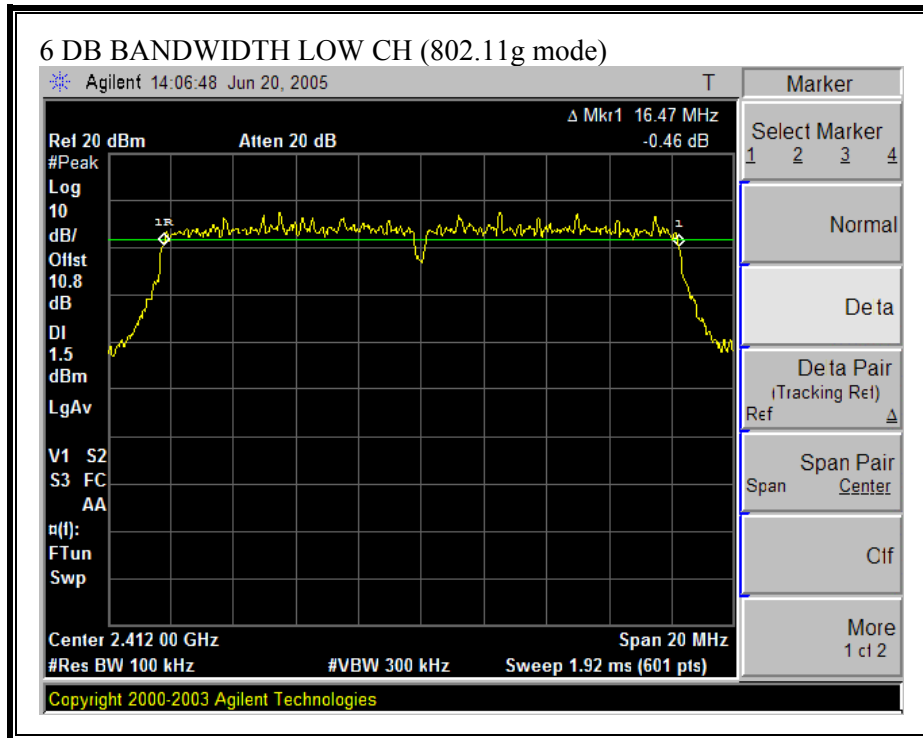

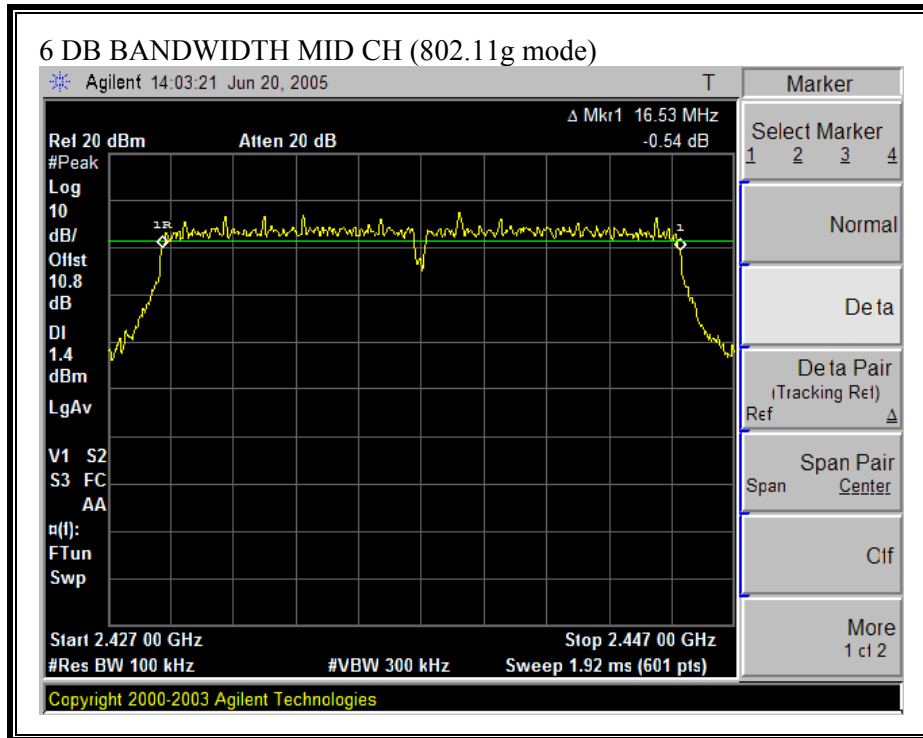

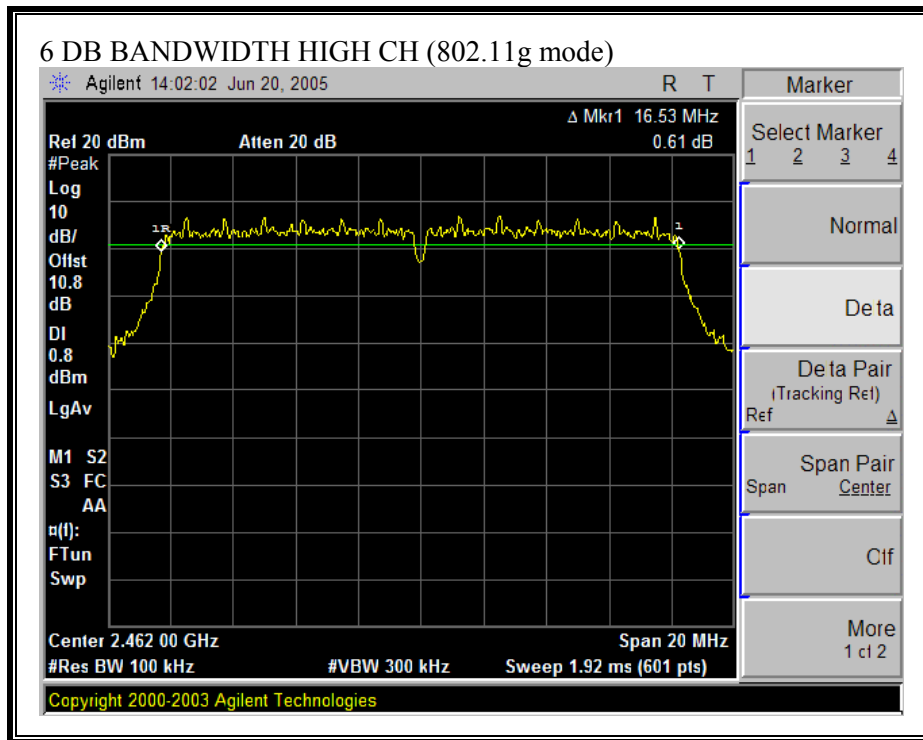

7.1.2. 99% BANDWIDTH

LIMIT

None; for reporting purposes only.

TEST PROCEDURE

The transmitter output is connected to the spectrum analyzer. The RBW is set to 1% to 3% of the 99 % bandwidth. The VBW is set to 3 times the RBW. The sweep time is coupled. The spectrum analyzer internal 99% bandwidth function is utilized.

RESULTS

No non-compliance noted:


802.11b Mode


Channel	Frequency (MHz)	99% Bandwidth (MHz)
Low	2412	12.5018
Middle	2437	12.4569
High	2462	12.4867


802.11g Mode

Channel	Frequency (MHz)	99% Bandwidth (MHz)
Low	2412	16.5089
Middle	2437	16.4994
High	2462	16.5073


99% BANDWIDTH (802.11b MODE)

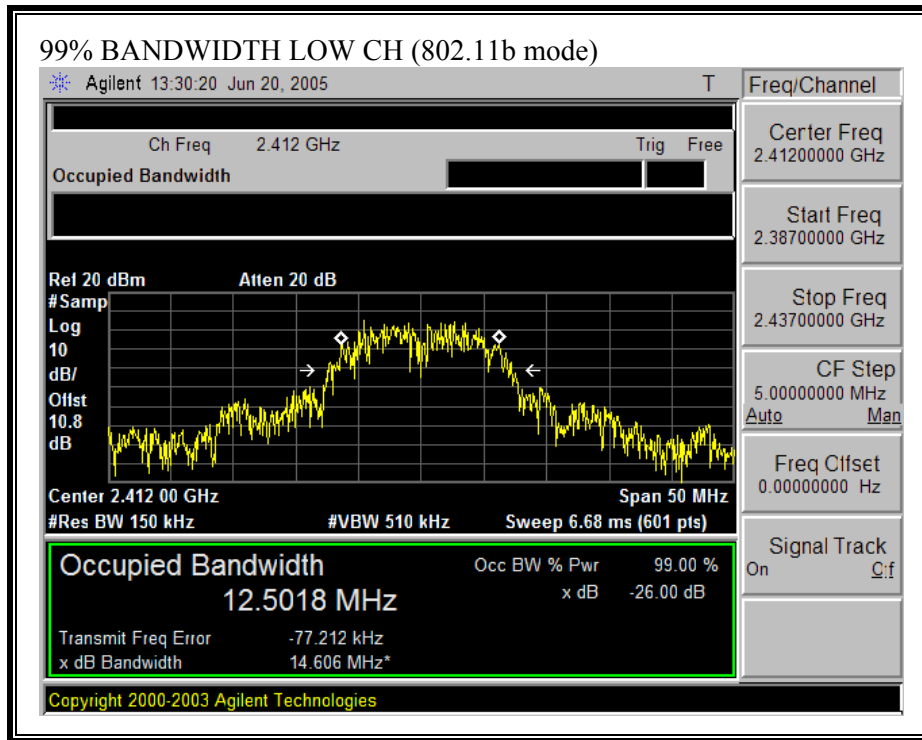


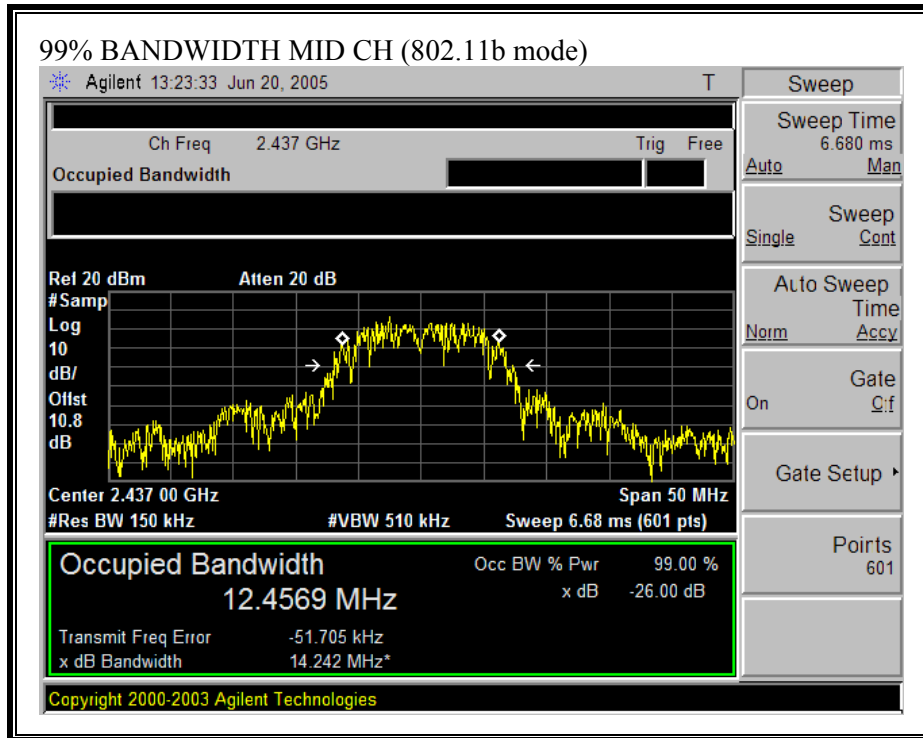


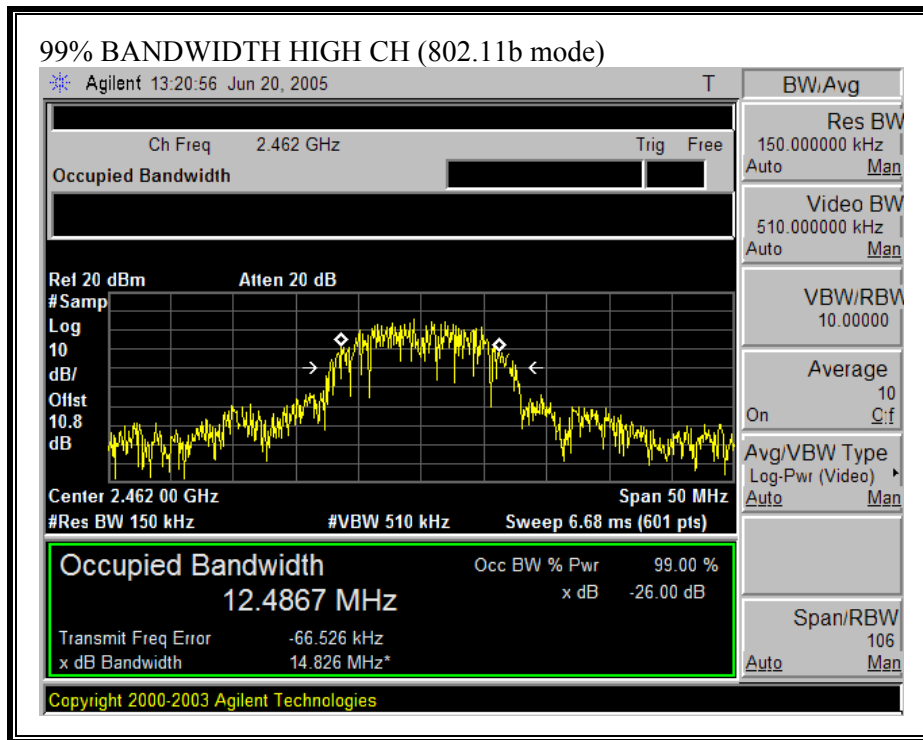

99% BANDWIDTH (802.11g MODE)

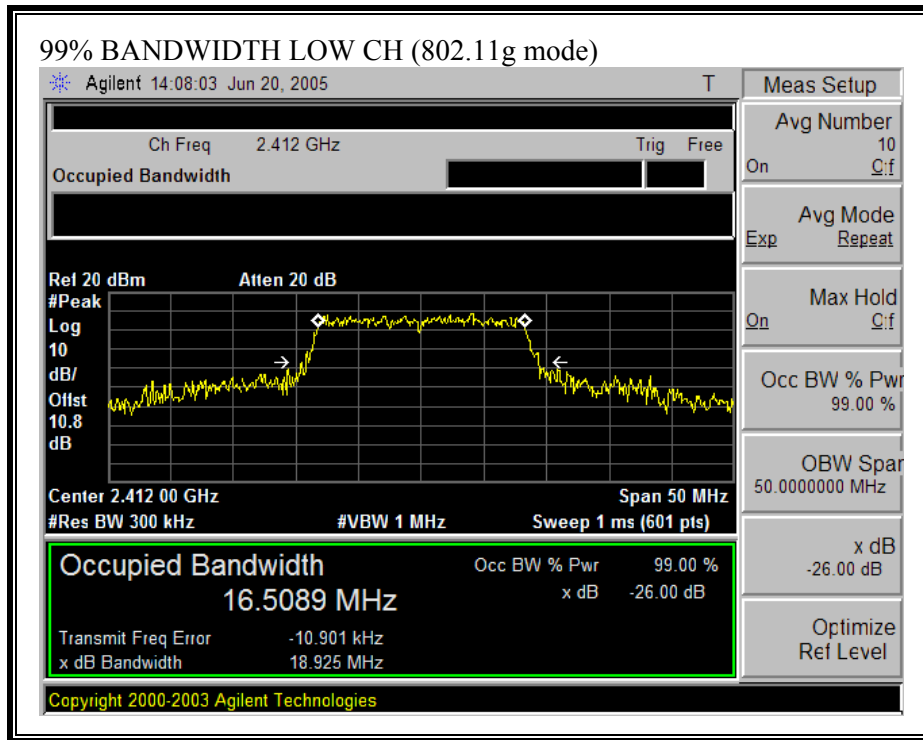

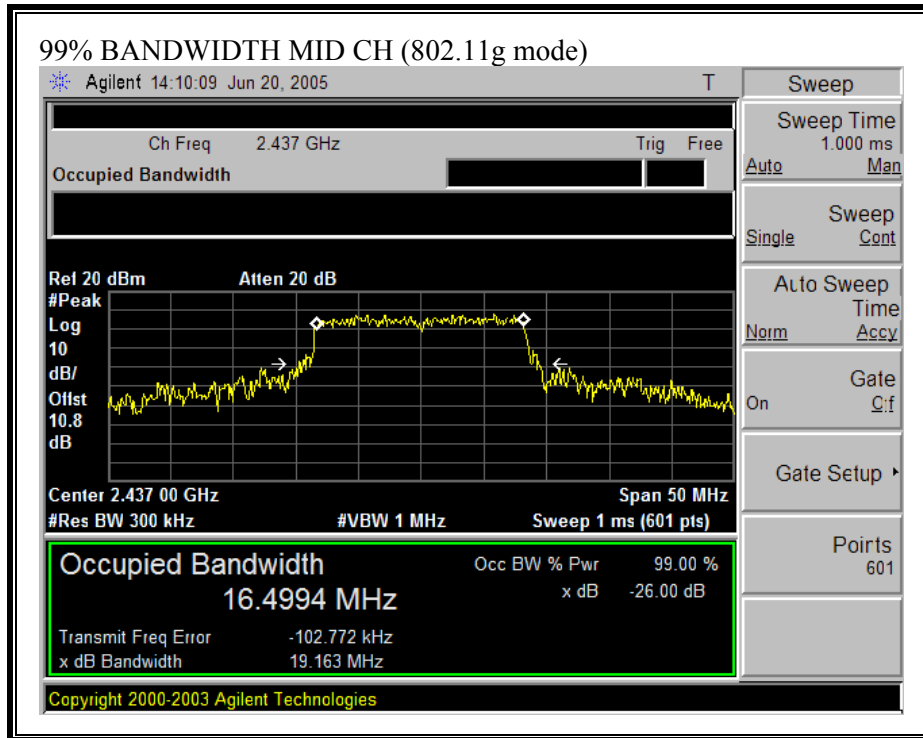

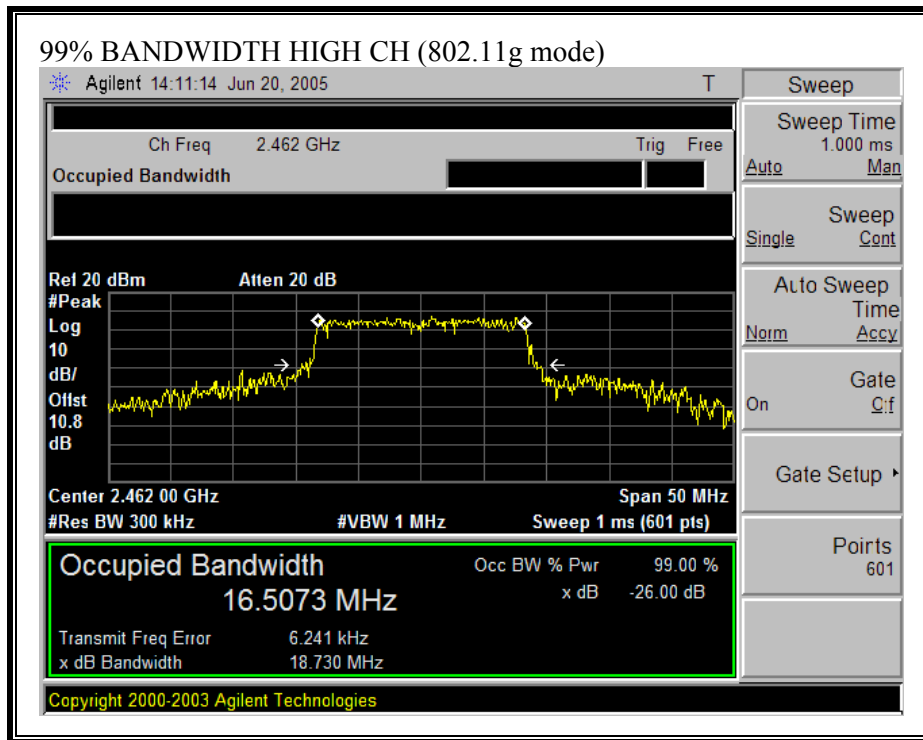

7.1.3. PEAK OUTPUT POWER

PEAK POWER LIMIT

§15.247 (b) The maximum peak output power of the intentional radiator shall not exceed the following:

§15.247 (b) (3) For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz , and 5725-5850 MHz bands: 1 watt.

§15.247 (b) (3) For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz , and 5725-5850 MHz bands: 1 watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are possible (e.g., alternative modulation methods), the maximum conducted output power is the highest total transmit power occurring in any mode.

§15.247 (b) (4) (i) Systems operating in the 2400–2483.5 MHz band that are used exclusively for fixed, point-to-point operations may employ transmitting antennas with directional gain greater than 6 dBi provided the maximum peak output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi.

TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer and the analyzer's internal channel power integration function is used to integrate the power over a bandwidth greater than or equal to the 99% bandwidth.

The test is performed in accordance with FCC document "Measurement of Digital Transmission Systems Operating under Section 15.247", March 23, 2005. The transmitter operates continuously therefore Power Output Option 2, Method # 1 is used.

RESULTS

The maximum antenna gain is 4.1dBi for other than fixed, point-to-point operations, therefore the limit is 30 dBm.

No non-compliance noted:


802.11b Mode


Channel	Frequency (MHz)	Peak Power (dBm)	Limit (dBm)	Margin (dB)
Low	2412	19.66	30	-10.34
Middle	2437	19.57	30	-10.43
High	2462	19.29	30	-10.71


802.11g Mode

Channel	Frequency (MHz)	Peak Power (dBm)	Limit (dBm)	Margin (dB)
Low	2412	21.88	30	-8.12
Middle	2437	21.88	30	-8.12
High	2462	21.85	30	-8.15


OUTPUT POWER (802.11b MODE)

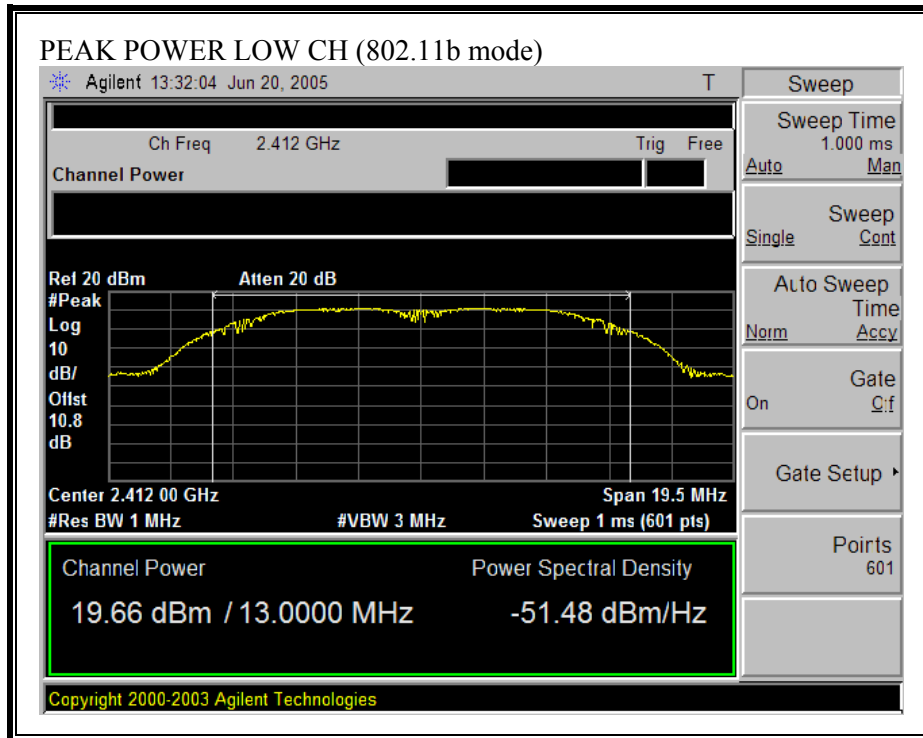


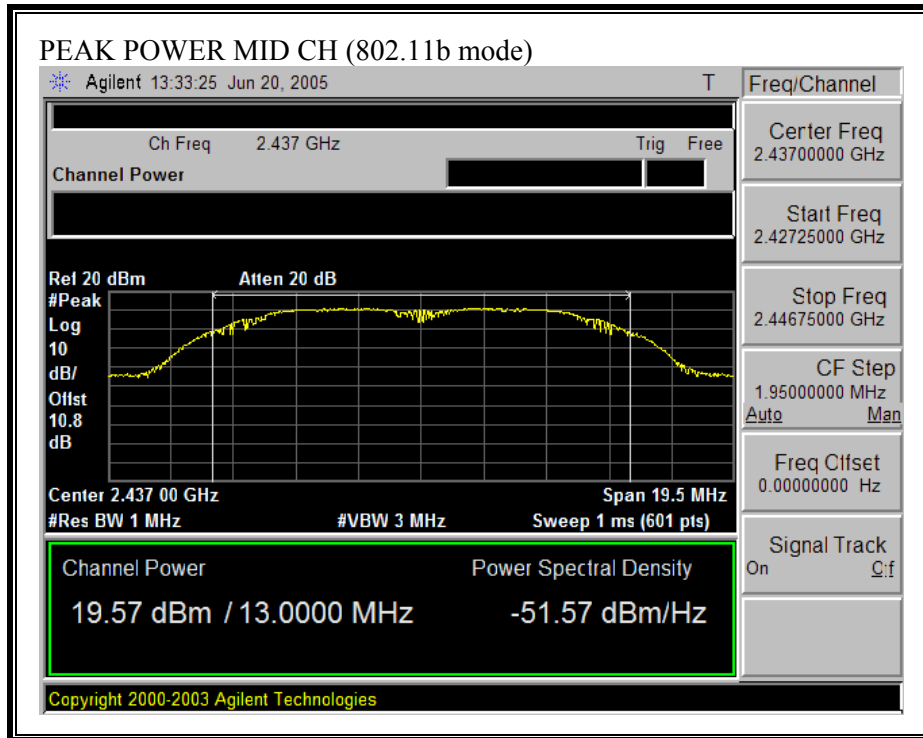


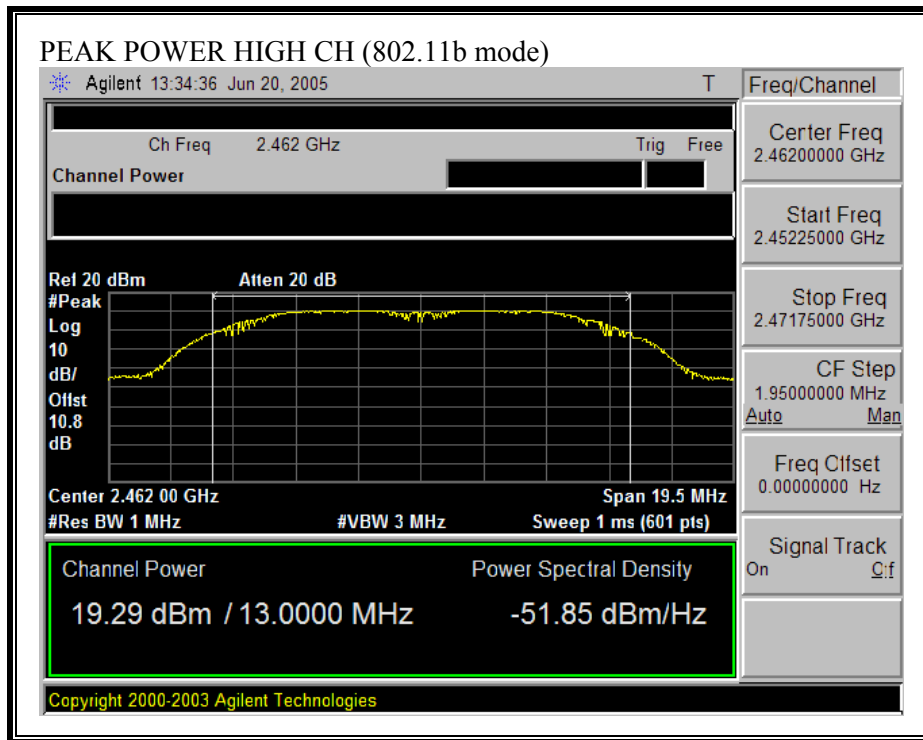

OUTPUT POWER (802.11g MODE)

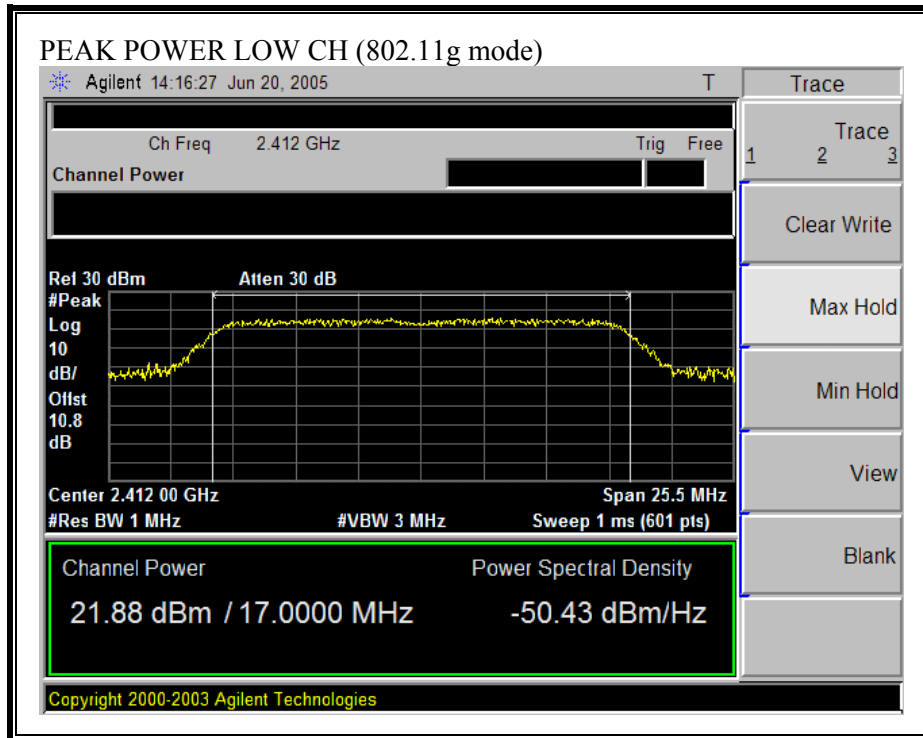

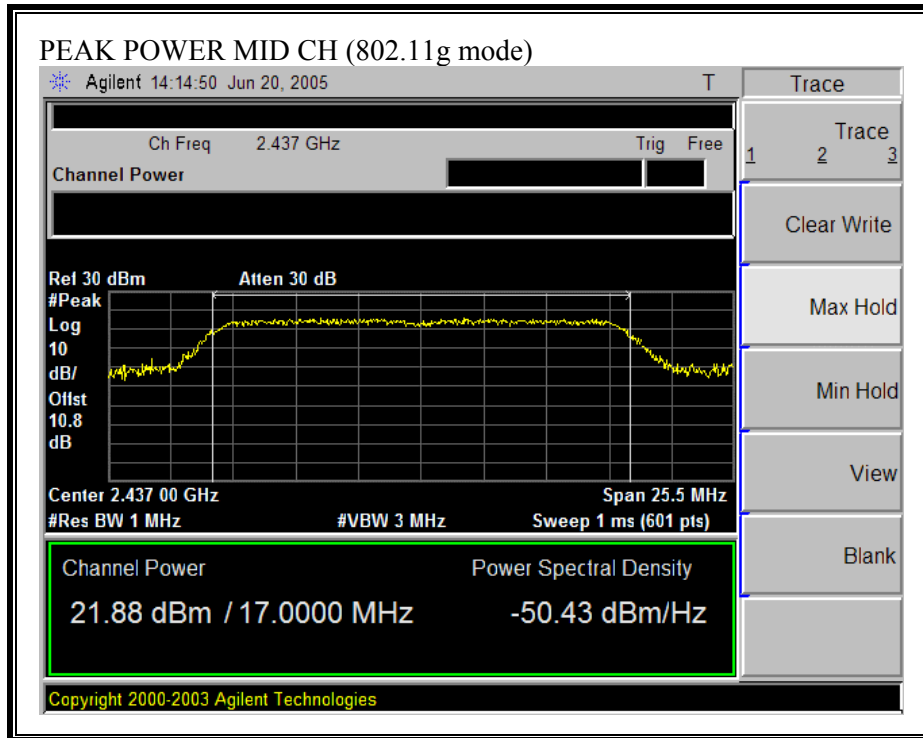

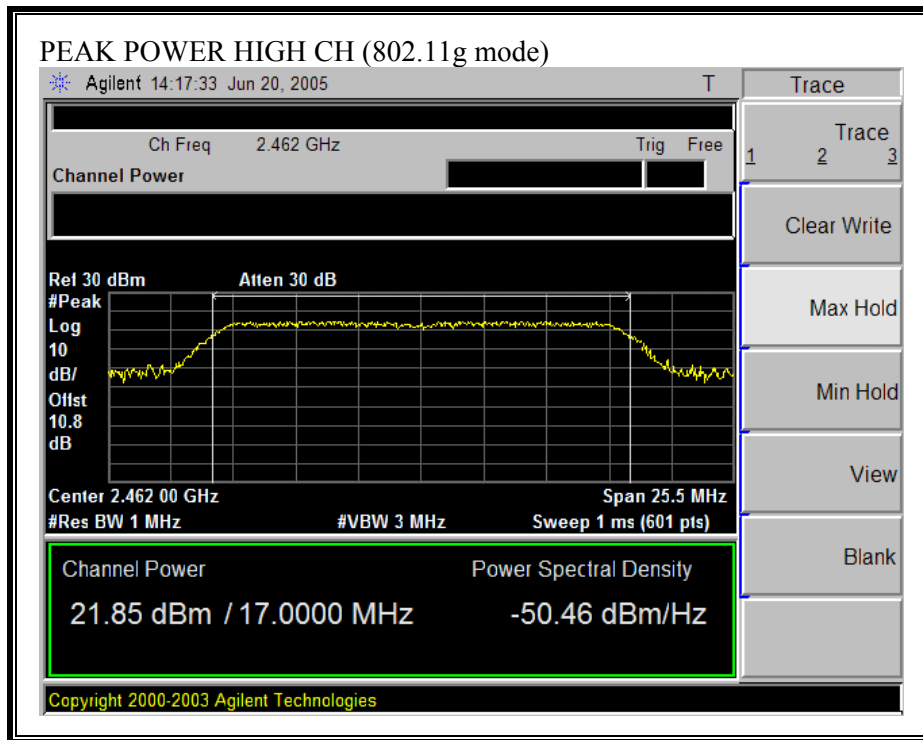

7.1.4. MAXIMUM PERMISSIBLE EXPOSURE

LIMITS

§1.1310 The criteria listed in Table 1 shall be used to evaluate the environmental impact of human exposure to radio-frequency (RF) radiation as specified in §1.1307(b), except in the case of portable devices which shall be evaluated according to the provisions of §2.1093 of this chapter.

TABLE 1—LIMITS FOR MAXIMUM PERMISSIBLE EXPOSURE (MPE)

Frequency range (MHz)	Electric field strength (V/m)	Magnetic field strength (A/m)	Power density (mW/cm ²)	Averaging time (minutes)
(A) Limits for Occupational/Controlled Exposures				
0.3–3.0	614	1.63	*(100)	6
3.0–30	1842/f	4.89/f	*(900/f ²)	6
30–300	61.4	0.163	1.0	6
300–1500	f/300	6
1500–100,000	5	6
(B) Limits for General Population/Uncontrolled Exposure				
0.3–1.34	614	1.63	*(100)	30
1.34–30	824/f	2.19/f	*(180/f ²)	30

TABLE 1—LIMITS FOR MAXIMUM PERMISSIBLE EXPOSURE (MPE)—Continued

Frequency range (MHz)	Electric field strength (V/m)	Magnetic field strength (A/m)	Power density (mW/cm ²)	Averaging time (minutes)
30–300	27.5	0.073	0.2	30
300–1500	f/1500	30
1500–100,000	1.0	30

f = frequency in MHz

* = Plane-wave equivalent power density

NOTE 1 TO TABLE 1: Occupational/controlled limits apply in situations in which persons are exposed as a consequence of their employment provided those persons are fully aware of the potential for exposure and can exercise control over their exposure. Limits for occupational/controlled exposure also apply in situations when an individual is transient through a location where occupational/controlled limits apply provided he or she is made aware of the potential for exposure.

NOTE 2 TO TABLE 1: General population/uncontrolled exposures apply in situations in which the general public may be exposed, or in which persons that are exposed as a consequence of their employment may not be fully aware of the potential for exposure or can not exercise control over their exposure.

CALCULATIONS

Given

$$E = \sqrt{(30 * P * G) / d}$$

and

$$S = E^2 / 3770$$

where

E = Field Strength in Volts/meter

P = Power in Watts

G = Numeric antenna gain

d = Distance in meters

S = Power Density in milliwatts/square centimeter

Combining equations and rearranging the terms to express the distance as a function of the remaining variables yields:

$$d = \sqrt{((30 * P * G) / (3770 * S))}$$

Changing to units of Power to mW and Distance to cm, using:

$$P \text{ (mW)} = P \text{ (W)} / 1000 \text{ and}$$

$$d \text{ (cm)} = 100 * d \text{ (m)}$$

yields

$$d = 100 * \sqrt{((30 * (P / 1000) * G) / (3770 * S))}$$

$$d = 0.282 * \sqrt{(P * G / S)}$$

where

d = distance in cm

P = Power in mW

G = Numeric antenna gain

S = Power Density in mW/cm²

Substituting the logarithmic form of power and gain using:

$$P \text{ (mW)} = 10^{(P \text{ (dBm)} / 10)} \text{ and}$$

$$G \text{ (numeric)} = 10^{(G \text{ (dBi)} / 10)}$$

yields

$$d = 0.282 * 10^{((P + G) / 20)} / \sqrt{S} \quad \text{Equation (1)}$$

where

d = MPE distance in cm

P = Power in dBm

G = Antenna Gain in dBi

S = Power Density Limit in mW/cm²

Equation (1) and the measured peak power is used to calculate the MPE distance.

LIMITS

From §1.1310 Table 1 (B), $S = 1.0 \text{ mW/cm}^2$

RESULTS

No non-compliance noted:

Mode	Power Density Limit (mW/cm²)	Output Power (dBm)	Antenna Gain (dBi)	MPE Distance (cm)
802.11b	1.0	19.66	4.10	4.35
802.11g	1.0	21.88	4.10	5.61

NOTE: For mobile or fixed location transmitters, the minimum separation distance is 20 cm, even if calculations indicate that the MPE distance would be less.

7.1.5. AVERAGE POWER

AVERAGE POWER LIMIT

None; for reporting purposes only.

TEST PROCEDURE

The transmitter output is connected to a power meter.

RESULTS

No non-compliance noted:

The cable assembly insertion loss of 10.75dB (including 10 dB pad and 0.75 dB cable) was entered as an offset in the power meter to allow for direct reading of power.

802.11b Mode

Channel	Frequency (MHz)	Power (dBm)
Low	2412	16.29
Middle	2437	16.33
High	2462	16.18

802.11g Mode

Channel	Frequency (MHz)	Power (dBm)
Low	2412	16.20
Middle	2437	16.18
High	2462	16.10

7.1.6. PEAK POWER SPECTRAL DENSITY

LIMIT

§15.247 (d) For direct sequence systems, the peak power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer, the maximum level in a 3 kHz bandwidth is measured with the spectrum analyzer using RBW = 3 kHz and VBW > 3 kHz, sweep time = span / 3 kHz, and video averaging is turned off. The PPSD is the highest level found across the emission in any 3 kHz band.

RESULTS

No non-compliance noted:


802.11b Mode


Channel	Frequency (MHz)	PPSD (dBm)	Limit (dBm)	Margin (dB)
Low	2412	-5.15	8	-13.15
Middle	2437	-4.66	8	-12.66
High	2462	-5.34	8	-13.34


802.11g Mode

Channel	Frequency (MHz)	PPSD (dBm)	Limit (dBm)	Margin (dB)
Low	2412	-6.20	8	-14.20
Middle	2437	-5.80	8	-13.80
High	2462	-7.24	8	-15.24


PEAK POWER SPECTRAL DENSITY (802.11b MODE)

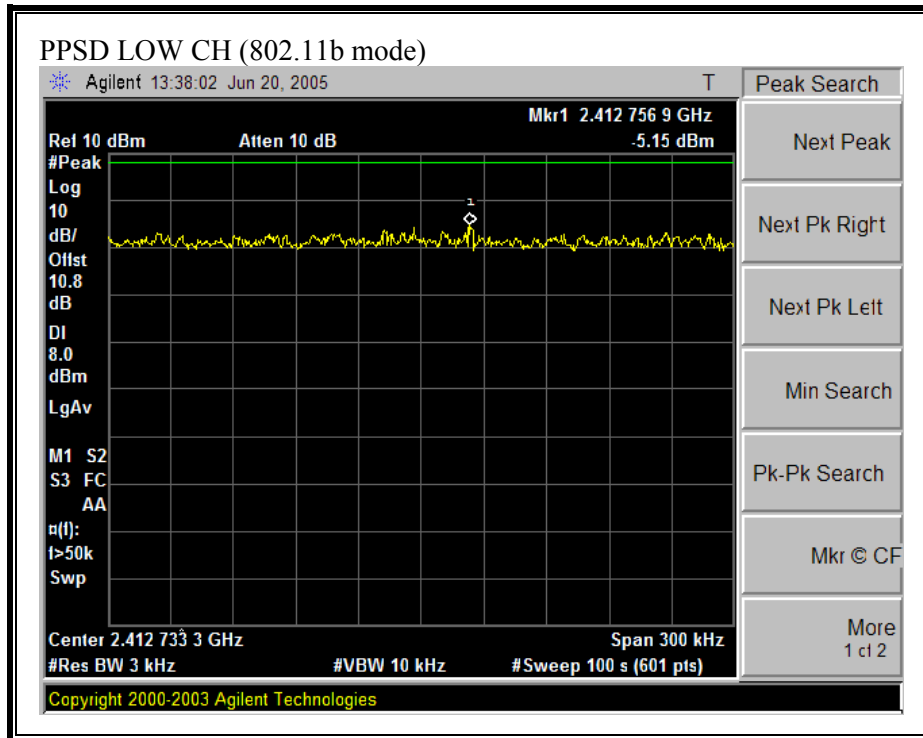


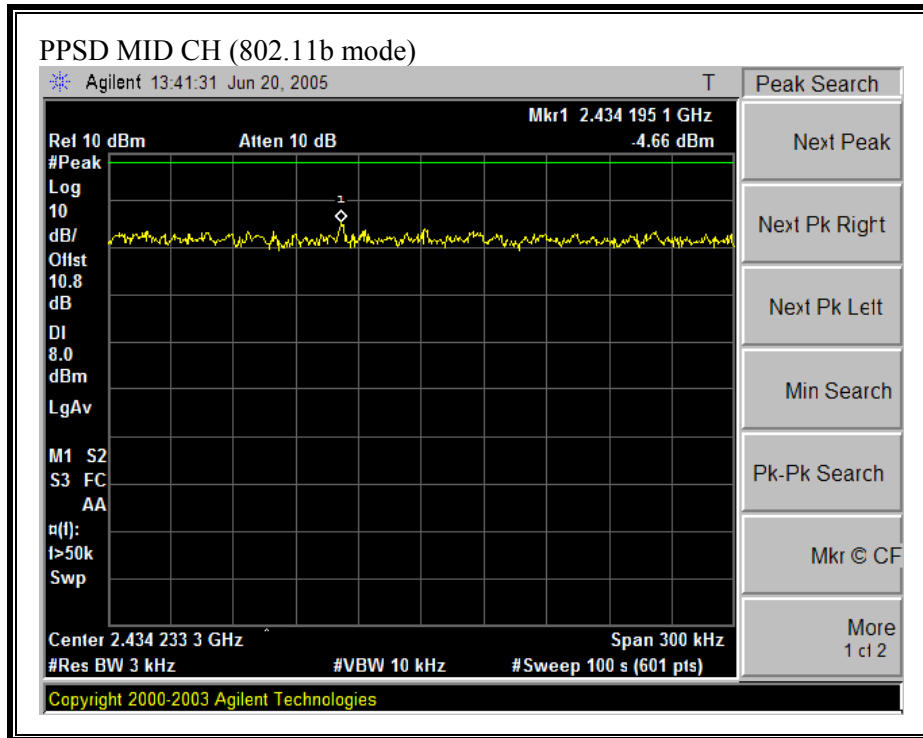


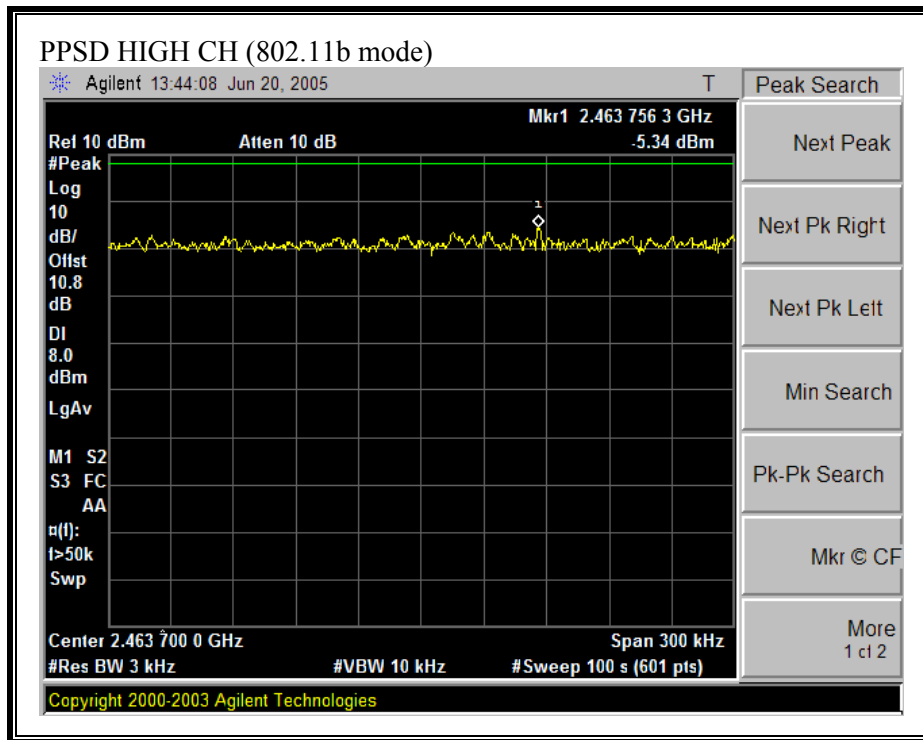

PEAK POWER SPECTRAL DENSITY (802.11g MODE)

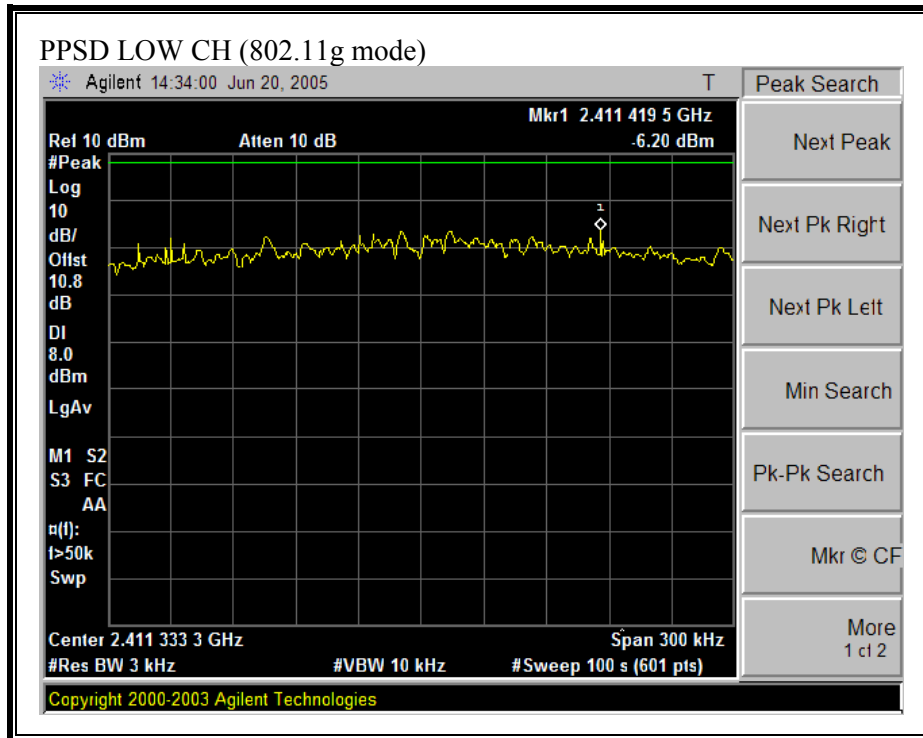

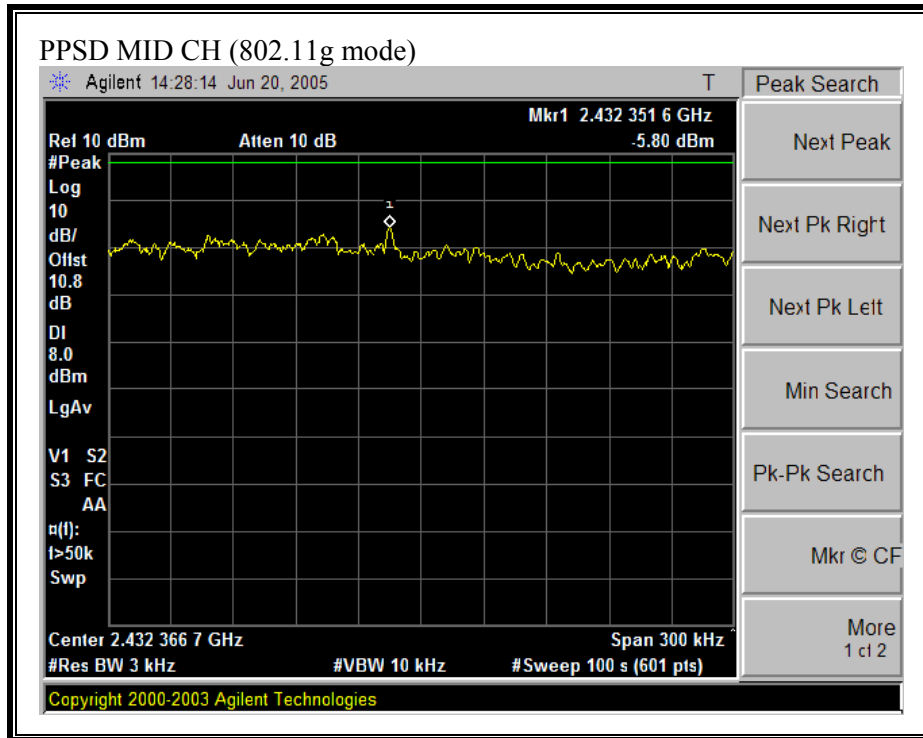

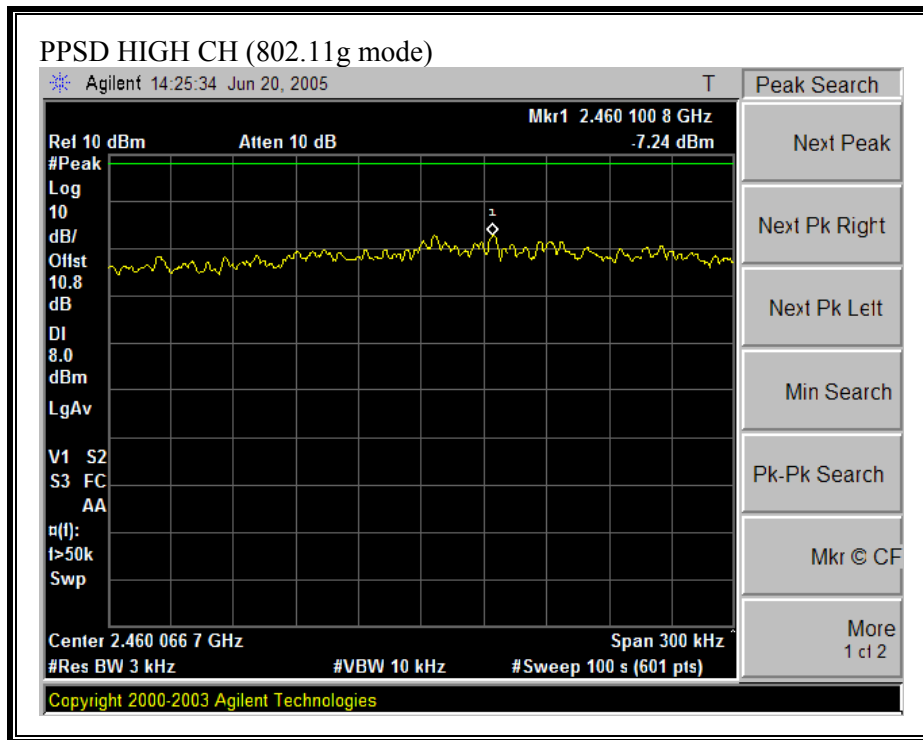

7.1.7. CONDUCTED SPURIOUS EMISSIONS

LIMITS

§15.247 (c) In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

Conducted power was measured based on the use of a peak measurement, therefore the required attenuation is 20 dB.

TEST PROCEDURE


The transmitter output is connected to a spectrum analyzer. The resolution bandwidth is set to 100 kHz. The video bandwidth is set to 300 kHz.


The spectrum from 30 MHz to 26 GHz is investigated with the transmitter set to the lowest, middle, and highest channels.

RESULTS


No non-compliance noted:


SPURIOUS EMISSIONS, LOW CHANNEL (802.11b MODE)

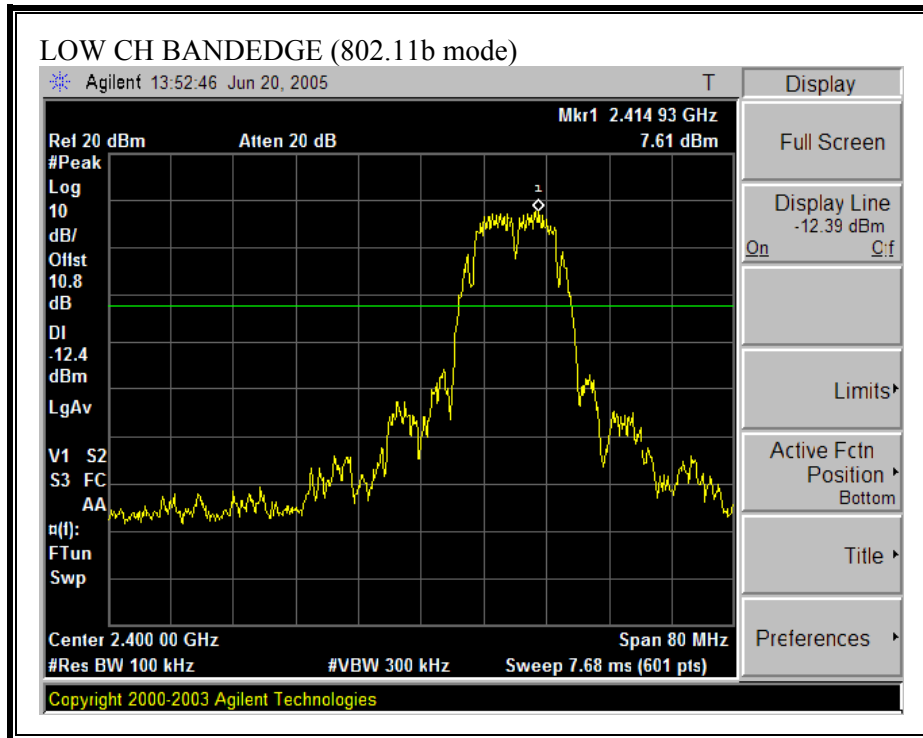

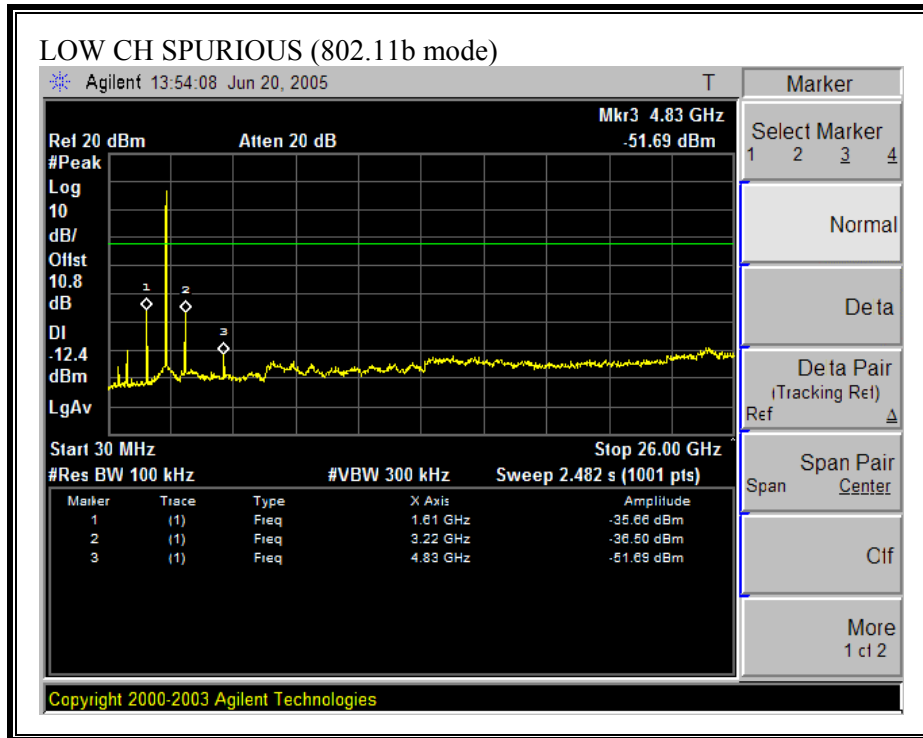



SPURIOUS EMISSIONS, MID CHANNEL (802.11b MODE)

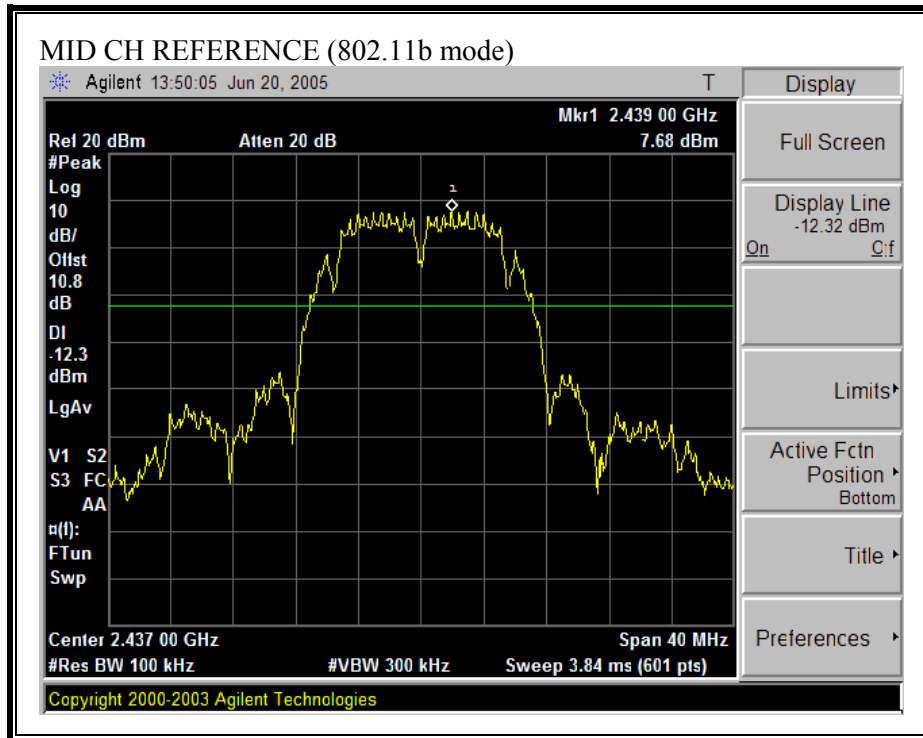

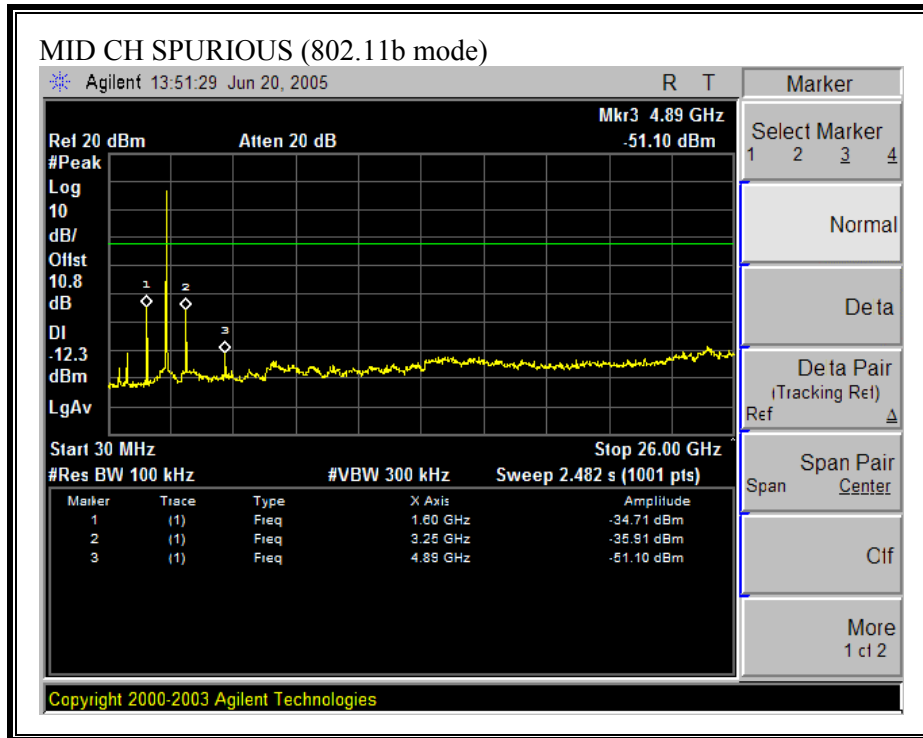



SPURIOUS EMISSIONS, HIGH CHANNEL (802.11b MODE)

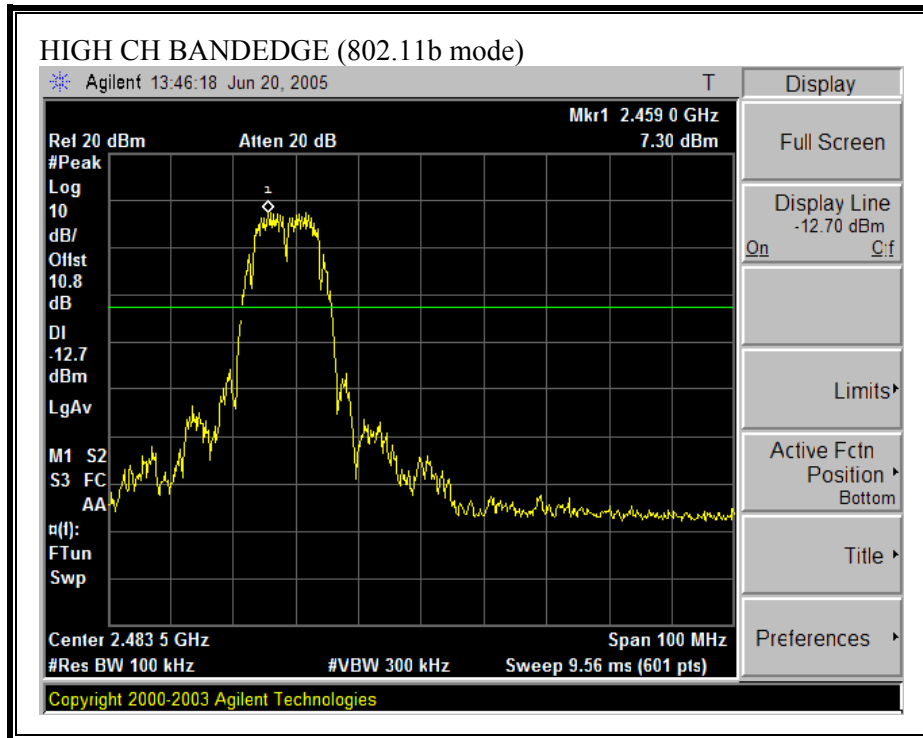

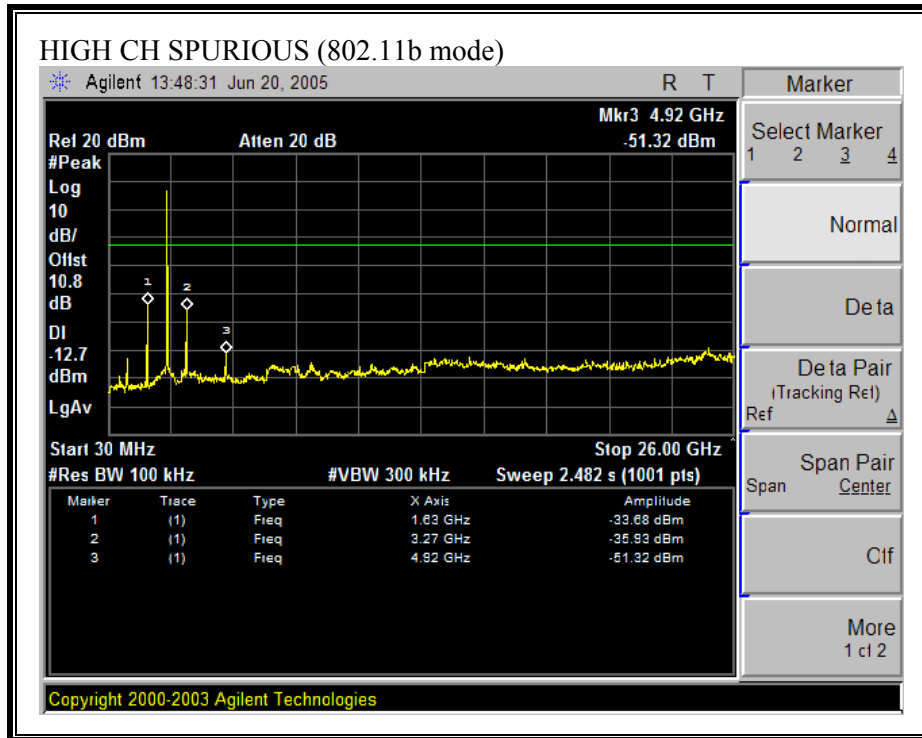



SPURIOUS EMISSIONS, LOW CHANNEL (802.11g MODE)

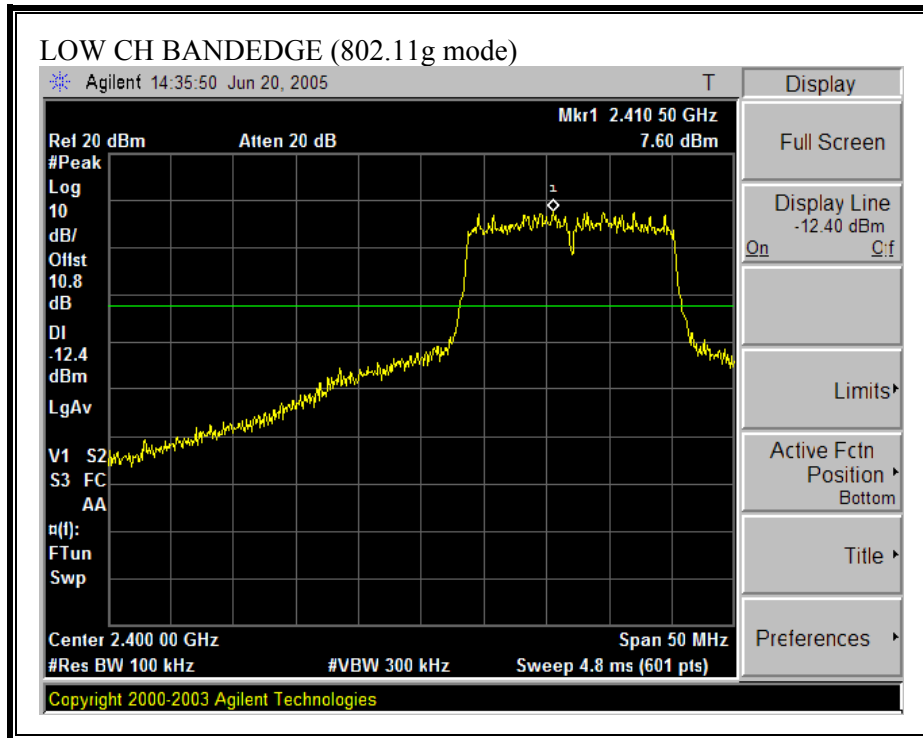

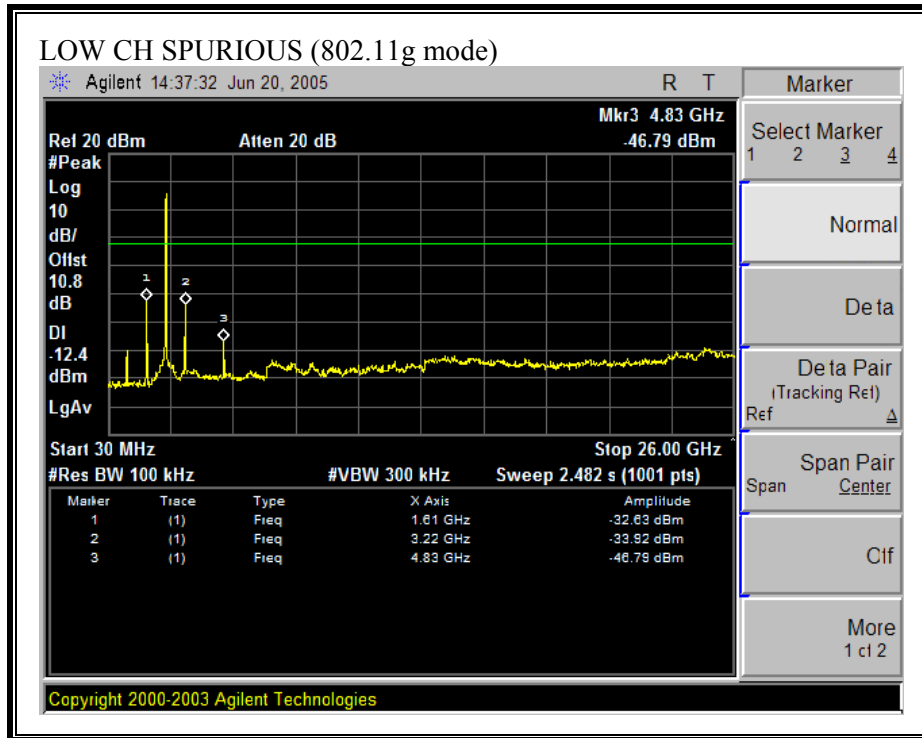



SPURIOUS EMISSIONS, MID CHANNEL (802.11g MODE)

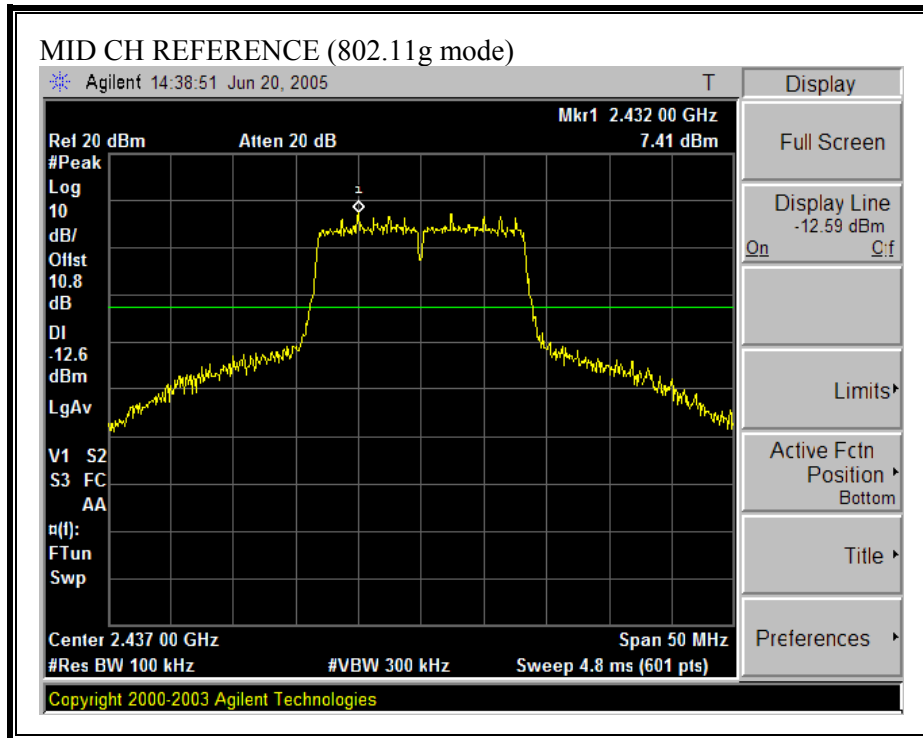

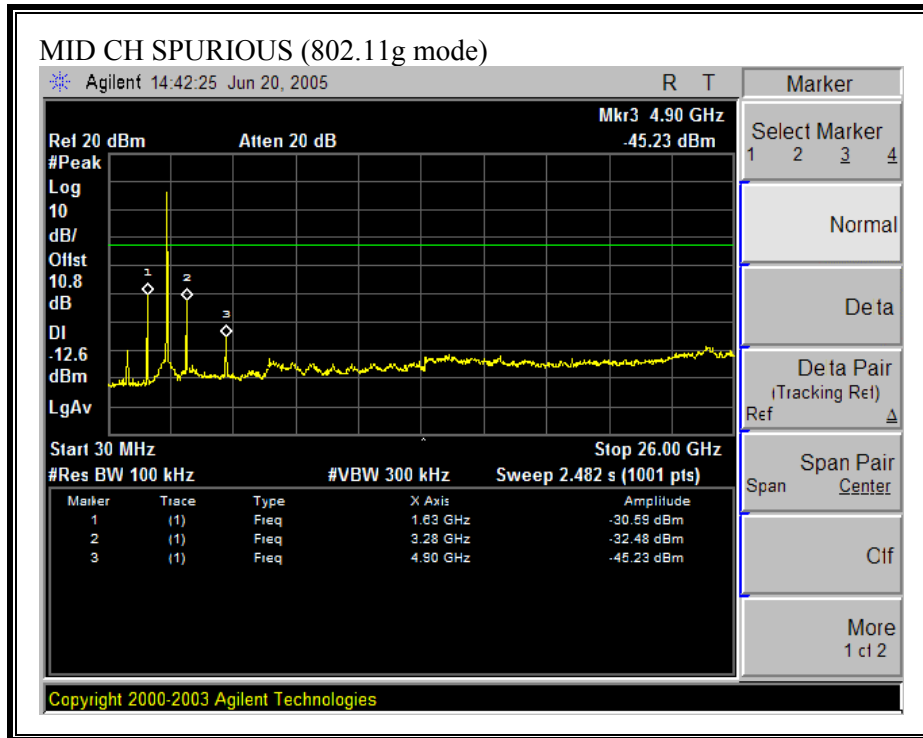

SPURIOUS EMISSIONS, HIGH CHANNEL (802.11g MODE)

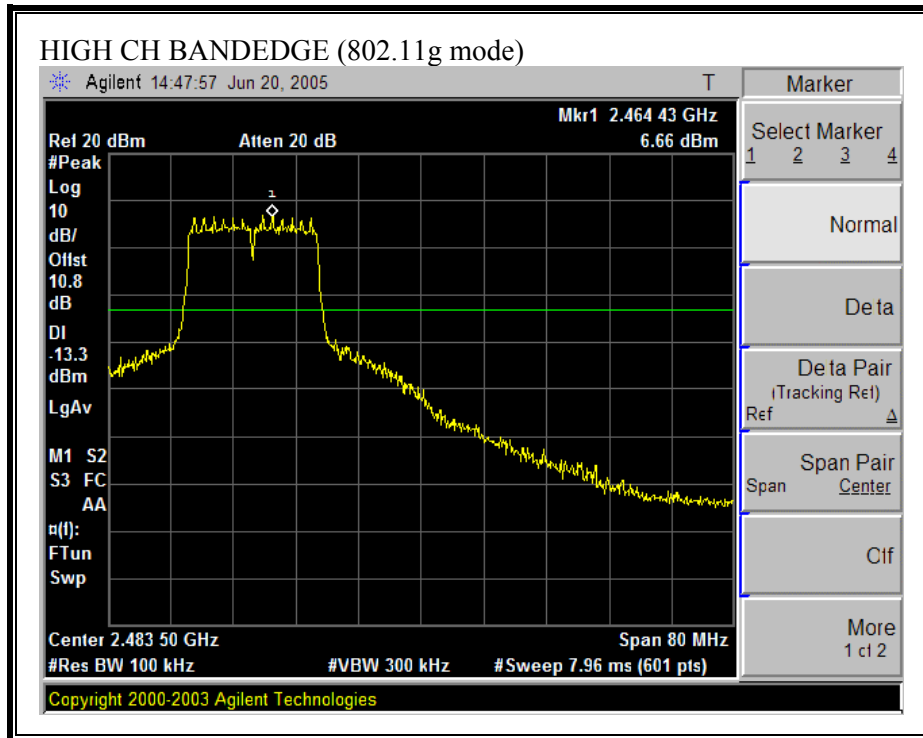

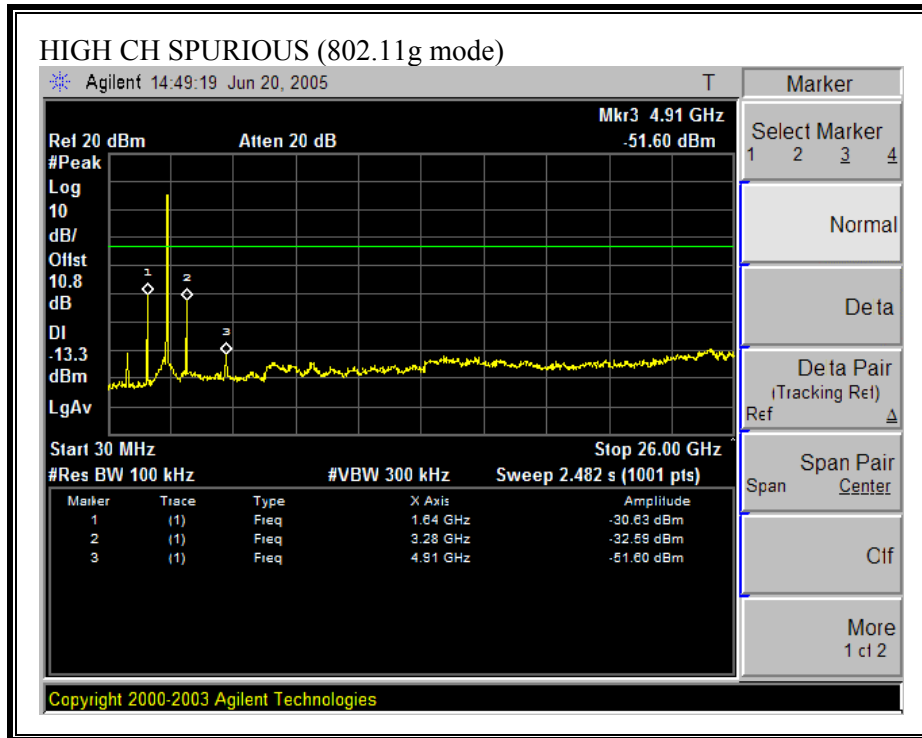

7.2. RADIATED EMISSIONS

7.2.1. TRANSMITTER RADIATED SPURIOUS EMISSIONS

LIMITS

§15.205 (a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
¹ 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2655 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	(²)
13.36 - 13.41			

¹ Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

² Above 38.6

§15.205 (b) Except as provided in paragraphs (d) and (e), the field strength of emissions appearing within these frequency bands shall not exceed the limits shown in Section 15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in Section 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in Section 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in Section 15.35 apply to these measurements.

§15.209 (a) Except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
30 - 88	100 **	3
88 - 216	150 **	3
216 - 960	200 **	3
Above 960	500	3

** Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.

§15.209 (b) In the emission table above, the tighter limit applies at the band edges.

TEST PROCEDURE

The EUT is placed on a non-conducting table 80 cm above the ground plane. The antenna to EUT distance is 3 meters. The EUT is configured in accordance with ANSI C63.4. The EUT is set to transmit in a continuous mode.

For measurements below 1 GHz the resolution bandwidth is set to 100 kHz for peak detection measurements or 120 kHz for quasi-peak detection measurements. Peak detection is used unless otherwise noted as quasi-peak.


For measurements above 1 GHz the resolution bandwidth is set to 1 MHz, then the video bandwidth is set to 1 MHz for peak measurements and 10 Hz for average measurements.


The spectrum from 30 MHz to 26 GHz is investigated with the transmitter set to the lowest, middle, and highest channels in the 2.4 GHz band.

The frequency range of interest is monitored at a fixed antenna height and EUT azimuth. The EUT is rotated through 360 degrees to maximize emissions received. The antenna is scanned from 1 to 4 meters above the ground plane to further maximize the emission. Measurements are made with the antenna polarized in both the vertical and the horizontal positions.


7.2.2. TRANSMITTER ABOVE 1 GHz WITH INTERNAL ANTENNA


RESTRICTED BANDEDGE (b MODE, LOW CHANNEL, HORIZONTAL)

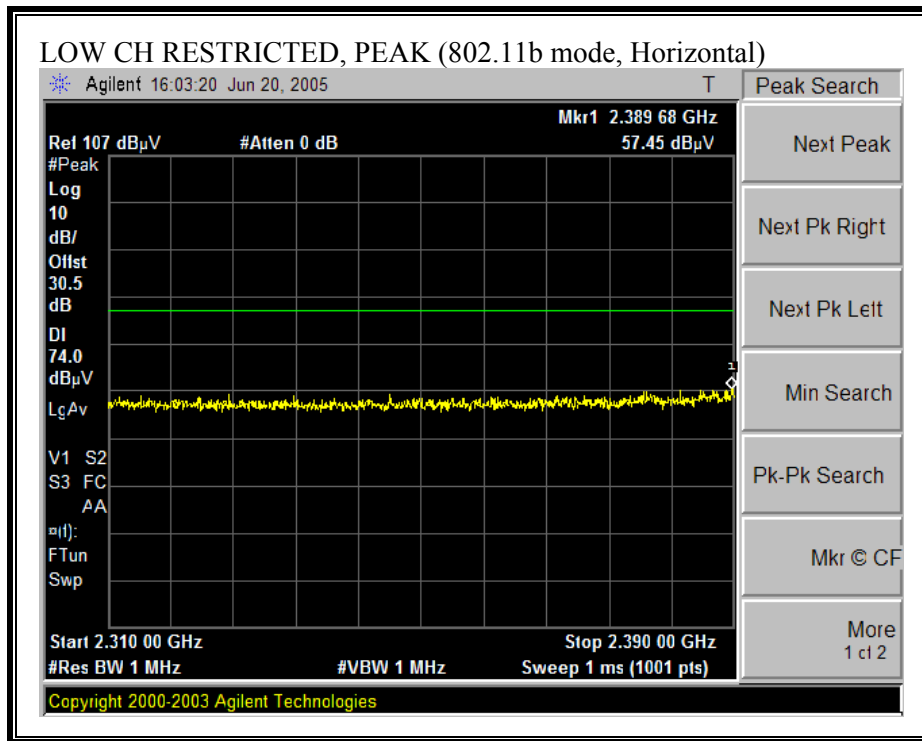

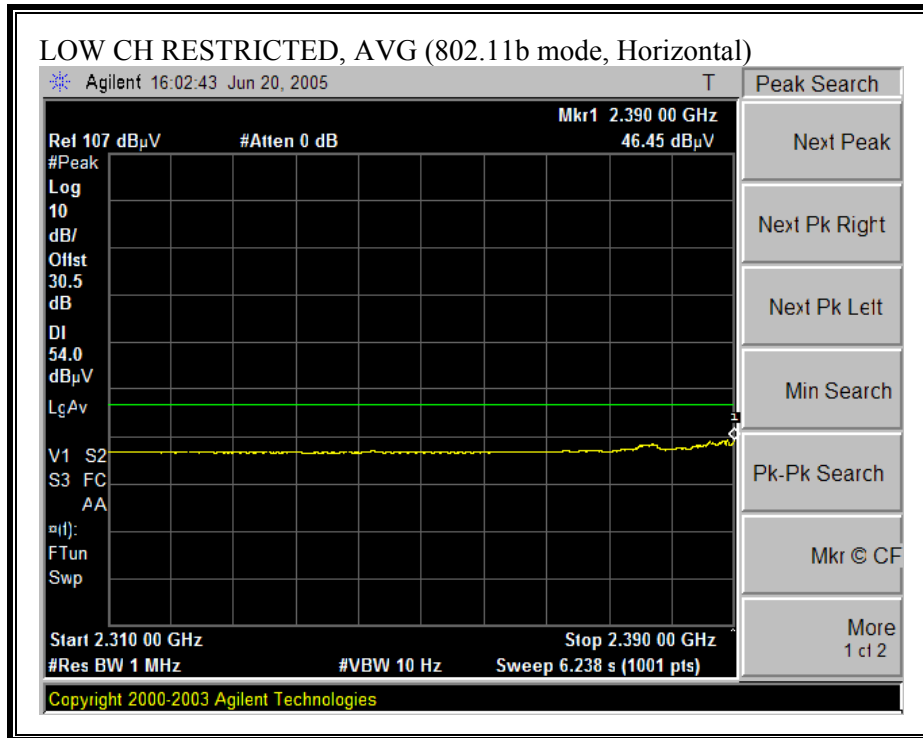



RESTRICTED BANDEDGE (b MODE, LOW CHANNEL, VERTICAL)

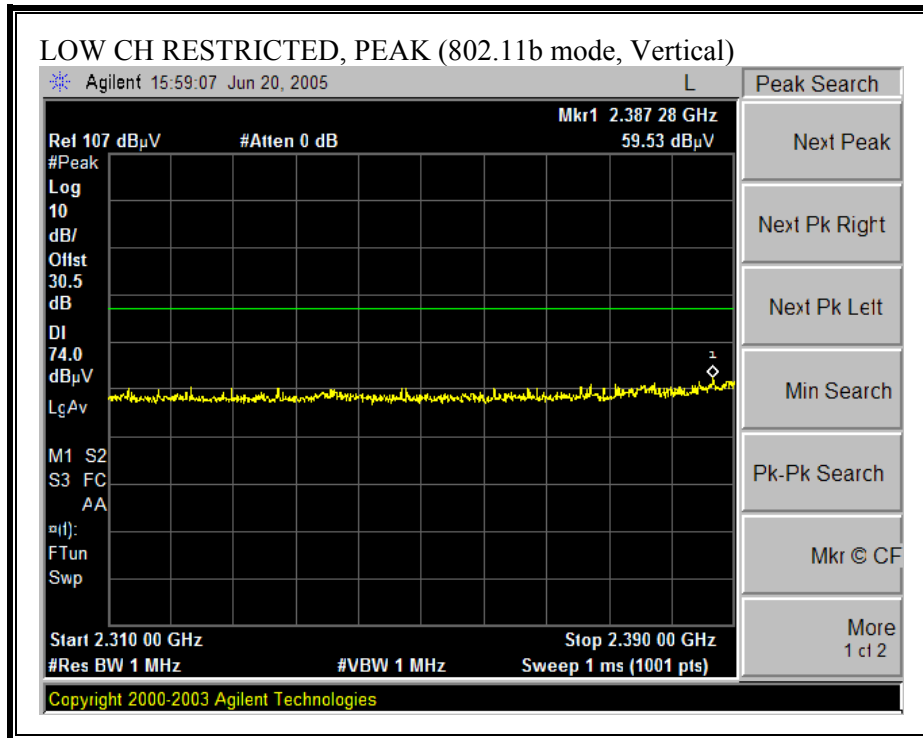

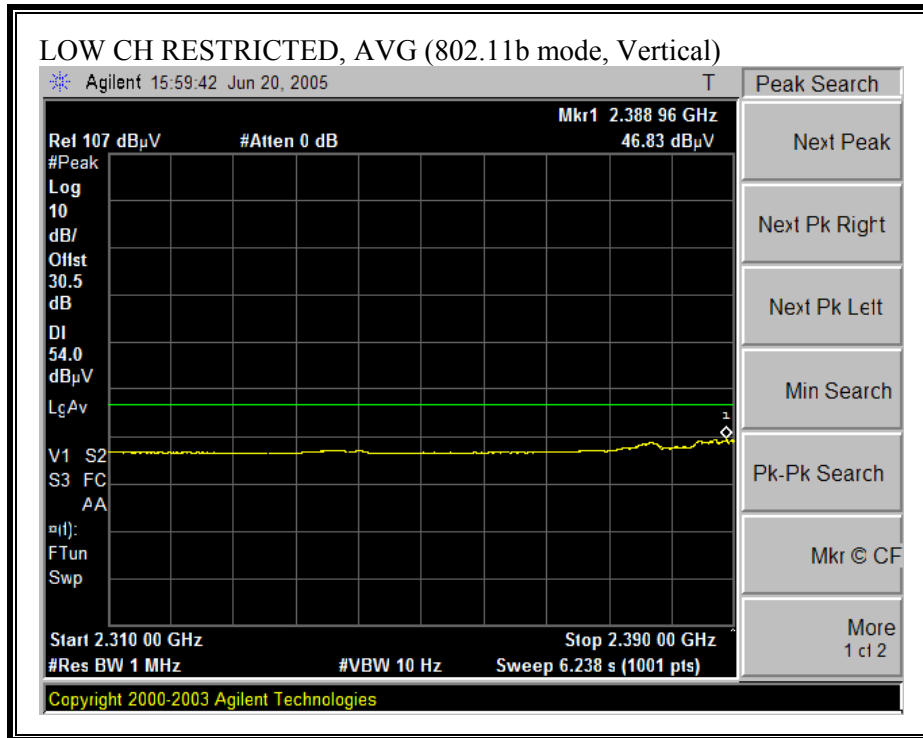



RESTRICTED BANDEDGE (b MODE, HIGH CHANNEL, HORIZONTAL)

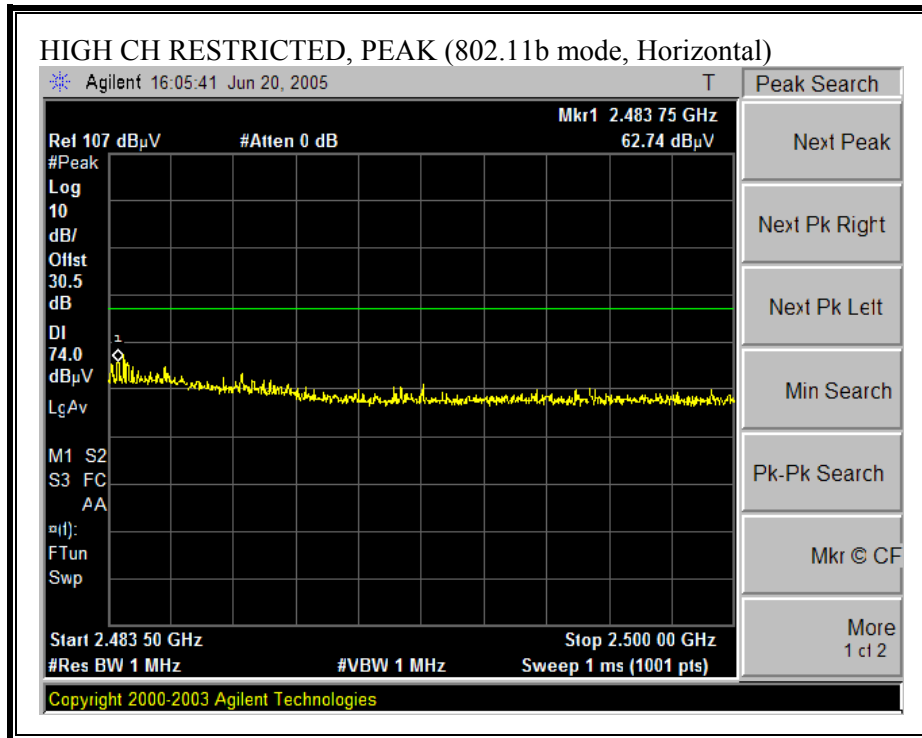

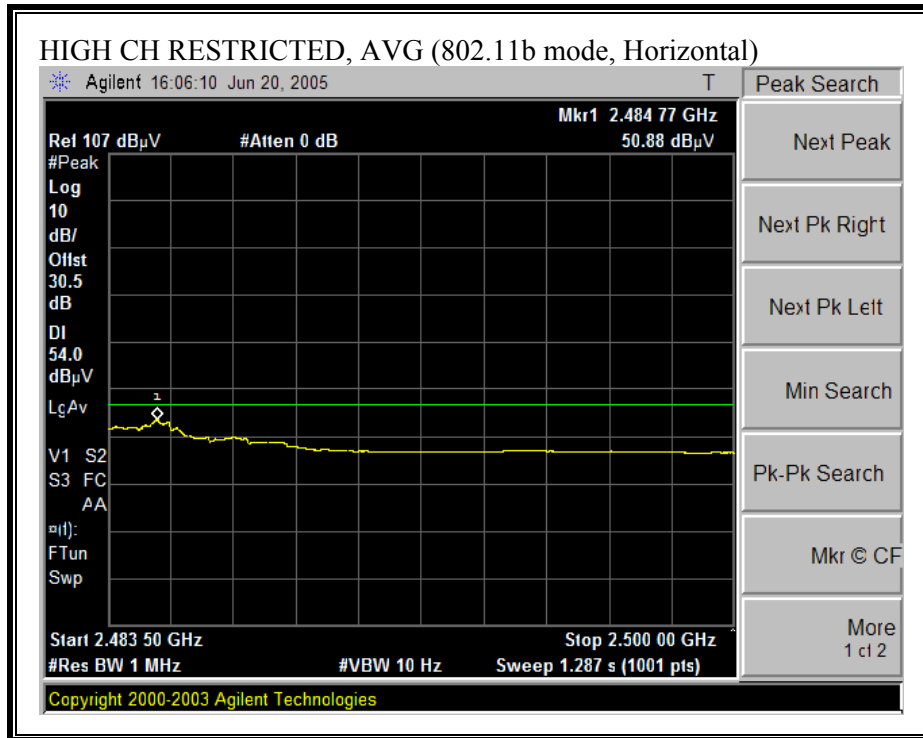

RESTRICTED BANDEDGE (b MODE, HIGH CHANNEL, VERTICAL)

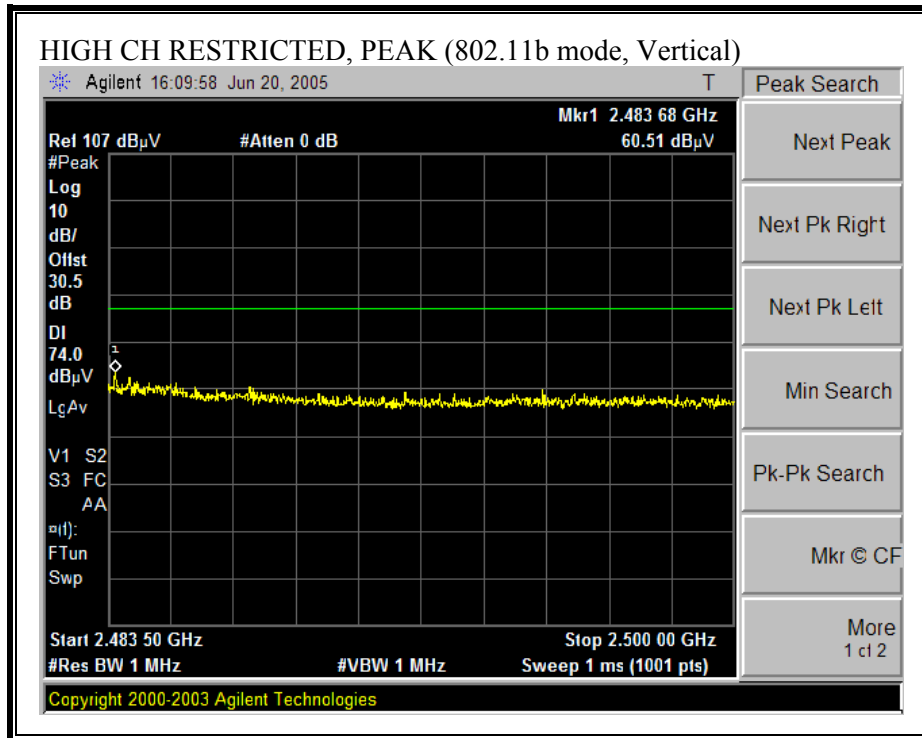

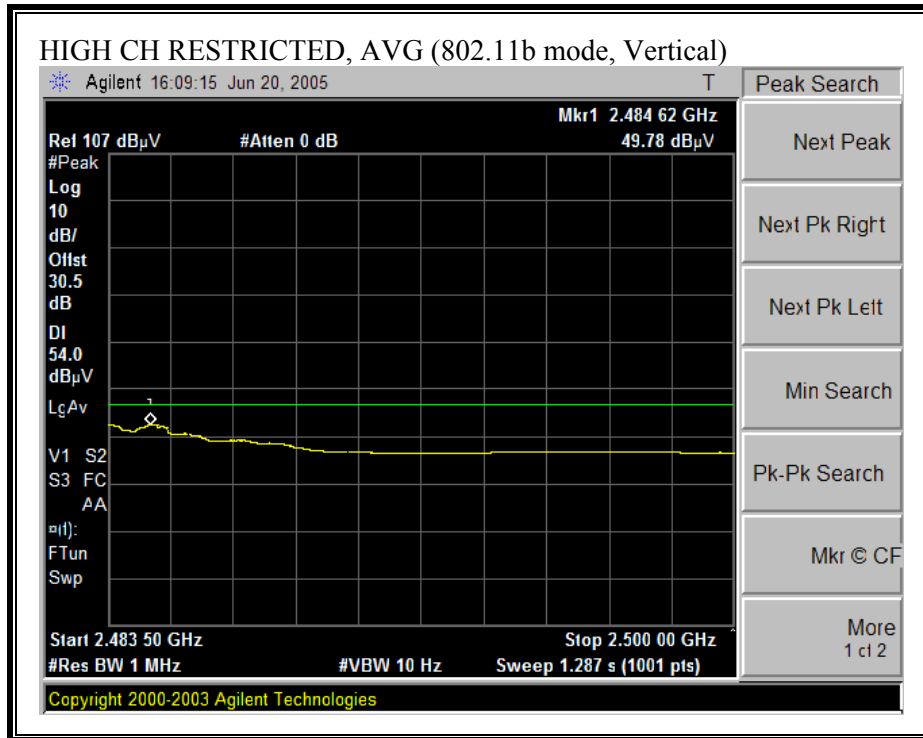

HARMONICS AND SPURIOUS EMISSIONS (b MODE)

06/27/05 High Frequency Measurement
 Compliance Certification Services, Morgan Hill Open Field Site

Test Engr: Chin Pang
 Project #: 05I3515-1
 Company: Buffalo Inc.
 High Power CardBus Adapter
 EUT M/N: WLI-CB-G54HP
 Test Target: FCC 15.247
 Mode Oper: b mode, TX, with Internal antenna
 Average Power Meter: Low = 16 dBm, Mid = 16 dBm, High = 16 dBm

Test Equipment:

EMCO Horn 1-18GHz | Pre-amplifier 1-26GHz | Pre-amplifier 26-40GHz | Horn > 18GHz | Limit
 T60; S/N: 2238 @3m | T63 Miteq 646456 | | | FCC 15.205

Hi Frequency Cables: 2 foot cable | 3 foot cable | 4 foot cable | 12 foot cable
 | | 3_Chin | | 12_Neelesh | HPF | Reject Filter
 | | | | HPF_4.0GHz | |


Peak Measurements
 RBW=VBW=1MHz
 Average Measurements
 RBW=1MHz ; VBW=10Hz


f GHz	Dist (m)	Read Pk dBuV	Read Avg. dBuV	AF dB/m	CL dB	Amp dB	D Corr dB	Filtr dB	Peak dBuV/m	Avg dBuV/m	Pk Lim dBuV/m	Avg Lim dBuV/m	Pk Mar dB	Avg Mar dB	Notes (V/H)
Low ch															
4.824	3.0	53.6	47.6	33.6	3.8	-37.9	0.0	0.6	53.6	47.6	74	54	-20.4	-6.4	V
4.824	3.0	54.0	48.3	33.6	3.8	-37.9	0.0	0.6	54.0	48.3	74	54	-20.0	-5.7	H
Mid ch															
4.874	3.0	55.3	51.5	33.7	3.8	-37.9	0.0	0.6	55.4	51.6	74	54	-18.6	-2.4	V
7.311	3.0	45.8	33.9	36.2	4.9	-36.9	0.0	0.6	50.6	38.7	74	54	-23.4	-15.3	V
4.874	3.0	55.0	50.7	33.7	3.8	-37.9	0.0	0.6	55.2	50.8	74	54	-18.8	-3.2	H
7.311	3.0	46.3	33.6	36.2	4.9	-36.9	0.0	0.6	51.0	38.4	74	54	-23.0	-15.6	H
High Ch															
4.924	3.0	54.8	50.0	33.7	3.8	-37.9	0.0	0.6	55.0	50.2	74	54	-19.0	-3.8	V
7.386	3.0	44.5	33.2	36.2	4.9	-36.9	0.0	0.6	49.5	38.2	74	54	-24.5	-15.8	V
4.924	3.0	56.4	53.0	33.7	3.8	-37.9	0.0	0.6	56.6	53.2	74	54	-17.4	-0.8	H
7.386	3.0	47.3	35.6	36.2	4.9	-36.9	0.0	0.6	52.3	40.6	74	54	-21.7	-13.4	H

Note: No other emissions were detected above the system noise floor.


f	Measurement Frequency	Amp	Preamp Gain	Avg Lim	Average Field Strength Limit
Dist	Distance to Antenna	D Corr	Distance Correct to 3 meters	Pk Lim	Peak Field Strength Limit
Read	Analyzer Reading	Avg	Average Field Strength @ 3 m	Avg Mar	Margin vs. Average Limit
AF	Antenna Factor	Peak	Calculated Peak Field Strength	Pk Mar	Margin vs. Peak Limit
CL	Cable Loss	HPF	High Pass Filter		


RESTRICTED BANDEDGE (g MODE, LOW CHANNEL, HORIZONTAL)

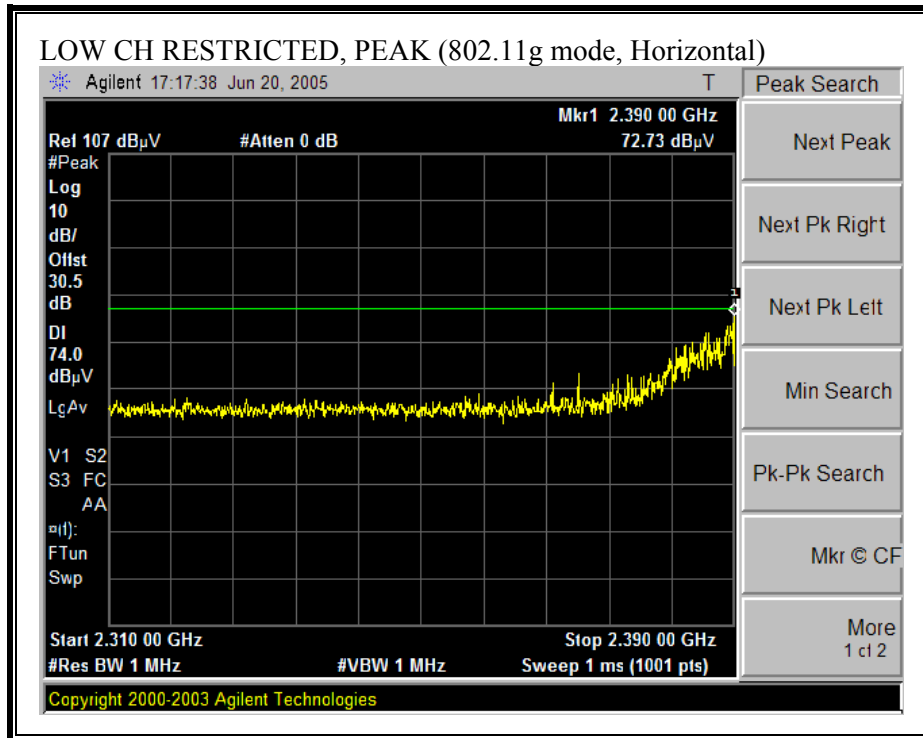

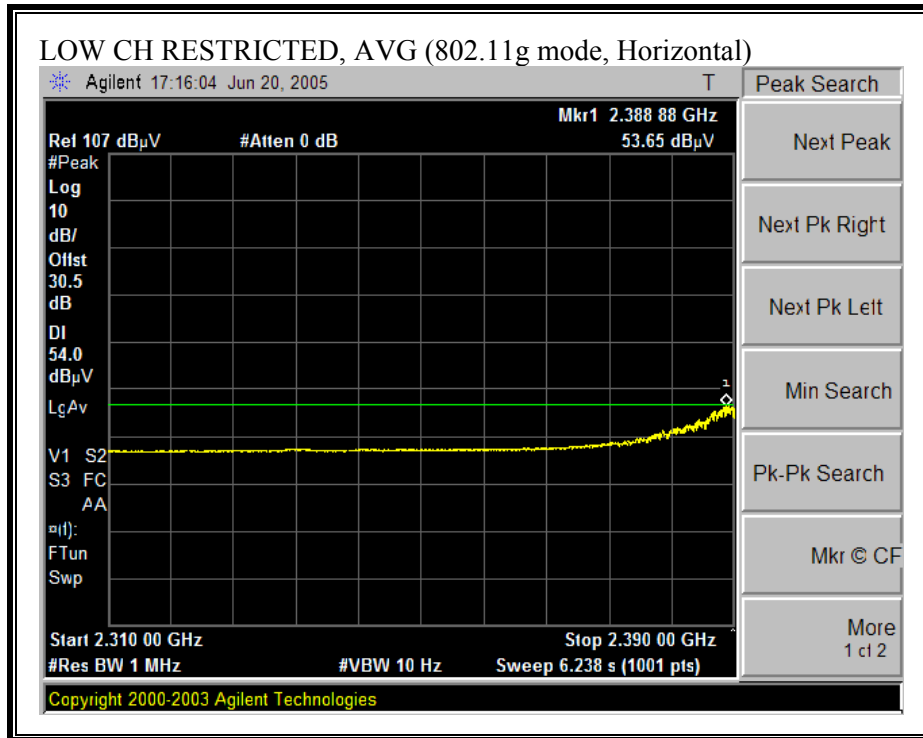



RESTRICTED BANDEDGE (g MODE, LOW CHANNEL, VERTICAL)

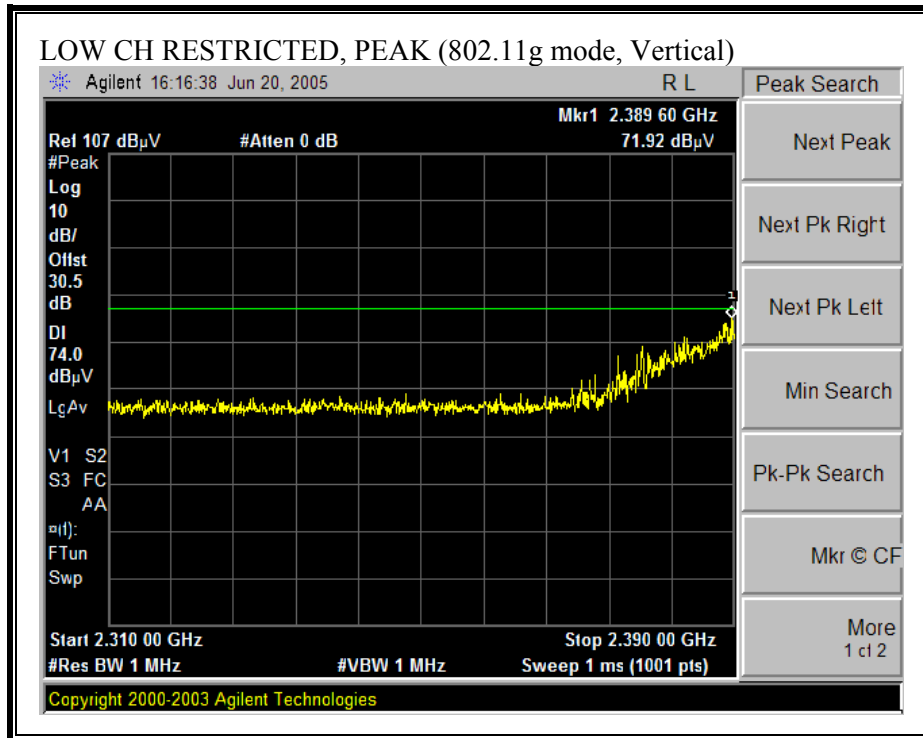

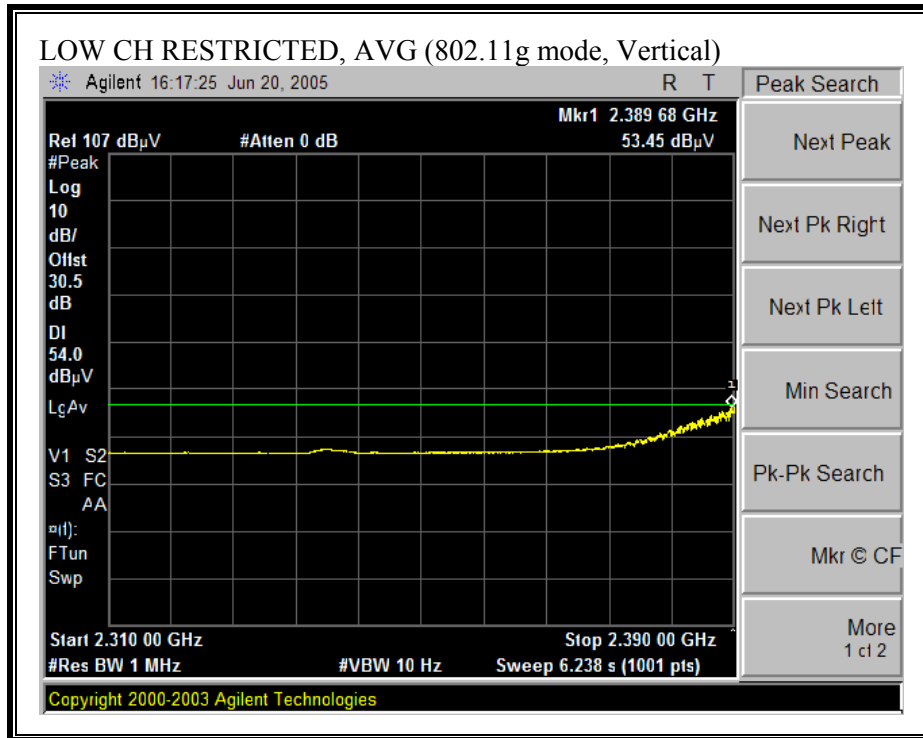



RESTRICTED BANDEDGE (g MODE, HIGH CHANNEL, HORIZONTAL)

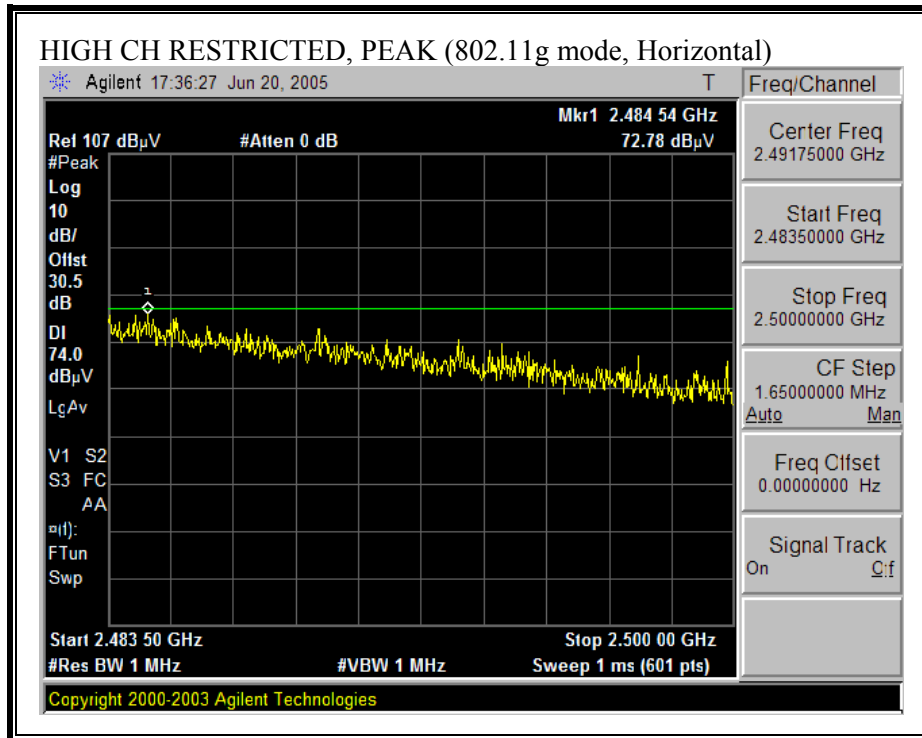

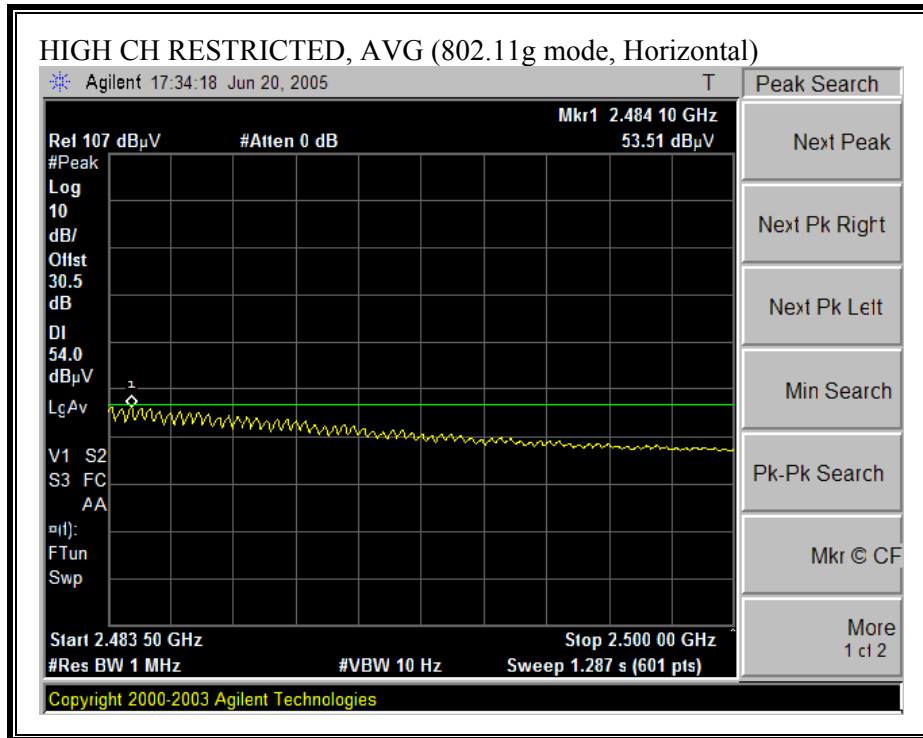

RESTRICTED BANDEDGE (g MODE, HIGH CHANNEL, VERTICAL)

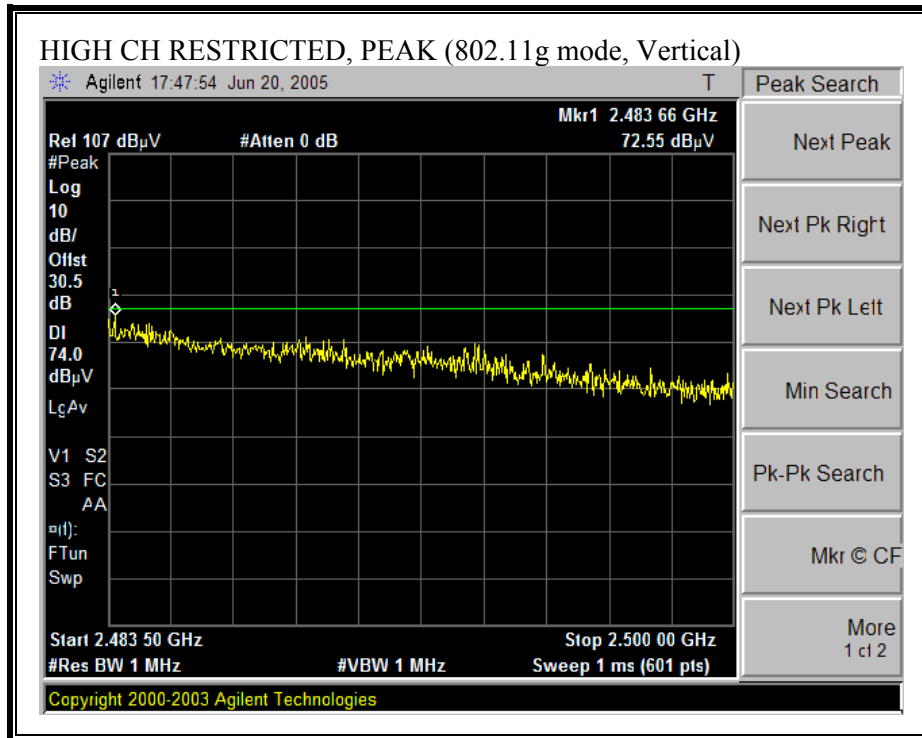

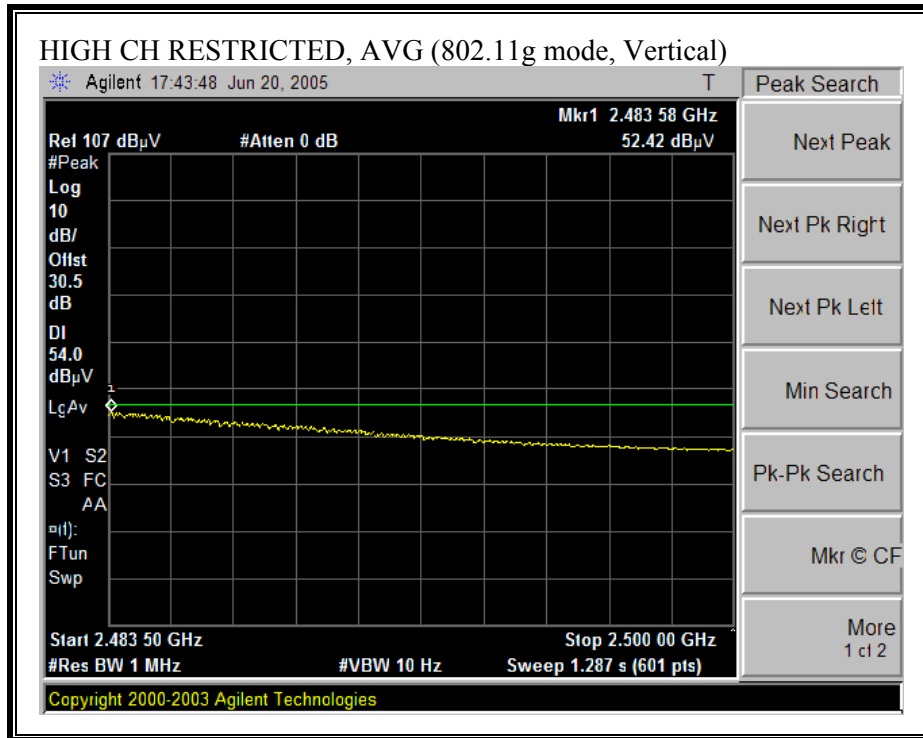

HARMONICS AND SPURIOUS EMISSIONS (g MODE)

06/22/05 **High Frequency Measurement**
 Compliance Certification Services, Morgan Hill Open Field Site

Test Engr: Chin Pang
 Project #: 05I3515-1
 Company: Buffalo Inc.
 High Power CardBus Adapter
 EUT M/N: WLI-CB-G54HP
 Test Target: FCC 15.247
 Mode Oper: g mode, TX, with internal antenna
 Average Power Meter: Low = 16 dBm, Mid = 16 dBm, High = 16 dBm

Test Equipment:

EMCO Horn 1-18GHz T60; S/N: 2238 @3m	Pre-amplifier 1-26GHz T63 Miteq 646456	Pre-amplifier 26-40GHz	Horn > 18GHz
Hi Frequency Cables 2 foot cable	3 foot cable	4 foot cable	12 foot cable
3_Chin			12_Vien
			HPF HPF_4.0GHz
			Reject Filter


Peak Measurements
 RBW=VBW=1MHz
Average Measurements
 RBW=1MHz; VBW=10Hz


f GHz	Dist (m)	Read Pk dBuV	Read Avg. dBuV	AF dB/m	CL dB	Amp dB	D Corr dB	Fltr dB	Peak dBuV/m	Avg dBuV/m	Pk Lim dBuV/m	Avg Lim dBuV/m	Pk Mar dB	Avg Mar dB	Notes (V/H)
Low ch															
4.824	3.0	66.5	43.5	33.6	3.3	-37.9	0.0	0.6	66.1	43.1	74	54	-7.9	-10.9	V
4.824	3.0	60.0	42.4	33.6	3.3	-37.9	0.0	0.6	59.6	42.0	74	54	-14.4	-12.0	H
Mid ch															
4.874	3.0	66.7	46.5	33.7	3.3	-37.9	0.0	0.6	66.4	46.2	74	54	-7.6	-7.8	V
7.311	3.0	54.5	38.2	36.2	4.1	-36.9	0.0	0.6	58.5	42.2	74	54	-15.5	-11.8	V
4.874	3.0	65.0	46.0	33.7	3.3	-37.9	0.0	0.6	64.7	45.7	74	54	-9.3	-8.3	H
7.311	3.0	53.5	37.8	36.2	4.1	-36.9	0.0	0.6	57.5	41.8	74	54	-16.5	-12.2	H
High Ch															
4.924	3.0	70.0	49.5	33.7	3.3	-37.9	0.0	0.6	69.8	49.3	74	54	-4.2	-4.7	V
7.386	3.0	56.7	40.0	36.2	4.1	-36.9	0.0	0.6	60.9	44.2	74	54	-13.1	-9.8	V
4.924	3.0	66.8	46.5	33.7	3.3	-37.9	0.0	0.6	66.6	46.3	74	54	-7.4	-7.7	H
7.386	3.0	54.0	38.0	36.2	4.1	-36.9	0.0	0.6	58.2	42.2	74	54	-15.8	-11.8	H
Note: No other emissions were detected above the system noise floor.															

f	Measurement Frequency	Amp	Preamp Gain	Avg Lim	Average Field Strength Limit
Dist	Distance to Antenna	D Corr	Distance Correct to 3 meters	Pk Lim	Peak Field Strength Limit
Read	Analyzer Reading	Avg	Average Field Strength @ 3 m	Avg Mar	Margin vs. Average Limit
AF	Antenna Factor	Peak	Calculated Peak Field Strength	Pk Mar	Margin vs. Peak Limit
CL	Cable Loss	HPF	High Pass Filter		


7.2.2.1 WLE-HG-NDR ANTENNA


RESTRICTED BANDEDGE (b MODE, LOW CHANNEL, HORIZONTAL)

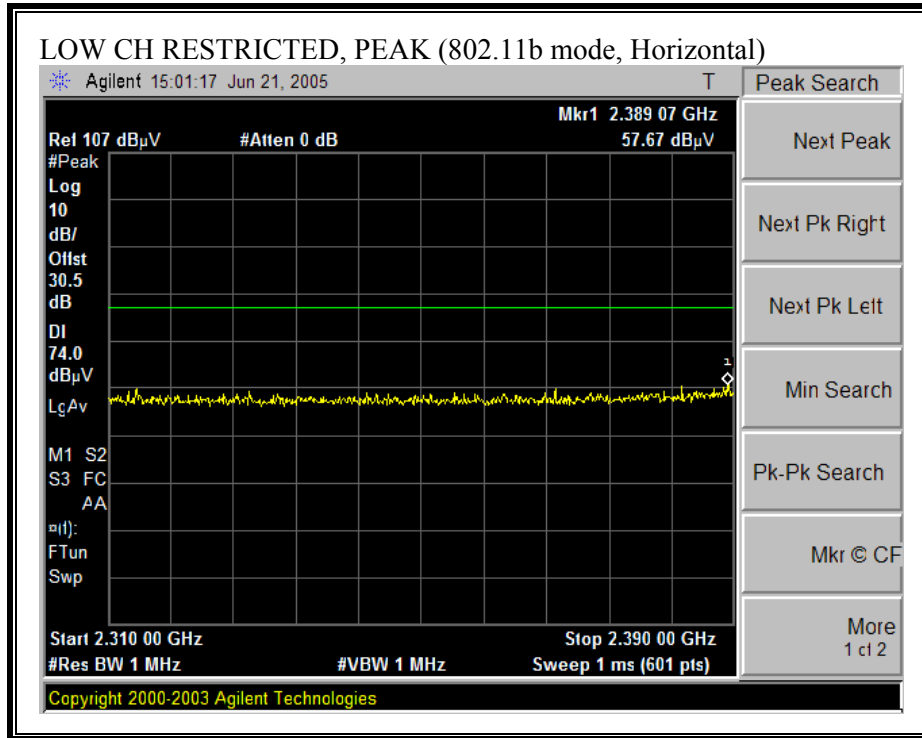

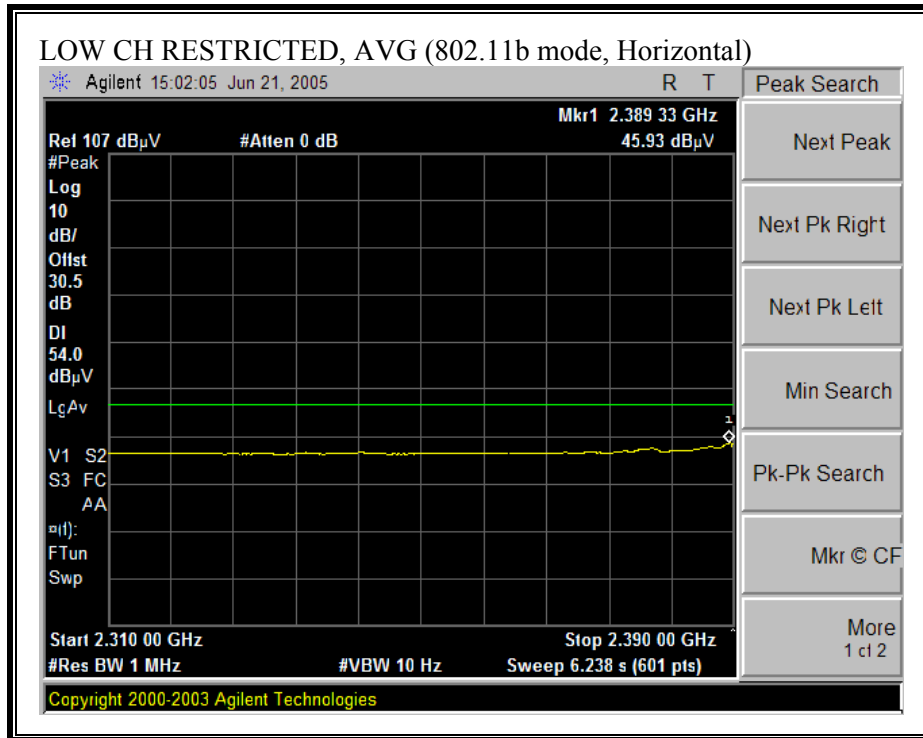



RESTRICTED BANDEDGE (b MODE, LOW CHANNEL, VERTICAL)

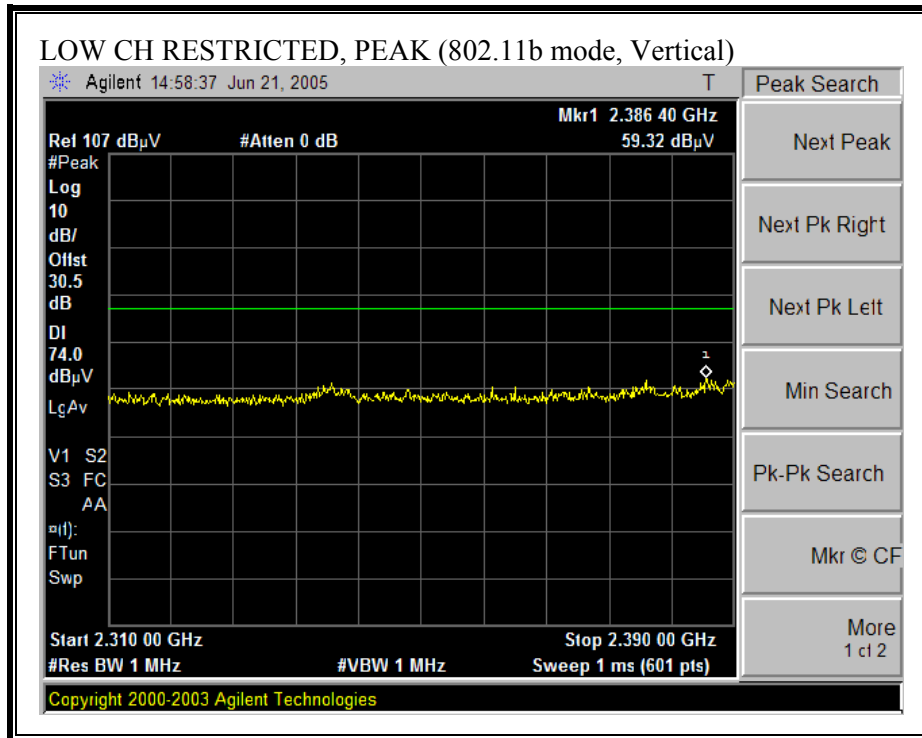

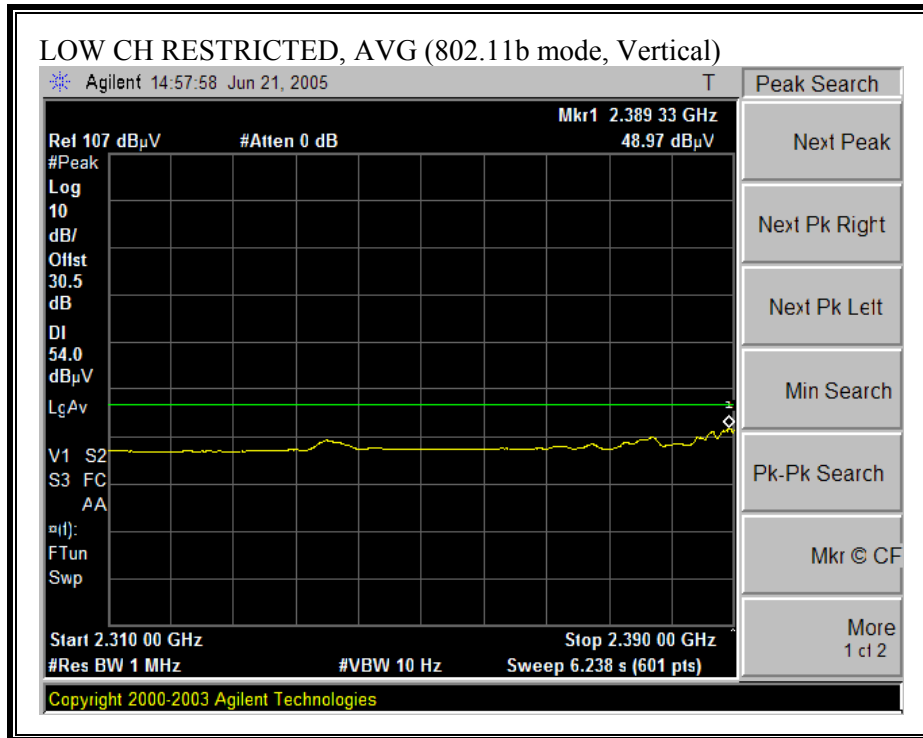



RESTRICTED BANDEDGE (b MODE, HIGH CHANNEL, HORIZONTAL)

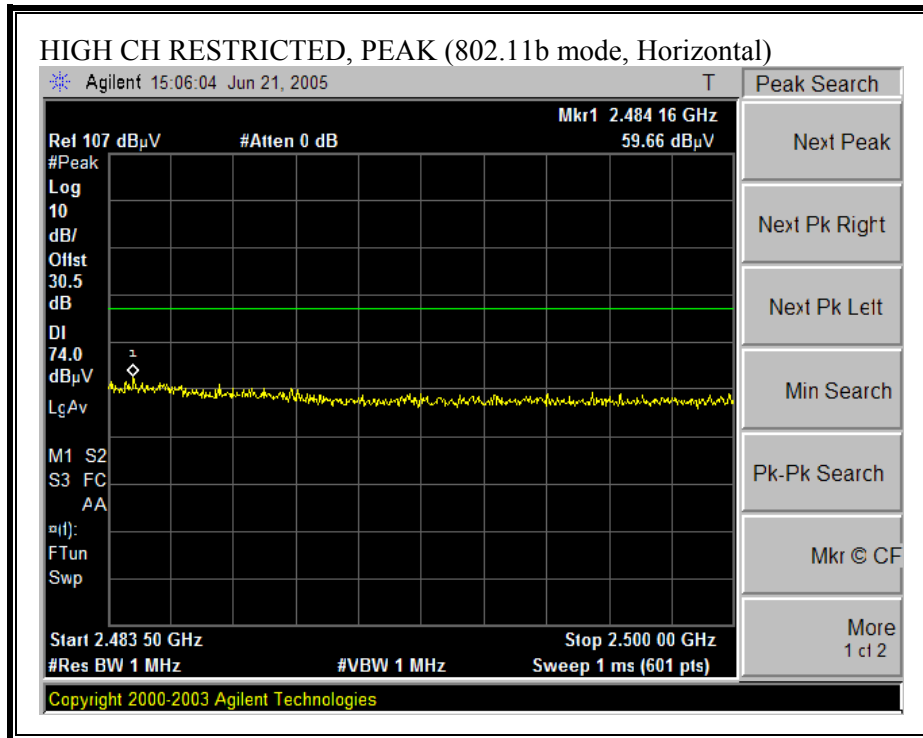

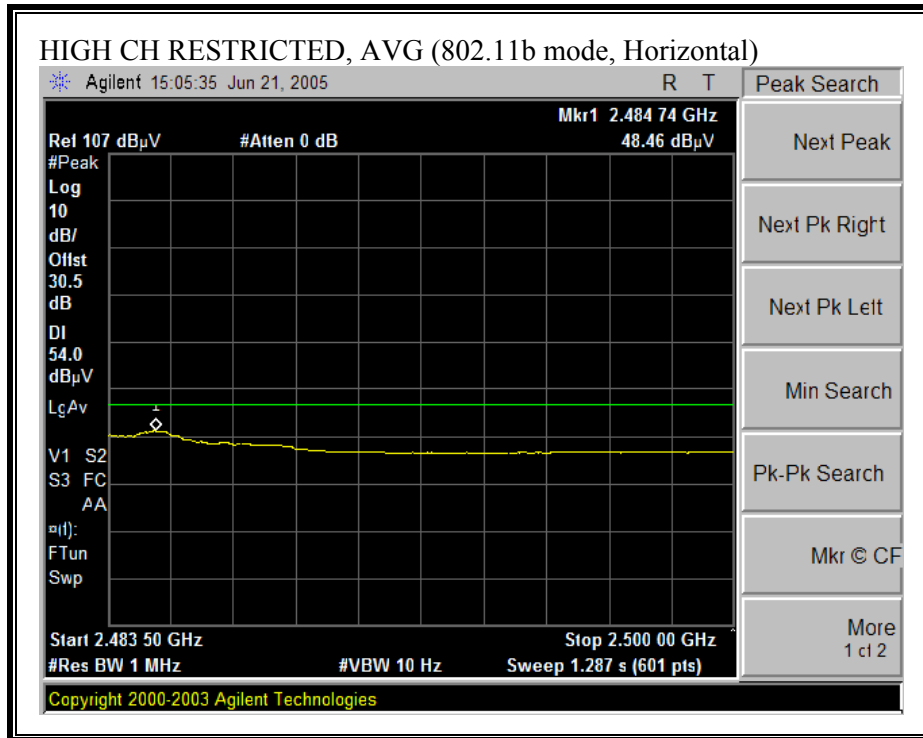

RESTRICTED BANDEDGE (b MODE, HIGH CHANNEL, VERTICAL)

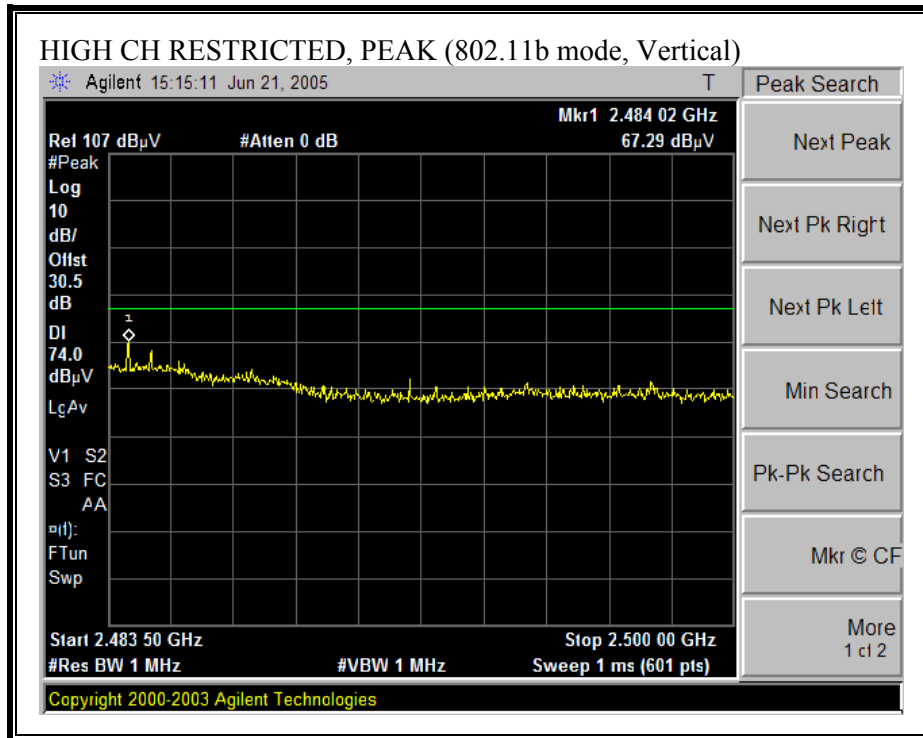

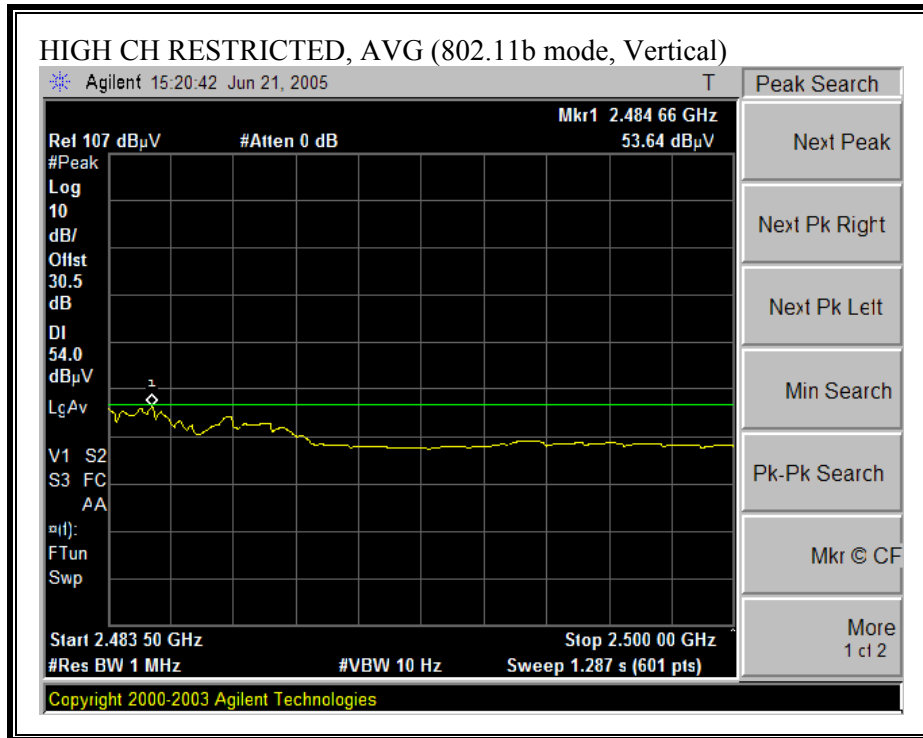

HARMONICS AND SPURIOUS EMISSIONS (b MODE)

06/22/05 High Frequency Measurement
 Compliance Certification Services, Morgan Hill Open Field Site

Test Engr: Chin Pang
 Project #: 05I3515-1
 Company: Buffalo Inc.
 High Power CardBus Adapter
 EUT M/N: WLI-CB-G54HP
 Test Target: FCC 15.247
 Mode Oper: b mode, TX, with WLE-HG-NDR antenna (4.1dBi gain)
 Average Power Meter: Low = 16 dBm, Mid = 16 dBm, High = 16 dBm

Test Equipment:

EMCO Horn 1-18GHz | Pre-amplifier 1-26GHz | Pre-amplifier 26-40GHz | Horn > 18GHz | Limit
 T60; S/N: 2238 @3m | T63 Miteq 646456 | | | FCC 15.205

Hi Frequency Cables: 2 foot cable | 3 foot cable | 4 foot cable | 12 foot cable
 | | 3_Chin | | 12_Vien

HPF | Reject Filter
 HPF_4.0GHz |


Peak Measurements
 RBW=VBW=1MHz
 Average Measurements
 RBW=1MHz ; VBW=10Hz


f GHz	Dist (m)	Read Pk dBuV	Read Avg. dBuV	AF dB/m	CL dB	Amp dB	D Corr dB	Filtr dB	Peak dBuV/m	Avg dBuV/m	Pk Lim dBuV/m	Avg Lim dBuV/m	Pk Mar dB	Avg Mar dB	Notes (V/H)
Low ch															
4.824	3.0	57.2	49.5	33.6	3.3	-37.9	0.0	0.6	56.8	49.1	74	54	-17.2	-4.9	V
4.824	3.0	56.5	53.0	33.6	3.3	-37.9	0.0	0.6	56.1	52.6	74	54	-17.9	-1.4	H
Mid ch															
4.874	3.0	57.4	51.3	33.7	3.3	-37.9	0.0	0.6	57.1	51.0	74	54	-16.9	-3.0	V
7.311	3.0	47.0	35.0	36.2	4.1	-36.9	0.0	0.6	51.0	39.0	74	54	-23.0	-15.0	V
4.874	3.0	54.6	50.0	33.7	3.3	-37.9	0.0	0.6	54.3	49.7	74	54	-19.7	-4.3	H
7.311	3.0	45.7	34.3	36.2	4.1	-36.9	0.0	0.6	49.7	38.3	74	54	-24.3	-15.7	H
High Ch															
4.924	3.0	56.2	52.1	33.7	3.3	-37.9	0.0	0.6	56.0	51.8	74	54	-18.0	-2.2	V
7.386	3.0	46.4	34.8	36.2	4.1	-36.9	0.0	0.6	50.6	39.0	74	54	-23.4	-15.0	V
4.924	3.0	56.2	52.5	33.7	3.3	-37.9	0.0	0.6	56.0	52.3	74	54	-18.0	-1.7	H
7.386	3.0	46.6	34.8	36.2	4.1	-36.9	0.0	0.6	50.8	39.0	74	54	-23.2	-15.0	H

Note: No other emissions were detected above the system noise floor.


f	Measurement Frequency	Amp	Preamp Gain	Avg Lim	Average Field Strength Limit
Dist	Distance to Antenna	D Corr	Distance Correct to 3 meters	Pk Lim	Peak Field Strength Limit
Read	Analyzer Reading	Avg	Average Field Strength @ 3 m	Avg Mar	Margin vs. Average Limit
AF	Antenna Factor	Peak	Calculated Peak Field Strength	Pk Mar	Margin vs. Peak Limit
CL	Cable Loss	HPF	High Pass Filter		


RESTRICTED BANDEDGE (g MODE, LOW CHANNEL, HORIZONTAL)

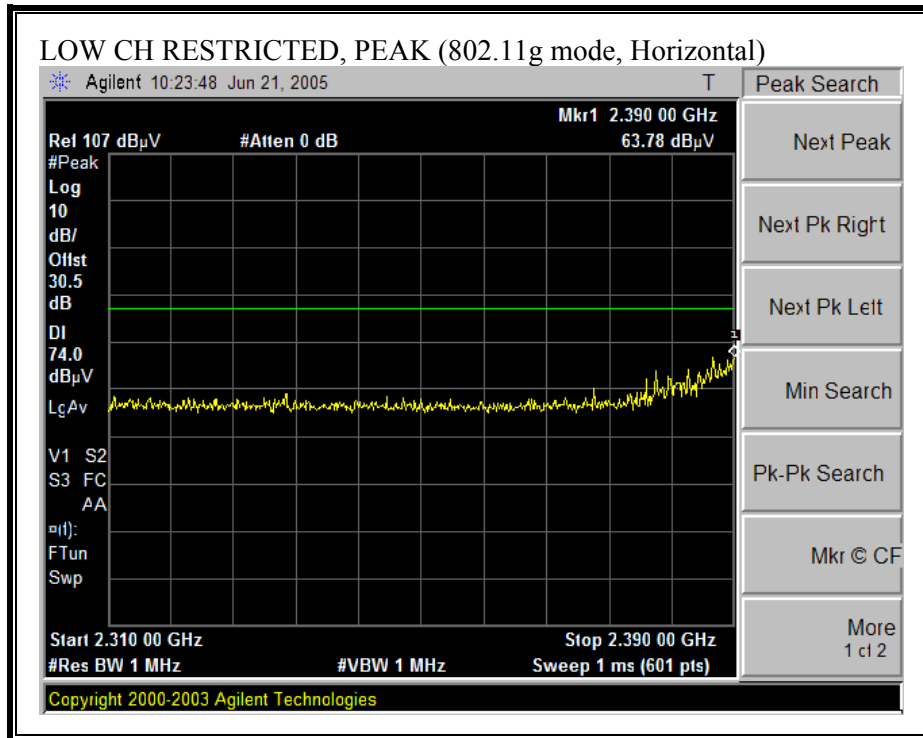

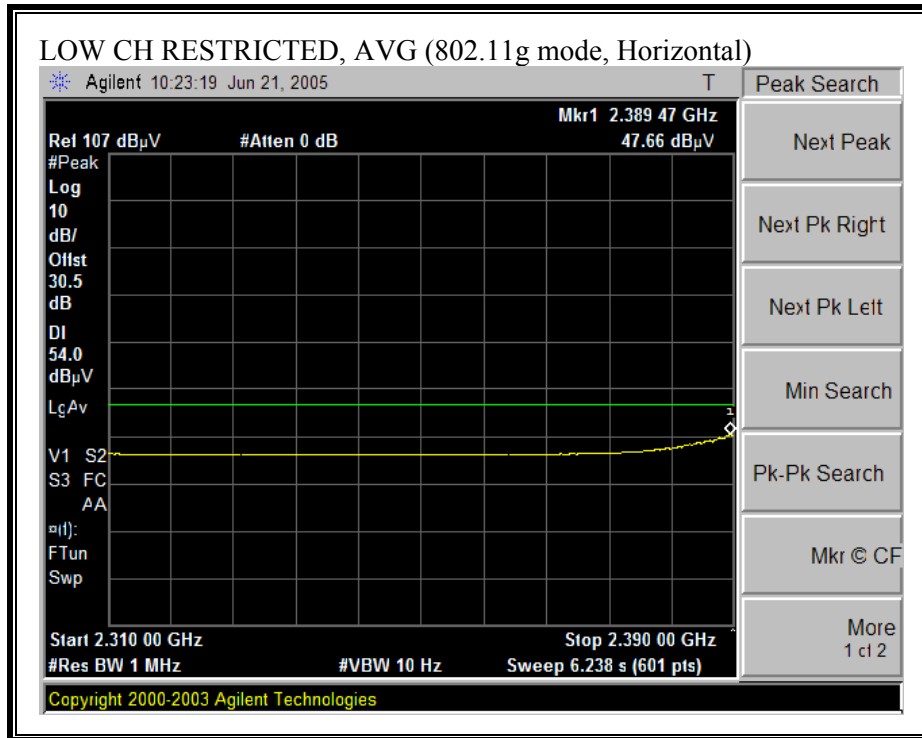



RESTRICTED BANDEDGE (g MODE, LOW CHANNEL, VERTICAL)

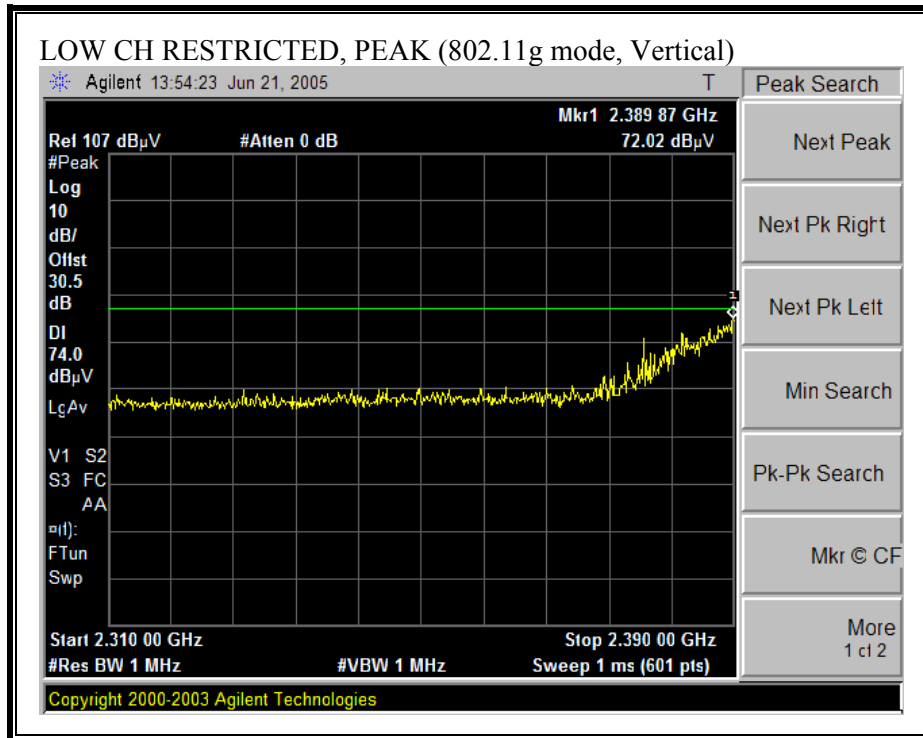

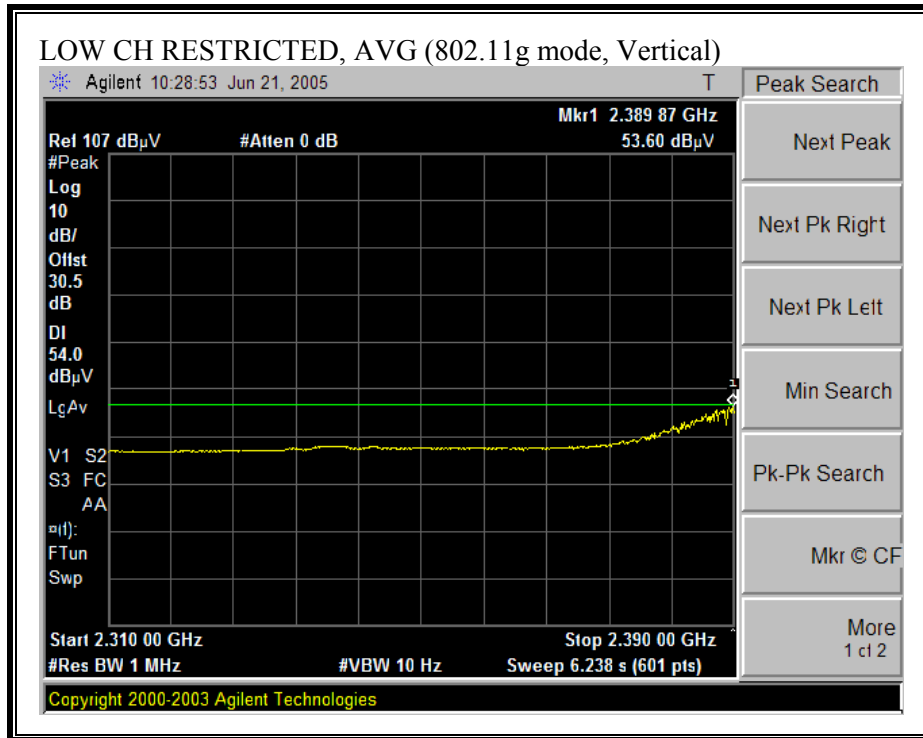



RESTRICTED BANDEDGE (g MODE, HIGH CHANNEL, HORIZONTAL)

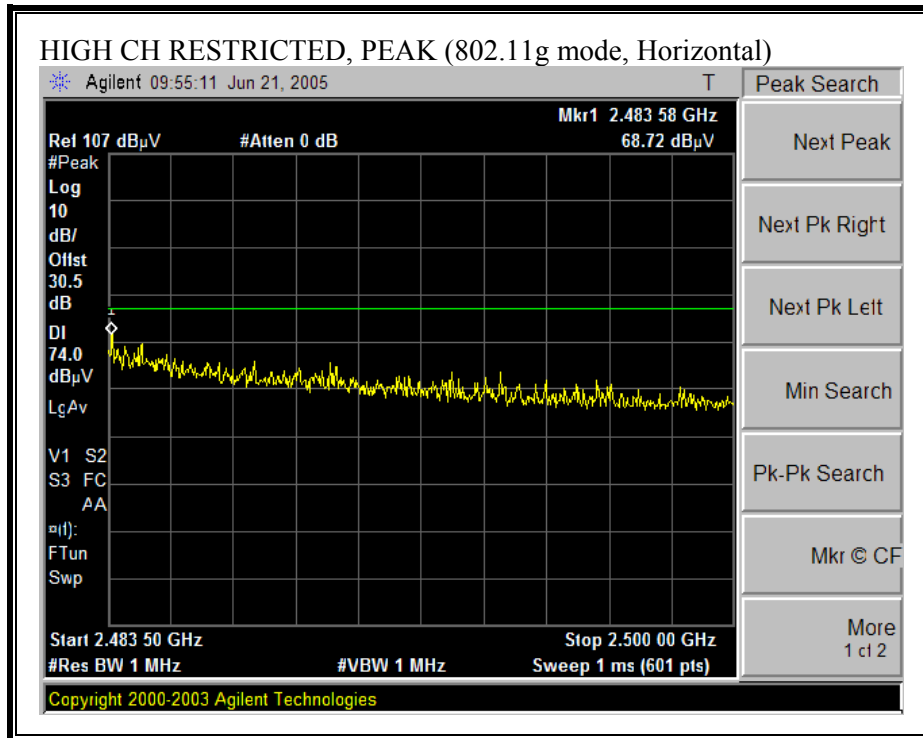

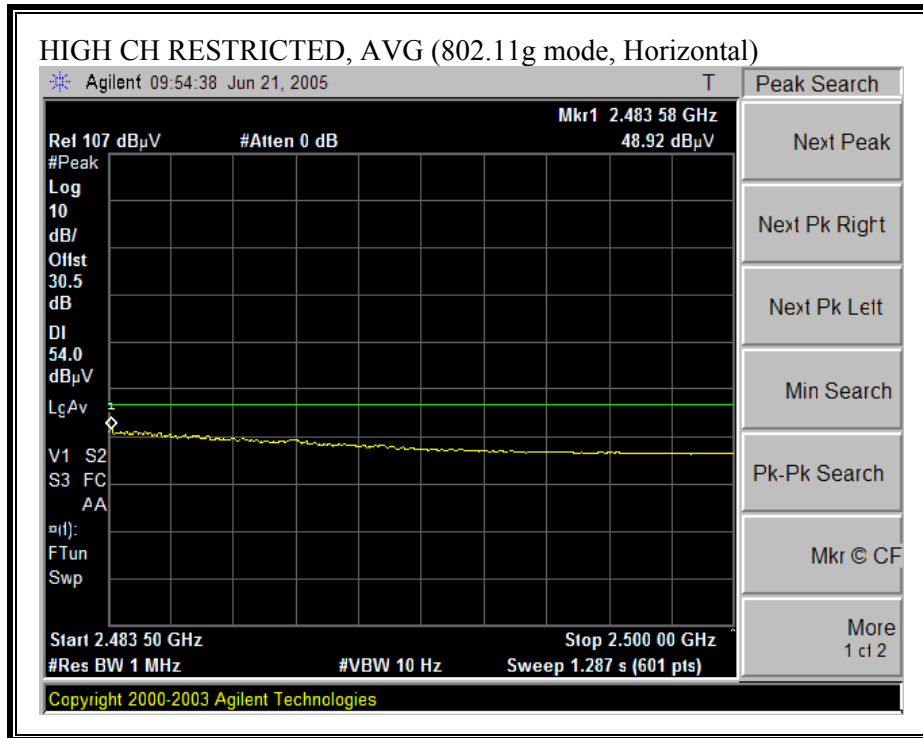

RESTRICTED BANDEDGE (g MODE, HIGH CHANNEL, VERTICAL)

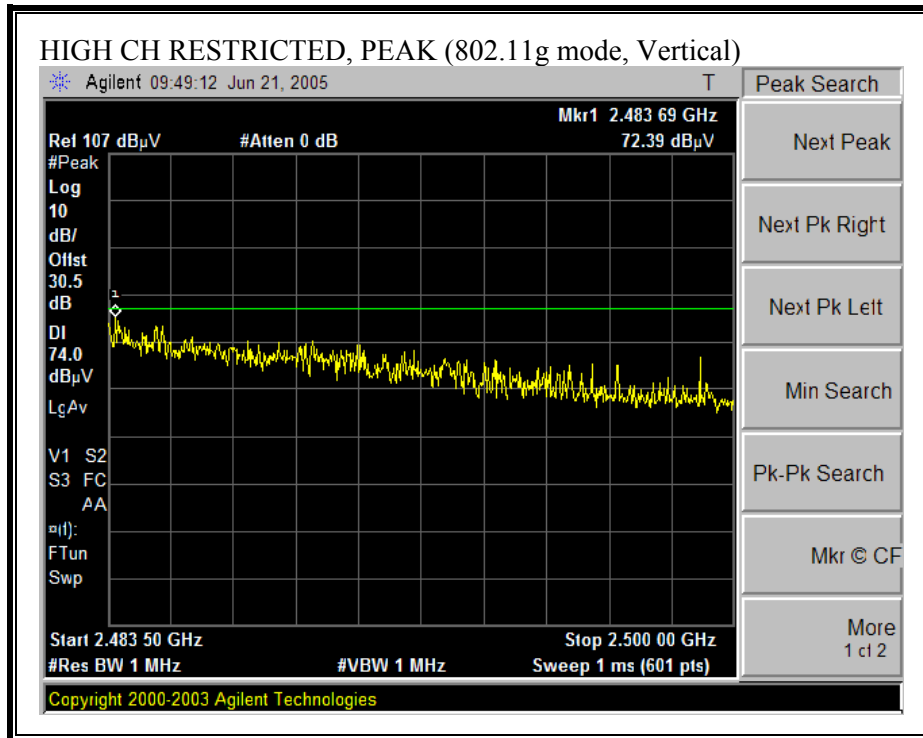

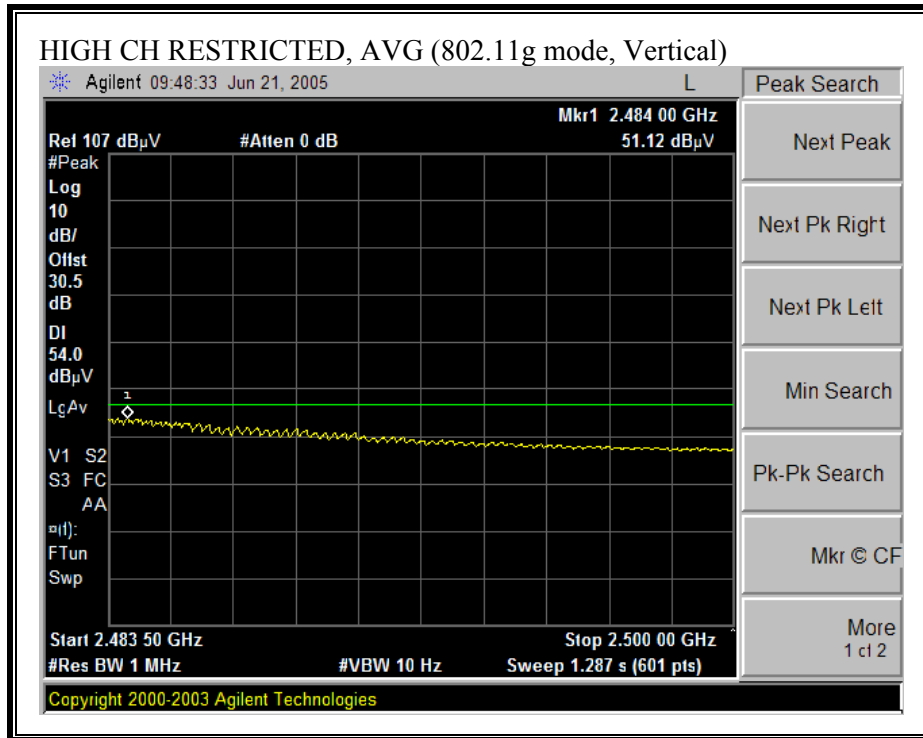

HARMONICS AND SPURIOUS EMISSIONS (g MODE)

06/22/05 High Frequency Measurement
 Compliance Certification Services, Morgan Hill Open Field Site

Test Engr: Chin Pang
 Project #: 05I3515-1
 Company: Buffalo Inc.
 High Power CardBus Adapter
 EUT M/N: WLI-CB-G54HP
 Test Target: FCC 15.247
 Mode Oper: g mode, TX, with WLE-HG-NDR antenna (44.1dBi gain)
 Average Power Meter: Low = 16 dBm, Mid = 16 dBm, High = 16 dBm

Test Equipment:

EMCO Horn 1-18GHz
 T60; S/N: 2238 @3m

Pre-amplifier 1-26GHz
 T63 Miteq 646456

Pre-amplifier 26-40GHz

Horn > 18GHz

Limit
 FCC 15.205

Hi Frequency Cables
 2 foot cable
 3 foot cable
 4 foot cable
 12 foot cable

3_Chin
 12_Vien

HPF
 HPF_4.0GHz

Reject Filter

Peak Measurements
 RBW=VBW=1MHz

Average Measurements
 RBW=1MHz ; VBW=10Hz


f GHz	Dist (m)	Read Pk dBuV	Read Avg. dBuV	AF dB/m	CL dB	Amp dB	D Corr dB	Filtr dB	Peak dBuV/m	Avg dBuV/m	Pk Lim dBuV/m	Avg Lim dBuV/m	Pk Mar dB	Avg Mar dB	Notes (V/H)
Low ch															
4.824	3.0	63.0	44.0	33.6	3.3	-37.9	0.0	0.6	62.6	43.6	74	54	-11.4	-10.4	V
4.824	3.0	59.8	41.3	33.6	3.3	-37.9	0.0	0.6	59.4	40.9	74	54	-14.6	-13.1	H
Mid ch															
4.874	3.0	70.2	49.6	33.7	3.3	-37.9	0.0	0.6	69.9	49.3	74	54	-4.1	-4.7	V
7.311	3.0	53.8	36.0	36.2	4.1	-36.9	0.0	0.6	57.8	40.0	74	54	-16.2	-14.0	V
4.874	3.0	65.0	46.0	33.7	3.3	-37.9	0.0	0.6	64.7	45.7	74	54	-9.3	-8.3	H
7.311	3.0	53.5	37.8	36.2	4.1	-36.9	0.0	0.6	57.5	41.8	74	54	-16.5	-12.2	H
High Ch															
4.924	3.0	70.0	50.1	33.7	3.3	-37.9	0.0	0.6	69.8	49.9	74	54	-4.2	-4.1	V
7.386	3.0	53.7	37.0	36.2	4.1	-36.9	0.0	0.6	57.9	41.2	74	54	-16.1	-12.8	V
4.924	3.0	70.2	49.0	33.7	3.3	-37.9	0.0	0.6	70.0	48.8	74	54	-4.0	-5.2	H
7.386	3.0	54.3	38.0	36.2	4.1	-36.9	0.0	0.6	58.5	42.2	74	54	-15.5	-11.8	H


Note: No other emissions were detected above the system noise floor.

f	Measurement Frequency	Amp	Preamp Gain	Avg Lim	Average Field Strength Limit
Dist	Distance to Antenna	D Corr	Distance Correct to 3 meters	Pk Lim	Peak Field Strength Limit
Read	Analyzer Reading	Avg	Average Field Strength @ 3 m	Avg Mar	Margin vs. Average Limit
AF	Antenna Factor	Peak	Calculated Peak Field Strength	Pk Mar	Margin vs. Peak Limit
CL	Cable Loss	HPF	High Pass Filter		


7.2.2.2 WLE-DA ANTENNA


RESTRICTED BANDEDGE (b MODE, LOW CHANNEL, HORIZONTAL)

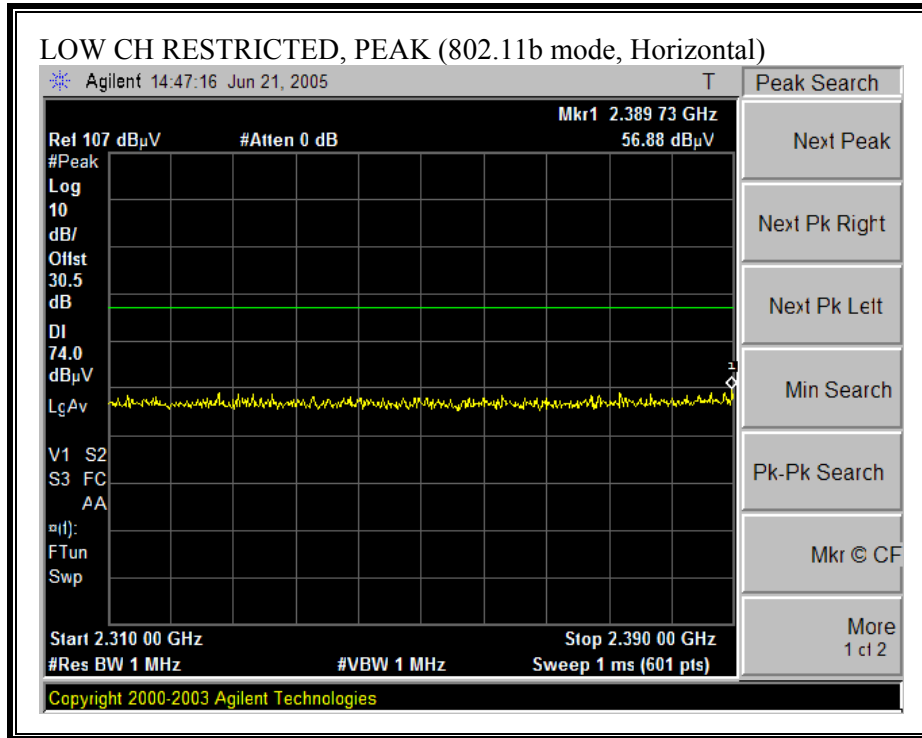

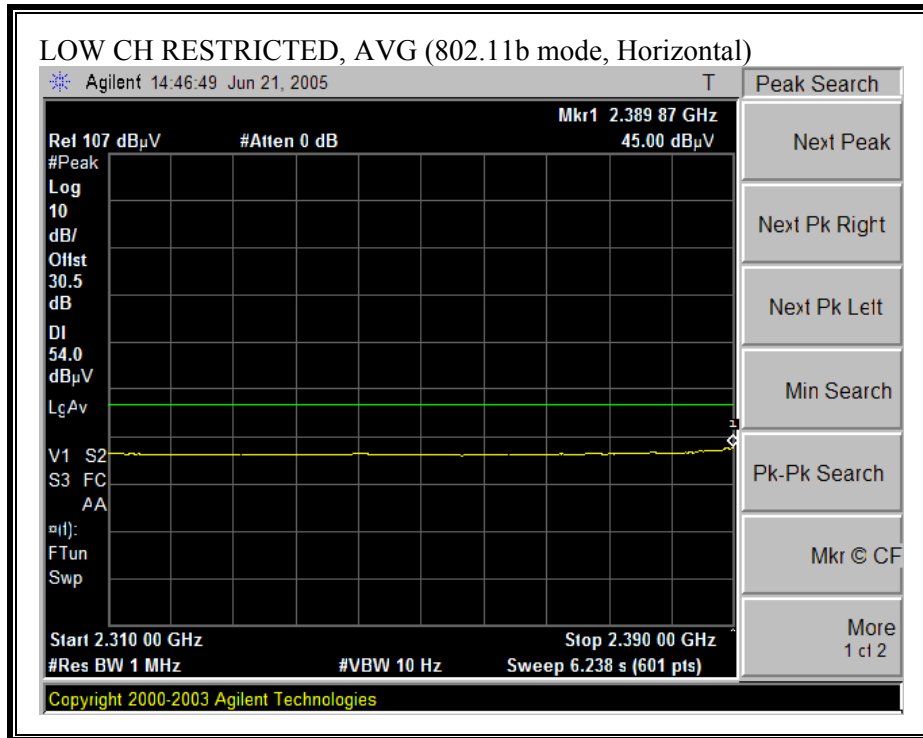



RESTRICTED BANDEDGE (b MODE, LOW CHANNEL, VERTICAL)

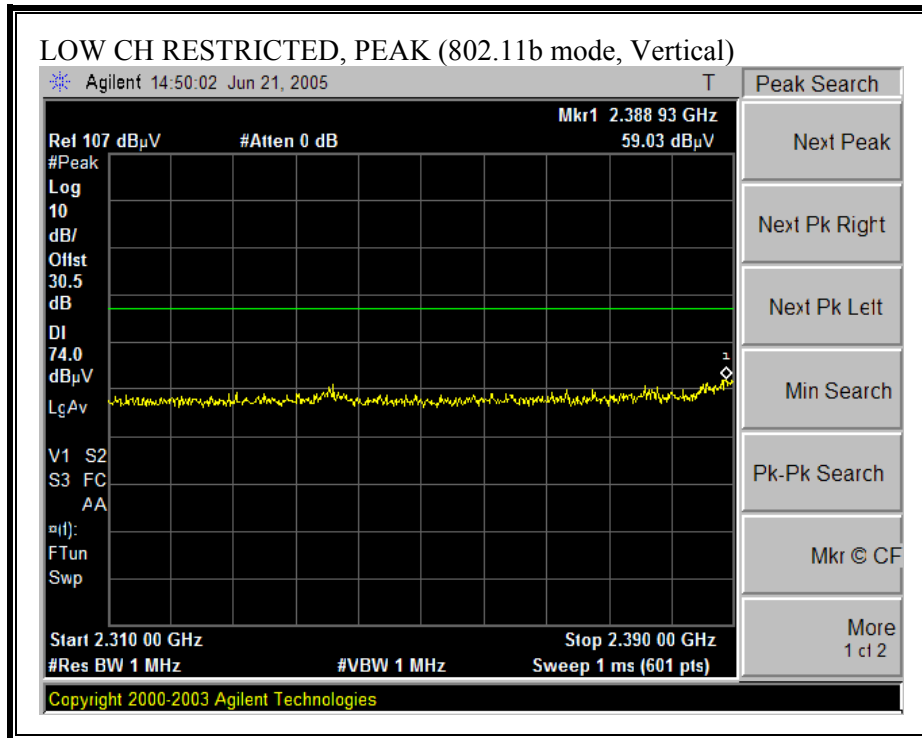

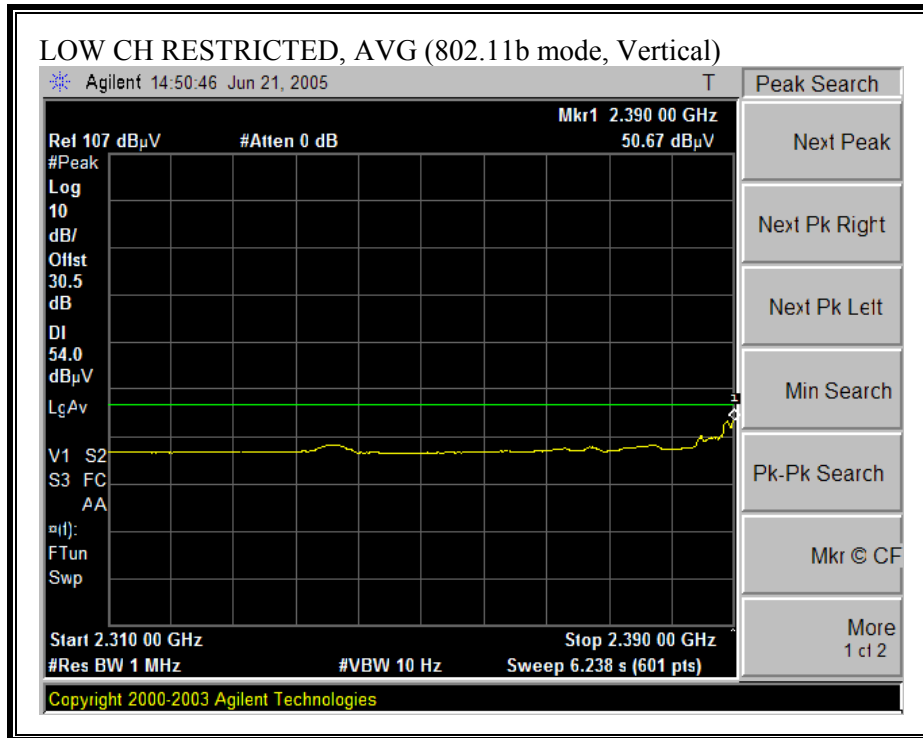



RESTRICTED BANDEDGE (b MODE, HIGH CHANNEL, HORIZONTAL)

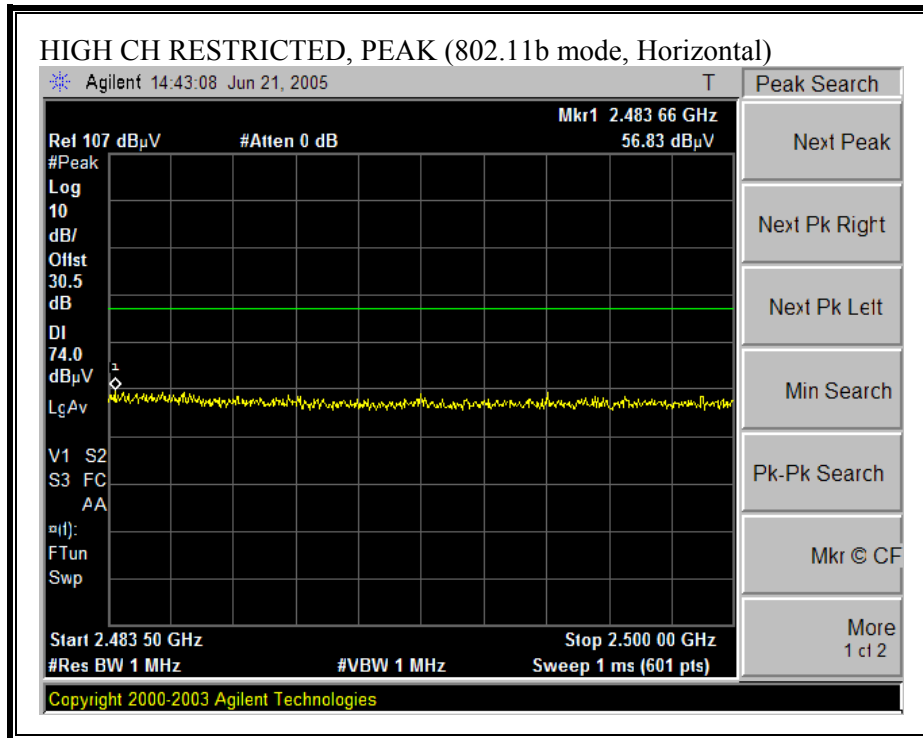

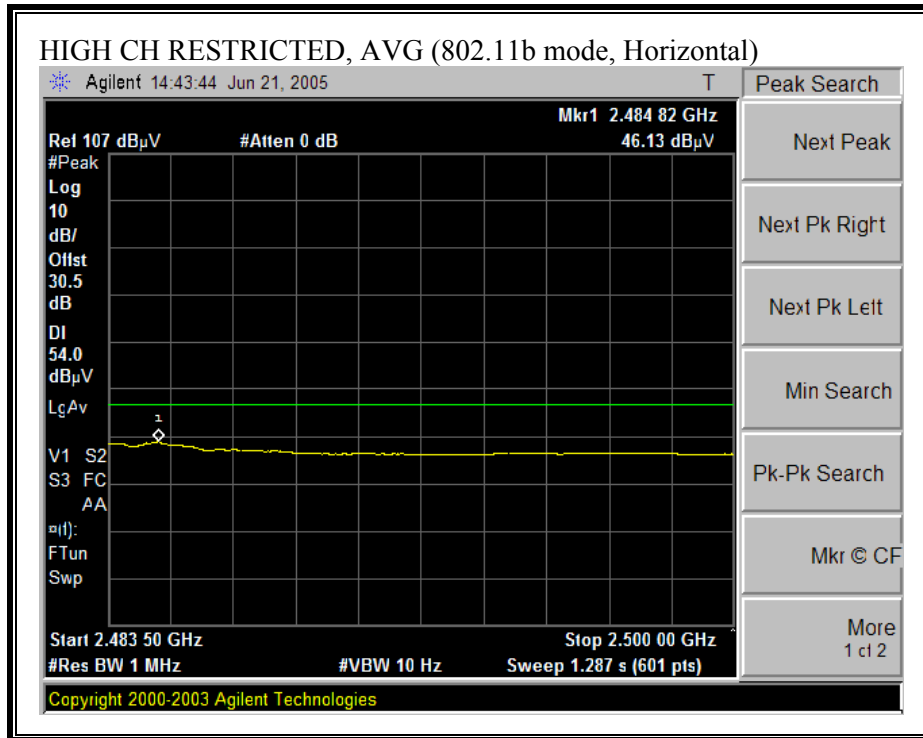

RESTRICTED BANDEDGE (b MODE, HIGH CHANNEL, VERTICAL)

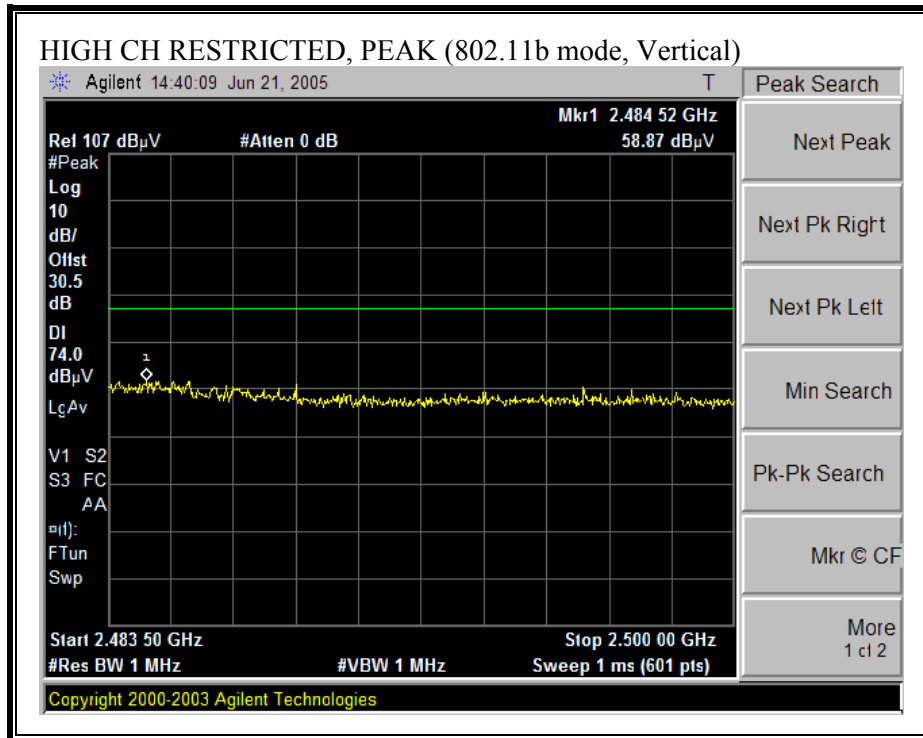

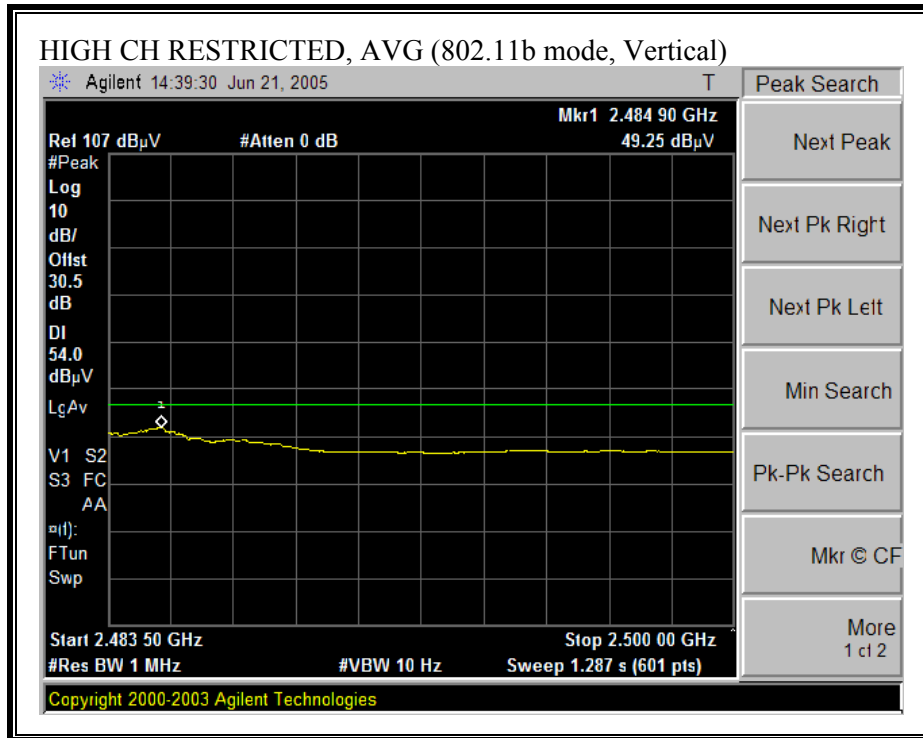

HARMONICS AND SPURIOUS EMISSIONS (b MODE)

06/27/05 High Frequency Measurement
 Compliance Certification Services, Morgan Hill Open Field Site

Test Engr: Chin Pang
 Project #: 05I3515-1
 Company: Buffalo Inc.
 High Power CardBus Adapter
 EUT M/N: WLI-CB-G54HP
 Test Target: FCC 15.247
 Mode Oper: b mode, TX, with WLE-DA antenna
 Average Power Meter: Low = 16 dBm, Mid = 16 dBm, High = 16 dBm

Test Equipment:

EMCO Horn 1-18GHz T60; S/N: 2238 @3m	Pre-amplifier 1-26GHz T63 Miteq 646456	Pre-amplifier 26-40GHz	Horn > 18GHz	Limit FCC 15.205
---	---	------------------------	--------------	---------------------

Hi Frequency Cables

2 foot cable	3 foot cable 3_Chin	4 foot cable	12 foot cable 12_Vien
--------------	------------------------	--------------	--------------------------

HPF
HPF_4.0GHz

Reject Filter

Peak Measurements
RBW=VBW=1MHz


Average Measurements
RBW=1MHz ; VBW=10Hz


f GHz	Dist (m)	Read Pk dBuV	Read Avg. dBuV	AF dB/m	CL dB	Amp dB	D Corr dB	Filtr dB	Peak dBuV/m	Avg dBuV/m	Pk Lim dBuV/m	Avg Lim dBuV/m	Pk Mar dB	Avg Mar dB	Notes (V/H)
Low ch															
4.824	3.0	53.0	46.0	33.6	3.3	-37.9	0.0	0.6	52.6	45.6	74	54	-21.4	-8.4	V
4.824	3.0	54.0	47.8	33.6	3.3	-37.9	0.0	0.6	53.6	47.4	74	54	-20.4	-6.6	H
Mid ch															
4.874	3.0	56.0	51.5	33.7	3.3	-37.9	0.0	0.6	55.7	51.2	74	54	-18.3	-2.8	V
7.311	3.0	47.0	35.3	36.2	4.1	-36.9	0.0	0.6	51.0	39.3	74	54	-23.0	-14.7	V
4.874	3.0	55.5	50.7	33.7	3.3	-37.9	0.0	0.6	55.2	50.4	74	54	-18.8	-3.6	H
7.311	3.0	46.5	35.0	36.2	4.1	-36.9	0.0	0.6	50.5	39.0	74	54	-23.5	-15.0	H
High Ch															
4.924	3.0	57.1	52.5	33.7	3.3	-37.9	0.0	0.6	56.8	52.3	74	54	-17.2	-1.7	V
7.386	3.0	46.5	35.0	36.2	4.1	-36.9	0.0	0.6	50.7	39.2	74	54	-23.3	-14.8	V
4.924	3.0	56.7	52.7	33.7	3.3	-37.9	0.0	0.6	56.5	52.5	74	54	-17.5	-1.5	H
7.386	3.0	46.0	34.7	36.2	4.1	-36.9	0.0	0.6	50.2	38.9	74	54	-23.8	-15.1	H

Note: No other emissions were detected above the system noise floor.


f	Measurement Frequency	Amp	Preamp Gain	Avg Lim	Average Field Strength Limit
Dist	Distance to Antenna	D Corr	Distance Correct to 3 meters	Pk Lim	Peak Field Strength Limit
Read	Analyzer Reading	Avg	Average Field Strength @ 3 m	Avg Mar	Margin vs. Average Limit
AF	Antenna Factor	Peak	Calculated Peak Field Strength	Pk Mar	Margin vs. Peak Limit
CL	Cable Loss	HPF	High Pass Filter		


RESTRICTED BANDEDGE (g MODE, LOW CHANNEL, HORIZONTAL)

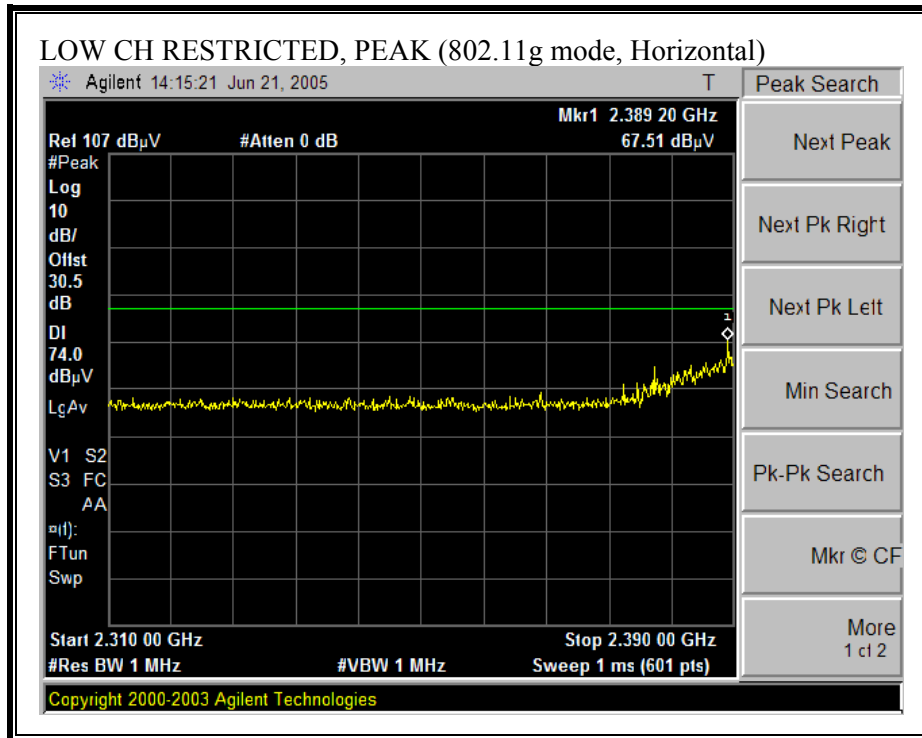

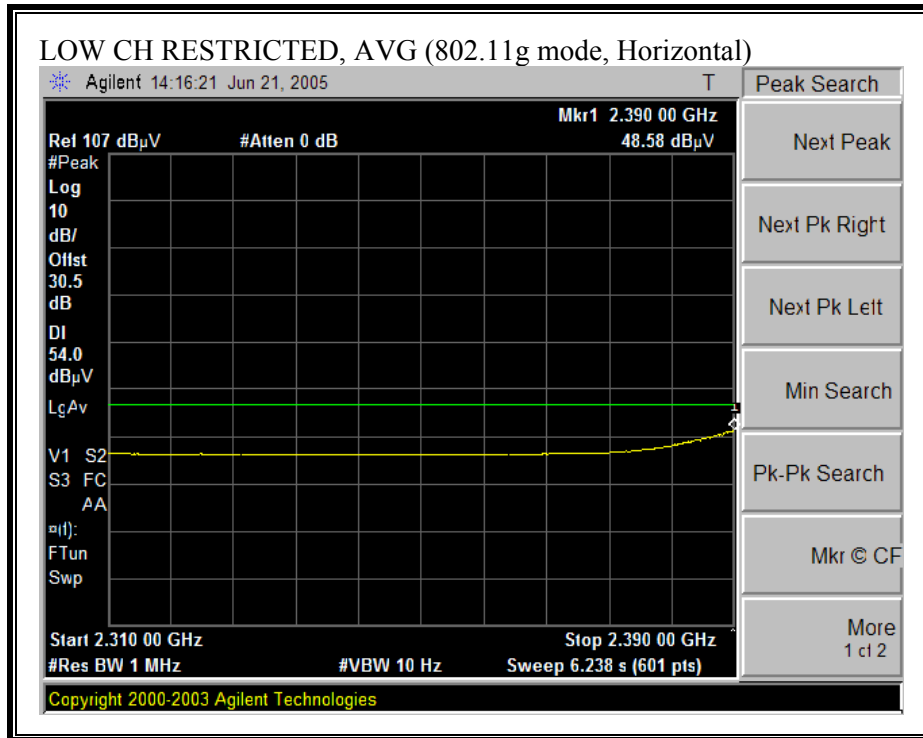



RESTRICTED BANDEDGE (g MODE, LOW CHANNEL, VERTICAL)

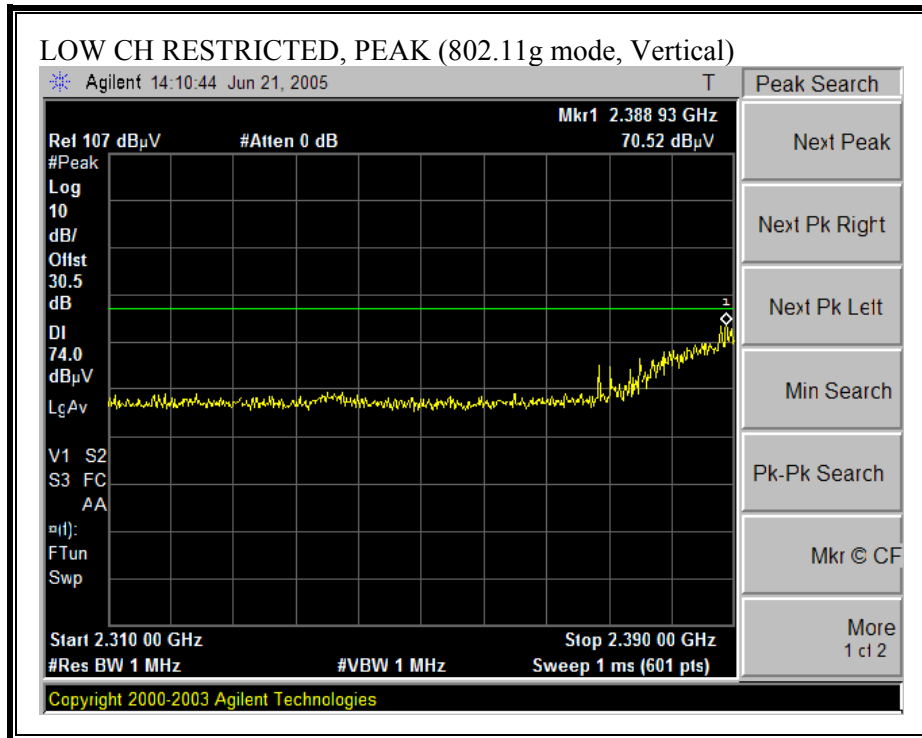

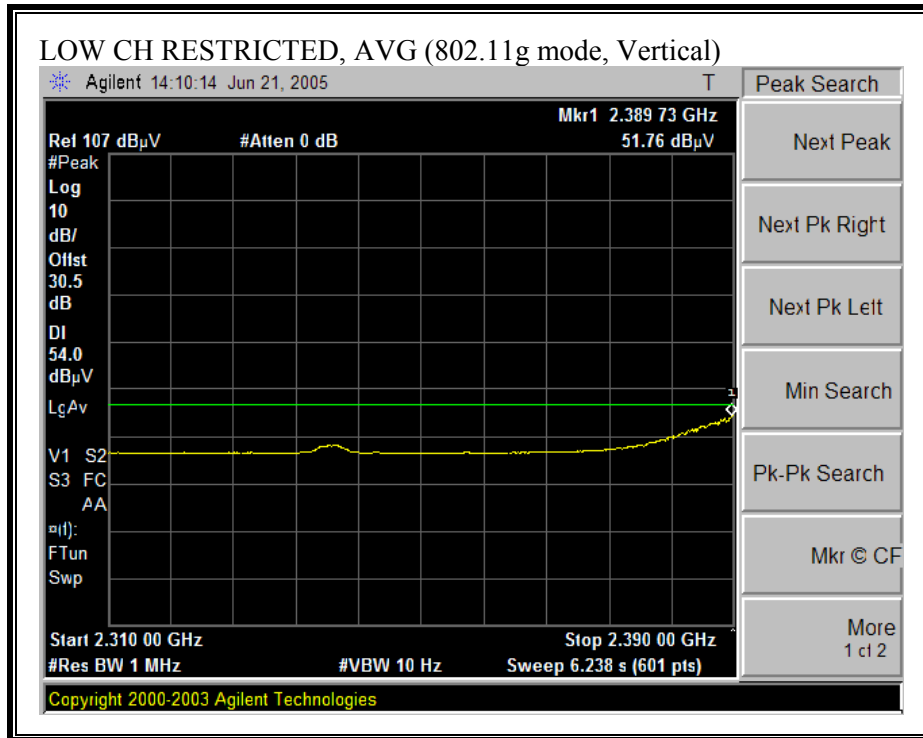



RESTRICTED BANDEDGE (g MODE, HIGH CHANNEL, HORIZONTAL)

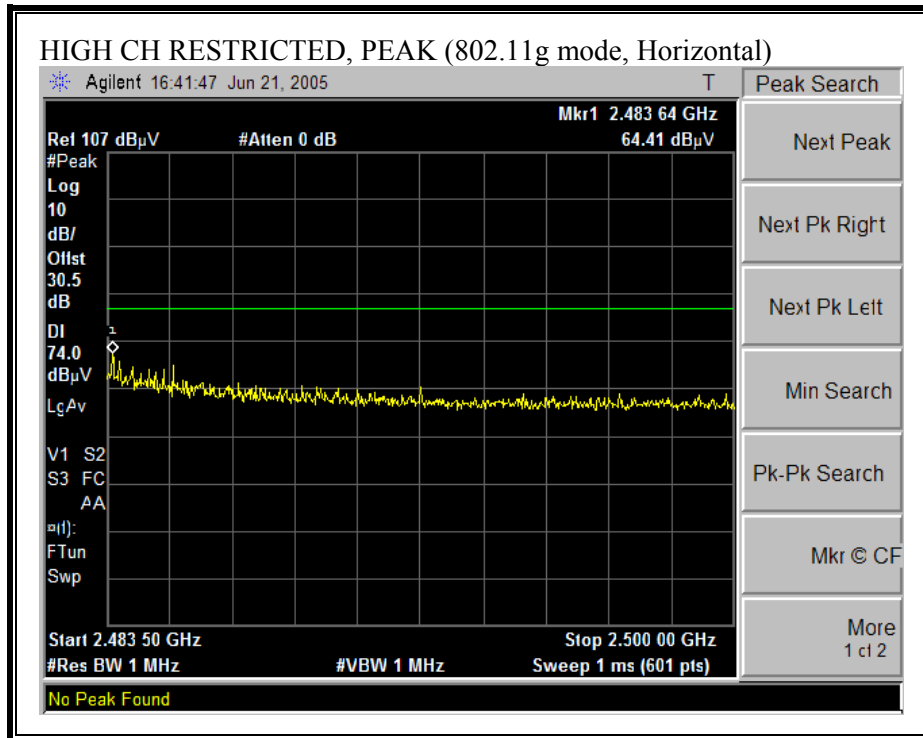

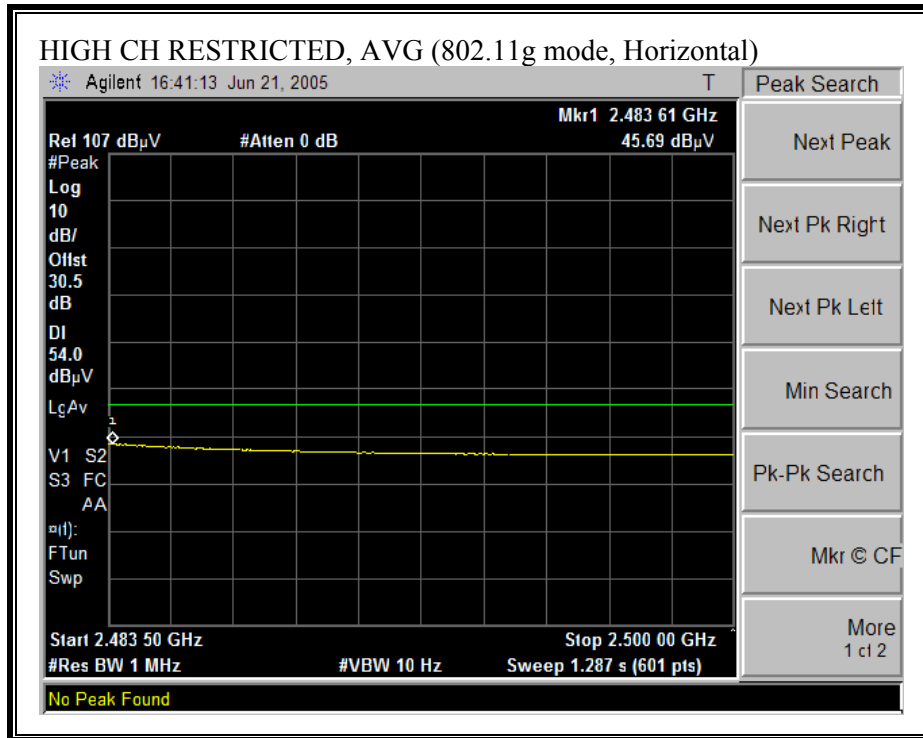

RESTRICTED BANDEDGE (g MODE, HIGH CHANNEL, VERTICAL)

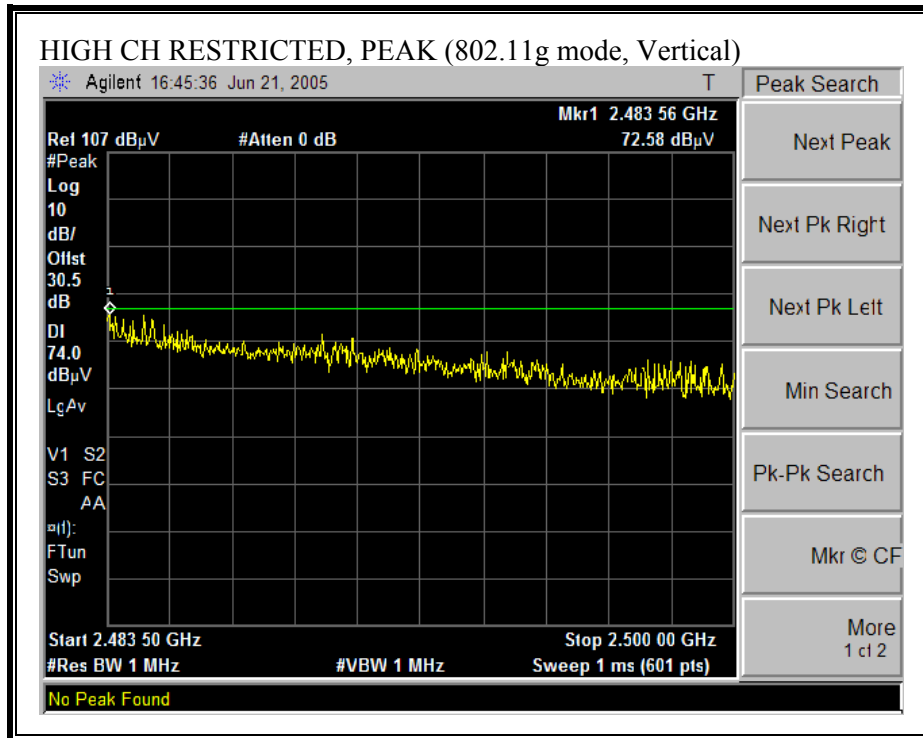

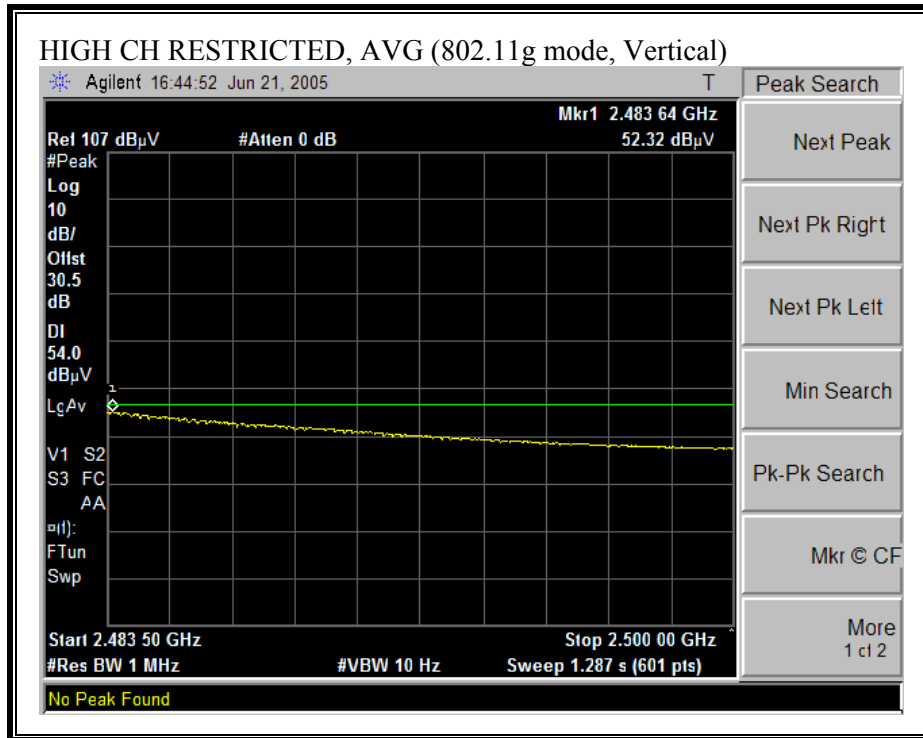

HARMONICS AND SPURIOUS EMISSIONS (g MODE)

06/22/05 **High Frequency Measurement**
 Compliance Certification Services, Morgan Hill Open Field Site

Test Engr:Chin Pang
 Project #:05I3515-1
 Company:Buffalo Inc.
 High Power CardBus Adapter
 EUT M/N:WLI-CB-G54HP
 Test Target:FCC 15.247
 Mode Oper:g mode, TX, with WLE-DA antenna , Y Position
 Average Power Meter: Low = 16 dBm, Mid = 16 dBm, High = 16 dBm

Test Equipment:

EMCO Horn 1-18GHz | Pre-amplifier 1-26GHz | Pre-amplifier 26-40GHz | Horn > 18GHz | Limit
 T60; S/N: 2238 @3m | T63 Miteq 646456 | | | FCC 15.205

Hi Frequency Cables: 2 foot cable, 3 foot cable, 4 foot cable, 12 foot cable
 3_Chin | 12_Vien | HPF: HPF_4.0GHz | Reject Filter

Peak Measurements
 RBW=VBW=1MHz

Average Measurements
 RBW=1MHz ; VBW=10Hz


f GHz	Dist (m)	Read Pk dBuV	Read Avg. dBuV	AF dB/m	CL dB	Amp dB	D Corr dB	Fltr dB	Peak dBuV/m	Avg dBuV/m	Pk Lim dBuV/m	Avg Lim dBuV/m	Pk Mar dB	Avg Mar dB	Notes (V/H)
Low ch															
4.824	3.0	62.0	44.8	33.6	3.3	-37.9	0.0	0.6	61.6	44.4	74	54	-12.4	-9.6	V
4.824	3.0	60.0	43.0	33.6	3.3	-37.9	0.0	0.6	59.6	42.6	74	54	-14.4	-11.4	H
Mid ch															
4.874	3.0	68.0	47.5	33.7	3.3	-37.9	0.0	0.6	67.7	47.2	74	54	-6.3	-6.8	V
7.311	3.0	51.0	35.0	36.2	4.1	-36.9	0.0	0.6	55.0	39.0	74	54	-19.0	-15.0	V
4.874	3.0	67.5	47.3	33.7	3.3	-37.9	0.0	0.6	67.2	47.0	74	54	-6.8	-7.0	H
7.311	3.0	50.0	34.8	36.2	4.1	-36.9	0.0	0.6	54.0	38.8	74	54	-20.0	-15.2	H
High Ch															
4.924	3.0	69.5	47.7	33.7	3.3	-37.9	0.0	0.6	69.3	47.5	74	54	-4.7	-6.5	V
7.386	3.0	51.0	35.2	36.2	4.1	-36.9	0.0	0.6	55.2	39.4	74	54	-18.8	-14.6	V
4.924	3.0	69.1	47.5	33.7	3.3	-37.9	0.0	0.6	68.9	47.3	74	54	-5.1	-6.7	H
7.386	3.0	50.6	35.0	36.2	4.1	-36.9	0.0	0.6	54.8	39.2	74	54	-19.2	-14.8	H


Note: No other emissions were detected above the system noise floor.

f	Measurement Frequency	Amp	Preamp Gain	Avg Lim	Average Field Strength Limit
Dist	Distance to Antenna	D Corr	Distance Correct to 3 meters	Pk Lim	Peak Field Strength Limit
Read	Analyzer Reading	Avg	Average Field Strength @ 3 m	Avg Mar	Margin vs. Average Limit
AF	Antenna Factor	Peak	Calculated Peak Field Strength	Pk Mar	Margin vs. Peak Limit
CL	Cable Loss	HPF	High Pass Filter		


7.2.2.3 WLE-MYG ANTENNA


RESTRICTED BANDEDGE (b MODE, LOW CHANNEL, HORIZONTAL)

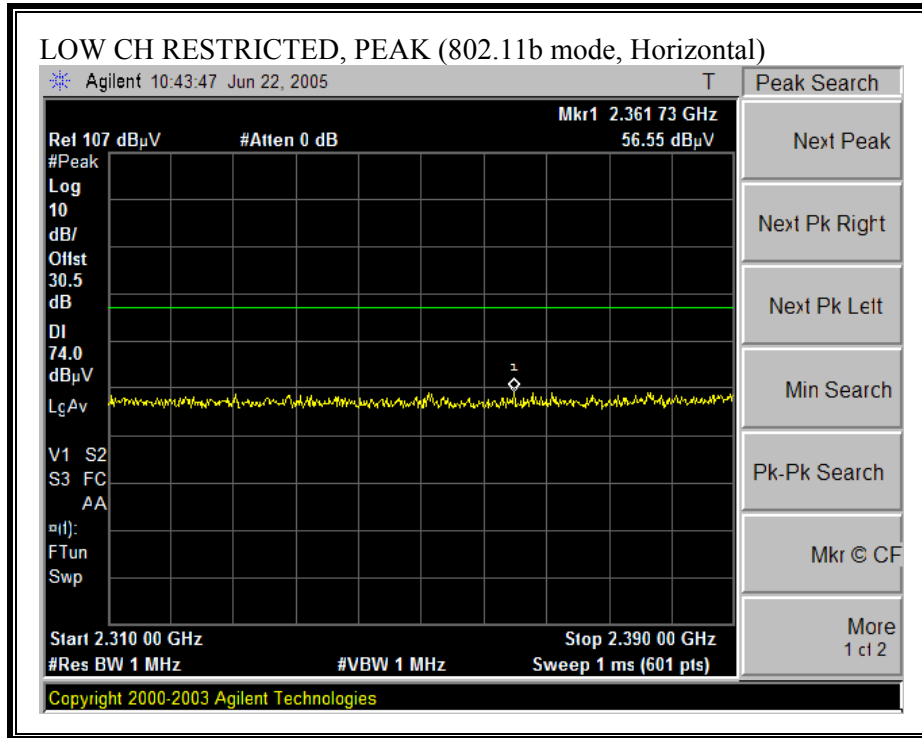

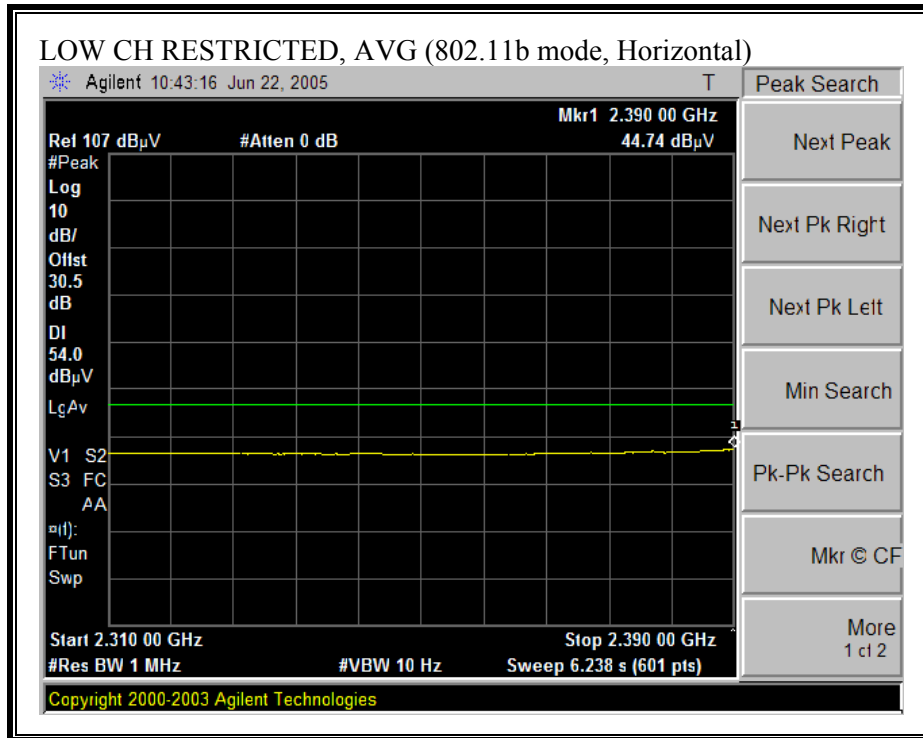



RESTRICTED BANDEDGE (b MODE, LOW CHANNEL, VERTICAL)

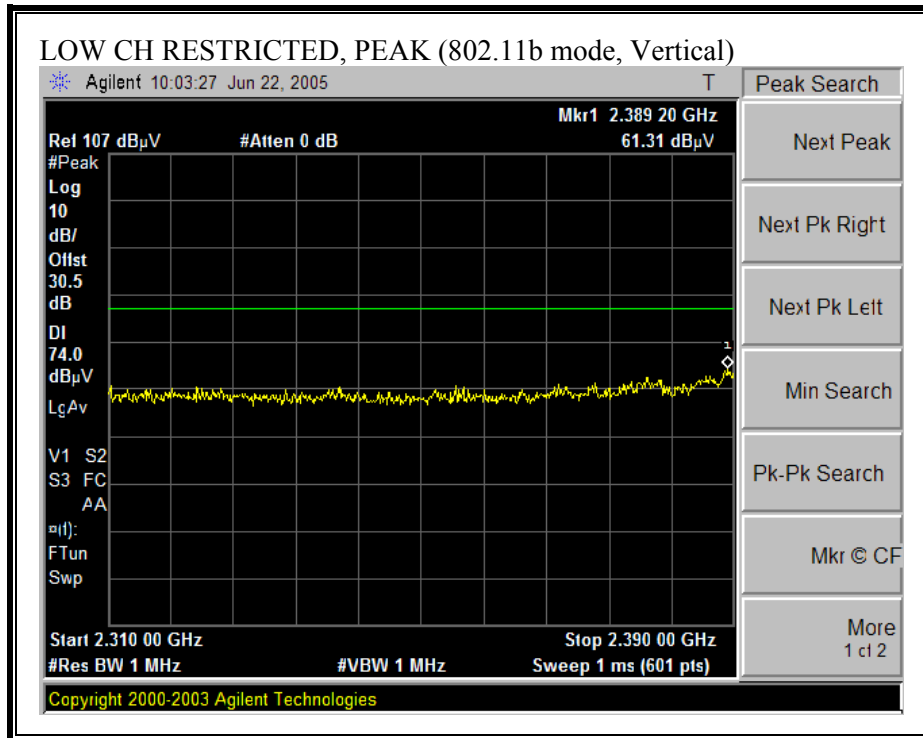

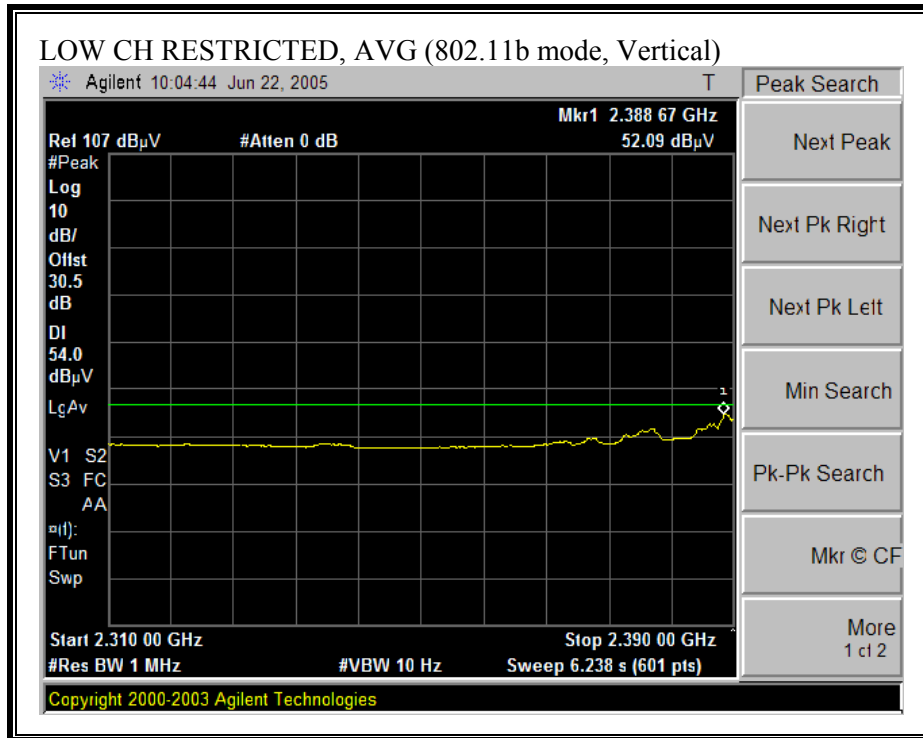



RESTRICTED BANDEDGE (b MODE, HIGH CHANNEL, HORIZONTAL)

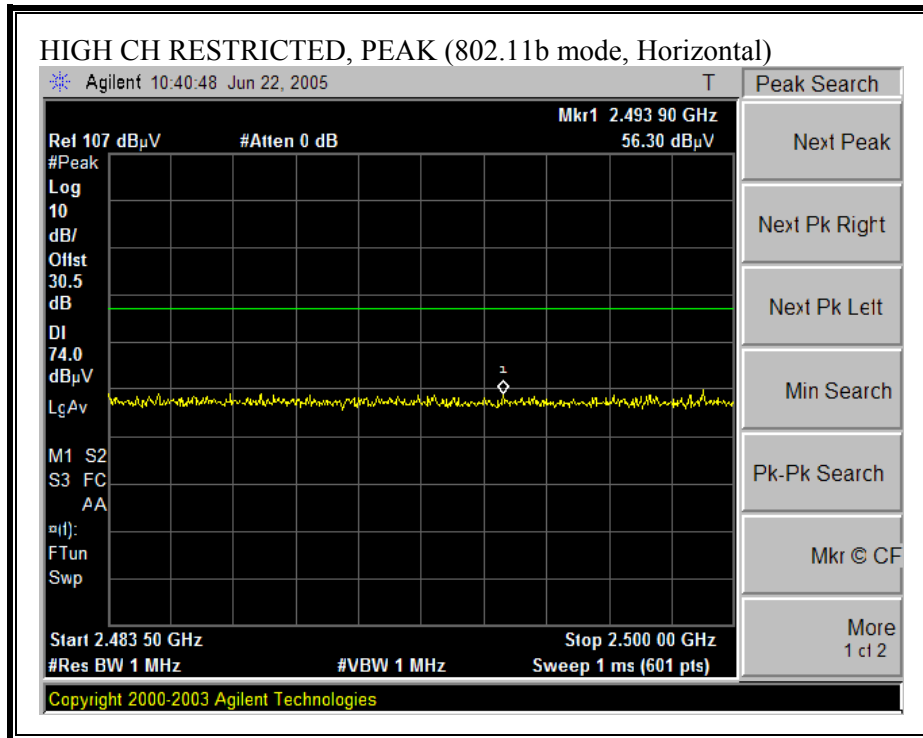

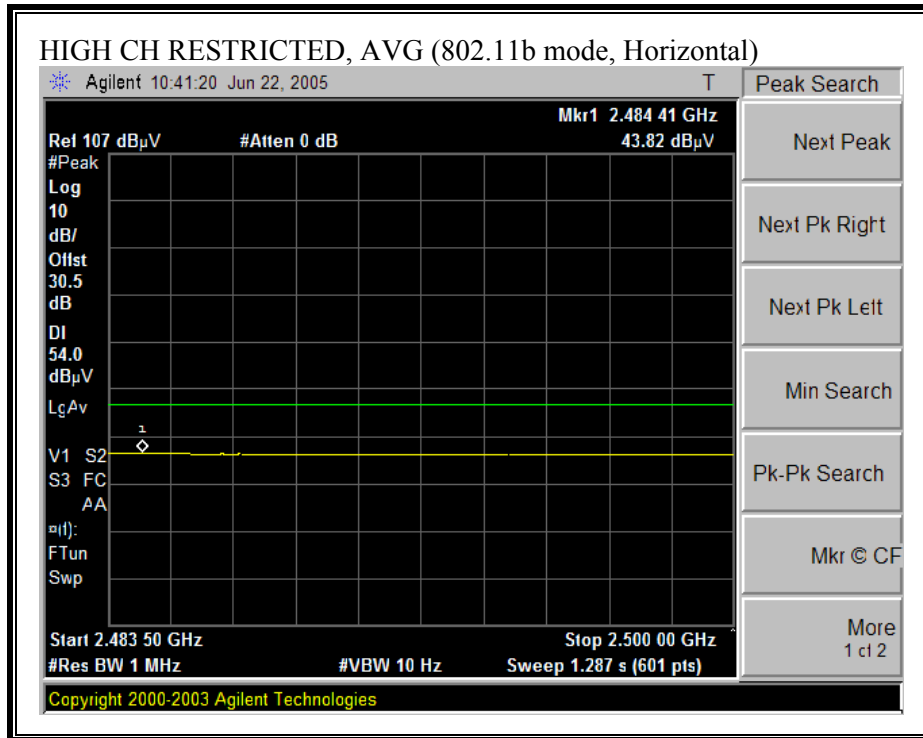

RESTRICTED BANDEDGE (b MODE, HIGH CHANNEL, VERTICAL)

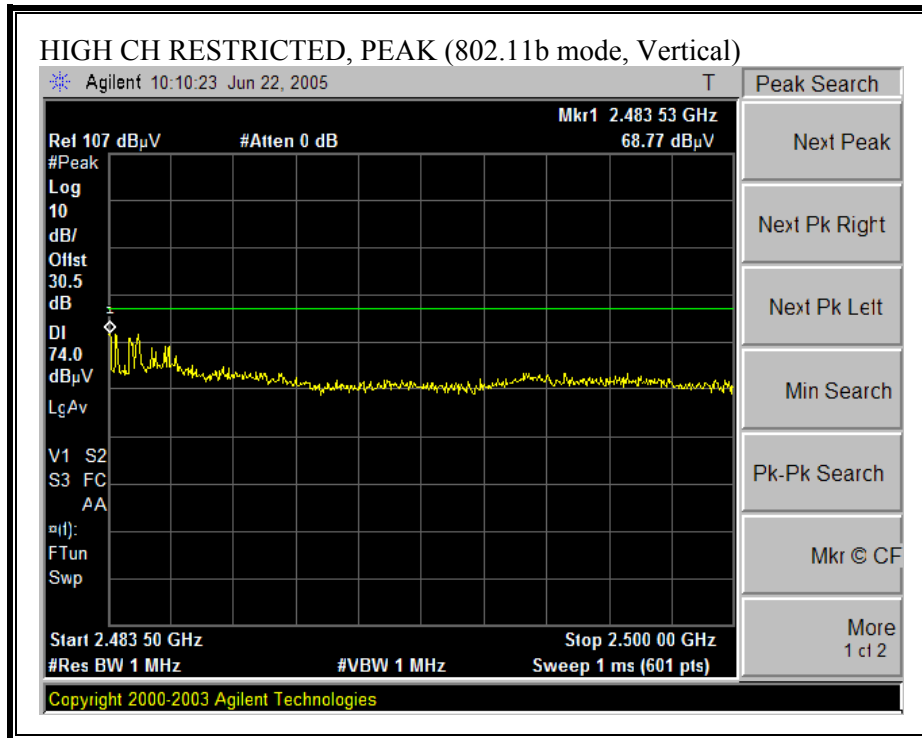

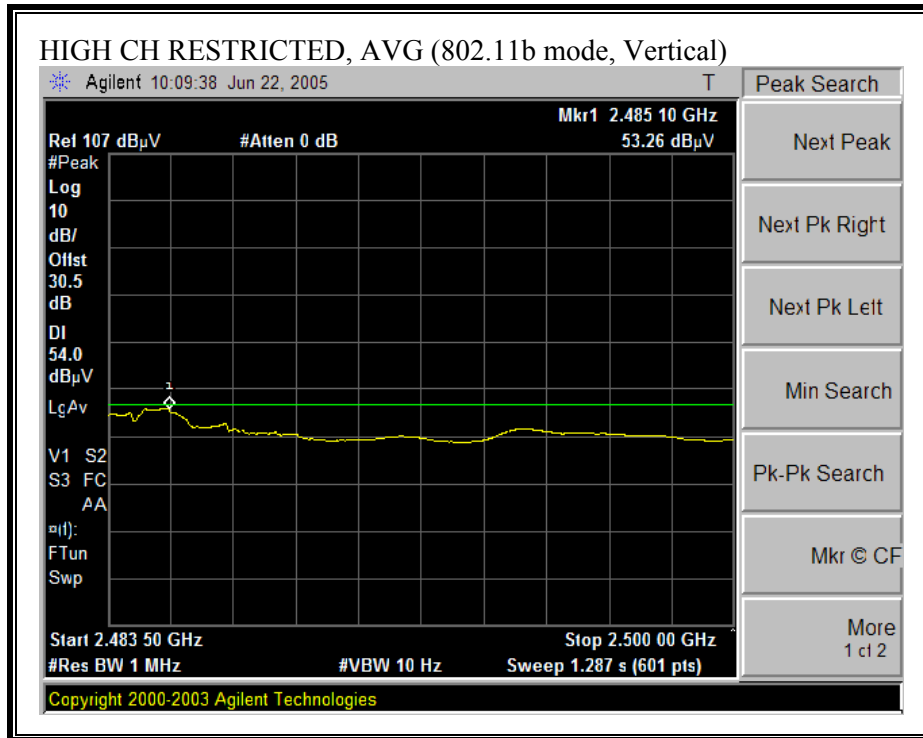

HARMONICS AND SPURIOUS EMISSIONS (b MODE)

06/27/05 High Frequency Measurement
 Compliance Certification Services, Morgan Hill Open Field Site

Test Engr: Chin Pang
 Project #: 05I3515-1
 Company: Buffalo Inc.
 High Power CardBus Adapter
 EUT M/N: WLI-CB-G54HP
 Test Target: FCC 15.247
 Mode Oper: b mode, TX, with WLE-MYG antenna
 Average Power Meter: Low = 16 dBm, Mid = 16 dBm, High = 16 dBm

Test Equipment:

EMCO Horn 1-18GHz | Pre-amplifier 1-26GHz | Pre-amplifier 26-40GHz | Horn > 18GHz | Limit
 T60; S/N: 2238 @3m | T63 Miteq 646456 | | | FCC 15.205

Hi Frequency Cables: 2 foot cable | 3 foot cable | 4 foot cable | 12 foot cable
 | | 3_Chin | | | 12_Neelesh | | HPF | Reject Filter
 | | | | | HPF_4.0GHz | |


Peak Measurements
 RBW=VBW=1MHz
 Average Measurements
 RBW=1MHz ; VBW=10Hz


f GHz	Dist (m)	Read Pk dBuV	Read Avg. dBuV	AF dB/m	CL dB	Amp dB	D Corr dB	Filtr dB	Peak dBuV/m	Avg dBuV/m	Pk Lim dBuV/m	Avg Lim dBuV/m	Pk Mar dB	Avg Mar dB	Notes (V/H)
Low ch															
4.824	3.0	54.4	49.4	33.6	3.8	-37.9	0.0	0.6	54.4	49.4	74	54	-19.6	-4.6	V
4.824	3.0	53.9	48.0	33.6	3.8	-37.9	0.0	0.6	53.9	48.0	74	54	-20.1	-6.0	H
Mid ch															
4.874	3.0	55.9	52.5	33.7	3.8	-37.9	0.0	0.6	56.0	52.6	74	54	-18.0	-1.4	V
7.311	3.0	45.8	33.9	36.2	4.9	-36.9	0.0	0.6	50.6	38.7	74	54	-23.4	-15.3	V
4.874	3.0	54.0	51.3	33.7	3.8	-37.9	0.0	0.6	54.1	51.4	74	54	-19.9	-2.6	H
7.311	3.0	45.6	33.5	36.2	4.9	-36.9	0.0	0.6	50.4	38.3	74	54	-23.6	-15.7	H
High Ch															
4.924	3.0	54.8	50.0	33.7	3.8	-37.9	0.0	0.6	55.0	50.2	74	54	-19.0	-3.8	V
7.386	3.0	44.5	33.2	36.2	4.9	-36.9	0.0	0.6	49.5	38.2	74	54	-24.5	-15.8	V
4.924	3.0	53.6	49.0	33.7	3.8	-37.9	0.0	0.6	53.8	49.2	74	54	-20.2	-4.8	H
7.386	3.0	45.4	35.0	36.2	4.9	-36.9	0.0	0.6	50.4	40.0	74	54	-23.6	-14.0	H

Note: No other emissions were detected above the system noise floor.


f	Measurement Frequency	Amp	Preamp Gain	Avg Lim	Average Field Strength Limit
Dist	Distance to Antenna	D Corr	Distance Correct to 3 meters	Pk Lim	Peak Field Strength Limit
Read	Analyzer Reading	Avg	Average Field Strength @ 3 m	Avg Mar	Margin vs. Average Limit
AF	Antenna Factor	Peak	Calculated Peak Field Strength	Pk Mar	Margin vs. Peak Limit
CL	Cable Loss	HPF	High Pass Filter		


RESTRICTED BANDEDGE (g MODE, LOW CHANNEL, HORIZONTAL)

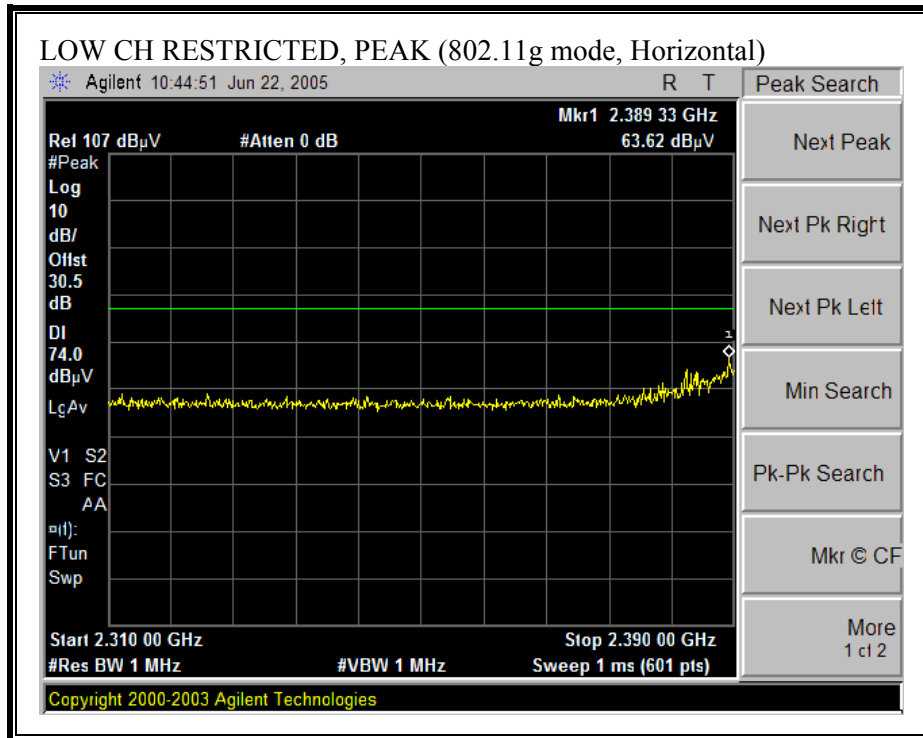

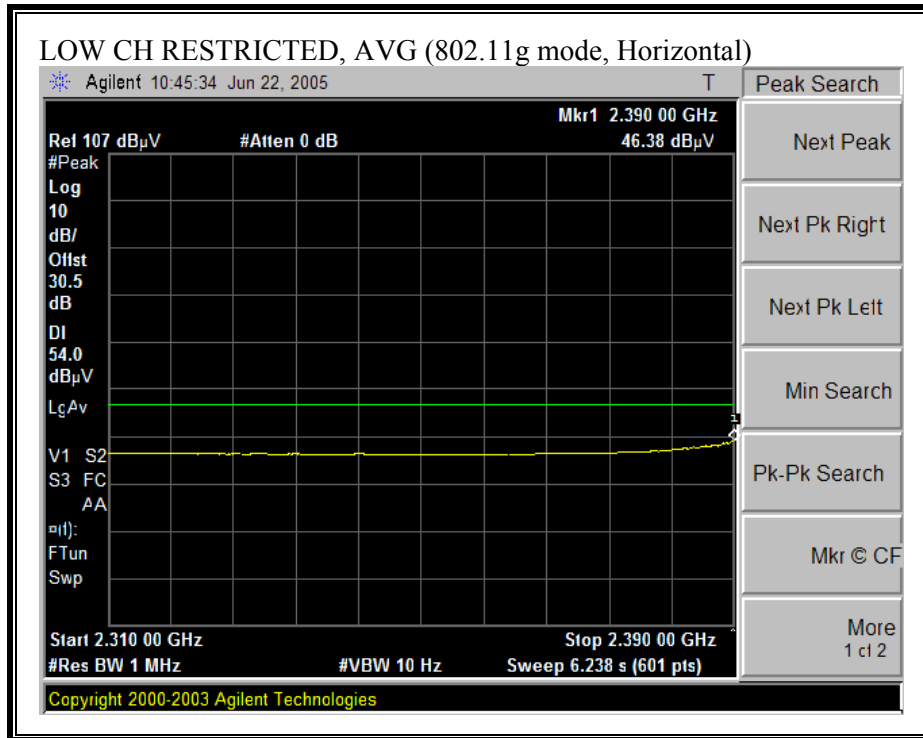



RESTRICTED BANDEDGE (g MODE, LOW CHANNEL, VERTICAL)

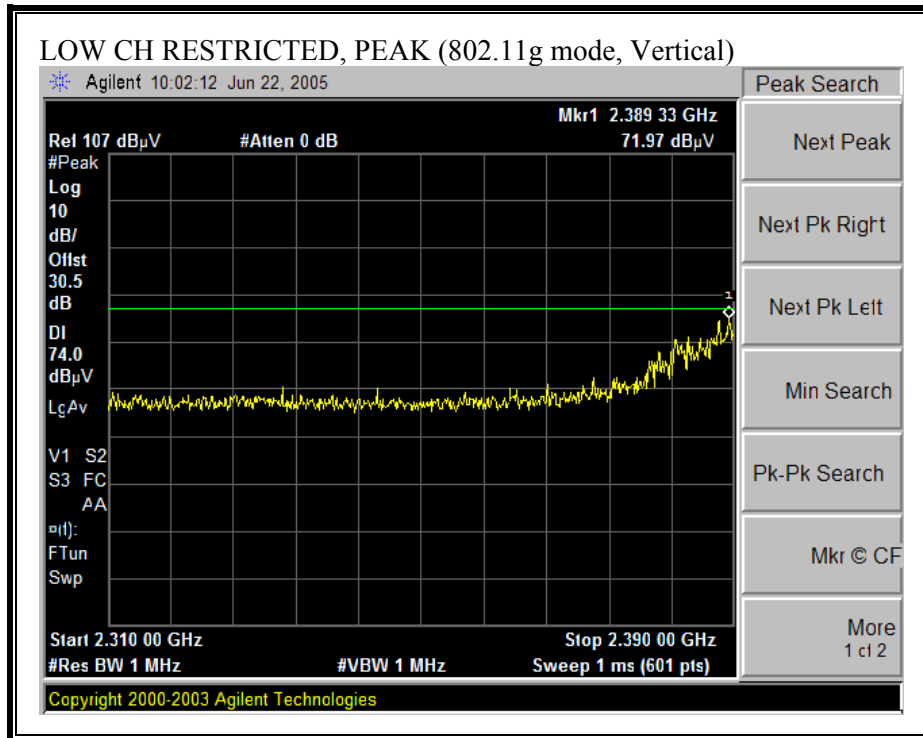

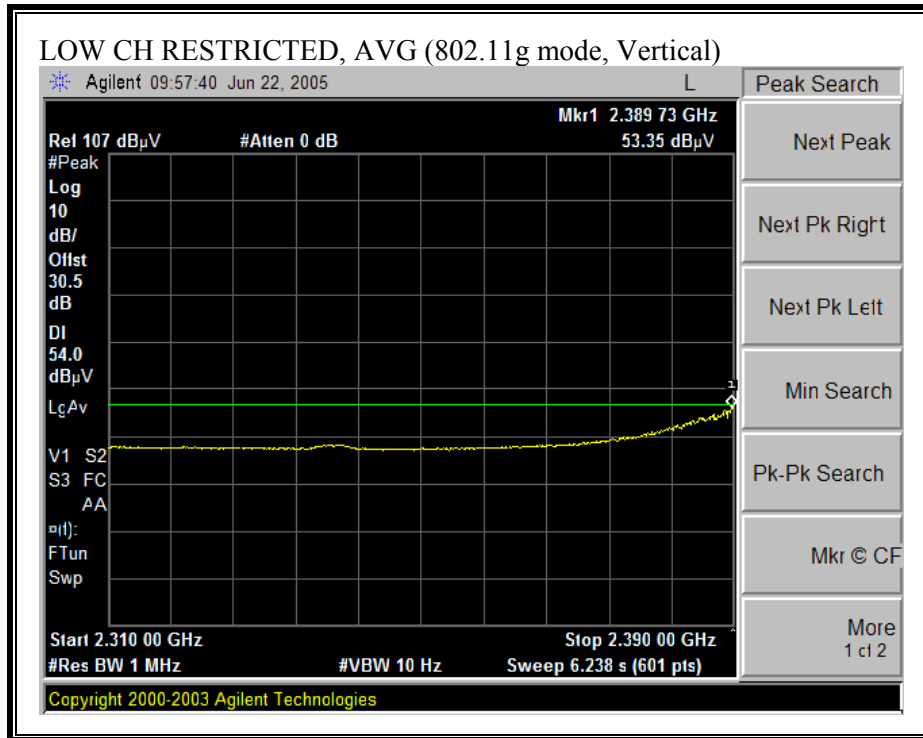



RESTRICTED BANDEDGE (g MODE, HIGH CHANNEL, HORIZONTAL)

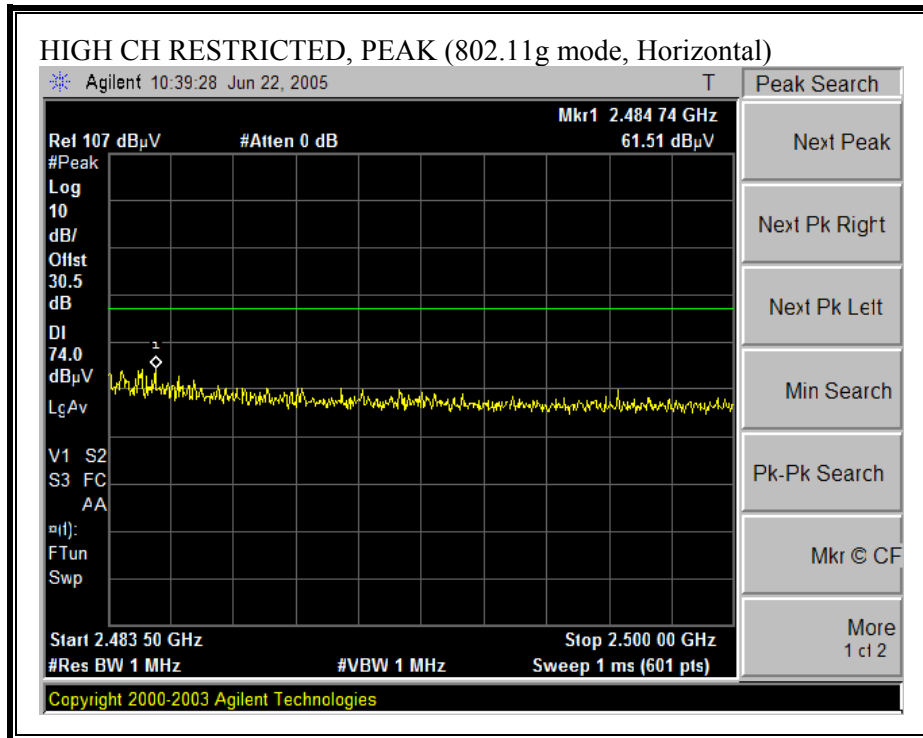

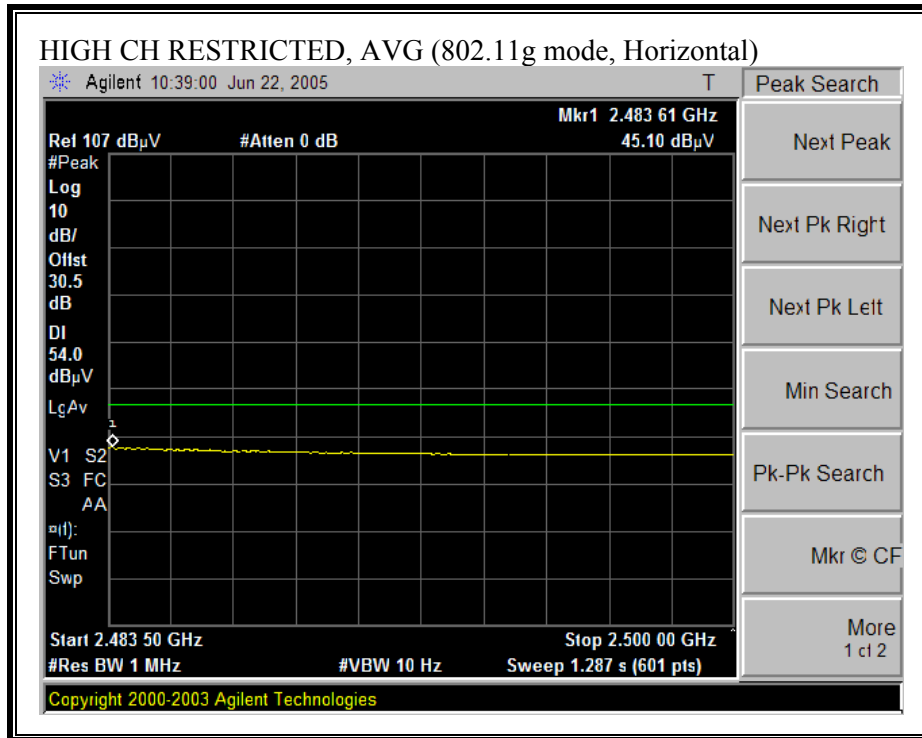

RESTRICTED BANDEDGE (g MODE, HIGH CHANNEL, VERTICAL)

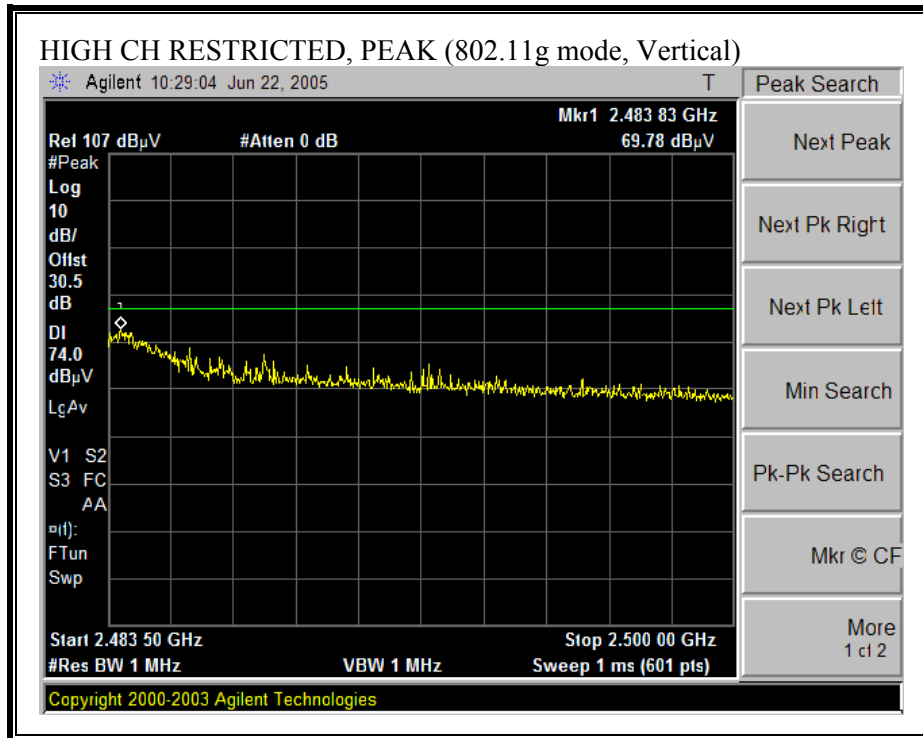

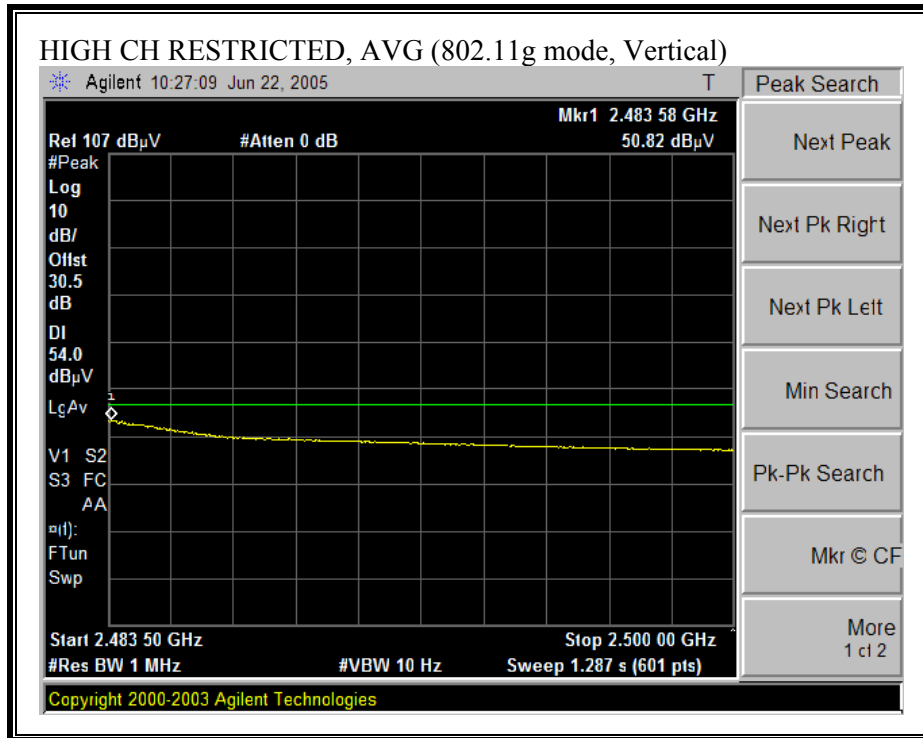

HARMONICS AND SPURIOUS EMISSIONS (g MODE)

06/22/05 High Frequency Measurement
 Compliance Certification Services, Morgan Hill Open Field Site

Test Engr: Chin Pang
 Project #: 05I3515-1
 Company: Buffalo Inc.
 High Power CardBus Adapter
 EUT M/N: WLI-CB-G54HP
 Test Target: FCC 15.247
 Mode Oper: g mode, TX, with WLE-MYG antenna , Z Position
 Average Power Meter: Low = 16 dBm, Mid = 16 dBm, High = 16 dBm

Test Equipment:

EMCO Horn 1-18GHz | Pre-amplifier 1-26GHz | Pre-amplifier 26-40GHz | Horn > 18GHz | Limit
 T60; S/N: 2238 @3m | T63 Miteq 646456 | | | FCC 15.205

Hi Frequency Cables: 2 foot cable | 3 foot cable | 4 foot cable | 12 foot cable
 | | 3_Chin | | 12_Vien | HPF | Reject Filter
 | | | | HPF_4.0GHz | |

Peak Measurements
 RBW=VBW=1MHz
 Average Measurements
 RBW=1MHz ; VBW=10Hz


f GHz	Dist (m)	Read Pk dBuV	Read Avg. dBuV	AF dB/m	CL dB	Amp dB	D Corr dB	Filtr dB	Peak dBuV/m	Avg dBuV/m	Pk Lim dBuV/m	Avg Lim dBuV/m	Pk Mar dB	Avg Mar dB	Notes (V/H)
Low ch															
4.824	3.0	66.7	45.2	33.6	3.3	-37.9	0.0	0.6	66.3	44.8	74	54	-7.7	-9.2	V
4.824	3.0	65.0	44.5	33.6	3.3	-37.9	0.0	0.6	64.6	44.1	74	54	-9.4	-9.9	H
Mid ch															
4.874	3.0	66.0	45.0	33.7	3.3	-37.9	0.0	0.6	65.7	44.7	74	54	-8.3	-9.3	V
7.311	3.0	50.7	35.0	36.2	4.1	-36.9	0.0	0.6	54.7	39.0	74	54	-19.3	-15.0	V
4.874	3.0	64.0	44.0	33.7	3.3	-37.9	0.0	0.6	63.7	43.7	74	54	-10.3	-10.3	H
7.311	3.0	49.0	34.0	36.2	4.1	-36.9	0.0	0.6	53.0	38.0	74	54	-21.0	-16.0	H
High Ch															
4.924	3.0	68.5	47.5	33.7	3.3	-37.9	0.0	0.6	68.3	47.3	74	54	-5.7	-6.7	V
7.386	3.0	53.0	35.4	36.2	4.1	-36.9	0.0	0.6	57.2	39.6	74	54	-16.8	-14.4	V
4.924	3.0	68.0	47.4	33.7	3.3	-37.9	0.0	0.6	67.8	47.2	74	54	-6.2	-6.8	H
7.386	3.0	50.0	34.3	36.2	4.1	-36.9	0.0	0.6	54.2	38.5	74	54	-19.8	-15.5	H


Note: No other emissions were detected above the system noise floor.

f Measurement Frequency Amp Preamp Gain Avg Lim Average Field Strength Limit
 Dist Distance to Antenna D Corr Distance Correct to 3 meters Pk Lim Peak Field Strength Limit
 Read Analyzer Reading Avg Average Field Strength @ 3 m Avg Mar Margin vs. Average Limit
 AF Antenna Factor Peak Calculated Peak Field Strength Pk Mar Margin vs. Peak Limit
 CL Cable Loss HPF High Pass Filter


7.2.2.4 WLE-NDR ANTENNA


RESTRICTED BANDEDGE (b MODE, LOW CHANNEL, HORIZONTAL)

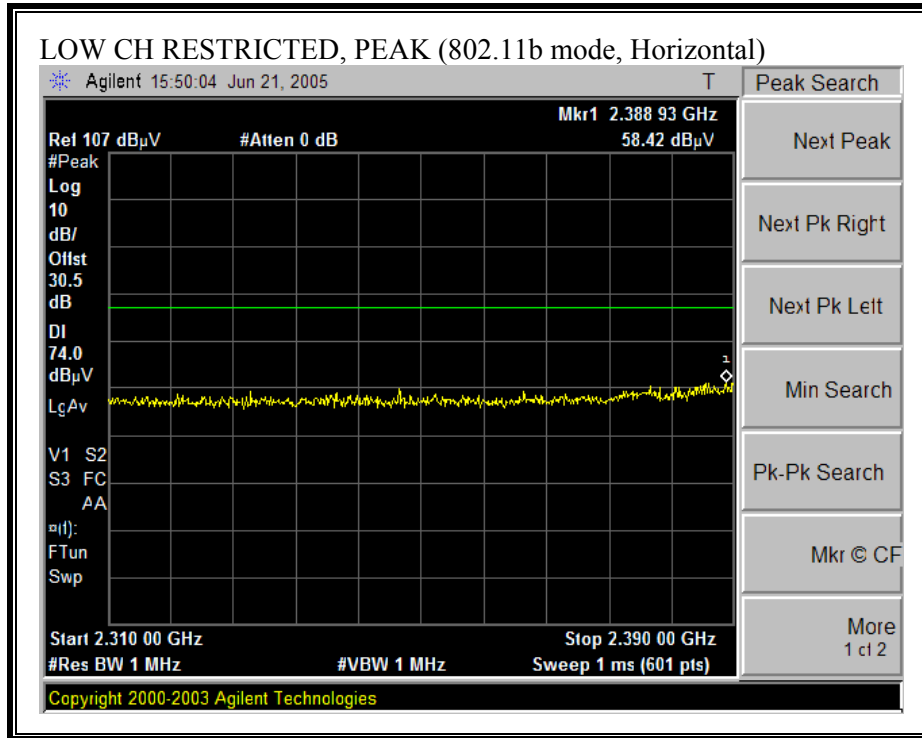

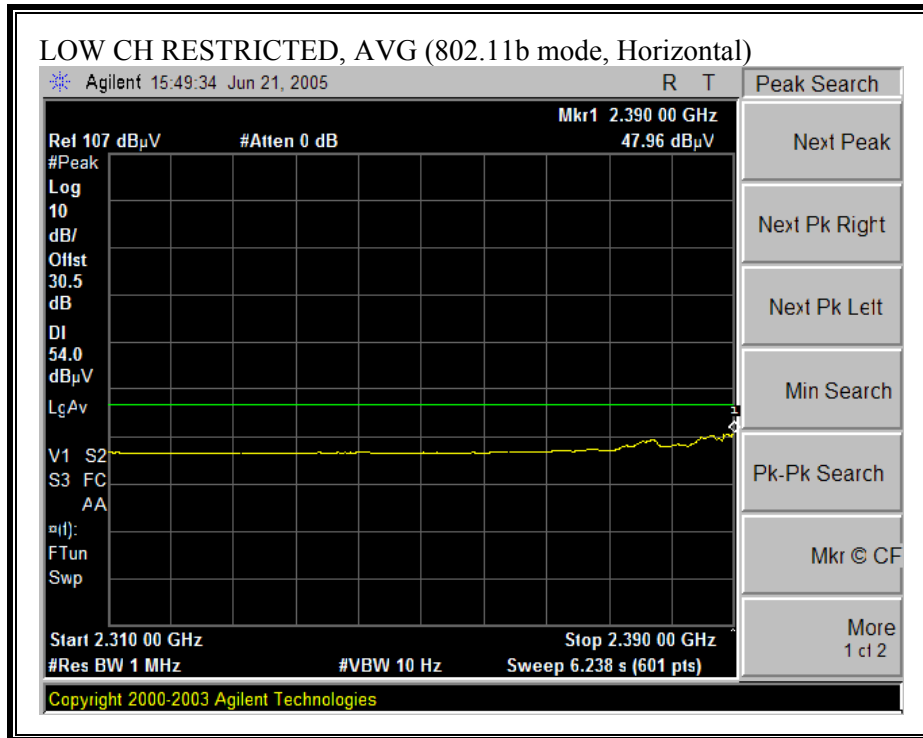



RESTRICTED BANDEDGE (b MODE, LOW CHANNEL, VERTICAL)

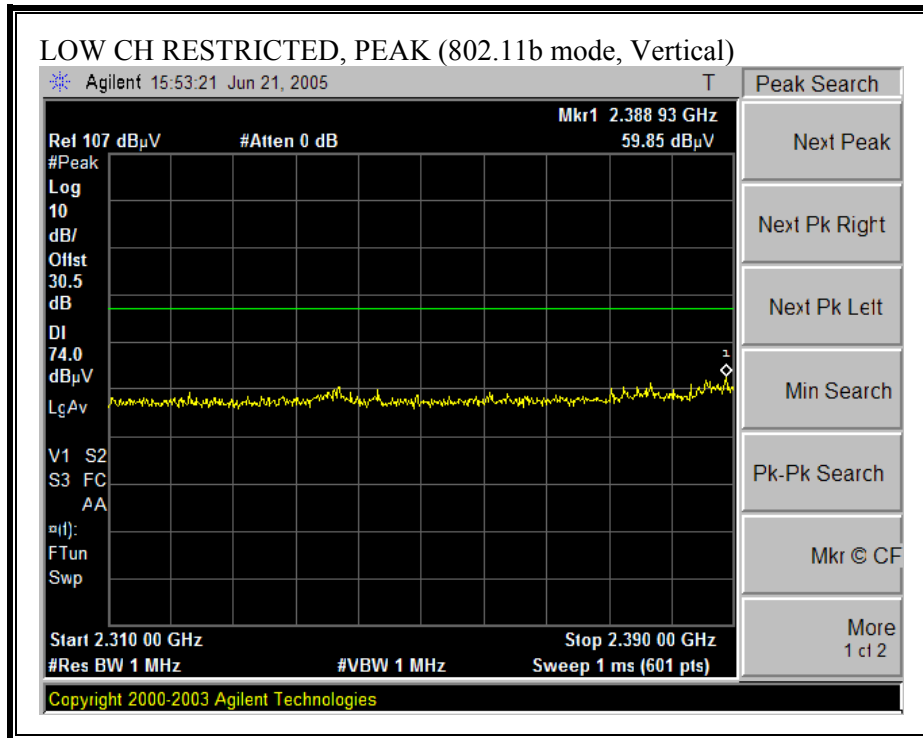

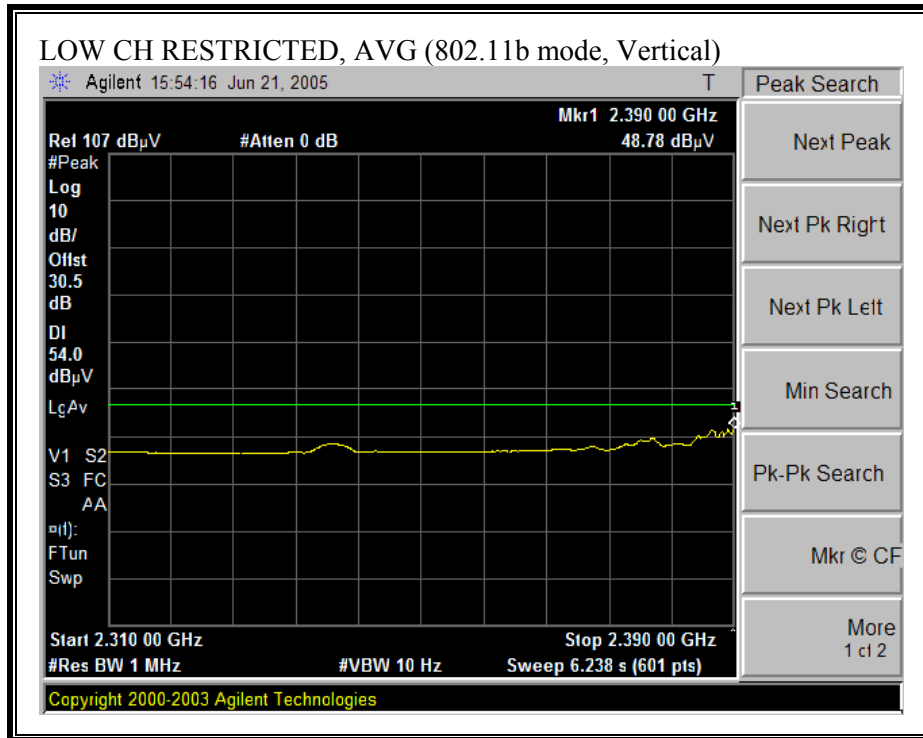



RESTRICTED BANDEDGE (b MODE, HIGH CHANNEL, HORIZONTAL)

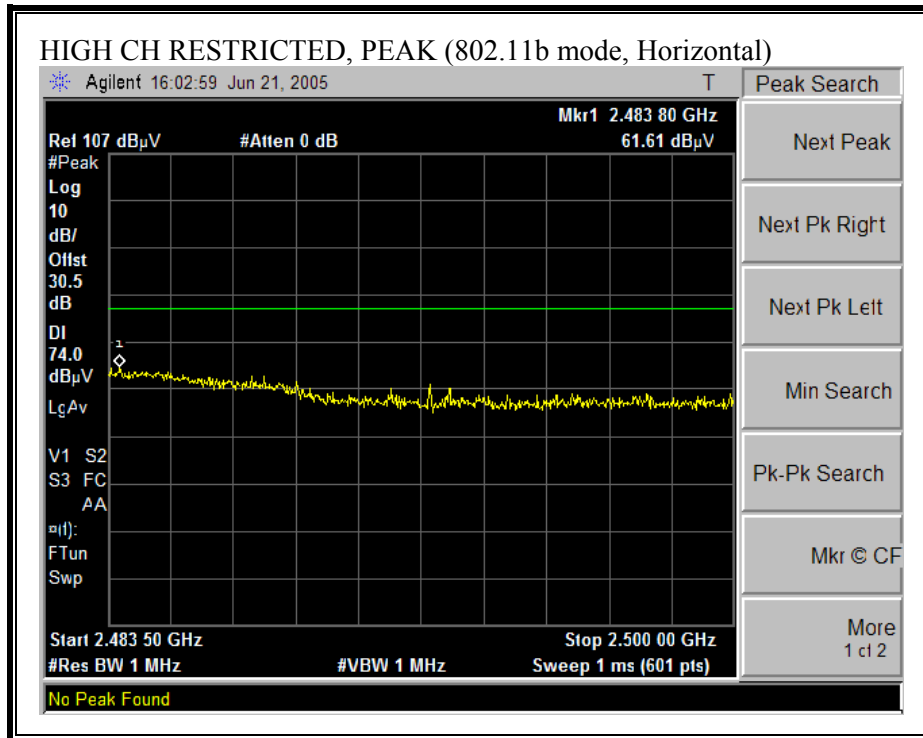

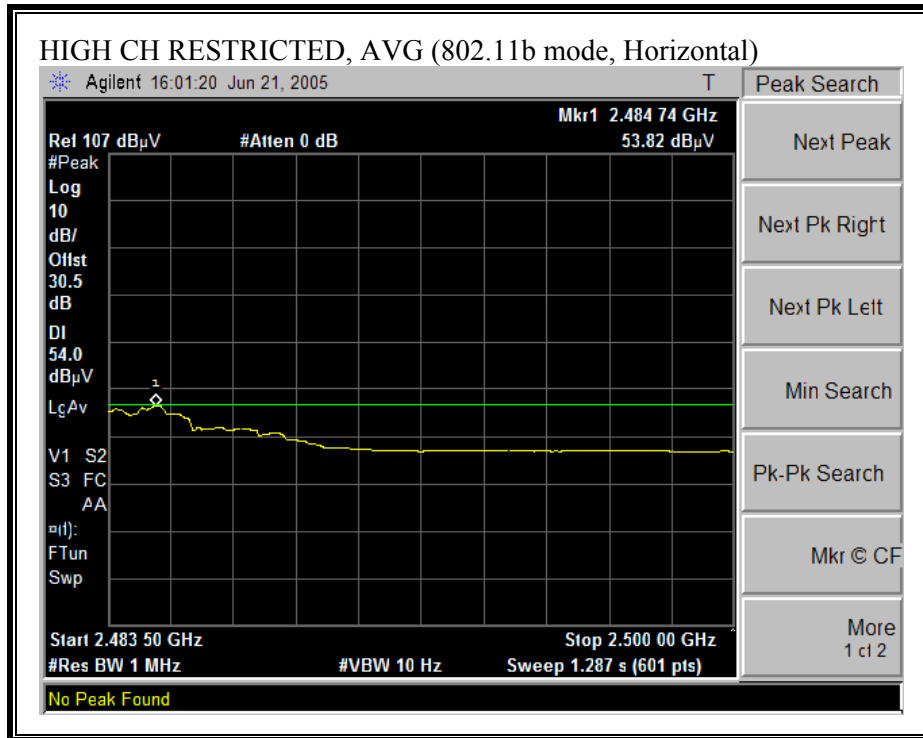

RESTRICTED BANDEDGE (b MODE, HIGH CHANNEL, VERTICAL)

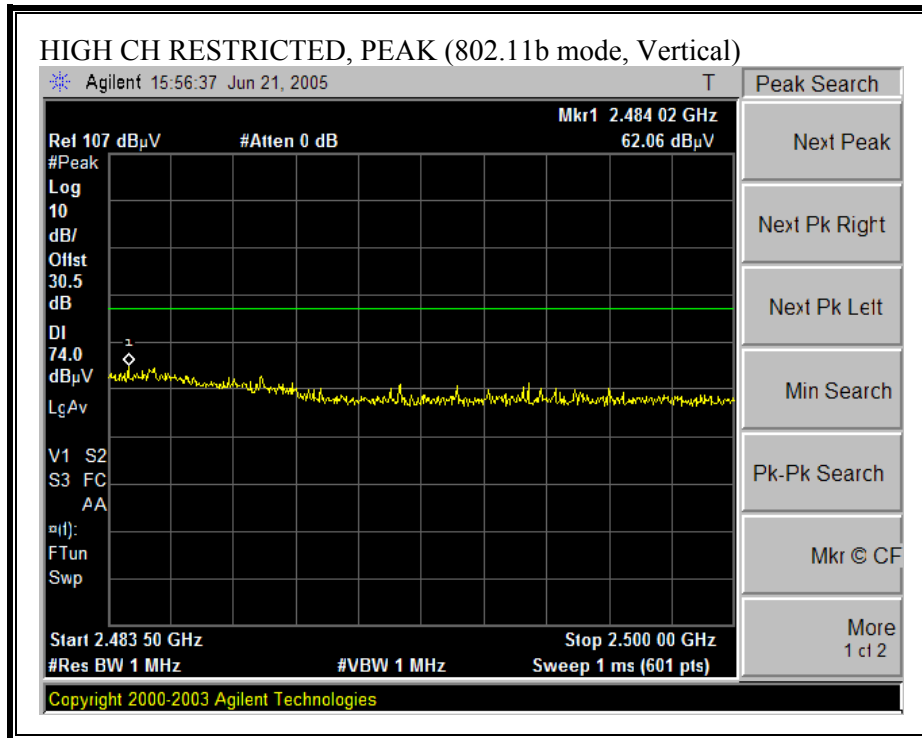

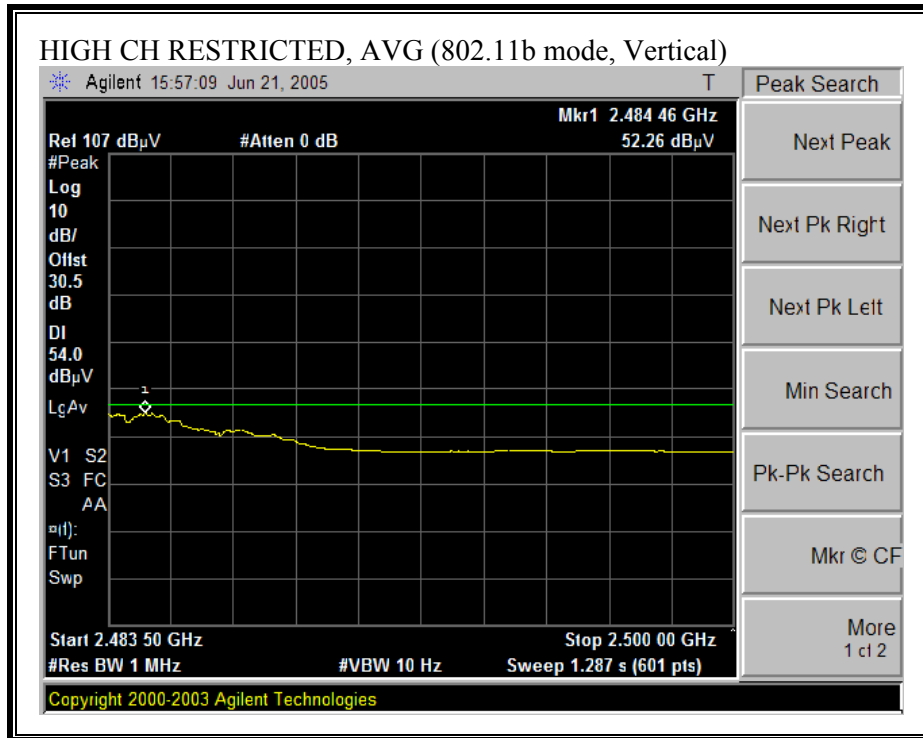

HARMONICS AND SPURIOUS EMISSIONS (b MODE)

06/27/05 High Frequency Measurement
 Compliance Certification Services, Morgan Hill Open Field Site

Test Engr: Chin Pang
 Project #: 05I3515-1
 Company: Buffalo Inc.
 High Power CardBus Adapter
 EUT M/N: WLI-CB-G54HP
 Test Target: FCC 15.247
 Mode Oper: b mode, TX, with WLE-NDR antenna
 Average Power Meter: Low = 16 dBm, Mid = 16 dBm, High = 16 dBm

Test Equipment:

EMCO Horn 1-18GHz | Pre-amplifier 1-26GHz | Pre-amplifier 26-40GHz | Horn > 18GHz | Limit
 T60; S/N: 2238 @3m | T63 Miteq 646456 | | | FCC 15.205

Hi Frequency Cables: 2 foot cable | 3 foot cable | 4 foot cable | 12 foot cable
 | | 3_Chin | | 12_Neelesh | HPF | Reject Filter
 | | | | HPF_4.0GHz | |


Peak Measurements
 RBW=VBW=1MHz
 Average Measurements
 RBW=1MHz ; VBW=10Hz


f GHz	Dist (m)	Read Pk dBuV	Read Avg. dBuV	AF dB/m	CL dB	Amp dB	D Corr dB	Filtr dB	Peak dBuV/m	Avg dBuV/m	Pk Lim dBuV/m	Avg Lim dBuV/m	Pk Mar dB	Avg Mar dB	Notes (V/H)
Low ch															
4.824	3.0	55.0	47.6	33.6	3.8	-37.9	0.0	0.6	55.0	47.6	74	54	-19.0	-6.4	V
4.824	3.0	54.8	47.4	33.6	3.8	-37.9	0.0	0.6	54.8	47.4	74	54	-19.2	-6.6	H
Mid ch															
4.874	3.0	55.3	51.1	33.7	3.8	-37.9	0.0	0.6	55.4	51.2	74	54	-18.6	-2.8	V
7.311	3.0	46.7	34.0	36.2	4.9	-36.9	0.0	0.6	51.5	38.8	74	54	-22.5	-15.2	V
4.874	3.0	54.0	50.5	33.7	3.8	-37.9	0.0	0.6	54.1	50.6	74	54	-19.9	-3.4	H
7.311	3.0	45.0	33.4	36.2	4.9	-36.9	0.0	0.6	49.8	38.2	74	54	-24.2	-15.8	H
High Ch															
4.924	3.0	55.4	51.3	33.7	3.8	-37.9	0.0	0.6	55.6	51.5	74	54	-18.4	-2.5	V
7.386	3.0	44.7	34.3	36.2	4.9	-36.9	0.0	0.6	49.7	39.3	74	54	-24.3	-14.7	V
4.924	3.0	53.6	49.0	33.7	3.8	-37.9	0.0	0.6	53.8	49.2	74	54	-20.2	-4.8	H
7.386	3.0	45.4	35.0	36.2	4.9	-36.9	0.0	0.6	50.4	40.0	74	54	-23.6	-14.0	H

Note: No other emissions were detected above the system noise floor.


f	Measurement Frequency	Amp	Preamp Gain	Avg Lim	Average Field Strength Limit
Dist	Distance to Antenna	D Corr	Distance Correct to 3 meters	Pk Lim	Peak Field Strength Limit
Read	Analyzer Reading	Avg	Average Field Strength @ 3 m	Avg Mar	Margin vs. Average Limit
AF	Antenna Factor	Peak	Calculated Peak Field Strength	Pk Mar	Margin vs. Peak Limit
CL	Cable Loss	HPF	High Pass Filter		


RESTRICTED BANDEDGE (g MODE, LOW CHANNEL, HORIZONTAL)

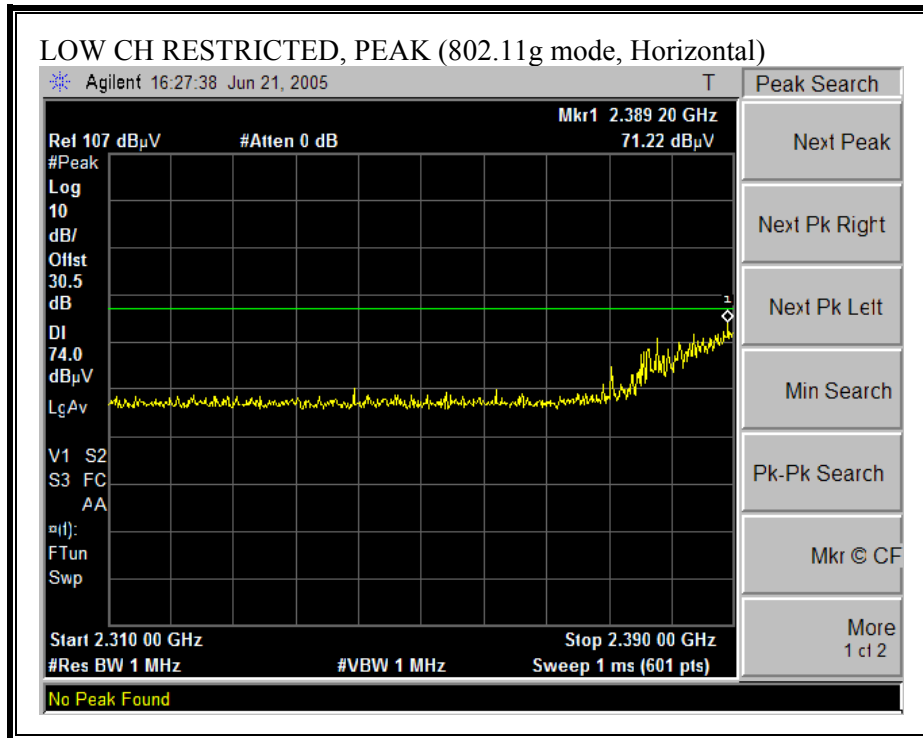

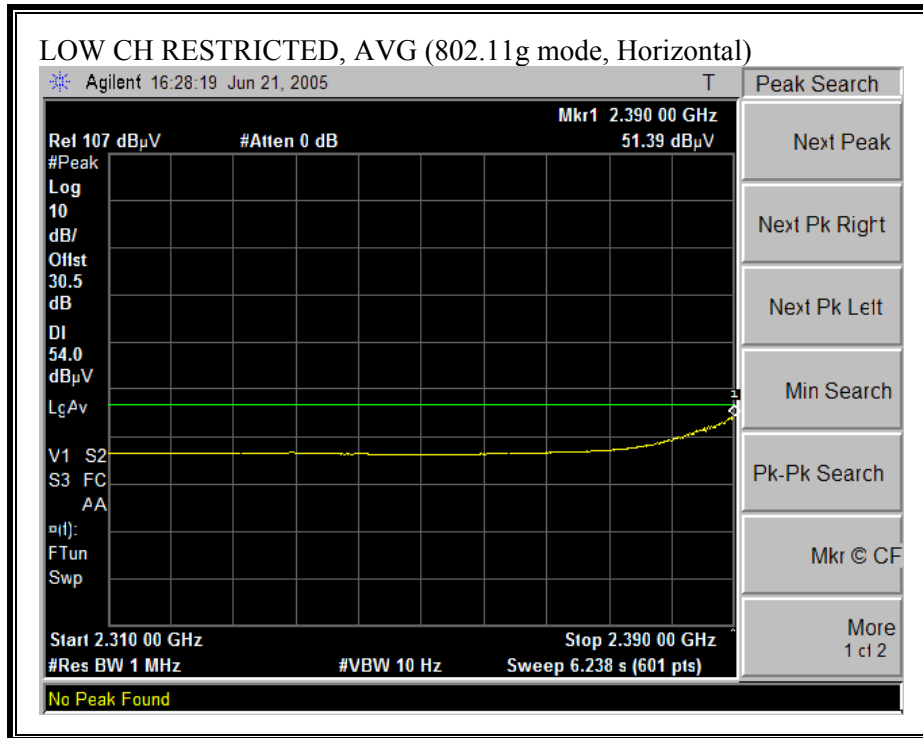



RESTRICTED BANDEDGE (g MODE, LOW CHANNEL, VERTICAL)

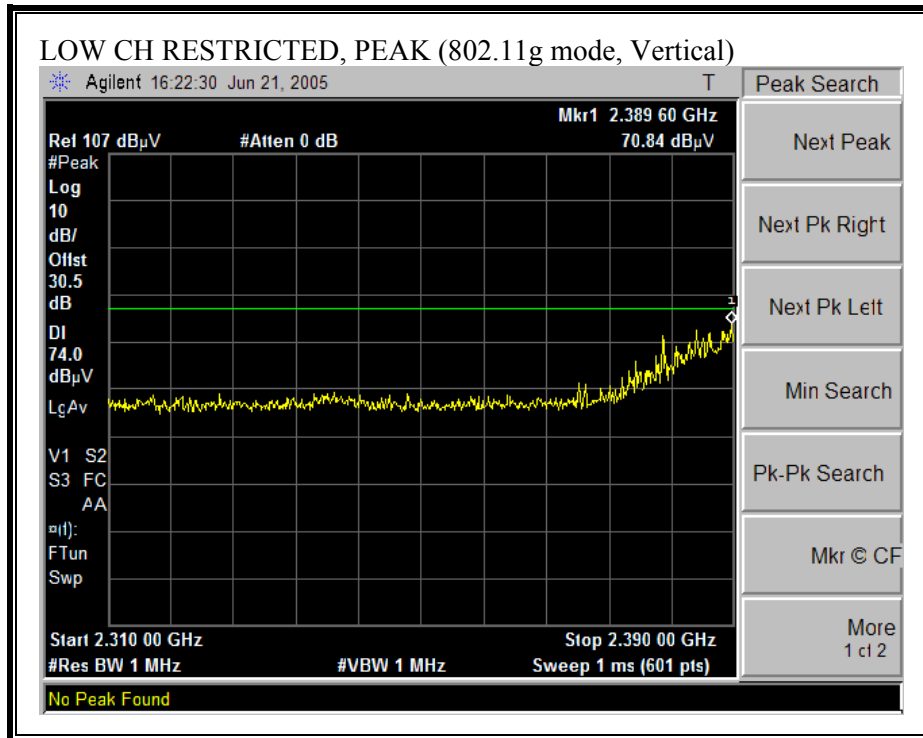

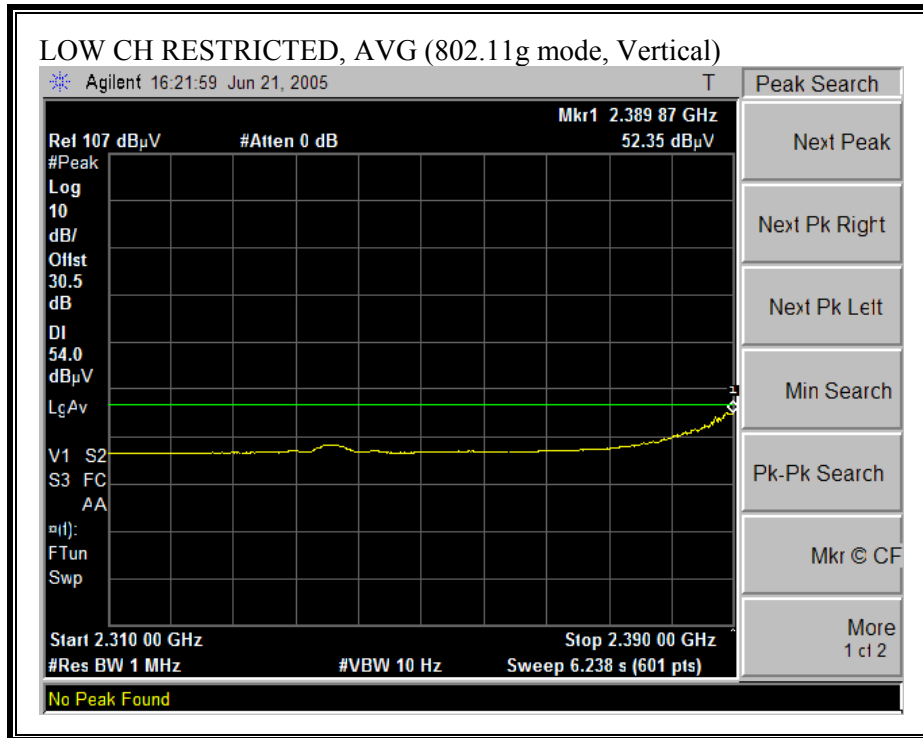



RESTRICTED BANDEDGE (g MODE, HIGH CHANNEL, HORIZONTAL)

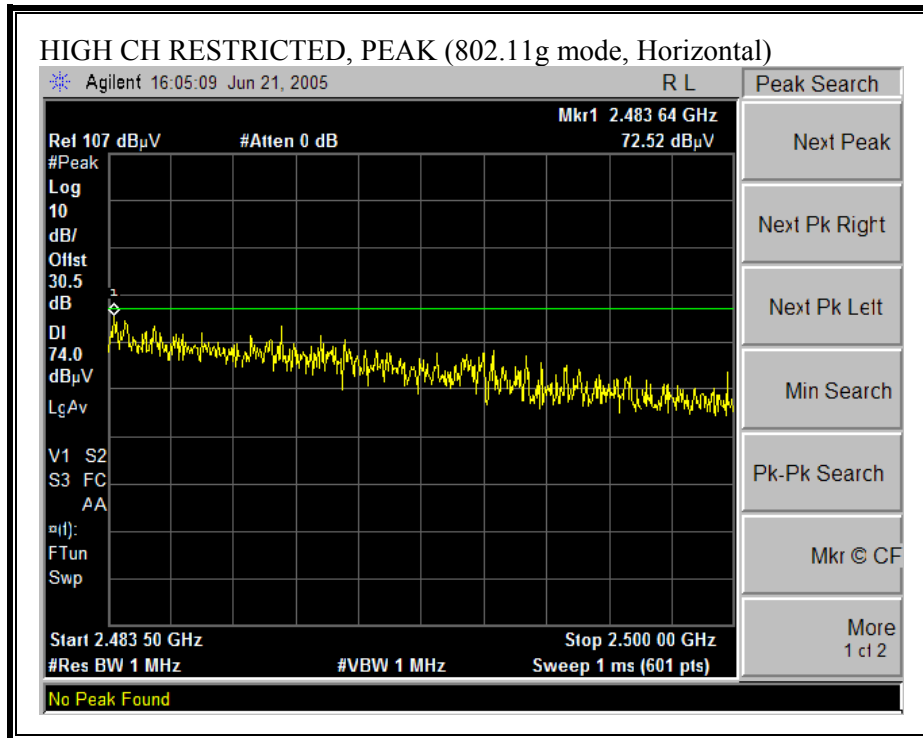

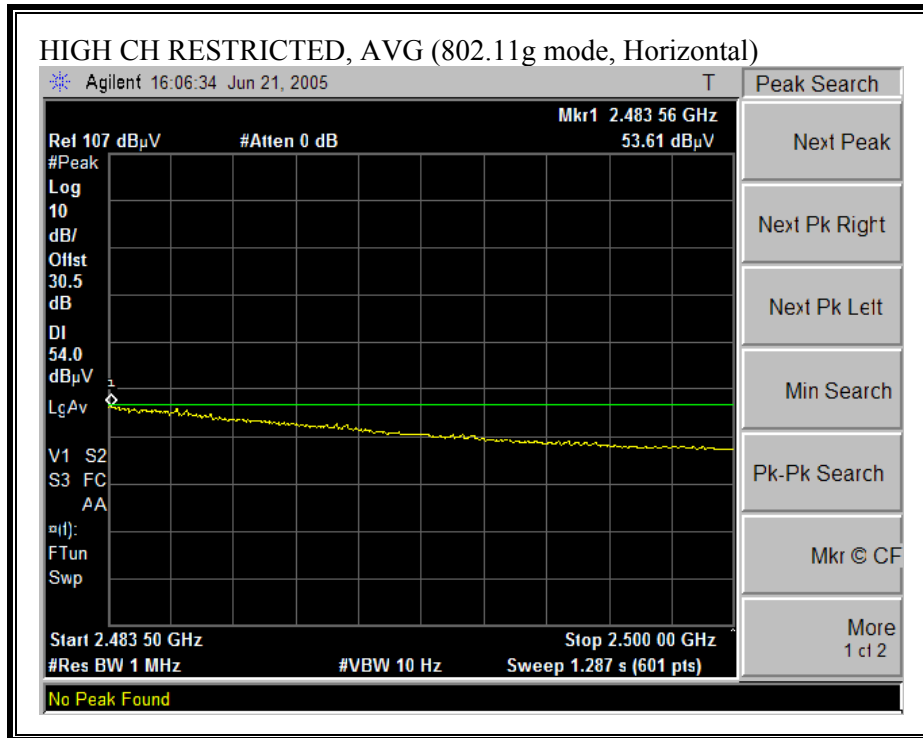

RESTRICTED BANDEDGE (g MODE, HIGH CHANNEL, VERTICAL)

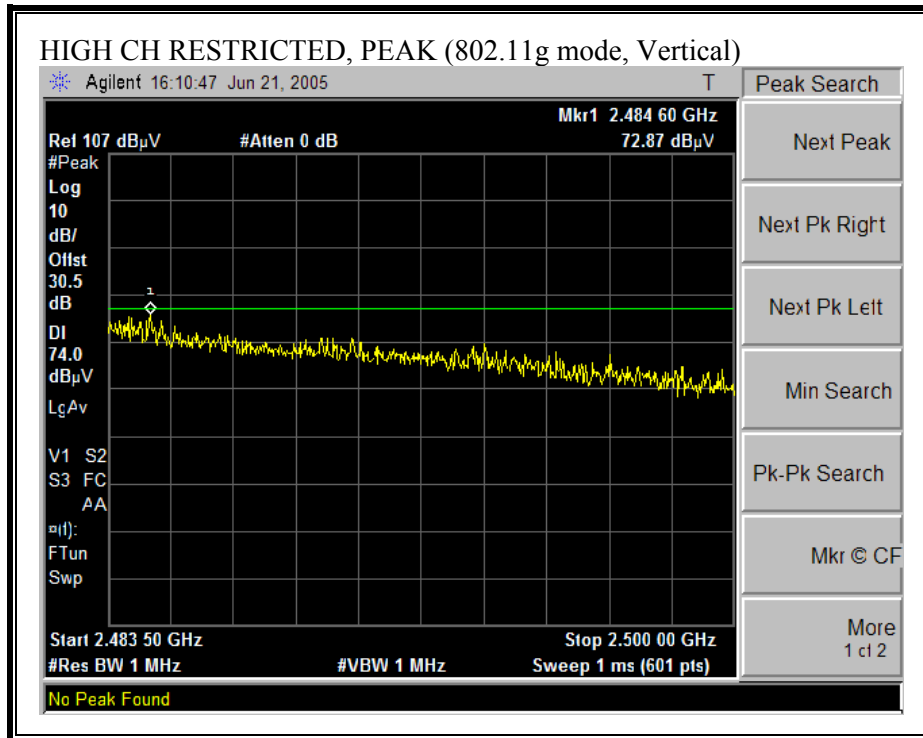

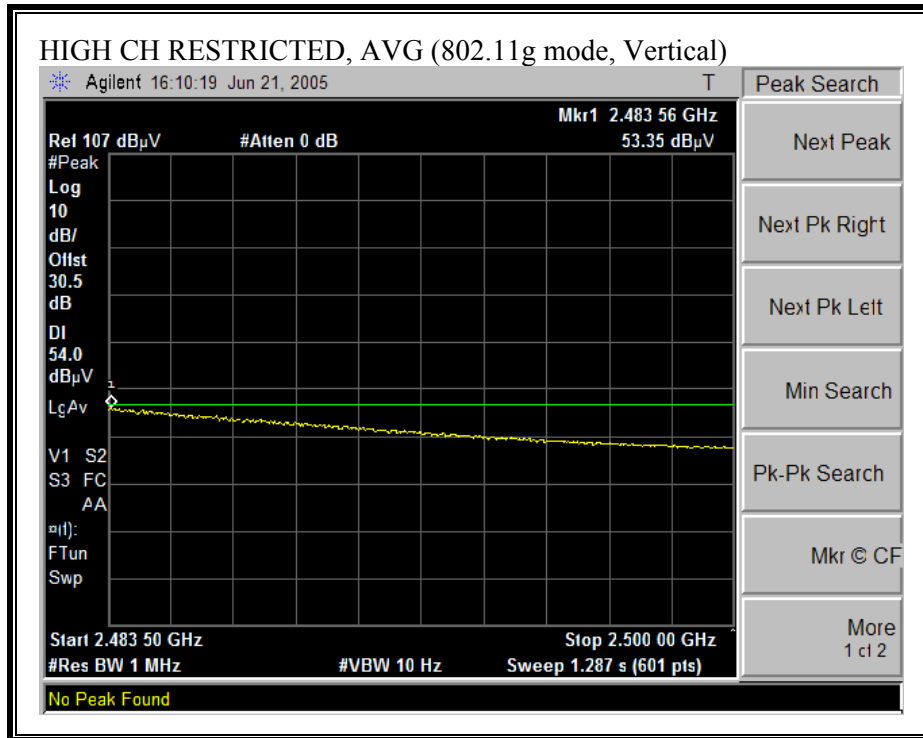

HARMONICS AND SPURIOUS EMISSIONS (g MODE)

06/22/05 **High Frequency Measurement**
 Compliance Certification Services, Morgan Hill Open Field Site

Test Engr:Chin Pang
 Project #:05I3515-1
 Company:Buffalo Inc.
 High Power CardBus Adapter
 EUT M/N:WLI-CB-G54HP
 Test Target:FCC 15.247
 Mode Oper:g mode, TX, with WLE-NDR antenna
 Average Power Meter: Low = 16 dBm, Mid = 16 dBm, High = 16 dBm

Test Equipment:

EMCO Horn 1-18GHz: T60; S/N: 2238 @3m
 Pre-amplifier 1-26GHz: T63 Miteq 646456
 Pre-amplifier 26-40GHz:
 Horn > 18GHz:
 Limit: FCC 15.205

Hi Frequency Cables:
 2 foot cable:
 3 foot cable: 3_Chin
 4 foot cable:
 12 foot cable: 12_Vien

HPF: HPF_4.0GHz
 Reject Filter:
Peak Measurements
 RBW=VBW=1MHz
Average Measurements
 RBW=1MHz ; VBW=10Hz

f GHz	Dist (m)	Read Pk dBuV	Read Avg. dBuV	AF dB/m	CL dB	Amp dB	D Corr dB	Fldr dB	Peak dBuV/m	Avg dBuV/m	Pk Lim dBuV/m	Avg Lim dBuV/m	Pk Mar dB	Avg Mar dB	Notes (V/H)
Low ch															
4.824	3.0	62.0	44.8	33.6	3.3	-37.9	0.0	0.6	61.6	44.4	74	54	-12.4	-9.6	V
4.824	3.0	59.8	42.5	33.6	3.3	-37.9	0.0	0.6	59.4	42.1	74	54	-14.6	-11.9	H
Mid ch															
4.874	3.0	70.2	49.6	33.7	3.3	-37.9	0.0	0.6	69.9	49.3	74	54	-4.1	-4.7	V
7.311	3.0	53.8	36.0	36.2	4.1	-36.9	0.0	0.6	57.8	40.0	74	54	-16.2	-14.0	V
4.874	3.0	64.1	45.0	33.7	3.3	-37.9	0.0	0.6	63.8	44.7	74	54	-10.2	-9.3	H
7.311	3.0	52.0	35.8	36.2	4.1	-36.9	0.0	0.6	56.0	39.8	74	54	-18.0	-14.2	H
High Ch															
4.924	3.0	68.8	49.0	33.7	3.3	-37.9	0.0	0.6	68.6	48.8	74	54	-5.4	-5.2	V
7.386	3.0	52.0	36.0	36.2	4.1	-36.9	0.0	0.6	56.2	40.2	74	54	-17.8	-13.8	V
4.924	3.0	67.6	46.0	33.7	3.3	-37.9	0.0	0.6	67.4	45.8	74	54	-6.6	-8.2	H
7.386	3.0	51.5	35.3	36.2	4.1	-36.9	0.0	0.6	55.7	39.5	74	54	-18.3	-14.5	H

Note: No other emissions were detected above the system noise floor.

f	Measurement Frequency	Amp	Preamp Gain	Avg Lim	Average Field Strength Limit
Dist	Distance to Antenna	D Corr	Distance Correct to 3 meters	Pk Lim	Peak Field Strength Limit
Read	Analyzer Reading	Avg	Average Field Strength @ 3 m	Avg Mar	Margin vs. Average Limit
AF	Antenna Factor	Peak	Calculated Peak Field Strength	Pk Mar	Margin vs. Peak Limit
CL	Cable Loss	HPF	High Pass Filter		

7.2.5 WORST-CASE RADIATED EMISSIONS BELOW 1 GHz

7.2.5.1 INTERNAL ANTENNA

SPURIOUS EMISSIONS 30 TO 1000 MHz (WORST-CASE CONFIGURATION, HORIZONTAL)

HORIZONTAL DATA

Condition: FCC CLASS-B HORIZONTAL
Test Operator: : Chin Pang
Project #: : o5I3515-1
Company: : Buffalo Inc.
EUT: : High Power Cardbus Adapter
Model No.: : WLI-CB-G54HP
Configuration : EUT/Laptop/AC adapter
Target of Test : FCC Class B
Mode of Operation: TX
: Internal Antenna

Page: 1

	Freq	Read Level	Factor	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB	
1	174.530	26.56	13.18	39.74	43.50	-3.76	Peak
2	198.780	25.70	14.37	40.07	43.50	-3.43	QP
3	303.540	26.85	15.75	42.60	46.00	-3.40	QP
4	237.580	28.71	13.39	42.10	46.00	-3.90	Peak
5	371.440	24.44	17.44	41.88	46.00	-4.12	Peak
6	390.840	21.18	17.83	39.01	46.00	-6.99	Peak

SPURIOUS EMISSIONS 30 TO 1000 MHz (WORST-CASE CONFIGURATION, VERTICAL)

VERTICAL DATA

Condition: FCC CLASS-B VERTICAL
Test Operator: : Chin Pang
Project #: : 05I3515-1
Company: : Buffalo Inc.
EUT: : High Power Cardbus Adapter
Model No. : WLI-CB-G54HP
Configuration : EUT/Laptop/AC adapter
Target of Test : FCC Class B
Mode of Operation: TX
: Internal Antenna

Page: 1

	Freq	Read Level	Factor	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB	
1	66.860	20.44	9.15	29.59	40.00	-10.41	Peak
2	174.530	21.04	13.18	34.22	43.50	-9.28	Peak
3	198.780	23.01	14.37	37.38	43.50	-6.12	Peak
4	237.580	20.53	13.39	33.92	46.00	-12.08	Peak
5	305.480	17.44	15.80	33.24	46.00	-12.76	Peak
6	439.340	17.21	18.96	36.17	46.00	-9.83	Peak

7.2.5.2 WLE-HG-NDR ANTENNA

SPURIOUS EMISSIONS 30 TO 1000 MHz (WORST-CASE CONFIGURATION, HORIZONTAL)

HORIZONTAL DATA

Condition: FCC CLASS-B HORIZONTAL
Test Operator: : Chin Pang
Project #: : 05I3515-1
Company: : Buffalo Inc.
EUT: : High Power Cardbus Adapter
Model No. : WLI-CE-G54HP
Configuration : EUT/Laptop/AC adapter
Target of Test : FCC Class B
Mode of Operation: TX
: With External Antenna, WLE-HG-NDR

Page: 1

	Freq	Read Level	Factor	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB	
1	124.090	24.60	15.23	39.83	43.50	-3.67	Peak
2	133.790	26.01	15.02	41.03	43.50	-2.47	Peak
3	169.680	25.53	13.40	38.93	43.50	-4.57	QP
4	237.580	29.76	13.39	43.15	46.00	-2.85	QP
5	304.510	21.80	15.78	37.57	46.00	-8.43	Peak
6	834.130	17.71	24.99	42.70	46.00	-3.30	Peak

SPURIOUS EMISSIONS 30 TO 1000 MHz (WORST-CASE CONFIGURATION, VERTICAL)

VERTICAL DATA

Condition: FCC CLASS-B VERTICAL
Test Operator: : Chin Pang
Project #: : 05I3515-1
Company: : Buffalo Inc.
EUT: : High Power Carbus Adapter
Model No. : WLI-CB-G54HP
Configuration : EUT/Laptop/AC adapter
Target of Test : FCC Class B
Mode of Operation: TX
: With External Antenna, WLE-HG-NDR

Page: 1

	Freq	Read Level	Factor	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB	
1	99.840	24.69	11.38	36.07	43.50	-7.43	Peak
2	124.090	24.40	15.23	39.63	43.50	-3.87	Peak
3	237.580	29.80	13.39	43.19	46.00	-2.81	QP
4	827.340	19.40	24.92	44.32	46.00	-1.68	Peak
5	303.540	23.54	15.75	39.29	46.00	-6.71	Peak
6	440.310	17.91	18.98	36.89	46.00	-9.11	Peak

7.2.5.3 WLE-DA ANTENNA

SPURIOUS EMISSIONS 30 TO 1000 MHz (WORST-CASE CONFIGURATION, HORIZONTAL)

HORIZONTAL DATA

Condition: FCC CLASS-B HORIZONTAL
Test Operator: : Chin Pang
Project #: : 05I3515-1
Company: : Buffalo Inc.
EUT: : High Power Carbus Adapter
Model No. : WLI-CB-G54HP
Configuration : EUT/Laptop/AC adapter
Target of Test : FCC Class B
Mode of Operation: TX
: With External Antenna, WLE-DA

Page: 1

	Freq	Read Level	Factor	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB	
1	145.430	25.64	14.54	40.18	43.50	-3.33	Peak
2	187.140	27.70	12.85	40.55	43.50	-2.95	QP
3	193.930	26.30	13.56	39.86	43.50	-3.64	QP
9	373.380	25.09	17.46	42.55	46.00	-3.45	Peak
5	235.640	28.75	13.30	42.05	46.00	-3.95	QP
6	252.130	28.38	13.96	42.34	46.00	-3.66	Peak

SPURIOUS EMISSIONS 30 TO 1000 MHz (WORST-CASE CONFIGURATION, VERTICAL)

VERTICAL DATA

Condition: FCC CLASS-B VERTICAL
Test Operator: : Chin Pang
Project #: : 05I3515-1
Company: : Buffalo Inc.
EUT: : High Power Cardbus Adapter
Model No. : WLI-CB-G54HP
Configuration : EUT/Laptop/AC adapter
Target of Test : FCC Class B
Mode of Operation: TX
: With External Antenna, WLE-DA

Page: 1

	Freq	Read Level	Factor	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB	
1	99.840	23.72	11.38	35.10	43.50	-8.40	Peak
2	199.750	21.03	14.50	35.53	43.50	-7.97	Peak
3	235.640	28.11	13.30	41.41	46.00	-4.59	QP
4	240.490	28.00	13.54	41.54	46.00	-4.46	QP
5	393.750	19.58	17.88	37.46	46.00	-8.54	Peak
9	407.330	18.80	18.21	37.01	46.00	-8.99	Peak

7.2.5.4 WLE-MYG ANTENNA

SPURIOUS EMISSIONS 30 TO 1000 MHz (WORST-CASE CONFIGURATION, HORIZONTAL)

HORIZONTAL DATA

Condition: FCC CLASS-B HORIZONTAL
Test Operator: : Chin Pang
Project #: : 05I3515-1
Company: : Buffalo Inc.
EUT: : High Power Cardbus Adapter
Model No. : WLI-CB-G54HP
Configuration : EUT/Laptop/AC adapter
Target of Test : FCC Class B
Mode of Operation: TX
: With External Antenna, WLE-MYG

Page: 1

	Freq	Read Level	Factor	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB	
1	138.640	24.18	14.89	39.07	43.50	-4.43	Peak
2	169.680	26.85	13.40	40.25	43.50	-3.25	Peak
3	305.480	26.83	15.80	42.63	46.00	-3.37	QP
4	373.380	26.21	17.46	43.67	46.00	-2.33	QP
5	339.430	27.58	16.61	44.19	46.00	-1.81	Peak
6	405.390	24.40	18.18	42.58	46.00	-3.42	Peak

SPURIOUS EMISSIONS 30 TO 1000 MHZ (WORST-CASE CONFIGURATION, VERTICAL)

VERTICAL DATA

Condition: FCC CLASS-B VERTICAL
 Test Operator: : Chin Pang
 Project #: : 05I3515-1
 Company: : Buffalo Inc.
 EUT: : High Power Cardbus Adapter
 Model No. : WLI-CB-G54HP
 Configuration : EUT/Laptop/AC adapter
 Target of Test : FCC Class B
 Mode of Operation: TX
 : With External Antenna, WLE-MYG

Page: 1

	Freq	Read Level	Factor	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB	
1	101.780	26.05	11.77	37.82	43.50	-5.68	Peak
2	128.940	26.07	15.15	41.22	43.50	-2.28	QP
3	168.710	28.40	13.46	41.85	43.50	-1.65	Peak
4	304.510	24.55	15.78	40.33	46.00	-5.67	Peak
5	372.410	21.50	17.45	38.95	46.00	-7.05	Peak
6	393.750	19.96	17.88	37.84	46.00	-8.16	Peak

7.2.5.5 WLE-NDR ANTENNA

SPURIOUS EMISSIONS 30 TO 1000 MHz (WORST-CASE CONFIGURATION, HORIZONTAL)

HORIZONTAL DATA

Condition: FCC CLASS-B HORIZONTAL
Test Operator: : Chin Pang
Project #: : 05I3515-1
Company: : Buffalo Inc.
EUT: : High Power Cardbus Adapter
Model No. : WLI-CB-G54HP
Configuration : EUT/Laptop/AC adapter
Target of Test : FCC Class B
Mode of Operation: TX
: With External Antenna, WLE-NDR

Page: 1

	Freq	Read Level	Factor	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB	
1	133.790	23.93	15.02	38.95	43.50	-4.55	Peak
2	169.680	28.07	13.40	41.47	43.50	-2.03	Peak
3	201.690	27.16	14.32	41.48	43.50	-2.02	QP
4	305.480	21.59	15.80	37.39	46.00	-8.61	Peak
5	240.490	23.65	13.54	37.19	46.00	-8.81	Peak
6	457.770	14.67	19.38	34.05	46.00	-11.95	Peak

SPURIOUS EMISSIONS 30 TO 1000 MHz (WORST-CASE CONFIGURATION, VERTICAL)

VERTICAL DATA

Condition: FCC CLASS-B VERTICAL
Test Operator: : Chin Pang
Project #: : 05I3515-1
Company: : Buffalo Inc.
EUT: : High Power Cardbus Adapter
Model No. : WLI-CB-G54HP
Configuration : EUT/Laptop/AC adapter
Target of Test : FCC Class B
Mode of Operation: TX
: With External Antenna, WLE-NDR

Page: 1

	Freq	Read Level	Factor	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB	
1	101.780	22.51	11.77	34.28	43.50	-9.22	Peak
2	130.880	20.09	15.09	35.18	43.50	-8.32	Peak
3	203.630	24.88	14.01	38.89	43.50	-4.61	Peak
4	237.580	25.68	13.39	39.07	46.00	-6.93	Peak
5	440.310	18.59	18.98	37.57	46.00	-8.43	Peak
6	507.240	17.82	20.31	38.13	46.00	-7.87	Peak

7.3. POWERLINE CONDUCTED EMISSIONS

LIMIT

§15.207 (a) Except as shown in paragraphs (b) and (c) of this section, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50 μ H/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal.

The lower limit applies at the boundary between the frequency ranges.

Frequency of Emission (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.

TEST PROCEDURE

The EUT is placed on a non-conducting table 40 cm from the vertical ground plane and 80 cm above the horizontal ground plane. The EUT is configured in accordance with ANSI C63.4.

The resolution bandwidth is set to 9 kHz for both peak detection and quasi-peak detection measurements. Peak detection is used unless otherwise noted as quasi-peak.

Line conducted data is recorded for both NEUTRAL and HOT lines.

RESULTS

No non-compliance noted:

6 WORST EMISSIONS


EUT with Internal Antenna

CONDUCTED EMISSIONS DATA (115VAC 60Hz)									
Freq.	Reading			Closs	Limit	EN B	Margin		Remark
(MHz)	PK (dBuV)	QP (dBuV)	AV (dBuV)	(dB)	QP	AV	QP (dB)	AV (dB)	L1 / L2
0.44	28.64	--	--	0.00	57.02	47.02	-28.38	-18.38	L1
0.92	33.72	--	--	0.00	56.00	46.00	-22.28	-12.28	L1
11.62	31.90	--	--	0.00	60.00	50.00	-28.10	-18.10	L1
0.43	29.20	--	--	0.00	57.25	47.25	-28.05	-18.05	L2
0.92	32.96	--	--	0.00	56.00	46.00	-23.04	-13.04	L2
14.14	23.58	--	--	0.00	60.00	50.00	-36.42	-26.42	L2
6 Worst Data EUT with Internal Antenna									


EUT with Highest Gain external antenna

CONDUCTED EMISSIONS DATA (115VAC 60Hz)									
Freq.	Reading			Closs	Limit	EN B	Margin		Remark
(MHz)	PK (dBuV)	QP (dBuV)	AV (dBuV)	(dB)	QP	AV	QP (dB)	AV (dB)	L1 / L2
0.92	29.20	--	--	0.00	56.00	46.00	-26.80	-16.80	L1
0.81	24.05	--	--	0.00	56.00	46.00	-31.95	-21.95	L1
14.14	25.40	--	--	0.00	60.00	50.00	-34.60	-24.60	L1
0.81	25.26	--	--	0.00	56.00	46.00	-30.74	-20.74	L2
0.92	28.94	--	--	0.00	56.00	46.00	-27.06	-17.06	L2
11.93	35.26	--	--	0.00	60.00	50.00	-24.74	-14.74	L2
6 Worst Data EUT with external high gain antennas									


LINE 1 RESULTS with Internal Antenna

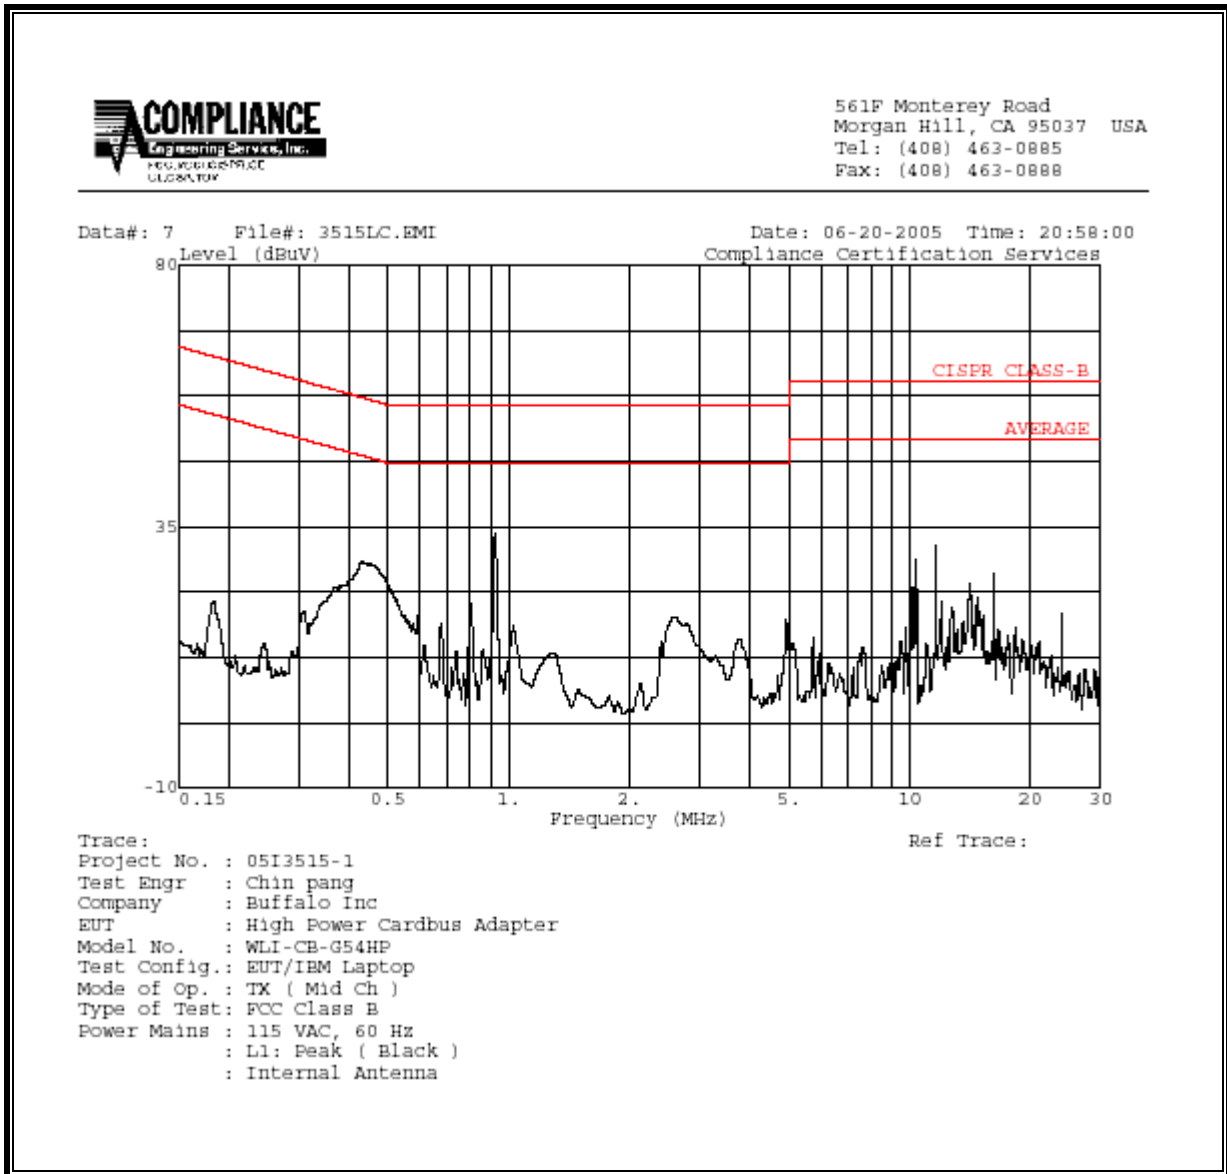

LINE 2 RESULTS with Internal Antenna

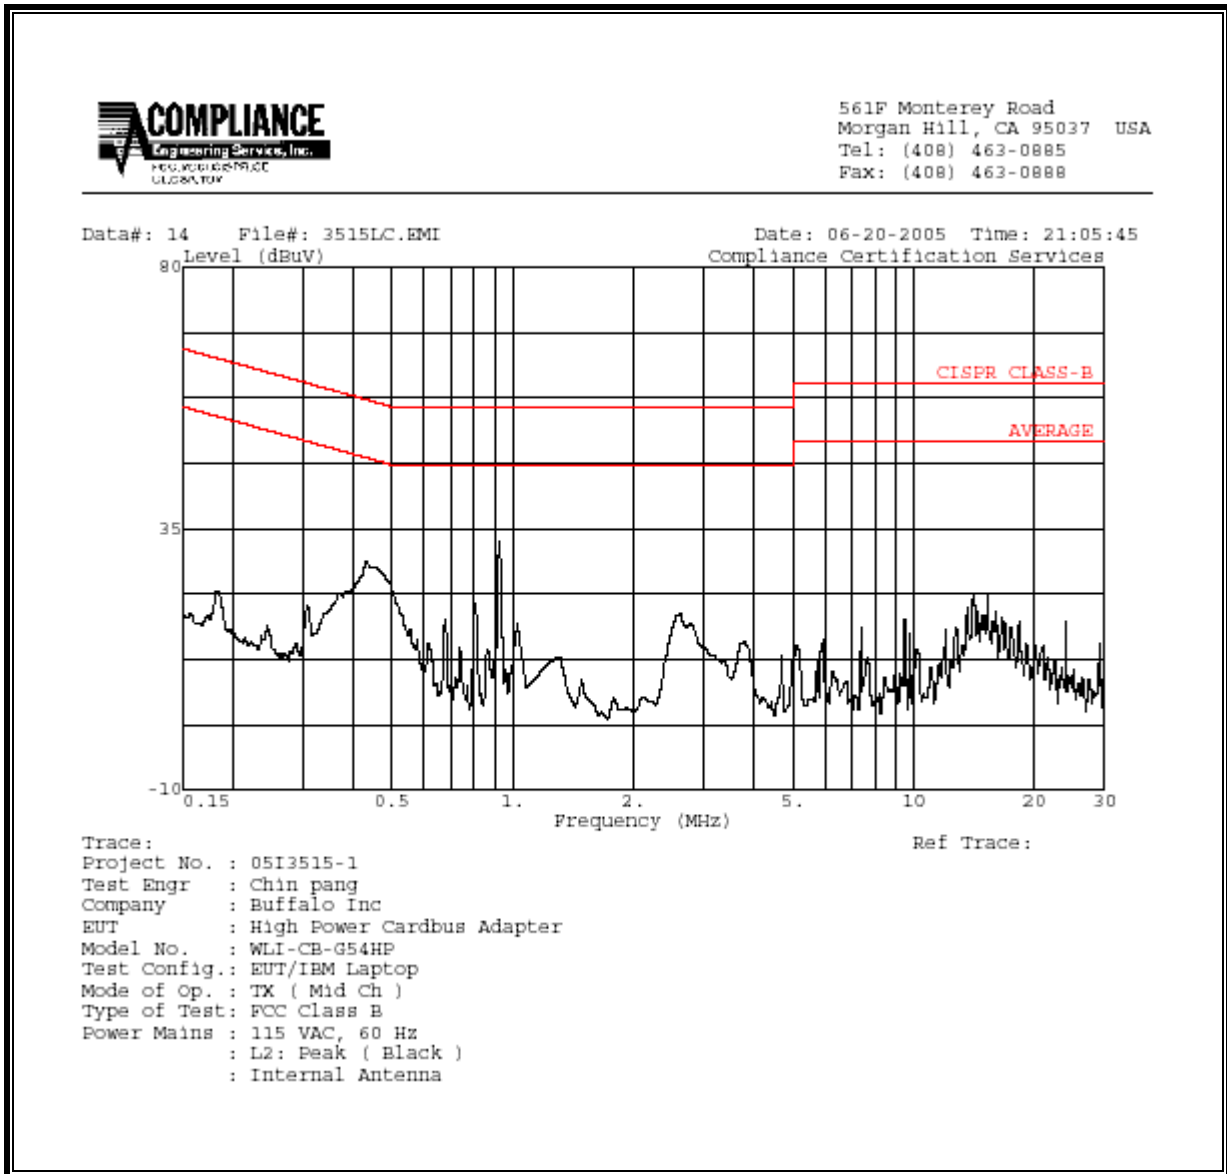

LINE 1 RESULTS With High Gain External Antenna WLE-HG-NDR

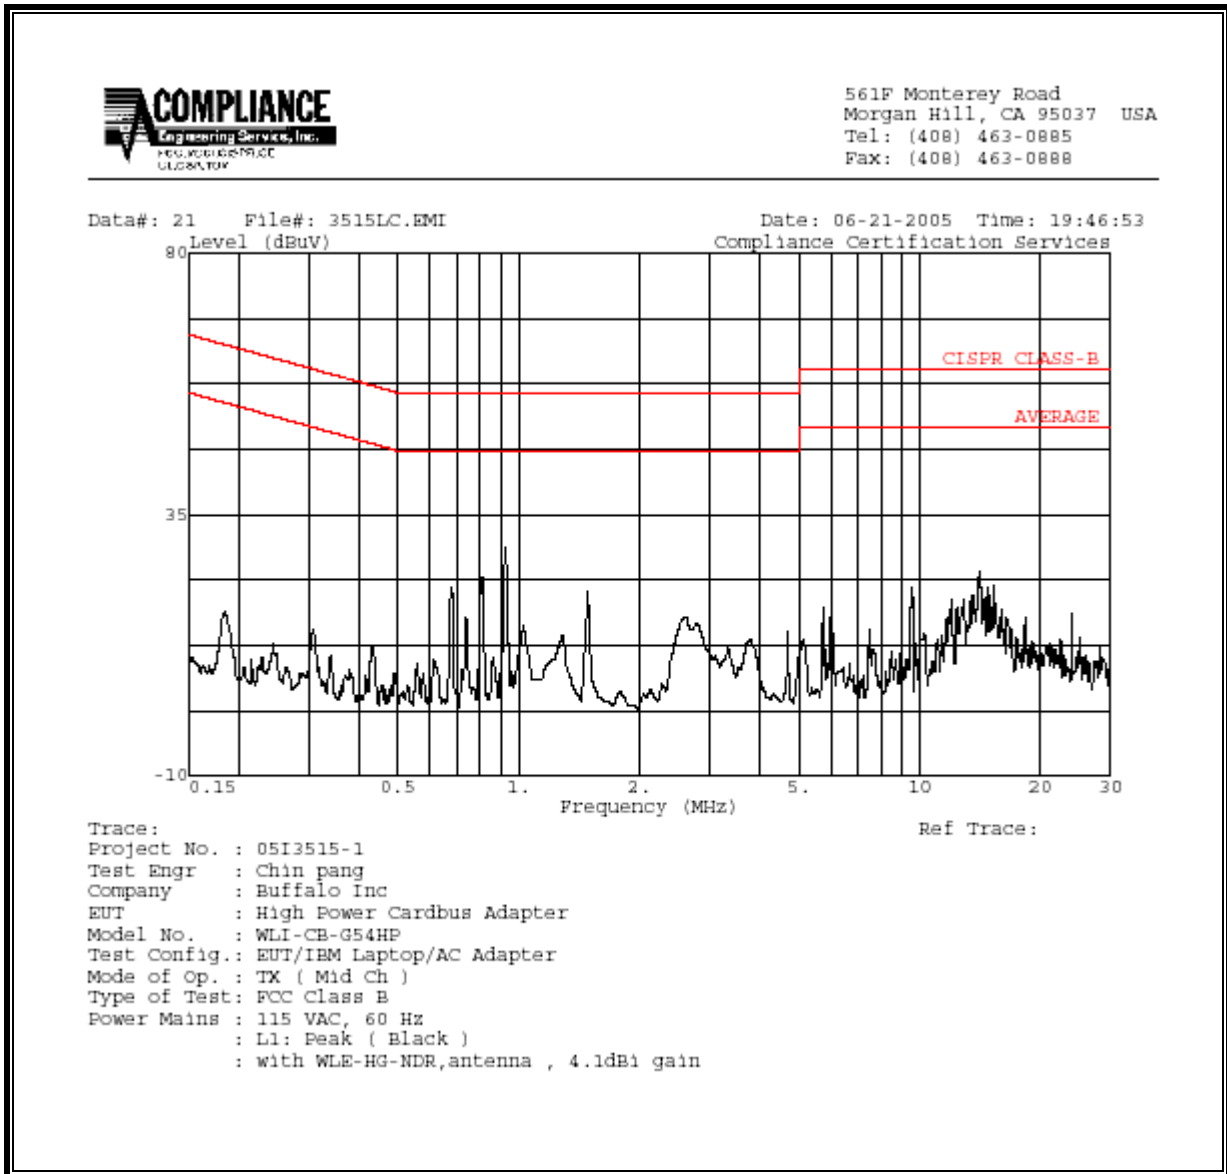

LINE 2 RESULTS With High Gain External Antenna WLE-HG-NDR

