



SAR Evaluation Report

**IN ACCORDANCE WITH THE REQUIREMENTS OF
FCC REPORT AND ORDER:
ET DOCKET 93-62, AND OET BULLETIN 65 SUPPLEMENT C**

FOR

High Power Dual A+G Wireless USB 2.0 Adapter

MODEL: WLI-U2-AG108HP

FCC ID: FDI-09102002-0

REPORT NUMBER: 06J10094-10

ISSUE DATE: MARCH 2, 2006

Prepared for

**BUFFALO INC.
15, SHIBATA HONDORI 4-CHOME, MINAMI-KU
NAGOYA 457-8520, JAPAN**

Prepared by

**COMPLIANCE CERTIFICATION SERVICES
561F MONTEREY ROAD,
MORGAN HILL, CA 95037, USA
TEL: (408) 463-0885**

NVLAP[®]
LAB CODE:200065-0

Revision History

Rev.	Issued date	Revisions	Revised By
A	March 2, 2006	Initial issue	HS

CERTIFICATE OF COMPLIANCE (SAR EVALUATION)**DATES OF TEST:** March 1 & 2, 2006

APPLICANT:	Buffalo Inc.
ADDRESS:	15, shibata Hondori 4-chome, Minami-ku, Nagoya 457-8520, Japan
FCC ID:	FDI-09102002-0
MODEL:	WLI-U2-AG108HP
DEVICE CATEGORY:	Portable Device
EXPOSURE CATEGORY:	General Population/Uncontrolled Exposure

The EUT is an 802.11abg USB Adapter with High Gain Antenna connected to the host laptops through USB ports.


Test Sample is a:	Production unit		
Modulation type:	Direct Sequence Spread Spectrum (DSSS) for 802.11b Orthogonal Frequency Division Multiplexing (OFDM) for 802.11ag		
Host Device(s):	Host # 1: Dell, Inspiron 600m Host # 2: Dell, Inspiron 6000 Host # 3: Toshiba, Satellite		
Antenna(s)	Dual-Band Directional Antenna, BUF05-221210, Buffalo		
FCC Rule Parts	Frequency Range [MHz]	The Highest SAR Values [1g_mW/g]	Collocation SAR Values [1g_mW/g]
15.247	2412 – 2462	Host # 1: 0.200 Host # 2: 0.213 Host # 3: 0.238	N/A N/A N/A
15.401	5180 - 5320	Host # 3: 0.044	N/A

This wireless portable device has been shown to be capable of compliance for localized specific absorption rate (SAR) for General Population/Uncontrolled Exposure limits specified in ANSI/IEEE Std. C95.1-1992 and had been tested in accordance with the measurement procedures specified in FCC OET 65 Supplement C (Edition 01-01).

Note: The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by Compliance Certification Services and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by Compliance Certification Services will constitute fraud and shall nullify the document. No part of this report may be used to claim product certification, approval, or endorsement by NVLAP, NIST, or any government agency.

Approved & Released For CCS By:

Tested By:




Hsin Fu Shih
Senior Engineer
Compliance Certification Services

Ninous Davoudi
EMC Engineer
Compliance Certification Services

Table Of Contents

1	EQUIPMENT UNDER TEST (EUT) DESCRIPTION	5
2	FACILITIES AND ACCREDITATION	5
3	SYSTEM DESCRIPTION	6
3.1	SYSTEM COMPONENTS	6
3.1.1	DASY4 MEASUREMENT SERVER	6
3.1.2	DATA ACQUISITION ELECTRONICS (DAE)	6
3.1.3	EX3DV3 ISOTROPIC E-FIELD PROBE FOR DOSIMETRIC MEASUREMENTS	6
3.1.4	LIGHT BEAM UNIT	6
3.1.5	SAM PHANTOM (V4.0)	6
3.2	COMPOSITION OF INGREDIENTS FOR TISSUE SIMULATING LIQUIDS	7
4	SIMULATING LIQUID PARAMETERS CHECK	8
4.1	SIMULATING LIQUID PARAMETER CHECK RESULT	10
5	SYSTEM PERFORMANCE CHECK	12
5.1	SYSTEM PERFORMANCE CHECK RESULTS	14
6	SAR MEASUREMENT PROCEDURE	15
6.1	DASY4 SAR MEASUREMENT PROCEDURE	16
7	PROCEDURE USED TO ESTABLISH TEST SIGNAL	17
8	SAR MEASUREMENT RESULTS (2.4GHZ)	18
8.1	POSITION 1 (DELL INSPIRON 600M)	18
8.2	POSITION 1 (DELL INSPIRON 6000)	19
8.3	POSITION 1 (TOSHIBA SATELLITE)	20
8.4	POSITION 2 (TOSHIBA LAPTOP)	21
8.5	POSITION 3 (TOSHIBA LAPTOP)	22
8.6	POSITION 4 (TOSHIBA LAPTOP)	23
9	SAR MEASUREMENT RESULTS (5GHZ)	24
9.1	POSITION 1 (TOSHIBA SATELLITE)	24
9.2	POSITION 2 (TOSHIBA SATELLITE)	25
9.3	POSITION 3 (TOSHIBA SATELLITE)	26
9.4	POSITION 4 (TOSHIBA SATELLITE)	27
10	MEASUREMENT UNCERTAINTY	28
10.1	MEASUREMENT UNCERTAINTY FOR 300 MHZ – 3000 MHZ	28
10.2	MEASUREMENT UNCERTAINTY 3 GHZ – 6 GHZ	29
11	EQUIPMENT LIST AND CALIBRATION	30
12	EUT PHOTOS	31
13	ATTACHMENTS	39

1 EQUIPMENT UNDER TEST (EUT) DESCRIPTION

The EUT is an 802.11abg USB Adapter with High Gain Antenna connected to the host laptops through USB ports.	
Normal operation:	Lap-held position
Accessory:	N/A
Earphone/Headset Jack:	N/A
Duty cycle:	100%
Host Device(s):	Host # 1: Dell, Inspiron 600m Host # 2: Dell, Inspiron 6000 Host # 3: Toshiba, Satellite
Antenna(s)	Dual-Band Directional Antenna, BUF05-221210, Buffalo
Power supply:	Power supplied through the laptop computer (host device).

2 FACILITIES AND ACCREDITATION

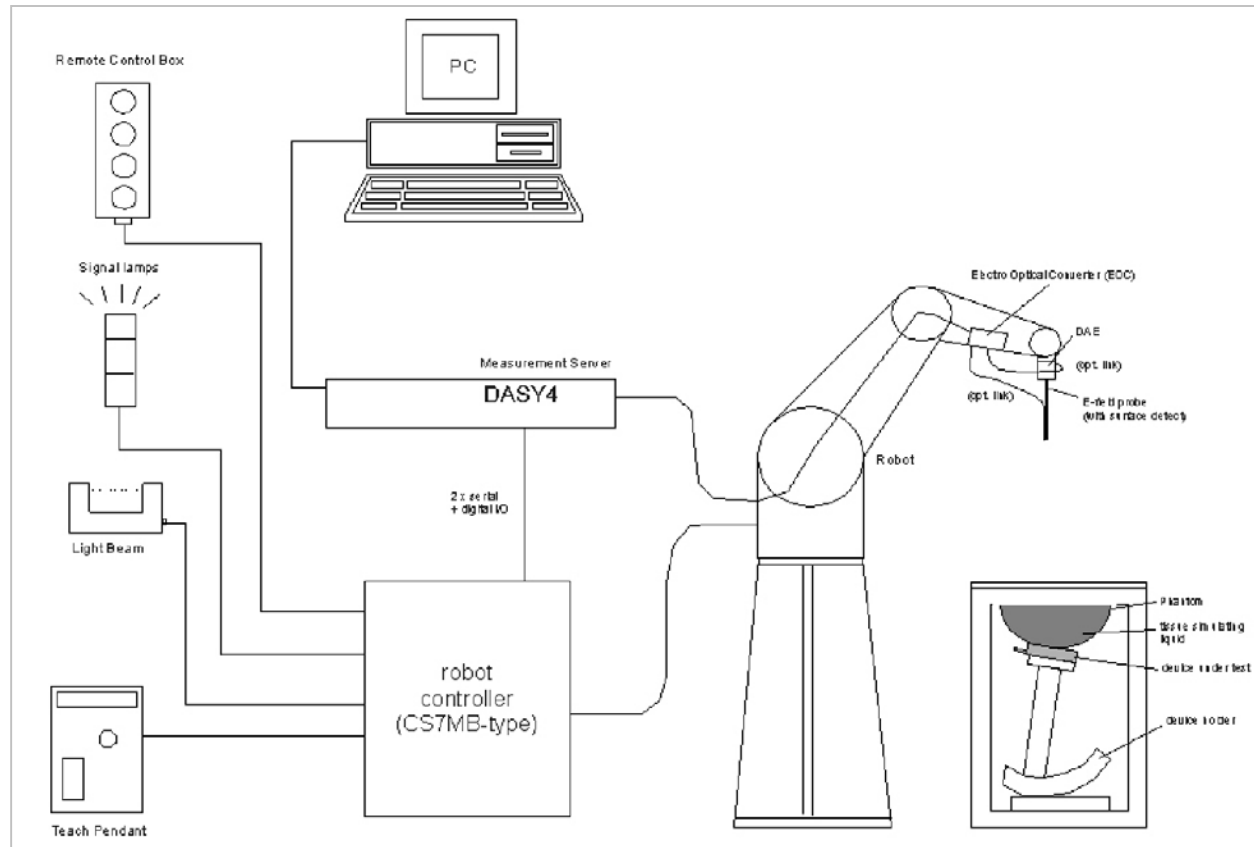
The test sites and measurement facilities used to collect data are located at 561F Monterey Road, Morgan Hill, California, USA. The sites are constructed in conformance with the requirements of ANSI C63.4, ANSI C63.7 and CISPR Publication 22. All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."



CCS is accredited by NVLAP, Laboratory Code 200065-0. The full scope of accreditation can be viewed at <http://www.ccsemc.com>.

No part of this report may be used to claim product certification, approval, or endorsement by NVLAP, NIST, or any government agency.

3 SYSTEM DESCRIPTION



The DASY4 system for performing compliance tests consists of the following items:

- A standard high precision 6-axis robot (Stäubli RX family) with controller, teach pendant and software. An arm extension for accommodating the data acquisition electronics (DAE).
- A dosimetric probe, i.e., an isotropic E-field probe optimized and calibrated for usage in tissue simulating liquid. The probe is equipped with an optical surface detector system.
- A data acquisition electronics (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
- The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- A probe alignment unit which improves the (absolute) accuracy of the probe positioning.
- A computer operating Windows 2000 or Windows XP.
- DASY4 software.
- Remote controls with teach pendant and additional circuitry for robot safety such as warning lamps, etc.
- The SAM twin phantom enabling testing left-hand and right-hand usage.
- The device holder for handheld mobile phones.
- Tissue simulating liquid mixed according to the given recipes.
- Validation dipole kits allowing to validate the proper functioning of the system.

3.1 COMPOSITION OF INGREDIANTS FOR TISSUE SIMULATIG LIQUIDS

The following tissue formulations are provided for reference only as some of the parameters have not been thoroughly verified. The composition of ingredients may be modified accordingly to achieve the desired target tissue parameters required for routine SAR evaluation.

Ingredients (% by weight)	Frequency (MHz)									
	450		835		915		1900		2450	
Tissue Type	Head	Body	Head	Body	Head	Body	Head	Body	Head	Body
Water	38.56	51.16	41.45	52.4	41.05	56.0	54.9	40.4	62.7	73.2
Salt (NaCl)	3.95	1.49	1.45	1.4	1.35	0.76	0.18	0.5	0.5	0.04
Sugar	56.32	46.78	56.0	45.0	56.5	41.76	0.0	58.0	0.0	0.0
HEC	0.98	0.52	1.0	1.0	1.0	1.21	0.0	1.0	0.0	0.0
Bactericide	0.19	0.05	0.1	0.1	0.1	0.27	0.0	0.1	0.0	0.0
Triton X-100	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	36.8	0.0
DGBE	0.0	0.0	0.0	0.0	0.0	0.0	44.92	0.0	0.0	26.7
Dielectric Constant	43.42	58.0	42.54	56.1	42.0	56.8	39.9	54.0	39.8	52.5
Conductivity (S/m)	0.85	0.83	0.91	0.95	1.0	1.07	1.42	1.45	1.88	1.78

Salt: 99+% Pure Sodium Chloride

Sugar: 98+% Pure Sucrose

Water: De-ionized, 16 MΩ+ resistivity

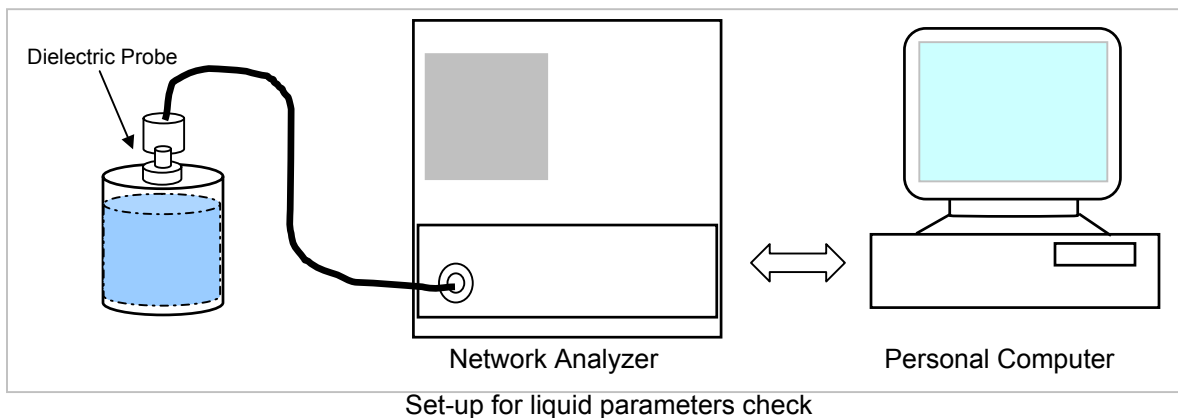
HEC: Hydroxyethyl Cellulose

DGBE: 99+% Di(ethylene glycol) butyl ether, [2-(2-butoxyethoxy)ethanol]

Triton X-100 (ultra pure): Polyethylene glycol mono [4-(1,1, 3, 3-tetramethylbutyl)phenyl]ether

4 SIMULATING LIQUID PARAMETERS CHECK

The simulating liquids should be checked at the beginning of a series of SAR measurements to determine if the dielectric parameters are within the tolerances of the specified target values. The relative permittivity and conductivity of the tissue material should be within $\pm 5\%$ of the values given in the table below.



Reference Values of Tissue Dielectric Parameters for Head and Body Phantom (for 150 – 3000 MHz and 5800 MHz)

The head tissue dielectric parameters recommended by the IEEE SCC-34/SC-2 in IEEE Standard 1528 have been incorporated in the following table. These head parameters are derived from planar layer models simulating the highest expected SAR for the dielectric properties and tissue thickness variations in a human head. Other head and body tissue parameters that have not been specified in P1528 are derived from the tissue dielectric parameters computed from the 4-Cole-Cole equations and extrapolated according to the head parameters specified in IEEE Standard 1528.

Target Frequency (MHz)	Head		Body	
	ϵ_r	σ (S/m)	ϵ_r	σ (S/m)
150	52.3	0.76	61.9	0.80
300	45.3	0.87	58.2	0.92
450	43.5	0.87	56.7	0.94
835	41.5	0.90	55.2	0.97
900	41.5	0.97	55.0	1.05
915	41.5	0.98	55.0	1.06
1450	40.5	1.20	54.0	1.30
1610	40.3	1.29	53.8	1.40
1800 – 2000	40.0	1.40	53.3	1.52
2450	39.2	1.80	52.7	1.95
3000	38.5	2.40	52.0	2.73
5800	35.3	5.27	48.2	6.00

(ϵ_r = relative permittivity, σ = conductivity and $\rho = 1000 \text{ kg/m}^3$)

Reference Values of Tissue Dielectric Parameters for Head and Body Phantom (for 3000 MHz – 5800 MHz)

In the current guidelines and draft standards for compliance testing of mobile phones (i.e., IEEE P1528, OET 65 Supplement C), the dielectric parameters suggested for head and body tissue simulating liquid are given only at 3.0 GHz and 5.8 GHz. As an intermediate solution, dielectric parameters for the frequencies between 5 to 5.8 GHz were obtained using linear interpolation (see table below).

SPEAG has developed suitable head and body tissue simulating liquids consisting of the following ingredients: de-ionized water, salt and a special composition including mineral oil and an emulgators. Dielectric parameters of these liquids were measured using a HP 8570C Dielectric Probe Kit in conjunction with HP 8753ES Network Analyzer (30 kHz – 6G Hz). The differences with respect to the interpolated values were well within the desired $\pm 5\%$ for the whole 5 to 5.8 GHz range.

f (MHz)	Head Tissue		Body Tissue		Reference
	rel. permittivity	conductivity	rel. permittivity	conductivity	
3000	38.5	2.40	52.0	2.73	Standard
5800	35.3	5.27	48.2	6.00	Standard
5000	36.2	1.45	49.3	5.07	Interpolated
5100	36.1	4.55	49.1	5.18	Interpolated
5200	36.0	4.66	49.0	5.30	Interpolated
5300	35.9	4.76	48.9	5.42	Interpolated
5400	35.8	4.86	48.7	5.53	Interpolated
5500	35.6	4.96	48.6	5.65	Interpolated
5600	35.5	5.07	48.5	5.77	Interpolated
5700	35.4	5.17	48.3	5.88	Interpolated

(ϵ_r = relative permittivity, σ = conductivity and ρ = 1000 kg/m³)

4.1 Simulating Liquid Parameter Check Result

Simulating Liquid Dielectric Parameter Check Result @ Muscle 2450 MHz

Room Ambient Temperature =23°C; Relative humidity = 35%

Measured by: Ninous Davoudi

Simulating Liquid			Parameters		Target	Measured	Deviation (%)	Limit (%)
f (MHz)	Temp. (°C)	Depth (cm)	e"	Relative Permittivity (e')				
2450	21	15	e"	Relative Permittivity (e'):	52.7	52.7762	0.14	± 5
			14.9068	Conductivity (σ):	1.95	2.03175	4.19	± 5

Liquid Check

Ambient temperature: 23.0 deg. C; Liquid temperature: 21.0 deg C

March 01, 2006 09:20 AM

Frequency	e'	e"
2400000000.	52.9344	14.6795
2410000000.	52.9127	14.7216
2420000000.	52.8699	14.7759
2430000000.	52.8501	14.8168
2440000000.	52.8094	14.8432
2450000000.	52.7762	14.9068
2460000000.	52.7313	14.9246
2470000000.	52.6793	14.9682
2480000000.	52.6476	14.9936
2490000000.	52.6200	15.0299
2500000000.	52.5878	15.1083

The conductivity (σ) can be given as:

$$\sigma = \omega \epsilon_0 e'' = 2 \pi f \epsilon_0 e''$$

where $f = \text{target } f * 10^6$

$$\epsilon_0 = 8.854 * 10^{-12}$$

Simulating Liquid Parameter Check Result @ Muscle 5200 & 5800 MHz

Ambient Temperature = 24°C; Relative humidity = 35%

Measured by: Ninous Davoudi

Simulating Liquid			Parameters		Target	Measured	Deviation (%)	Limit (%)
f (MHz)	Temp. (°C)	Depth (cm)	e'	Relative Permittivity (e'')				
5200	23	15			49.0	47.4587	-3.15	± 5
			18.8162	Conductivity (σ):	5.30	5.44320	2.70	± 5

Liquid Check

Ambient temperature: 24.0 deg. C; Liquid temperature: 23.0 deg C

March 02, 2006 09:07 AM

Frequency	e'	e''
4600000000.	48.7033	17.8919
4650000000.	48.5921	17.9965
4700000000.	48.5063	18.0516
4750000000.	48.3846	18.1584
4800000000.	48.3077	18.2219
4850000000.	48.1913	18.2955
4900000000.	48.1106	18.3849
4950000000.	47.9855	18.4447
5000000000.	47.8829	18.5308
5050000000.	47.7775	18.6054
5100000000.	47.6707	18.6950
5150000000.	47.5627	18.7518
5200000000.	47.4587	18.8162
5250000000.	47.3481	18.8864
5300000000.	47.2354	18.9481
5350000000.	47.1404	19.0136
5400000000.	47.0383	19.0588
5450000000.	46.9320	19.1328
5500000000.	46.8410	19.1816
5550000000.	46.7270	19.2808
5600000000.	46.6425	19.3172
5650000000.	46.5247	19.3854
5700000000.	46.4568	19.4287
5750000000.	46.3161	19.4834
5800000000.	46.2487	19.5516
5850000000.	46.1089	19.6076
5900000000.	46.0500	19.6734
5950000000.	45.9299	19.7222
6000000000.	45.8192	19.7985

The conductivity (σ) can be given as:

$$\sigma = \omega \epsilon_0 \epsilon'' = 2 \pi f \epsilon_0 \epsilon''$$

where $f = \text{target } f * 10^6$

$$\epsilon_0 = 8.854 * 10^{-12}$$

5 SYSTEM PERFORMANCE CHECK

The system performance check is performed prior to any usage of the system in order to guarantee reproducible results. The system performance check verifies that the system operates within its specifications of $\pm 10\%$.

System Performance Check Measurement Conditions

- The measurements were performed in the flat section of the SAM twin phantom filled with Body simulating liquid of the following parameters.
- The DASY4 system with an Isotropic E-Field Probe EX3DV3-SN: 3531 was used for the measurements.
- The dipole was mounted on the small tripod so that the dipole feed point was positioned below the center marking of the flat phantom section and the dipole was oriented parallel to the body axis (the long side of the phantom). The standard measuring distance was 10 mm (above 1 GHz) and 15 mm (below 1 GHz) from dipole center to the simulating liquid surface.
- The coarse grid with a grid spacing of 15 mm was aligned with the dipole.
For 5 GHz band - The coarse grid with a grid spacing of 10 mm was aligned with the dipole.
- Special 5 x 5 x 7 fine cube was chosen for cube integration(dx=dy=7.5mm; dz=5mm).
For 5 GHz band - Special 8x8x8 fine cube was chosen for cube integration(dx=dy=4.3mm; dz=3mm)
- Distance between probe sensors and phantom surface was set to 4 mm.
For 5 GHz band - Distance between probe sensors and phantom surface was set to 2.0mm
- The dipole input power (forward power) was 250 mW $\pm 3\%$.
- The results are normalized to 1 W input power.

Reference SAR Values for body-tissue

In the table below, the numerical reference SAR values of a SPEAG validation dipoles placed below the flat phantom filled with body-tissue simulating liquid are given. The reference SAR values were calculated using the finite-difference time-domain method and the geometry parameters.

Dipole Type	Distance (mm)	Frequency (MHz)	SAR (1g) [W/kg]	SAR (10g) [W/kg]	SAR (peak) [W/kg]
D450V2	15	450	5.01	3.36	7.22
D835V2	15	835	9.71	6.38	14.1
D900V2	15	900	11.1	7.17	16.3
D1450V2	10	1450	29.6	16.6	49.8
D1800V2	10	1800	38.5	20.3	67.5
D1900V2	10	1900	39.8	20.8	69.6
D2000V2	10	2000	40.9	21.2	71.5
D2450V2	10	2450	51.2	23.7	97.6

Note: All SAR values normalized to 1 W forward power.

Reference SAR Values for body-tissue

In the table below, the numerical reference SAR values of a SPEAG validation dipoles placed below the flat phantom filled with body-tissue simulating liquid are given. The reference SAR values were calculated using finite-difference time-domain FDTD method (feed point-impedance set to 50 ohms) and the mechanical dimensions of the D5GHzV2 dipole (manufactured by SPEAG).

f (MHz)	Head Tissue		Body Tissue		
	SAR _{1g}	SAR _{10g}	SAR _{1g}	SAR _{10g}	SAR _{Peak}
5000	72.9	20.7	68.1	19.2	260.3
5100	74.6	21.1	78.8	19.6	272.3
5200	76.5	21.6	71.8	20.1	284.7
5800	78.0	21.9	74.1	20.5	324.7

Note: All SAR values normalized to 1 W forward power.

5.1 System Performance check results**System Validation Dipole: D2450V2 SN: 748**

Date: March 1, 2006

Ambient Temperature = 23°C; Relative humidity = 35 %

Measured by: Ninous Davoudi

Body Simulating Liquid			Mrasured		Target_1g	Deviation[%]	Lim it [%]
f (MHz)	Temp. [°C]	Depth [cm]	1g	Normalized to 1 W			
2450	21	15	13.00	52	51.2	1.56	± 10
			10g	Normalized to 1 W	Target_10g	Deviation[%]	Lim it [%]
			5.92	23.68	23.7	-0.08	± 10

System Validation Dipole: D5GHzV2 SN 1003

Date: March 2, 2006

Ambient Temperature = 24°C; Relative humidity = 35%

Measured by: Ninous Davoudi

Body Simulating Liquid			Mrasured		Target 1g	Deviation[%]	Lim it [%]
f (MHz)	Temp. [°C]	Depth [cm]	1g	Normalized to 1 W			
5200	23	15	16.9	67.6	71.8	-5.85	± 10
			1g	Normalized to 1 W	Target 10g	Deviation[%]	Lim it [%]
			4.86	19.44	20.1	-3.28	± 10

6 SAR MEASUREMENT PROCEDURE

A summary of the procedure follows:

- a) A measurement of the SAR value at a fixed location is used as a reference value for assessing the power drop of the EUT. The SAR at this point is measured at the start of the test, and then again at the end of the test.
- b) The SAR distribution at the exposed flat section of the flat phantom is measured at a distance of 4 mm from the inner surface of the shell. The area covers the entire dimension of the EUT and the horizontal grid spacing is 15 mm x 15 mm. Based on this data, the area of the maximum absorption is determined by Spline interpolation. The first Area Scan covers the entire dimension of the EUT to ensure that the hotspot was correctly identified.

For 5 GHz band - The SAR distribution at the exposed flat section of the flat phantom is measured at a distance of 2.0 mm from the inner surface of the shell. The area covers the entire dimension of the EUT and the horizontal grid spacing is 10 mm x 10 mm. Based on this data, the area of the maximum absorption is determined by Spline interpolation. The first Area Scan covers the entire dimension of the EUT to ensure that the hotspot was correctly identified.

- c) Around this point, a volume of X=Y= 30 and Z=21 mm is assessed by measuring 5 x 5 x 7 mm points. On the basis of this data set, the spatial peak SAR value is evaluated with the following procedure:

For 5 GHz band - Around this point, a volume of X=Y=Z=30 mm is assessed by measuring 8 x 8 x 8 mm points. On the basis of this data set, the spatial peak SAR value is evaluated with the following procedure:

- (i) The data at the surface are extrapolated, since the centre of the dipoles is 1.2 mm away from the tip of the probe and the distance between the surface and the lowest measuring point is 1.3 mm. The extrapolation is based on a least square algorithm. A polynomial of the fourth order is calculated through the points in z-axes. This polynomial is then used to evaluate the points between the surface and the probe tip.
- (ii) The maximum interpolated value is searched with a straightforward algorithm. Around this maximum the SAR values averaged over the spatial volumes (1 g and 10 g) are computed using the 3D-Spline interpolation algorithm. The 3D-Spline is composed of three one-dimensional splines with the "Not a knot"- condition (in x, y and z-direction). The volume is integrated with the trapezoidal – algorithm. One thousand points (10 x 10 x 10) are interpolated to calculate the averages.
- (iii) All neighbouring volumes are evaluated until no neighbouring volume with a higher average value is found.
- (iv) The SAR value at the same location as in Step (a) is again measured to evaluate the actual power drift.

6.1 DASY4 SAR MEASUREMENT PROCEDURE

Step 1: Power Reference Measurement

The Power Reference Measurement and Power Drift Measurements are for monitoring the power drift of the device under test in the batch process. The Minimum distance of probe sensors to surface determines the closest measurement point to phantom surface. The minimum distance of probe sensors to surface is 2.1 mm. This distance cannot be smaller than the Distance of sensor calibration points to probe tip as defined in the probe properties (for example, 1.2 mm for an EX3DV3 probe type).

Step 2: Area Scan

The Area Scan is used as a fast scan in two dimensions to find the area of high field values, before doing a fine measurement around the hot spot. The sophisticated interpolation routines implemented in DASY4 software can find the maximum locations even in relatively coarse grids. When an Area Scan has measured all reachable points, it computes the field maximal found in the scanned area, within a range of the global maximum. The range (in dB) is specified in the standards for compliance testing. For example, a 2 dB range is required in IEEE Standard 1528, EN 50361 and IEC 62209 standards, whereby 3 dB is a requirement when compliance is assessed in accordance with the ARIB standard (Japan). If only one Zoom Scan follows the Area Scan, then only the absolute maximum will be taken as reference. For cases where multiple maximums are detected, the number of Zoom Scans has to be increased accordingly.

Step 3: Zoom Scan

Zoom Scans are used to assess the peak spatial SAR values within a cubic averaging volume containing 1 g and 10 g of simulated tissue. The Zoom Scan measures 5 x 5 x 7 points within a cube whose base faces are centered on the maxima found in a preceding area scan job within the same procedure. When the measurement is done, the Zoom Scan evaluates the averaged SAR for 1 g and 10 g and displays these values next to the job's label.

For 5 GHz band – Same as above except the Zoom Scan measures 8 x 8 x 8 points.

Step 4: Power drift measurement

The Power Drift Measurement measures the field at the same location as the most recent power reference measurement within the same procedure, and with the same settings. The Power Drift Measurement gives the field difference in dB from the reading conducted within the last Power Reference Measurement. This allows a user to monitor the power drift of the device under test within a batch process. The measurement procedure is the same as Step 1.

Step 5: Z-Scan

The Z Scan measures points along a vertical straight line. The line runs along the Z-axis of a one-dimensional grid. In order to get a reasonable extrapolation, the extrapolated distance should not be larger than the step size in Z-direction.

7 PROCEDURE USED TO ESTABLISH TEST SIGNAL

The following procedures had been used to prepare the EUT for the SAR test.

The client provided a special driver and program, ART v53 build 5, which enable a user to control the frequency and output power of the module.

The cable assembly insertion loss of 20.01 dB (including 19.81dB pad and .02 dB connectors) was entered as an offset in the power meter to allow for direct reading of power.

b mode

Channel	Frequency (MHz)	Power (dBm)
Low	2412	13.52
Middle	2437	13.94
High	2462	13.65

g mode

Channel	Frequency (MHz)	Power (dBm)
Low	2412	16.16
Middle	2437	16.12
High	2462	16.03

g turbo Mode

Channel	Frequency (MHz)	Power (dBm)
Middle	2437	18.32

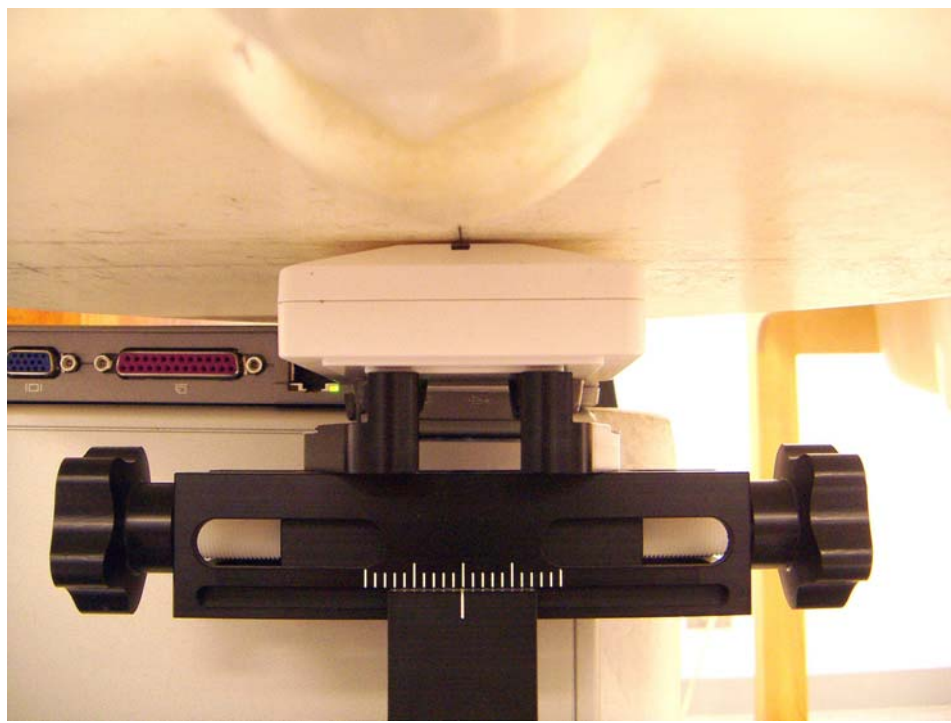
The cable assembly insertion loss of 20.06dB (including 19.86 dB pad and 0.2 dB connectors) was entered as an offset in the power meter to allow for direct reading of power.

a mode

Channel	Frequency (MHz)	Power (dBm)
Low	5180	8.70
Middle	5260	8.86
High	5320	8.71

a mode turbo

Channel	Frequency (MHz)	Power (dBm)
Low	5210	8.80
Middle	5250	8.92
High	5290	8.85

8 SAR MEASUREMENT RESULTS (2.4GHZ)**8.1 POSITION 1 (DELL INSPIRON 600M)****802.11b (1Mbps)**

Channel	f (MHz)	Measured SAR 1g (mW/g)	Power Drift (dBm)	Extrapolated ¹⁾ SAR 1g (mW/g)
1	2412	0.082	-0.195	0.086
6	2437			
11	2462			

802.11g (6 Mbps)

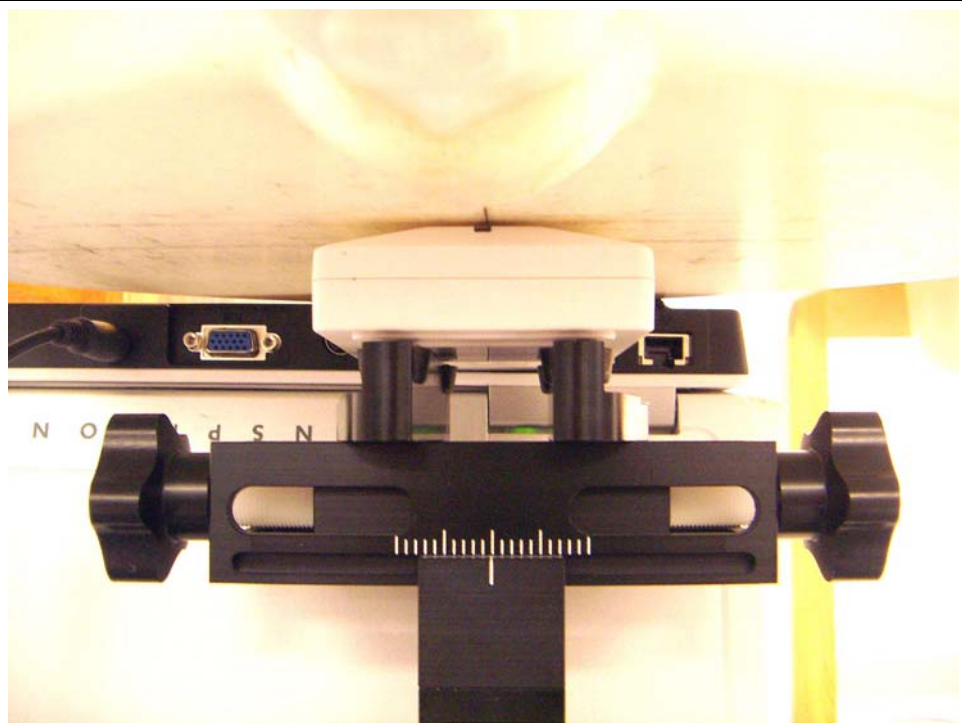
Channel	f (MHz)	Measured SAR 1g (mW/g)	Power Drift (dBm)	Extrapolated ¹⁾ SAR 1g (mW/g)
1	2412	0.134	0.000	0.134
6	2437			
11	2462			

Turbo g mode

Channel	f (MHz)	Measured SAR 1g (mW/g)	Power Drift (dBm)	Extrapolated ¹⁾ SAR 1g (mW/g)
6	2437	0.200	0.000	0.200

Notes:

- 1) The exact method of extrapolation is $\text{Measured SAR} \times 10^{(-\text{drift}/10)}$. The SAR reported at the end of the measurement process by the DASY4 system can be scaled up by the Power drift to determine the SAR at the beginning of the measurement process.
- 2) The SAR measured at the middle channel for this configuration is at least 3 dB lower (0.8 mW/g) than SAR limit (1.6 mW/g), thus testing at low & high channel is optional.
- 3) Please see attachments for the detailed measurement data and plots showing the maximum SAR location of the EUT.
- 4) There's a separation distance of 4mm between the EUT and the phantom.

8.2 POSITION 1 (DELL INSPIRON 6000)**802.11b (1Mbps)**

Channel	f (MHz)	Measured SAR 1g (mW/g)	Power Drift (dBm)	Extrapolated ¹⁾ SAR 1g (mW/g)
1	2412	0.085	-0.138	0.088
6	2437			
11	2462			

802.11g (6 Mbps)

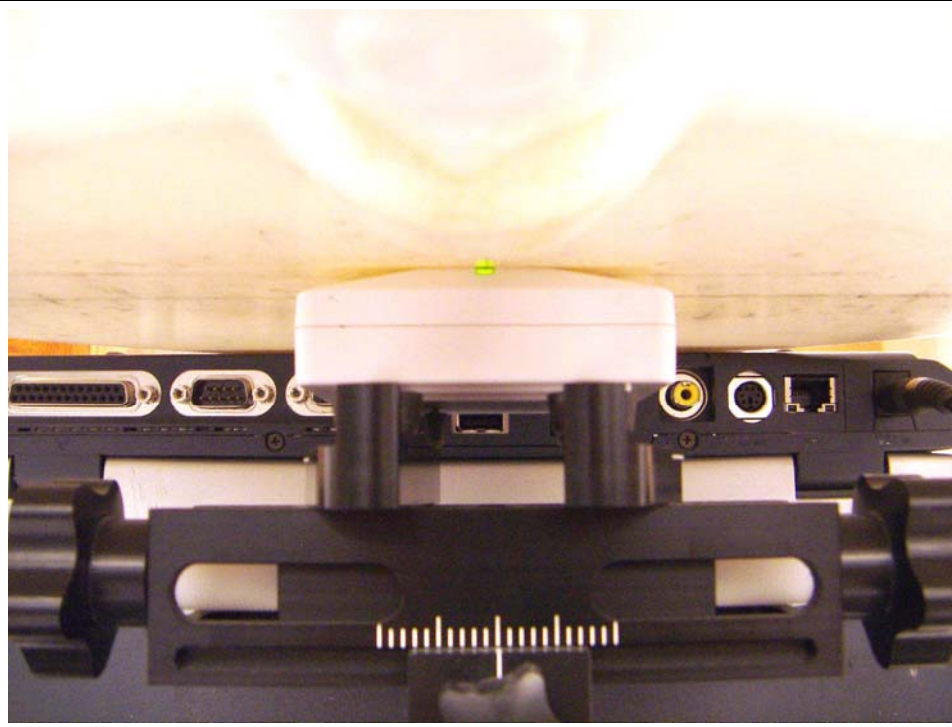
Channel	f (MHz)	Measured SAR 1g (mW/g)	Power Drift (dBm)	Extrapolated ¹⁾ SAR 1g (mW/g)
1	2412	0.139	-0.015	0.139
6	2437			
11	2462			

Turbo g mode

Channel	f (MHz)	Measured SAR 1g (mW/g)	Power Drift (dBm)	Extrapolated ¹⁾ SAR 1g (mW/g)
6	2437	0.203	-0.199	0.213

Notes:

- 1) The exact method of extrapolation is $\text{Measured SAR} \times 10^{(-\text{drift}/10)}$. The SAR reported at the end of the measurement process by the DASY4 system can be scaled up by the Power drift to determine the SAR at the beginning of the measurement process.
- 2) The SAR measured at the middle channel for this configuration is at least 3 dB lower (0.8 mW/g) than SAR limit (1.6 mW/g), thus testing at low & high channel is optional.
- 3) Please see attachments for the detailed measurement data and plots showing the maximum SAR location of the EUT.
- 4) There's a separation distance of 3mm between the EUT and the phantom.

8.3 POSITION 1 (TOSHIBA SATELLITE)**802.11b (1Mbps)**

Channel	f (MHz)	Measured SAR 1g (mW/g)	Power Drift (dBm)	Extrapolated ¹⁾ SAR 1g (mW/g)
1	2412			
6	2437	0.095	-0.175	0.099
11	2462			

802.11g (6 Mbps)

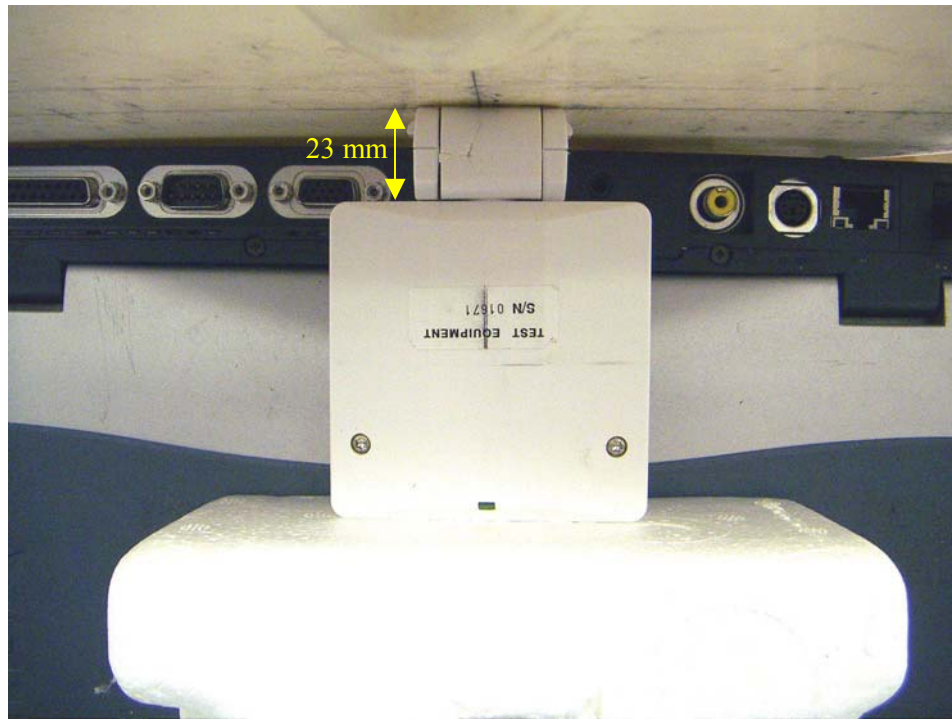
Channel	f (MHz)	Measured SAR 1g (mW/g)	Power Drift (dBm)	Extrapolated ¹⁾ SAR 1g (mW/g)
1	2412	0.150	-0.113	0.154
6	2437	0.136	-0.175	0.142
11	2462	0.136	-0.191	0.142

Turbo g mode

Channel	f (MHz)	Measured SAR 1g (mW/g)	Power Drift (dBm)	Extrapolated ¹⁾ SAR 1g (mW/g)
6	2437	0.231	-0.128	0.238

Notes:

- 1) The exact method of extrapolation is $\text{Measured SAR} \times 10^{(-\text{drift}/10)}$. The SAR reported at the end of the measurement process by the DASY4 system can be scaled up by the Power drift to determine the SAR at the beginning of the measurement process.
- 2) The SAR measured at the middle channel for this configuration is at least 3 dB lower (0.8 mW/g) than SAR limit (1.6 mW/g), thus testing at low & high channel is optional.
- 3) Please see attachments for the detailed measurement data and plots showing the maximum SAR location of the EUT.

8.4 POSITION 2 (TOSHIBA LAPTOP)**802.11b (1Mbps)**

Channel	f (MHz)	Measured SAR 1g (mW/g)	Power Drift (dBm)	Extrapolated ¹⁾ SAR 1g (mW/g)
1	2412	0.029	0.000	0.029
6	2437			
11	2462			

802.11g (6 Mbps)

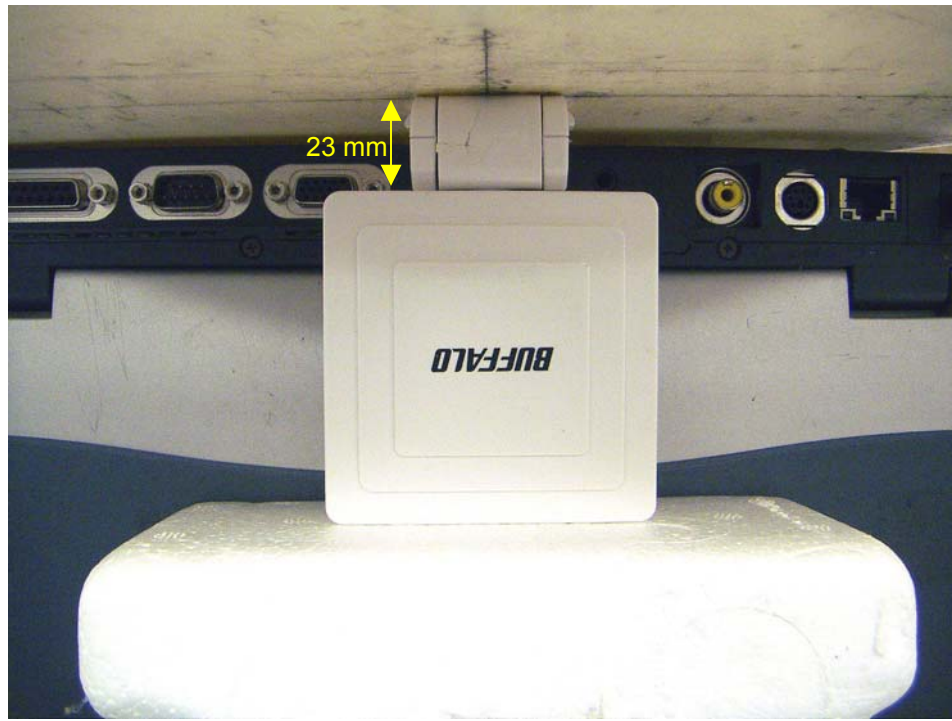
Channel	f (MHz)	Measured SAR 1g (mW/g)	Power Drift (dBm)	Extrapolated ¹⁾ SAR 1g (mW/g)
1	2412	0.048	0.000	0.048
6	2437			
11	2462			

Turbo g mode

Channel	f (MHz)	Measured SAR 1g (mW/g)	Power Drift (dBm)	Extrapolated ¹⁾ SAR 1g (mW/g)
6	2437	0.115	0.000	0.115

Notes:

- 1) The exact method of extrapolation is $\text{Measured SAR} \times 10^{(-\text{drift}/10)}$. The SAR reported at the end of the measurement process by the DASY4 system can be scaled up by the Power drift to determine the SAR at the beginning of the measurement process.
- 2) The SAR measured at the middle channel for this configuration is at least 3 dB lower (0.8 mW/g) than SAR limit (1.6 mW/g), thus testing at low & high channel is optional.
- 3) Please see attachments for the detailed measurement data and plots showing the maximum SAR location of the EUT.

8.5 POSITION 3 (TOSHIBA LAPTOP)**802.11b (1Mbps)**

Channel	f (MHz)	Measured SAR 1g (mW/g)	Power Drift (dBm)	Extrapolated ¹⁾ SAR 1g (mW/g)
1	2412	0.043	0.000	0.043
6	2437			
11	2462			

802.11g (6 Mbps)

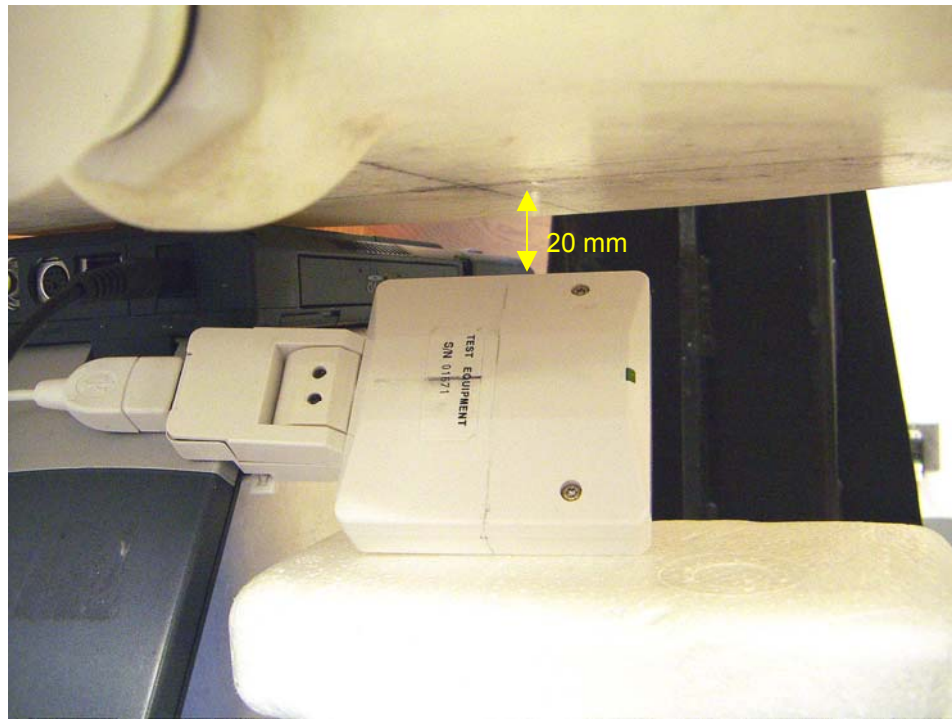
Channel	f (MHz)	Measured SAR 1g (mW/g)	Power Drift (dBm)	Extrapolated ¹⁾ SAR 1g (mW/g)
1	2412	0.062	0.000	0.062
6	2437			
11	2462			

Turbo g mode

Channel	f (MHz)	Measured SAR 1g (mW/g)	Power Drift (dBm)	Extrapolated ¹⁾ SAR 1g (mW/g)
6	2437	0.102	-0.008	0.102

Notes:

- 1) The exact method of extrapolation is $\text{Measured SAR} \times 10^{(-\text{drift}/10)}$. The SAR reported at the end of the measurement process by the DASY4 system can be scaled up by the Power drift to determine the SAR at the beginning of the measurement process.
- 2) The SAR measured at the middle channel for this configuration is at least 3 dB lower (0.8 mW/g) than SAR limit (1.6 mW/g), thus testing at low & high channel is optional.
- 3) Please see attachments for the detailed measurement data and plots showing the maximum SAR location of the EUT.

8.6 POSITION 4 (TOSHIBA LAPTOP)**802.11b (1Mbps)**

Channel	f (MHz)	Measured SAR 1g (mW/g)	Power Drift (dBm)	Extrapolated ¹⁾ SAR 1g (mW/g)
1	2412	0.006	0.000	0.006
6	2437			
11	2462			

802.11g (6 Mbps)

Channel	f (MHz)	Measured SAR 1g (mW/g)	Power Drift (dBm)	Extrapolated ¹⁾ SAR 1g (mW/g)
1	2412	0.011	0.000	0.011
6	2437			
11	2462			

Turbo g mode

Channel	f (MHz)	Measured SAR 1g (mW/g)	Power Drift (dBm)	Extrapolated ¹⁾ SAR 1g (mW/g)
6	2437	0.030	0.000	0.030

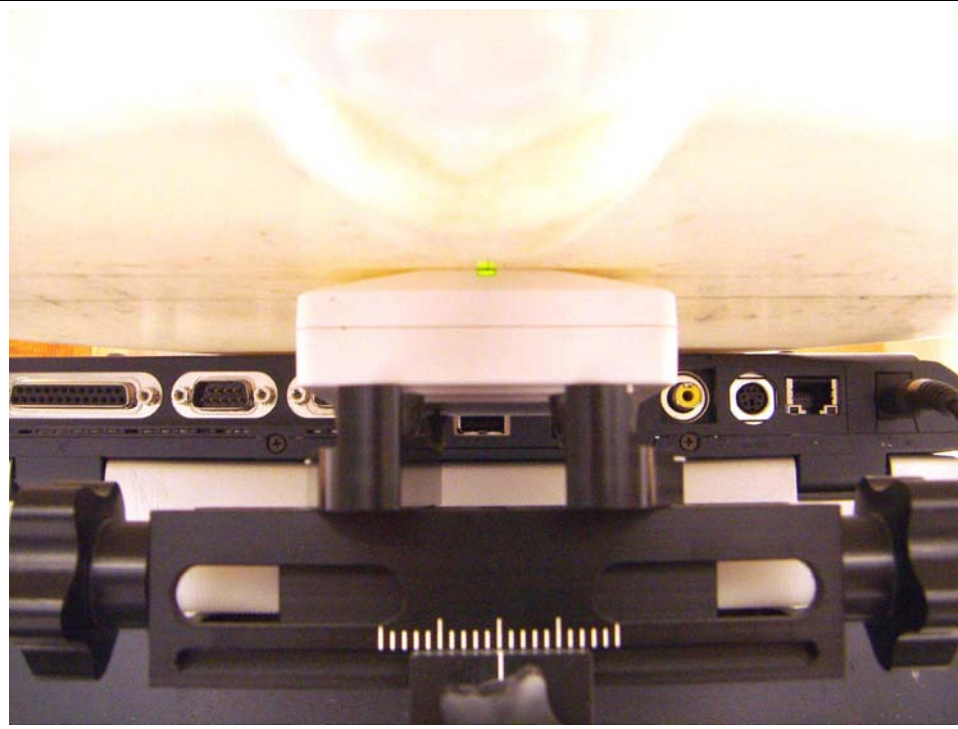
Notes:

- 1) The exact method of extrapolation is $\text{Measured SAR} \times 10^{(-\text{drift}/10)}$. The SAR reported at the end of the measurement process by the DASY4 system can be scaled up by the Power drift to determine the SAR at the beginning of the measurement process.
- 2) The SAR measured at the middle channel for this configuration is at least 3 dB lower (0.8 mW/g) than SAR limit (1.6 mW/g), thus testing at low & high channel is optional.
- 3) Please see attachments for the detailed measurement data and plots showing the maximum SAR location of the EUT.

9 SAR MEASUREMENT RESULTS (5GHZ)

Maximum output power of the EUT at this band is below 25mW; therefore, SAR test is done on one host lap with the minimum separation distance from body. See FCC Laboratory Division, March 18, 2004, "Mobile and Portable Device RF Exposure Equipment Authorization Procedures."

9.1 POSITION 1 (TOSHIBA SATELLITE)



802.11a 5.2 GHz (6Mbps)

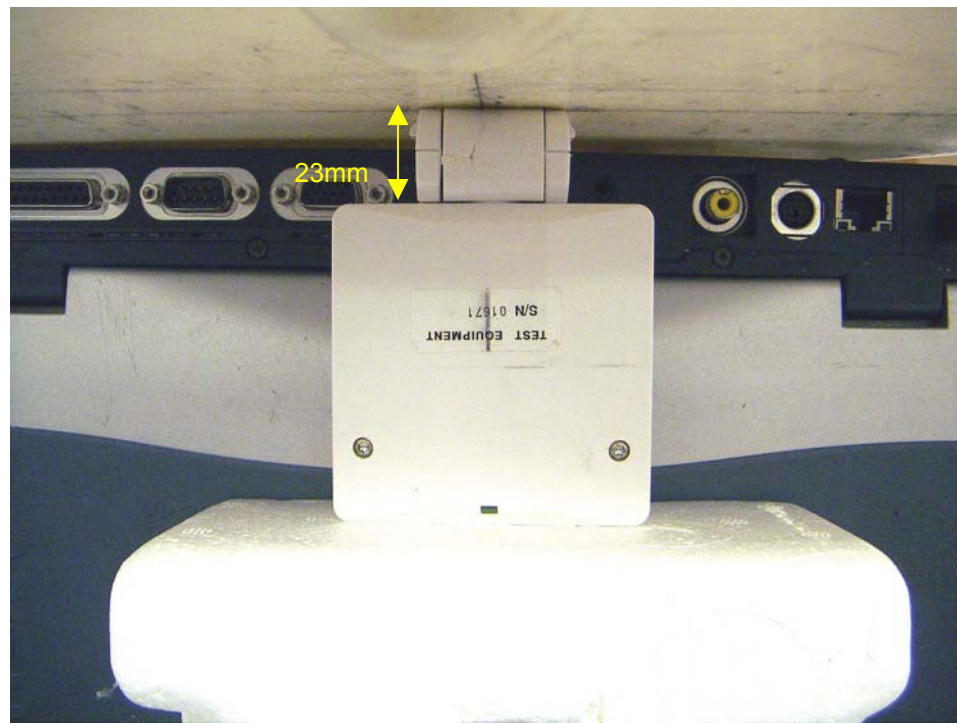
Channel	f (MHz)	Measured SAR 1g (mW/g)	Power Drift (dBm)	Extrapolated ¹⁾ SAR 1g (mW/g)
36	5180	0.019	0.000	0.019
52	5260			
64	5320			

802.11a 5.2 GHz Turbo Mode

Channel	f (MHz)	Measured SAR 1g (mW/g)	Power Drift (dBm)	Extrapolated ¹⁾ SAR 1g (mW/g)
42	5210	0.024	0.000	0.024
50	5250			
58	5290			

Notes:

- 5) The exact method of extrapolation is $\text{Measured SAR} \times 10^{(-\text{drift}/10)}$. The SAR reported at the end of the measurement process by the DASY4 system can be scaled up by the Power drift to determine the SAR at the beginning of the measurement process.
- 6) The SAR measured at the middle channel for this configuration is at least 3 dB lower (0.8 mW/g) than SAR limit (1.6 mW/g), thus testing at low & high channel is optional.
- 7) Please see attachments for the detailed measurement data and plots showing the maximum SAR location of the EUT.

9.2 POSITION 2 (TOSHIBA SATELLITE)**802.11a 5.2 GHz (6Mbps)**

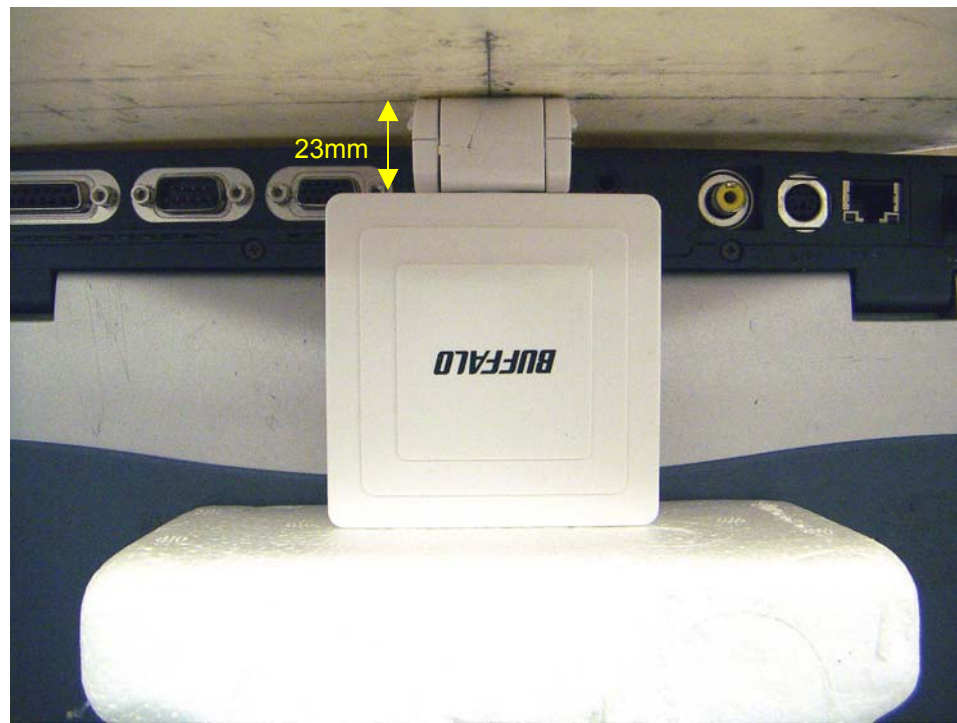
Channel	f (MHz)	Measured SAR 1g (mW/g)	Power Drift (dBm)	Extrapolated ¹⁾ SAR 1g (mW/g)
36	5180	0.029	0.000	0.029
52	5260			
64	5320			

802.11a 5.2 GHz Turbo Mode

Channel	f (MHz)	Measured SAR 1g (mW/g)	Power Drift (dBm)	Extrapolated ¹⁾ SAR 1g (mW/g)
42	5210	0.043	-0.127	0.044
50	5250			
58	5290			

Notes:

- 1) The exact method of extrapolation is $\text{Measured SAR} \times 10^{(-\text{drift}/10)}$. The SAR reported at the end of the measurement process by the DASY4 system can be scaled up by the Power drift to determine the SAR at the beginning of the measurement process.
- 2) The SAR measured at the middle channel for this configuration is at least 3 dB lower (0.8 mW/g) than SAR limit (1.6 mW/g), thus testing at low & high channel is optional.
- 3) Please see attachments for the detailed measurement data and plots showing the maximum SAR location of the EUT.

9.3 POSITION 3 (TOSHIBA SATELLITE)**802.11a 5.2 GHz (6Mbps)**

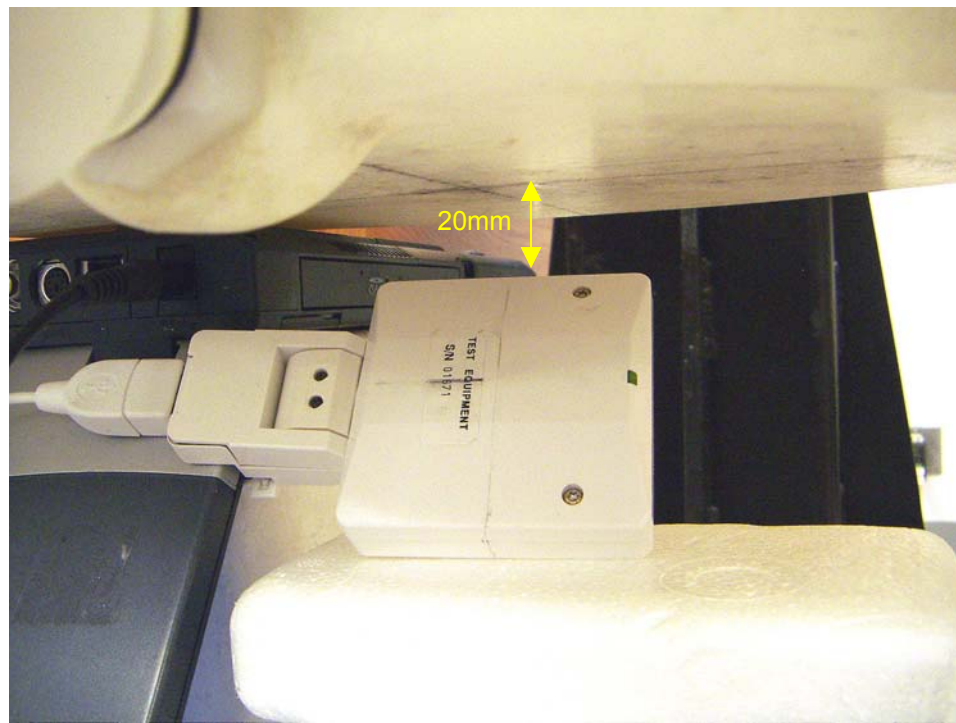
Channel	f (MHz)	Measured SAR 1g (mW/g)	Power Drift (dBm)	Extrapolated ¹⁾ SAR 1g (mW/g)
36	5180	0.035	0.000	0.035
52	5260			
64	5320			

802.11a 5.2 GHz Turbo Mode

Channel	f (MHz)	Measured SAR 1g (mW/g)	Power Drift (dBm)	Extrapolated ¹⁾ SAR 1g (mW/g)
42	5210	0.029	0.000	0.029
50	5250			
58	5290			

Notes:

- 1) The exact method of extrapolation is $\text{Measured SAR} \times 10^{(-\text{drift}/10)}$. The SAR reported at the end of the measurement process by the DASY4 system can be scaled up by the Power drift to determine the SAR at the beginning of the measurement process.
- 2) The SAR measured at the middle channel for this configuration is at least 3 dB lower (0.8 mW/g) than SAR limit (1.6 mW/g), thus testing at low & high channel is optional.
- 3) Please see attachments for the detailed measurement data and plots showing the maximum SAR location of the EUT.

9.4 POSITION 4 (TOSHIBA SATELLITE)**802.11a 5.2 GHz (6Mbps)**

Channel	f (MHz)	Measured SAR 1g (mW/g)	Power Drift (dBm)	Extrapolated ¹⁾ SAR 1g (mW/g)
36	5180	0.008	0.000	0.008
52	5260			
64	5320			

802.11a 5.2 GHz Turbo Mode

Channel	f (MHz)	Measured SAR 1g (mW/g)	Power Drift (dBm)	Extrapolated ¹⁾ SAR 1g (mW/g)
42	5210	0.005	0.000	0.005
50	5250			
58	5290			

Notes:

- 1) The exact method of extrapolation is $\text{Measured SAR} \times 10^{(-\text{drift}/10)}$. The SAR reported at the end of the measurement process by the DASY4 system can be scaled up by the Power drift to determine the SAR at the beginning of the measurement process.
- 2) The SAR measured at the middle channel for this configuration is at least 3 dB lower (0.8 mW/g) than SAR limit (1.6 mW/g), thus testing at low & high channel is optional.
- 3) Please see attachments for the detailed measurement data and plots showing the maximum SAR location of the EUT.

10 MEASUREMENT UNCERTAINTY**10.1 MEASUREMENT UNCERTAINTY FOR 300 MHz – 3000 MHz**

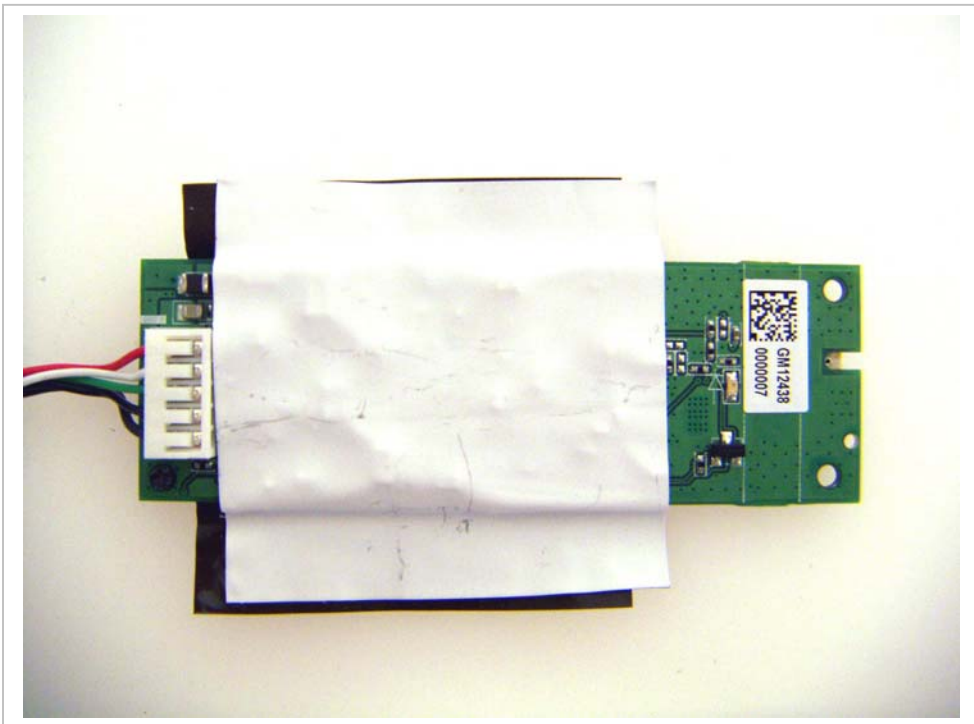
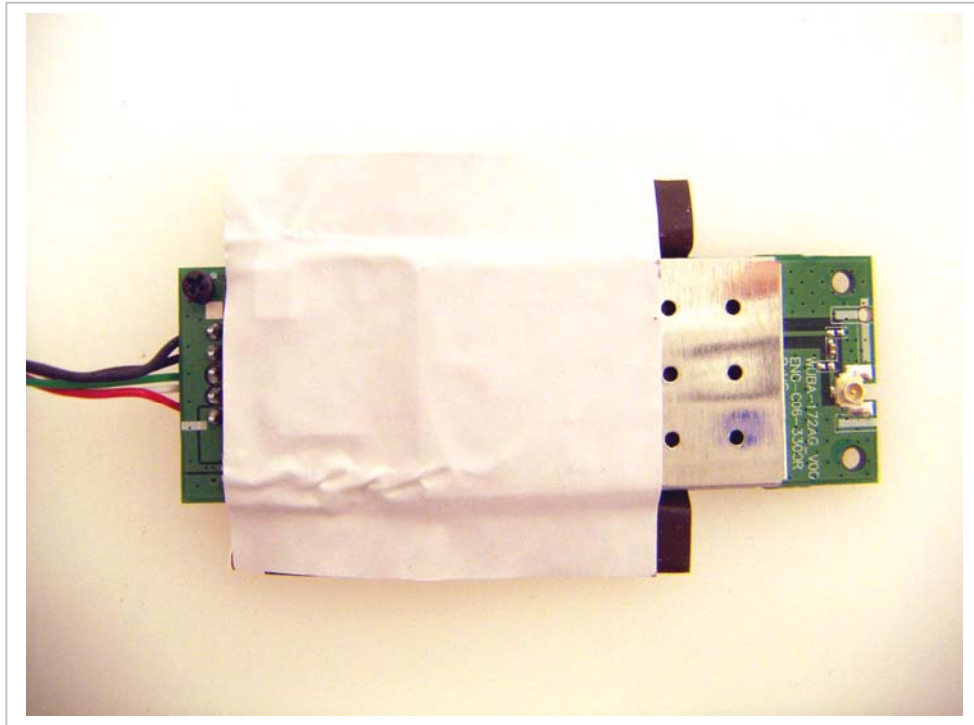
Uncertainty component	Tol. (±%)	Probe Dist.	Div.	Ci (1g)	Ci (10g)	Std. Unc.(±%)	
						Ui (1g)	Ui(10g)
Measurement System							
Probe Calibration	4.80	N	1	1	1	4.80	4.80
Axial Isotropy	4.70	R	1.732	0.707	0.707	1.92	1.92
Hemispherical Isotropy	9.60	R	1.732	0.707	0.707	3.92	3.92
Boundary Effects	1.00	R	1.732	1	1	0.58	0.58
Linearity	4.70	R	1.732	1	1	2.71	2.71
System Detection Limits	1.00	R	1.732	1	1	0.58	0.58
Readout Electronics	1.00	N	1	1	1	1.00	1.00
Response Time	0.80	R	1.732	1	1	0.46	0.46
Integration Time	2.60	R	1.732	1	1	1.50	1.50
RF Ambient Conditions - Noise	1.59	R	1.732	1	1	0.92	0.92
RF Ambient Conditions - Reflections	0.00	R	1.732	1	1	0.00	0.00
Probe Positioner Mechanical Tolerance	0.40	R	1.732	1	1	0.23	0.23
Probe Positioning With Respect to Phantom Shell	2.90	R	1.732	1	1	1.67	1.67
Extrapolation, interpolation, and integration algorithms for max. SAR evaluation	3.90	R	1.732	1	1	2.25	2.25
Test sample Related							
Test Sample Positioning	1.10	N	1	1	1	1.10	1.10
Device Holder Uncertainty	3.60	N	1	1	1	3.60	3.60
Power and SAR Drift Measurement	5.00	R	1.732	1	1	2.89	2.89
Phantom and Tissue Parameters							
Phantom Uncertainty	4.00	R	1.732	1	1	2.31	2.31
Liquid Conductivity - Target	5.00	R	1.732	0.64	0.43	1.85	1.24
Liquid Conductivity - Meas.	8.60	N	1	0.64	0.43	5.50	3.70
Liquid Permittivity - Target	5.00	R	1.732	0.6	0.49	1.73	1.41
Liquid Permittivity - Meas.	3.30	N	1	0.6	0.49	1.98	1.62
Combined Standard Uncertainty						11.44	10.49
Expanded Uncertainty (95% Confidence Interval)						22.87	20.98
Notesfor table							
1. Tol. - tolerance in influence quaity							
2. N - Nomal							
3. R - Rectangular							
4. Div. - Divisor used to obtain standard uncertainty							
5. Ci - is te sensitivity coefficient							

10.2 MEASUREMENT UNCERTAINTY 3 GHz – 6 GHz

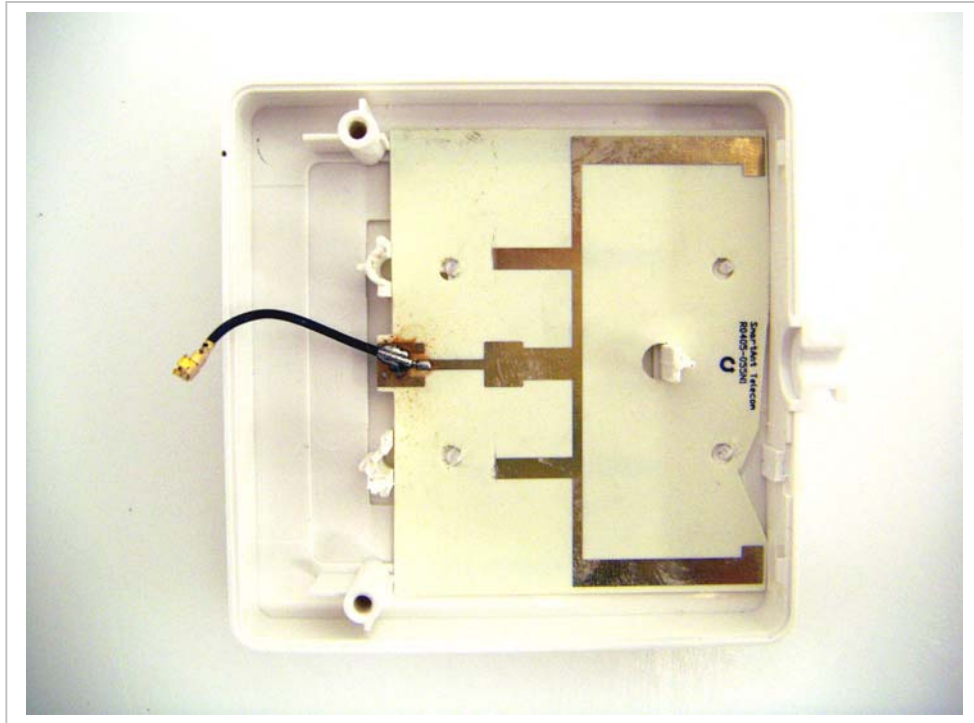
Uncertainty component	Tol. (±%)	Probe Dist.	Div.	Ci (1g)	Ci (10g)	Std. Unc.(±%)	
						Ui (1g)	Ui(10g)
Measurement System							
Probe Calibration	4.80	N	1	1	1	4.80	4.80
Axial Isotropy	4.70	R	1.732	0.707	0.707	1.92	1.92
Hemispherical Isotropy	9.60	R	1.732	0.707	0.707	3.92	3.92
Boundary Effects	1.00	R	1.732	1	1	0.58	0.58
Linearity	4.70	R	1.732	1	1	2.71	2.71
System Detection Limits	1.00	R	1.732	1	1	0.58	0.58
Readout Electronics	1.00	N	1	1	1	1.00	1.00
Response Time	0.80	R	1.732	1	1	0.46	0.46
Integration Time	2.60	R	1.732	1	1	1.50	1.50
RF Ambient Conditions - Noise	3.00	R	1.732	1	1	1.73	1.73
RF Ambient Conditions - Reflections	3.00	R	1.732	1	1	1.73	1.73
Probe Positioner Mechanical Tolerance	0.40	R	1.732	1	1	0.23	0.23
Probe Positioning With Respect to Phantom Shell	2.90	R	1.732	1	1	1.67	1.67
Extrapolation, interpolation, and integration algorithms for max. SAR evaluation	3.90	R	1.732	1	1	2.25	2.25
Test sample Related							
Test Sample Positioning	1.10	N	1	1	1	1.10	1.10
Device Holder Uncertainty	3.60	N	1	1	1	3.60	3.60
Power and SAR Drift Measurement	5.00	R	1.732	1	1	2.89	2.89
Phantom and Tissue Parameters							
Phantom Uncertainty	4.00	R	1.732	1	1	2.31	2.31
Liquid Conductivity - Target	5.00	R	1.732	0.64	0.43	1.85	1.24
Liquid Conductivity - Meas.	8.60	N	1	0.64	0.43	5.50	3.70
Liquid Permittivity - Target	5.00	R	1.732	0.6	0.49	1.73	1.41
Liquid Permittivity - Meas.	3.30	N	1	0.6	0.49	1.98	1.62
Combined Standard Uncertainty	RSS					11.66	10.73
Expanded Uncertainty (95% Confidence Interval)	K=2					23.32	21.46
Notesfor table							
1. Tol. - tolerance in influence quaity							
2. N - Nomal							
3. R - Rectangular							
4. Div. - Divisor used to obtain standard uncertainty							
5. Ci - is te sensitivity coefficient							

11 EQUIPMENT LIST AND CALIBRATION

<u>Name of Equipment</u>	<u>Manufacturer</u>	<u>Type/Model</u>	<u>Serial Number</u>	<u>Cal. Due date</u>
Robot - Six Axes	Stäubli	RX90BL	N/A	N/A
Robot Remote Control	Stäubli	CS7MB	3403-91535	N/A
DASY4 Measurement Server	SPEAG	SEUMS001BA	1041	N/A
Probe Alignment Unit	SPEAG	LB (V2)	261	N/A
S-Parameter Network Analyzer	Agilent	8753ES-6	US39173569	2/9/07
Electronic Probe kit	Hewlett Packard	85070C	N/A	N/A
E-Field Probe	SPEAG	EX3DV3	3531	7/21/06
Thermometer	ERTCO	639-1	8636	10/20/06
SAM Phantom (SAM1)	SPEAG	TP-1185	QD000P40CA	N/A
SAM Phantom (SAM2)	SPEAG	TP-1015	N/A	N/A
Data Acquisition Electronics	SPEAG	DAE4	558	1/20/07
System Validation Dipole	SPEAG	D2450V2	748	5/14/06
System Validation Dipole	SPEAG	D5GHzV2	1003	11/22/07
Signal Generator	R&S	SMP 04	DE34210	6/2/06
Power Meter	Giga-tronics	8651A	8651404	12/27/06
Power Sensor	Giga-tronics	80701A	1834588	12/27/07
Amplifier	Mini-Circuits	ZVE-8G	0360	N/A
Amplifier	Mini-Circuits	ZHL-42W	D072701-5	N/A
Radio Communication Tester	Rohde & Schwarz	CMU 200	838114/032	12/17/06
Simulating Liquid	CCS	M2450	N/A	Within 24 hrs of first test
Simulating Liquid	SPEAG	M5200-5800	N/A	Within 24 hrs of first test

12 EUT PHOTOS**802.11ABG USB ADAPTER**

Antenna (inside)



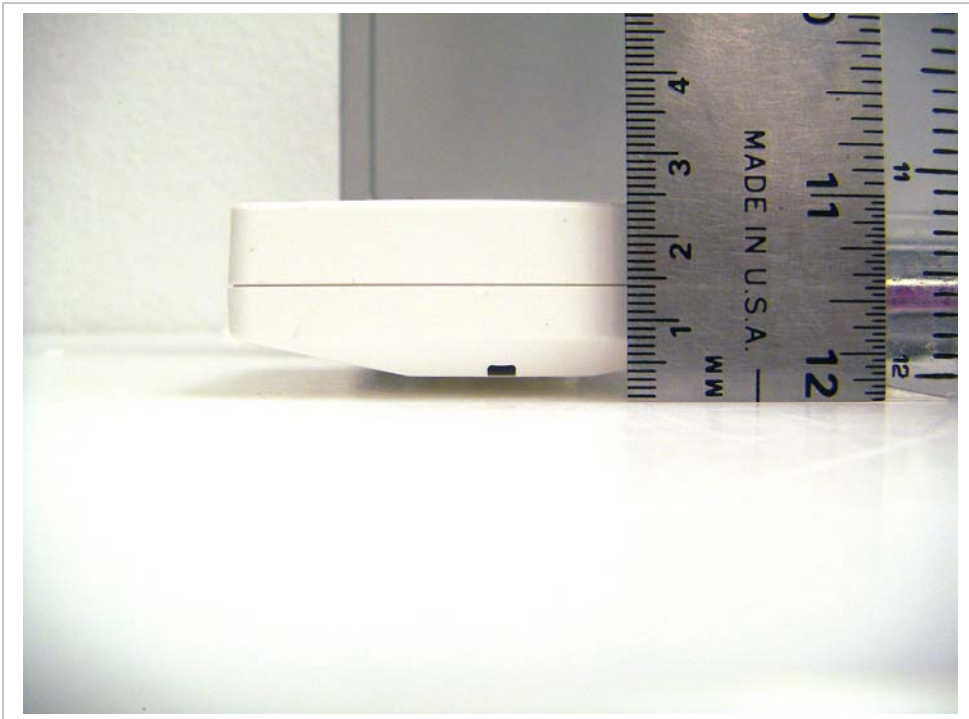
Antenna (outside)



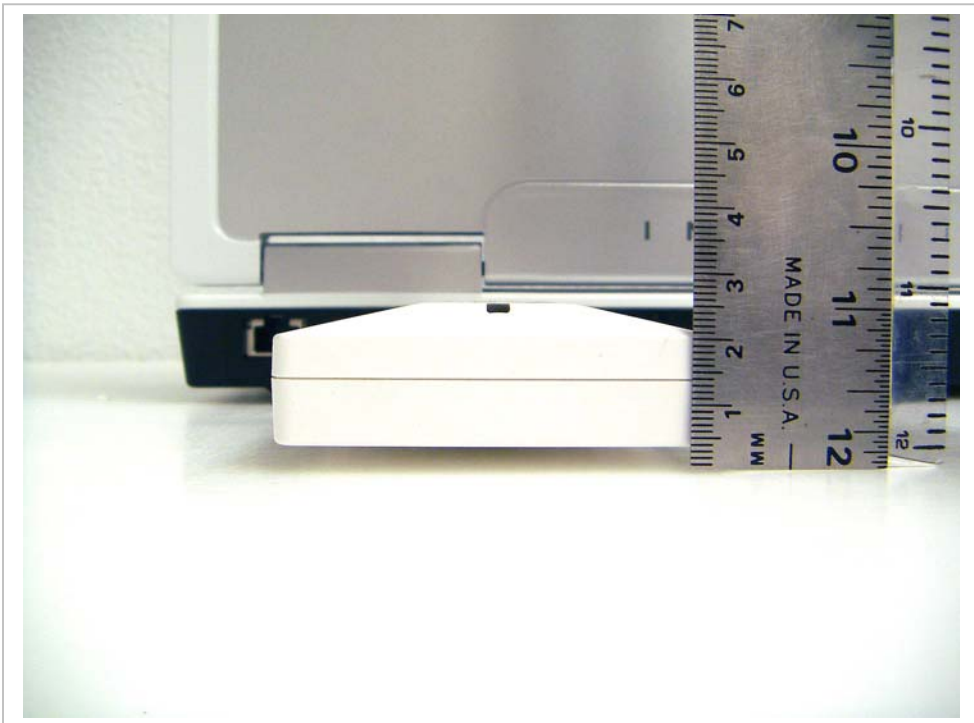
802.11ABG USB ADAPTER



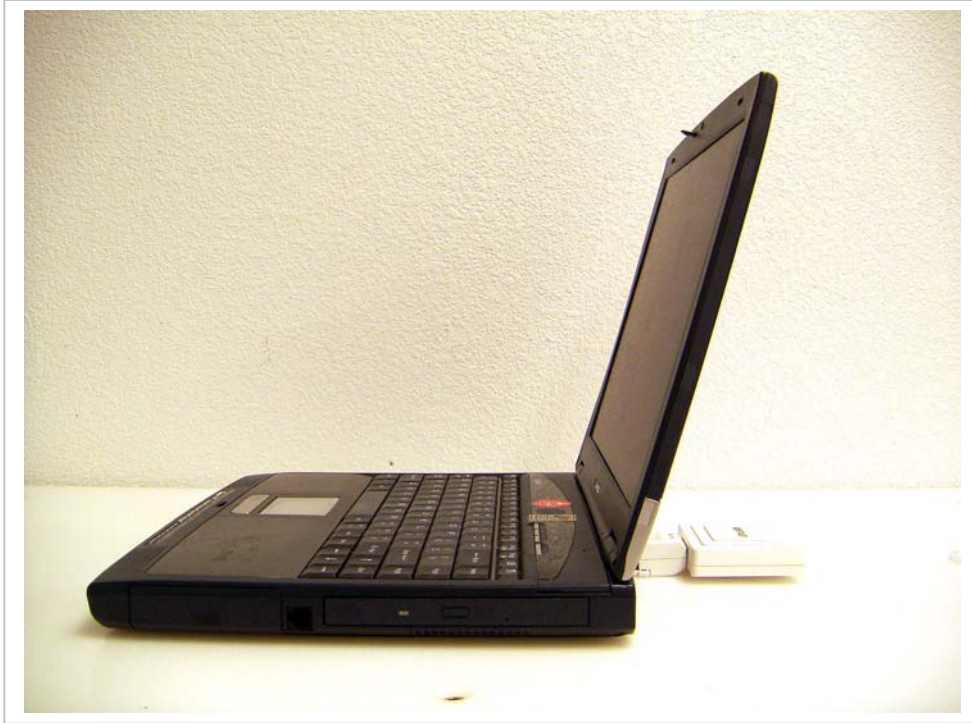
Host # 1



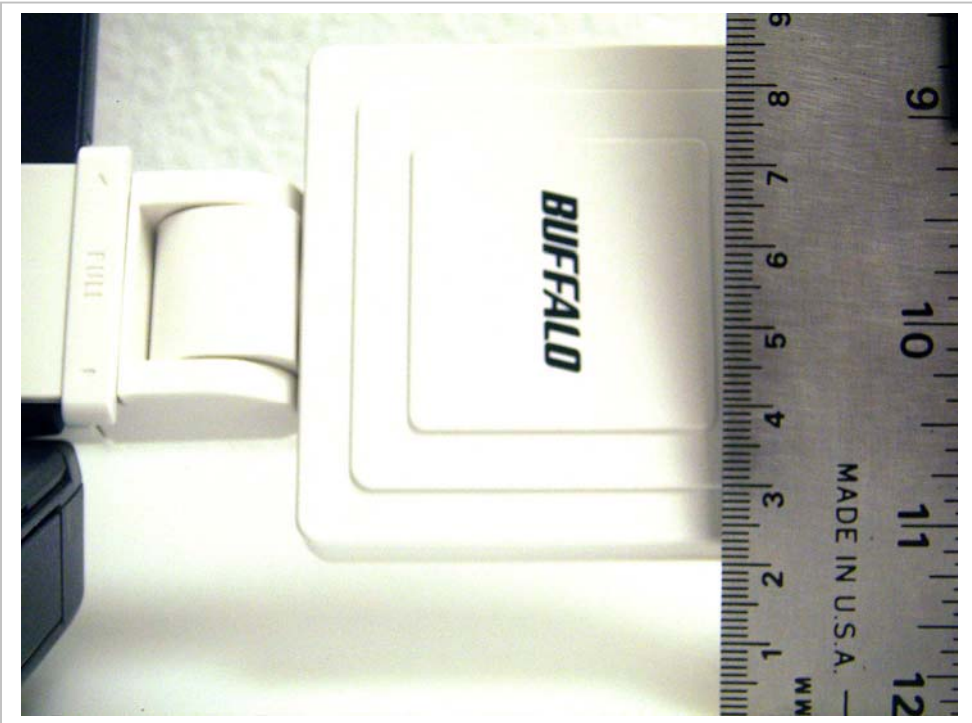
Host # 2



Host # 3







13 ATTACHMENTS

No.	Contents	No. Of Pages
1	System Performance Check Plots	4
2-1	SAR Test Plots 2.4GHz	21
2-2	SAR Test Plots 5.2GHz	9
3	Certificate of E-Field Probe - EX3DV3SN3531	10
4	Certificate of System Validation Dipole - D2450V2 SN 748	9
5	Certificate of System Validation Dipole - D5GHzV2 SN 1003	10
6	Material Specification Data Sheet of Body Simulating Liquid (5GHz)	3

END OF REPORT