


Appendix D. Radiated Emission Co-location Report

1. Results of Radiated Emissions for Co-located


Temperature	24°C	Humidity	61%
Test Engineer	YC Chen	Configurations	2.4G + 5G

Horizontal

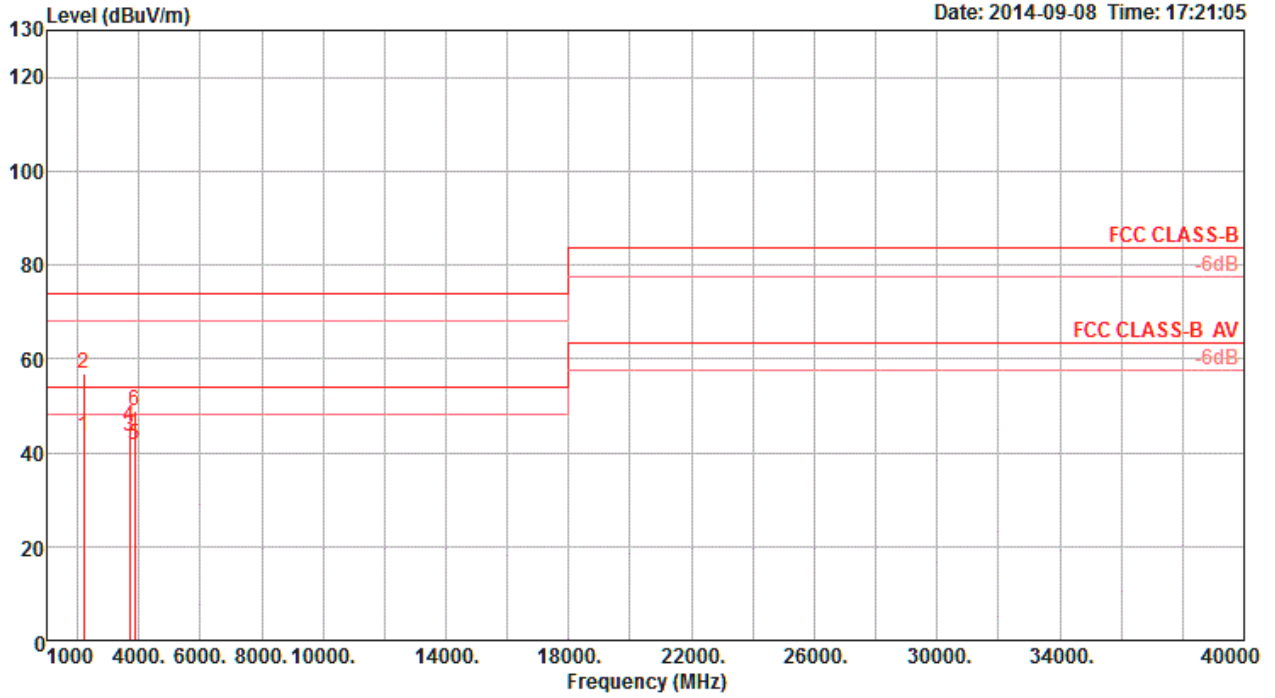

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	Remark	T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		deg	cm	
1	2191.60	43.57	54.00	-10.43	47.25	2.78	28.17	34.63	Average	68	100	HORIZONTAL
2	2202.00	56.68	74.00	-17.32	60.37	2.79	28.15	34.63	Peak	68	100	HORIZONTAL
3	3685.48	43.30	54.00	-10.70	43.41	3.67	30.79	34.57	Average	236	105	HORIZONTAL
4	3685.49	45.64	74.00	-28.36	45.75	3.67	30.79	34.57	Peak	236	105	HORIZONTAL
5	3854.15	41.78	54.00	-12.22	41.31	3.75	31.24	34.52	Average	129	100	HORIZONTAL
6	3854.24	48.73	74.00	-25.27	48.26	3.75	31.24	34.52	Peak	129	100	HORIZONTAL

Vertical

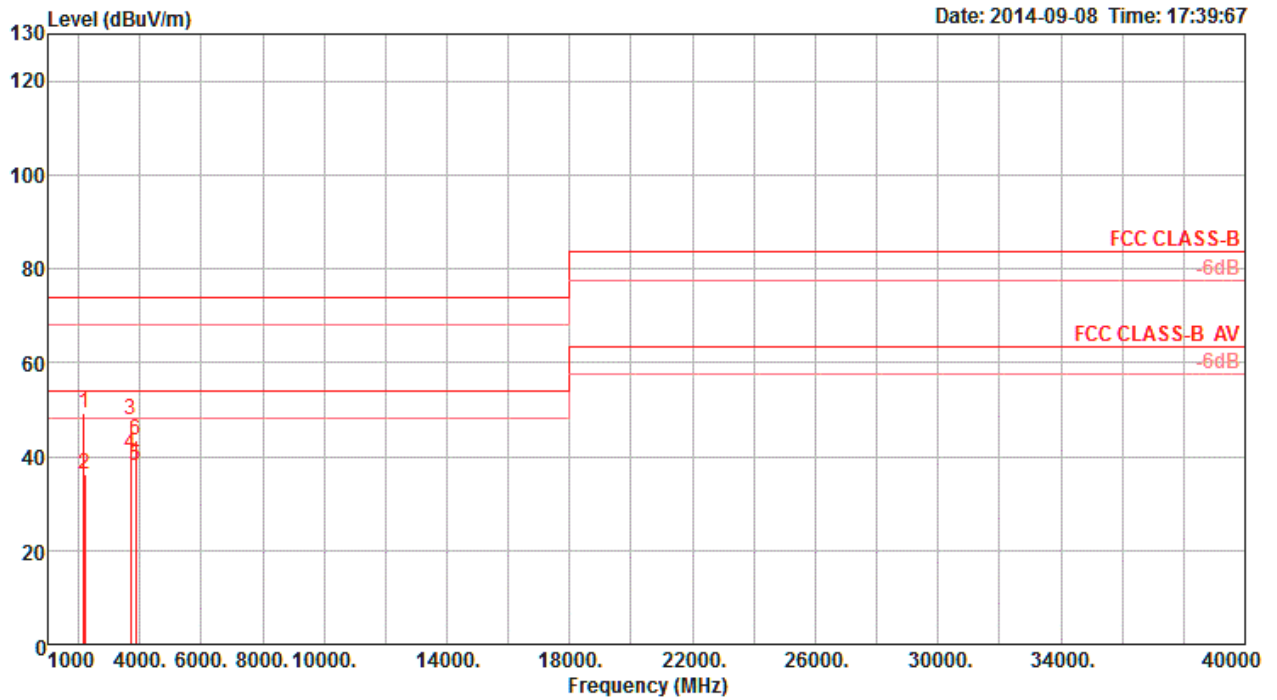

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	Remark	T/Pos	A/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		deg	cm	
1	2187.40	49.21	74.00	-24.79	52.89	2.78	28.17	34.63	Peak	50	100	VERTICAL
2	2191.40	36.34	54.00	-17.66	40.02	2.78	28.17	34.63	Average	50	100	VERTICAL
3	3685.40	47.74	74.00	-26.26	47.85	3.67	30.79	34.57	Peak	248	150	VERTICAL
4	3685.48	40.59	54.00	-13.41	40.70	3.67	30.79	34.57	Average	248	150	VERTICAL
5	3854.46	37.96	54.00	-16.04	37.49	3.75	31.24	34.52	Average	113	100	VERTICAL
6	3854.49	43.39	74.00	-30.61	42.92	3.75	31.24	34.52	Peak	113	100	VERTICAL