

# FCC Test Report

**FCC ID** : FDI000000029  
**Equipment** : AirStation  
**Model No.** : WSR-600DD  
**Brand Name** : Buffalo Inc.  
**Applicant** : Buffalo Inc.  
**Address** : Akamon-dori Bldg., 30-20, Ohsu 3-chome,  
Naka-ku, Nagoya 460-8315, Japan  
**Standard** : 47 CFR FCC Part 15.407  
**Received Date** : Jan. 23, 2015  
**Tested Date** : Jan. 23 ~ Feb. 25, 2015

We, International Certification Corp., would like to declare that the tested sample has been evaluated and in compliance with the requirement of the above standards. The test results contained in this report refer exclusively to the product. It may be duplicated completely for legal use with the approval of the applicant. It shall not be reproduced except in full without the written approval of our laboratory.

Approved & Reviewed by:

  
Gary Chang / Manager



---

## Table of Contents

<b>1</b>	<b>GENERAL DESCRIPTION .....</b>	<b>5</b>
1.1	Information.....	5
1.2	Local Support Equipment List .....	8
1.3	Test Setup Chart .....	8
1.4	The Equipment List .....	9
1.5	Testing Applied Standards .....	10
1.6	Measurement Uncertainty .....	10
<b>2</b>	<b>TEST CONFIGURATION .....</b>	<b>11</b>
2.1	Testing Condition .....	11
2.2	The Worst Test Modes and Channel Details .....	12
<b>3</b>	<b>TRANSMITTER TEST RESULTS.....</b>	<b>13</b>
3.1	Conducted Emissions.....	13
3.2	Emission Bandwidth .....	18
3.3	RF Output Power .....	21
3.4	Peak Power Spectral Density .....	23
3.5	Transmitter Radiated and Band Edge Emissions .....	27
3.6	Frequency Stability .....	66
<b>4</b>	<b>TEST LABORATORY INFORMATION .....</b>	<b>68</b>

---

## Release Record

Report No.	Version	Description	Issued Date
FR521701AN	Rev. 01	Initial issue	Mar. 11, 2015
FR521701AN	Rev. 02	Modified product name and address.	Mar. 25, 2015

## Summary of Test Results

FCC Rules	Test Items	Measured	Result
15.207	Conducted Emissions	[dBuV]: 0.385MHz 37.64 (Margin -10.53dB) - AV	Pass
15.407(b) 15.209	Radiated Emissions	[dBuV/m at 3m]: 5877.00MHz 53.00 (Margin -1.00dB) - AV	Pass
15.407(a)	Emission Bandwidth	Meet the requirement of limit	Pass
15.407(e)	6dB bandwidth	Meet the requirement of limit	Pass
15.407(a)	RF Output Power	Max Power [dBm]: 5150-5250MHz: 16.31 5725-5850MHz: 27.36	Pass
15.407(a)	Peak Power Spectral Density	Meet the requirement of limit	Pass
15.407(g)	Frequency Stability	Meet the requirement of limit	Pass
15.203	Antenna Requirement	Meet the requirement of limit	Pass

# 1 General Description

## 1.1 Information

### 1.1.1 Specification of the Equipment under Test (EUT)

RF General Information					
Frequency Range (MHz)	IEEE Std. 802.11	Ch. Freq. (MHz)	Channel Number	Transmit Chains (N <sub>TX</sub> )	Data Rate / MCS
5150-5250	a	5180-5240	36-48 [4]	2	6-54 Mbps
5150-5250	n (HT20)	5180-5240	36-48 [4]	2	MCS 0-15
5150-5250	n (HT40)	5190-5230	38-46 [2]	2	MCS 0-15

Note 1: RF output power specifies that Maximum Conducted Output Power.  
 Note 2: 802.11a/n uses a combination of OFDM-BPSK, QPSK, 16QAM, 64QAM modulation.

RF General Information					
Frequency Range (MHz)	IEEE Std. 802.11	Ch. Freq. (MHz)	Channel Number	Transmit Chains (N <sub>TX</sub> )	Data Rate / MCS
5725-5850	a	5745-5825	149-165 [5]	2	6-54 Mbps
5725-5850	n (HT20)	5745-5825	149-165 [5]	2	MCS 0-15
5725-5850	n (HT40)	5755-5795	151-159 [2]	2	MCS 0-15

Note 1: RF output power specifies that Maximum Conducted Output Power.  
 Note 2: 802.11a/n uses a combination of OFDM-BPSK, QPSK, 16QAM, 64QAM modulation.

### 1.1.2 Antenna Details

Ant. No.	Type	Connector	Operating Frequencies (MHz) / Antenna Gain (dBi)		
			2400~2483.5	5150~5250	5725~5850
1	Dipole	UFL	2.96	2.92	4.08
2	PIFA	UFL	1.98	4.52	3.21

### 1.1.3 Power Supply Type of Equipment under Test (EUT)

<b>Power Supply Type</b>	12Vdc from AC adapter
--------------------------	-----------------------

### 1.1.4 Accessories

Accessories		
No.	Equipment	Description
1	AC Adapter	Brand Name: APD Model Name: WA-12M12FU Power Rating: I/P: 100-240Vac, 50-60Hz, 0.5A O/P: 12Vdc, 1.0A Power Line: 1.5m non-shielded cable w/o core
2.	RJ45	0.55m non-shielded cable w/o core

### 1.1.5 Channel List

For Frequency band 5150-5250 MHz			
802.11 a / HT20		802.11n HT40	
Channel	Frequency(MHz)	Channel	Frequency(MHz)
36	5180	38	5190
40	5200	46	5230
44	5220	---	---
48	5240	---	---

For Frequency band 5725~5850 MHz			
802.11 a / HT20		802.11n HT40	
Channel	Frequency(MHz)	Channel	Frequency(MHz)
149	5745	151	5755
153	5765	159	5795
157	5785	---	---
161	5805	---	---
165	5825	---	---

### 1.1.6 Test Tool and Duty Cycle

Test Tool	RT5x9x QA, Version: V1.0.9.0		
Duty Cycle and Duty Factor	Mode	Duty cycle (%)	Duty factor (dB)
	11a	100.00%	0.00
	HT20	100.00%	0.00
	HT40	100.00%	0.00

### 1.1.7 Power Setting


For Frequency band 5150-5250 MHz		
Modulation Mode	Test Frequency (MHz)	Power Set
11a	5180	0C/0F
11a	5200	0C/0F
11a	5240	0C/0E
HT20	5180	0C/0F
HT20	5200	0C/0F
HT20	5240	0C/0E
HT40	5190	0C/0F
HT40	5230	0C/0F

For Frequency band 5725~5850 MHz		
Modulation Mode	Test Frequency (MHz)	Power Set
11a	5745	11/10
11a	5785	22/20
11a	5825	16/14
HT20	5745	10/0F
HT20	5785	22/20
HT20	5825	16/14
HT40	5755	0D/0C
HT40	5795	17/15

## 1.2 Local Support Equipment List

Support Equipment List					
No.	Equipment	Brand	Model	FCC ID	Signal cable / Length (m)
1	Notebook	DELL	Latitude E5420	Doc	RJ45, 8m non-shielded cable w/o core
2	Notebook	DELL	Latitude E6430	Doc	RJ45, 8m non-shielded cable w/o core

## 1.3 Test Setup Chart

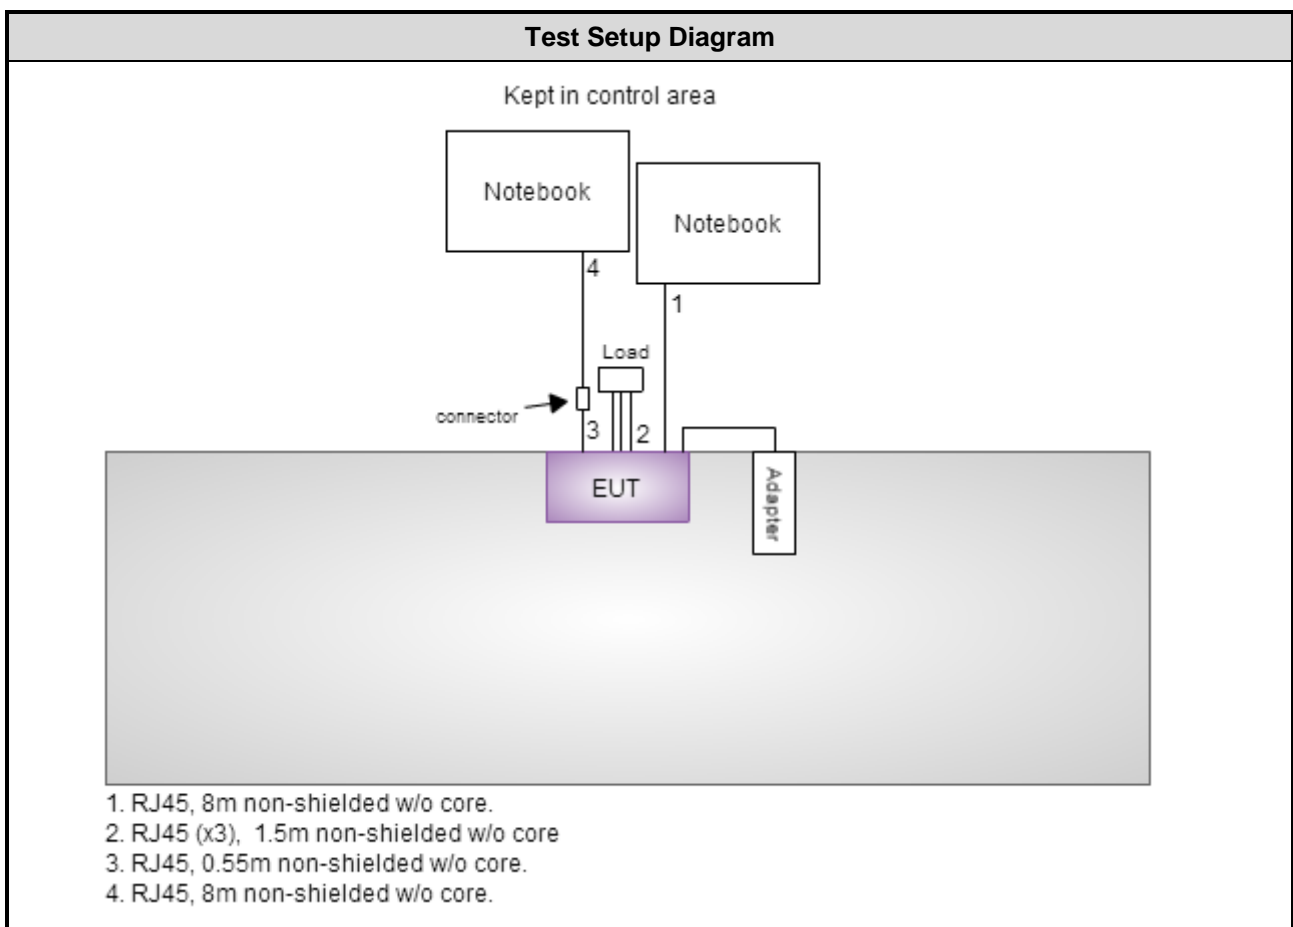



## 1.4 The Equipment List

Test Item	Conducted Emission				
Test Site	Conduction room 1 / (CO01-WS)				
Instrument	Manufacturer	Model No.	Serial No.	Calibration Date	Calibration Until
EMC Receiver	R&S	ESCS 30	100169	Oct. 17, 2014	Oct. 16, 2015
LISN	SCHWARZBECK	Schwarzbeck 8127	8127-667	Nov. 17, 2014	Nov. 16, 2015
LISN (Support Unit)	SCHWARZBECK	Schwarzbeck 8127	8127-666	Nov. 26, 2014	Nov. 25, 2015
RF Cable-CON	Woken	CFD200-NL	CFD200-NL-001	Dec. 31, 2014	Dec. 30, 2015
50 ohm terminal (Support Unit)	NA	50	04	Apr. 18, 2014	Apr. 17, 2015
Measurement Software	AUDIX	e3	6.120210k	NA	NA

Note: Calibration Interval of instruments listed above is one year.

Test Item	Radiated Emission				
Test Site	966 chamber1 / (03CH01-WS)				
Instrument	Manufacturer	Model No.	Serial No.	Calibration Date	Calibration Until
Spectrum Analyzer	R&S	FSV40	101498	Dec. 09, 2014	Dec. 08, 2015
Receiver	R&S	ESR3	101658	Nov. 10, 2014	Nov. 09, 2015
Bilog Antenna	SCHWARZBECK	VULB9168	VULB9168-522	Sep. 05, 2014	Sep. 04, 2015
Horn Antenna 1G-18G	SCHWARZBECK	BBHA 9120 D	BBHA 9120 D 1096	Dec. 11, 2014	Dec. 10, 2015
Horn Antenna 18G-40G	SCHWARZBECK	BBHA 9170	BBHA 9170517	Nov. 10, 2014	Nov. 09, 2015
Loop Antenna	R&S	HFH2-Z2	11900	Nov. 10, 2014	Nov. 09, 2015
Preamplifier	Burgeon	BPA-530	SN:100219	Sep. 09, 2014	Sep. 08, 2015
Preamplifier	Agilent	83017A	MY39501308	Oct. 09, 2014	Oct. 08, 2015
Preamplifier	EMC	EMC184045B	980192	Aug. 26, 2014	Aug. 25, 2015
RF Cable	HUBER+SUHNER	SUCOFLEX104	MY16014/4	Dec. 15, 2014	Dec. 14, 2015
RF Cable	HUBER+SUHNER	SUCOFLEX104	MY16019/4	Dec. 15, 2014	Dec. 14, 2015
RF Cable	HUBER+SUHNER	SUCOFLEX104	MY16139/4	Dec. 15, 2014	Dec. 14, 2015
LF cable 3M	Woken	CFD400NL-LW	CFD400NL-001	Dec. 15, 2014	Dec. 14, 2015
LF cable 10M	Woken	CFD400NL-LW	CFD400NL-002	Dec. 15, 2014	Dec. 14, 2015
Measurement Software	AUDIX	e3	6.120210g	NA	NA

Note: Calibration Interval of instruments listed above is one year.

Test Item	RF Conducted				
Test Site	(TH01-WS)				
Instrument	Manufacturer	Model No.	Serial No.	Calibration Date	Calibration Until
Spectrum Analyzer	R&S	FSV40	101499	Dec. 31, 2014	Dec. 30, 2015
TEMP&HUMIDITY CHAMBER	GIANT FORCE	GCT-225-40-SP-SD	MAF1212-002	Dec. 03, 2014	Dec. 02, 2015
Power Meter	Anritsu	ML2495A	1241002	Sep. 29, 2014	Sep. 28, 2015
Power Sensor	Anritsu	MA2411B	1207366	Sep. 29, 2014	Sep. 28, 2015
Measurement Software	Sporton	Sporton_1	1.3.30	NA	NA

Note: Calibration Interval of instruments listed above is one year.

## 1.5 Testing Applied Standards

According to the specification of EUT, the EUT must comply with following standards and KDB documents.

47 CFR FCC Part 15.407

ANSI C63.10-2013

FCC 789033 D02 General UNII Test Procedures New Rules v01

FCC KDB 662911 D01 Multiple Transmitter Output v02r01

FCC KDB 412172 D01 Determining ERP and EIRP v01

## 1.6 Measurement Uncertainty

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor (k=2))

Measurement Uncertainty	
Parameters	Uncertainty
Bandwidth	±34.134 Hz
Conducted power	±0.808 dB
Frequency error	±34.134 Hz
Power density	±0.463 dB
Conducted emission	±2.670 dB
AC conducted emission	±2.92 dB
Radiated emission ≤ 1GHz	±3.72 dB
Radiated emission > 1GHz	±5.65 dB
Time	±0.1%
Temperature	±0.6 °C

## 2 Test Configuration

### 2.1 Testing Condition

Test Item	Test Site	Ambient Condition	Tested By
AC Conduction	CO01-WS	19°C / 88%	Peter Lin
Radiated Emissions	03CH01-WS	22-23°C / 63-65%	Anderson Hung Lance Xiao
RF Conducted	TH01-WS	20°C / 63%	Brad Wu

➤ FCC site registration No.: 657002

➤ IC site registration No.: 10807A-1

## 2.2 The Worst Test Modes and Channel Details

For Frequency band 5150-5250 MHz				
Test item	Modulation Mode	Test Frequency (MHz)	Data Rate (Mbps) / MCS	Test Configuration
Conducted Emissions	HT40	5190	MCS 0	---
Radiated Emissions $\leq 1$ GHz	HT40	5190	MCS 0	---
RF Output Power	11a	5180 / 5200 / 5240	6 Mbps	---
	HT20	5180 / 5200 / 5240	MCS 0	---
	HT40	5190 / 5230	MCS 0	---
Radiated Emissions $> 1$ GHz Emission Bandwidth Peak Power Spectral Density	11a	5180 / 5200 / 5240	6 Mbps	---
	HT20	5180 / 5200 / 5240	MCS 0	---
	HT40	5190 / 5230	MCS 0	---
Frequency Stability	Un-modulation	5200	---	---

**NOTE:** The EUT was pretested with 3 orientations placed on the table for the radiated emission measurement – X, Y, and Z-plane. The **Y-plane** results were found as the worst case and were shown in this report.

For Frequency band 5725-5850 MHz				
Test item	Modulation Mode	Test Frequency (MHz)	Data Rate (Mbps) / MCS	Test Configuration
Conducted Emissions	11a	5785	6 Mbps	---
Radiated Emissions $\leq 1$ GHz	11a	5785	6 Mbps	---
RF Output Power	11a	5745 / 5785 / 5825	6 Mbps	---
	HT20	5745 / 5785 / 5825	MCS 0	---
	HT40	5755 / 5795	MCS 0	---
Radiated Emissions $> 1$ GHz Emission Bandwidth 6dB bandwidth Peak Power Spectral Density	11a	5745 / 5785 / 5825	6 Mbps	---
	HT20	5745 / 5785 / 5825	MCS 0	---
	HT40	5755 / 5795	MCS 0	---
Frequency Stability	Un-modulation	5785	---	---

**NOTE:** The EUT was pretested with 3 orientations placed on the table for the radiated emission measurement – X, Y, and Z-plane. The **Y-plane** results were found as the worst case and were shown in this report.

## 3 Transmitter Test Results

### 3.1 Conducted Emissions

#### 3.1.1 Limit of Conducted Emissions

Conducted Emissions Limit		
Frequency Emission (MHz)	Quasi-Peak	Average
0.15-0.5	66 - 56 *	56 - 46 *
0.5-5	56	46
5-30	60	50

Note 1: \* Decreases with the logarithm of the frequency.

#### 3.1.2 Test Procedures

1. The device is placed on a test table, raised 80 cm above the reference ground plane. The vertical conducting plane is located 40 cm to the rear of the device.
2. The device is connected to line impedance stabilization network (LISN) and other accessories are connected to other LISN. Measured levels of AC power line conducted emission are across the 50  $\Omega$  LISN port.
3. AC conducted emission measurements is made over frequency range from 150 kHz to 30 MHz.
4. This measurement was performed with AC 120V / 60Hz.

#### 3.1.3 Test Setup



- Note: 1. Support units were connected to second LISN.  
 2. Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes

### 3.1.4 Test Result of Conducted Emissions

<b>Modulation</b>	HT40	<b>Test Freq. (MHz)</b>	5190
<b>Power Phase</b>	Line		


  

	Freq	Level	Limit	Over	Read	LISN	cable	Remark
	MHz	dBuV	Line	Limit	Level	factor	loss	
			dBuV	dB	dBuV	dB	dB	
1	0.162	31.55	55.34	-23.79	30.74	0.73	0.08	Average
2	0.162	42.34	65.34	-23.00	41.53	0.73	0.08	QP
3	0.373	31.89	48.43	-16.54	31.59	0.19	0.11	Average
4*	0.373	45.68	58.43	-12.75	45.38	0.19	0.11	QP
5	0.592	26.86	46.00	-19.14	26.59	0.14	0.13	Average
6	0.592	37.92	56.00	-18.08	37.65	0.14	0.13	QP
7	0.899	30.31	46.00	-15.69	30.06	0.10	0.15	Average
8	0.899	35.95	56.00	-20.05	35.70	0.10	0.15	QP
9	2.622	26.69	46.00	-19.31	25.94	0.48	0.27	Average
10	2.622	33.85	56.00	-22.15	33.10	0.48	0.27	QP
11	4.478	26.39	46.00	-19.61	25.77	0.31	0.31	Average
12	4.478	34.12	56.00	-21.88	33.50	0.31	0.31	QP
13	18.622	25.87	50.00	-24.13	25.04	0.76	0.07	Average
14	18.622	32.78	60.00	-27.22	31.95	0.76	0.07	QP

Note 1: Level (dBuV) = Read Level (dBuV) + LISN Factor (dB) + Cable Loss (dB).  
 Note 2: Over Limit (dB) = Level (dBuV) – Limit Line (dBuV).

<b>Modulation</b>	HT40	<b>Test Freq. (MHz)</b>	5190
-------------------	------	-------------------------	------


<b>Power Phase</b>	Neutral
--------------------	---------

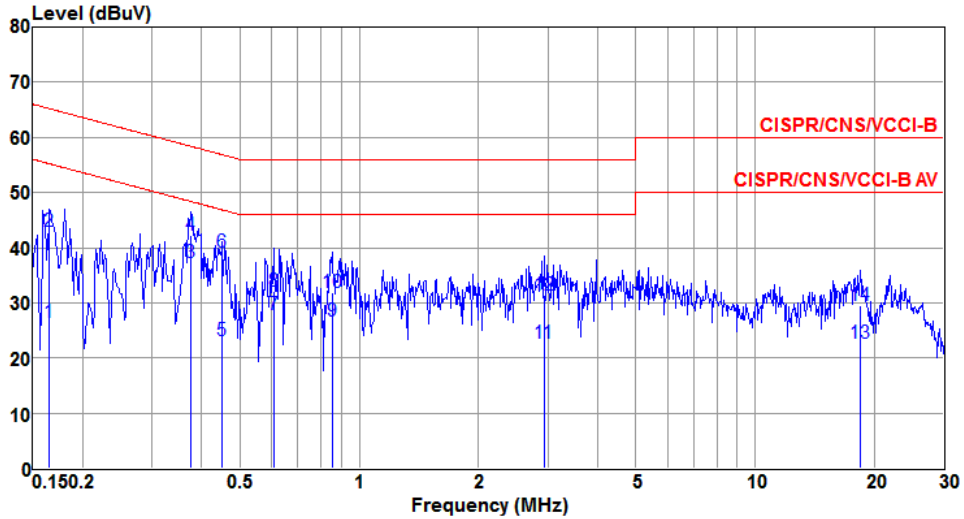

	Freq MHz	Level dBuV	Limit Line dBuV	Over Limit dB	Read Level dBuV	LISN factor dB	cable loss dB	Remark
1	0.165	26.34	55.21	-28.87	25.62	0.64	0.08	Average
2	0.165	42.90	65.21	-22.31	42.18	0.64	0.08	QP
3*	0.375	37.33	48.39	-11.06	37.08	0.14	0.11	Average
4	0.375	42.32	58.39	-16.07	42.07	0.14	0.11	QP
5	0.452	23.20	46.85	-23.65	22.93	0.15	0.12	Average
6	0.452	39.10	56.85	-17.75	38.83	0.15	0.12	QP
7	0.608	27.90	46.00	-18.10	27.58	0.19	0.13	Average
8	0.608	32.21	56.00	-23.79	31.89	0.19	0.13	QP
9	0.853	26.63	46.00	-19.37	26.23	0.25	0.15	Average
10	0.853	31.83	56.00	-24.17	31.43	0.25	0.15	QP
11	2.931	22.63	46.00	-23.37	21.85	0.50	0.28	Average
12	2.931	31.47	56.00	-24.53	30.69	0.50	0.28	QP
13	18.426	22.70	50.00	-27.30	21.92	0.71	0.07	Average
14	18.426	29.51	60.00	-30.49	28.73	0.71	0.07	QP

Note 1: Level (dBuV) = Read Level (dBuV) + LISN Factor (dB) + Cable Loss (dB).  
 2: Over Limit (dB) = Level (dBuV) – Limit Line (dBuV).

<b>Modulation</b>	11a	<b>Test Freq. (MHz)</b>	5785
<b>Power Phase</b>	Line		

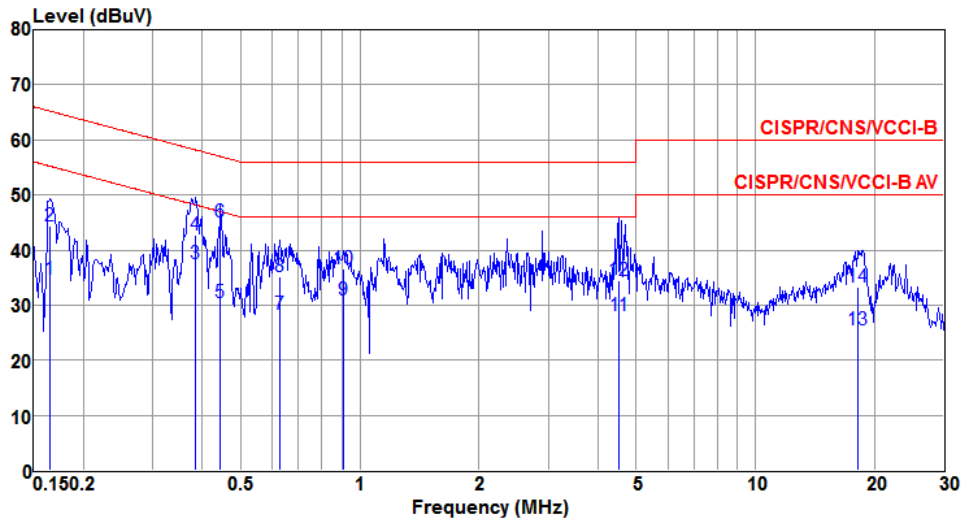


	Freq MHz	Level dBuV	Limit Line dBuV	Over Limit dB	Read Level dBuV	LISN factor dB	cable loss dB	Remark
1	0.165	34.73	55.21	-20.48	33.96	0.69	0.08	Average
2	0.165	44.43	65.21	-20.78	43.66	0.69	0.08	QP
3*	0.385	37.64	48.17	-10.53	37.35	0.18	0.11	Average
4	0.385	42.81	58.17	-15.36	42.52	0.18	0.11	QP
5	0.444	30.50	46.98	-16.48	30.21	0.17	0.12	Average
6	0.444	45.18	56.98	-11.80	44.89	0.17	0.12	QP
7	0.627	28.36	46.00	-17.64	28.09	0.14	0.13	Average
8	0.627	35.06	56.00	-20.94	34.79	0.14	0.13	QP
9	0.909	30.88	46.00	-15.12	30.63	0.10	0.15	Average
10	0.909	36.50	56.00	-19.50	36.25	0.10	0.15	QP
11	4.525	27.98	46.00	-18.02	27.36	0.31	0.31	Average
12	4.525	34.37	56.00	-21.63	33.75	0.31	0.31	QP
13	18.135	25.50	50.00	-24.50	24.66	0.76	0.08	Average
14	18.135	33.17	60.00	-26.83	32.33	0.76	0.08	QP

Note 1: Level (dBuV) = Read Level (dBuV) + LISN Factor (dB) + Cable Loss (dB).  
 2: Over Limit (dB) = Level (dBuV) – Limit Line (dBuV).



<b>Modulation</b>	11a	<b>Test Freq. (MHz)</b>	5785
<b>Power Phase</b>	Neutral		

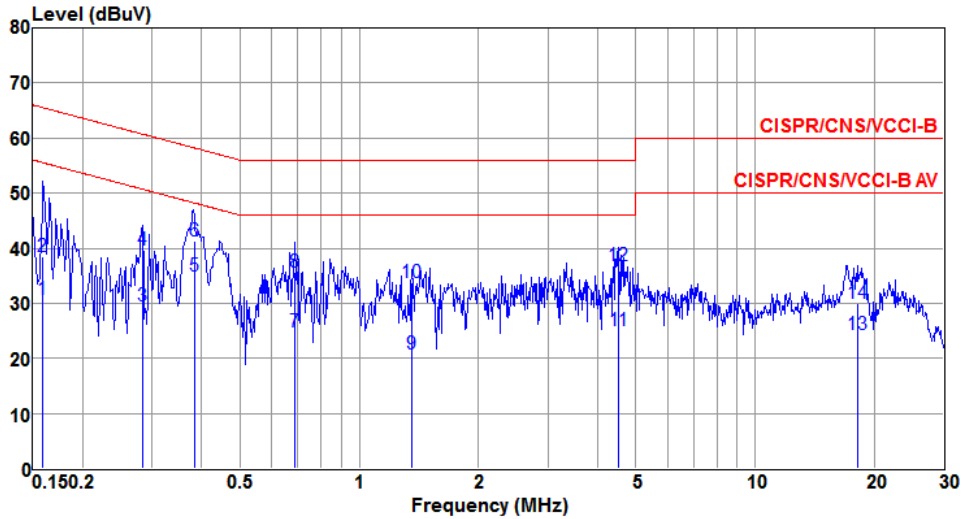

	Freq	Level	Limit	Over	Read	LISN	cable	
	MHz	dBuV	Line	Limit	Level	factor	loss	Remark
			dBuV	dB	dBuV	dB	dB	
1	0.159	30.71	55.52	-24.81	29.90	0.73	0.08	Average
2	0.159	38.40	65.52	-27.12	37.59	0.73	0.08	QP
3	0.283	29.48	50.72	-21.24	29.20	0.18	0.10	Average
4	0.283	39.62	60.72	-21.10	39.34	0.18	0.10	QP
5*	0.383	34.92	48.21	-13.29	34.67	0.14	0.11	Average
6	0.383	41.37	58.21	-16.84	41.12	0.14	0.11	QP
7	0.686	24.83	46.00	-21.17	24.48	0.21	0.14	Average
8	0.686	35.57	56.00	-20.43	35.22	0.21	0.14	QP
9	1.359	20.89	46.00	-25.11	20.44	0.25	0.20	Average
10	1.359	33.68	56.00	-22.32	33.23	0.25	0.20	QP
11	4.525	25.08	46.00	-20.92	24.06	0.71	0.31	Average
12	4.525	36.89	56.00	-19.11	35.87	0.71	0.31	QP
13	18.135	24.23	50.00	-25.77	23.44	0.71	0.08	Average
14	18.135	29.90	60.00	-30.10	29.11	0.71	0.08	QP

Note 1: Level (dBuV) = Read Level (dBuV) + LISN Factor (dB) + Cable Loss (dB).  
 2: Over Limit (dB) = Level (dBuV) – Limit Line (dBuV).

## 3.2 Emission Bandwidth

### 3.2.1 Limit of Emission bandwidth

Within the 5.725-5.85 GHz band, the minimum 6 dB bandwidth of U-NII devices shall be at least 500 kHz.

### 3.2.2 Test Procedures

#### 26dB Bandwidth

1. Set RBW = approximately 1% of the emission bandwidth.
2. Set the VBW > RBW, Detector = Peak.
3. Trace mode = max hold.
4. Measure the maximum width of the emission that is 26 dB down from the peak of the emission.


#### Occupied Bandwidth

1. Set RBW = 1 % to 5 % of the OBW
2. Set VBW  $\geq$  3 RBW
3. Sample detection and single sweep mode shall be used
4. Use the 99 % power bandwidth function of the instrument

#### 6dB Bandwidth


1. Set RBW = 100kHz, VBW = 300kHz
2. Detector = Peak, Trace mode = max hold.
3. Allow the trace to stabilize.
4. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission

### 3.2.3 Test Setup



### 3.2.4 Test Result of Emission Bandwidth

For Frequency band 5150-5250 MHz										
Emission Bandwidth										
Mode	N <sub>TX</sub>	Freq. (MHz)	26dB Bandwidth (MHz)				99% Bandwidth (MHz)			
			Chain 0	Chain 1	Chain 2	Chain 3	Chain 0	Chain 1	Chain 2	Chain 3
11a	2	5180	20.00	20.00	---	---	16.52	16.52	---	---
11a	2	5200	19.77	19.83	---	---	16.60	16.65	---	---
11a	2	5240	20.06	20.06	---	---	16.63	16.59	---	---
HT20	2	5180	20.06	20.12	---	---	17.44	17.44	---	---
HT20	2	5200	20.06	20.00	---	---	17.43	17.43	---	---
HT20	2	5240	20.00	20.17	---	---	17.43	17.43	---	---
HT40	2	5190	41.74	41.74	---	---	36.16	36.18	---	---
HT40	2	5230	41.51	41.51	---	---	36.16	36.16	---	---

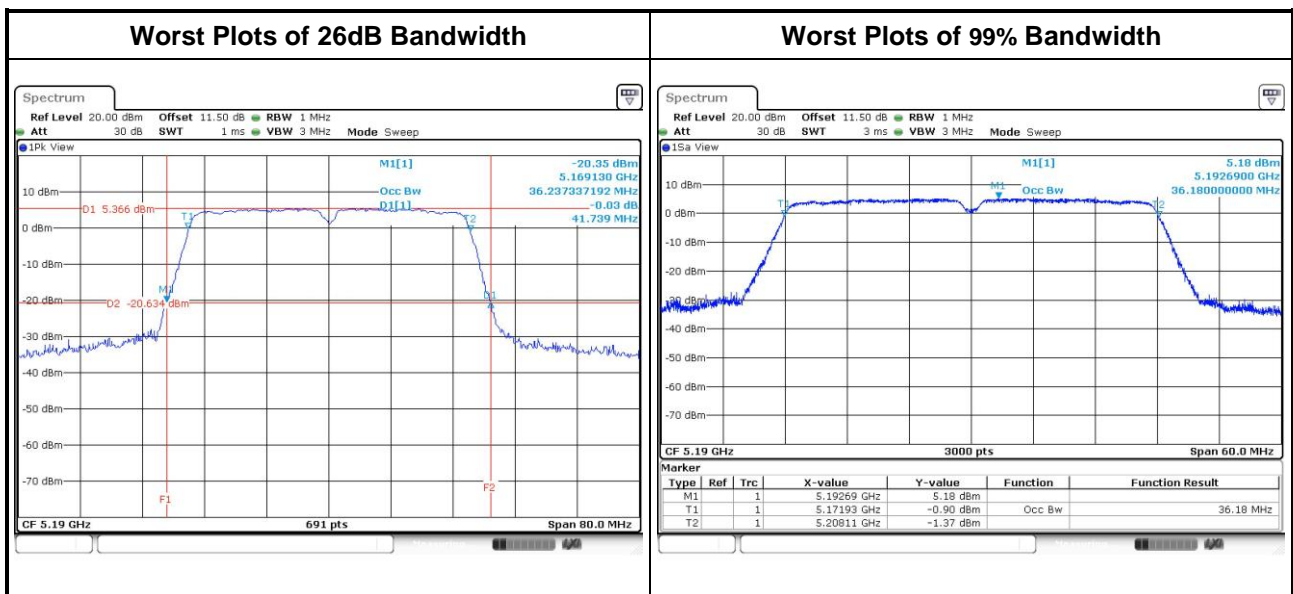


For Frequency band 5725-5850 MHz


Emission Bandwidth

Mode	N <sub>TX</sub>	Freq. (MHz)	OBW Bandwidth (MHz)				6dB Bandwidth (MHz)				6dB BW Limit (KHz)
			Chain 0	Chain 1	Chain 2	Chain 3	Chain 0	Chain 1	Chain 2	Chain 3	
11a	2	5745	16.69	16.67	---	---	16.46	16.46	---	---	500
11a	2	5785	24.09	24.09	---	---	16.41	16.41	---	---	500
11a	2	5825	16.67	16.67	---	---	16.46	16.46	---	---	500
HT20	2	5745	17.46	17.44	---	---	17.57	17.51	---	---	500
HT20	2	5785	23.92	24.05	---	---	17.62	17.62	---	---	500
HT20	2	5825	17.49	17.48	---	---	17.57	17.57	---	---	500
HT40	2	5755	36.16	36.14	---	---	36.41	36.41	---	---	500
HT40	2	5795	36.40	36.34	---	---	36.41	36.41	---	---	500

Worst Plots of 99% Bandwidth

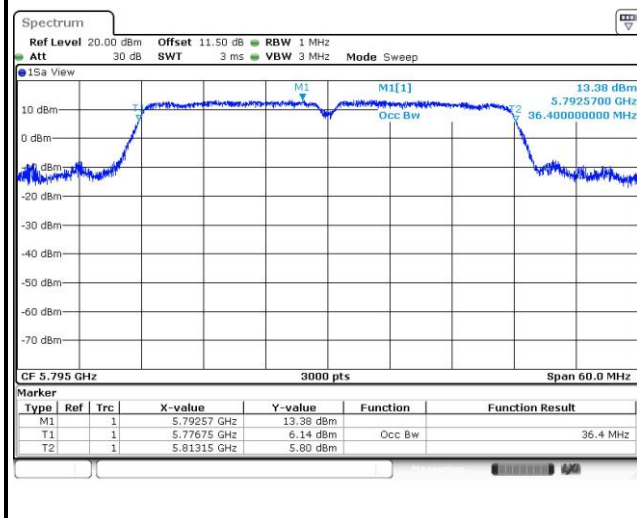

Worst Plots of 6dB Bandwidth

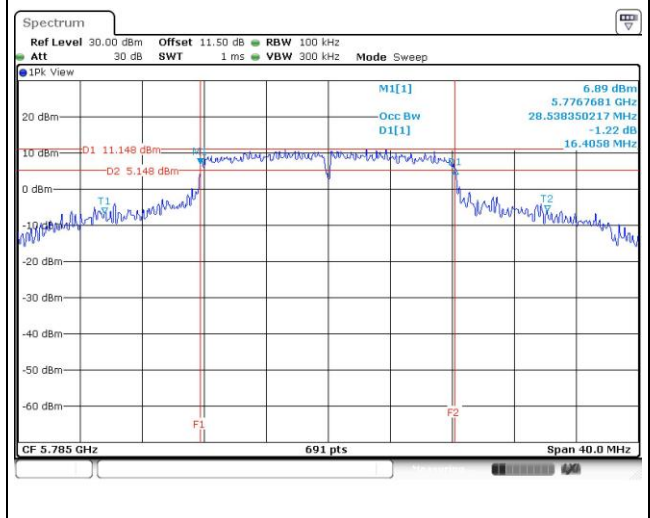

### 3.3 RF Output Power

#### 3.3.1 Limit of RF Output Power

Frequency band 5150-5250 MHz	
Operating Mode	Limit
<input type="checkbox"/> Outdoor access point	Conducted Power: 1 W The maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm)
<input checked="" type="checkbox"/> Indoor access point	Conducted Power: 1 W
<input type="checkbox"/> Fixed point-to-point access points	Conducted Power: 1 W
<input type="checkbox"/> Mobile and portable client devices	Conducted Power: 250 mW


Frequency Band (MHz)	Limit
<input type="checkbox"/> 5250 ~ 5350	250mW or 11dBm+10 log B
<input type="checkbox"/> 5470 ~ 5725	250mW or 11dBm+10 log B
<input checked="" type="checkbox"/> 5725 ~ 5850	1 W

Note: "B" is the 26dB emission bandwidth in MHz.

#### 3.3.2 Test Procedures

- Method PM-G ( Measurement using a gated RF average power meter )**
  - Measurements may is performed using a wideband gated RF power meter provided that the gate parameters are adjusted such that the power is measured only when the EUT is transmitting at its maximum power control level. Since the measurement is made only during the ON time of the transmitter, no duty cycle correction factor is required.

#### 3.3.3 Test Setup



### 3.3.4 Test Result of Maximum Conducted Output Power

For Frequency band 5150-5250 MHz									
Mode	N <sub>TX</sub>	Freq. (MHz)	Conducted Power (dBm)				Total Power (mW)	Total Power (dBm)	Limit (dBm)
			Chain 0	Chain 1	Chain 2	Chain 3			
11a	2	5180	13.32	12.65	---	---	39.886	16.01	30.00
11a	2	5200	13.32	12.84	---	---	40.709	16.10	30.00
11a	2	5240	13.21	12.84	---	---	40.172	16.04	30.00
HT20	2	5180	13.29	12.69	---	---	39.908	16.01	30.00
HT20	2	5200	13.36	12.85	---	---	40.952	16.12	30.00
HT20	2	5240	13.25	12.86	---	---	40.455	16.07	30.00
HT40	2	5190	13.31	13.29	---	---	42.759	<b>16.31</b>	30.00
HT40	2	5230	13.26	13.18	---	---	41.981	16.23	30.00

For Frequency band 5725-5850 MHz									
Mode	N <sub>TX</sub>	Freq. (MHz)	Conducted Power (dBm)				Total Power (mW)	Total Power (dBm)	Limit (dBm)
			Chain 0	Chain 1	Chain 2	Chain 3			
11a	2	5745	18.44	18.43	---	---	139.486	21.45	30.00
11a	2	5785	24.32	24.37	---	---	543.923	<b>27.36</b>	30.00
11a	2	5825	19.75	19.82	---	---	190.346	22.80	30.00
HT20	2	5745	18.02	17.78	---	---	123.366	20.91	30.00
HT20	2	5785	24.22	24.31	---	---	534.015	27.28	30.00
HT20	2	5825	19.63	19.74	---	---	186.022	22.70	30.00
HT40	2	5755	16.29	16.55	---	---	87.745	19.43	30.00
HT40	2	5795	20.34	20.47	---	---	219.573	23.42	30.00

### 3.4 Peak Power Spectral Density

#### 3.4.1 Limit of Peak Power Spectral Density

Frequency band 5150-5250 MHz		
Operating Mode		Limit
<input type="checkbox"/>	Outdoor access point	17 dBm / MHz
<input checked="" type="checkbox"/>	Indoor access point	17 dBm / MHz
<input type="checkbox"/>	Fixed point-to-point access points	17 dBm / MHz
<input type="checkbox"/>	Mobile and portable client devices	11 dBm / MHz

Frequency Band (MHz)		Limit
<input type="checkbox"/>	5250 ~ 5350	11 dBm / MHz
<input type="checkbox"/>	5470 ~ 5725	11 dBm / MHz
<input checked="" type="checkbox"/>	5725 ~ 5850	30 dBm / 500 kHz

### 3.4.2 Test Procedures

#### For 5150 ~ 5250 MHz

Method SA-1

1. Set RBW = 1 MHz, VBW = 3 MHz, Sweep time = auto, Detector = RMS.
2. Trace average 100 traces.
3. Use the peak marker function to determine the maximum amplitude level.

Method SA-2 Alternative

1. Set RBW = 1 MHz, VBW = 3 MHz, Detector = RMS.
2. Set sweep time  $\geq 10 * (\text{number of points in sweep}) * (\text{total on/off period of the transmitted signal})$ .
3. Perform a single sweep.
4. Use the peak marker function to determine the maximum amplitude level.
5. Add  $10 \log(1/x)$ , where x is the duty cycle.

#### For 5725 ~ 5850 MHz


Method SA-1

1. Set RBW = 500 kHz, VBW = 2 MHz, Sweep time = auto, Detector = RMS.
2. Trace average 100 traces.
3. Use the peak marker function to determine the maximum amplitude level.

Method SA-2 Alternative

1. Set RBW = 500 kHz, VBW = 2 MHz, Detector = RMS.
2. Set sweep time  $\geq 10 * (\text{number of points in sweep}) * (\text{total on/off period of the transmitted signal})$ .
3. Perform a single sweep.
4. Use the peak marker function to determine the maximum amplitude level.
5. Add  $10 \log(1/x)$ , where x is the duty cycle.

### 3.4.3 Test Setup






### 3.4.4 Test Result of Peak Power Spectral Density

For Frequency band 5150-5250 MHz						
Condition			Peak Power Spectral Density (dBm/MHz)			
Modulation Mode	N <sub>TX</sub>	Freq. (MHz)	PPSD w/o D.F (dBm/MHz)	Duty Factor (dB)	PPSD with D.F (dBm/MHz)	PPSD Limit (dBm/MHz)
11a	2	5180	2.64	0.00	2.64	16.23
11a	2	5200	2.59	0.00	2.59	16.23
11a	2	5240	2.62	0.00	2.62	16.23
HT20	2	5180	2.81	0.00	2.81	16.23
HT20	2	5200	2.39	0.00	2.39	16.23
HT20	2	5240	2.72	0.00	2.72	16.23
HT40	2	5190	-1.38	0.00	-1.38	16.23
HT40	2	5230	-0.98	0.00	-0.98	16.23

**Note:**


1. D.F is duty factor.
2. Test result is bin-by-bin summing measured value of each TX port.
3. Directional gain =  $10 * \log((10^{2.92/20} + 10^{4.52/20})^2 / 2) = 6.77 \text{ dBi} > 6 \text{ dBi}$   
Limit shall be reduced to  $17 \text{ dBm} - (6.77 \text{ dBi} - 6 \text{ dBi}) = 16.23 \text{ dBm}$ .

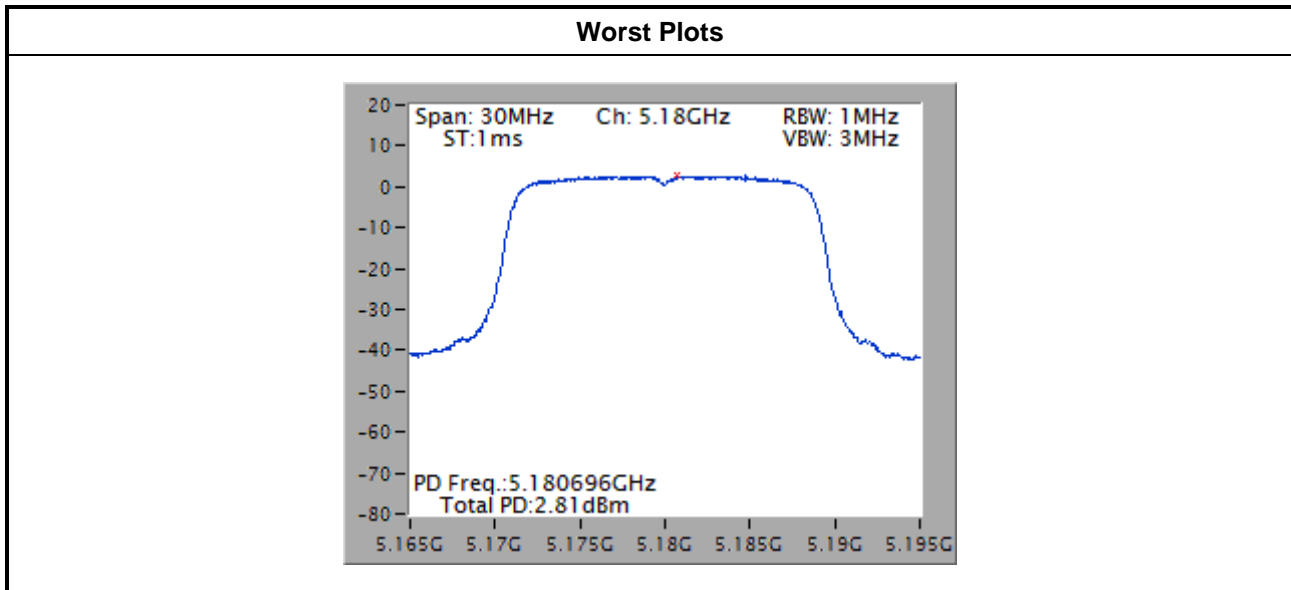

For Frequency band 5725-5850 MHz						
Condition			Peak Power Spectral Density (dBm/500kHz)			
Modulation Mode	N <sub>TX</sub>	Freq. (MHz)	PPSD w/o D.F (dBm/500kHz)	Duty Factor (dB)	PPSD with D.F (dBm/500kHz)	PPSD Limit (dBm/500kHz)
11a	2	5745	5.91	0.00	5.91	29.33
11a	2	5785	12.57	0.00	12.57	29.33
11a	2	5825	7.58	0.00	7.58	29.33
HT20	2	5745	5.13	0.00	5.13	29.33
HT20	2	5785	12.54	0.00	12.54	29.33
HT20	2	5825	7.30	0.00	7.30	29.33
HT40	2	5755	0.34	0.00	0.34	29.33
HT40	2	5795	5.06	0.00	5.06	29.33

**Note:**

1. D.F is duty factor.
2. Test result is bin-by-bin summing measured value of each TX port.
3. Directional gain =  $10 * \log((10^{4.08/20} + 10^{3.21/20})/2) = 6.67 \text{ dBi} > 6 \text{ dBi}$ .  
Limit shall be reduced to  $30 \text{ dBm} - (6.67 \text{ dBi} - 6 \text{ dBi}) = 29.33 \text{ dBm}$ .

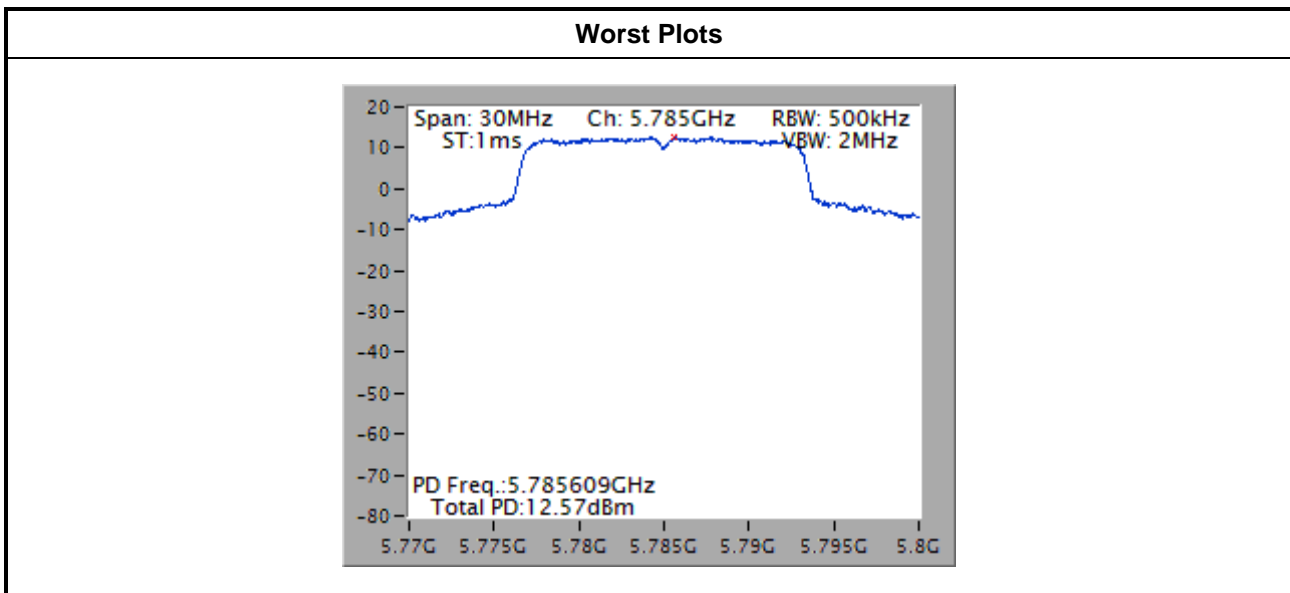

### 3.5 Transmitter Radiated and Band Edge Emissions

#### 3.5.1 Limit of Transmitter Radiated and Band Edge Emissions

Restricted Band Emissions Limit			
Frequency Range (MHz)	Field Strength (uV/m)	Field Strength (dBuV/m)	Measure Distance (m)
0.009~0.490	2400/F(kHz)	48.5 - 13.8	300
0.490~1.705	24000/F(kHz)	33.8 - 23	30
1.705~30.0	30	29	30
30~88	100	40	3
88~216	150	43.5	3
216~960	200	46	3
Above 960	500	54	3

**Note 1:**  
Qusai-Peak value is measured for frequency below 1GHz except for 9–90 kHz, 110–490 kHz frequency band. Peak and average value are measured for frequency above 1GHz. The limit on average radio frequency emission is as above table. The limit on peak radio frequency emissions is 20 dB above the maximum permitted average emission limit

**Note 2:**  
Measurements may be performed at a distance other than what is specified provided. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor as below, Frequency at or above 30 MHz: 20 dB/decade Frequency below 30 MHz: 40 dB/decade.

Un-restricted band emissions above 1GHz Limit	
Operating Band	Limit
5.15 - 5.25 GHz	e.i.r.p. -27 dBm [68.2 dBuV/m@3m]
5.25 - 5.35 GHz	e.i.r.p. -27 dBm [68.2 dBuV/m@3m]
5.47 - 5.725 GHz	e.i.r.p. -27 dBm [68.2 dBuV/m@3m]
5.725 - 5.850 GHz	5.715 5.725 GHz: e.i.r.p. -17 dBm [78.2 dBuV/m@3m] 5.85 5.86 GHz: e.i.r.p. -17 dBm [78.2 dBuV/m@3m] Other un-restricted band: e.i.r.p. -27 dBm [68.2 dBuV/m@3m]

**Note 1:** Measurements may be performed at a distance other than the limit distance provided they are not performed in the near field and the emissions to be measured can be detected by the measurement equipment. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse of linear distance for field-strength measurements, inverse of linear distance-squared for power-density measurements).

### 3.5.2 Test Procedures


1. Measurement is made at a semi-anechoic chamber that incorporates a turntable allowing a EUT rotation of 360°. A continuously-rotating, remotely-controlled turntable is installed at the test site to support the EUT and facilitate determination of the direction of maximum radiation for each EUT emission frequency. The EUT is placed at test table. For emissions testing at or below 1 GHz, the table height is 80 cm above the reference ground plane. For emission measurements above 1 GHz, the table height is 1.5 m
2. Measurement is made with the antenna positioned in both the horizontal and vertical planes of polarization. The measurement antenna is varied in height (1m ~ 4m) above the reference ground plane to obtain the maximum signal strength. Distance between EUT and antenna is 3 m.
3. This investigation is performed with the EUT rotated 360°, the antenna height scanned between 1 m and 4 m, and the antenna rotated to repeat the measurements for both the horizontal and vertical antenna polarizations.

Note:


1. 120kHz measurement bandwidth of test receiver and Quasi-peak detector is for radiated emission below 1GHz.
2. RBW=1MHz, VBW=3MHz and Peak detector is for peak measured value of radiated emission above 1GHz.
3. RBW=1MHz, VBW=1/T and Peak detector is for average measured value of radiated emission above 1GHz.

### 3.5.3 Test Setup


#### Radiated Emissions below 1 GHz

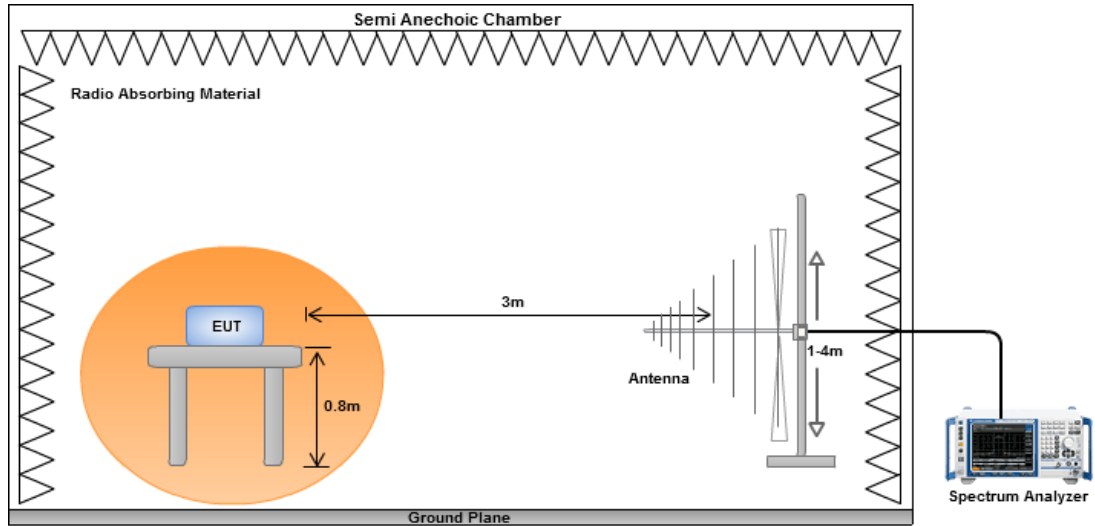

#### Radiated Emissions above 1 GHz

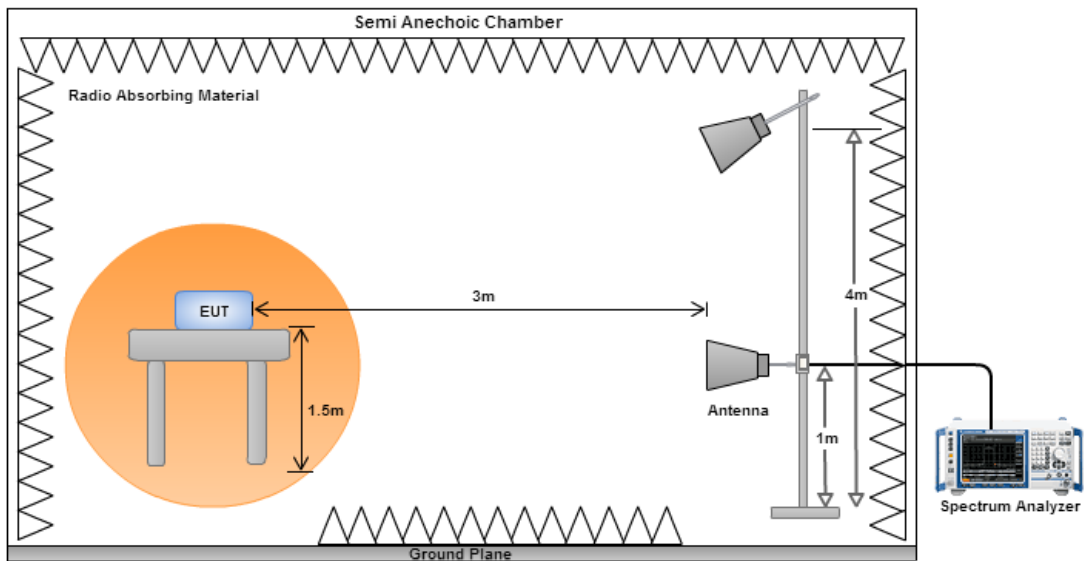


### 3.5.4 Transmitter Radiated Unwanted Emissions (Below 1GHz)

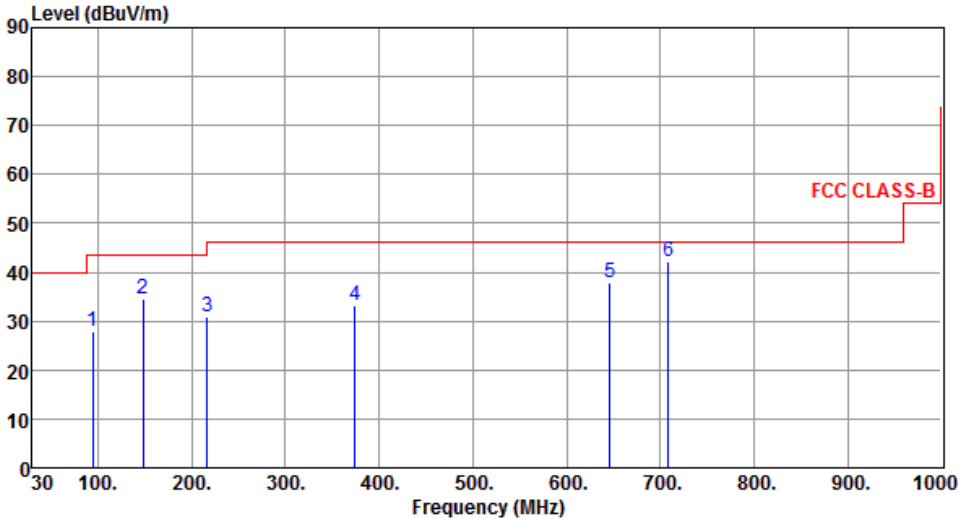Modulation	HT40	Test Freq. (MHz)	5190						
Polarization	Horizontal								
									
Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High cm	Turn Table deg	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB				
1	94.02	27.87	43.50	-15.63	50.22	-22.35	Peak	---	---
2	148.34	34.40	43.50	-9.10	51.07	-16.67	Peak	---	---
3	216.24	30.72	46.00	-15.28	49.72	-19.00	Peak	---	---
4	374.35	33.36	46.00	-12.64	47.58	-14.22	Peak	---	---
5	645.95	38.02	46.00	-7.98	46.92	-8.90	Peak	---	---
6	709.00	42.11	46.00	-3.89	49.98	-7.87	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)  
\*Factor includes antenna factor , cable loss and amplifier gain  
Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).  
Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.

<b>Modulation</b>	HT40	<b>Test Freq. (MHz)</b>	5190
<b>Polarization</b>	Vertical		

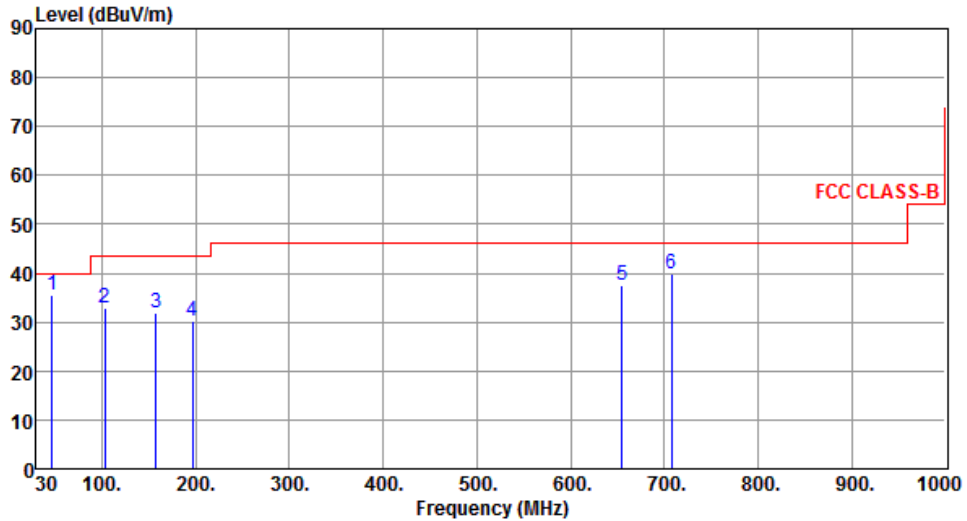

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	47.13	35.38	40.00	-4.62	51.65	-16.27	QP	---	---
2	102.75	32.86	43.50	-10.64	53.97	-21.11	Peak	---	---
3	158.04	31.75	43.50	-11.75	48.46	-16.71	Peak	---	---
4	196.84	30.31	43.50	-13.19	49.37	-19.06	Peak	---	---
5	654.68	37.49	46.00	-8.51	46.25	-8.76	Peak	---	---
6	708.03	39.95	46.00	-6.05	47.85	-7.90	Peak	---	---


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.

<b>Modulation</b>	11a	<b>Test Freq. (MHz)</b>	5785
<b>Polarization</b>	Horizontal		

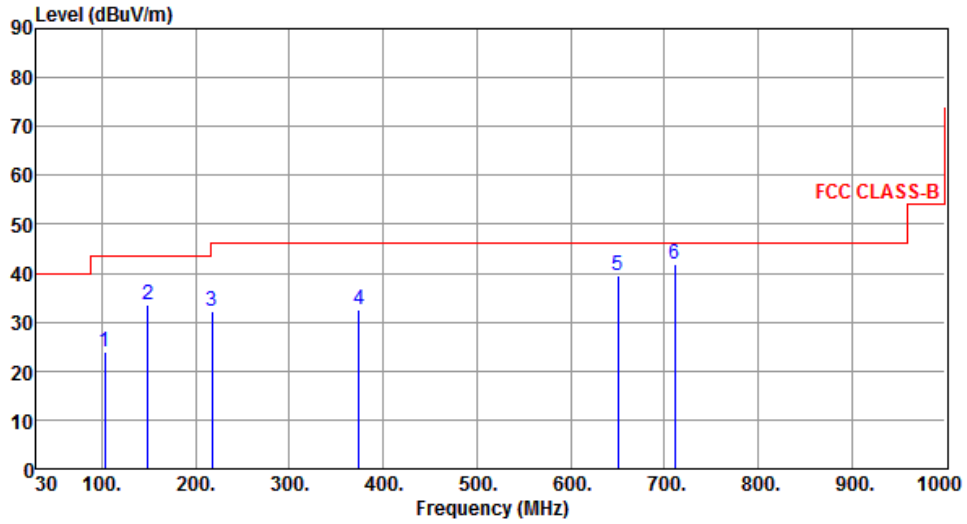

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	102.75	23.98	43.50	-19.52	45.09	-21.11	Peak	---	---
2	149.31	33.41	43.50	-10.09	50.06	-16.65	Peak	---	---
3	217.21	32.23	46.00	-13.77	51.24	-19.01	Peak	---	---
4	374.35	32.54	46.00	-13.46	46.76	-14.22	Peak	---	---
5	650.80	39.62	46.00	-6.38	48.45	-8.83	Peak	---	---
6	710.94	41.76	46.00	-4.24	49.59	-7.83	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)


\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.



<b>Modulation</b>	11a	<b>Test Freq. (MHz)</b>	5785
<b>Polarization</b>	Vertical		

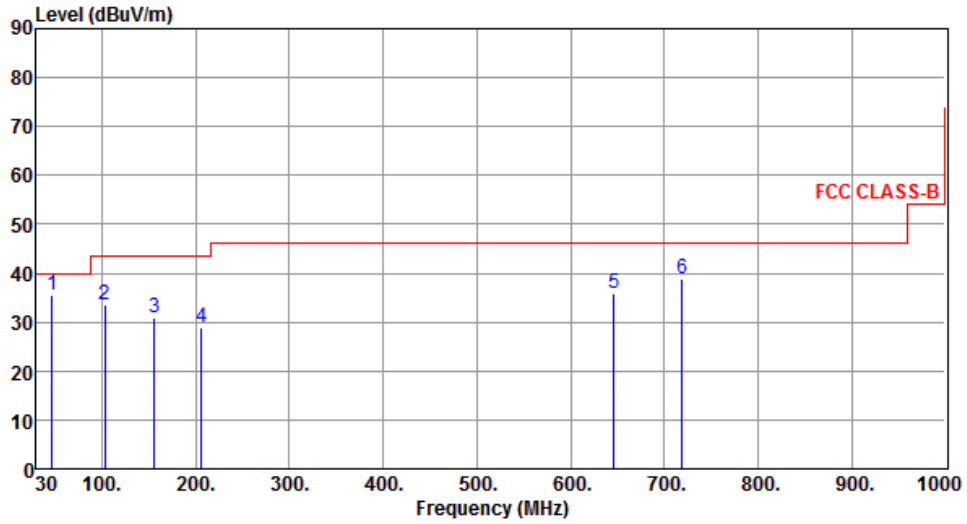

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	46.49	35.37	40.00	-4.63	51.65	-16.28	QP	---	---
2	102.75	33.65	43.50	-9.85	54.76	-21.11	Peak	---	---
3	156.10	30.74	43.50	-12.76	47.43	-16.69	Peak	---	---
4	206.54	28.82	43.50	-14.68	47.82	-19.00	Peak	---	---
5	645.95	35.93	46.00	-10.07	44.83	-8.90	Peak	---	---
6	718.70	38.88	46.00	-7.12	46.57	-7.69	Peak	---	---


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).


Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.

### 3.5.5 Transmitter Radiated Unwanted Emissions (Above 1GHz) for 11a

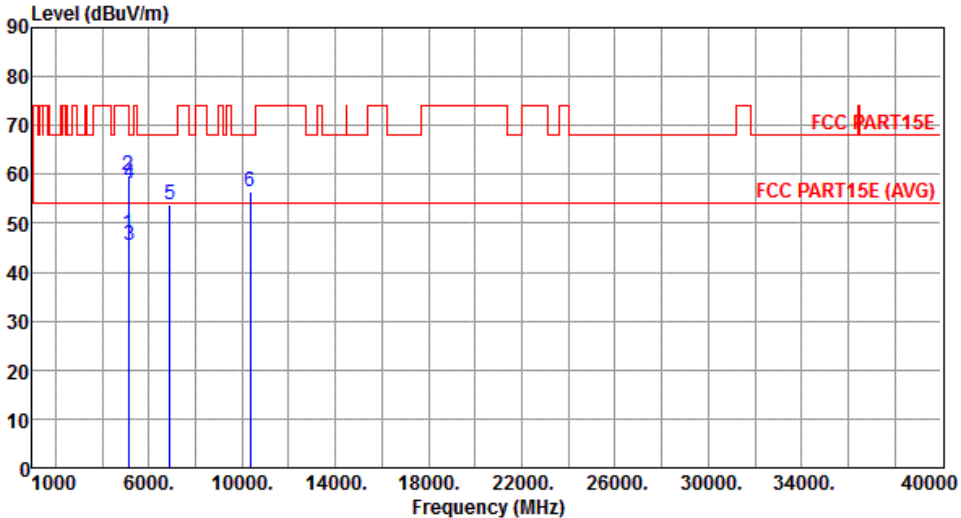Modulation	11a	Test Freq. (MHz)	5180						
Polarization	Horizontal								
									
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5127.00	47.95	54.00	-6.05	42.51	5.44	Average	---	---
2	5127.00	59.72	74.00	-14.28	54.28	5.44	Peak	---	---
3	5150.00	45.39	54.00	-8.61	39.93	5.46	Average	---	---
4	5150.00	58.07	74.00	-15.93	52.61	5.46	Peak	---	---
5	6906.70	53.79	68.20	-14.41	45.38	8.41	Peak	---	---
6	10360.00	56.37	68.20	-11.83	40.96	15.41	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)  
 \*Factor includes antenna factor , cable loss and amplifier gain  
 Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

<b>Modulation</b>	11a	<b>Test Freq. (MHz)</b>	5180
<b>Polarization</b>	Vertical		

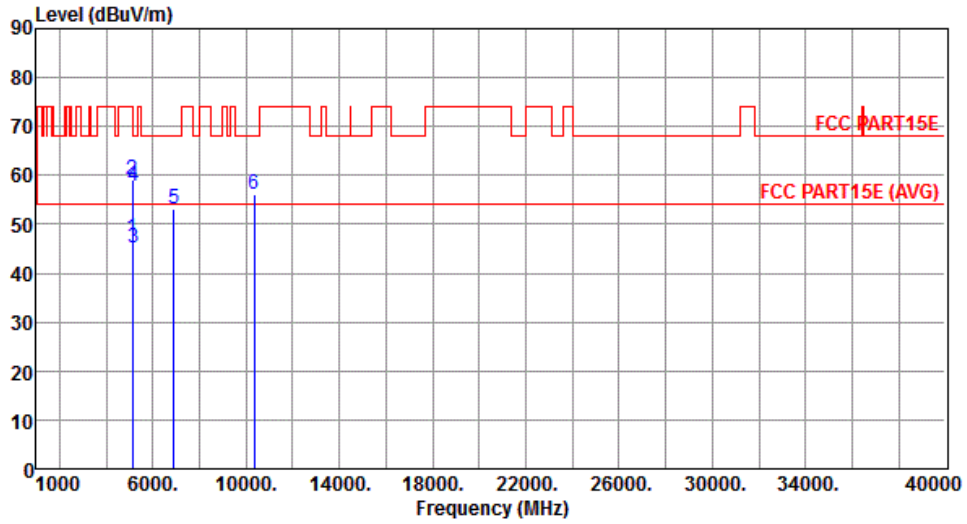


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5127.00	47.24	54.00	-6.76	41.80	5.44	Average	---	---
2	5127.00	59.25	74.00	-14.75	53.81	5.44	Peak	---	---
3	5150.00	45.16	54.00	-8.84	39.70	5.46	Average	---	---
4	5150.00	57.64	74.00	-16.36	52.18	5.46	Peak	---	---
5	6906.70	53.24	68.20	-14.96	44.83	8.41	Peak	---	---
6	10360.00	56.11	68.20	-12.09	40.70	15.41	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

<b>Modulation</b>	11a	<b>Test Freq. (MHz)</b>	5200
<b>Polarization</b>	Horizontal		

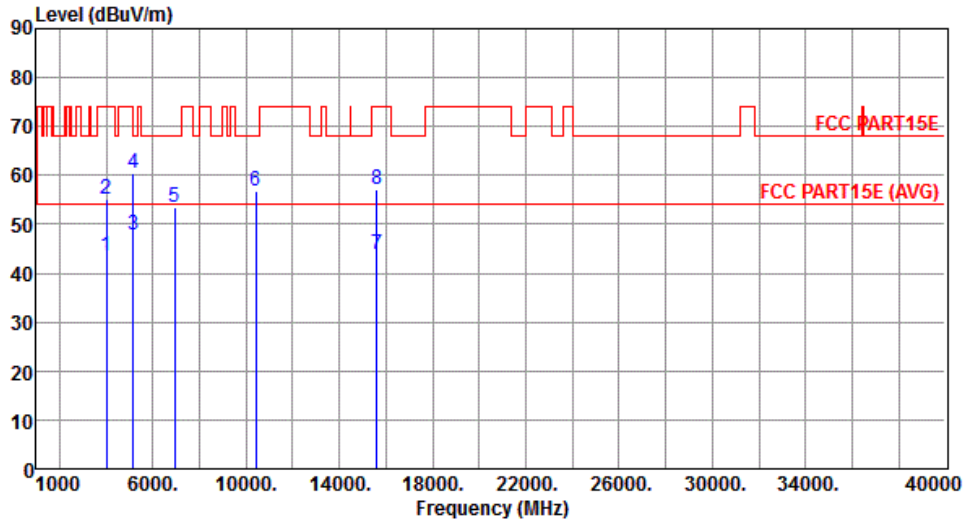


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	4000.00	43.39	54.00	-10.61	41.77	1.62	Average	---	---
2	4000.00	55.16	74.00	-18.84	53.54	1.62	Peak	---	---
3	5147.00	47.69	54.00	-6.31	42.23	5.46	Average	---	---
4	5147.00	60.28	74.00	-13.72	54.82	5.46	Peak	---	---
5	6933.30	53.45	68.20	-14.75	45.00	8.45	Peak	---	---
6	10400.00	56.68	68.20	-11.52	41.13	15.55	Peak	---	---
7	15600.00	43.92	54.00	-10.08	28.36	15.56	Average	---	---
8	15600.00	57.12	74.00	-16.88	41.56	15.56	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

<b>Modulation</b>	11a	<b>Test Freq. (MHz)</b>	5200
<b>Polarization</b>	Vertical		

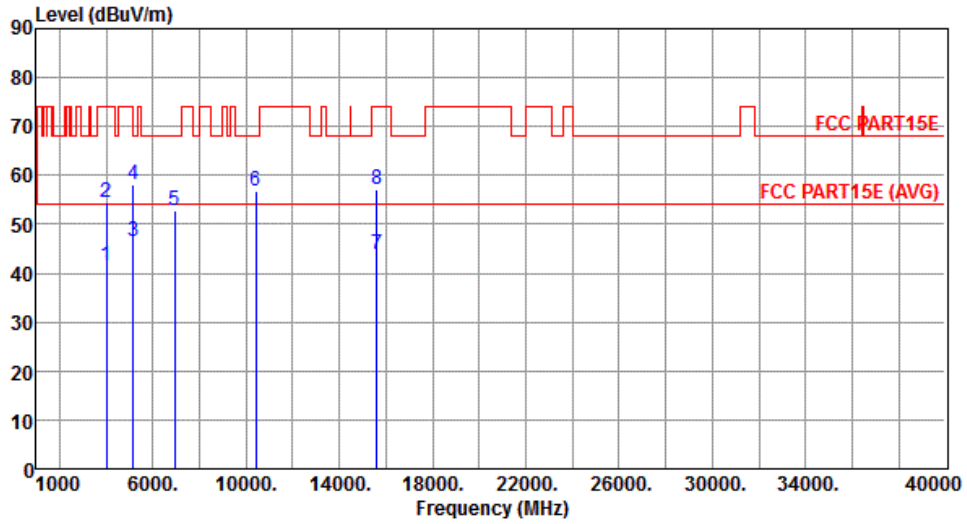


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	4000.00	41.53	54.00	-12.47	39.91	1.62	Average	---	---
2	4000.00	54.42	74.00	-19.58	52.80	1.62	Peak	---	---
3	5147.00	46.59	54.00	-7.41	41.13	5.46	Average	---	---
4	5147.00	58.00	74.00	-16.00	52.54	5.46	Peak	---	---
5	6933.30	52.75	68.20	-15.45	44.30	8.45	Peak	---	---
6	10400.00	56.66	68.20	-11.54	41.11	15.55	Peak	---	---
7	15600.00	43.77	54.00	-10.23	28.21	15.56	Average	---	---
8	15600.00	57.27	74.00	-16.73	41.71	15.56	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

<b>Modulation</b>	11a	<b>Test Freq. (MHz)</b>	5240
<b>Polarization</b>	Horizontal		

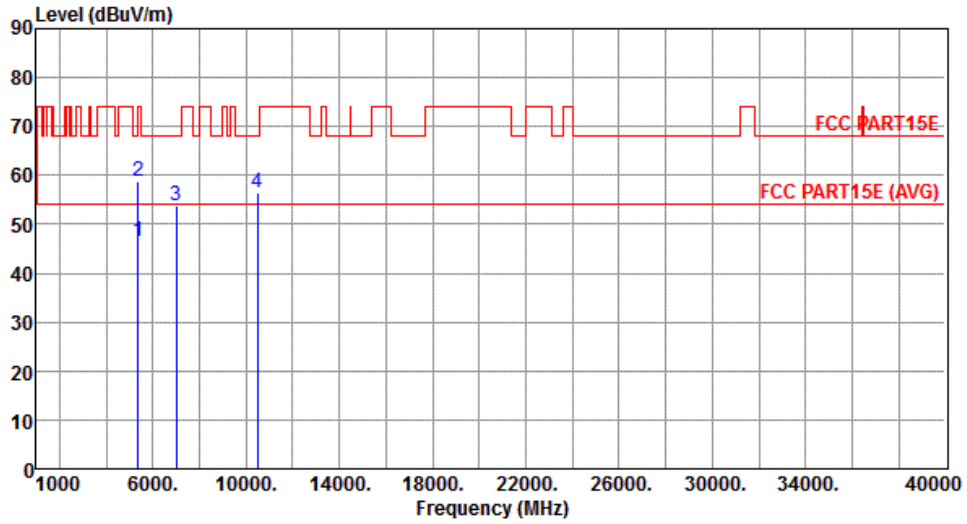


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5350.00	46.43	54.00	-7.57	40.87	5.56	Average	---	---
2	5350.00	58.79	74.00	-15.21	53.23	5.56	Peak	---	---
3	6986.70	53.75	68.20	-14.45	45.24	8.51	Peak	---	---
4	10480.00	56.47	68.20	-11.73	40.61	15.86	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

<b>Modulation</b>	11a	<b>Test Freq. (MHz)</b>	5240
<b>Polarization</b>	Vertical		

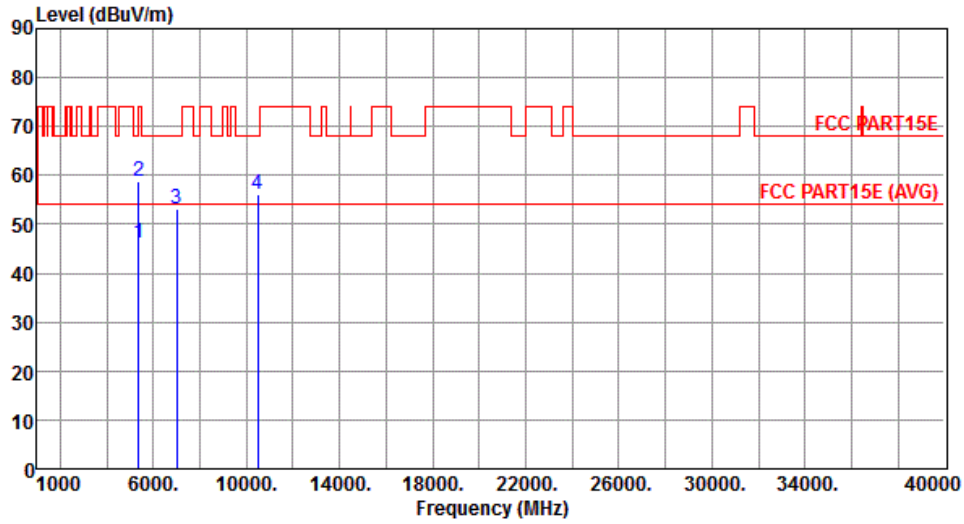


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5350.00	46.22	54.00	-7.78	40.66	5.56	Average	---	---
2	5350.00	58.63	74.00	-15.37	53.07	5.56	Peak	---	---
3	6986.70	53.27	68.20	-14.93	44.76	8.51	Peak	---	---
4	10480.00	56.03	68.20	-12.17	40.17	15.86	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

<b>Modulation</b>	11a	<b>Test Freq. (MHz)</b>	5745
<b>Polarization</b>	Horizontal		

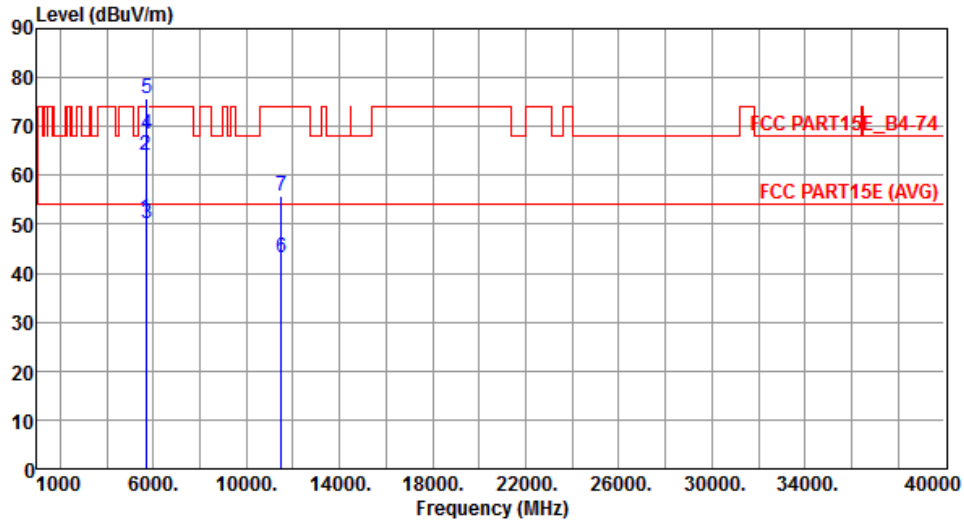

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5692.00	51.22	54.00	-2.78	45.57	5.65	Average	---	---
2	5692.00	64.11	74.00	-9.89	58.46	5.65	Peak	---	---
3	5715.00	50.26	54.00	-3.74	44.61	5.65	Average	---	---
4	5715.00	68.43	74.00	-5.57	62.78	5.65	Peak	---	---
5	5725.00	75.88	78.20	-2.32	70.24	5.64	Peak	---	---
6	11490.00	43.15	54.00	-10.85	27.22	15.93	Average	---	---
7	11490.00	55.74	74.00	-18.26	39.81	15.93	Peak	---	---


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



<b>Modulation</b>	11a	<b>Test Freq. (MHz)</b>	5745
<b>Polarization</b>	Vertical		

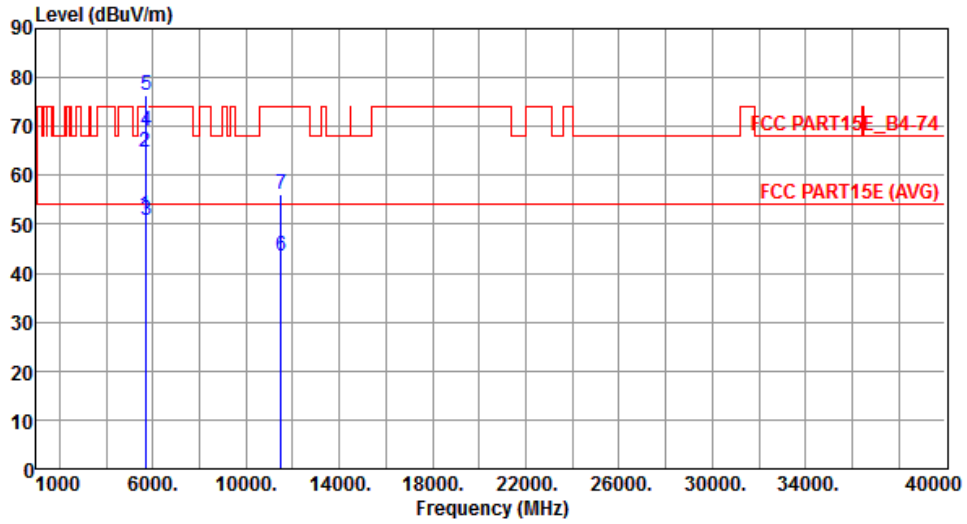


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5692.00	51.74	54.00	-2.26	46.09	5.65	Average	---	---
2	5692.00	64.63	74.00	-9.37	58.98	5.65	Peak	---	---
3	5715.00	50.80	54.00	-3.20	45.15	5.65	Average	---	---
4	5715.00	68.96	74.00	-5.04	63.31	5.65	Peak	---	---
5	5725.00	76.48	78.20	-1.72	70.84	5.64	Peak	---	---
6	11490.00	43.43	54.00	-10.57	27.50	15.93	Average	---	---
7	11490.00	56.00	74.00	-18.00	40.07	15.93	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

<b>Modulation</b>	11a	<b>Test Freq. (MHz)</b>	5785
<b>Polarization</b>	Horizontal		

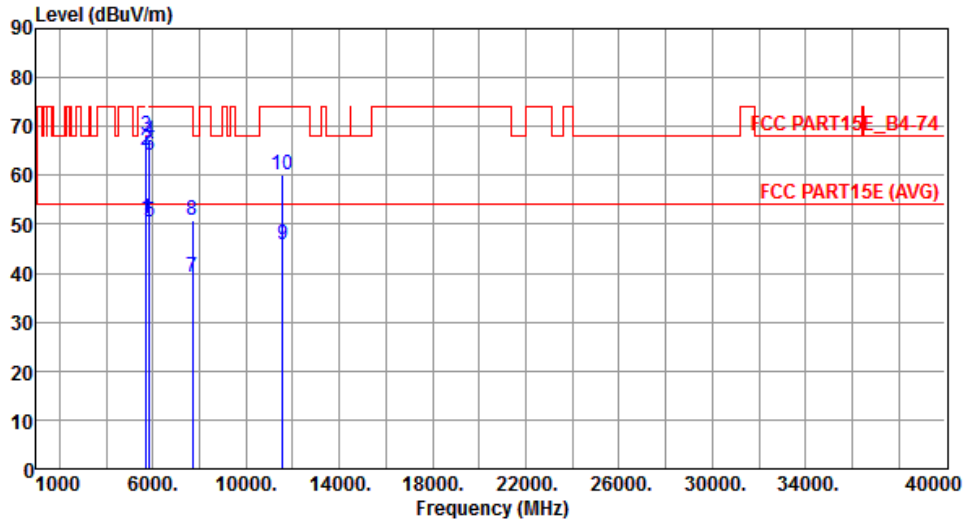


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5715.00	51.21	54.00	-2.79	45.56	5.65	Average	---	---
2	5715.00	65.13	74.00	-8.87	59.48	5.65	Peak	---	---
3	5725.00	68.22	78.20	-9.98	62.58	5.64	Peak	---	---
4	5850.00	67.15	78.20	-11.05	61.40	5.75	Peak	---	---
5	5860.00	50.36	54.00	-3.64	44.60	5.76	Average	---	---
6	5860.00	64.19	74.00	-9.81	58.43	5.76	Peak	---	---
7	7713.30	39.22	54.00	-14.78	29.13	10.09	Average	---	---
8	7713.30	50.83	74.00	-23.17	40.74	10.09	Peak	---	---
9	11570.00	45.93	54.00	-8.07	30.16	15.77	Average	---	---
10	11570.00	60.21	74.00	-13.79	44.44	15.77	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

<b>Modulation</b>	11a	<b>Test Freq. (MHz)</b>	5785
<b>Polarization</b>	Vertical		

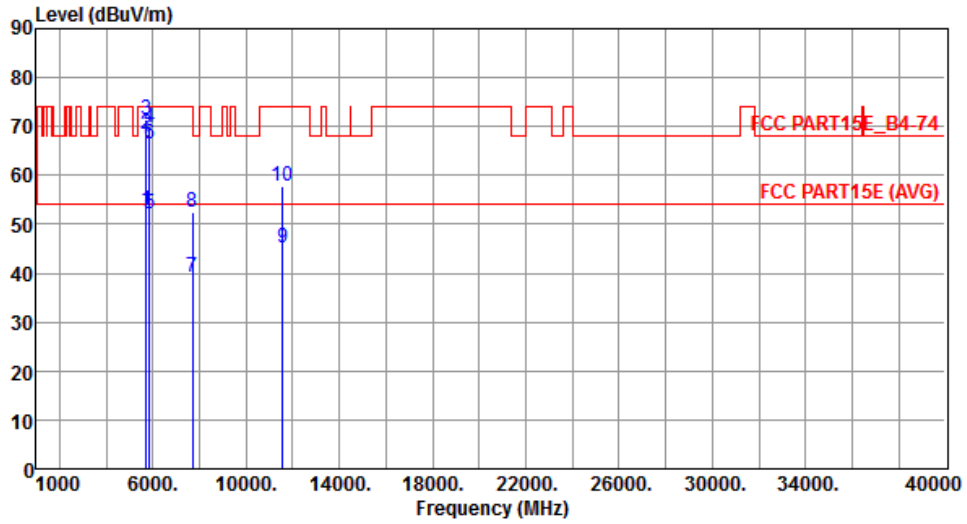


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5715.00	52.67	54.00	-1.33	47.02	5.65	Average	---	---
2	5715.00	68.40	74.00	-5.60	62.75	5.65	Peak	---	---
3	5725.00	71.54	78.20	-6.66	65.90	5.64	Peak	---	---
4	5850.00	69.91	78.20	-8.29	64.16	5.75	Peak	---	---
5	5860.00	52.03	54.00	-1.97	46.27	5.76	Average	---	---
6	5860.00	66.27	74.00	-7.73	60.51	5.76	Peak	---	---
7	7713.30	39.21	54.00	-14.79	29.12	10.09	Average	---	---
8	7713.30	52.37	74.00	-21.63	42.28	10.09	Peak	---	---
9	11570.00	45.21	54.00	-8.79	29.44	15.77	Average	---	---
10	11570.00	57.73	74.00	-16.27	41.96	15.77	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

<b>Modulation</b>	11a	<b>Test Freq. (MHz)</b>	5825
<b>Polarization</b>	Horizontal		

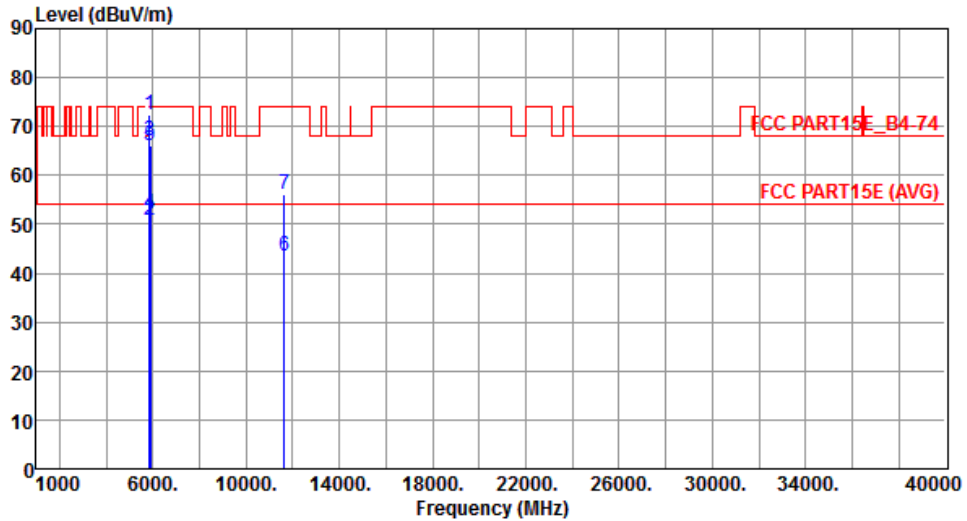


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5850.00	72.51	78.20	-5.69	66.76	5.75	Peak	---	---
2	5860.00	50.75	54.00	-3.25	44.99	5.76	Average	---	---
3	5860.00	67.16	74.00	-6.84	61.40	5.76	Peak	---	---
4	5877.00	52.19	54.00	-1.81	46.39	5.80	Average	---	---
5	5877.00	66.02	74.00	-7.98	60.22	5.80	Peak	---	---
6	11650.00	43.43	54.00	-10.57	27.87	15.56	Average	---	---
7	11650.00	56.08	74.00	-17.92	40.52	15.56	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

<b>Modulation</b>	11a	<b>Test Freq. (MHz)</b>	5825
<b>Polarization</b>	Vertical		

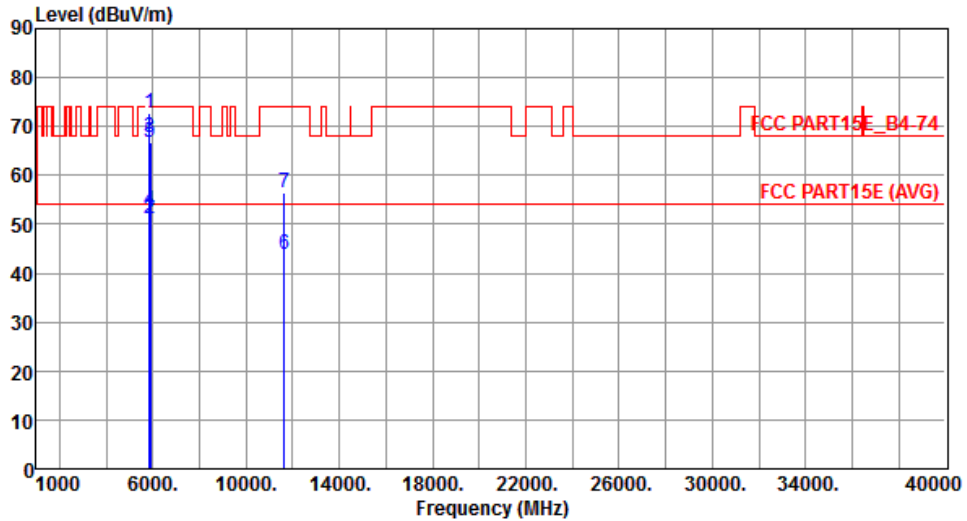


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5850.00	72.74	78.20	-5.46	66.99	5.75	Peak	---	---
2	5860.00	51.16	54.00	-2.84	45.40	5.76	Average	---	---
3	5860.00	67.61	74.00	-6.39	61.85	5.76	Peak	---	---
4	5877.00	52.89	54.00	-1.11	47.09	5.80	Average	---	---
5	5877.00	66.66	74.00	-7.34	60.86	5.80	Peak	---	---
6	11650.00	43.86	54.00	-10.14	28.30	15.56	Average	---	---
7	11650.00	56.34	74.00	-17.66	40.78	15.56	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)


\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

### 3.5.6 Transmitter Radiated Unwanted Emissions (Above 1GHz) for HT20

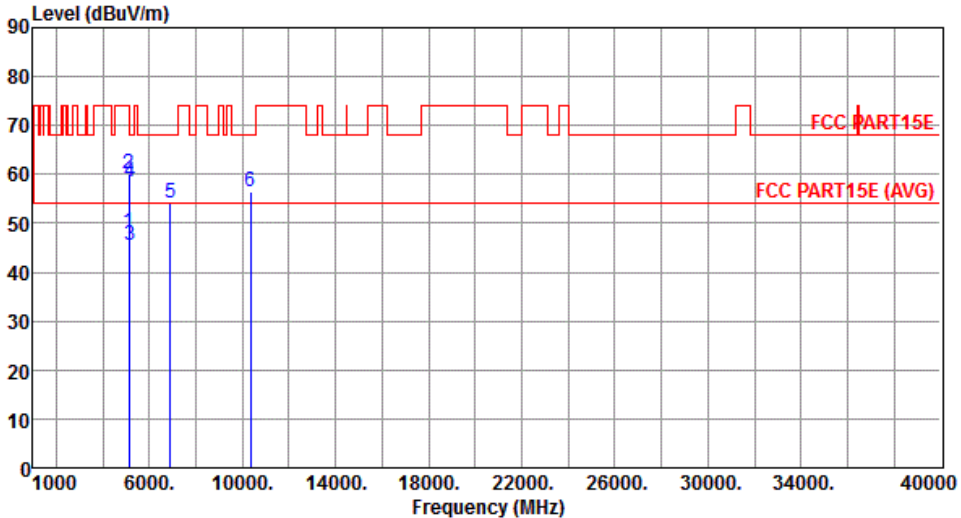Modulation	HT20	Test Freq. (MHz)	5180																																																																						
Polarization	Horizontal																																																																								
																																																																									
	<table border="1"> <thead> <tr> <th>Freq.</th> <th>Emission level</th> <th>Limit</th> <th>Margin</th> <th>SA reading</th> <th>Factor</th> <th>Remark</th> <th>ANT High</th> <th>Turn Table</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB</th> <th></th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5127.00</td> <td>48.24</td> <td>54.00</td> <td>-5.76</td> <td>42.80</td> <td>5.44</td> <td>Average</td> <td>---</td> </tr> <tr> <td>2</td> <td>5127.00</td> <td>59.96</td> <td>74.00</td> <td>-14.04</td> <td>54.52</td> <td>5.44</td> <td>Peak</td> <td>---</td> </tr> <tr> <td>3</td> <td>5150.00</td> <td>45.61</td> <td>54.00</td> <td>-8.39</td> <td>40.15</td> <td>5.46</td> <td>Average</td> <td>---</td> </tr> <tr> <td>4</td> <td>5150.00</td> <td>58.46</td> <td>74.00</td> <td>-15.54</td> <td>53.00</td> <td>5.46</td> <td>Peak</td> <td>---</td> </tr> <tr> <td>5</td> <td>6906.70</td> <td>54.03</td> <td>68.20</td> <td>-14.17</td> <td>45.62</td> <td>8.41</td> <td>Peak</td> <td>---</td> </tr> <tr> <td>6</td> <td>10360.00</td> <td>56.45</td> <td>68.20</td> <td>-11.75</td> <td>41.04</td> <td>15.41</td> <td>Peak</td> <td>---</td> </tr> </tbody> </table>	Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table	MHz	dBuV/m	dBuV/m	dB	dBuV	dB		cm	deg	1	5127.00	48.24	54.00	-5.76	42.80	5.44	Average	---	2	5127.00	59.96	74.00	-14.04	54.52	5.44	Peak	---	3	5150.00	45.61	54.00	-8.39	40.15	5.46	Average	---	4	5150.00	58.46	74.00	-15.54	53.00	5.46	Peak	---	5	6906.70	54.03	68.20	-14.17	45.62	8.41	Peak	---	6	10360.00	56.45	68.20	-11.75	41.04	15.41	Peak	---
Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table																																																																	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB		cm	deg																																																																	
1	5127.00	48.24	54.00	-5.76	42.80	5.44	Average	---																																																																	
2	5127.00	59.96	74.00	-14.04	54.52	5.44	Peak	---																																																																	
3	5150.00	45.61	54.00	-8.39	40.15	5.46	Average	---																																																																	
4	5150.00	58.46	74.00	-15.54	53.00	5.46	Peak	---																																																																	
5	6906.70	54.03	68.20	-14.17	45.62	8.41	Peak	---																																																																	
6	10360.00	56.45	68.20	-11.75	41.04	15.41	Peak	---																																																																	
<p>Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)            *Factor includes antenna factor , cable loss and amplifier gain            Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).</p>																																																																									

<b>Modulation</b>	HT20	<b>Test Freq. (MHz)</b>	5180
<b>Polarization</b>	Vertical		

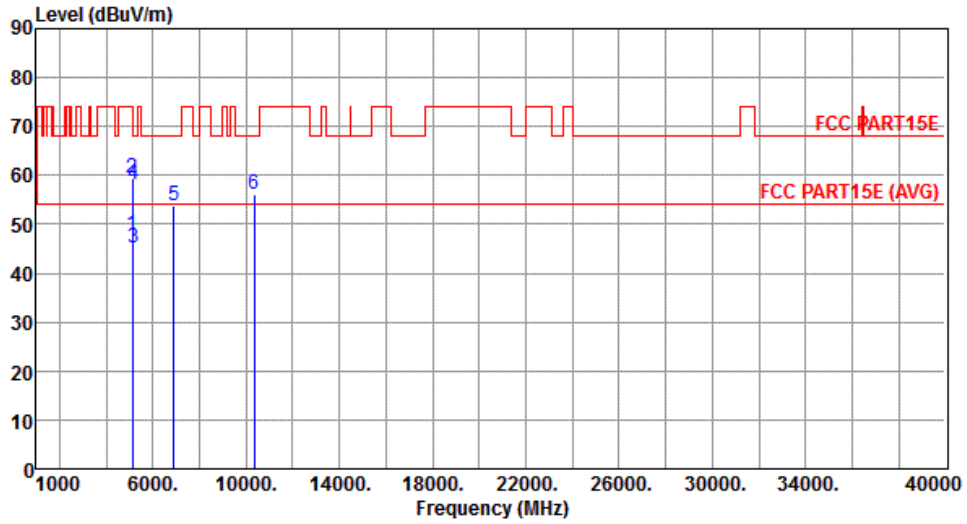


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5127.00	47.86	54.00	-6.14	42.42	5.44	Average	---	---
2	5127.00	59.52	74.00	-14.48	54.08	5.44	Peak	---	---
3	5150.00	45.32	54.00	-8.68	39.86	5.46	Average	---	---
4	5150.00	58.15	74.00	-15.85	52.69	5.46	Peak	---	---
5	6906.70	53.72	68.20	-14.48	45.31	8.41	Peak	---	---
6	10360.00	56.11	68.20	-12.09	40.70	15.41	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

<b>Modulation</b>	HT20	<b>Test Freq. (MHz)</b>	5200
<b>Polarization</b>	Horizontal		

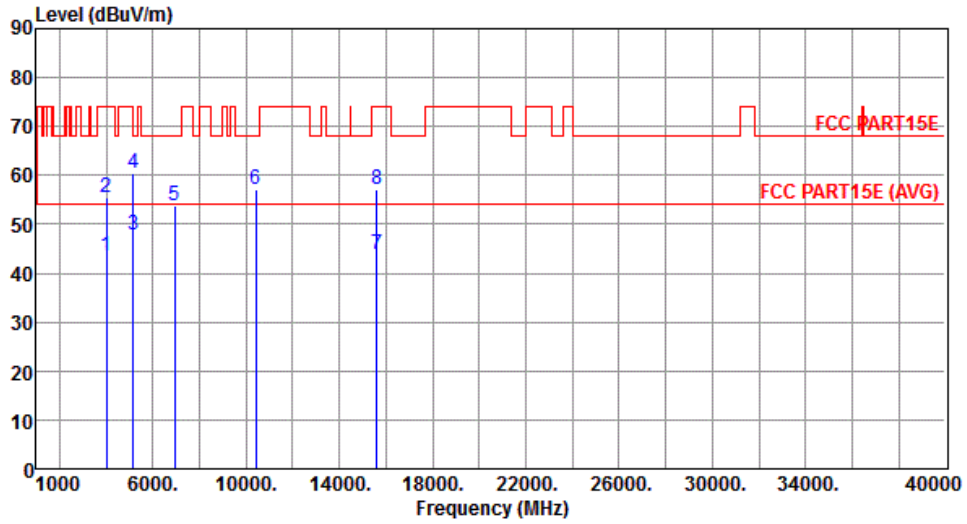

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	4000.00	43.64	54.00	-10.36	42.02	1.62	Average	---	---
2	4000.00	55.43	74.00	-18.57	53.81	1.62	Peak	---	---
3	5147.00	47.85	54.00	-6.15	42.39	5.46	Average	---	---
4	5147.00	60.57	74.00	-13.43	55.11	5.46	Peak	---	---
5	6933.30	53.80	68.20	-14.40	45.35	8.45	Peak	---	---
6	10400.00	56.98	68.20	-11.22	41.43	15.55	Peak	---	---
7	15600.00	43.75	54.00	-10.25	28.19	15.56	Average	---	---
8	15600.00	57.02	74.00	-16.98	41.46	15.56	Peak	---	---


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



<b>Modulation</b>	HT20	<b>Test Freq. (MHz)</b>	5200
<b>Polarization</b>	Vertical		

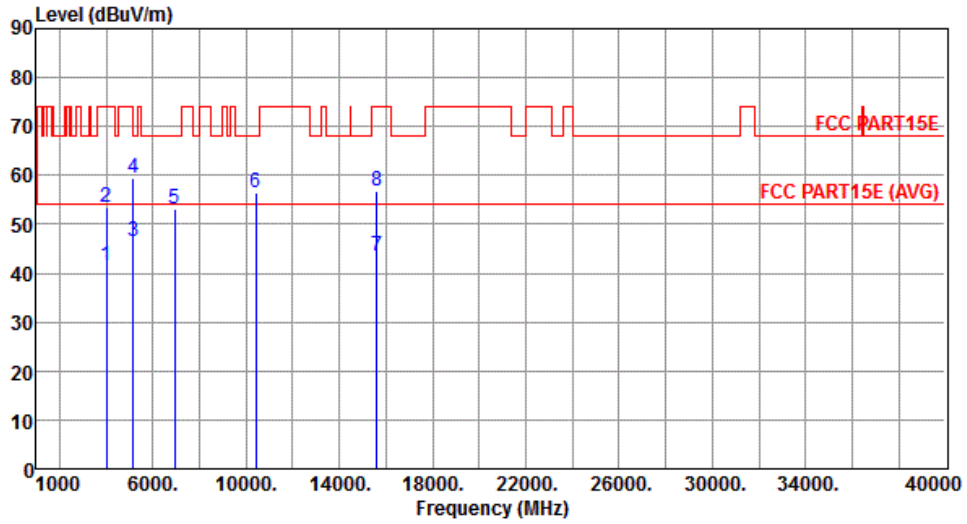


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	4000.00	41.52	54.00	-12.48	39.90	1.62	Average	---	---
2	4000.00	53.59	74.00	-20.41	51.97	1.62	Peak	---	---
3	5147.00	46.63	54.00	-7.37	41.17	5.46	Average	---	---
4	5147.00	59.52	74.00	-14.48	54.06	5.46	Peak	---	---
5	6933.30	53.11	68.20	-15.09	44.66	8.45	Peak	---	---
6	10400.00	56.49	68.20	-11.71	40.94	15.55	Peak	---	---
7	15600.00	43.56	54.00	-10.44	28.00	15.56	Average	---	---
8	15600.00	56.89	74.00	-17.11	41.33	15.56	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

<b>Modulation</b>	HT20	<b>Test Freq. (MHz)</b>	5240
<b>Polarization</b>	Horizontal		

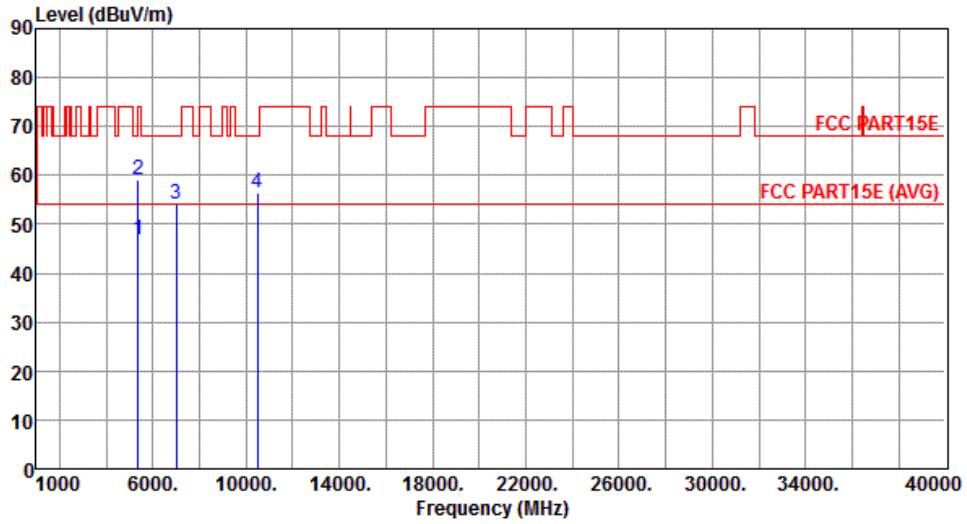


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5350.00	46.80	54.00	-7.20	41.24	5.56	Average	---	---
2	5350.00	59.10	74.00	-14.90	53.54	5.56	Peak	---	---
3	6986.70	54.07	68.20	-14.13	45.56	8.51	Peak	---	---
4	10480.00	56.33	68.20	-11.87	40.47	15.86	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

<b>Modulation</b>	HT20	<b>Test Freq. (MHz)</b>	5240
<b>Polarization</b>	Vertical		

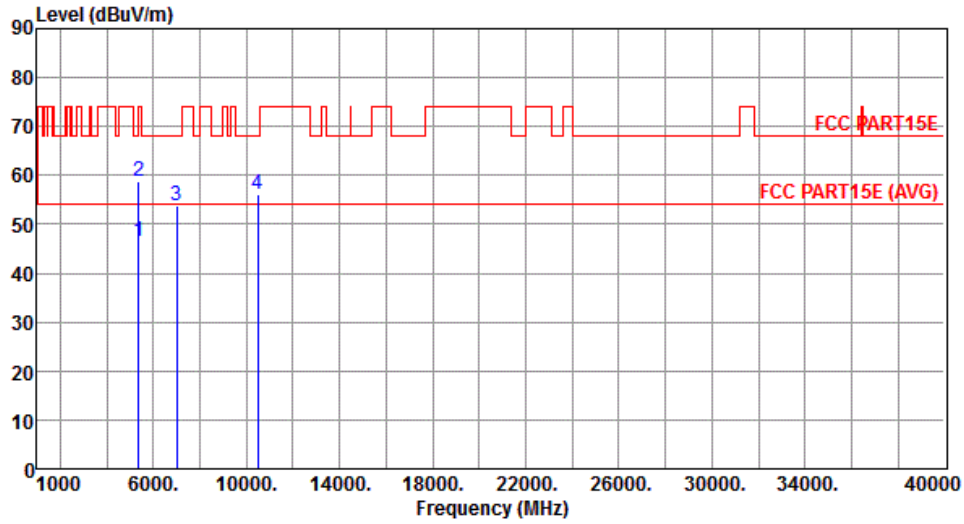


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5350.00	46.43	54.00	-7.57	40.87	5.56	Average	---	---
2	5350.00	58.72	74.00	-15.28	53.16	5.56	Peak	---	---
3	6986.70	53.76	68.20	-14.44	45.25	8.51	Peak	---	---
4	10480.00	56.11	68.20	-12.09	40.25	15.86	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

<b>Modulation</b>	HT20	<b>Test Freq. (MHz)</b>	5745
<b>Polarization</b>	Horizontal		

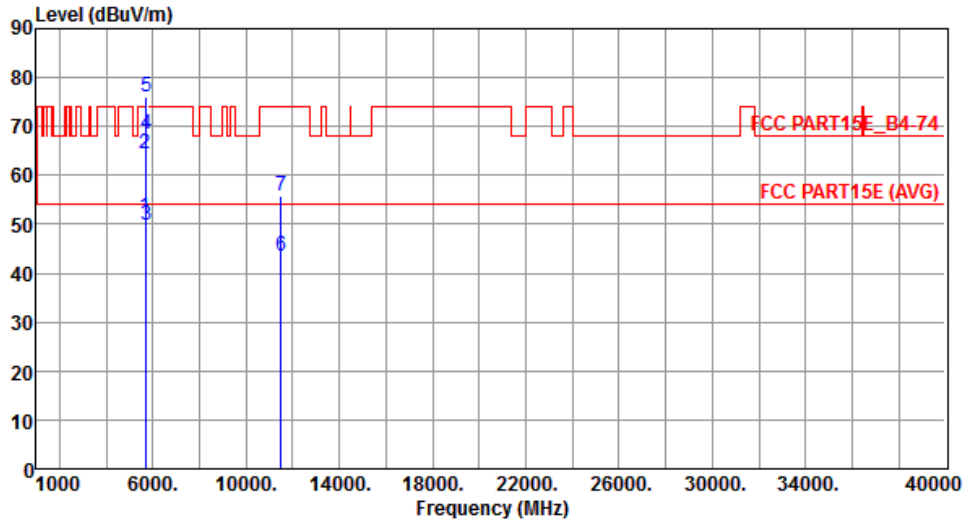


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5692.00	51.46	54.00	-2.54	45.81	5.65	Average	---	---
2	5692.00	64.49	74.00	-9.51	58.84	5.65	Peak	---	---
3	5715.00	49.67	54.00	-4.33	44.02	5.65	Average	---	---
4	5715.00	68.57	74.00	-5.43	62.92	5.65	Peak	---	---
5	5725.00	75.93	78.20	-2.27	70.29	5.64	Peak	---	---
6	11490.00	43.36	54.00	-10.64	27.43	15.93	Average	---	---
7	11490.00	55.64	74.00	-18.36	39.71	15.93	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

<b>Modulation</b>	HT20	<b>Test Freq. (MHz)</b>	5745
<b>Polarization</b>	Vertical		

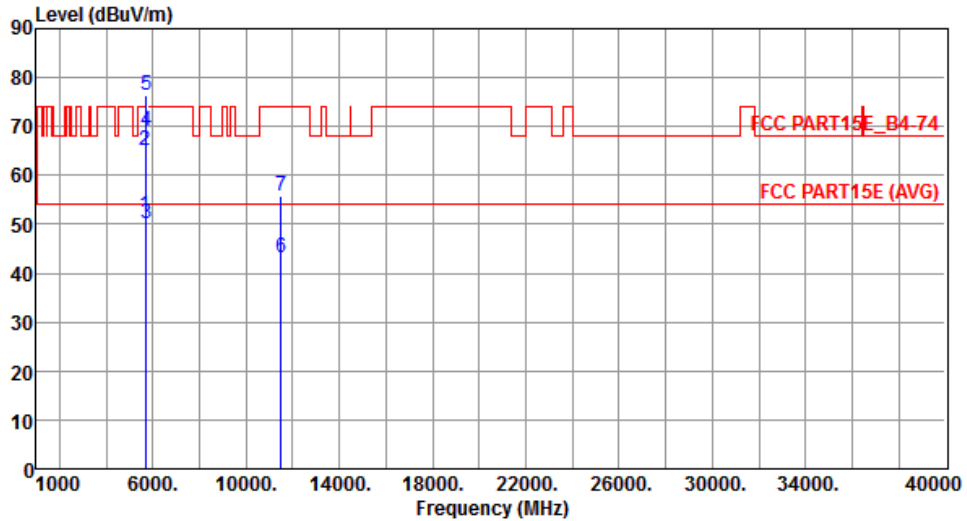


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5692.00	51.93	54.00	-2.07	46.28	5.65	Average	---	---
2	5692.00	64.97	74.00	-9.03	59.32	5.65	Peak	---	---
3	5715.00	50.16	54.00	-3.84	44.51	5.65	Average	---	---
4	5715.00	69.01	74.00	-4.99	63.36	5.65	Peak	---	---
5	5725.00	76.54	78.20	-1.66	70.90	5.64	Peak	---	---
6	11490.00	43.22	54.00	-10.78	27.29	15.93	Average	---	---
7	11490.00	55.89	74.00	-18.11	39.96	15.93	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

<b>Modulation</b>	HT20	<b>Test Freq. (MHz)</b>	5785
<b>Polarization</b>	Horizontal		

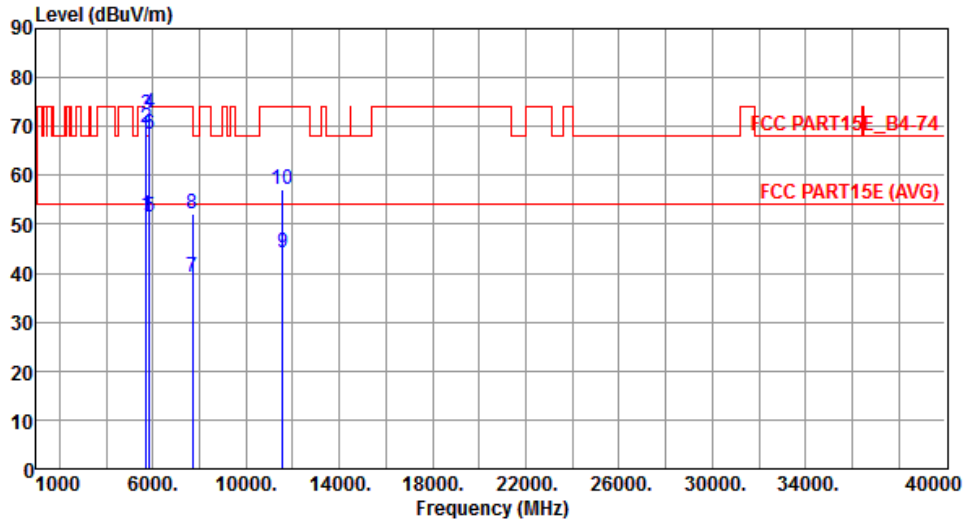


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5715.00	51.69	54.00	-2.31	46.04	5.65	Average	---	---
2	5715.00	69.82	74.00	-4.18	64.17	5.65	Peak	---	---
3	5725.00	72.54	78.20	-5.66	66.90	5.64	Peak	---	---
4	5850.00	72.81	78.20	-5.39	67.06	5.75	Peak	---	---
5	5860.00	51.36	54.00	-2.64	45.60	5.76	Average	---	---
6	5860.00	68.27	74.00	-5.73	62.51	5.76	Peak	---	---
7	7713.30	39.32	54.00	-14.68	29.23	10.09	Average	---	---
8	7713.30	52.29	74.00	-21.71	42.20	10.09	Peak	---	---
9	11570.00	44.26	54.00	-9.74	28.49	15.77	Average	---	---
10	11570.00	57.01	74.00	-16.99	41.24	15.77	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

<b>Modulation</b>	HT20	<b>Test Freq. (MHz)</b>	5785
<b>Polarization</b>	Vertical		

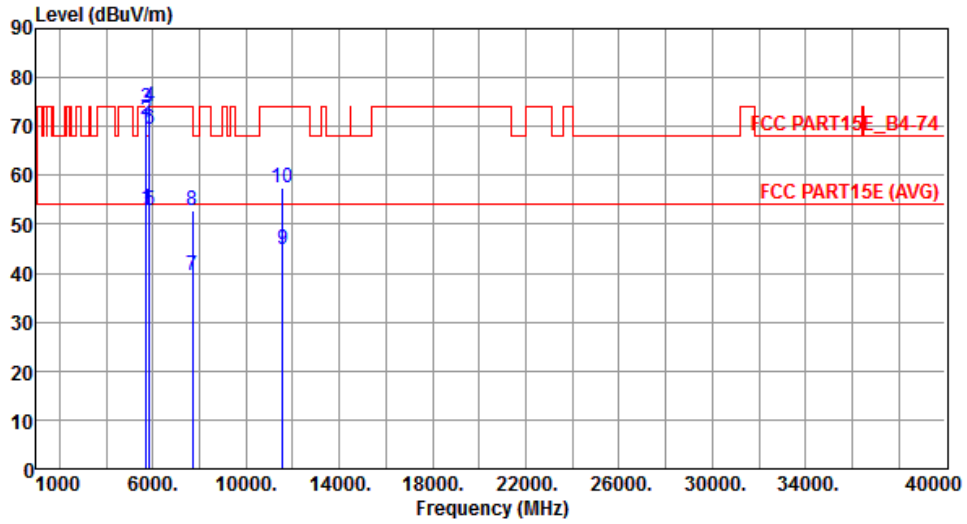


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5715.00	52.97	54.00	-1.03	47.32	5.65	Average	---	---
2	5715.00	71.27	74.00	-2.73	65.62	5.65	Peak	---	---
3	5725.00	73.83	78.20	-4.37	68.19	5.64	Peak	---	---
4	5850.00	74.06	78.20	-4.14	68.31	5.75	Peak	---	---
5	5860.00	52.74	54.00	-1.26	46.98	5.76	Average	---	---
6	5860.00	69.52	74.00	-4.48	63.76	5.76	Peak	---	---
7	7713.30	39.64	54.00	-14.36	29.55	10.09	Average	---	---
8	7713.30	52.70	74.00	-21.30	42.61	10.09	Peak	---	---
9	11570.00	44.98	54.00	-9.02	29.21	15.77	Average	---	---
10	11570.00	57.54	74.00	-16.46	41.77	15.77	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

<b>Modulation</b>	HT20	<b>Test Freq. (MHz)</b>	5825
<b>Polarization</b>	Horizontal		

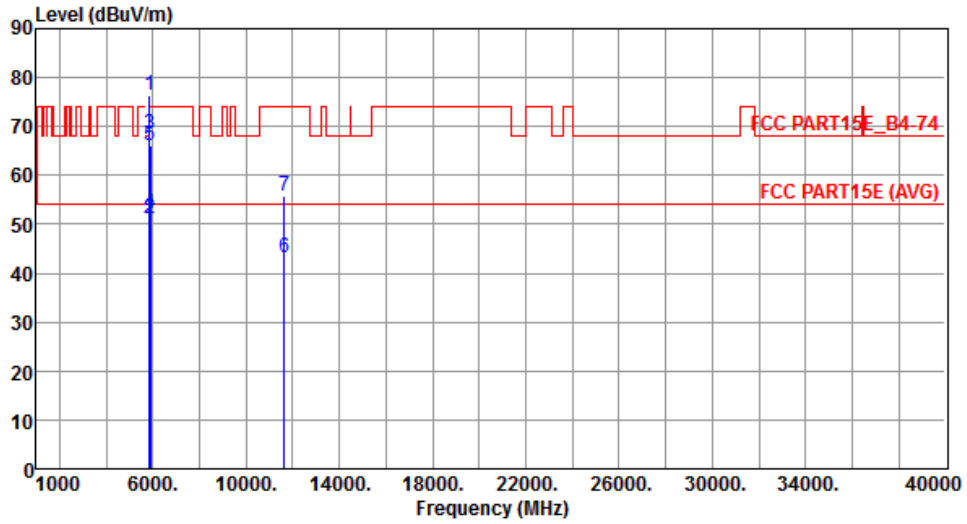

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5850.00	76.43	78.20	-1.77	70.68	5.75	Peak	---	---
2	5860.00	51.16	54.00	-2.84	45.40	5.76	Average	---	---
3	5860.00	68.42	74.00	-5.58	62.66	5.76	Peak	---	---
4	5877.00	52.05	54.00	-1.95	46.25	5.80	Average	---	---
5	5877.00	65.93	74.00	-8.07	60.13	5.80	Peak	---	---
6	11650.00	43.02	54.00	-10.98	27.46	15.56	Average	---	---
7	11650.00	55.94	74.00	-18.06	40.38	15.56	Peak	---	---


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



<b>Modulation</b>	HT20	<b>Test Freq. (MHz)</b>	5825
<b>Polarization</b>	Vertical		

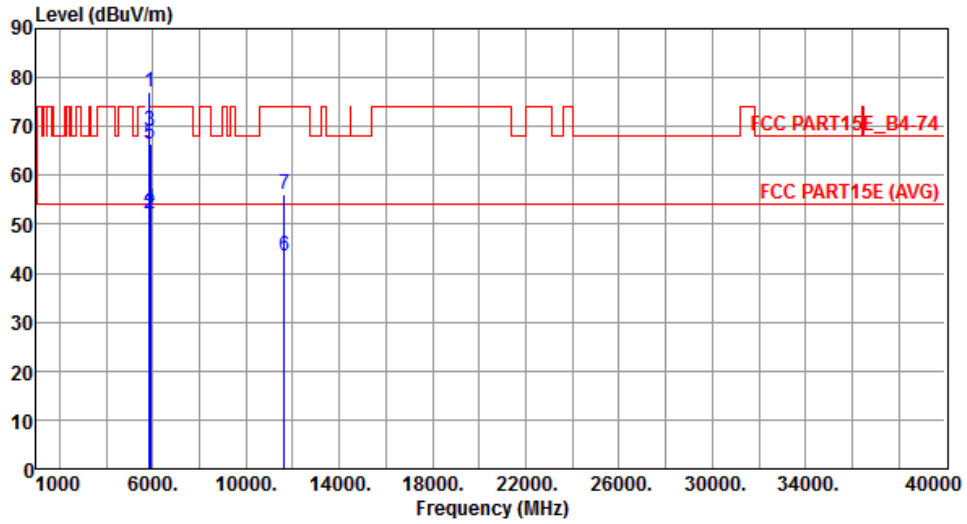


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5850.00	77.15	78.20	-1.05	71.40	5.75	Peak	---	---
2	5860.00	52.01	54.00	-1.99	46.25	5.76	Average	---	---
3	5860.00	69.14	74.00	-4.86	63.38	5.76	Peak	---	---
4	5877.00	53.00	54.00	-1.00	47.20	5.80	Average	---	---
5	5877.00	66.52	74.00	-7.48	60.72	5.80	Peak	---	---
6	11650.00	43.43	54.00	-10.57	27.87	15.56	Average	---	---
7	11650.00	56.18	74.00	-17.82	40.62	15.56	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)


\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

### 3.5.7 Transmitter Radiated Unwanted Emissions (Above 1GHz) for HT40

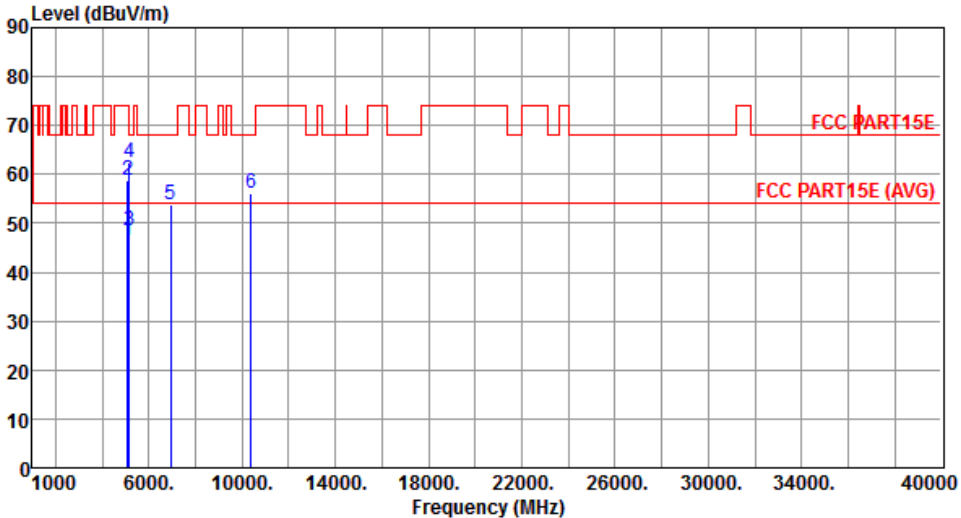Modulation	HT40	Test Freq. (MHz)	5190																																																																													
Polarization	Horizontal																																																																															
																																																																																
	<table border="1"> <thead> <tr> <th>Freq.</th> <th>Emission level</th> <th>Limit</th> <th>Margin</th> <th>SA reading</th> <th>Factor</th> <th>Remark</th> <th>ANT High cm</th> <th>Turn Table deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB</th> <th></th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5087.00</td> <td>46.40</td> <td>54.00</td> <td>-7.60</td> <td>41.00</td> <td>5.40</td> <td>Average</td> <td>---</td> </tr> <tr> <td>2</td> <td>5087.00</td> <td>58.87</td> <td>74.00</td> <td>-15.13</td> <td>53.47</td> <td>5.40</td> <td>Peak</td> <td>---</td> </tr> <tr> <td>3</td> <td>5150.00</td> <td>48.32</td> <td>54.00</td> <td>-5.68</td> <td>42.86</td> <td>5.46</td> <td>Average</td> <td>---</td> </tr> <tr> <td>4</td> <td>5150.00</td> <td>62.40</td> <td>74.00</td> <td>-11.60</td> <td>56.94</td> <td>5.46</td> <td>Peak</td> <td>---</td> </tr> <tr> <td>5</td> <td>6920.00</td> <td>53.77</td> <td>68.20</td> <td>-14.43</td> <td>45.34</td> <td>8.43</td> <td>Peak</td> <td>---</td> </tr> <tr> <td>6</td> <td>10380.00</td> <td>56.27</td> <td>68.20</td> <td>-11.93</td> <td>40.79</td> <td>15.48</td> <td>Peak</td> <td>---</td> </tr> </tbody> </table>	Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High cm	Turn Table deg	MHz	dBuV/m	dBuV/m	dB	dBuV	dB				1	5087.00	46.40	54.00	-7.60	41.00	5.40	Average	---	2	5087.00	58.87	74.00	-15.13	53.47	5.40	Peak	---	3	5150.00	48.32	54.00	-5.68	42.86	5.46	Average	---	4	5150.00	62.40	74.00	-11.60	56.94	5.46	Peak	---	5	6920.00	53.77	68.20	-14.43	45.34	8.43	Peak	---	6	10380.00	56.27	68.20	-11.93	40.79	15.48	Peak	---							
Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High cm	Turn Table deg																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB																																																																											
1	5087.00	46.40	54.00	-7.60	41.00	5.40	Average	---																																																																								
2	5087.00	58.87	74.00	-15.13	53.47	5.40	Peak	---																																																																								
3	5150.00	48.32	54.00	-5.68	42.86	5.46	Average	---																																																																								
4	5150.00	62.40	74.00	-11.60	56.94	5.46	Peak	---																																																																								
5	6920.00	53.77	68.20	-14.43	45.34	8.43	Peak	---																																																																								
6	10380.00	56.27	68.20	-11.93	40.79	15.48	Peak	---																																																																								
<p>Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)            *Factor includes antenna factor , cable loss and amplifier gain            Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).</p>																																																																																

<b>Modulation</b>	HT40	<b>Test Freq. (MHz)</b>	5190
<b>Polarization</b>	Vertical		

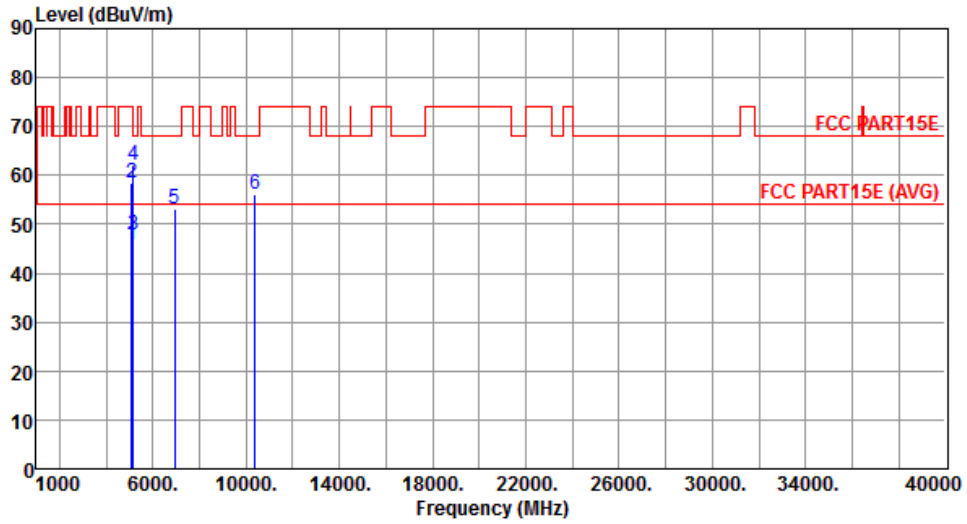


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5087.00	45.93	54.00	-8.07	40.53	5.40	Average	---	---
2	5087.00	58.36	74.00	-15.64	52.96	5.40	Peak	---	---
3	5150.00	47.82	54.00	-6.18	42.36	5.46	Average	---	---
4	5150.00	61.96	74.00	-12.04	56.50	5.46	Peak	---	---
5	6920.00	53.27	68.20	-14.93	44.84	8.43	Peak	---	---
6	10380.00	55.99	68.20	-12.21	40.51	15.48	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

<b>Modulation</b>	HT40	<b>Test Freq. (MHz)</b>	5230
<b>Polarization</b>	Horizontal		

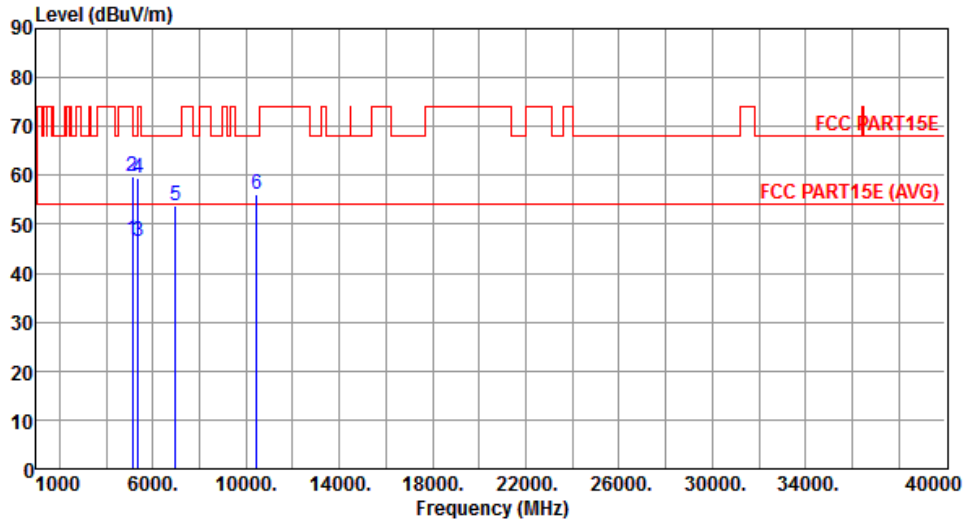


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5125.00	46.88	54.00	-7.12	41.44	5.44	Average	---	---
2	5125.00	59.68	74.00	-14.32	54.24	5.44	Peak	---	---
3	5350.00	46.49	54.00	-7.51	40.93	5.56	Average	---	---
4	5350.00	59.43	74.00	-14.57	53.87	5.56	Peak	---	---
5	6973.30	53.75	68.20	-14.45	45.25	8.50	Peak	---	---
6	10460.00	56.14	68.20	-12.06	40.36	15.78	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

<b>Modulation</b>	HT40	<b>Test Freq. (MHz)</b>	5230
<b>Polarization</b>	Vertical		

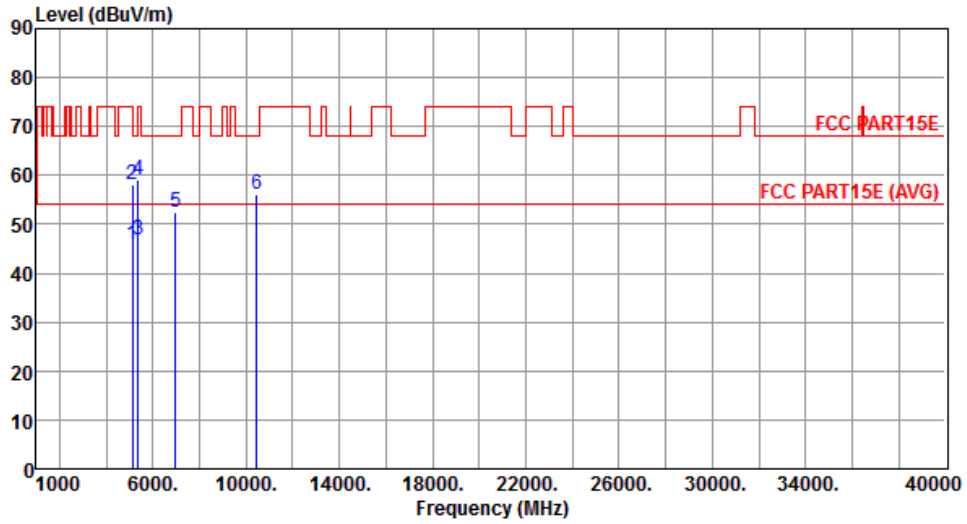


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5125.00	45.91	54.00	-8.09	40.47	5.44	Average	---	---
2	5125.00	58.17	74.00	-15.83	52.73	5.44	Peak	---	---
3	5350.00	46.81	54.00	-7.19	41.25	5.56	Average	---	---
4	5350.00	59.06	74.00	-14.94	53.50	5.56	Peak	---	---
5	6973.30	52.53	68.20	-15.67	44.03	8.50	Peak	---	---
6	10460.00	56.27	68.20	-11.93	40.49	15.78	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

<b>Modulation</b>	HT40	<b>Test Freq. (MHz)</b>	5755
<b>Polarization</b>	Horizontal		

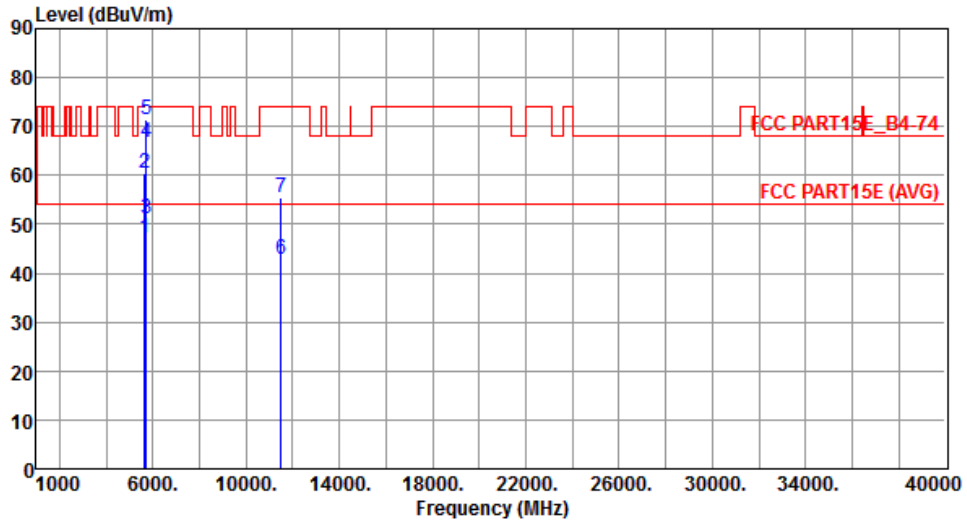


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5652.00	47.14	54.00	-6.86	41.50	5.64	Average	---	---
2	5652.00	60.29	74.00	-13.71	54.65	5.64	Peak	---	---
3	5715.00	51.06	54.00	-2.94	45.41	5.65	Average	---	---
4	5715.00	66.82	74.00	-7.18	61.17	5.65	Peak	---	---
5	5725.00	71.48	78.20	-6.72	65.84	5.64	Peak	---	---
6	11510.00	42.89	54.00	-11.11	26.97	15.92	Average	---	---
7	11510.00	55.32	74.00	-18.68	39.40	15.92	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

<b>Modulation</b>	HT40	<b>Test Freq. (MHz)</b>	5755
<b>Polarization</b>	Vertical		

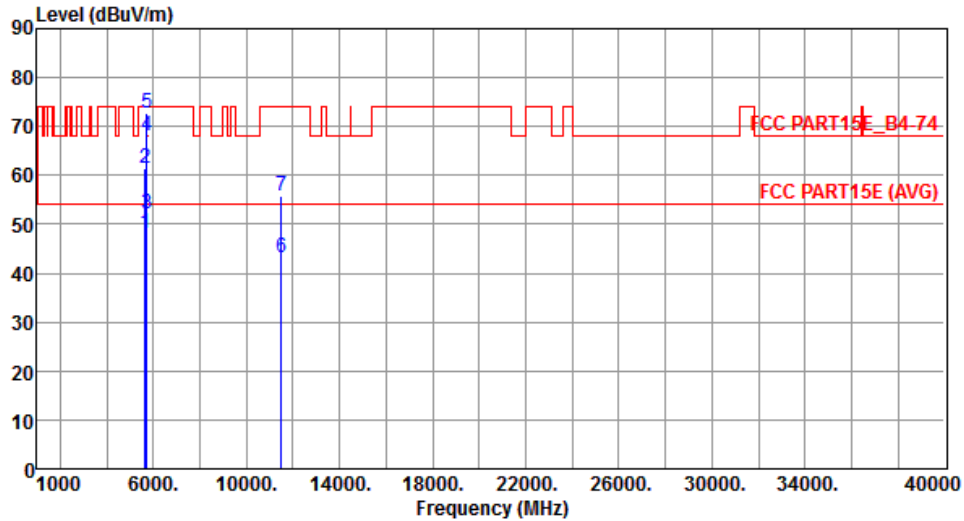


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5652.00	48.23	54.00	-5.77	42.59	5.64	Average	---	---
2	5652.00	61.41	74.00	-12.59	55.77	5.64	Peak	---	---
3	5715.00	52.29	54.00	-1.71	46.64	5.65	Average	---	---
4	5715.00	67.93	74.00	-6.07	62.28	5.65	Peak	---	---
5	5725.00	72.84	78.20	-5.36	67.20	5.64	Peak	---	---
6	11510.00	43.05	54.00	-10.95	27.13	15.92	Average	---	---
7	11510.00	55.63	74.00	-18.37	39.71	15.92	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

<b>Modulation</b>	HT40	<b>Test Freq. (MHz)</b>	5795
<b>Polarization</b>	Horizontal		

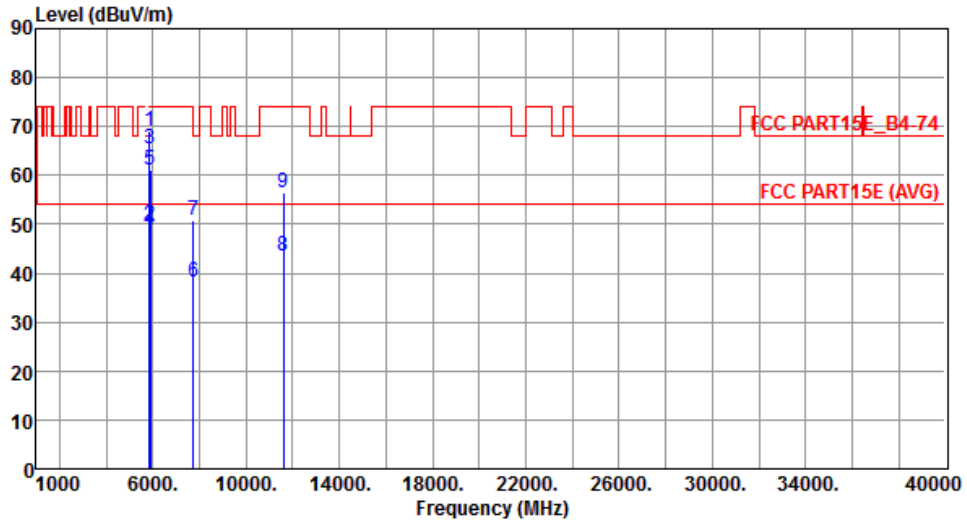

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5850.00	69.10	78.20	-9.10	63.35	5.75	Peak	---	---
2	5860.00	49.92	54.00	-4.08	44.16	5.76	Average	---	---
3	5860.00	65.57	74.00	-8.43	59.81	5.76	Peak	---	---
4	5897.00	48.72	54.00	-5.28	42.87	5.85	Average	---	---
5	5897.00	61.07	74.00	-12.93	55.22	5.85	Peak	---	---
6	7726.70	38.23	54.00	-15.77	28.15	10.08	Average	---	---
7	7726.70	50.86	74.00	-23.14	40.78	10.08	Peak	---	---
8	11590.00	43.61	54.00	-10.39	27.90	15.71	Average	---	---
9	11590.00	56.50	74.00	-17.50	40.79	15.71	Peak	---	---


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



<b>Modulation</b>	HT40	<b>Test Freq. (MHz)</b>	5795
<b>Polarization</b>	Vertical		

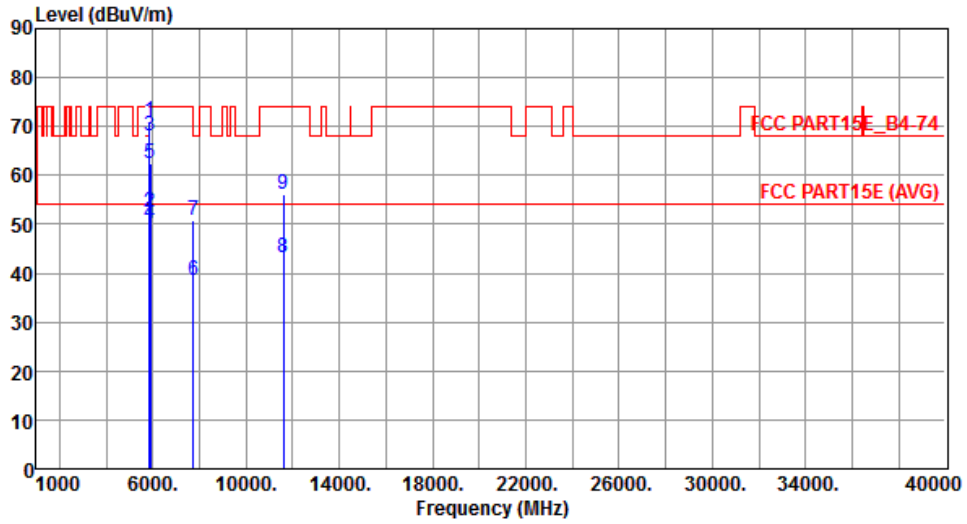

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5850.00	71.22	78.20	-6.98	65.47	5.75	Peak	---	---
2	5860.00	52.62	54.00	-1.38	46.86	5.76	Average	---	---
3	5860.00	67.95	74.00	-6.05	62.19	5.76	Peak	---	---
4	5897.00	50.27	54.00	-3.73	44.42	5.85	Average	---	---
5	5897.00	62.35	74.00	-11.65	56.50	5.85	Peak	---	---
6	7726.70	38.63	54.00	-15.37	28.55	10.08	Average	---	---
7	7726.70	50.96	74.00	-23.04	40.88	10.08	Peak	---	---
8	11590.00	43.23	54.00	-10.77	27.52	15.71	Average	---	---
9	11590.00	55.98	74.00	-18.02	40.27	15.71	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

## 3.6 Frequency Stability


### 3.6.1 Limit of Frequency Stability

Manufacturers of U-NII devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified in the user's manual.

### 3.6.2 Test Procedures

1. The EUT is installed in an environment test chamber with external power source.
2. Set the chamber to operate at 50 centigrade and external power source to output at nominal voltage of EUT.
3. A sufficient stabilization period at each temperature is used prior to each frequency measurement.
4. When temperature is stabled, measure the frequency stability.
5. The test shall be performed under -30 to 50 centigrade and 85 to 115 percent of the nominal voltage. Change setting of chamber and external power source to complete all conditions.

### 3.6.3 Test Setup

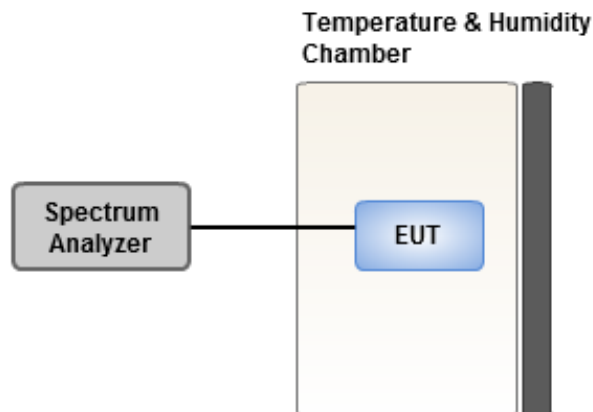

### 3.6.4 Test Result of Frequency Stability

Frequency: 5200 MHz	Frequency Drift (ppm)			
Temperature (°C)	0 minute	2 minutes	5 minutes	10 minutes
T20°C Vmax	0.62	0.68	0.29	0.10
T20°C Vmin	4.67	4.45	4.31	4.30
T50°C Vnom	4.54	4.38	4.29	4.35
T40°C Vnom	3.87	4.11	3.69	3.75
T30°C Vnom	3.05	3.23	3.64	3.33
T20°C Vnom	2.53	2.97	2.58	2.39
T10°C Vnom	2.28	1.91	1.69	1.62
T0°C Vnom	2.13	2.64	2.17	2.70
T-10°C Vnom	1.45	0.95	1.54	1.75
T-20°C Vnom	0.66	-0.27	0.30	0.35
T-30°C Vnom	0.03	0.03	0.28	-0.11
Vnom [Vac]: 120		Vmax [Vac]: 138		Vmin [Vac]: 102
Tnom [°C]: 20		Tmax [°C]: 50		Tmin [°C]: -30

Frequency: 5785 MHz	Frequency Drift (ppm)			
Temperature (°C)	0 minute	2 minutes	5 minutes	10 minutes
T20°C Vmax	1.46	1.06	0.78	1.21
T20°C Vmin	4.98	4.58	5.27	4.94
T50°C Vnom	4.13	4.79	4.65	5.02
T40°C Vnom	3.89	4.22	3.42	3.88
T30°C Vnom	2.39	2.83	3.40	2.44
T20°C Vnom	2.32	3.14	2.93	2.85
T10°C Vnom	2.05	2.98	2.60	2.67
T0°C Vnom	2.78	2.54	2.92	2.92
T-10°C Vnom	2.34	2.02	1.61	2.20
T-20°C Vnom	1.10	1.59	1.20	1.04
T-30°C Vnom	0.72	0.61	-0.14	0.46
Vnom [Vac]: 120		Vmax [Vac]: 138		Vmin [Vac]: 102
Tnom [°C]: 20		Tmax [°C]: 50		Tmin [°C]: -30

## 4 Test laboratory information

Established in 2012, ICC provides foremost EMC & RF Testing and advisory consultation services by our skilled engineers and technicians. Our services employ a wide variety of advanced edge test equipment and one of the widest certification extents in the business.

International Certification Corp, it is our definitive objective is to institute long term, trust-based associations with our clients. The expectation we set up with our clients is based on outstanding service, practical expertise and devotion to a certified value structure. Our passion is to grant our clients with best EMC / RF services by oriented knowledgeable and accommodating staff.

Our Test sites are located at Linkou District and Kwei Shan Hsiang. Location map can be found on our website <http://www.icertifi.com.tw>.

### **Linkou**

Tel: 886-2-2601-1640

No. 30-2, Ding Fwu Tsuen, Lin Kou  
District, New Taipei City, Taiwan,  
R.O.C.

### **Kwei Shan**

Tel: 886-3-271-8666

No. 3-1, Lane 6, Wen San 3rd  
St., Kwei Shan Hsiang, Tao Yuan  
Hsien 333, Taiwan, R.O.C.

### **Kwei Shan Site II**

Tel: 886-3-271-8640

No. 14-1, Lane 19, Wen San 3rd  
St., Kwei Shan Hsiang, Tao Yuan  
Hsien 333, Taiwan, R.O.C.

If you have any suggestion, please feel free to contact us as below information

Tel: 886-3-271-8666

Fax: 886-3-318-0155

Email: ICC\_Service@icertifi.com.tw

==END==